



# FCC RF Test Report

**APPLICANT** : Espressif Systems (Shanghai) Co.,Ltd.  
**EQUIPMENT** : 2.4GHz Wi-Fi & BT IoT Module  
**BRAND NAME** : ESPRESSIF  
**MODEL NAME** : ESP8685-WROOM-05  
**FCC ID** : 2AC7Z-ESP868505  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Jun. 15, 2022 ~ Jun. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 6

    1.8 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 12

    3.3 Power Spectral Density Measurement ..... 13

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 14

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 15

    3.6 AC Conducted Emission Measurement..... 19

    3.7 Antenna Requirements ..... 20

**4 LIST OF MEASURING EQUIPMENT ..... 21**

**5 UNCERTAINTY OF EVALUATION..... 22**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOT**

**APPENDIX E. DUTY CYCLE PLOTS**

**APPENDIX F. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR253115A	Rev. 01	Initial issue of report	Jul. 12, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.08 dB at 480.080 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.18 dB at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Espressif Systems (Shanghai) Co.,Ltd.**

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

## 1.2 Manufacturer

**Espressif Systems (Shanghai) Co.,Ltd.**

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP8685-WROOM-05
FCC ID	2AC7Z-ESP868505
HW Version	V1.1
SW Version	v1.1.3.4
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps : 9.74dBm (0.0094 W) Bluetooth LE 2Mbps : 10.42dBm (0.0110 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps : 1.019MHz Bluetooth LE 2Mbps : 2.026MHz
Antenna Type / Gain	PCB Antenna type with gain 3.96 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.


b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth 1Mbps Tx CH00_2402 MHz
	Mode 2: Bluetooth 1Mbps Tx CH19_2440 MHz
	Mode 3: Bluetooth 1Mbps Tx CH39_2480 MHz
	Mode 4: Bluetooth 2Mbps Tx CH00_2402 MHz
	Mode 5: Bluetooth 2Mbps Tx CH19_2440 MHz
	Mode 6: Bluetooth 2Mbps Tx CH38_2478 MHz
	Mode 7: Bluetooth 2Mbps Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth 1Mbps Tx CH00_2402 MHz
	Mode 2: Bluetooth 1Mbps Tx CH19_2440 MHz
	Mode 3: Bluetooth 1Mbps Tx CH39_2480 MHz
	Mode 4: Bluetooth 2Mbps Tx CH00_2402 MHz
	Mode 5: Bluetooth 2Mbps Tx CH19_2440 MHz
	Mode 6: Bluetooth 2Mbps Tx CH38_2478 MHz
	Mode 7: Bluetooth 2Mbps Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: Bluetooth TX + NB Charging



### 2.3 Connection Diagram of Test System

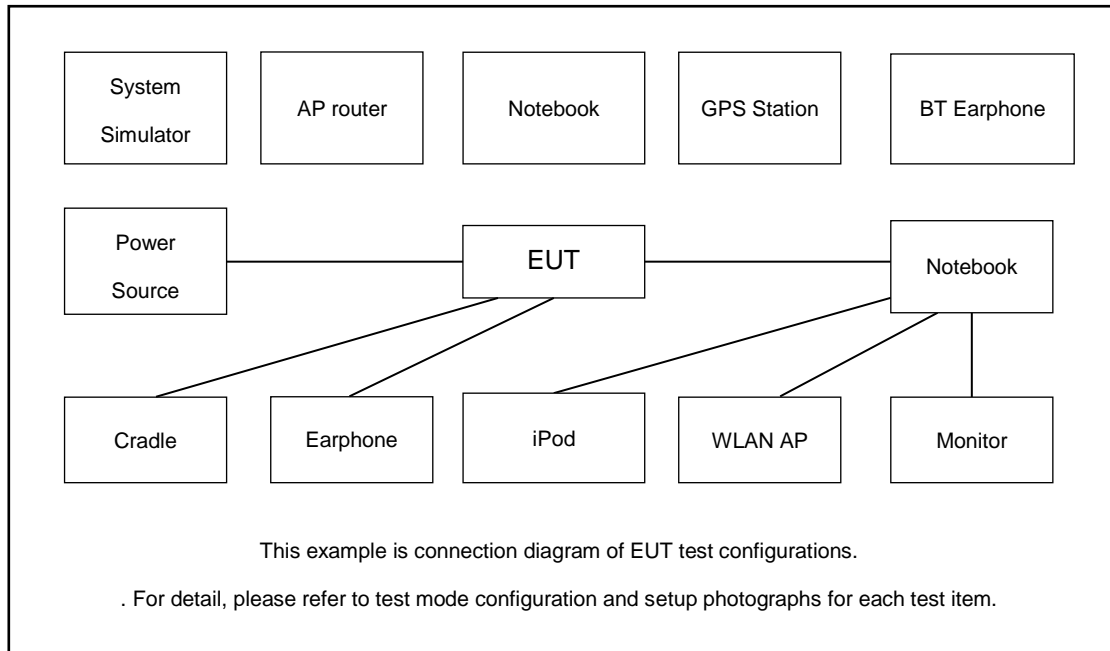

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	hard disk	N/A	N/A	N/A	N/A	N/A
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.30 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.30 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

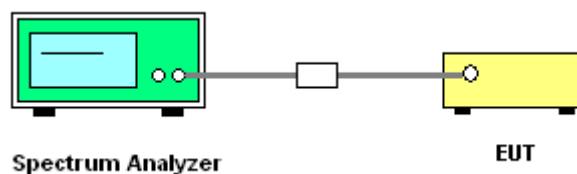

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

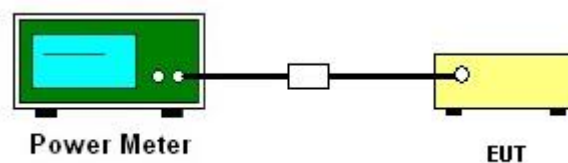

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

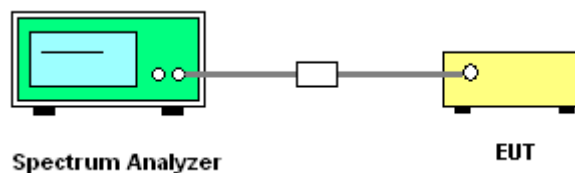

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

#### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Please refer to Appendix A.

#### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

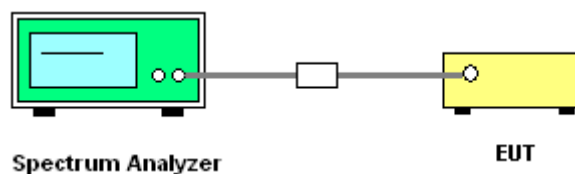

### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

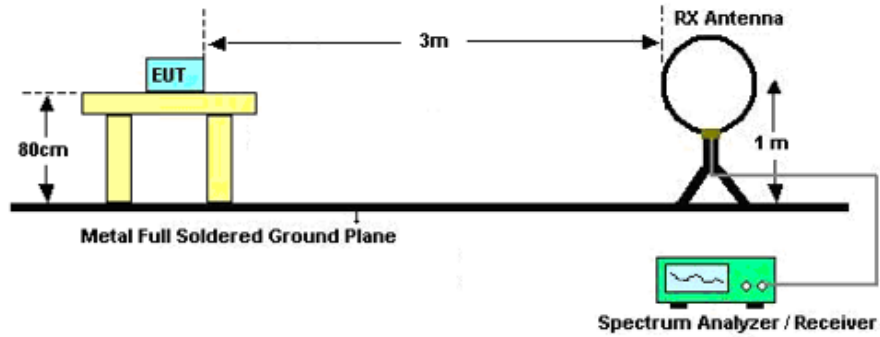

For radiated emissions from 30MHz to 1GHz

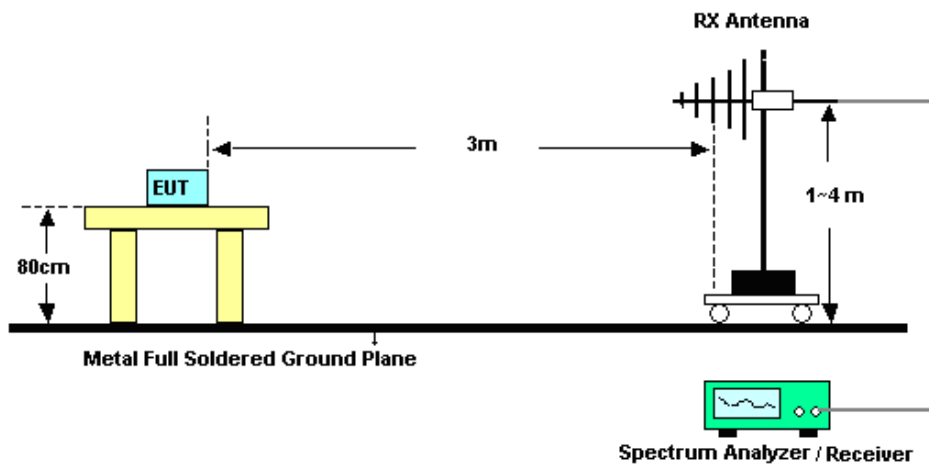

For radiated emissions above 1GHz

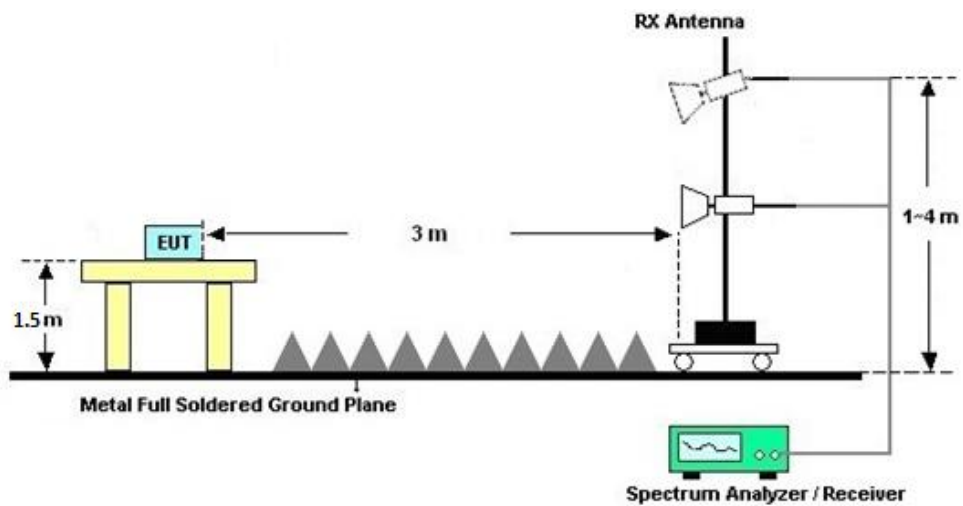



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C&D.

### **3.5.7 Duty Cycle**

Please refer to Appendix E.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C&D..



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

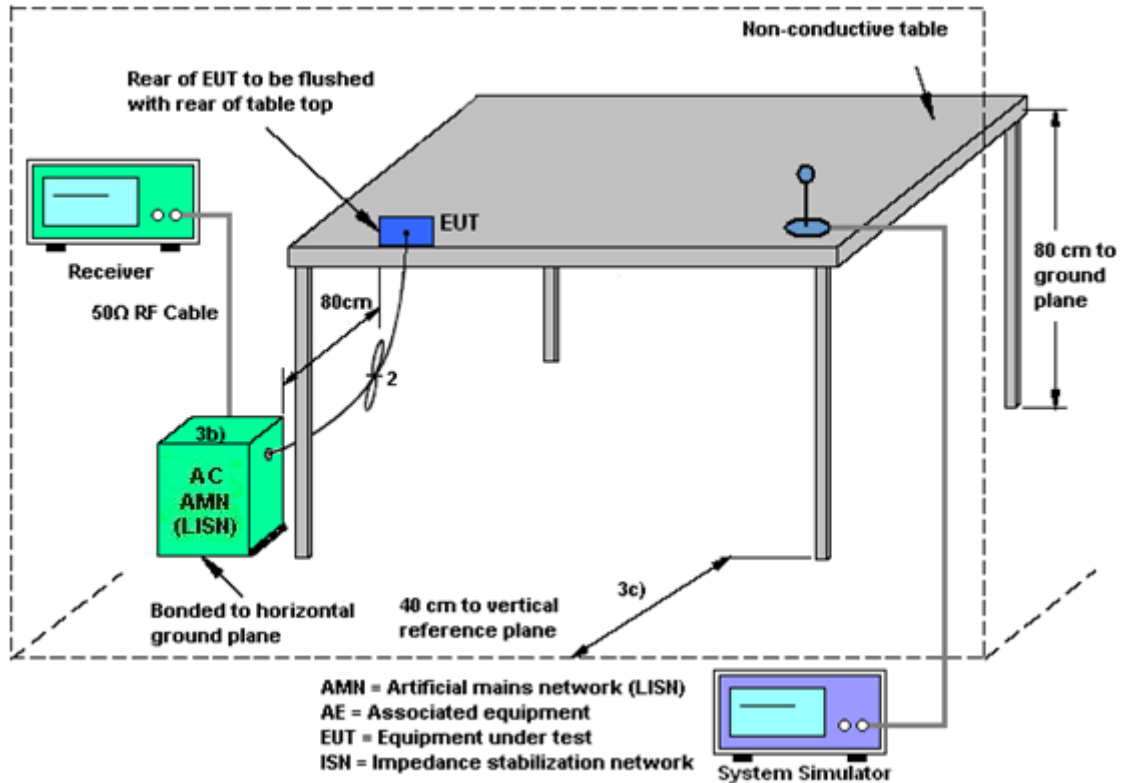

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 15, 2022 ~Jun. 26, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 26, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 26, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 26, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Jun. 15, 2022 ~Jun. 28, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 19, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Jul. 18, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 30, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jun. 15, 2022 ~Jun. 28, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	Jun. 15, 2022 ~Jun. 28, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 15, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 15, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 15, 2022 ~Jun. 28, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May. 24, 2022	Jun. 17, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Jun. 17, 2022	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**



## DTS Bandwidth


### Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.62	2401.66	2402.28	0.5	PASS
		2440	0.63	2439.65	2440.28	0.5	PASS
		2480	0.64	2479.65	2480.29	0.5	PASS
BLE_2M	Ant1	2402	1.09	2401.44	2402.53	0.5	PASS
		2440	1.09	2439.44	2440.53	0.5	PASS
		2480	1.09	2479.45	2480.54	0.5	PASS






Test Graphs

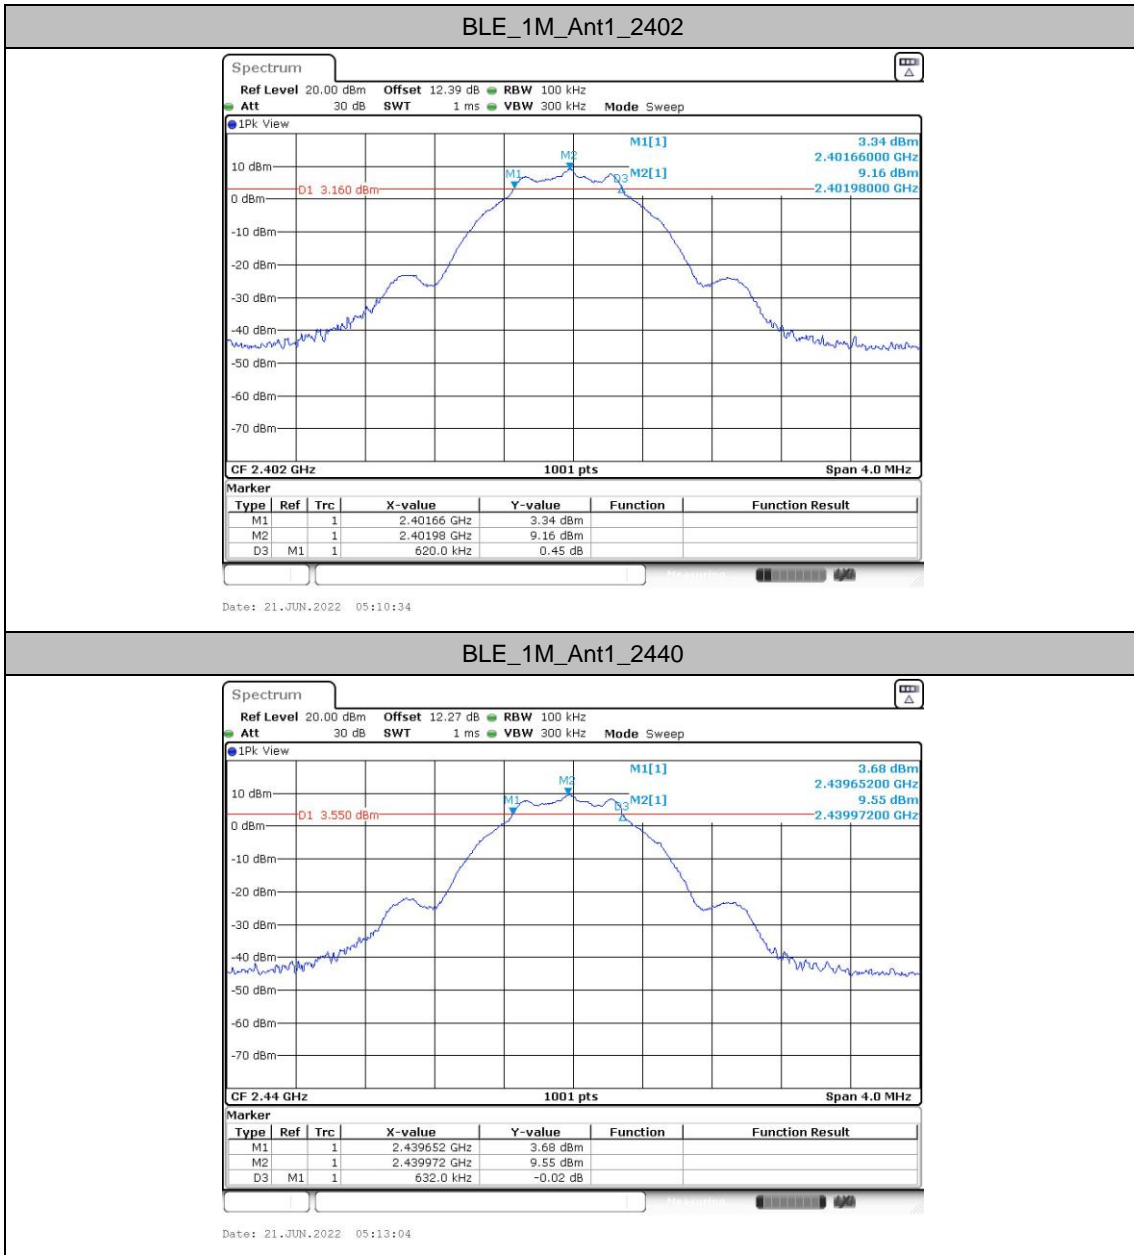




BLE\_1M\_Ant1\_2480

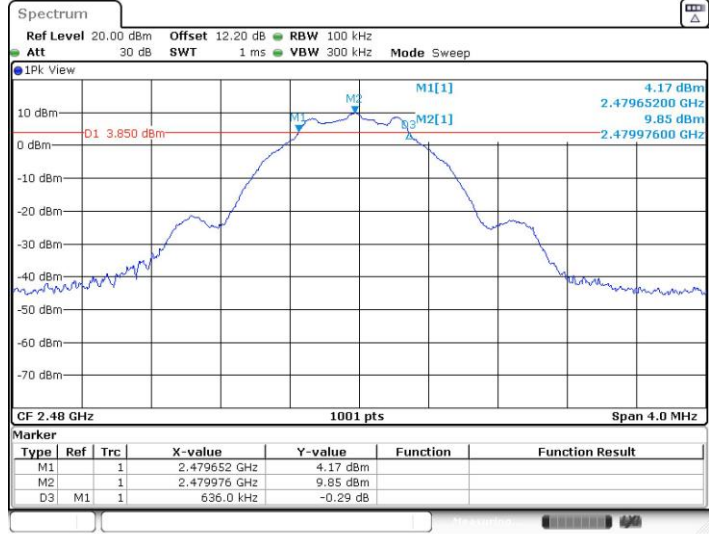

Date: 21.JUN.2022 05:15:59


BLE\_2M\_Ant1\_2402

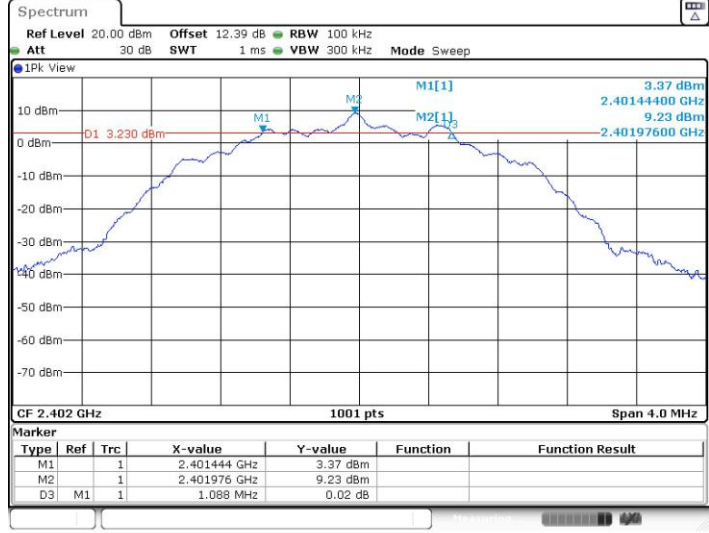

Date: 21.JUN.2022 05:18:32




BLE\_2M\_Ant1\_2440

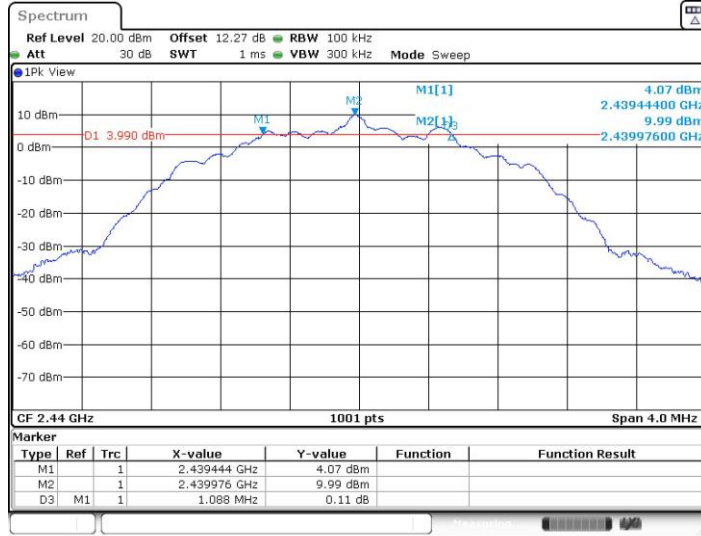

Date: 21 JUN 2022 05:20:54

BLE\_2M\_Ant1\_2480

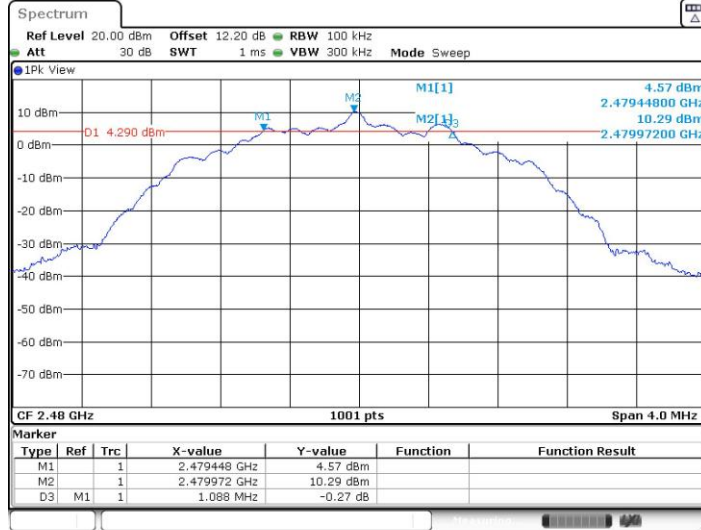

Date: 21 JUN 2022 05:22:58




## Occupied Channel Bandwidth

### Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.019	2401.461	2402.480	---	---
		2440	1.015	2439.461	2440.476	---	---
		2480	1.015	2479.461	2480.476	---	---
BLE_2M	Ant1	2402	2.026	2400.969	2402.995	---	---
		2440	2.018	2438.973	2440.991	---	---
		2480	2.026	2478.969	2480.995	---	---




Test Graphs

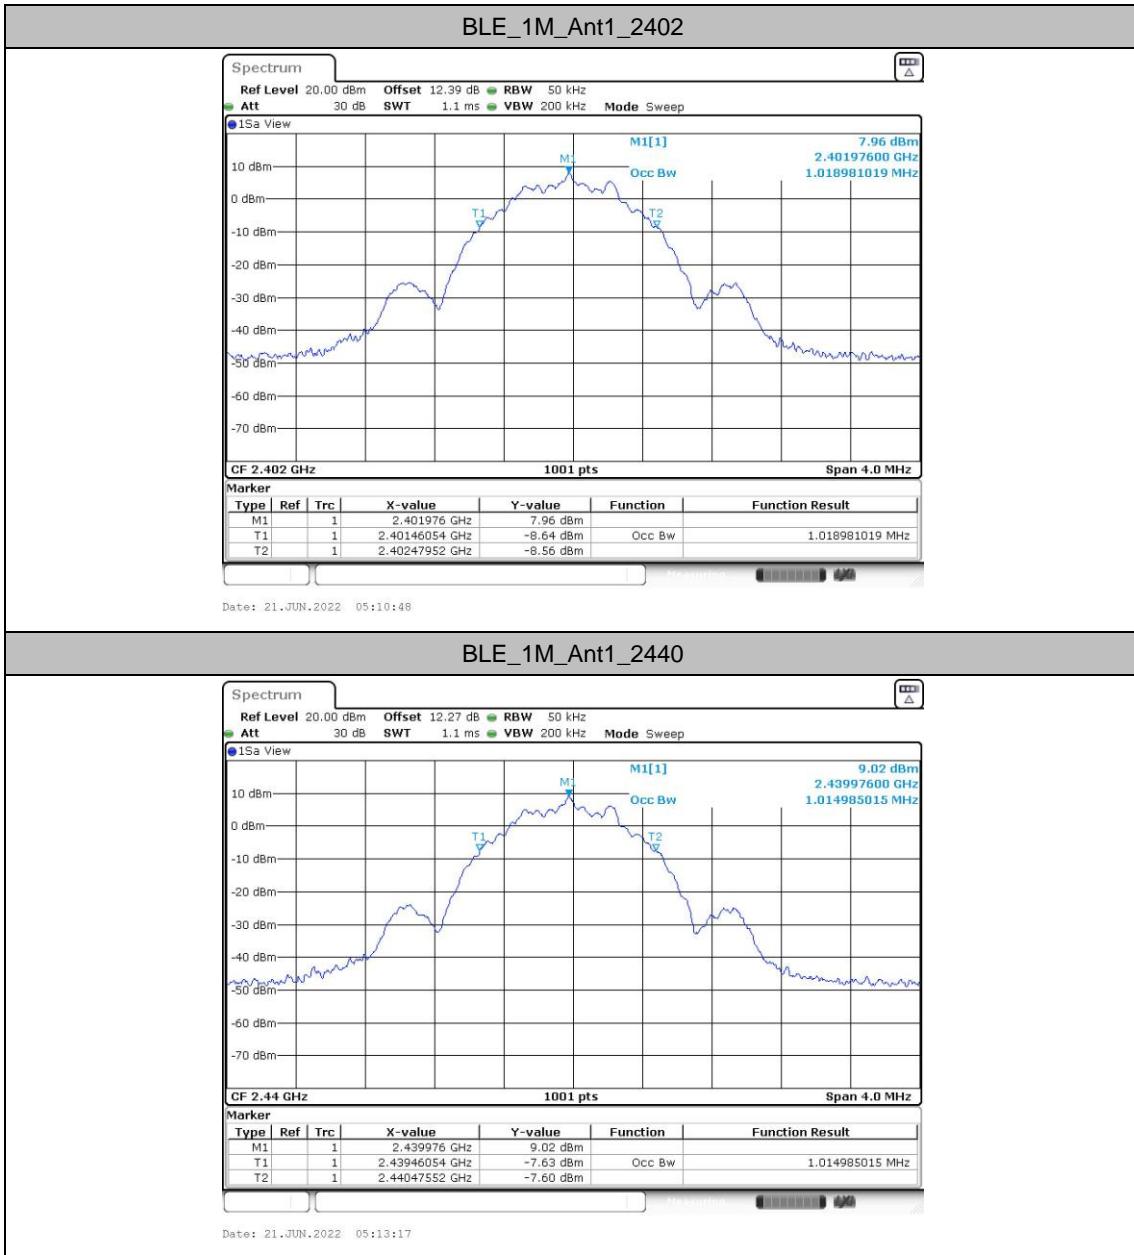




BLE\_1M\_Ant1\_2480

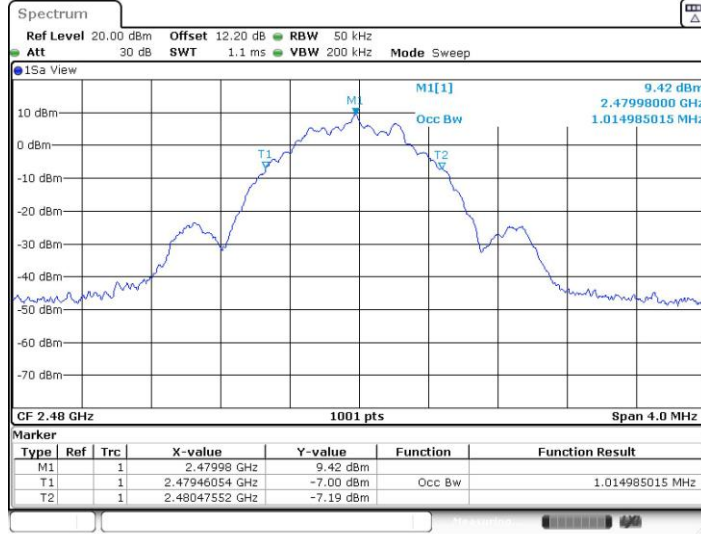

Date: 21.JUN.2022 05:16:12


BLE\_2M\_Ant1\_2402

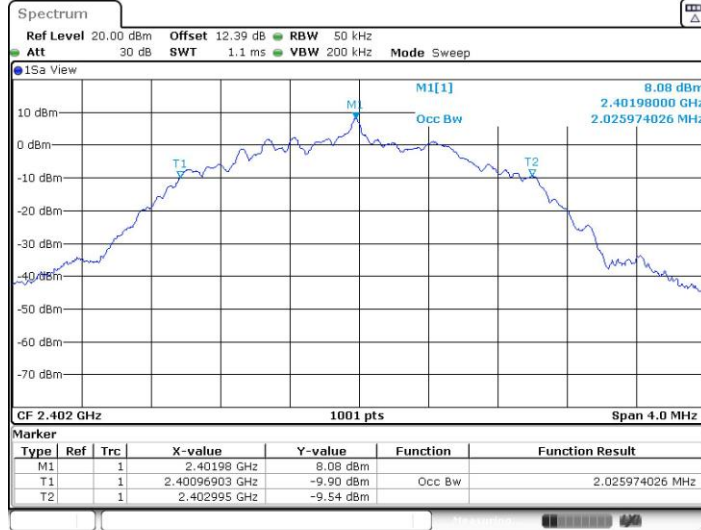

Date: 21.JUN.2022 05:18:44




BLE\_2M\_Ant1\_2440

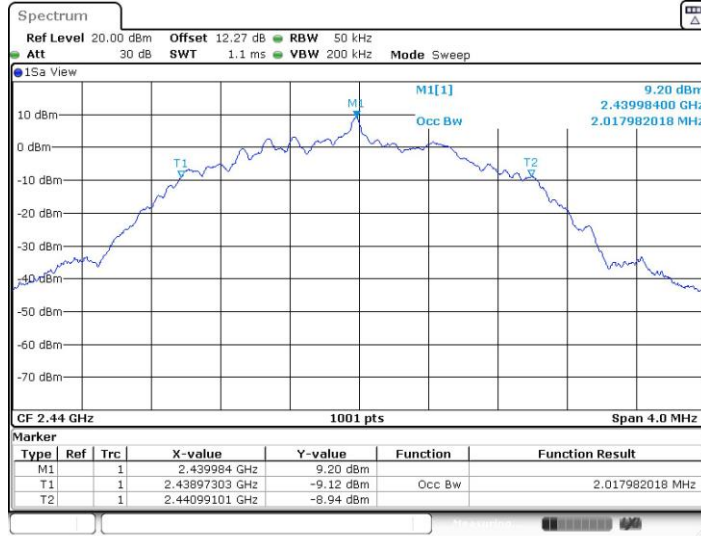

Date: 21.JUN.2022 05:21:08

BLE\_2M\_Ant1\_2480

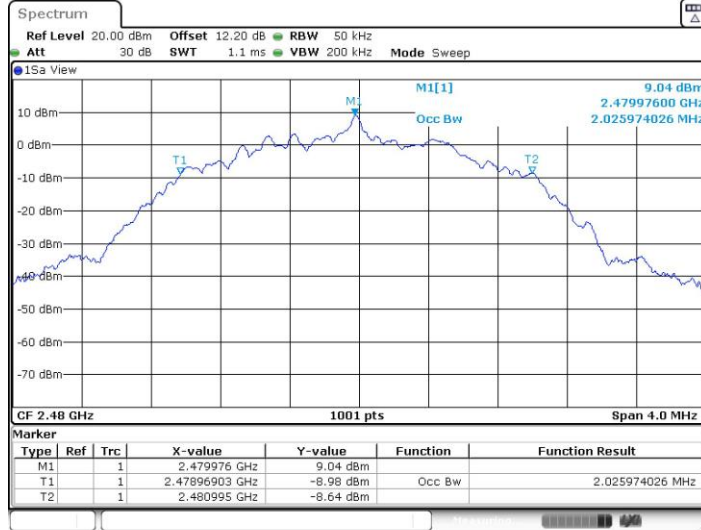

Date: 21.JUN.2022 05:23:10



### Maximum power spectral density



#### Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.36	≤8.00	PASS
		2440	-6.34	≤8.00	PASS
		2480	-5.95	≤8.00	PASS
BLE_2M	Ant1	2402	-8.63	≤8.00	PASS
		2440	-7.95	≤8.00	PASS
		2480	-7.75	≤8.00	PASS






Test Graphs

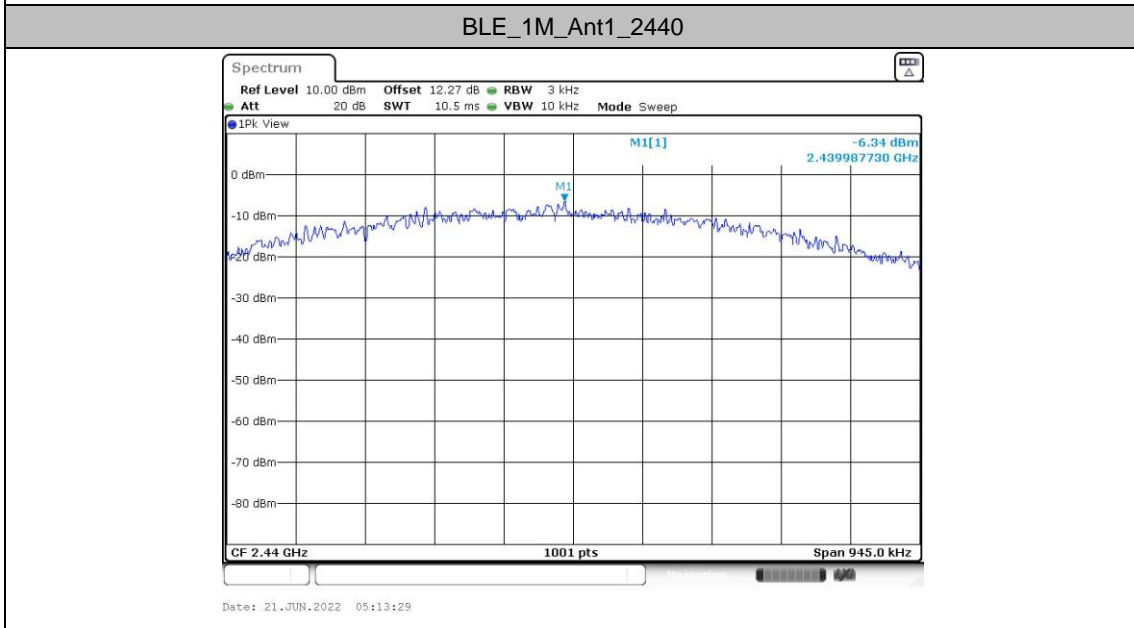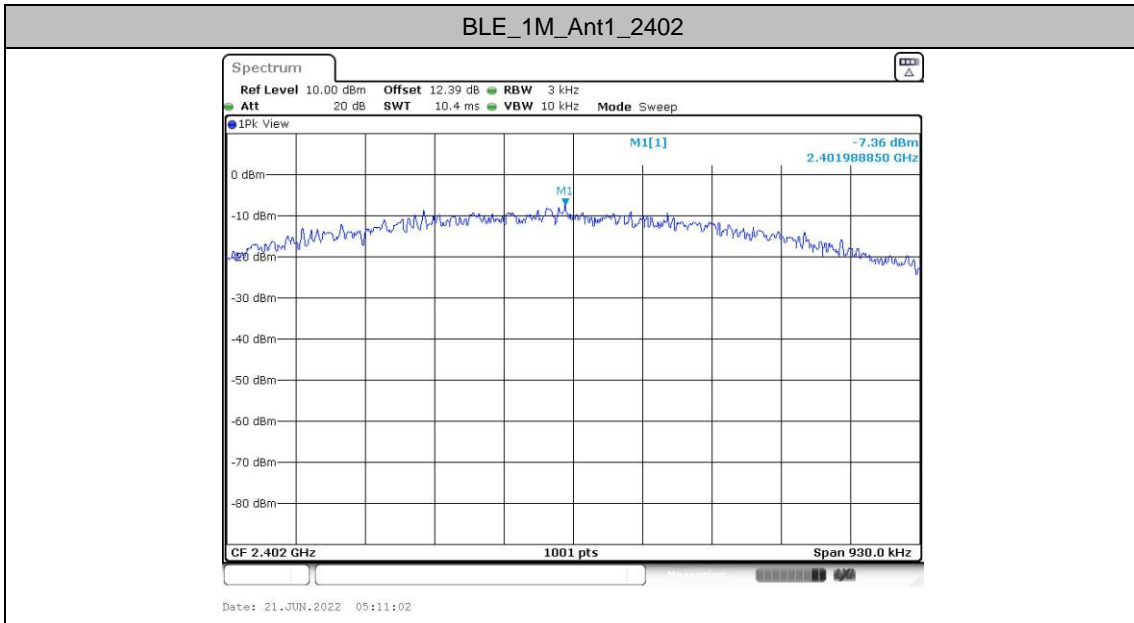




BLE\_1M\_Ant1\_2480

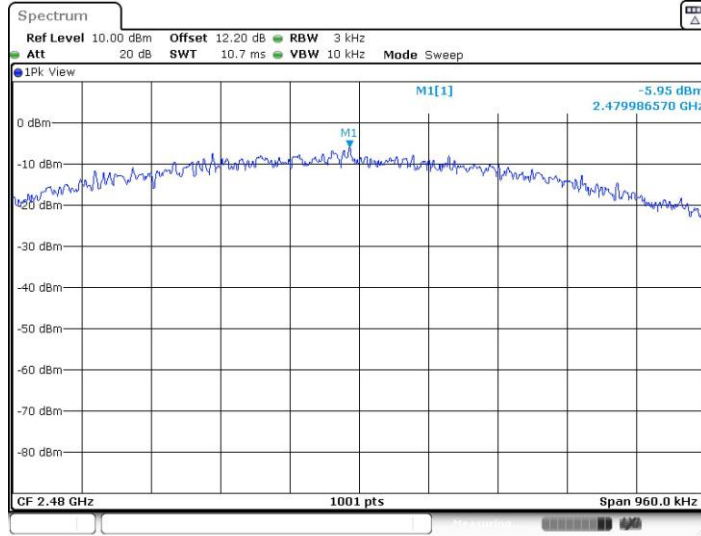

Date: 21.JUN.2022 05:16:26


BLE\_2M\_Ant1\_2402

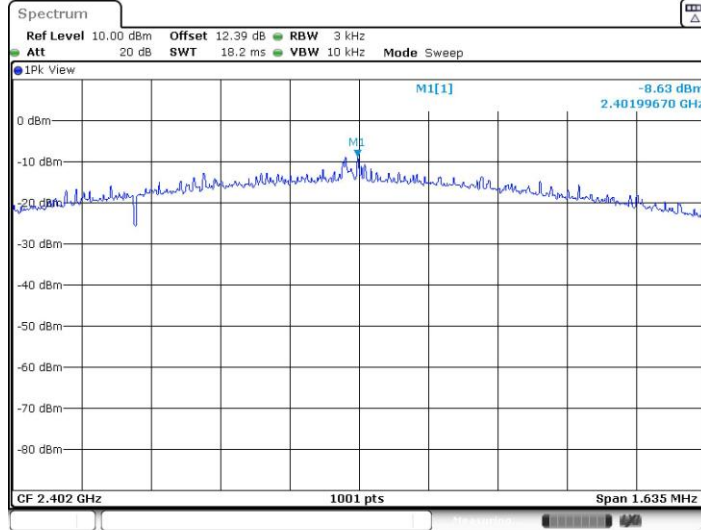

Date: 21.JUN.2022 05:18:58




BLE\_2M\_Ant1\_2440

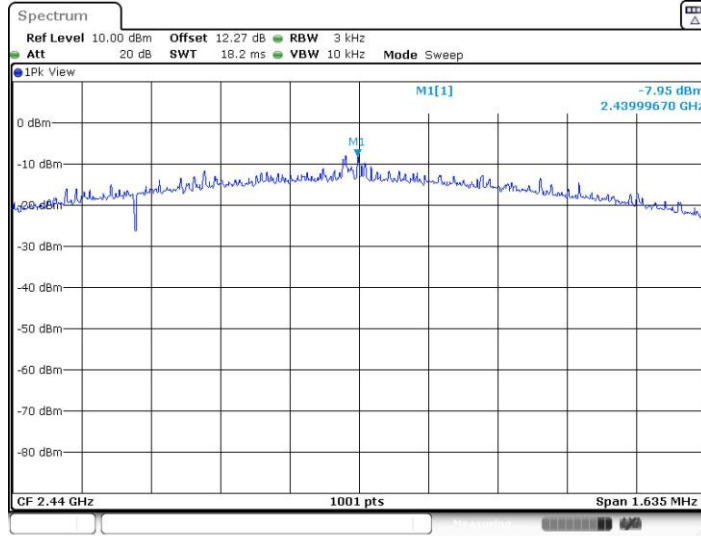

Date: 21 JUN 2022 05:21:20

BLE\_2M\_Ant1\_2480

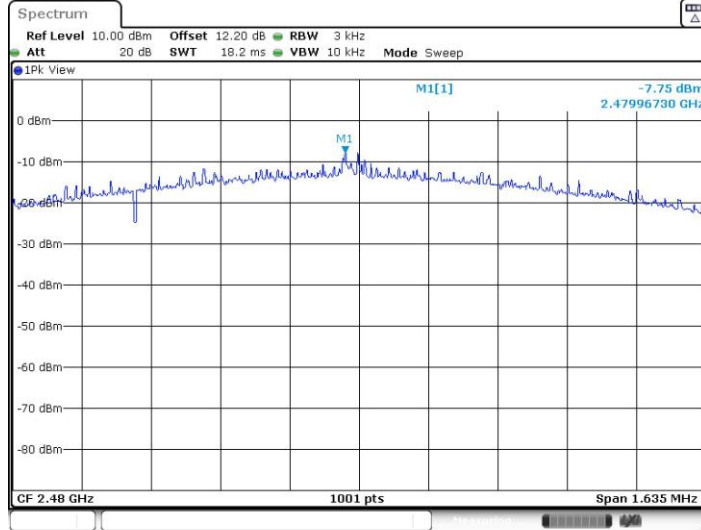

Date: 21 JUN 2022 05:23:21





## Reference level measurement

### Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2401.97	8.98
		2440	2439.97	9.77
		2480	2479.95	9.94
BLE_2M	Ant1	2402	2401.97	9.44
		2440	2439.98	10.12
		2480	2479.97	10.51




Test Graphs

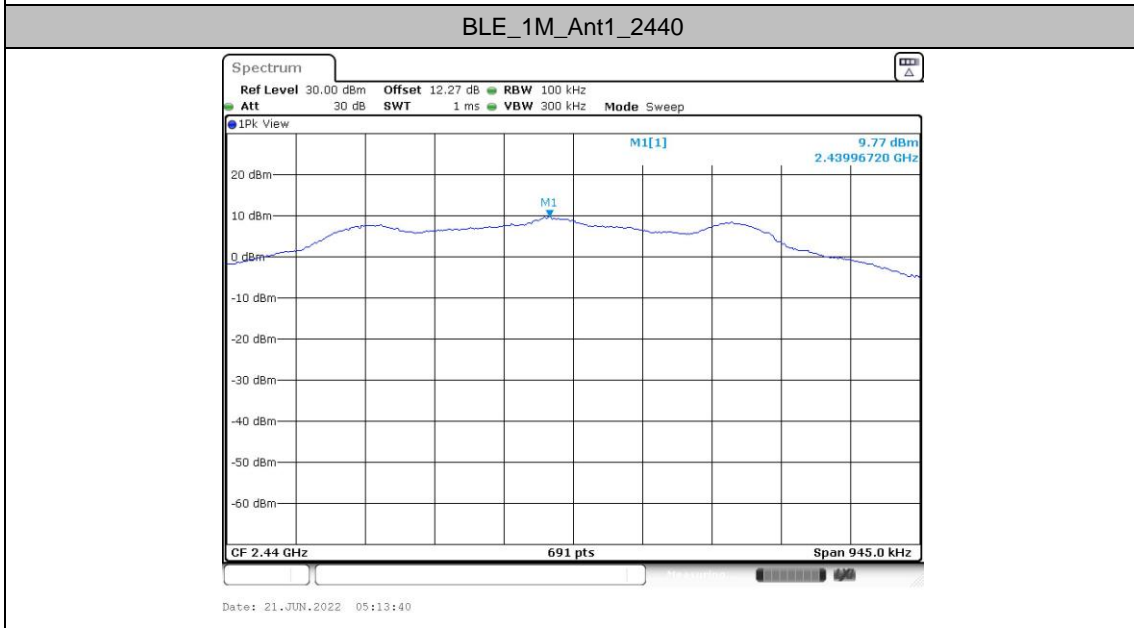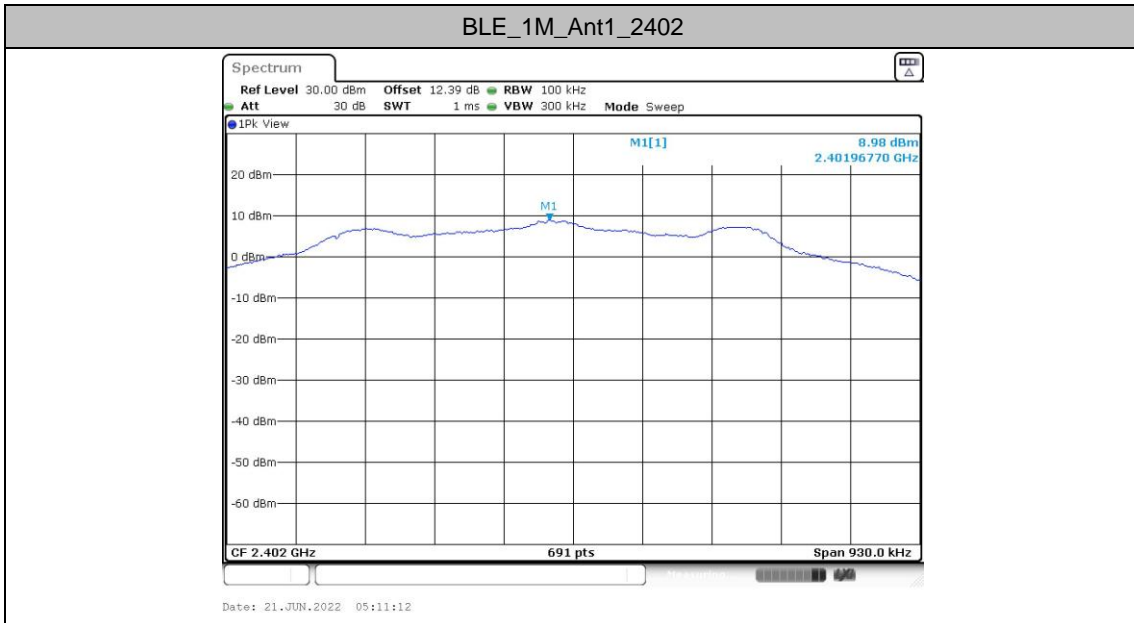




BLE\_1M\_Ant1\_2480

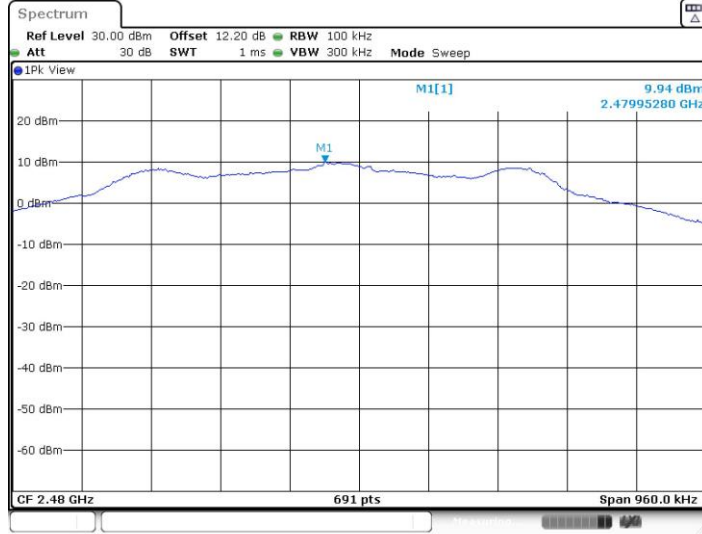

Date: 21.JUN.2022 05:16:36


BLE\_2M\_Ant1\_2402

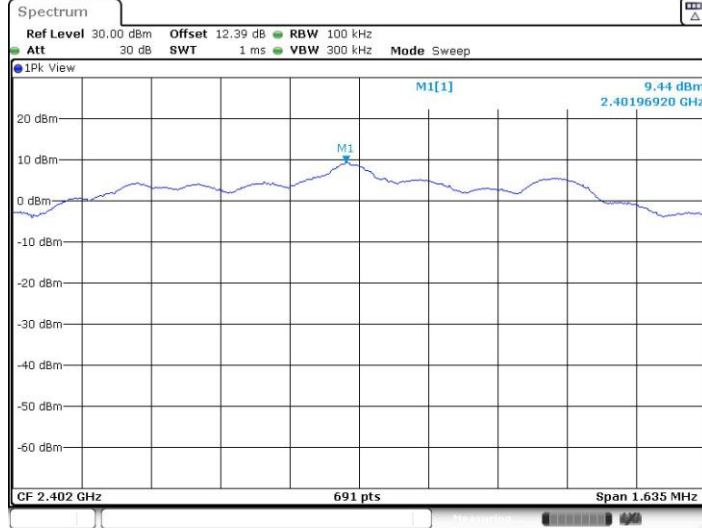

Date: 21.JUN.2022 05:19:07




BLE\_2M\_Ant1\_2440

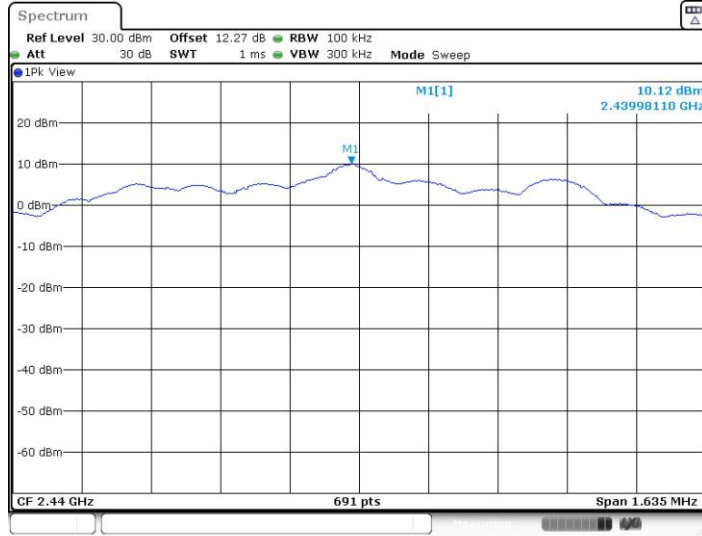

Date: 21.JUN.2022 05:21:30

BLE\_2M\_Ant1\_2480

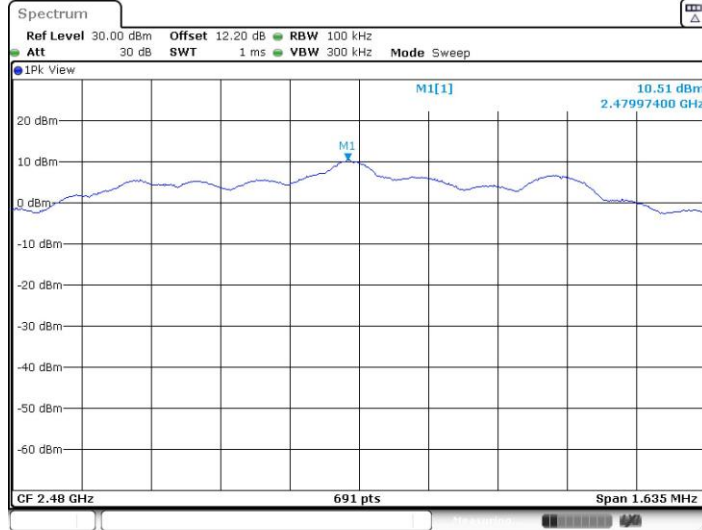

Date: 21.JUN.2022 05:23:30



## Band edge measurements


### Test Result


TestMode	Antenna	Channel	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	8.98	-41.58	≤-11.02	PASS
		High	2480	9.94	-42.73	≤-10.06	PASS
BLE_2M	Ant1	Low	2402	9.44	-38.51	≤-10.56	PASS
		High	2480	10.51	-43.28	≤-9.49	PASS





Test Graphs

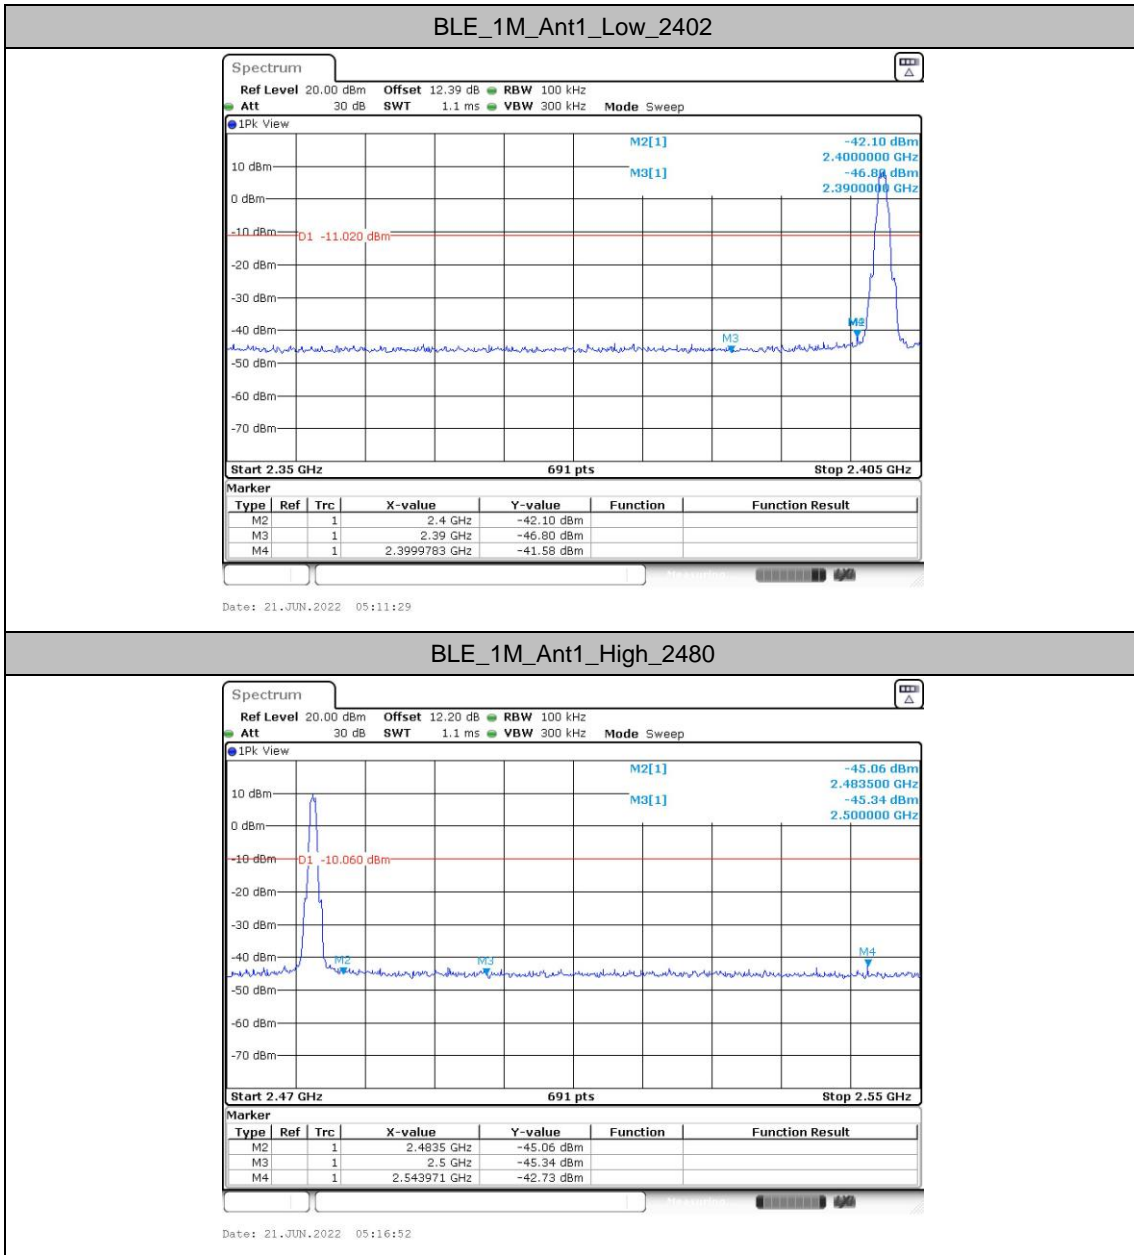

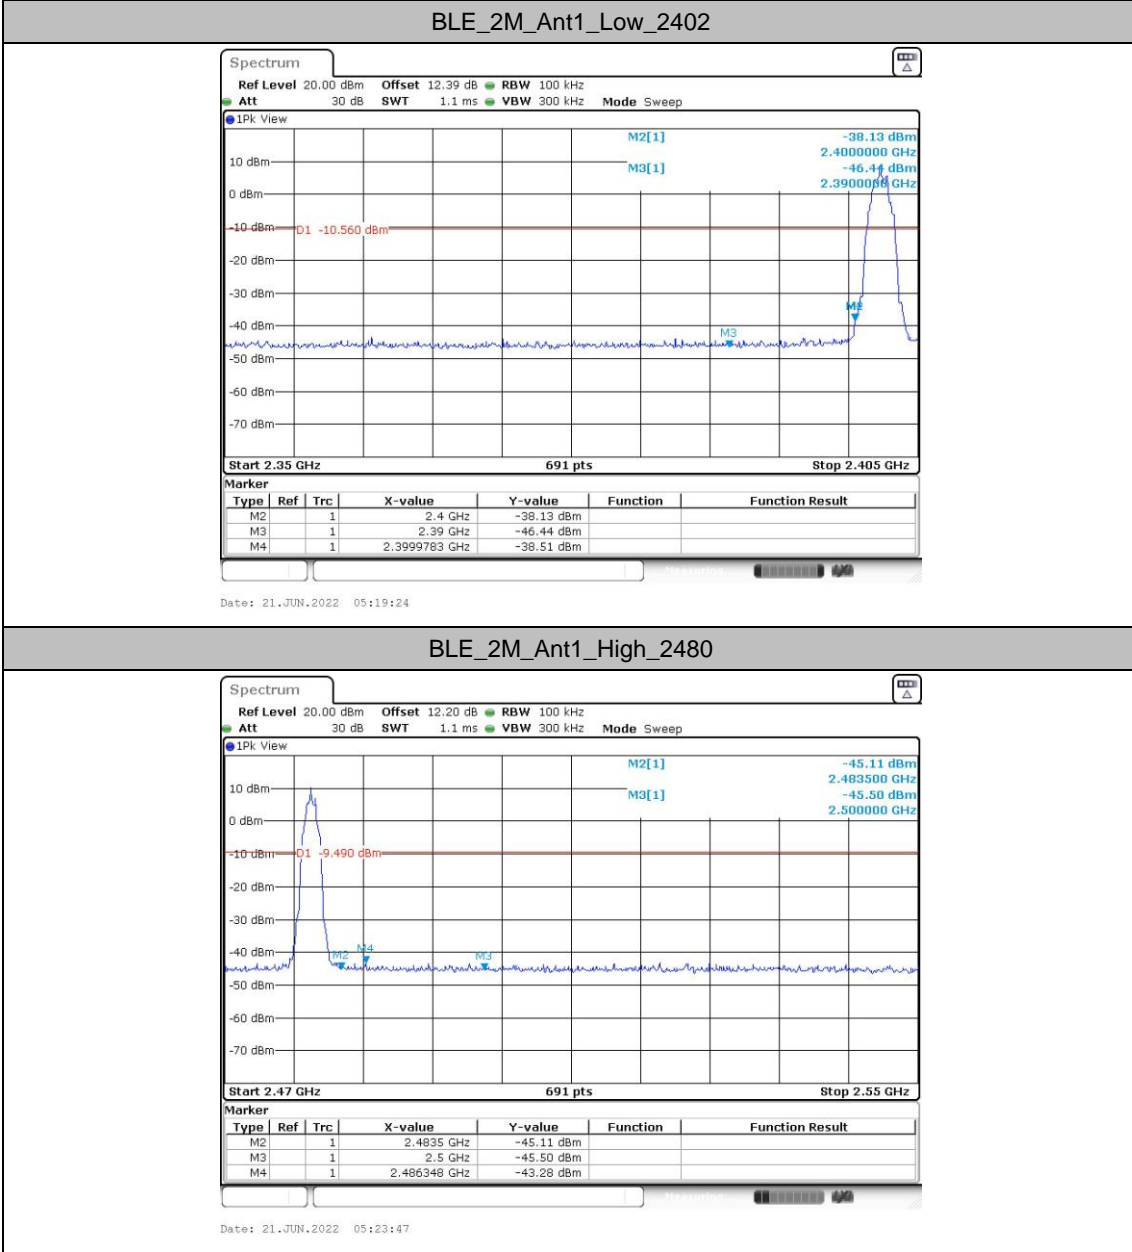




### Conducted Spurious Emission


#### Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	8.98	-54.79	≤-11.02	PASS
			1000~26500	8.98	-46.04	≤-11.02	PASS
		2440	30~1000	9.77	-54.92	≤-10.23	PASS
			1000~26500	9.77	-45.75	≤-10.23	PASS
		2480	30~1000	9.94	-55.06	≤-10.06	PASS
			1000~26500	9.94	-46.59	≤-10.06	PASS
BLE_2M	Ant1	2402	30~1000	9.44	-55.08	≤-10.56	PASS
			1000~26500	9.44	-45.65	≤-10.56	PASS
		2440	30~1000	10.12	-54.79	≤-9.88	PASS
			1000~26500	10.12	-45.56	≤-9.88	PASS
		2480	30~1000	10.51	-55.49	≤-9.49	PASS
			1000~26500	10.51	-46.2	≤-9.49	PASS




Test Graphs

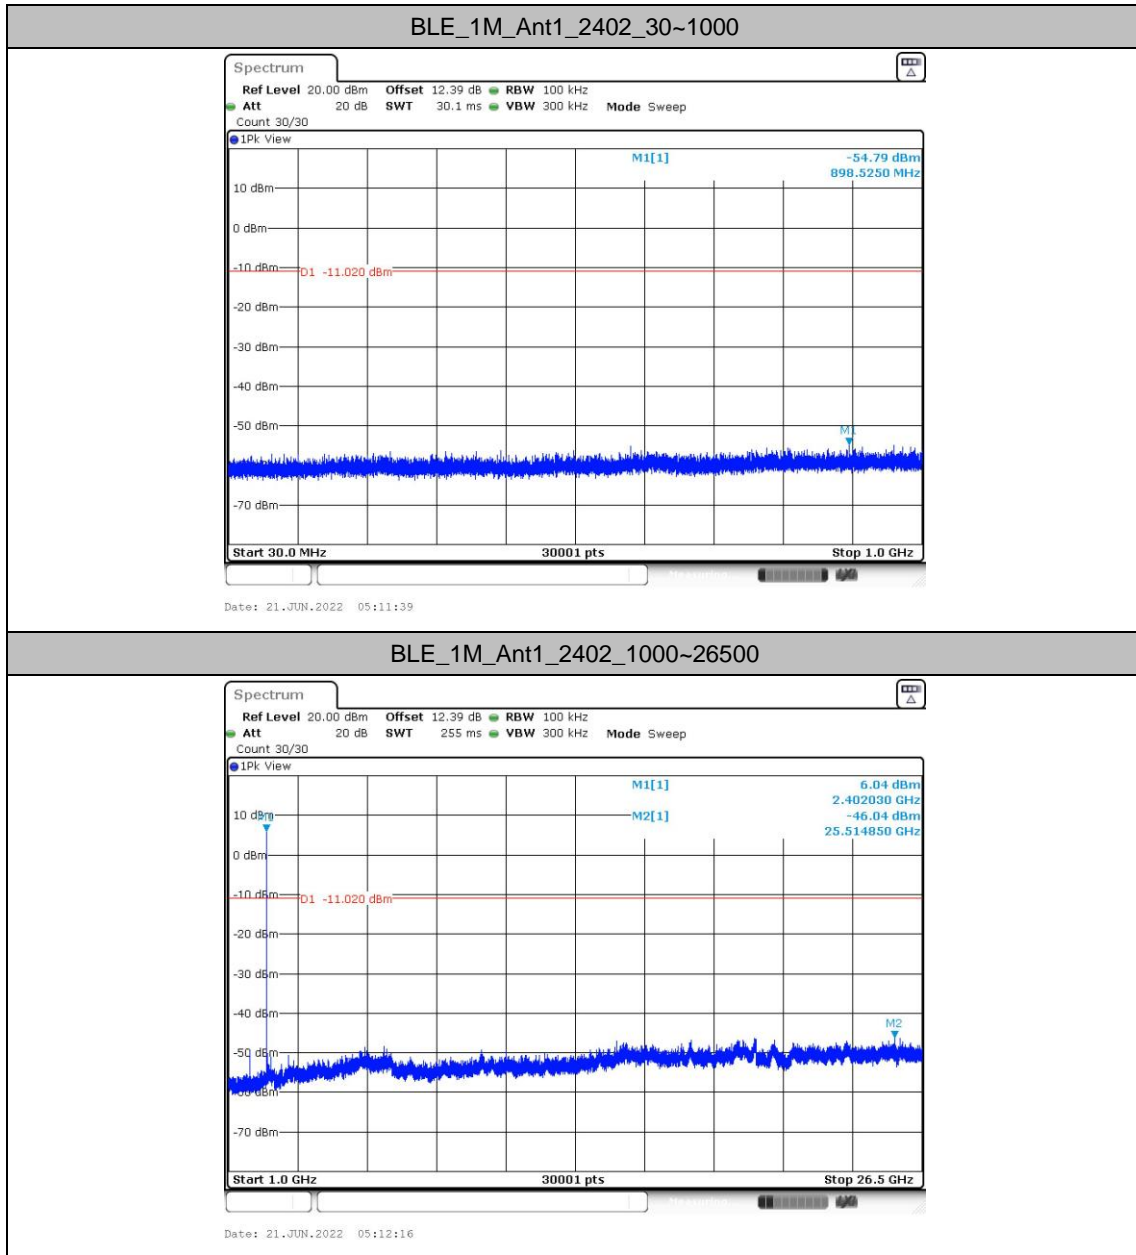

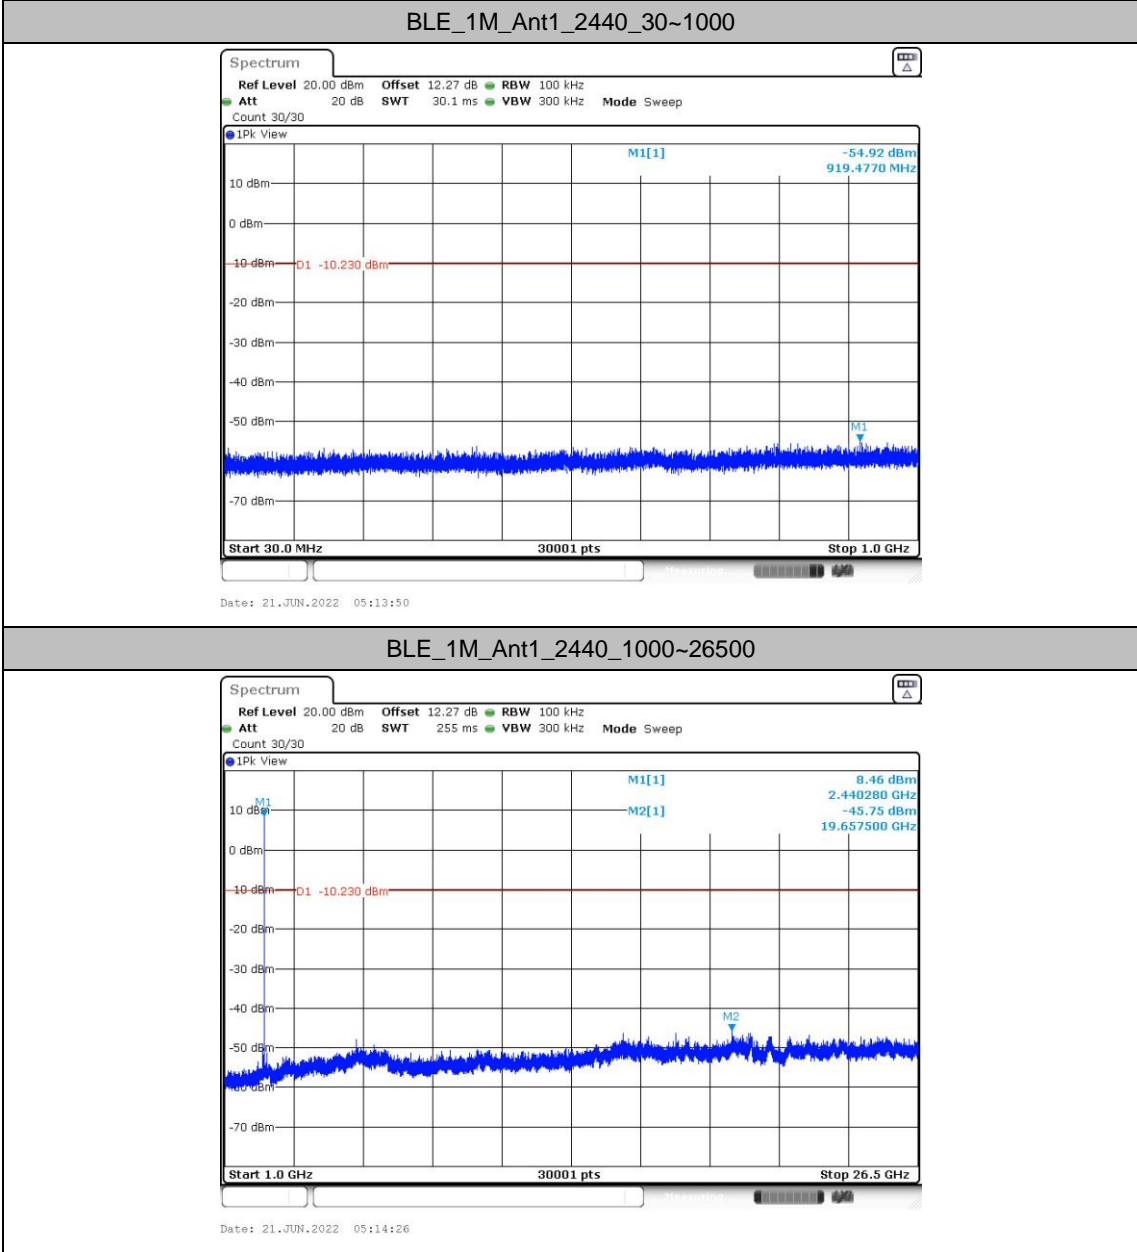




BLE\_1M\_Ant1\_2480\_30~1000

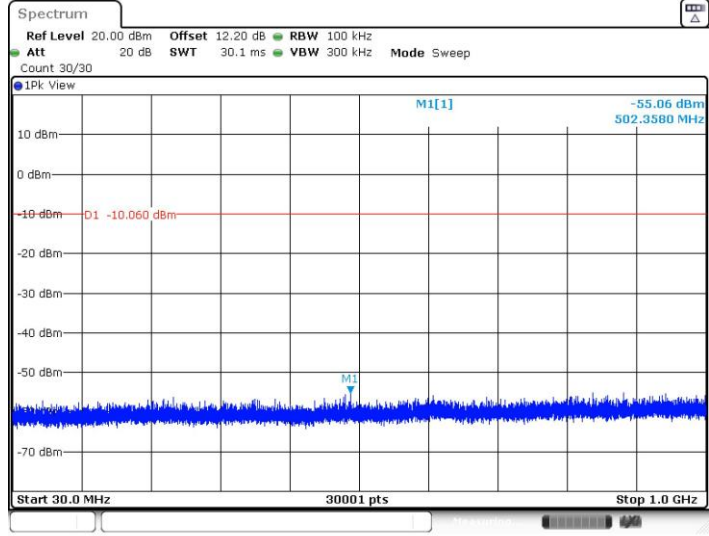


Date: 21.JUN.2022 05:17:03

BLE\_1M\_Ant1\_2480\_1000~26500

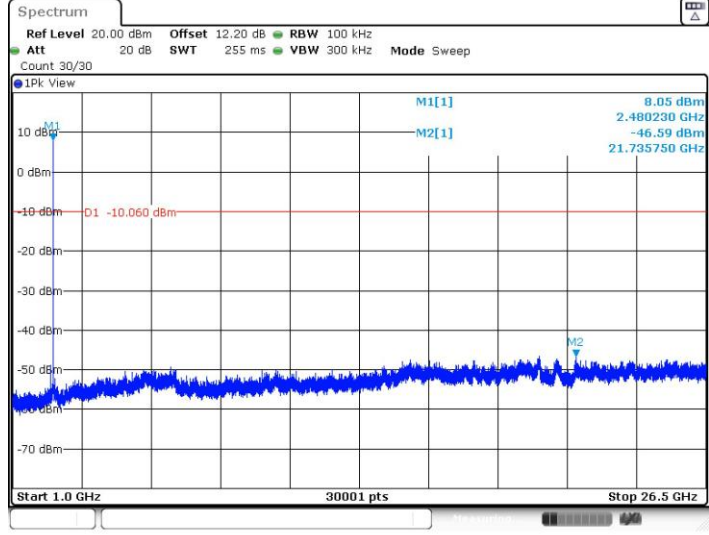


Date: 21.JUN.2022 05:17:40

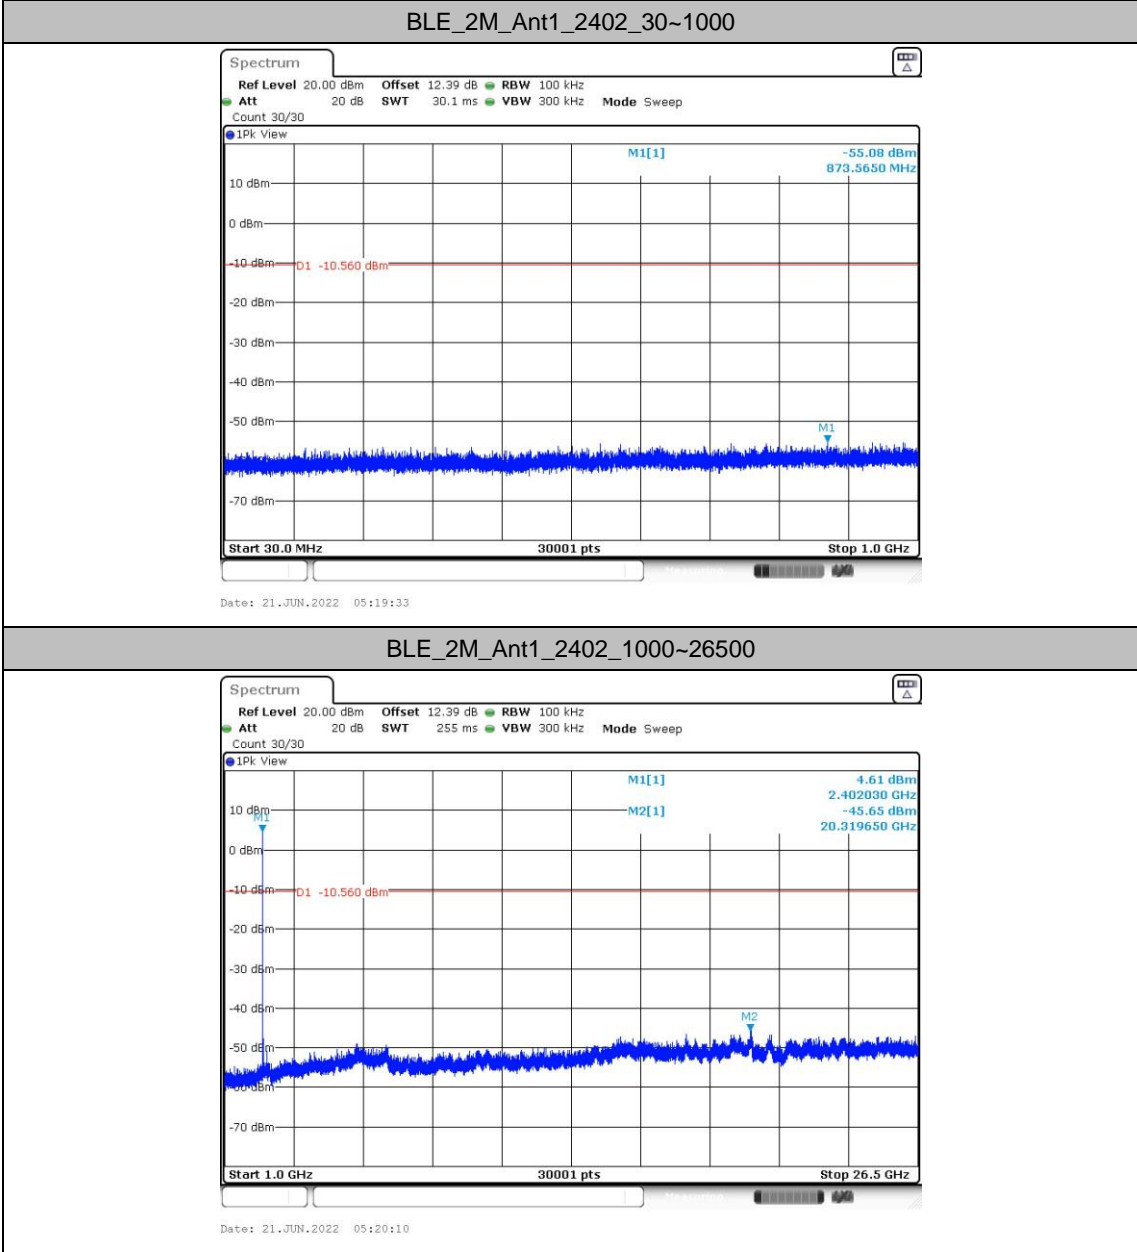




BLE\_2M\_Ant1\_2440\_30~1000

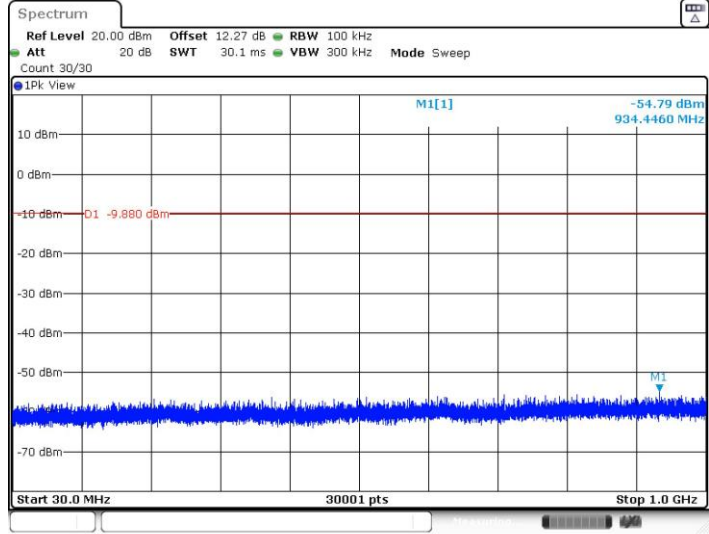


BLE\_2M\_Ant1\_2440\_1000~26500

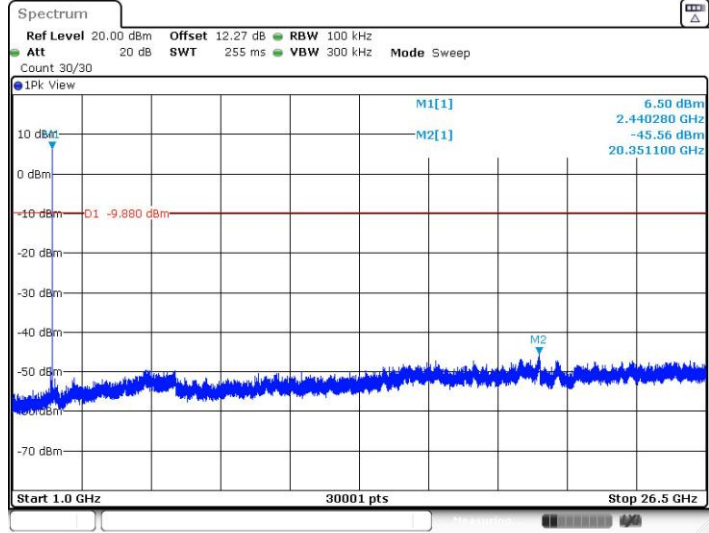






BLE\_2M\_Ant1\_2480\_30~1000

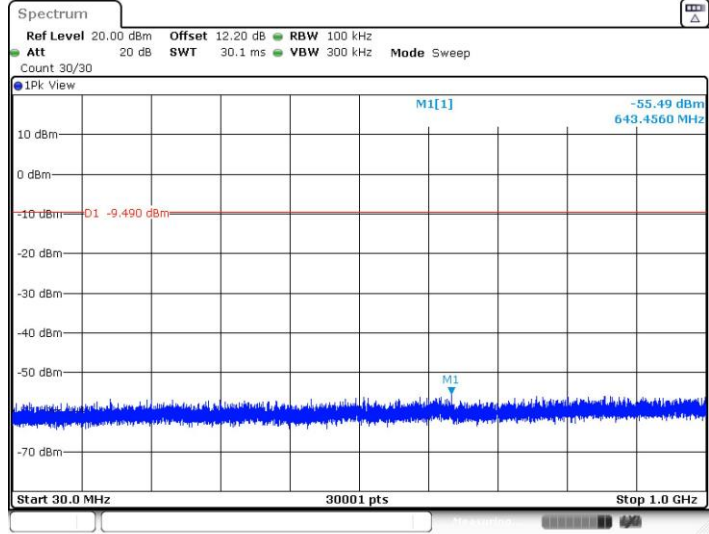

Date: 21 JUN, 2022 05:23:58

BLE\_2M\_Ant1\_2480\_1000~26500

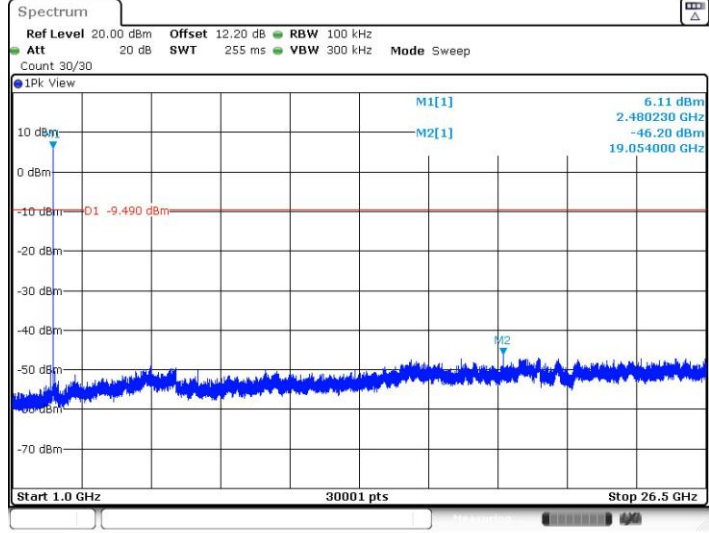

Date: 21 JUN, 2022 05:24:35



### Maximum Output Power


#### Peak Power

TestMode	Channel	Frequency(MHz)	Data Rate
			BLE
BLE_1M	CH 00	2402 MHz	9.31
	CH 19	2440 MHz	9.74
	CH 39	2480 MHz	9.05
	Cable Loss		5.30
BLE_2M	CH 00	2402 MHz	9.49
	CH 19	2440 MHz	10.42
	CH 39	2480 MHz	9.57
	Cable Loss		5.30



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhao	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

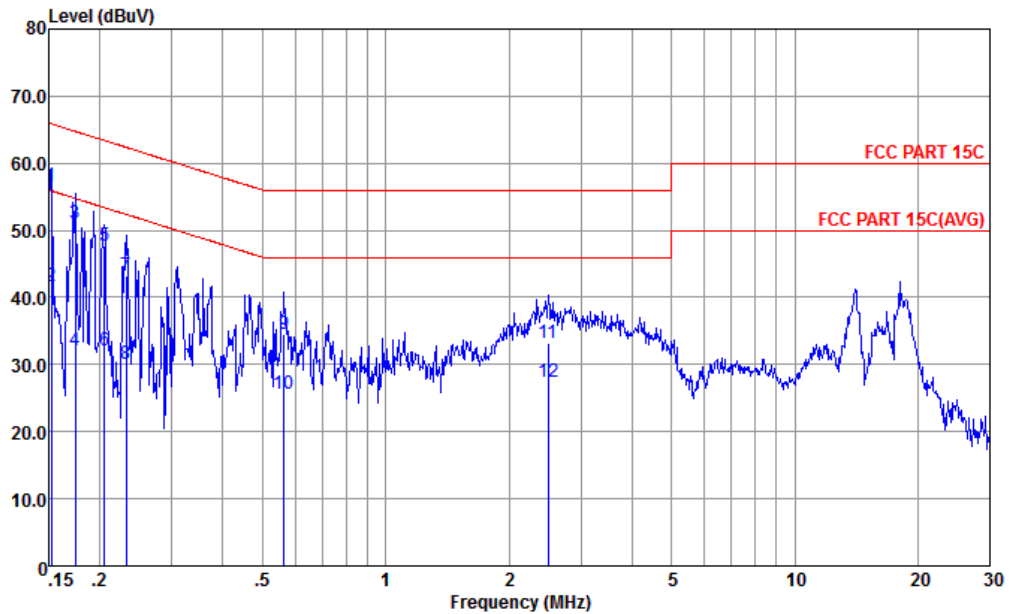


Site : CO01-KS  
Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	56.69	-9.18	65.87	46.20	0.02	10.47	QP
2	0.152	41.69	-14.18	55.87	31.20	0.02	10.47	Average
3	0.174	51.05	-13.72	64.77	40.60	0.03	10.42	QP
4	0.174	32.05	-22.72	54.77	21.60	0.03	10.42	Average
5	0.205	47.60	-15.80	63.40	37.20	0.04	10.36	QP
6	0.205	32.00	-21.40	53.40	21.60	0.04	10.36	Average
7	0.232	43.30	-19.09	62.39	32.91	0.05	10.34	QP
8	0.232	30.00	-22.39	52.39	19.61	0.05	10.34	Average
9	0.564	34.54	-21.46	56.00	24.20	0.10	10.24	QP
10	0.564	25.54	-20.46	46.00	15.20	0.10	10.24	Average
11	2.500	33.28	-22.72	56.00	22.89	0.15	10.24	QP
12	2.500	27.48	-18.52	46.00	17.09	0.15	10.24	Average



Test Engineer :	Amos Zhao	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

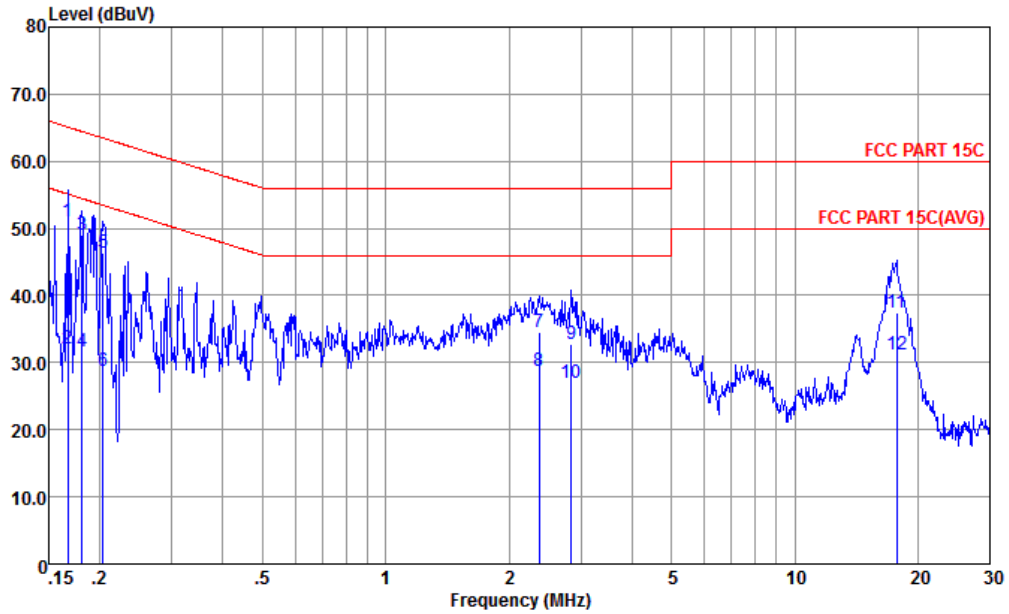

Site : CO01-KS  
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.167	51.04	-14.08	65.12	40.49	0.11	10.44	QP
2	0.167	32.14	-22.98	55.12	21.59	0.11	10.44	Average
3	0.181	49.11	-15.35	64.46	38.61	0.10	10.40	QP
4	0.181	31.71	-22.75	54.46	21.21	0.10	10.40	Average
5	0.204	46.36	-17.09	63.45	35.90	0.10	10.36	QP
6	0.204	28.76	-24.69	53.45	18.30	0.10	10.36	Average
7	2.371	34.58	-21.42	56.00	24.21	0.14	10.23	QP
8	2.371	28.68	-17.32	46.00	18.31	0.14	10.23	Average
9	2.839	32.69	-23.31	56.00	22.30	0.15	10.24	QP
10	2.839	26.99	-19.01	46.00	16.60	0.15	10.24	Average
11	17.755	37.48	-22.52	60.00	26.60	0.43	10.45	QP
12	17.755	31.18	-18.82	50.00	20.30	0.43	10.45	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	22~23°C
		Relative Humidity :	41~42%

Channel	Power setting
BLE-1Mbps--CH00	11
BLE-1Mbps--CH19	11
BLE-1Mbps--CH39	11
BLE-2Mbps--CH00	11
BLE-2Mbps--CH19	11
BLE-2Mbps--CH39	11



2.4GHz 2400~2483.5MHz

BLE---1M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
BLE CH 00 2402MHz		2379.55	53.63	-20.37	74	48	31.93	6.58	32.88	146	352	P	H
		2389.95	42.86	-11.14	54	37.09	32	6.61	32.84	146	352	A	H
	*	2402	106.89	-	-	101.12	32	6.61	32.84	146	352	P	H
	*	2402	105.27	-	-	99.5	32	6.61	32.84	146	352	A	H
		2325.34	53.3	-20.7	74	47.99	31.77	6.5	32.96	310	35	P	V
		2389.69	42.98	-11.02	54	37.25	32	6.61	32.88	310	35	A	V
	*	2402	102.9	-	-	97.13	32	6.61	32.84	310	35	P	V
	*	2402	101.26	-	-	95.49	32	6.61	32.84	310	35	A	V
BLE CH 39 2480MHz		2483.98	57.35	-16.65	74	51.06	32.2	6.73	32.64	198	353	P	H
		2483.5	47.06	-6.94	54	40.77	32.2	6.73	32.64	198	353	A	H
	*	2480	107.37	-	-	101.08	32.2	6.73	32.64	198	353	P	H
	*	2480	105.72	-	-	99.43	32.2	6.73	32.64	198	353	A	H
		2484.46	54.4	-19.6	74	48.11	32.2	6.73	32.64	332	37	P	V
		2483.5	44.64	-9.36	54	38.35	32.2	6.73	32.64	332	37	A	V
	*	2480	102.21	-	-	95.92	32.2	6.73	32.64	332	37	P	V
	*	2480	100.54	-	-	94.25	32.2	6.73	32.64	332	37	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE---1M (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BLE CH 00 (2402MHz), BLE CH 19 (2440MHz), and BLE CH 39 (2480MHz).



2.4GHz 2400~2483.5MHz

BLE---2M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
BLE CH 00 2402MHz		2329.76	53.54	-20.46	74	48.23	31.77	6.5	32.96	149	349	P	H
		2389.56	43.42	-10.58	54	37.69	32	6.61	32.88	149	349	A	H
	*	2402	107.48	-	-	101.71	32	6.61	32.84	149	349	P	H
	*	2402	104.5	-	-	98.73	32	6.61	32.84	149	349	A	H
		2334.83	53.78	-20.22	74	48.41	31.8	6.53	32.96	395	33	P	V
		2384.88	43.27	-10.73	54	37.64	31.93	6.58	32.88	395	33	A	V
	*	2402	103.63	-	-	97.86	32	6.61	32.84	395	33	P	V
	*	2402	100.7	-	-	94.93	32	6.61	32.84	395	33	A	V
BLE CH 39 2480MHz		2483.56	56.68	-17.32	74	50.39	32.2	6.73	32.64	197	354	P	H
		2483.5	47.9	-6.1	54	41.61	32.2	6.73	32.64	197	354	A	H
	*	2480	107.89	-	-	101.6	32.2	6.73	32.64	197	354	P	H
	*	2480	104.95	-	-	98.66	32.2	6.73	32.64	197	354	A	H
		2483.62	54.73	-19.27	74	48.44	32.2	6.73	32.64	264	15	P	V
		2483.5	45.1	-8.9	54	38.81	32.2	6.73	32.64	264	15	A	V
	*	2480	102.56	-	-	96.27	32.2	6.73	32.64	264	15	P	V
	*	2480	99.8	-	-	93.51	32.2	6.73	32.64	264	15	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												





2.4GHz 2400~2483.5MHz
BLE---2M (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BLE CH 00 (2402MHz), BLE CH 19 (2440MHz), and BLE CH 39 (2480MHz).



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz BLE LF		30	23.71	-16.29	40	29.34	25.15	0.45	31.23	-	-	P	H
		74.62	23.19	-16.81	40	41.12	12.91	1.02	31.86	-	-	P	H
		174.53	26.76	-16.74	43.5	40.28	16.04	1.77	31.33	-	-	P	H
		245.34	31.85	-14.15	46	42.82	18.28	2.11	31.36	-	-	P	H
		320.03	30.71	-15.29	46	40.26	19.68	2.41	31.64	-	-	P	H
		480.08	31.99	-14.01	46	36.96	23.37	2.96	31.3	-	-	P	H
		37.76	29.62	-10.38	40	39.48	21.1	0.56	31.52	-	-	P	V
		56.19	27.96	-12.04	40	44.47	14.04	0.79	31.34	-	-	P	V
		174.53	27.71	-15.79	43.5	40.36	16.91	1.77	31.33	-	-	P	V
		246.31	30.05	-15.95	46	40.13	19.16	2.12	31.36	-	-	P	V
		320.03	27.07	-18.93	46	35.62	20.68	2.41	31.64	-	-	P	V
		480.08	39.92	-6.08	46	44.12	24.14	2.96	31.3	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

### Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

BLE---2M(Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	BLE CH39 2480MHz																																																															
1	Horizontal	Fundamental																																																														
Peak	<p>Site : 032006-KS Condition : FCC PART 15C 3m 3117 5M00240138 HORIZONTAL Project : FR253115 Mode : 0 Plane : Z Full-directivity IMEI : #3 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2483.50</td> <td>56.68</td> <td>-17.32</td> <td>74.00</td> <td>50.39</td> <td>32.20</td> <td>6.73</td> <td>32.64</td> <td>197</td> <td>354 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg	1 * 2483.50	56.68	-17.32	74.00	50.39	32.20	6.73	32.64	197	354 Peak	HORIZONTAL	<p>Site : 032006-KS Condition : FCC PART 15C 3m 3117 5M00240138 HORIZONTAL Project : FR253115 Mode : 0 Plane : Z Full-directivity IMEI : #3 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2480.00</td> <td>107.89</td> <td>33.89</td> <td>74.00</td> <td>101.60</td> <td>32.20</td> <td>6.73</td> <td>32.64</td> <td>197</td> <td>354 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg	1 * 2480.00	107.89	33.89	74.00	101.60	32.20	6.73	32.64	197	354 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg																																																							
1 * 2483.50	56.68	-17.32	74.00	50.39	32.20	6.73	32.64	197	354 Peak	HORIZONTAL																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg																																																							
1 * 2480.00	107.89	33.89	74.00	101.60	32.20	6.73	32.64	197	354 Peak	HORIZONTAL																																																						
Avg.	<p>Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 5M00240138 HORIZONTAL Project : FR253115 Mode : 0 Plane : Z Full-directivity IMEI : #3 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2483.50</td> <td>47.90</td> <td>-6.10</td> <td>54.00</td> <td>41.61</td> <td>32.20</td> <td>6.73</td> <td>32.64</td> <td>197</td> <td>354 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg	1 * 2483.50	47.90	-6.10	54.00	41.61	32.20	6.73	32.64	197	354 Average	HORIZONTAL	<p>Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 5M00240138 HORIZONTAL Project : FR253115 Mode : 0 Plane : Z Full-directivity IMEI : #3 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2480.00</td> <td>104.95</td> <td>50.95</td> <td>54.00</td> <td>98.66</td> <td>32.20</td> <td>6.73</td> <td>32.64</td> <td>197</td> <td>354 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg	1 * 2480.00	104.95	50.95	54.00	98.66	32.20	6.73	32.64	197	354 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg																																																							
1 * 2483.50	47.90	-6.10	54.00	41.61	32.20	6.73	32.64	197	354 Average	HORIZONTAL																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg	deg																																																							
1 * 2480.00	104.95	50.95	54.00	98.66	32.20	6.73	32.64	197	354 Average	HORIZONTAL																																																						



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	BLE CH39 2480MHZ																																																							
1	Vertical	Fundamental																																																						
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : FCC PART 15C 3m 3117 5800240138 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : 0 Plane : X Plane : Full-directivity IMEI : 01 Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>54.73</td> <td>-19.27</td> <td>74.00</td> <td>48.44</td> <td>32.20</td> <td>6.73 32.64</td> <td>264</td> <td>15 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.62	54.73	-19.27	74.00	48.44	32.20	6.73 32.64	264	15 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : FCC PART 15C 3m 3117 5800240138 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : 0 Plane : X Plane : Full-directivity IMEI : 01 Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>102.56</td> <td>28.56</td> <td>74.00</td> <td>96.27</td> <td>32.20</td> <td>6.73 32.64</td> <td>264</td> <td>15 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2480.00	102.56	28.56	74.00	96.27	32.20	6.73 32.64	264	15 Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																	
1	2483.62	54.73	-19.27	74.00	48.44	32.20	6.73 32.64	264	15 Peak	VERTICAL																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																	
1	2480.00	102.56	28.56	74.00	96.27	32.20	6.73 32.64	264	15 Peak	VERTICAL																																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 5800240138 VERTICAL Project : RRM 1000.000kHz VBR 1.000kHz SRT:Auto Mode : 0 Plane : X Plane : Full-directivity IMEI : 01 Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>45.10</td> <td>-8.90</td> <td>54.00</td> <td>38.81</td> <td>32.20</td> <td>6.73 32.64</td> <td>264</td> <td>15 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.50	45.10	-8.90	54.00	38.81	32.20	6.73 32.64	264	15 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : FCC PART 15C (AVG) 3m 3117 5800240138 VERTICAL Project : RRM 1000.000kHz VBR 1.000kHz SRT:Auto Mode : 0 Plane : X Plane : Full-directivity IMEI : 01 Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.80</td> <td>45.80</td> <td>54.00</td> <td>93.51</td> <td>32.20</td> <td>6.73 32.64</td> <td>264</td> <td>15 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2480.00	99.80	45.80	54.00	93.51	32.20	6.73 32.64	264	15 Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																	
1	2483.50	45.10	-8.90	54.00	38.81	32.20	6.73 32.64	264	15 Average	VERTICAL																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																	
1	2480.00	99.80	45.80	54.00	93.51	32.20	6.73 32.64	264	15 Average	VERTICAL																																														



2.4GHz 2400~2483.5MHz

BLE---2M (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																	
ANT	BLE CH39 2480MHz																																																																																	
1	Horizontal	Vertical																																																																																
Peak	<p>Site : 03D906-KS Condition : FCC PART 15C 3m 3117 2800300138 HORIZONTAL Power : RSM 1000.000KHz VSW 3.000.000KHz SRT:Auto Project : FR253115 Mode : 0 Plane : X Polar : Full-directivity Polarization : 82 Power setting : 11</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pow</th> <th>T/Pow</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>40.37</td> <td>-33.43</td> <td>74.00</td> <td>58.57</td> <td>33.90</td> <td>9.41</td> <td>41.71</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.47</td> <td>-31.53</td> <td>74.00</td> <td>57.06</td> <td>35.70</td> <td>11.78</td> <td>62.07</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	Loss	dB	deg	1	4965.00	40.37	-33.43	74.00	58.57	33.90	9.41	41.71	0 Peak	HORIZONTAL	2	7440.00	42.47	-31.53	74.00	57.06	35.70	11.78	62.07	0 Peak	HORIZONTAL	<p>Site : 03D906-KS Condition : FCC PART 15C 3m 3117 2800300138 VERTICAL Power : RSM 1000.000KHz VSW 3.000.000KHz SRT:Auto Project : FR253115 Mode : 0 Plane : X Polar : Full-directivity Polarization : 82 Power setting : 11</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pow</th> <th>T/Pow</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>40.72</td> <td>-33.28</td> <td>74.00</td> <td>58.92</td> <td>33.90</td> <td>9.41</td> <td>41.71</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.83</td> <td>-31.17</td> <td>74.00</td> <td>57.42</td> <td>35.70</td> <td>11.78</td> <td>62.07</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	Loss	dB	deg	1	4965.00	40.72	-33.28	74.00	58.92	33.90	9.41	41.71	0 Peak	VERTICAL	2	7440.00	42.83	-31.17	74.00	57.42	35.70	11.78	62.07	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phas																																																																									
Level	Line	Level	Factor	Loss	Factor	Loss	dB	deg																																																																										
1	4965.00	40.37	-33.43	74.00	58.57	33.90	9.41	41.71	0 Peak	HORIZONTAL																																																																								
2	7440.00	42.47	-31.53	74.00	57.06	35.70	11.78	62.07	0 Peak	HORIZONTAL																																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phas																																																																										
Level	Line	Level	Factor	Loss	Factor	Loss	dB	deg																																																																										
1	4965.00	40.72	-33.28	74.00	58.92	33.90	9.41	41.71	0 Peak	VERTICAL																																																																								
2	7440.00	42.83	-31.17	74.00	57.42	35.70	11.78	62.07	0 Peak	VERTICAL																																																																								





Emission below 1GHz  
2.4GHz BLE (LF)


BLE	2.4GHz 2400~2483.5MHz																																																																																																																																																																																					
ANT	BLE LF																																																																																																																																																																																					
1	Horizontal	Vertical																																																																																																																																																																																				
QP / Peak	<p>Site : 03D06-KS Condition : FCC PART 15C 3m CBL0110N03188 HORIZONTAL Project : RSM 100.000MHz VBR 300.000MHz SRT:Auto Mode : 0 Plane : X IMEI : Full-directivity Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBc</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>23.71</td> <td>-16.29</td> <td>40.00</td> <td>29.34</td> <td>25.55</td> <td>0.45</td> <td>31.23</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>74.63</td> <td>23.19</td> <td>-16.81</td> <td>40.00</td> <td>41.12</td> <td>12.91</td> <td>1.02</td> <td>31.86</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>174.53</td> <td>26.76</td> <td>-16.74</td> <td>40.00</td> <td>40.28</td> <td>16.64</td> <td>1.77</td> <td>31.33</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>4</td> <td>245.34</td> <td>31.85</td> <td>-14.15</td> <td>40.00</td> <td>42.82</td> <td>18.28</td> <td>2.11</td> <td>31.36</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>5</td> <td>320.03</td> <td>30.71</td> <td>-15.29</td> <td>40.00</td> <td>40.29</td> <td>19.48</td> <td>2.43</td> <td>31.64</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>6</td> <td>480.08</td> <td>31.99</td> <td>-14.01</td> <td>40.00</td> <td>36.96</td> <td>23.37</td> <td>2.94</td> <td>31.30</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBc	dBm/1m	dBm	dB	dB	dB	dB	dB	deg	1	30.00	23.71	-16.29	40.00	29.34	25.55	0.45	31.23	---	Peak	HORIZONTAL	2	74.63	23.19	-16.81	40.00	41.12	12.91	1.02	31.86	---	Peak	HORIZONTAL	3	174.53	26.76	-16.74	40.00	40.28	16.64	1.77	31.33	---	Peak	HORIZONTAL	4	245.34	31.85	-14.15	40.00	42.82	18.28	2.11	31.36	---	Peak	HORIZONTAL	5	320.03	30.71	-15.29	40.00	40.29	19.48	2.43	31.64	---	Peak	HORIZONTAL	6	480.08	31.99	-14.01	40.00	36.96	23.37	2.94	31.30	---	Peak	HORIZONTAL	<p>Site : 03D06-KS Condition : FCC PART 15C 3m CBL0110N03188 VERTICAL Project : RSM 100.000MHz VBR 300.000MHz SRT:Auto Mode : 0 Plane : X IMEI : Full-directivity Powersetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBc</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>37.76</td> <td>29.42</td> <td>-10.38</td> <td>40.00</td> <td>39.48</td> <td>21.10</td> <td>0.56</td> <td>31.52</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>56.19</td> <td>27.90</td> <td>-12.04</td> <td>40.00</td> <td>44.47</td> <td>14.94</td> <td>0.79</td> <td>31.34</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>174.53</td> <td>27.71</td> <td>-15.79</td> <td>43.50</td> <td>40.86</td> <td>16.91</td> <td>1.77</td> <td>31.33</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>4</td> <td>245.31</td> <td>30.00</td> <td>-15.95</td> <td>40.00</td> <td>40.13</td> <td>19.16</td> <td>2.17</td> <td>31.36</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>5</td> <td>320.03</td> <td>31.07</td> <td>-16.93</td> <td>40.00</td> <td>35.82</td> <td>20.68</td> <td>2.41</td> <td>31.64</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>6</td> <td>480.08</td> <td>31.92</td> <td>-6.08</td> <td>40.00</td> <td>44.12</td> <td>24.14</td> <td>2.96</td> <td>31.30</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBc	dBm/1m	dBm	dB	dB	dB	dB	dB	deg	1	37.76	29.42	-10.38	40.00	39.48	21.10	0.56	31.52	---	Peak	VERTICAL	2	56.19	27.90	-12.04	40.00	44.47	14.94	0.79	31.34	---	Peak	VERTICAL	3	174.53	27.71	-15.79	43.50	40.86	16.91	1.77	31.33	---	Peak	VERTICAL	4	245.31	30.00	-15.95	40.00	40.13	19.16	2.17	31.36	---	Peak	VERTICAL	5	320.03	31.07	-16.93	40.00	35.82	20.68	2.41	31.64	---	Peak	VERTICAL	6	480.08	31.92	-6.08	40.00	44.12	24.14	2.96	31.30	---	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																													
dBc	dBm/1m	dBm	dB	dB	dB	dB	dB	deg																																																																																																																																																																														
1	30.00	23.71	-16.29	40.00	29.34	25.55	0.45	31.23	---	Peak	HORIZONTAL																																																																																																																																																																											
2	74.63	23.19	-16.81	40.00	41.12	12.91	1.02	31.86	---	Peak	HORIZONTAL																																																																																																																																																																											
3	174.53	26.76	-16.74	40.00	40.28	16.64	1.77	31.33	---	Peak	HORIZONTAL																																																																																																																																																																											
4	245.34	31.85	-14.15	40.00	42.82	18.28	2.11	31.36	---	Peak	HORIZONTAL																																																																																																																																																																											
5	320.03	30.71	-15.29	40.00	40.29	19.48	2.43	31.64	---	Peak	HORIZONTAL																																																																																																																																																																											
6	480.08	31.99	-14.01	40.00	36.96	23.37	2.94	31.30	---	Peak	HORIZONTAL																																																																																																																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																														
dBc	dBm/1m	dBm	dB	dB	dB	dB	dB	deg																																																																																																																																																																														
1	37.76	29.42	-10.38	40.00	39.48	21.10	0.56	31.52	---	Peak	VERTICAL																																																																																																																																																																											
2	56.19	27.90	-12.04	40.00	44.47	14.94	0.79	31.34	---	Peak	VERTICAL																																																																																																																																																																											
3	174.53	27.71	-15.79	43.50	40.86	16.91	1.77	31.33	---	Peak	VERTICAL																																																																																																																																																																											
4	245.31	30.00	-15.95	40.00	40.13	19.16	2.17	31.36	---	Peak	VERTICAL																																																																																																																																																																											
5	320.03	31.07	-16.93	40.00	35.82	20.68	2.41	31.64	---	Peak	VERTICAL																																																																																																																																																																											
6	480.08	31.92	-6.08	40.00	44.12	24.14	2.96	31.30	---	Peak	VERTICAL																																																																																																																																																																											



### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	83.81	2.101	0.476	0.51KHz
Bluetooth LE 2Mbps	56.59	1.058	0.945	1KHZ


#### Bluetooth LE 1Mbps

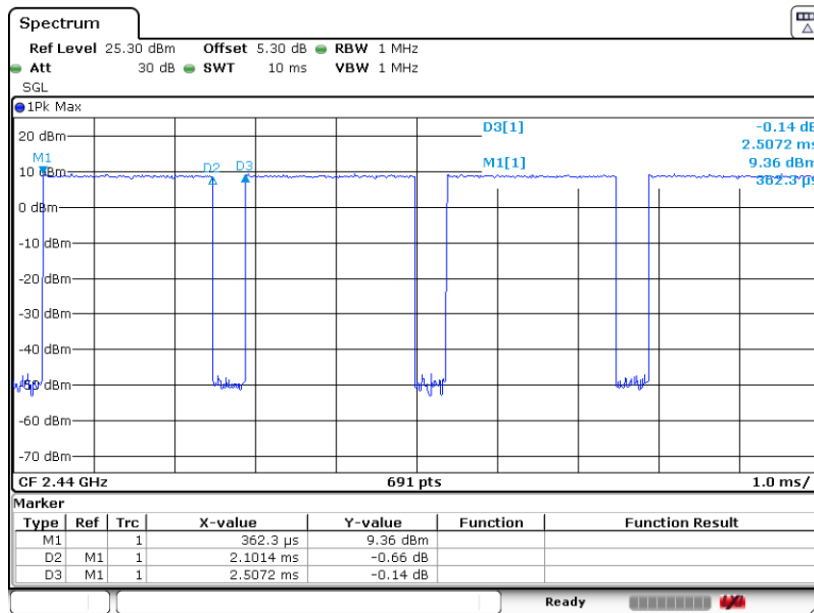

Date: 15.JUN.2022 20:15:54



Bluetooth LE 2Mbps

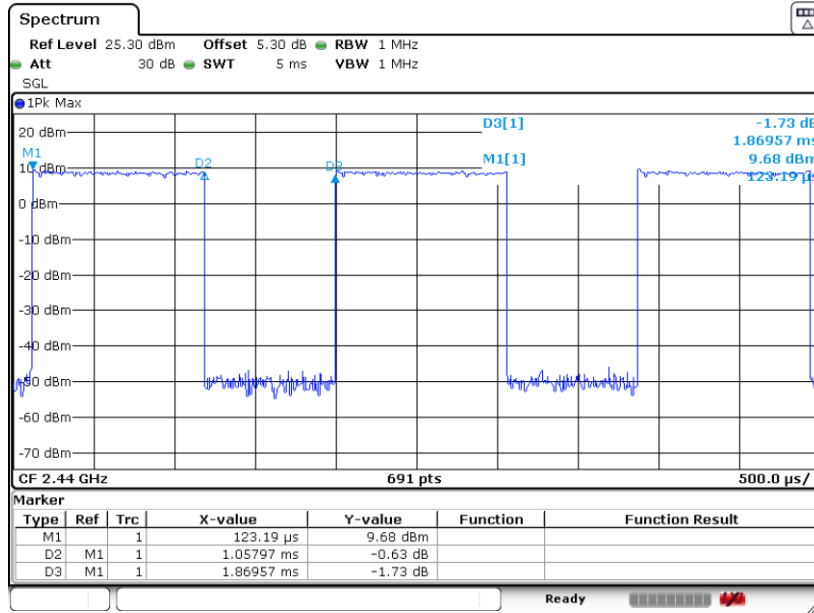

Date: 15.JUN.2022 20:18:57