


Report No.: SEWA2205000015RG02

Rev.: 01

Page: 109 of 131



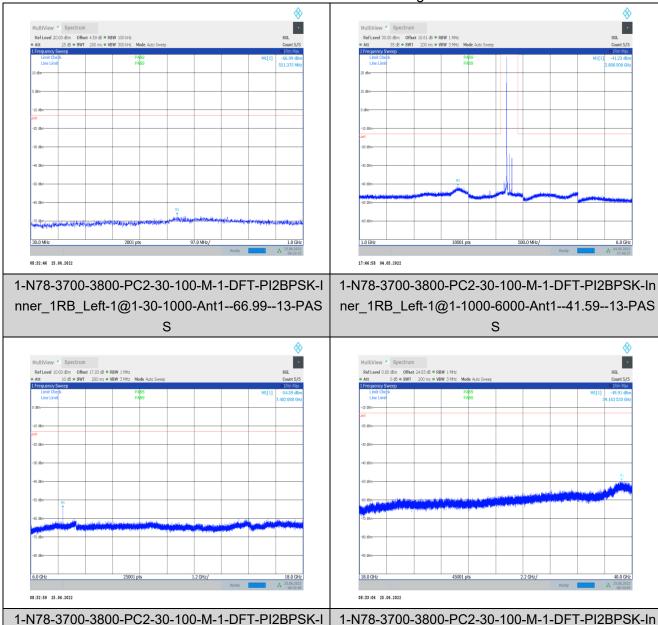

nner\_1RB\_Left-1@1-6000-18000-Ant1--54.59--13-P

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\* To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443,

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com


ner\_1RB\_Left-1@1-18000-40000-Ant1--49.91--13-P



Report No.: SEWA2205000015RG02

Rev.: 01

Page: 110 of 131

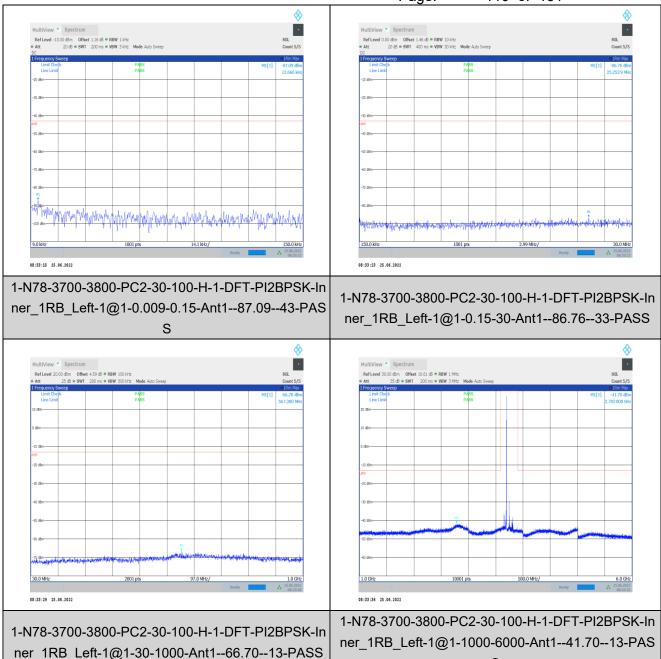



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comditi

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www. t (86–512) 62992980 sgs.cl


www.sgsgroup.com.cn sgs.china@sgs.com




Report No.: SEWA2205000015RG02

Rev.: 01

Page: 111 of 131

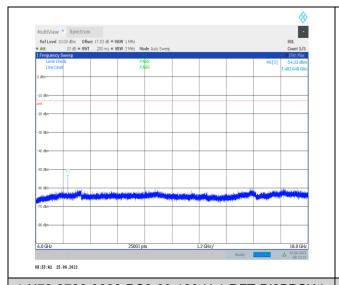

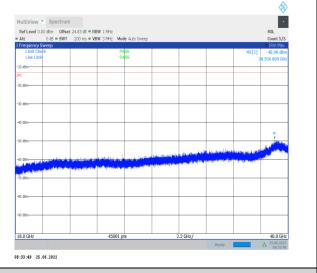

1-N78-3700-3800-PC2-30-100-H-1-DFT-PI2BPSK-In ner\_1RB\_Left-1@1-6000-18000-Ant1--54.33--13-PA

1-N78-3700-3800-PC2-30-100-H-1-DFT-PI2BPSK-In ner\_1RB\_Left-1@1-18000-40000-Ant1--48.98--13-P ASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en/Conditions/Terms-e

Rev.: 01

Page: 112 of 131

#### **Field Strength of Spurious Radiation**

Test Band = SA Band78 3700M-3800M\_ TM1
Test Channel = Low

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	49.10	-101.99	-52.89	-13.00	39.89	125	195	Horizontal				
2	8707.425	49.99	-98.66	-48.67	-13.00	35.67	164	135	Horizontal				
3	10965.2700	43.76	-93.83	-50.07	-13.00	37.07	195	346	Horizontal				
4	13319.5	45.12	-92.04	-46.92	-13.00	33.92	185	75	Horizontal				
5	14620.3600	40.12	-90.58	-50.46	-13.00	37.46	174	164	Horizontal				
6	15820.175	42.71	-90.37	-47.66	-13.00	34.66	230	150	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	49.42	-101.99	-52.57	-13.00	39.57	152	314	Vertical				
2	8662	49.74	-98.58	-48.84	-13.00	35.84	236	117	Vertical				
3	10965.2700	42.53	-93.83	-51.30	-13.00	38.30	194	146	Vertical				
4	12797.4	44.60	-92.26	-47.66	-13.00	34.66	175	329	Vertical				
5	14620.3600	41.00	-90.58	-49.58	-13.00	36.58	182	314	Vertical				
6	17110.475	44.32	-90.55	-46.23	-13.00	33.23	142	209	Vertical				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's soler responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



Rev.: 01

Page: 113 of 131

#### Test Band = SA Band78 3700-3800\_ TM1 Test Channel = Mid

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	48.15	-101.60	-53.45	-13.00	40.45	125	76	Horizontal				
2	8644.175	48.69	-98.53	-49.84	-13.00	36.84	236	356	Horizontal				
3	11115.2700	41.99	-93.74	-51.75	-13.00	38.75	164	44	Horizontal				
4	13632.875	43.74	-91.16	-47.42	-13.00	34.42	175	208	Horizontal				
5	14820.3600	41.57	-90.67	-49.10	-13.00	36.10	199	344	Horizontal				
6	16960.4	44.85	-90.62	-45.77	-13.00	32.77	180	225	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	49.40	-101.60	-52.20	-13.00	39.20	156	121	Vertical				
2	8683.85	48.80	-98.64	-49.84	-13.00	36.84	194	76	Vertical				
3	9289.325	48.16	-96.91	-48.75	-13.00	35.75	185	90	Vertical				
4	11115.2700	41.32	-93.74	-52.42	-13.00	39.42	172	344	Vertical				
5	13692.675	43.41	-91.19	-47.78	-13.00	34.78	236	0	Vertical				
6	14820.3600	39.99	-90.67	-50.68	-13.00	37.68	201	121	Vertical				





Rev.: 01

Page: 114 of 131

## Test Band = SA Band78 3700-3800\_ TM1 Test Channel = High

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	48.30	-101.95	-53.65	-13.00	40.65	233	105	Horizontal				
2	8375.075	49.54	-99.46	-49.92	-13.00	36.92	215	60	Horizontal				
3	11265.2700	44.55	-93.16	-48.61	-13.00	35.61	164	0	Horizontal				
4	12829.6	45.74	-92.29	-46.55	-13.00	33.55	184	356	Horizontal				
5	15020.3600	40.05	-90.50	-50.45	-13.00	37.45	175	180	Horizontal				
6	16620.575	45.37	-91.69	-46.32	-13.00	33.32	190	163	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	49.02	-101.95	-52.93	-13.00	39.93	296	194	Vertical				
2	8355.525	49.72	-99.58	-49.86	-13.00	36.86	184	0	Vertical				
3	11265.2700	42.41	-93.16	-50.75	-13.00	37.75	175	72	Vertical				
4	13686.925	44.94	-91.19	-46.25	-13.00	33.25	263	252	Vertical				
5	15020.3600	40.39	-90.50	-50.11	-13.00	37.11	251	103	Vertical				
6	16981.675	44.93	-90.53	-45.60	-13.00	32.60	144	329	Vertical				





Report No.: SEWA2205000015RG02

Rev.: 01

Page: 115 of 131

# Test Band = NSA 2A-n78A 3700-3800\_ TM1 Test Channel = Low

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	1099.375	45.89	-94.91	-49.02	-13.00	36.02	178	172	Horizontal				
2	5898.1667	53.95	-105.79	-51.84	-13.00	38.84	147	134	Horizontal				
3	7310.1800	47.51	-102.24	-54.73	-13.00	41.73	129	118	Horizontal				
4	9830.4167	51.03	-96.29	-45.26	-13.00	32.26	286	68	Horizontal				
5	10965.2700	41.48	-93.87	-52.39	-13.00	39.39	203	102	Horizontal				
6	14620.3600	39.09	-90.62	-51.53	-13.00	38.53	126	8	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Polarity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	2125.375	43.07	-92.35	-49.28	-13.00	36.28	158	116	Vertical				
2	2875.375	39.63	-89.31	-49.68	-13.00	36.68	134	253	Vertical				
3	7310.1800	47.68	-102.24	-54.56	-13.00	41.56	175	114	Vertical				
4	9830.4167	51.75	-96.29	-44.54	-13.00	31.54	245	0	Vertical				
5	10965.2700	40.27	-93.87	-53.60	-13.00	40.60	273	245	Vertical				
6	14620.3600	38.90	-90.62	-51.72	-13.00	38.72	186	7	Vertical				





Rev.: 01

Page: 116 of 131

#### Test Band = NSA 2A-n78A 3700-3800\_ TM1 Test Channel = Mid

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	1153.75	43.62	-94.90	-51.28	-13.00	38.28	285	183	Horizontal				
2	7410.1800	47.75	-102.01	-54.26	-13.00	41.26	268	182	Horizontal				
3	9830.4167	50.87	-96.29	-45.42	-13.00	32.42	241	84	Horizontal				
4	11115.2700	40.43	-93.81	-53.38	-13.00	40.38	155	197	Horizontal				
5	11796.25	48.32	-93.82	-45.50	-13.00	32.50	174	0	Horizontal				
6	14820.3600	38.66	-90.82	-52.16	-13.00	39.16	165	346	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	1077.25	41.88	-94.68	-52.80	-13.00	39.80	285	275	Vertical				
2	2125.375	43.55	-92.35	-48.80	-13.00	35.80	244	114	Vertical				
3	7410.1800	47.24	-102.01	-54.77	-13.00	41.77	145	0	Vertical				
4	9830.4167	51.40	-96.29	-44.89	-13.00	31.89	225	200	Vertical				
5	11115.2700	40.31	-93.81	-53.50	-13.00	40.50	244	84	Vertical				
6	14820.3600	39.06	-90.82	-51.76	-13.00	38.76	177	9	Vertical				





Rev.: 01

Page: 117 of 131

## Test Band = NSA 2A-n78A 3700-3800\_ TM1 Test Channel = High

Final	Final Data List													
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity					
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity					
1	5898.1667	53.65	-105.79	-52.14	-13.00	39.14	284	164	Horizontal					
2	7510.1800	47.52	-101.80	-54.28	-13.00	41.28	244	32	Horizontal					
3	9830.4167	51.46	-96.29	-44.83	-13.00	31.83	288	66	Horizontal					
4	11265.2700	40.72	-93.77	-53.05	-13.00	40.05	261	261	Horizontal					
5	11796.25	48.60	-93.82	-45.22	-13.00	32.22	244	147	Horizontal					
6	15020.3600	37.95	-90.68	-52.73	-13.00	39.73	144	114	Horizontal					

Final	Data List								
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity
1	1075.75	41.45	-94.66	-53.21	-13.00	40.21	288	242	Vertical
2	2125	43.42	-92.36	-48.94	-13.00	35.94	241	102	Vertical
3	7510.1800	47.47	-101.80	-54.33	-13.00	41.33	244	7	Vertical
4	9830.4167	51.89	-96.29	-44.40	-13.00	31.40	174	329	Vertical
5	11265.2700	41.02	-93.77	-52.75	-13.00	39.75	141	262	Vertical
6	15020.3600	37.57	-90.68	-53.11	-13.00	40.11	198	48	Vertical





Rev.: 01

Page: 118 of 131

## Test Band = NSA 5A-n78A 3700-3800\_ TM1 Test Channel = Low

Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7310.1800	47.09	-101.99	-54.90	-13.00	41.90	236	287	Horizontal			
2	8416.475	48.44	-99.34	-50.90	-13.00	37.90	216	121	Horizontal			
3	10965.2700	40.83	-93.83	-53.00	-13.00	40.00	194	61	Horizontal			
4	12703.675	42.19	-92.62	-50.43	-13.00	37.43	175	226	Horizontal			
5	14620.3600	38.67	-90.58	-51.91	-13.00	38.91	182	4	Horizontal			
6	17103	42.53	-90.47	-47.94	-13.00	34.94	155	166	Horizontal			

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	47.78	-101.99	-54.21	-13.00	41.21	211	317	Vertical				
2	8329.075	49.03	-99.74	-50.71	-13.00	37.71	253	4	Vertical				
3	10965.2700	41.12	-93.83	-52.71	-13.00	39.71	263	179	Vertical				
4	12822.125	41.41	-92.28	-50.87	-13.00	37.87	261	352	Vertical				
5	14620.3600	39.30	-90.58	-51.28	-13.00	38.28	194	179	Vertical				
6	15345.225	40.23	-90.47	-50.24	-13.00	37.24	175	344	Vertical				





Rev.: 01

Page: 119 of 131

#### Test Band = NSA 5A-n78A 3700-3800\_ TM1 Test Channel = Mid

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	47.87	-101.60	-53.73	-13.00	40.73	254	360	Horizontal				
2	8814.95	48.87	-98.28	-49.41	-13.00	36.41	184	120	Horizontal				
3	11115.2700	41.18	-93.74	-52.56	-13.00	39.56	175	151	Horizontal				
4	12923.9	42.25	-92.48	-50.23	-13.00	37.23	136	29	Horizontal				
5	14820.3600	39.47	-90.67	-51.20	-13.00	38.20	216	74	Horizontal				
6	16877.6	42.68	-91.01	-48.33	-13.00	35.33	255	57	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	48.34	-101.60	-53.26	-13.00	40.26	195	30	Vertical				
2	8504.45	49.05	-99.47	-50.42	-13.00	37.42	174	242	Vertical				
3	11115.2700	40.56	-93.74	-53.18	-13.00	40.18	122	227	Vertical				
4	12231.025	42.40	-93.10	-50.70	-13.00	37.70	256	165	Vertical				
5	14820.3600	37.99	-90.67	-52.68	-13.00	39.68	236	358	Vertical				
6	16942	43.41	-90.69	-47.28	-13.00	34.28	301	317	Vertical				





Rev.: 01

Page: 120 of 131

## Test Band = NSA 5A-n78A 3700-3800\_ TM1 Test Channel = High

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	47.94	-101.95	-54.01	-13.00	41.01	284	88	Horizontal				
2	8425.675	48.82	-99.36	-50.54	-13.00	37.54	195	60	Horizontal				
3	11265.2700	40.68	-93.16	-52.48	-13.00	39.48	236	240	Horizontal				
4	12831.325	42.61	-92.30	-49.69	-13.00	36.69	261	29	Horizontal				
5	15020.3600	38.10	-90.50	-52.40	-13.00	39.40	174	286	Horizontal				
6	17160.5	42.37	-91.04	-48.67	-13.00	35.67	188	120	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	46.82	-101.95	-55.13	-13.00	42.13	155	359	Vertical				
2	8405.55	49.05	-99.31	-50.26	-13.00	37.26	265	287	Vertical				
3	11265.2700	41.35	-93.16	-51.81	-13.00	38.81	148	195	Vertical				
4	13651.85	42.14	-91.17	-49.03	-13.00	36.03	172	344	Vertical				
5	15020.3600	37.19	-90.50	-53.31	-13.00	40.31	291	358	Vertical				
6	16969.6	42.35	-90.58	-48.23	-13.00	35.23	201	358	Vertical				





Rev.: 01

Page: 121 of 131

# Test Band = NSA 7A-n78A 3700-3800\_ TM1 Test Channel = Low

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	47.68	-101.99	-54.31	-13.00	41.31	258	90	Horizontal				
2	8509.625	49.21	-99.41	-50.20	-13.00	37.20	194	30	Horizontal				
3	10965.2700	41.86	-93.83	-51.97	-13.00	38.97	176	360	Horizontal				
4	13703.6	43.09	-91.21	-48.12	-13.00	35.12	231	44	Horizontal				
5	14620.3600	40.61	-90.58	-49.97	-13.00	36.97	155	44	Horizontal				
6	16826.425	43.99	-91.35	-47.36	-13.00	34.36	140	359	Horizontal				

Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7310.1800	48.45	-101.99	-53.54	-13.00	40.54	213	4	Vertical			
2	8417.625	50.10	-99.34	-49.24	-13.00	36.24	263	104	Vertical			
3	10965.2700	41.26	-93.83	-52.57	-13.00	39.57	261	166	Vertical			
4	12884.8	43.31	-92.38	-49.07	-13.00	36.07	145	73	Vertical			
5	14620.3600	39.33	-90.58	-51.25	-13.00	38.25	185	299	Vertical			
6	17154.175	43.73	-90.98	-47.25	-13.00	34.25	190	299	Vertical			





Rev.: 01

Page: 122 of 131

#### Test Band = NSA 7A-n78A 3700-3800\_ TM1 Test Channel = Mid

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	48.12	-101.60	-53.48	-13.00	40.48	233	301	Horizontal				
2	8302.625	50.00	-99.91	-49.91	-13.00	36.91	261	75	Horizontal				
3	11115.2700	42.26	-93.74	-51.48	-13.00	38.48	305	104	Horizontal				
4	13682.325	43.63	-91.19	-47.56	-13.00	34.56	148	25	Horizontal				
5	14820.3600	39.34	-90.67	-51.33	-13.00	38.33	172	23	Horizontal				
6	16966.725	43.34	-90.59	-47.25	-13.00	34.25	190	270	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	48.78	-101.60	-52.82	-13.00	39.82	296	43	Vertical				
2	8398.65	49.31	-99.31	-50.00	-13.00	37.00	148	255	Vertical				
3	11115.2700	42.05	-93.74	-51.69	-13.00	38.69	175	286	Vertical				
4	13472.45	43.32	-91.60	-48.28	-13.00	35.28	236	88	Vertical				
5	14820.3600	40.35	-90.67	-50.32	-13.00	37.32	261	360	Vertical				
6	16949.475	43.87	-90.66	-46.79	-13.00	33.79	142	344	Vertical				





Rev.: 01

Page: 123 of 131

## Test Band = NSA 7A-n78A 3700-3800\_ TM1 Test Channel = High

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Delevity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	48.28	-101.95	-53.67	-13.00	40.67	266	166	Horizontal				
2	8402.675	49.75	-99.31	-49.56	-13.00	36.56	254	359	Horizontal				
3	11265.2700	42.64	-93.16	-50.52	-13.00	37.52	191	210	Horizontal				
4	12401.225	44.80	-93.18	-48.38	-13.00	35.38	136	166	Horizontal				
5	15020.3600	39.37	-90.50	-51.13	-13.00	38.13	254	359	Horizontal				
6	16948.325	43.78	-90.66	-46.88	-13.00	33.88	179	286	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	47.78	-101.95	-54.17	-13.00	41.17	254	210	Vertical				
2	8413.025	49.21	-99.33	-50.12	-13.00	37.12	233	134	Vertical				
3	11265.2700	41.63	-93.16	-51.53	-13.00	38.53	296	88	Vertical				
4	13629.425	44.29	-91.16	-46.87	-13.00	33.87	174	225	Vertical				
5	15020.3600	39.15	-90.50	-51.35	-13.00	38.35	185	88	Vertical				
6	16925.9	45.44	-90.75	-45.31	-13.00	32.31	165	210	Vertical				





Rev.: 01

Page: 124 of 131

# Test Band = NSA 12A-n78A 3700-3800\_ TM1 Test Channel = Low

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	47.14	-101.99	-54.85	-13.00	41.85	168	358	Horizontal				
2	8443.5	49.85	-99.40	-49.55	-13.00	36.55	194	148	Horizontal				
3	10965.2700	42.82	-93.83	-51.01	-13.00	38.01	185	226	Horizontal				
4	13681.75	44.41	-91.19	-46.78	-13.00	33.78	172	286	Horizontal				
5	14620.3600	40.70	-90.58	-49.88	-13.00	36.88	256	46	Horizontal				
6	16491.2	44.51	-91.68	-47.17	-13.00	34.17	231	210	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	47.53	-101.99	-54.46	-13.00	41.46	165	3	Vertical				
2	8372.775	50.76	-99.47	-48.71	-13.00	35.71	145	344	Vertical				
3	10965.2700	41.54	-93.83	-52.29	-13.00	39.29	185	240	Vertical				
4	13658.75	43.44	-91.18	-47.74	-13.00	34.74	192	3	Vertical				
5	14620.3600	40.83	-90.58	-49.75	-13.00	36.75	143	135	Vertical				
6	16932.8	43.88	-90.73	-46.85	-13.00	33.85	100	257	Vertical				





Rev.: 01

Page: 125 of 131

#### Test Band = NSA 12A-n78A 3700-3800\_ TM1 Test Channel = Mid

Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7410.1800	48.26	-101.60	-53.34	-13.00	40.34	100	359	Horizontal			
2	8357.25	49.65	-99.57	-49.92	-13.00	36.92	145	226	Horizontal			
3	11115.2700	42.32	-93.74	-51.42	-13.00	38.42	126	125	Horizontal			
4	13708.775	43.98	-91.23	-47.25	-13.00	34.25	294	166	Horizontal			
5	14820.3600	40.59	-90.67	-50.08	-13.00	37.08	175	59	Horizontal			
6	16879.9	43.99	-90.99	-47.00	-13.00	34.00	183	270	Horizontal			

Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7410.1800	48.46	-101.60	-53.14	-13.00	40.14	222	118	Vertical			
2	8377.95	49.83	-99.44	-49.61	-13.00	36.61	112	224	Vertical			
3	11115.2700	41.78	-93.74	-51.96	-13.00	38.96	154	161	Vertical			
4	13882.425	44.20	-90.92	-46.72	-13.00	33.72	203	57	Vertical			
5	14820.3600	40.16	-90.67	-50.51	-13.00	37.51	266	330	Vertical			
6	16954.65	43.78	-90.64	-46.86	-13.00	33.86	291	343	Vertical			





Rev.: 01

Page: 126 of 131

## Test Band = NSA 12A-n78A 3700-3800\_ TM1 Test Channel = High

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	48.00	-101.95	-53.95	-13.00	40.95	122	29	Horizontal				
2	8551.025	49.25	-98.95	-49.70	-13.00	36.70	154	287	Horizontal				
3	11265.2700	41.94	-93.16	-51.22	-13.00	38.22	185	287	Horizontal				
4	13157.35	42.93	-91.95	-49.02	-13.00	36.02	196	74	Horizontal				
5	15020.3600	39.26	-90.50	-51.24	-13.00	38.24	236	226	Horizontal				
6	16989.15	43.97	-90.50	-46.53	-13.00	33.53	261	104	Horizontal				

Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7510.1800	48.31	-101.95	-53.64	-13.00	40.64	125	60	Vertical			
2	8410.15	49.98	-99.32	-49.34	-13.00	36.34	142	354	Vertical			
3	11265.2700	41.82	-93.16	-51.34	-13.00	38.34	236	31	Vertical			
4	13903.7	42.98	-90.75	-47.77	-13.00	34.77	291	332	Vertical			
5	15020.3600	39.00	-90.50	-51.50	-13.00	38.50	148	257	Vertical			
6	16836.2	44.50	-91.29	-46.79	-13.00	33.79	170	354	Vertical			





Rev.: 01

Page: 127 of 131

#### Test Band = NSA 66A-n78A 3700-3800\_ TM1 Test Channel = Low

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	48.27	-101.99	-53.72	-13.00	40.72	142	61	Horizontal				
2	8693.05	49.47	-98.67	-49.20	-13.00	36.20	256	61	Horizontal				
3	10965.2700	42.53	-93.83	-51.30	-13.00	38.30	261	332	Horizontal				
4	14620.3600	40.78	-90.58	-49.80	-13.00	36.80	236	227	Horizontal				
5	15789.7	43.35	-90.13	-46.78	-13.00	33.78	296	353	Horizontal				
6	17150.15	44.65	-90.94	-46.29	-13.00	33.29	148	92	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7310.1800	47.56	-101.99	-54.43	-13.00	41.43	155	149	Vertical				
2	8326.775	50.16	-99.76	-49.60	-13.00	36.60	142	125	Vertical				
3	10965.2700	42.24	-93.83	-51.59	-13.00	38.59	236	352	Vertical				
4	13739.25	44.28	-91.33	-47.05	-13.00	34.05	261	357	Vertical				
5	14620.3600	39.81	-90.58	-50.77	-13.00	37.77	199	149	Vertical				
6	15798.325	43.12	-90.12	-47.00	-13.00	34.00	158	149	Vertical				





Rev.: 01

Page: 128 of 131

#### Test Band = NSA 66A-n78A 3700-3800\_ TM1 Test Channel = Mid

Final	Final Data List												
NO	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolovity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7410.1800	48.28	-101.60	-53.32	-13.00	40.32	154	122	Horizontal				
2	8353.225	50.10	-99.59	-49.49	-13.00	36.49	185	195	Horizontal				
3	11115.2700	43.42	-93.74	-50.32	-13.00	37.32	164	331	Horizontal				
4	12822.125	43.69	-92.28	-48.59	-13.00	35.59	192	226	Horizontal				
5	14820.3600	40.61	-90.67	-50.06	-13.00	37.06	175	120	Horizontal				
6	16908.65	43.43	-90.82	-47.39	-13.00	34.39	230	257	Horizontal				

Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority			
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity			
1	7410.1800	48.91	-101.60	-52.69	-13.00	39.69	122	353	Vertical			
2	8340	49.97	-99.68	-49.71	-13.00	36.71	152	226	Vertical			
3	11115.2700	41.57	-93.74	-52.17	-13.00	39.17	236	74	Vertical			
4	12877.325	44.14	-92.37	-48.23	-13.00	35.23	261	197	Vertical			
5	14820.3600	40.50	-90.67	-50.17	-13.00	37.17	142	317	Vertical			
6	16623.45	43.87	-91.69	-47.82	-13.00	34.82	190	16	Vertical			





Rev.: 01

Page: 129 of 131

## Test Band = NSA 66A-n78A 3700-3800\_ TM1 Test Channel = High

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Dolority				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	47.58	-101.95	-54.37	-13.00	41.37	211	359	Horizontal				
2	8399.225	49.90	-99.30	-49.40	-13.00	36.40	102	13	Horizontal				
3	11265.2700	43.01	-93.16	-50.15	-13.00	37.15	235	358	Horizontal				
4	13702.45	43.59	-91.20	-47.61	-13.00	34.61	164	317	Horizontal				
5	15020.3600	39.99	-90.50	-50.51	-13.00	37.51	158	179	Horizontal				
6	17004.675	44.28	-90.46	-46.18	-13.00	33.18	192	105	Horizontal				

Final	Final Data List												
NO.	Frequency	Reading	Factor	Level	Limit	Margin	Height	Angle	Polarity				
NO.	[MHz]	[dBµV]	[dB]	[dBm]	[dBm]	[dB]	[cm]	[°]	Polarity				
1	7510.1800	47.72	-101.95	-54.23	-13.00	41.23	142	4	Vertical				
2	8330.225	49.93	-99.74	-49.81	-13.00	36.81	251	118	Vertical				
3	11265.2700	43.24	-93.16	-49.92	-13.00	36.92	236	14	Vertical				
4	13643.225	44.71	-91.17	-46.46	-13.00	33.46	264	195	Vertical				
5	15020.3600	39.52	-90.50	-50.98	-13.00	37.98	158	149	Vertical				
6	16681.525	45.70	-91.80	-46.10	-13.00	33.10	191	271	Vertical				

#### Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading Level( $dB\mu V$ ) + Factor(dB):

Factor = AF(dB/m) + Cable Factor(dB) - Preamplifier gain(dB)

AF = Antenna Factor(dB/m)

Margin = Limit(dBm) - Level(dBm)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Condit

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Rev.: 01

Page: 130 of 131

#### Frequency Stability for SA

**Test Result** 

Frequency Error VS. Voltage

Voltage										
Band	scs	Bandwidth	Modulation	Channel	RB Config	Voltage	Temper ature	Deviation(Hz)	Deviation (ppm)	Verdict
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	VH	NT	-16.100000	-0.004293	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	VN	NT	-8.400000	-0.002240	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	VL	NT	-16.200000	-0.004320	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	VH	NT	-8.400000	-0.002240	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	VN	NT	-8.500000	-0.002267	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	VL	NT	-11.600000	-0.003093	PASS





Rev.:

Page: 131 of 131

#### Frequency Error VS. Temperature

Voltage										
Band	scs	Bandwidth	Modulation	Channel	RB Config	Voltage	Temper ature	Deviation(Hz)	Deviation (ppm)	Verdict
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	-30	-18.400000	-0.004907	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	-20	-9.700000	-0.002587	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	-10	-10.600000	-0.002827	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	0	-9.500000	-0.002533	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	10	-13.000000	-0.003467	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	20	-15.200000	-0.004053	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	30	-7.100000	-0.001893	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	40	-11.800000	-0.003147	PASS
N78-3700-3800	30	100	DFT-PI2BPSK	М	Outer_Full	NV	50	-9.500000	-0.002533	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	-30	-11.800000	-0.003147	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	-20	-14.100000	-0.003760	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	-10	-5.500000	-0.001467	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	0	-2.800000	-0.000747	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	10	6.600000	0.001760	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	20	-17.000000	-0.004533	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	30	-1.100000	-0.000293	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	40	-12.900000	-0.003440	PASS
N78-3700-3800	30	100	CP-QPSK	М	Outer_Full	NV	50	-4.300000	-0.001147	PASS

The End

