

EMC TEST REPORT



Report No.: 16071296-FCC-E

Supersede Report No: N/A

Applicant	Posh Mobile Limited	
Product Name	Revel Max LTE	
Model No.	L551	
Serial No.	L551A,L551B,L551C	
Test Standard	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014	
Test Date	November 18 to December 04, 2016	
Issue Date	December 05, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16071296-FCC-E
Page	3 of 32

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	10
6.2 RADIATED EMISSIONS.....	16
ANNEX A. TEST INSTRUMENT.....	21
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	22
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	28
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	31
ANNEX E. DECLARATION OF SIMILARITY	32

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071296-FCC-E	NONE	Original	December 05, 2016

2. Customer information

Applicant Name	Posh Mobile Limited
Applicant Add	1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung Street, Hung Hom, Kowloon, Hong Kong
Manufacturer	Shenzhen Posh Mobile Limited
Manufacturer Add	Room 6H, Block C, NEO Building, Chegongmiao, Futian District, Shenzhen, P.R. China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Revel Max LTE

Main Model: L551

Serial Model: L551A,L551B,L551C

GSM850: -1.27dBi

PCS1900: 0.84dBi

UMTS-FDD Band V: -1.27dBi

UMTS-FDD Band IV: 0.84dBi

UMTS-FDD Band II: 0.84dBi

LTE Band II: 0.54dBi

Antenna Gain: LTE Band IV: 0.84dBi

LTE Band VII: 0.9dBi

LTE Band XII: -2.02dBi

LTE Band XVII: -2.06dBi

WIFI: 0.87dBi

Bluetooth/BLE: 0.87dBi

GPS: 0.89dBi

Antenna Type: PIFA antenna

Adapter:

Model: A88-501500

Input: AC100-240V~50/60Hz,0.35A

Output: DC 5.0V,1.5A

Battery:

Spec: 3.85V,2820mAh

Equipment Category : JBP

Test Report	16071296-FCC-E
Page	7 of 32

Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK BLE: GFSK GPS:BPSK
	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz
	UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz
RF Operating Frequency (ies):	LTE Band II TX: 1850.7 ~ 1909.3MHz; RX : 1930.7 ~ 1989.3 MHz LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7~ 2154.3 MHz LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz LTE Band XII TX: 699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz LTE Band XVII TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz GPS: 1575.42 MHz
Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V: 102CH UMTS-FDD Band IV: 202CH UMTS-FDD Band II: 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH GPS:1CH
Port:	USB Port, Earphone Port

Test Report	16071296-FCC-E
Page	8 of 32

Trade Name : Posh

FCC ID: 2AG8KL551

Date EUT received: November 17, 2016

Test Date(s): November 18 to December 04, 2016

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	November 22, 2016
Tested By :	Loren Luo


Requirement(s):

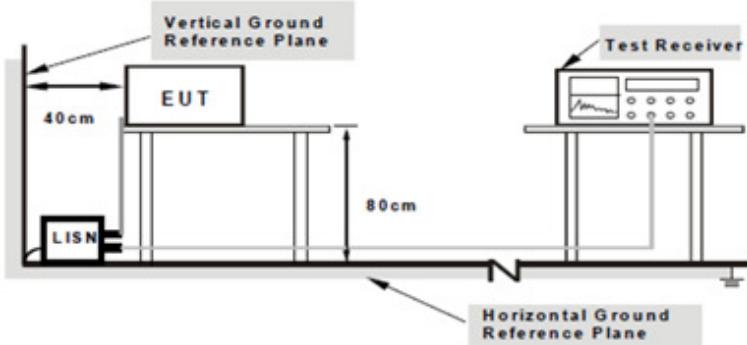Spec	Item	Requirement	Applicable														
47CFR§15. 107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a table. A LISN (Line Impedance Stabilization Network) is connected between the EUT and the power source. A Test Receiver is connected to the LISN. The setup is positioned on a horizontal ground reference plane. The distance between the LISN and the EUT is 40 cm, and the distance between the LISN and the Test Receiver is 80 cm. A vertical ground reference plane is also indicated.</p> <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains. 																


	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

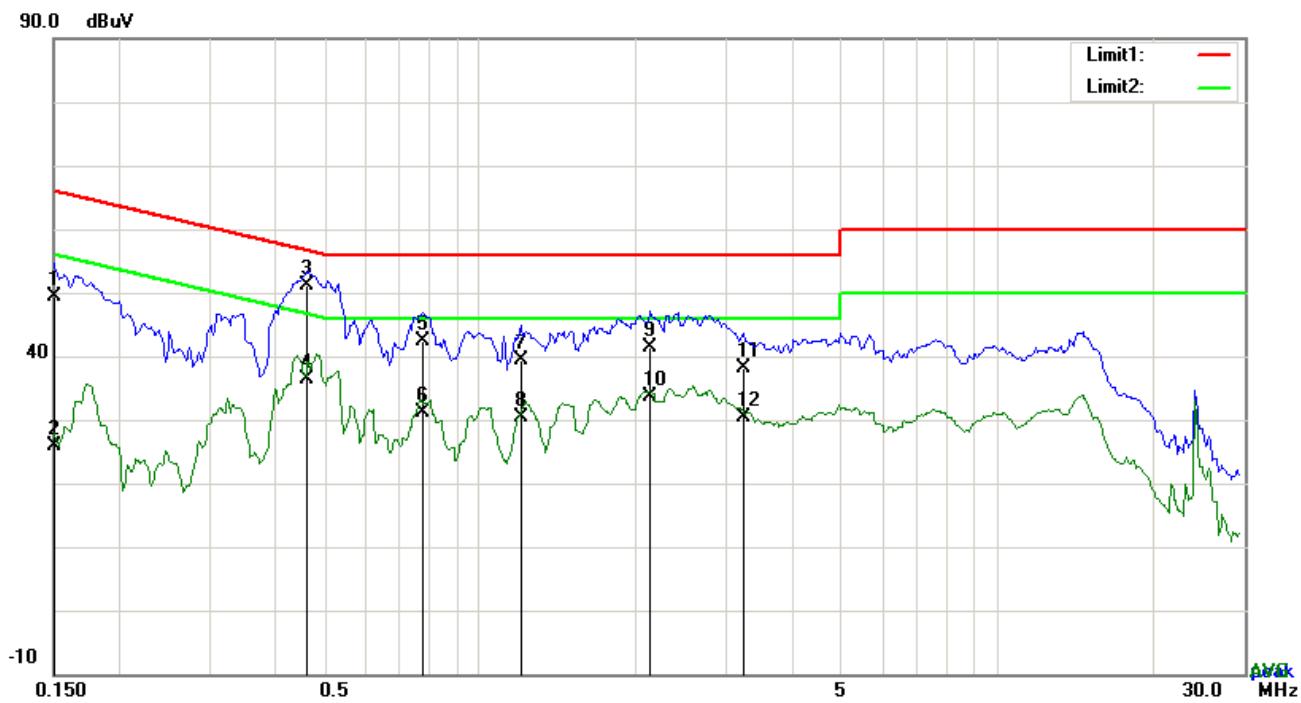Test Mode : USB Mode

Test Data
Phase Line Plot at 120Vac, 60Hz

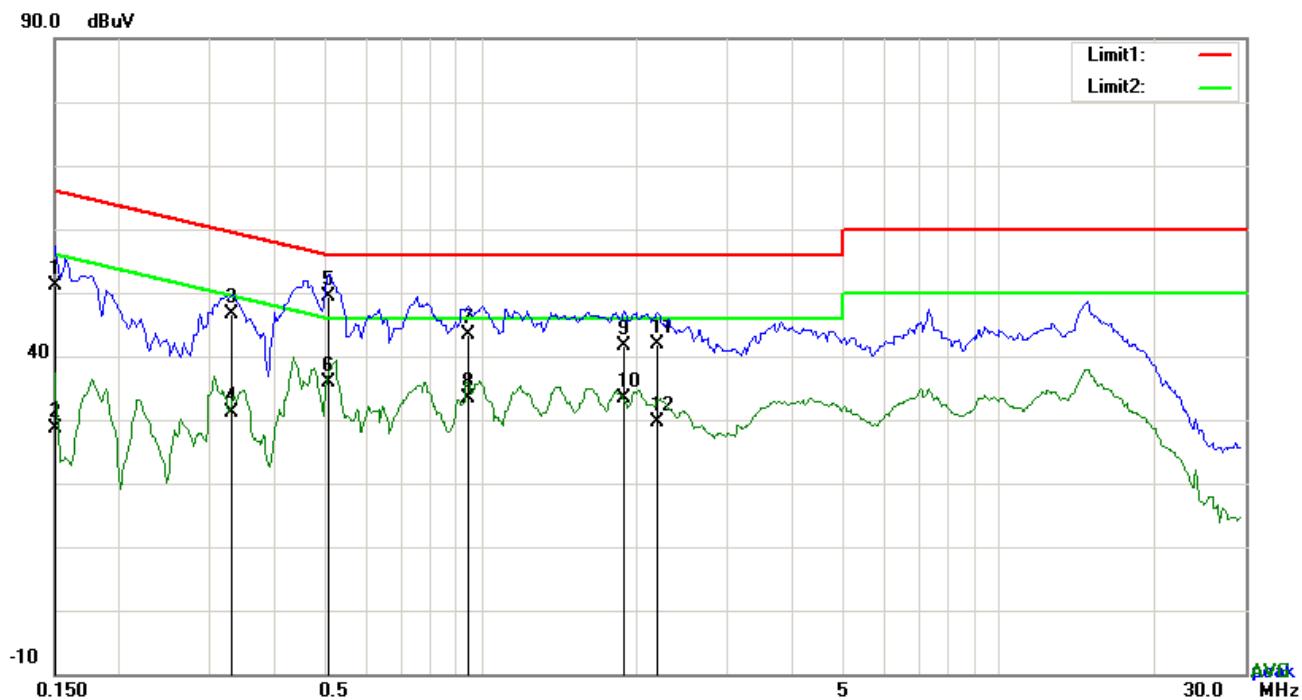
No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1500	36.26	QP	13.20	49.46	66.00	-16.54
2	L1	0.1500	12.67	AVG	13.20	25.87	56.00	-30.13
3	L1	0.4659	39.08	QP	12.03	51.11	56.59	-5.48
4	L1	0.4659	24.40	AVG	12.03	36.43	46.59	-10.16
5	L1	0.7779	30.72	QP	11.62	42.34	56.00	-13.66
6	L1	0.7779	19.41	AVG	11.62	31.03	46.00	-14.97
7	L1	1.1991	28.09	QP	11.40	39.49	56.00	-16.51
8	L1	1.1991	18.89	AVG	11.40	30.29	46.00	-15.71
9	L1	2.1312	29.99	QP	11.40	41.39	56.00	-14.61
10	L1	2.1312	22.33	AVG	11.40	33.73	46.00	-12.27
11	L1	3.2262	26.66	QP	11.40	38.06	56.00	-17.94
12	L1	3.2262	18.89	AVG	11.40	30.29	46.00	-15.71

Test Mode : USB Mode

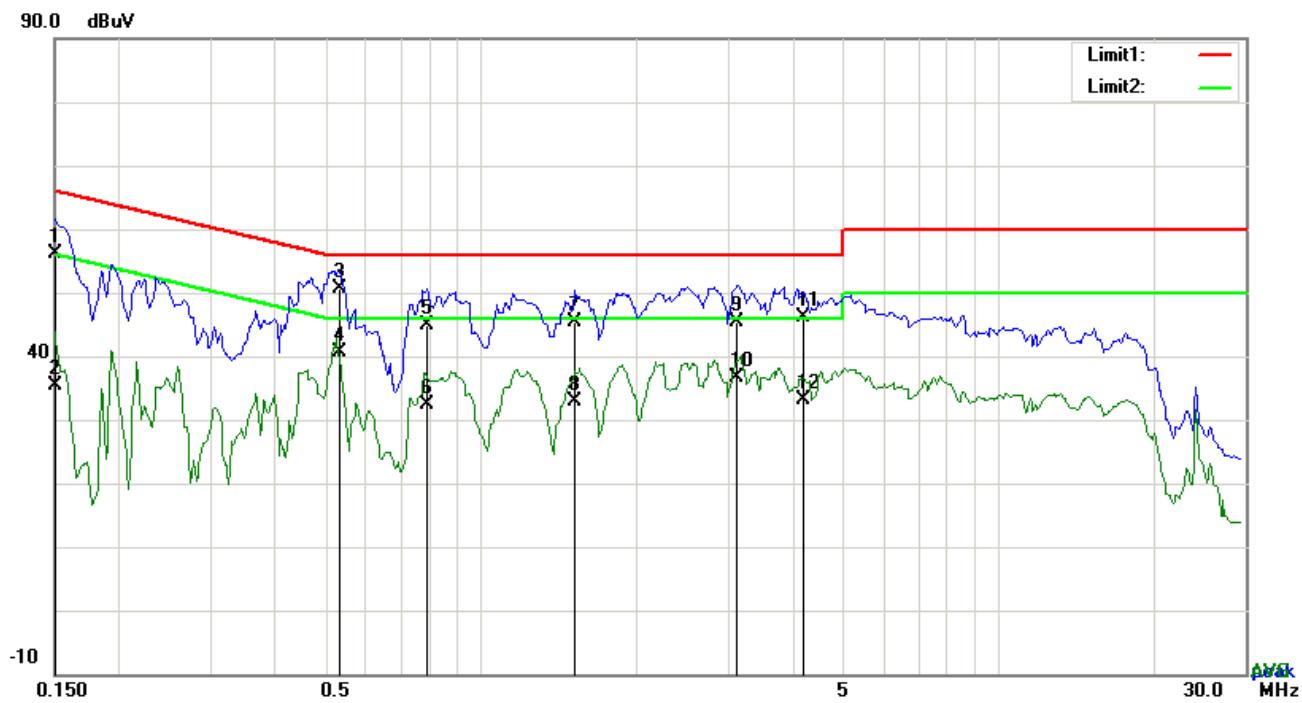Test Data
Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1500	38.04	QP	13.20	51.24	66.00	-14.76
2	N	0.1500	15.54	AVG	13.20	28.74	56.00	-27.26
3	N	0.3294	34.08	QP	12.53	46.61	59.47	-12.86
4	N	0.3294	18.51	AVG	12.53	31.04	49.47	-18.43
5	N	0.5088	37.58	QP	11.89	49.47	56.00	-6.53
6	N	0.5088	23.99	AVG	11.89	35.88	46.00	-10.12
7	N	0.9456	31.82	QP	11.45	43.27	56.00	-12.73
8	N	0.9456	21.95	AVG	11.45	33.40	46.00	-12.60
9	N	1.8933	30.03	QP	11.51	41.54	56.00	-14.46
10	N	1.8933	21.84	AVG	11.51	33.35	46.00	-12.65
11	N	2.1975	30.22	QP	11.55	41.77	56.00	-14.23
12	N	2.1975	18.20	AVG	11.55	29.75	46.00	-16.25

Test Mode : USB Mode

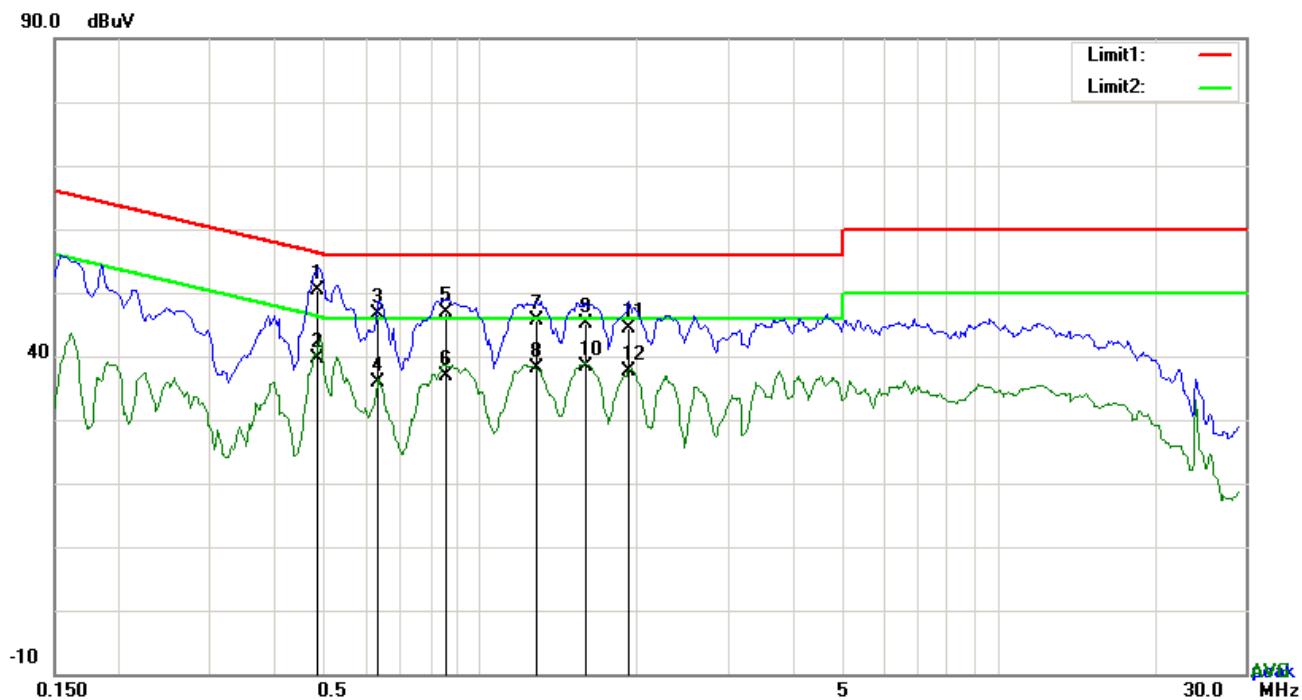Test Data
Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1500	42.93	QP	13.20	56.13	66.00	-9.87
2	L1	0.1500	22.15	AVG	13.20	35.35	56.00	-20.65
3	L1	0.5322	38.82	QP	11.87	50.69	56.00	-5.31
4	L1	0.5322	28.70	AVG	11.87	40.57	46.00	-5.43
5	L1	0.7896	33.30	QP	11.61	44.91	56.00	-11.09
6	L1	0.7896	20.65	AVG	11.61	32.26	46.00	-13.74
7	L1	1.5189	33.91	QP	11.40	45.31	56.00	-10.69
8	L1	1.5189	21.45	AVG	11.40	32.85	46.00	-13.15
9	L1	3.1365	34.02	QP	11.40	45.42	56.00	-10.58
10	L1	3.1365	25.16	AVG	11.40	36.56	46.00	-9.44
11	L1	4.2129	34.80	QP	11.40	46.20	56.00	-9.80
12	L1	4.2129	21.75	AVG	11.40	33.15	46.00	-12.85

Test Mode : USB Mode

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.4854	38.33	QP	11.95	50.28	56.25	-5.97
2	N	0.4854	27.56	AVG	11.95	39.51	46.25	-6.74
3	N	0.6336	34.79	QP	11.77	46.56	56.00	-9.44
4	N	0.6336	24.19	AVG	11.77	35.96	46.00	-10.04
5	N	0.8598	35.23	QP	11.54	46.77	56.00	-9.23
6	N	0.8598	25.22	AVG	11.54	36.76	46.00	-9.24
7	N	1.2810	34.23	QP	11.44	45.67	56.00	-10.33
8	N	1.2810	26.59	AVG	11.44	38.03	46.00	-7.97
9	N	1.5935	33.76	QP	11.47	45.23	56.00	-10.77
10	N	1.5935	26.82	AVG	11.47	38.29	46.00	-7.71
11	N	1.9323	32.80	QP	11.52	44.32	56.00	-11.68
12	N	1.9323	26.18	AVG	11.52	37.70	46.00	-8.30

6.2 Radiated Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	November 22, 2016
Tested By :	Loren Luo

Requirement(s):

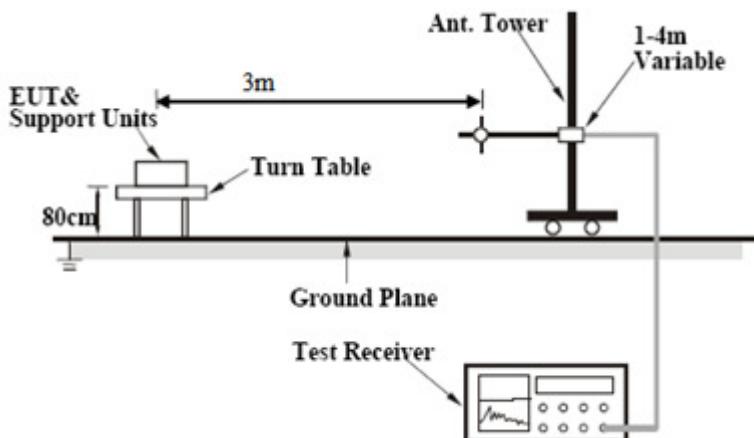Spec	Item	Requirement	Applicable										
47CFR§15.109(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is mounted on the turn table. A vertical 'Ant. Tower' is connected to the turn table. The distance between the EUT and the turn table is 3m. The height of the EUT is 80cm. The height of the Ant. Tower is adjustable, ranging from 1m to 4m. A 'Test Receiver' is connected to the Ant. Tower to measure the emissions.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level) 											

	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) <input type="checkbox"/> 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : **USB Mode**

Below 1GHz




Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	59.2325	42.54	peak	-14.28	28.26	40.00	-11.74	100	192
2	H	145.3506	33.75	peak	-8.46	25.29	43.50	-18.21	100	105
3	H	223.7334	41.82	peak	-8.95	32.87	46.00	-13.13	100	156
4	H	299.3158	37.77	peak	-6.93	30.84	46.00	-15.16	100	34
5	H	560.6928	30.10	peak	-0.64	29.46	46.00	-16.54	100	257
6	H	878.3214	27.31	peak	4.30	31.61	46.00	-14.39	100	116

Below 1GHz

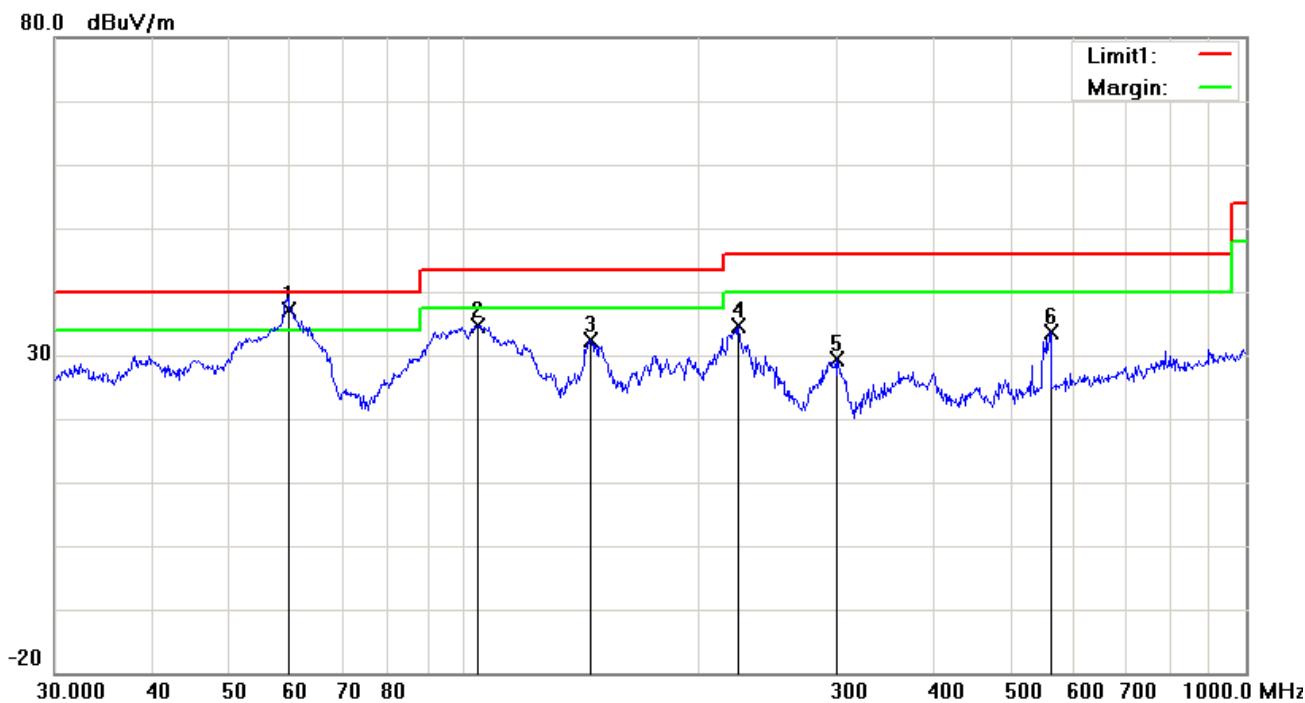

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	59.6493	51.36	QP	-14.32	37.04	40.00	-2.96	100	138
2	V	104.1701	44.76	peak	-10.06	34.70	43.50	-8.80	100	92
3	V	145.3506	40.84	peak	-8.46	32.38	43.50	-11.12	100	108
4	V	224.5193	43.57	peak	-8.96	34.61	46.00	-11.39	100	241
5	V	299.3158	36.24	peak	-6.93	29.31	46.00	-16.69	100	95
6	V	562.6624	34.35	peak	-0.61	33.74	46.00	-12.26	100	228

Above 1GHz

Frequency (MHz)	Amplitude (dB μ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/AV)
1565.75	50.33	87	155	V	-21.42	74	-23.67	PK
2075.42	50.41	63	133	V	-22.83	74	-23.59	PK
1672.45	49.57	49	150	V	-21.72	74	-24.43	PK
2176.42	50.12	72	120	H	-21.68	74	-23.88	PK
2863.15	49.63	52	110	H	-21.47	74	-24.37	PK
1882.41	50.72	83	125	H	-21.46	74	-23.28	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5*2480MHz=12,400MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.


Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>


Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo

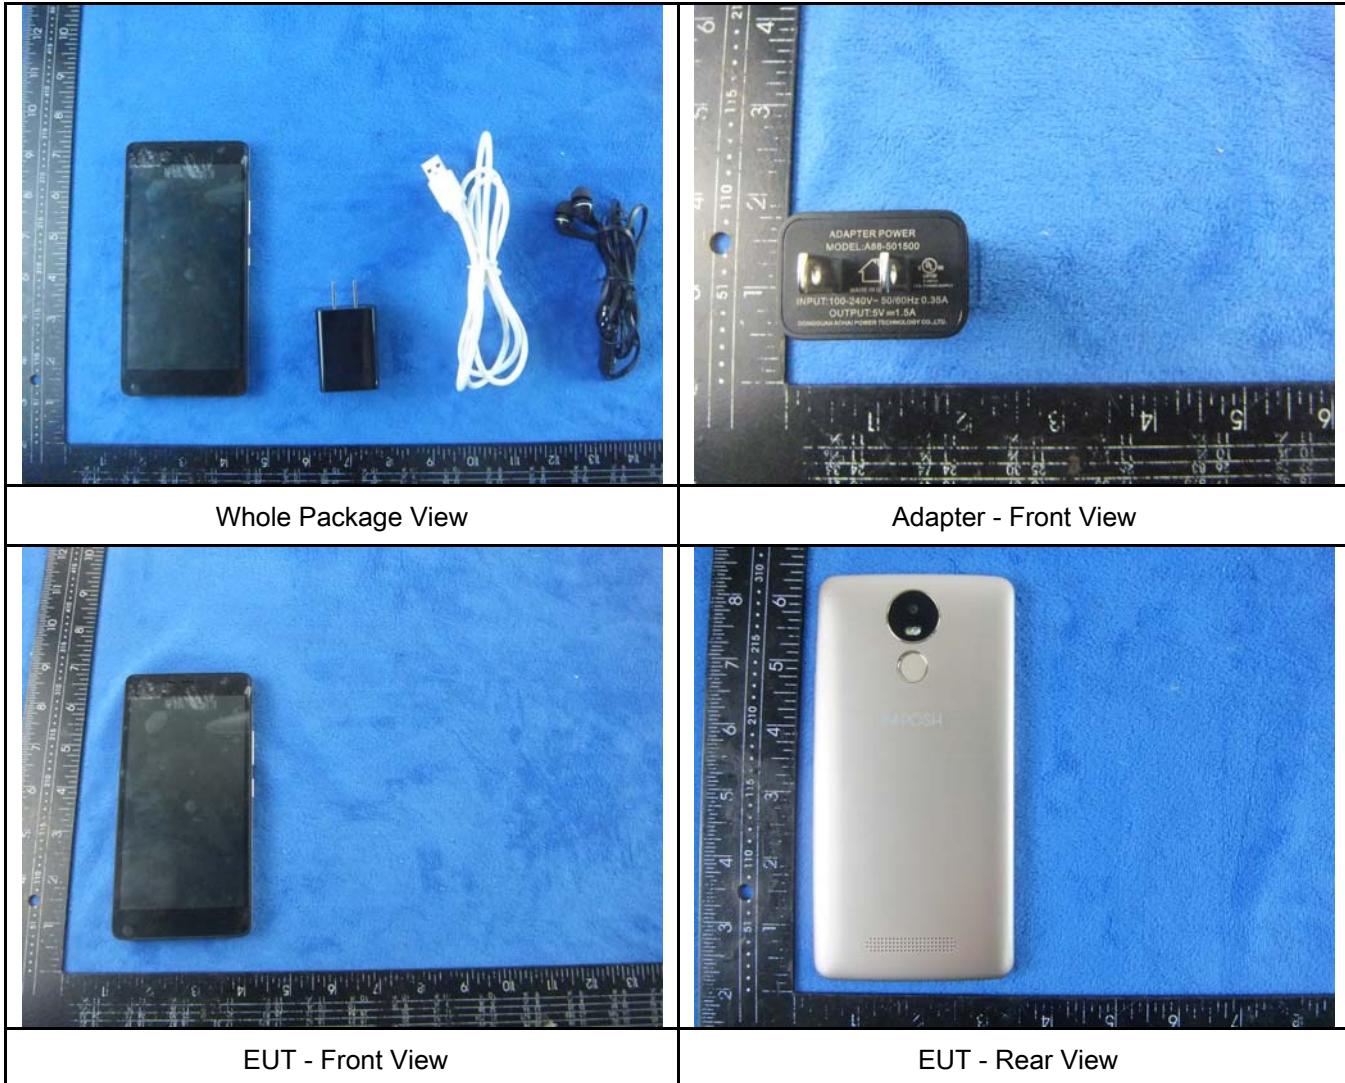

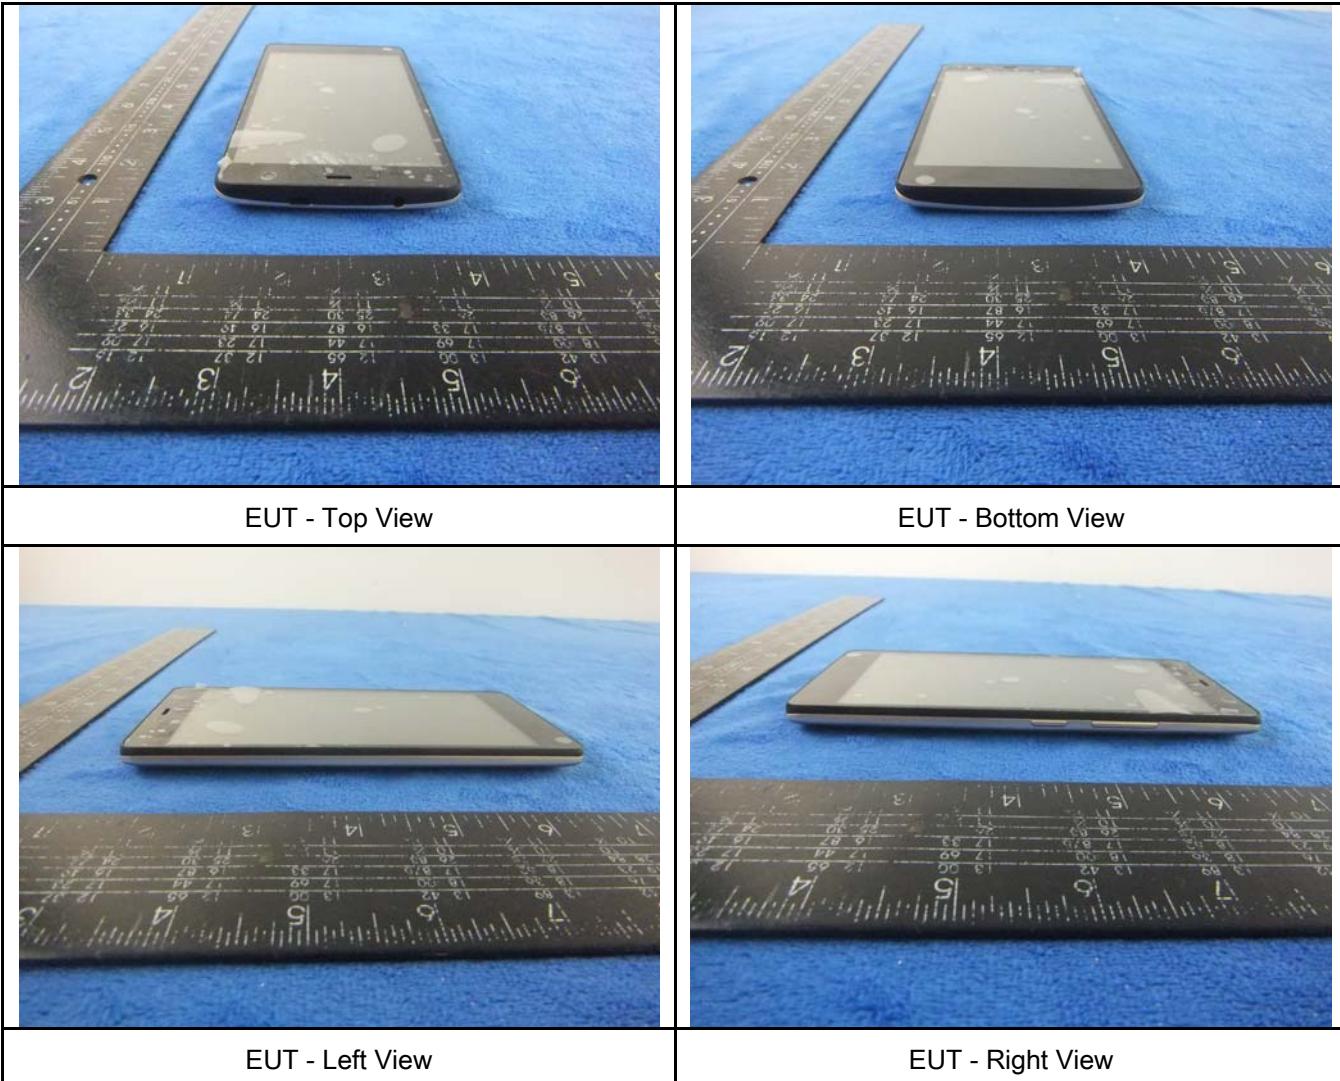

Annex B.ii. Photograph: EUT Internal Photo

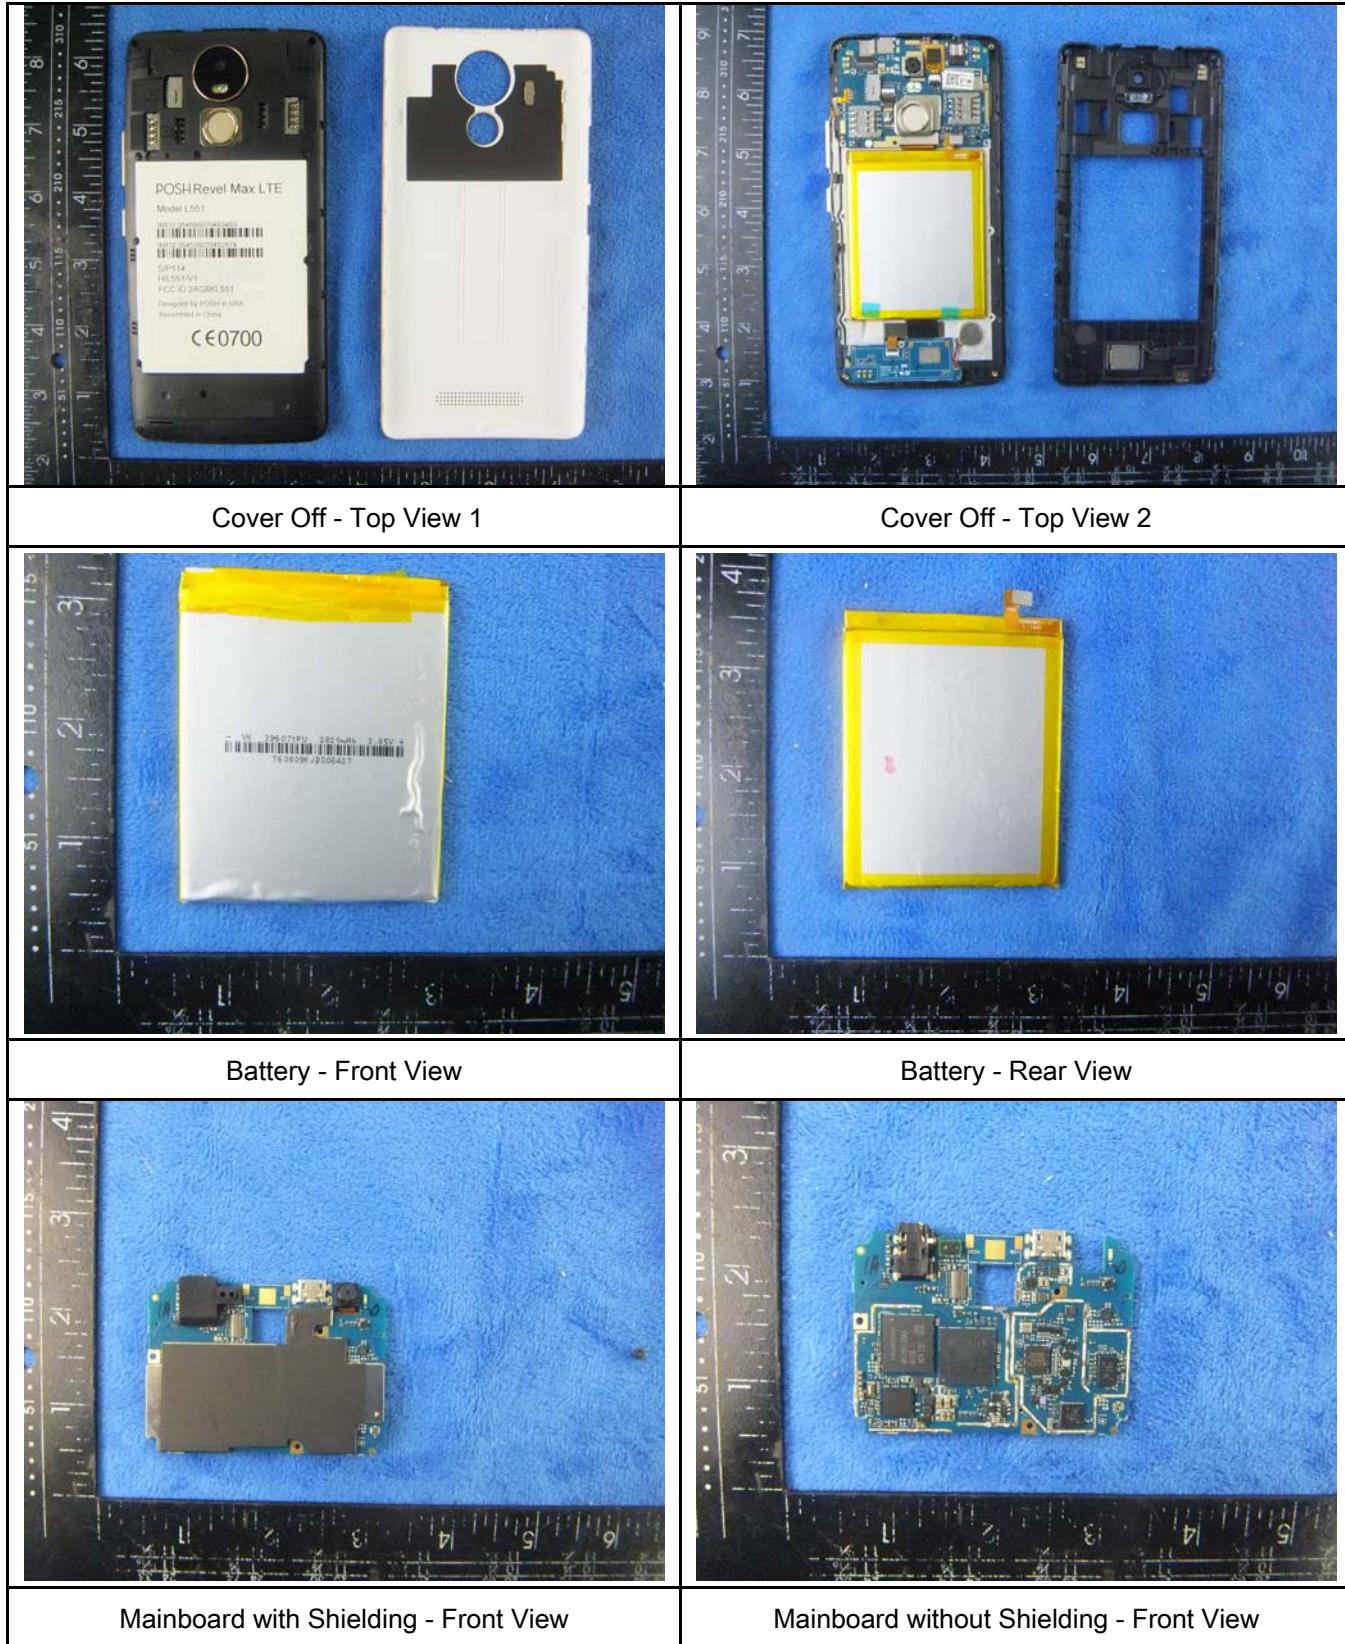

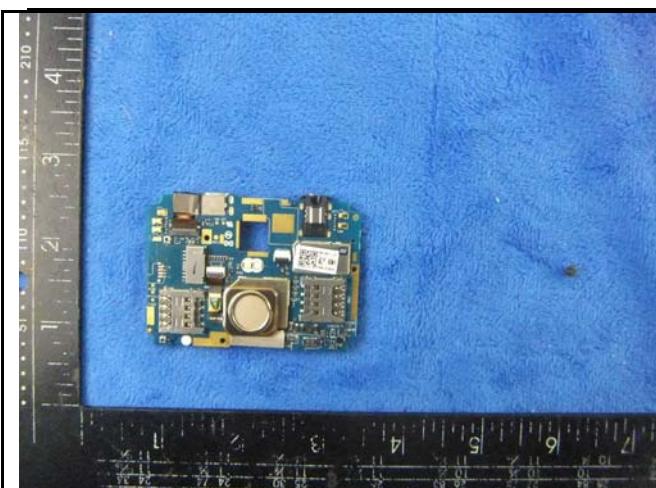

Mainboard with Shielding – Rear View




Mainboard without Shielding - Rear View




LCD – Front View



LCD – Rear View

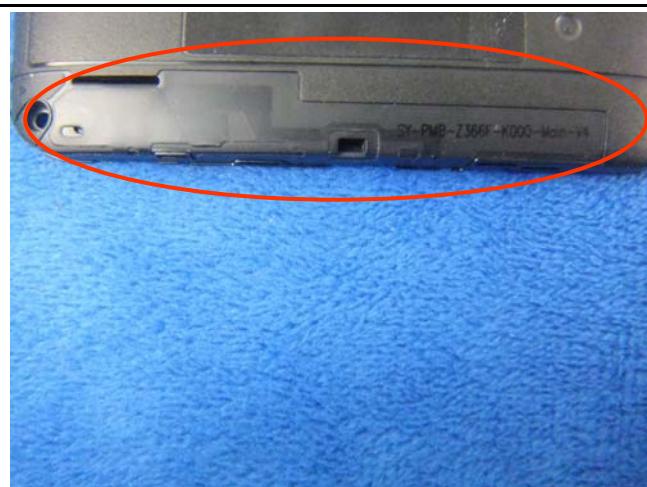

GSM/PCS/UMTS-FDD Antenna View

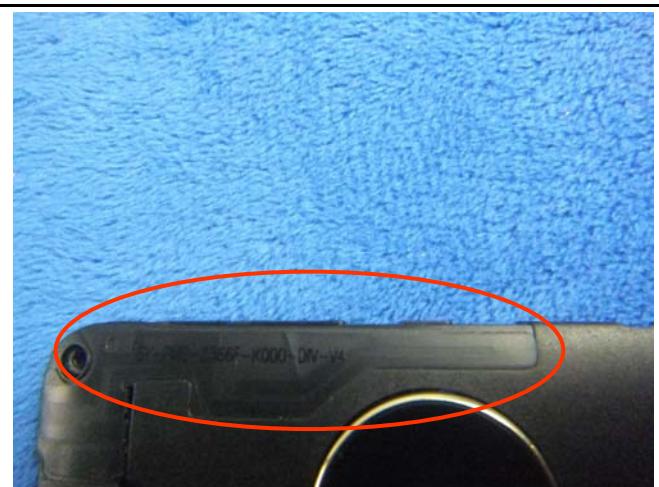


LTE - Antenna View



WIFI/BT/BLE/GPS - Antenna View


Annex B.iii. Photograph: Test Setup Photo

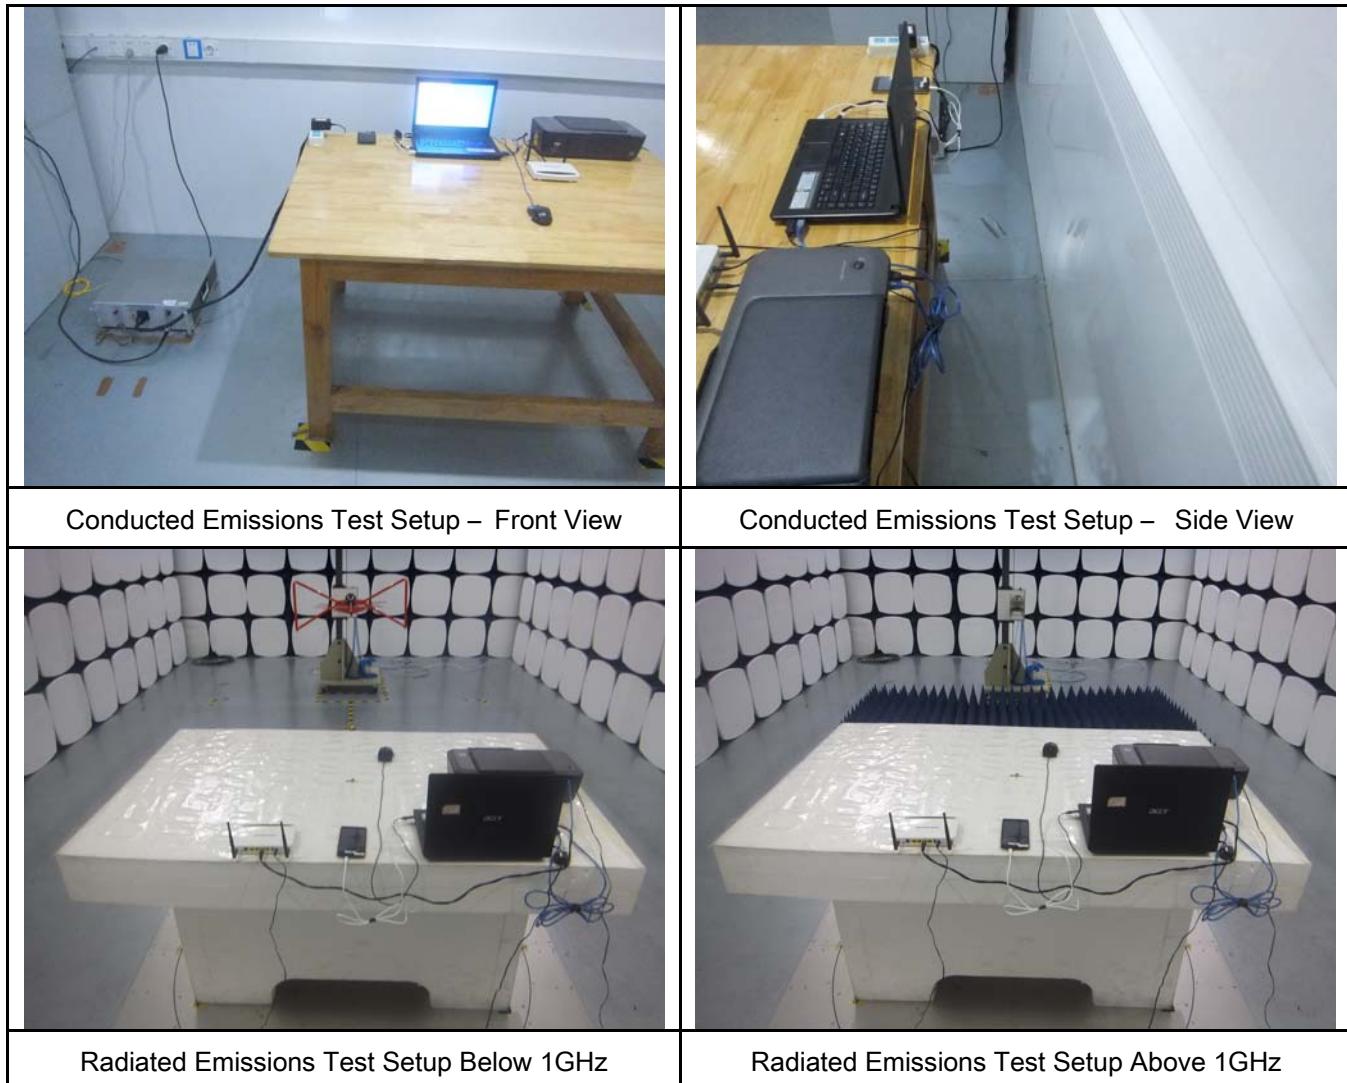


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

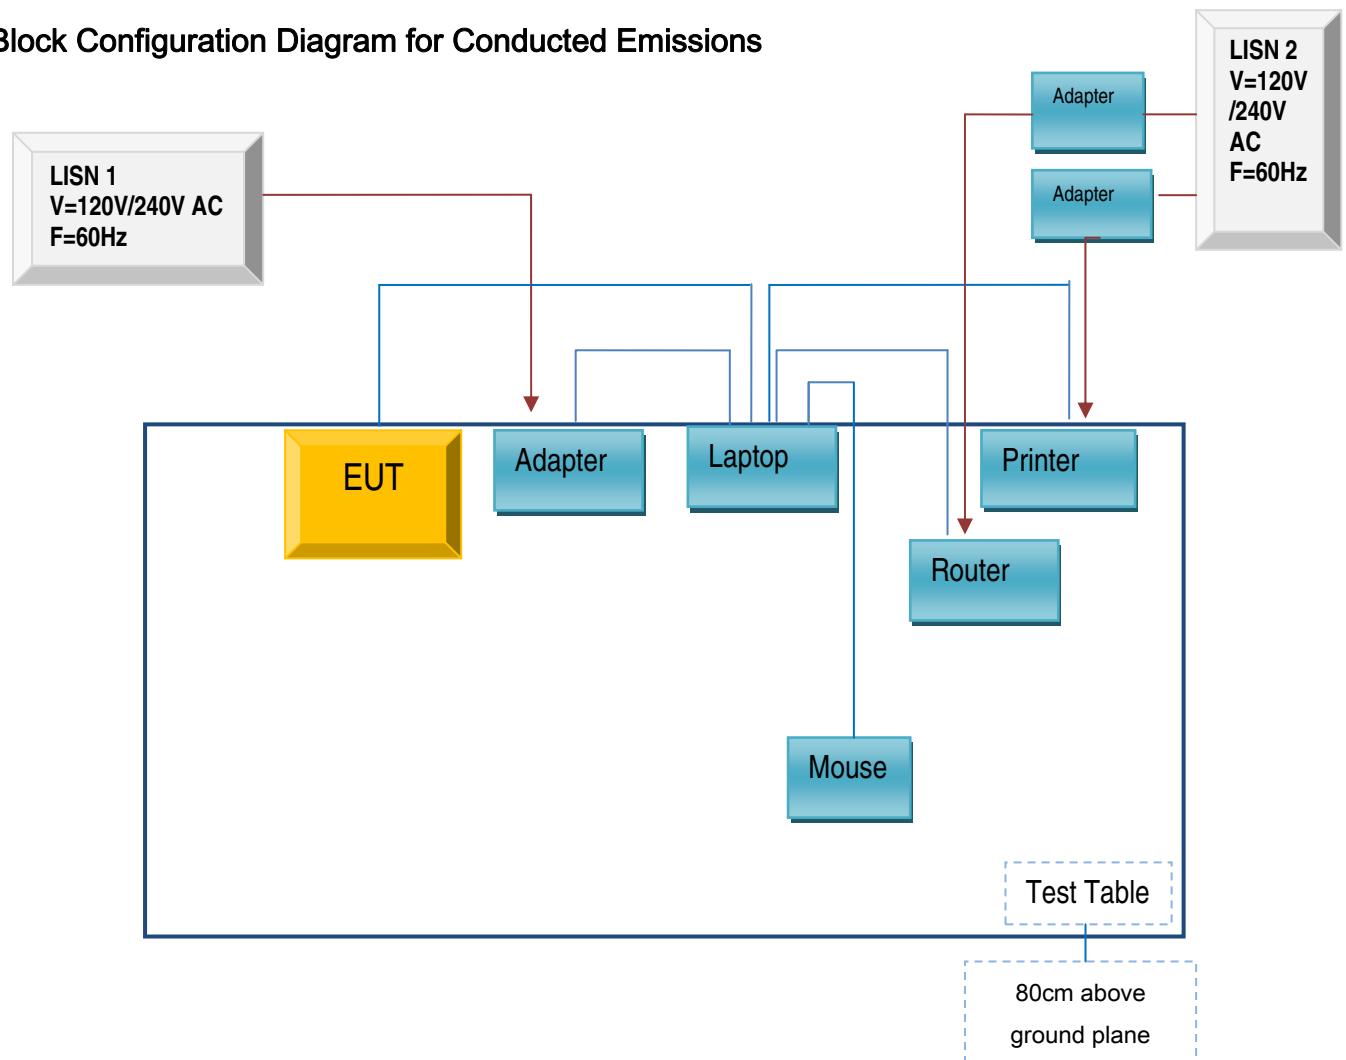

Block Configuration Diagram for Radiated Emissions

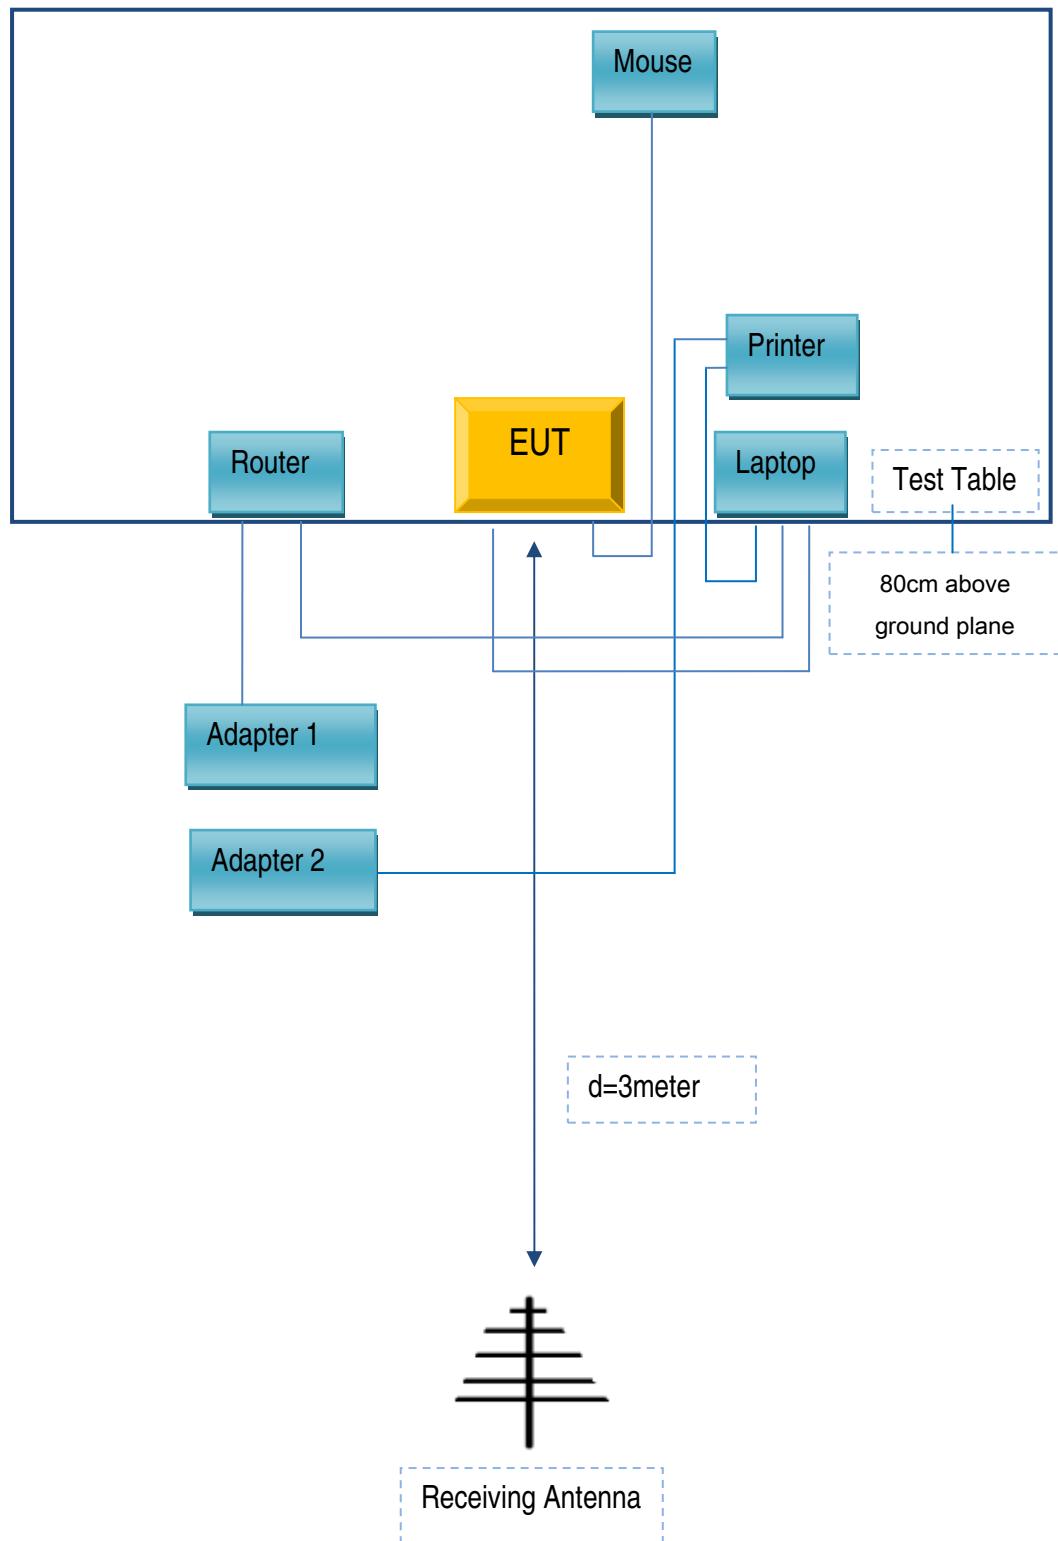

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Test Report	16071296-FCC-E
Page	31 of 32

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

Posh Mobile Limited

To: SIEMIC, 775 Montague Expressway, Milpitas, CA 95035, USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 4 model numbers on the FCC certificates and reports, as following:

Model No.: L551 L551A L551B L551C

We declare that, all the model PCB, Antenna and Appearance shape, accessories are the same.
The difference of these is listed as below:

Main Model No.	Serial Model No.	Difference
L551	L551A L551B L551C	Different model name and color

Thank you!

Signature:



Printed name/title: Warren Chan

Address: 1011A, 10/F., Harbour Centre Tower 1 No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong