

TEST REPORT

Reference No. : WTU17S0579074E
FCC ID..... : 2AHAK-ELSFC5017
Applicant..... : KUNSHAN KONKA ELECTRONIC CO.,LTD
Address : No.189 East Qianjin Road, KUNSHAN Jiangsu 215300 CHINA
Manufacturer : The same as above
Address : The same as above
Product Name : LCD TV
Model No. : ELSFC5017
Standards..... : FCC CFR47 Part 15 C Section 15.247:2016
Date of Receipt sample.. : May 12, 2017
Date of Test..... : May 13 – 30, 2017
Date of Issue : May 31, 2017
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:

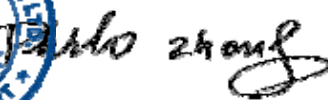

Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T.	4
3.2 DETAILS OF E.U.T.....	4
3.3 CHANNEL LIST.....	4
3.4 TEST MODE.....	5
3.5 TEST FACILITY.....	5
4 EQUIPMENT USED DURING TEST	6
4.1 EQUIPMENT'S LIST	6
4.2 MEASUREMENT UNCERTAINTY	7
4.3 TEST EQUIPMENT CALIBRATION	7
5 TEST SUMMARY	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP.....	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED EMISSIONS.....	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.6 SUMMARY OF TEST RESULTS	16
8 BAND EDGE MEASUREMENT	28
8.1 TEST PROCEDURE.....	28
8.2 TEST RESULT	29
9 BANDWIDTH MEASUREMENT.....	33
9.1 TEST PROCEDURE:	33
9.2 TEST RESULT:.....	33
10 MAXIMUM PEAK OUTPUT POWER.....	40
10.1 TEST PROCEDURE:.....	40
10.2 TEST RESULT:	40
11 POWER SPECTRAL DENSITY	41
11.1 TEST PROCEDURE:.....	41
11.2 TEST RESULT:	41
12 ANTENNA REQUIREMENT	48
13 RF EXPOSURE.....	49
13.1 REQUIREMENTS.....	49
13.2 THE PROCEDURES / LIMIT.....	49
13.3 MPE CALCULATION METHOD	50
14 PHOTOGRAPHS – MODEL ELSFC5017TEST SETUP	51
14.1 RADIATED EMISSION	51
14.2 CONDUCTED EMISSION AT TEST SITE 1#.....	52

15	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	53
15.1	MODEL ELSFC5017-EXTERNAL PHOTOS	53
15.2	MODEL ELSFC5017-INTERNAL PHOTOS	59

3 General Information

3.1 General Description of E.U.T.

Product Name: LCD TV

Model No.: ELSFC5017

Operation Frequency: 802.11b/g/n HT20: 2412MHz ~ 2462MHz,
802.11n HT40: 2422MHz~2452MHz

The Lowest Oscillator: 24MHz

Antenna Gain: 2.0dBi

Type of modulation: IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.)
IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.)
IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max.,
HT40:150Mbps max.)

3.2 Details of E.U.T

Technical Data: Input Power: AC 120V~ 50/60Hz, 100W

3.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

3.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Radiated Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

4 Equipment Used during Test

4.1 Equipment's List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12, 2016	Sep.11, 2017
2.	LISN	R&S	ENV216	100115	Sep.12, 2016	Sep.11, 2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12, 2016	Sep.11, 2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12, 2016	Sep.11, 2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12, 2016	Sep.11, 2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12, 2016	Sep.11, 2017
4.	Cable	LARGE	RF300	-	Sep.12, 2016	Sep.11, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2017	Apr.28, 2018
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	Oct.15, 2016	Oct.14, 2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.07, 2017	Apr.06, 2018
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.07, 2017	Apr.06, 2018
6	Broad-band Horn Antenna (FCC/IC ID					

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Signal Generator	R&S	SMB100A	105942	Sep.12, 2016	Sep.11, 2017
2.	RF Power Amplifier	BONN Elektronik	BLWA0830-160/100/40D	128740	Sep.12, 2016	Sep.11, 2017
3.	Gestockte Breitband (S tacked) Log.-per.Antenna	SCHWARZBECK	STLP9128D	043	Sep.12, 2016	Sep.11, 2017
4.	Power Meter	R&S	NRP2	102031	Sep.12, 2016	Sep.11, 2017

4.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

4.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	C
Conducted Emissions	15.207(a)	C
Bandwidth	15.247(a)(2)	C
Maximum Peak Output Power	15.247(b)(3),(4)	C
Power Spectral Density	15.247(e)	C
Band Edge	15.247(d)	C
Antenna Requirement	15.203	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013,ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

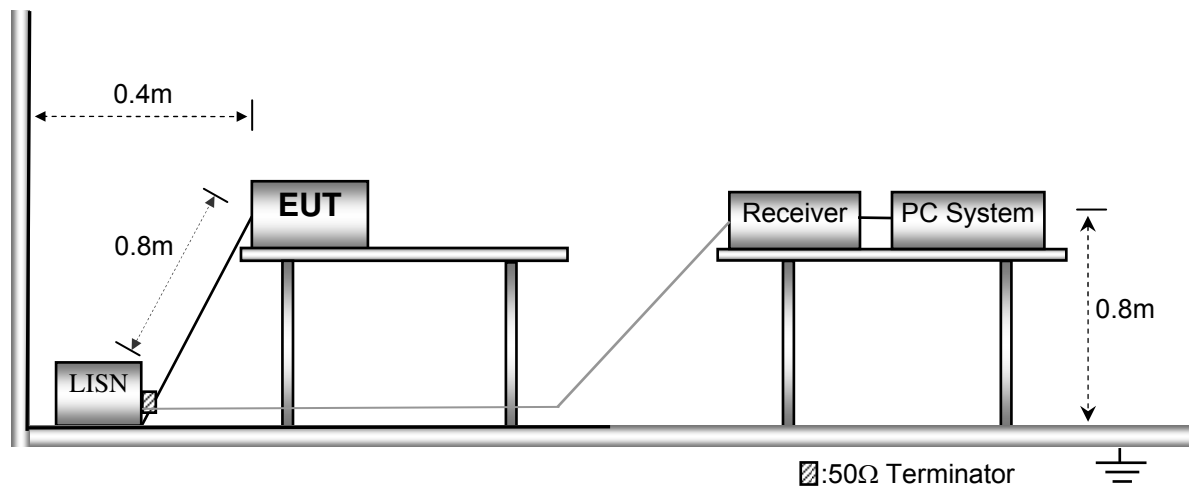


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

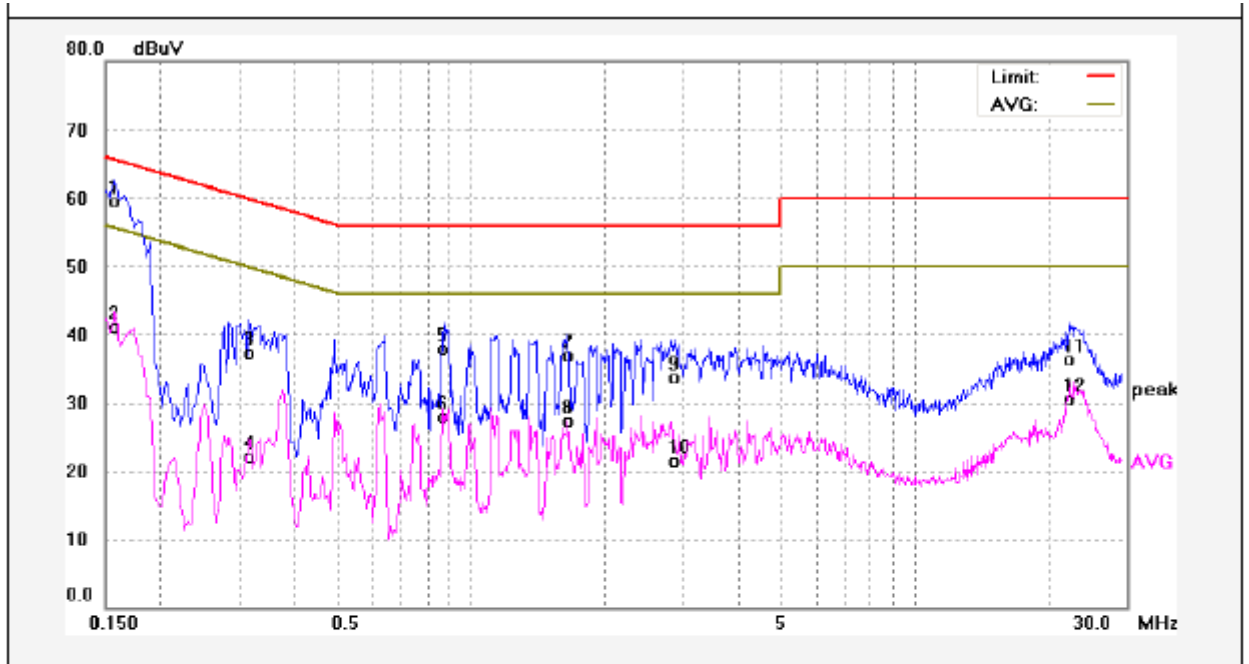

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	49.95	9.64	59.59	65.56	-5.97	QP	
2	0.1580	31.56	9.64	41.20	55.56	-14.36	AVG	
3	0.3180	27.58	9.64	37.22	59.76	-22.54	QP	
4	0.3180	12.37	9.64	22.01	49.76	-27.75	AVG	
5	0.8740	28.09	9.79	37.88	56.00	-18.12	QP	
6	0.8740	18.04	9.79	27.83	46.00	-18.17	AVG	
7	1.6620	27.06	9.92	36.98	56.00	-19.02	QP	
8	1.6620	17.47	9.92	27.39	46.00	-18.61	AVG	
9	2.8940	23.74	9.93	33.67	56.00	-22.33	QP	
10	2.8940	11.66	9.93	21.59	46.00	-24.41	AVG	
11	22.5260	25.90	10.37	36.27	60.00	-23.73	QP	
12	22.5260	20.19	10.37	30.56	50.00	-19.44	AVG	

Neutral line:

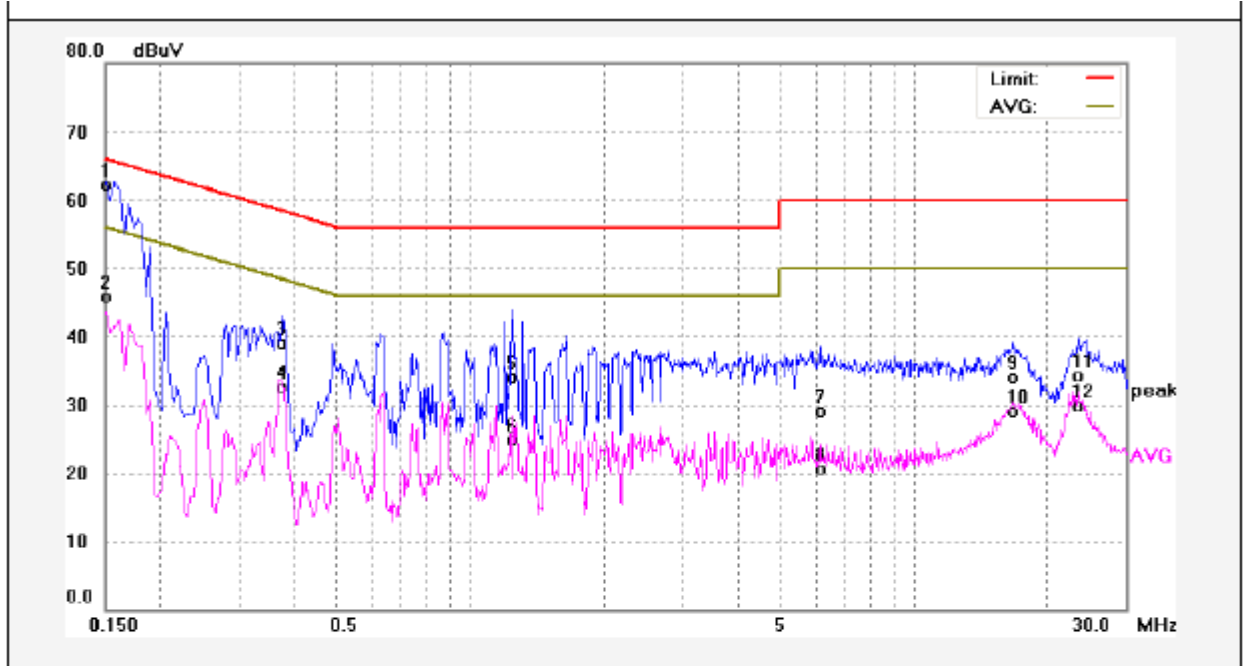

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	52.68	9.64	62.32	65.99	-3.67	QP	
2	0.1500	36.32	9.64	45.96	55.99	-10.03	AVG	
3	0.3780	29.37	9.64	39.01	58.32	-19.31	QP	
4	0.3780	23.06	9.64	32.70	48.32	-15.62	AVG	
5	1.2380	24.29	9.87	34.16	56.00	-21.84	QP	
6	1.2380	14.98	9.87	24.85	46.00	-21.15	AVG	
7	6.1380	19.08	10.06	29.14	60.00	-30.86	QP	
8	6.1380	10.61	10.06	20.67	50.00	-29.33	AVG	
9	16.7060	23.88	10.27	34.15	60.00	-25.85	QP	
10	16.7060	18.93	10.27	29.20	50.00	-20.80	AVG	
11	23.5860	24.02	10.38	34.40	60.00	-25.60	QP	
12	23.5860	19.45	10.38	29.83	50.00	-20.17	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013,ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :


Temperature: 23.5 °C

Humidit

7.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.

The test setup for emission measurement below 30MHz.

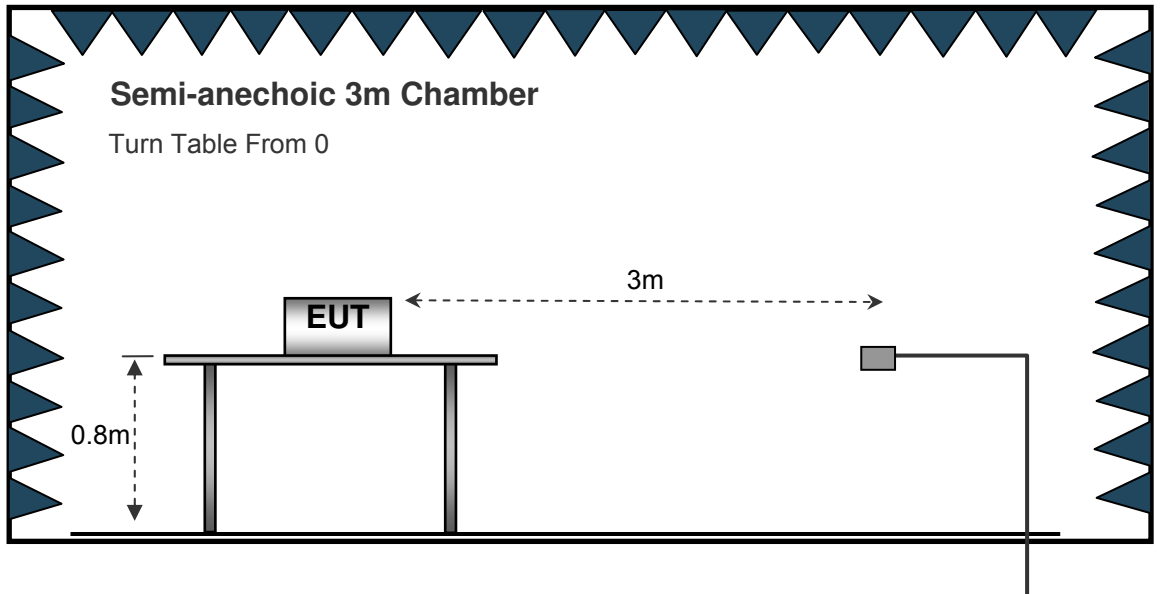

The test setup for emission measurement from 30 MHz to 1 GHz.

The test setup for emission measurement above 1 GHz.

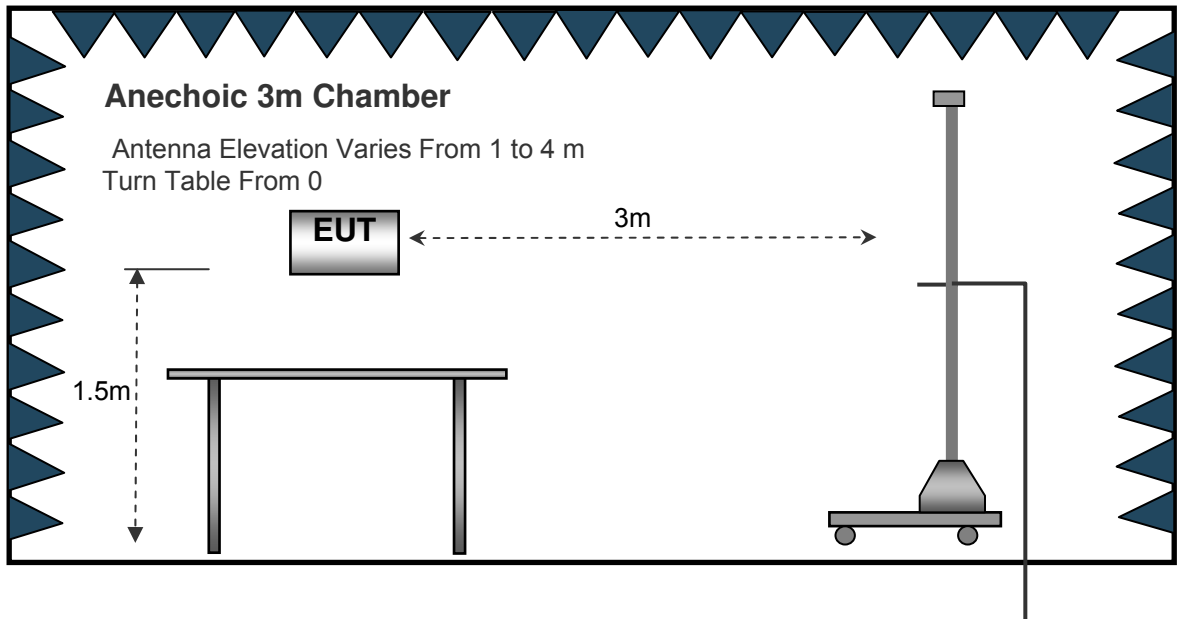

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency : 24MHz to 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
223.18	42.19	QP	152.98	1.50	H	11.26	30.93	46.00	-15.07
223.18	36.11	QP	273.48	1.86	V	11.26	24.85	46.00	-21.15
4824.00	50.12	PK	240.44	1.24	V	1.20	48.92	74.00	-25.08
4824.00	46.06	Ave	240.44	1.24	V	1.20	44.86	54.00	-9.14
7236.00	40.02	PK	214.32	1.96	H	1.33	41.35	74.00	-32.65
7236.00	40.23	Ave	214.32	1.96	H	1.33	41.56	54.00	-12.44
2347.05	45.12	PK	34.12	1.56	V	13.05	32.07	74.00	-41.93
2347.05	38.29	Ave	34.12	1.56	V	13.05	25.24	54.00	-28.76
2360.29	43.97	PK	181.89	1.08	H	13.06	30.91	74.00	-43.09
2360.29	36.79	Ave	181.89	1.08	H	13.06	23.73	54.00	-30.27
2488.01	42.83	PK	229.11	1.45	V	13.50	29.33	74.00	-44.67
2488.01	38.42	Ave	229.11	1.45	V	13.50	24.92	54.00	-29.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.18	42.11	QP	328.56	1.46	H	11.26	30.85	46.00	-15.15
223.18	36.99	QP	37.79	1.16	V	11.26	25.73	46.00	-20.27
4874.00	50.31	PK	93.29	1.94	V	1.20	49.11	74.00	-24.89
4874.00	45.31	Ave	93.29	1.94	V	1.20	44.11	54.00	-9.89
7311.00	38.82	PK	241.37	1.84	H	2.21	41.03	74.00	-32.97
7311.00	40.87	Ave	241.37	1.84	H	2.21	43.08	54.00	-10.92
2344.69	45.80	PK	303.49	1.95	V	13.05	32.75	74.00	-41.25
2344.69	37.44	Ave	303.49	1.95	V	13.05	24.39	54.00	-29.61
2366.82	42.50	PK	293.29	1.88	H	13.06	29.44	74.00	-44.56
2366.82	37.50	Ave	293.29	1.88	H	13.06	24.44	54.00	-29.56
2495.14	44.21	PK	79.25	1.86	V	13.50	30.71	74.00	-43.29
2495.14	38.45	Ave	79.25	1.86	V	13.50	24.95	54.00	-29.05

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)

11b:

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
223.18	42.30	QP	98.33	1.34	H	11.26	31.04	46.00	-14.96
223.18	34.82	QP	17.56	1.67	V	11.26	23.56	46.00	-22.44
4824.00	51.34	PK	249.20	1.98	V	1.20	50.14	74.00	-23.86
4824.00	43.93	Ave	249.20	1.98	V	1.20	42.73	54.00	-11.27
7236.00	38.72	PK	87.20	1.65	H	1.33	40.05	74.00	-33.95
7236.00	42.18	Ave	87.20	1.65	H	1.33	43.51	54.00	-10.49
2320.12	46.81	PK	350.55	2.00	V	13.05	33.76	74.00	-40.24
2320.12	38.59	Ave	350.55	2.00	V	13.05	25.54	54.00	-28.46
2375.50	44.77	PK	89.32	1.22	H	13.06	31.71	74.00	-42.29
2375.50	36.43	Ave	89.32	1.22	H	13.06	23.37	54.00	-30.63
2499.30	42.57	PK	172.76	1.48	V	13.50	29.07	74.00	-44.93
2499.30	38.79	Ave	172.76	1.48	V	13.50	25.29	54.00	-28.71

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.18	42.66	QP	332.64	1.46	H	11.26	31.40	46.00	-14.60
223.18	33.76	QP	258.60	1.73	V	11.26	22.50	46.00	-23.50
4874.00	51.18	PK	307.53	1.41	V	1.20	49.98	74.00	-24.02
4874.00	43.97	Ave	307.53	1.41	V	1.20	42.77	54.00	-11.23
7311.00	38.67	PK	233.77	1.74	H	2.21	40.88	74.00	-33.12
7311.00	41.89	Ave	233.77	1.74	H	2.21	44.10	54.00	-9.90
2339.89	46.95	PK	136.57	1.03	V	13.05	33.90	74.00	-40.10
2339.89	39.27	Ave	136.57	1.03	V	13.05	26.22	54.00	-27.78
2384.95	42.29	PK	353.50	1.43	H	13.06	29.23	74.00	-44.77
2384.95	36.93	Ave	353.50	1.43	H	13.06	23.87	54.00	-30.13
2493.14	43.58	PK	174.41	1.53	V	13.50	30.08	74.00	-43.92
2493.14	38.67	Ave	174.41	1.53	V	13.50	25.17	54.00	-28.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
223.18	42.05	QP	75.46	1.72	H	11.26	30.79	46.00	-15.21
223.18	33.16	QP	280.80	1.66	V	11.26	21.90	46.00	-24.10
4924.00	52.11	PK	83.40	1.03	V	1.20	50.91	74.00	-23.09
4924.00	42.74	Ave	83.40	1.03	V	1.20	41.54	54.00	-12.46
7386.00	37.24	PK	87.89	1.73	H	2.84	40.08	74.00	-33.92
7386.00	42.83	Ave	87.89	1.73	H	2.84	45.67	54.00	-8.33
2339.11	45.40	PK	205.07	1.47	V	13.05	32.35	74.00	-41.65
2339.11	37.35	Ave	205.07	1.47	V	13.05	24.30	54.00	-29.70
2358.61	44.40	PK	193.41	1.22	H	13.06	31.34	74.00	-42.66
2358.61	37.37	Ave	193.41	1.22	H	13.06	24.31	54.00	-29.69
2493.44	42.40	PK	16.17	1.04	V	13.50	28.90	74.00	-45.10
2493.44	36.76	Ave	16.17	1.04	V	13.50	23.26	54.00	-30.74

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Low Channel 2412MHz									
223.18	43.05	QP	139.73	1.23	H	11.26	31.79	46.00	-14.21
223.18	32.11	QP	51.61	1.29	V	11.26	20.85	46.00	-25.15
4824.00	52.49	PK	170.34	1.29	V	1.20	51.29	74.00	-22.71
4824.00	44.10	Ave	170.34	1.29	V	1.20	42.90	54.00	-11.10
7236.00	37.46	PK	143.52	1.02	H	1.33	38.79	74.00	-35.21
7236.00	42.88	Ave	143.52	1.02	H	1.33	44.21	54.00	-9.79
2310.77	45.27	PK	58.10	1.43	V	13.05	32.22	74.00	-41.78
2310.77	38.90	Ave	58.10	1.43	V	13.05	25.85	54.00	-28.15
2356.09	43.03	PK	222.37	1.46	H	13.06	29.97	74.00	-44.03
2356.09	36.27	Ave	222.37	1.46	H	13.06	23.21	54.00	-30.79
2496.27	42.06	PK	78.91	1.08	V	13.50	28.56	74.00	-45.44
2496.27	38.42	Ave	78.91	1.08	V	13.50	24.92	54.00	-29.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Middle Channel 2437MHz									
223.18	43.96	QP	182.79	1.93	H	11.26	32.70	46.00	-13.30
223.18	30.75	QP	185.31	1.96	V	11.26	19.49	46.00	-26.51
4874.00	53.16	PK	267.34	1.90	V	1.20	51.96	74.00	-22.04
4874.00	44.48	Ave	267.34	1.90	V	1.20	43.28	54.00	-10.72
7311.00	36.42	PK	86.47	1.83	H	2.21	38.63	74.00	-35.37
7311.00	43.80	Ave	86.47	1.83	H	2.21	46.01	54.00	-7.99
2327.35	45.89	PK	337.49	1.12	V	13.05	32.84	74.00	-41.16
2327.35	37.52	Ave	337.49	1.12	V	13.05	24.47	54.00	-29.53
2368.77	43.32	PK	345.35	1.83	H	13.06	30.26	74.00	-43.74
2368.77	38.49	Ave	345.35	1.83	H	13.06	25.43	54.00	-28.57
2489.43	43.27	PK	66.91	1.05	V	13.50	29.77	74.00	-44.23
2489.43	37.20	Ave	66.91	1.05	V	13.50	23.70	54.00	-30.30

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: High Channel 2462MHz									
223.18	43.09	QP	100.06	1.61	H	11.26	31.83	46.00	-14.17
223.18	30.69	QP	282.27	1.82	V	11.26	19.43	46.00	-26.57
4924.00	52.72	PK	87.99	1.35	V	1.20	51.52	74.00	-22.48
4924.00	43.12	Ave	87.99	1.35	V	1.20	41.92	54.00	-12.08
7386.00	35.92	PK	215.59	1.61	H	2.84	38.76	74.00	-35.24
7386.00	42.42	Ave	215.59	1.61	H	2.84	45.26	54.00	-8.74
2317.86	46.75	PK	160.00	1.39	V	13.05	33.70	74.00	-40.30
2317.86	39.86	Ave	160.00	1.39	V	13.05	26.81	54.00	-27.19
2366.23	44.66	PK	243.36	1.33	H	13.06	31.60	74.00	-42.40
2366.23	38.69	Ave	243.36	1.33	H	13.06	25.63	54.00	-28.37
2488.54	44.00	PK	40.76	1.88	V	13.50	30.50	74.00	-43.50
2488.54	38.54	Ave	40.76	1.88	V	13.50	25.04	54.00	-28.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Low Channel 2422MHz									
223.18	43.72	QP	255.25	1.11	H	11.26	32.46	46.00	-13.54
223.18	31.67	QP	5.43	1.78	V	11.26	20.41	46.00	-25.59
4844.00	51.31	PK	143.34	1.47	V	1.20	50.11	74.00	-23.89
4844.00	41.59	Ave	143.34	1.47	V	1.20	40.39	54.00	-13.61
7266.00	33.50	PK	334.42	1.19	H	1.33	34.83	74.00	-39.17
7266.00	41.15	Ave	334.42	1.19	H	1.33	42.48	54.00	-11.52
2316.19	45.12	PK	170.15	1.87	V	13.05	32.07	74.00	-41.93
2316.19	39.41	Ave	170.15	1.87	V	13.05	26.36	54.00	-27.64
2380.35	44.73	PK	287.18	1.08	H	13.06	31.67	74.00	-42.33
2380.35	38.67	Ave	287.18	1.08	H	13.06	25.61	54.00	-28.39
2498.56	43.50	PK	164.87	1.77	V	13.50	30.00	74.00	-44.00
2498.56	38.18	Ave	164.87	1.77	V	13.50	24.68	54.00	-29.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: Middle Channel 2437MHz									
223.18	44.09	QP	275.94	1.16	H	11.26	32.83	46.00	-13.17
223.18	32.08	QP	303.29	1.02	V	11.26	20.82	46.00	-25.18
4874.00	51.79	PK	162.16	1.01	V	1.20	50.59	74.00	-23.41
4874.00	42.33	Ave	162.16	1.01	V	1.20	41.13	54.00	-12.87
7311.00	33.04	PK	246.25	1.27	H	2.21	35.25	74.00	-38.75
7311.00	42.05	Ave	246.25	1.27	H	2.21	44.26	54.00	-9.74
2311.48	45.17	PK	117.32	1.39	V	13.05	32.12	74.00	-41.88
2311.48	38.63	Ave	117.32	1.39	V	13.05	25.58	54.00	-28.42
2370.25	43.69	PK	65.32	1.45	H	13.06	30.63	74.00	-43.37
2370.25	38.89	Ave	65.32	1.45	H	13.06	25.83	54.00	-28.17
2487.25	42.44	PK	354.87	1.17	V	13.50	28.94	74.00	-45.06
2487.25	36.26	Ave	354.87	1.17	V	13.50	22.76	54.00	-31.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: High Channel 2452MHz									
223.18	43.91	QP	21.39	1.18	H	11.26	32.65	46.00	-13.35
223.18	31.73	QP	290.96	1.45	V	11.26	20.47	46.00	-25.53
4904.00	52.13	PK	350.78	1.93	V	1.20	50.93	74.00	-23.07
4904.00	42.75	Ave	350.78	1.93	V	1.20	41.55	54.00	-12.45
7356.00	32.63	PK	73.19	1.12	H	2.84	35.47	74.00	-38.53
7356.00	41.52	Ave	73.19	1.12	H	2.84	44.36	54.00	-9.64
2324.20	46.72	PK	61.50	1.69	V	13.05	33.67	74.00	-40.33
2324.20	38.71	Ave	61.50	1.69	V	13.05	25.66	54.00	-28.34
2374.75	43.84	PK	155.60	1.07	H	13.06	30.78	74.00	-43.22
2374.75	38.03	Ave	155.60	1.07	H	13.06	24.97	54.00	-29.03
2494.17	44.67	PK	121.41	1.67	V	13.50	31.17	74.00	-42.83
2494.17	37.17	Ave	121.41	1.67	V	13.50	23.67	54.00	-30.33

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance V04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

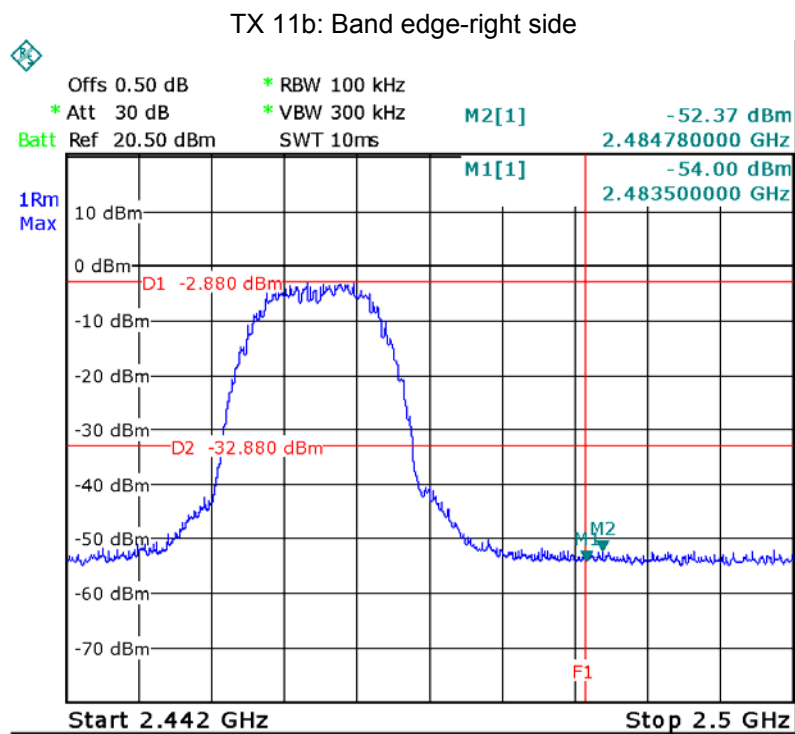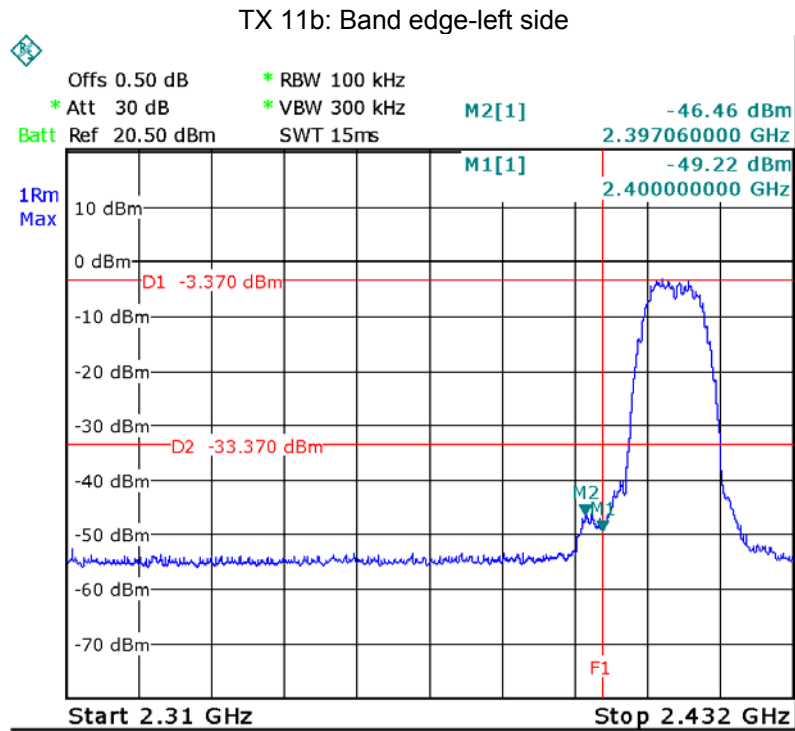


TX 11g: Band edge-left side

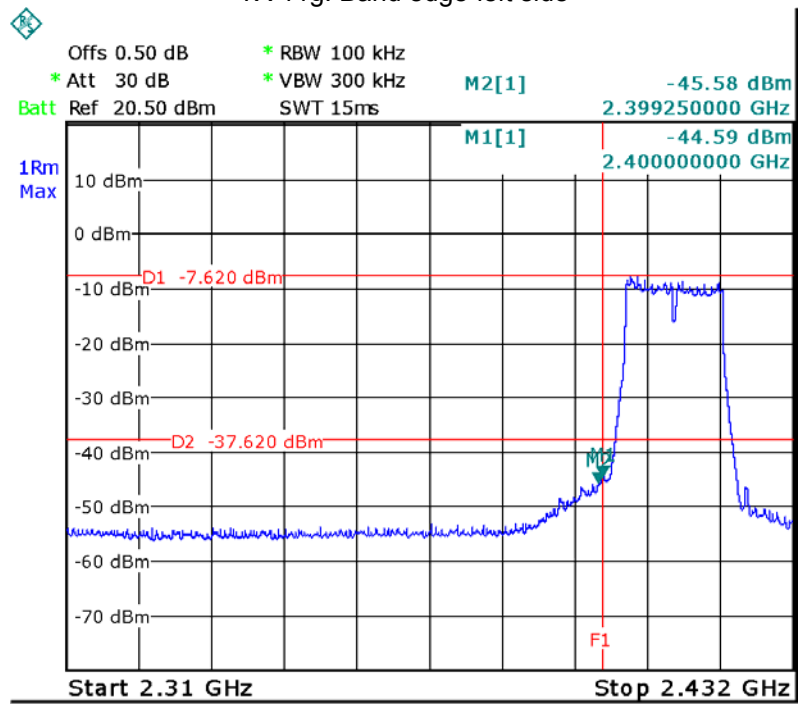


TX 11g: Band edge-right side

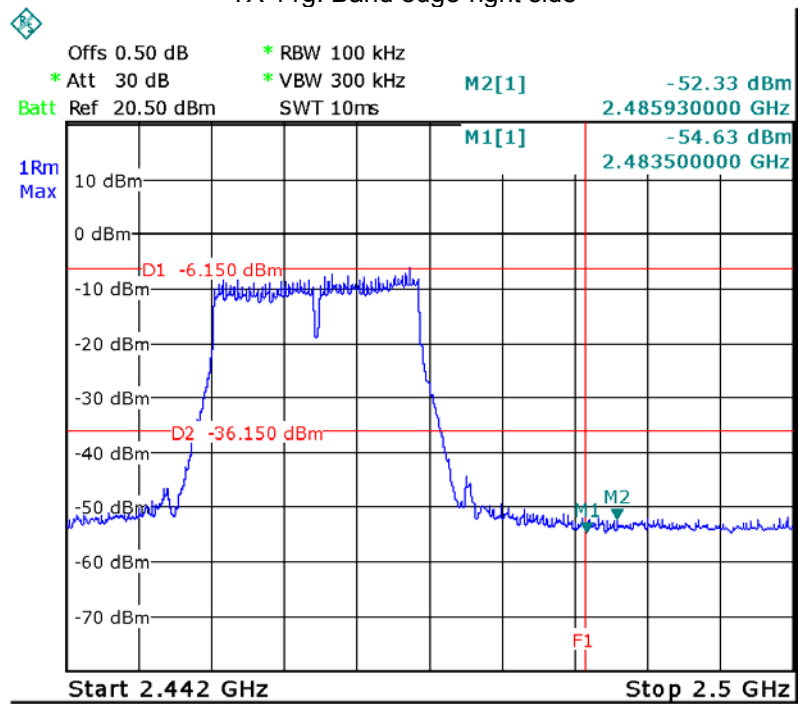


TX 11n HT20: Band edge-left side

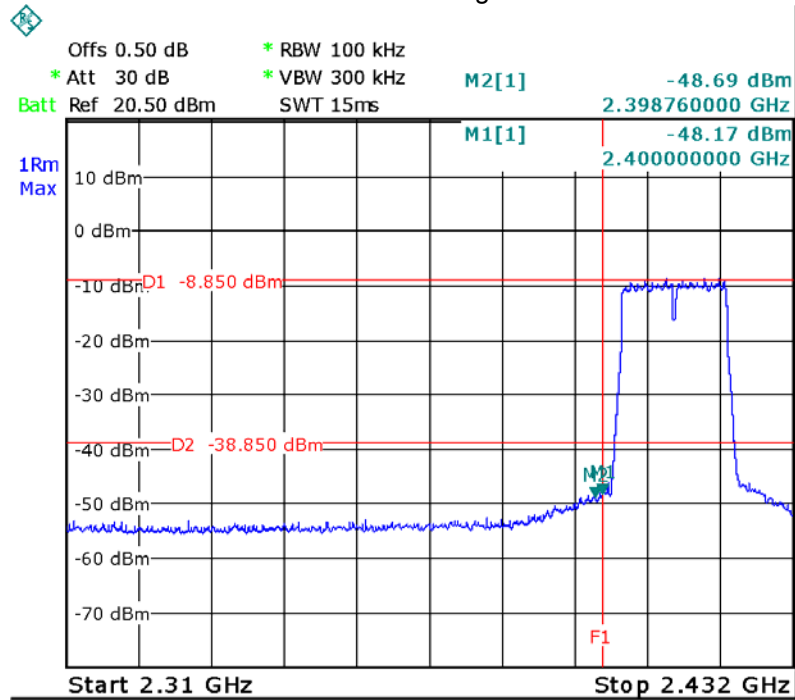


TX 11n HT20: Band edge-right side

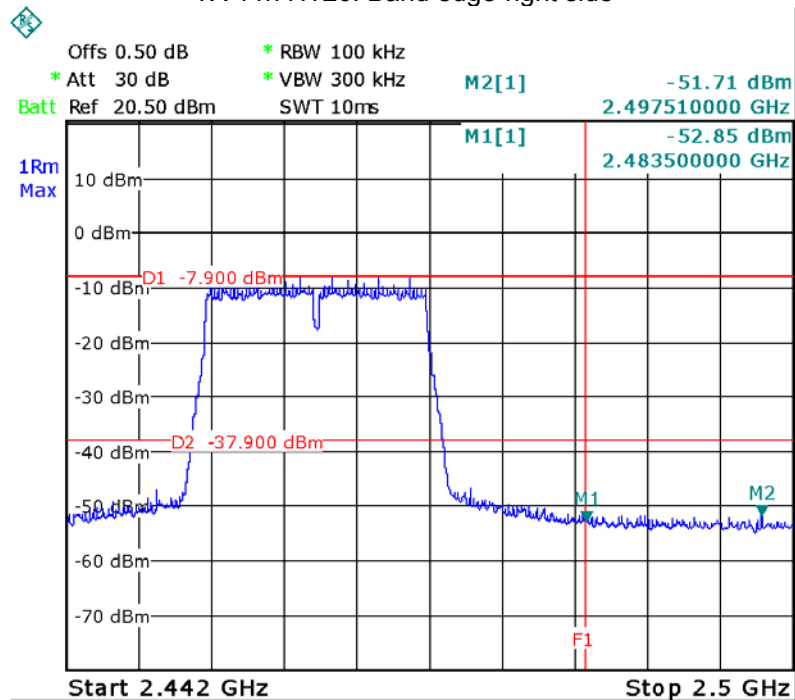

TX 11n HT40: Band edge-left side

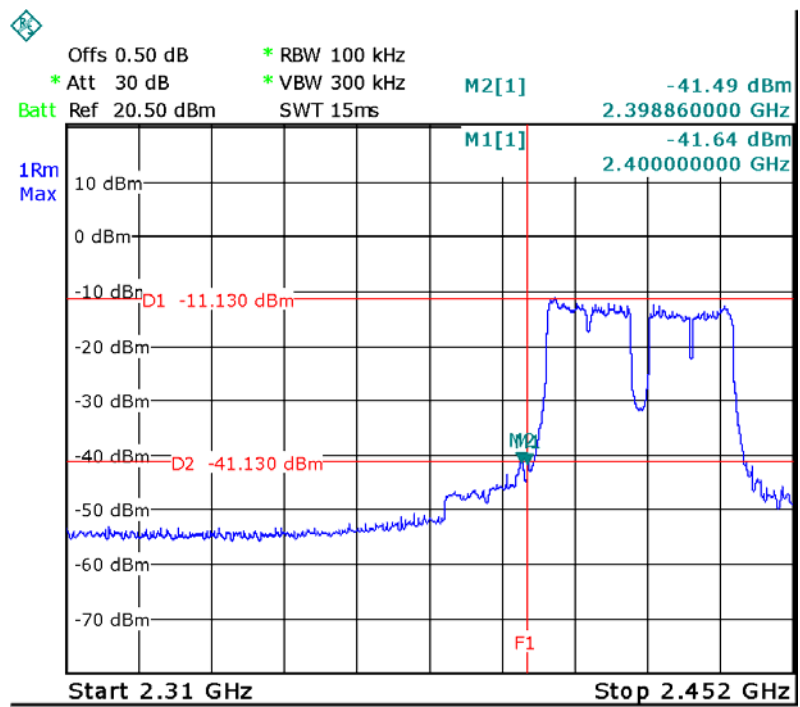

TX 11n HT40: Band edge-right side

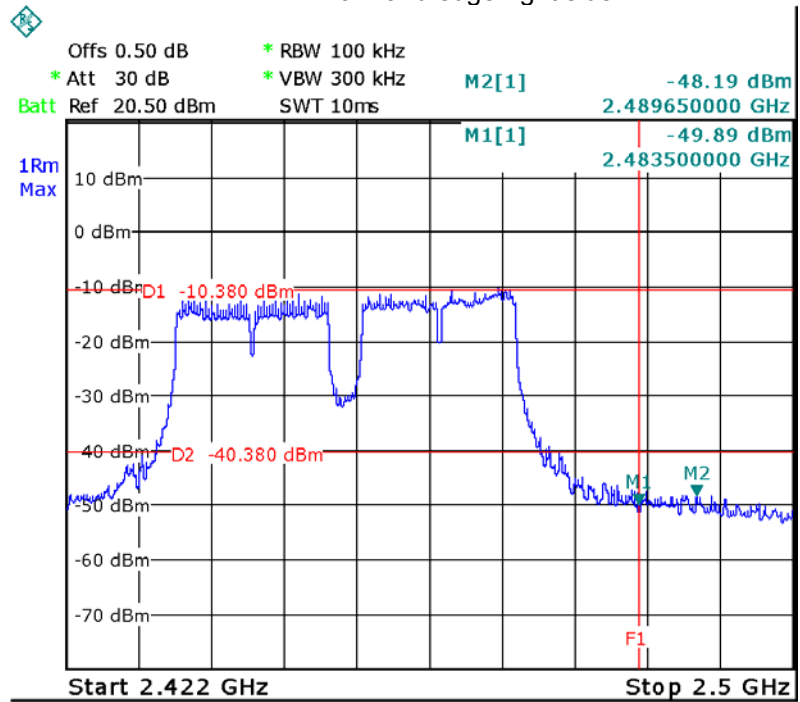

9 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04



9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result:



Operation mode	6dB Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	9.970	9.970	9.970
TX 11g	Channel 1	Channel 6	Channel 11
	16.467	16.467	16.467
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.623	17.623	17.623
TX 11n HT40	Channel 3	Channel 6	Channel 9
	36.120	36.120	

Test result plot as follows:

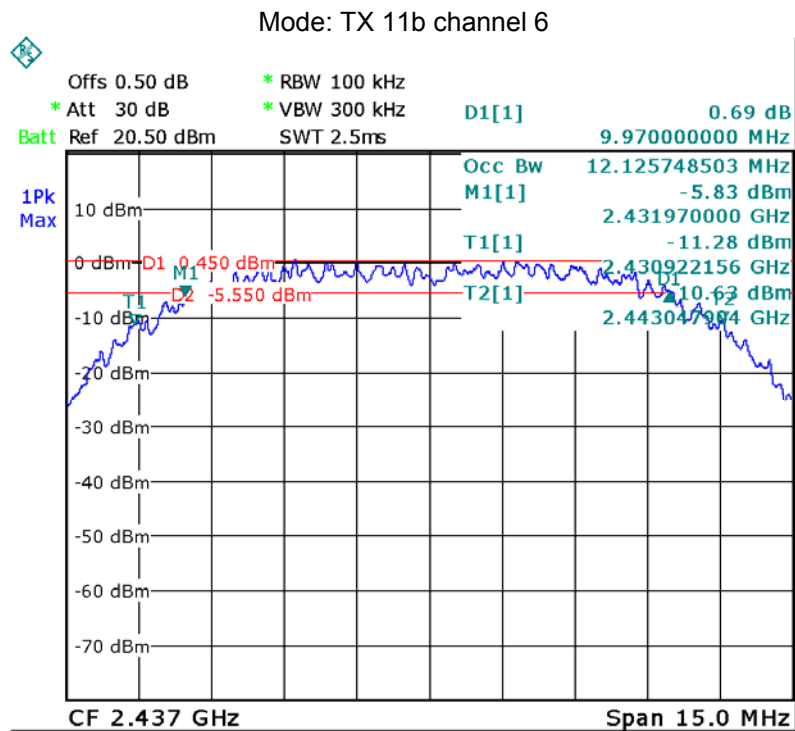
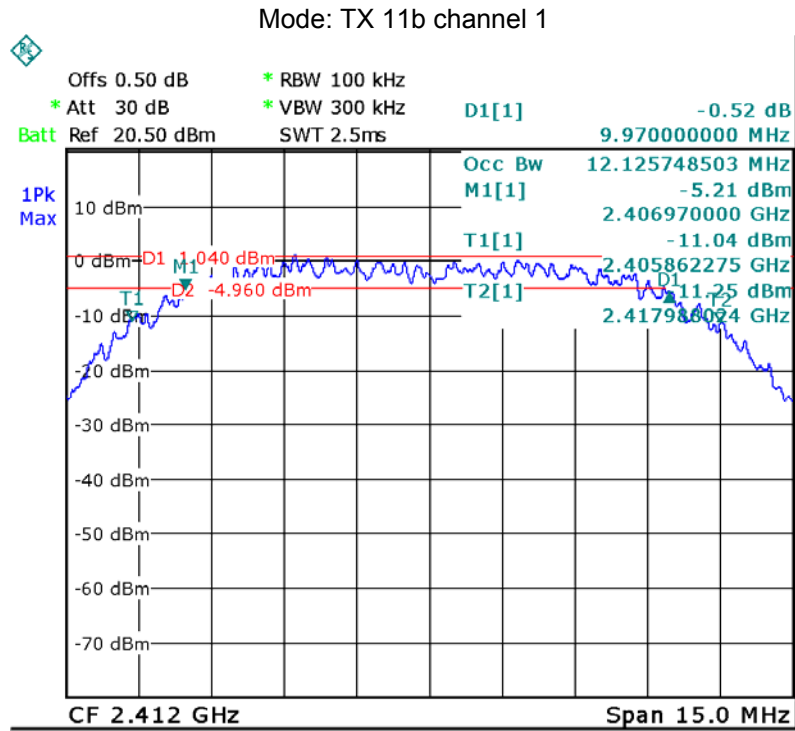


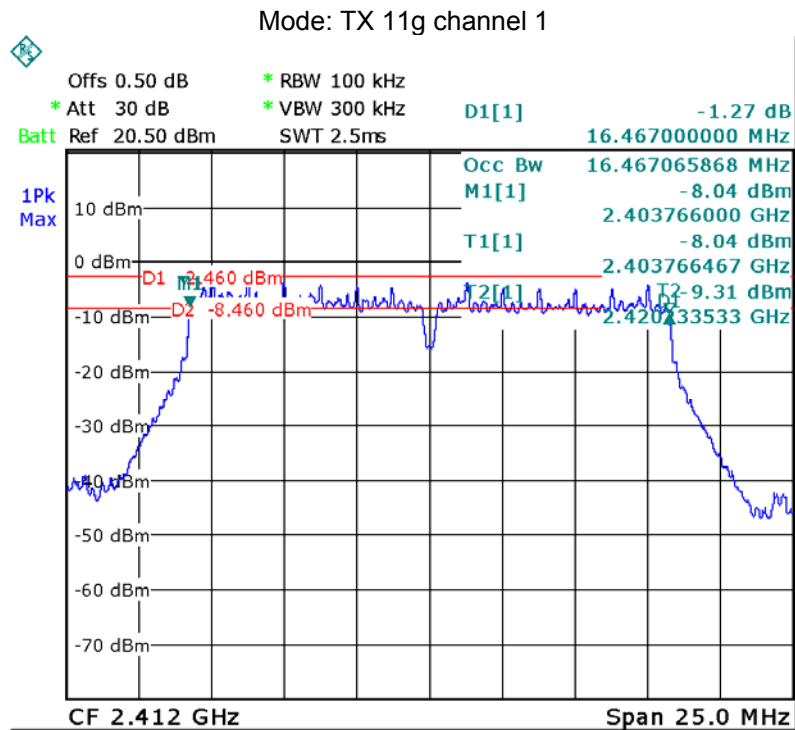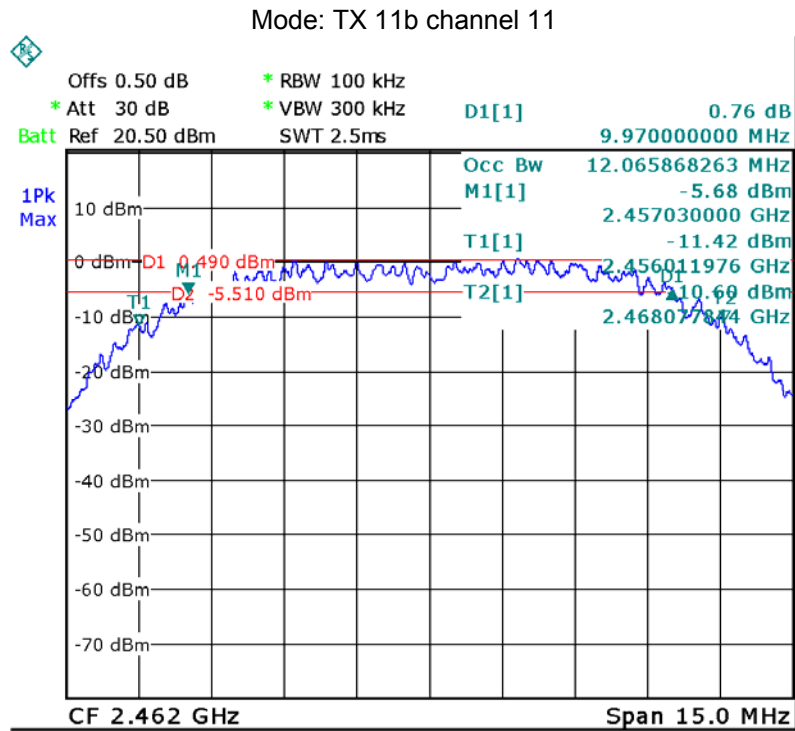



Mode: TX 11g channel 6

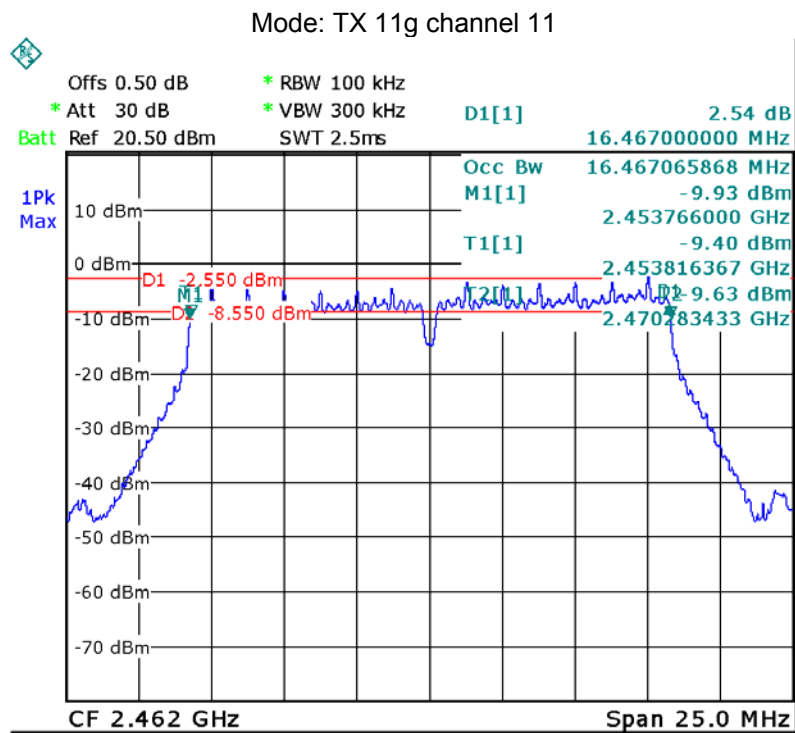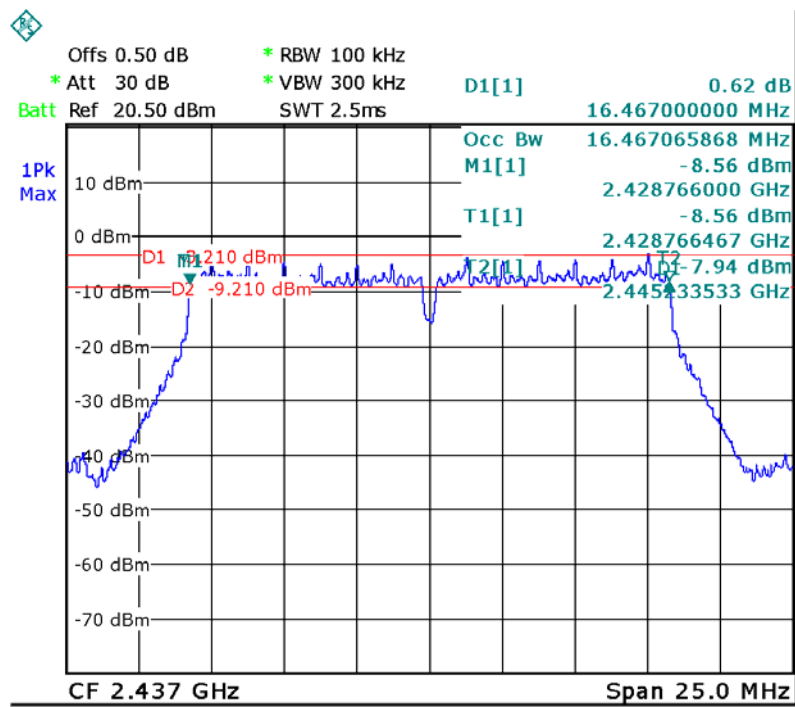


Mode: TX 11n HT20 channel 1

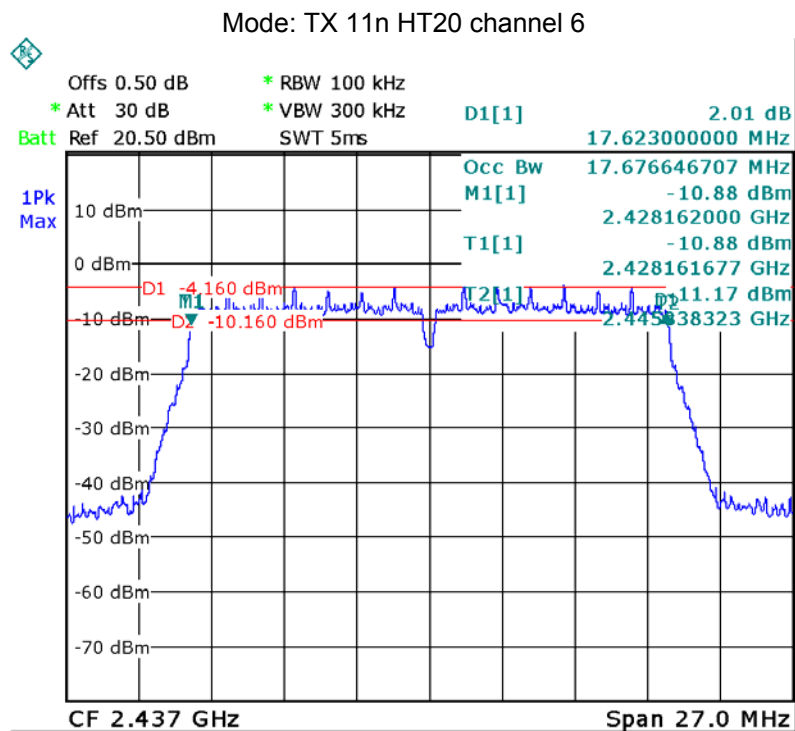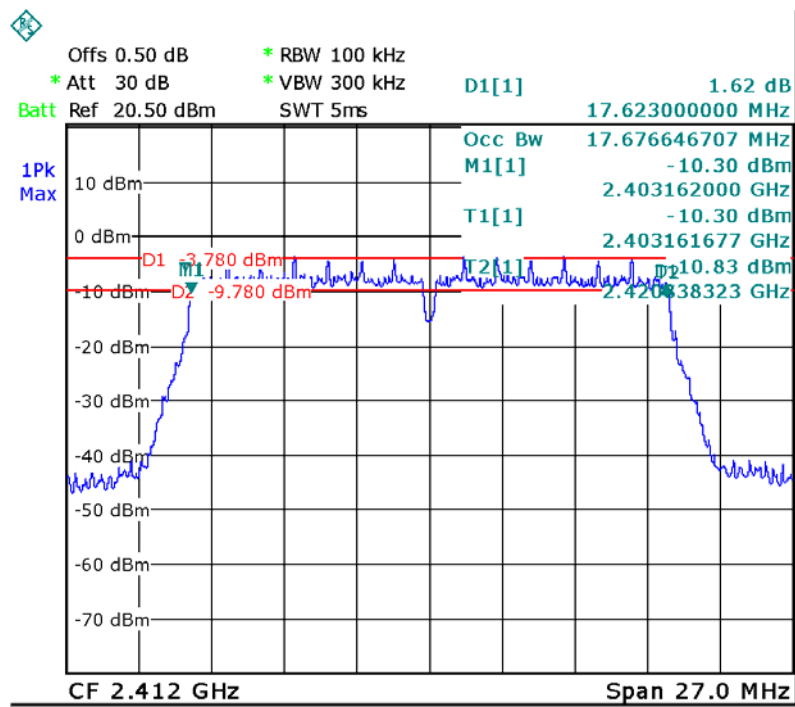


Mode: TX 11n HT20 channel 11

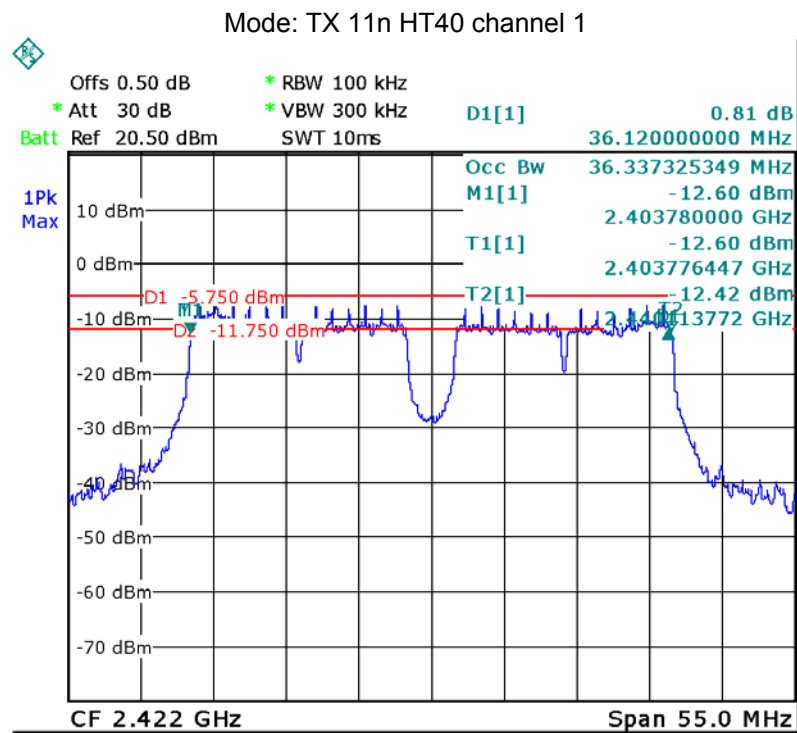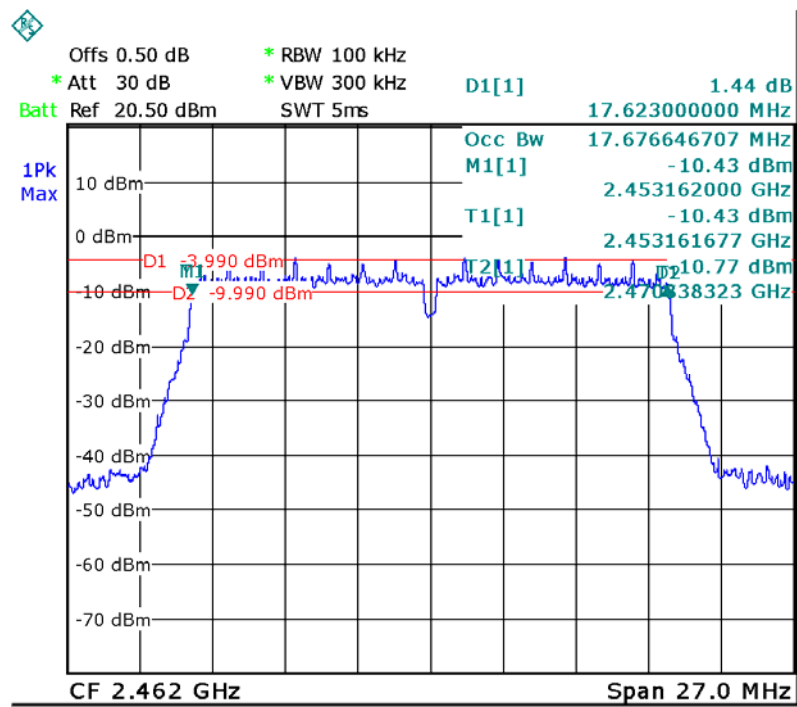

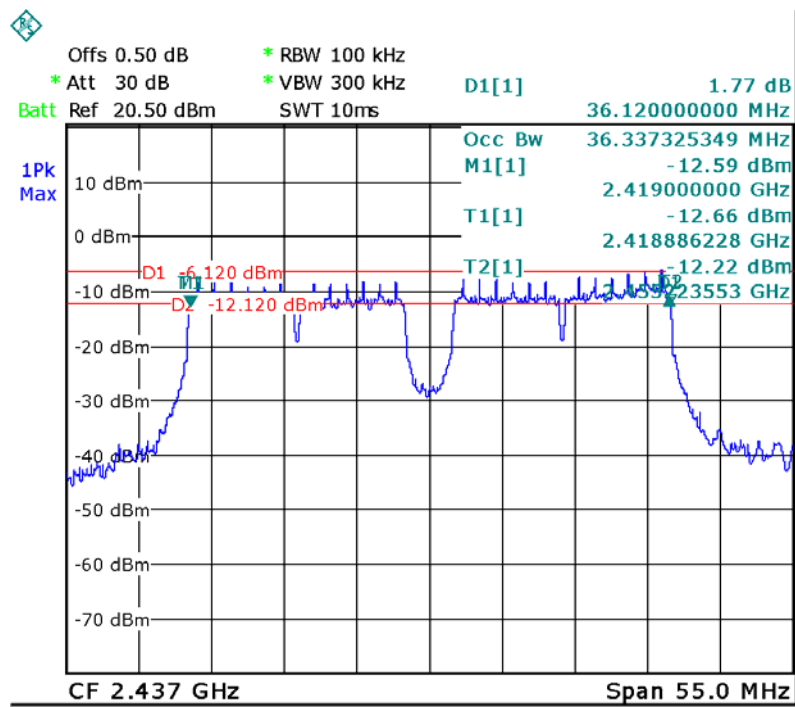

Mode: TX 11n HT40 channel 11

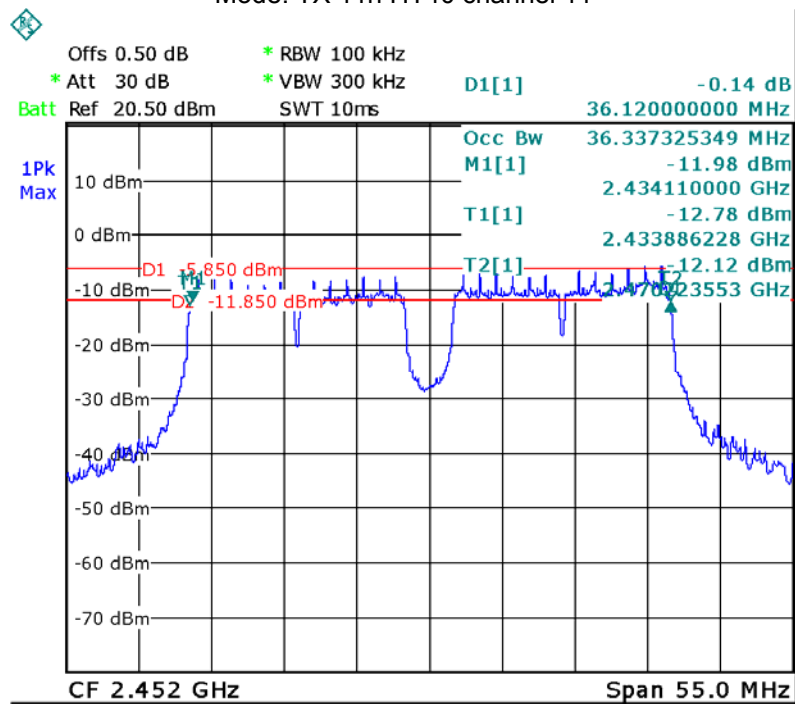

10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

10.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

10.2 Test Result:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
16.30	16.23	16.10
Limit: 1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
15.05	15.14	15.33
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
15.69	15.06	15.33
Limit: 1W/30dBm		

Test mode : TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
15.17	15.02	15.32
Limit: 1W/30dBm		

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

11.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



11.2 Test Result:

Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-12.47	-13.31	-13.16
Limit: 8dBm per 3kHz		


Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-18.95	-19.90	-19.21
Limit: 8dBm per 3kHz		

Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-18.00	-18.19	-18.28
Limit: 8dBm per 3kHz		


Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-22.99	-22.84	-22.57
Limit: 8dBm per 3kHz		

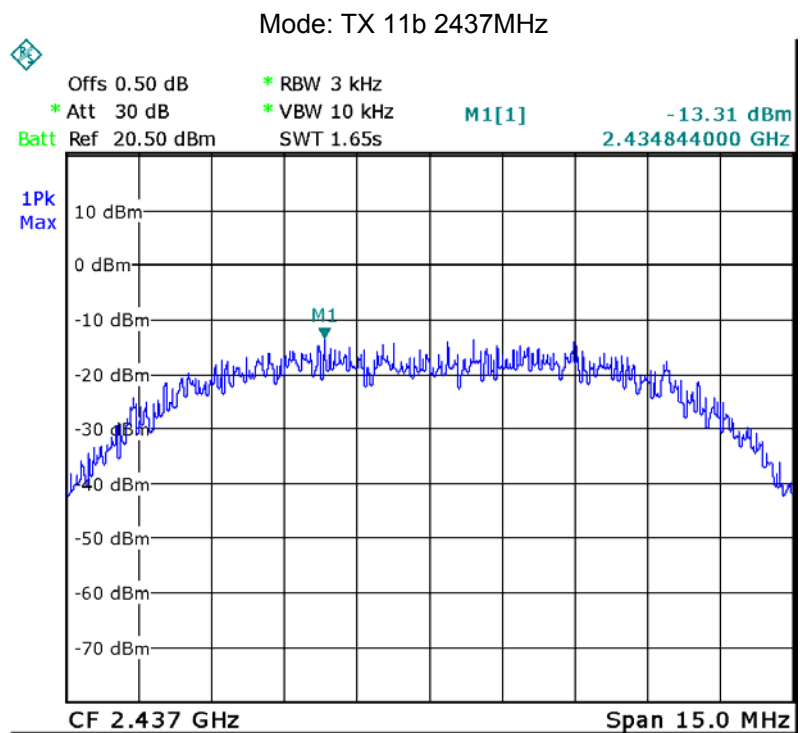
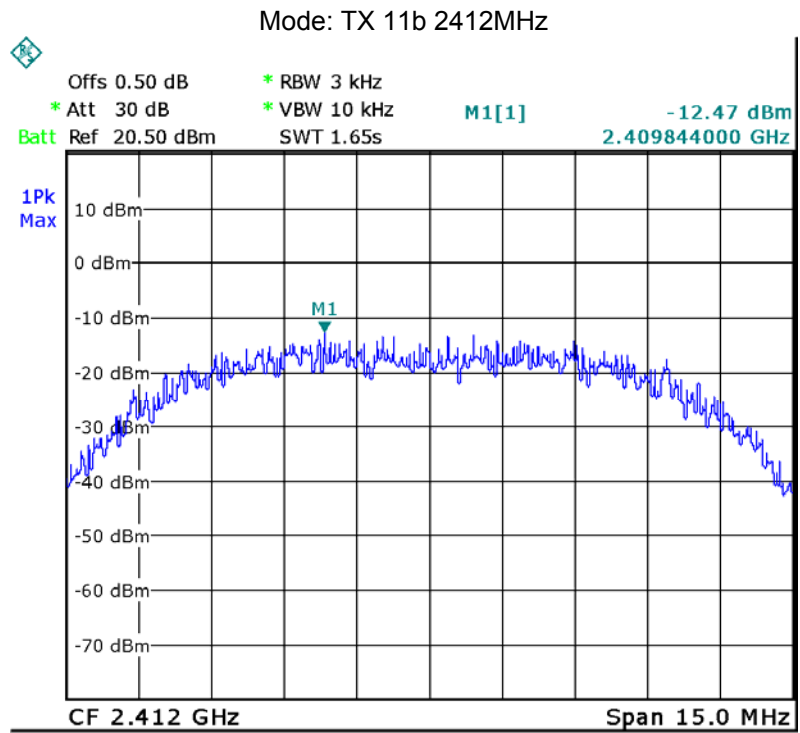




Mode: TX 11b 2462MHz


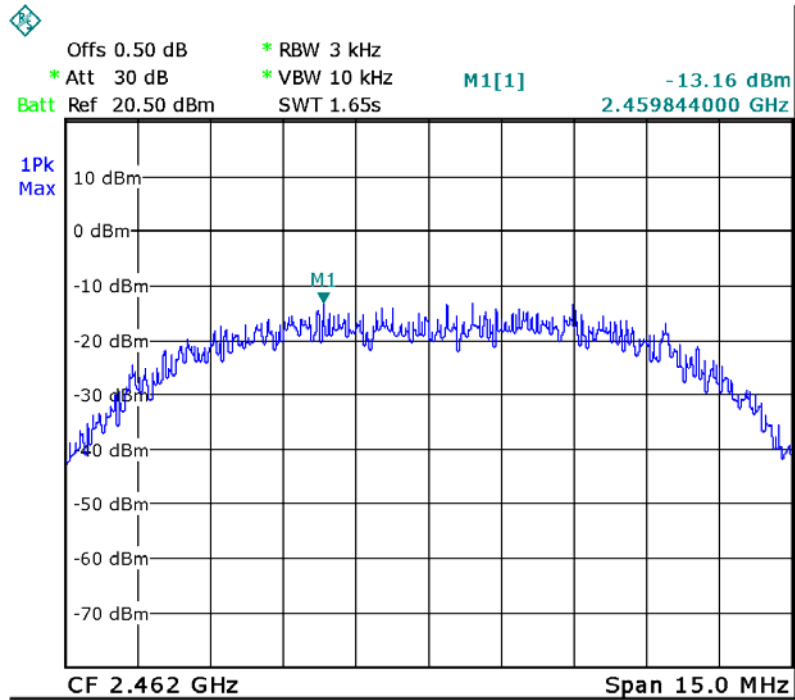




Mode :TX 11g 2412MHz

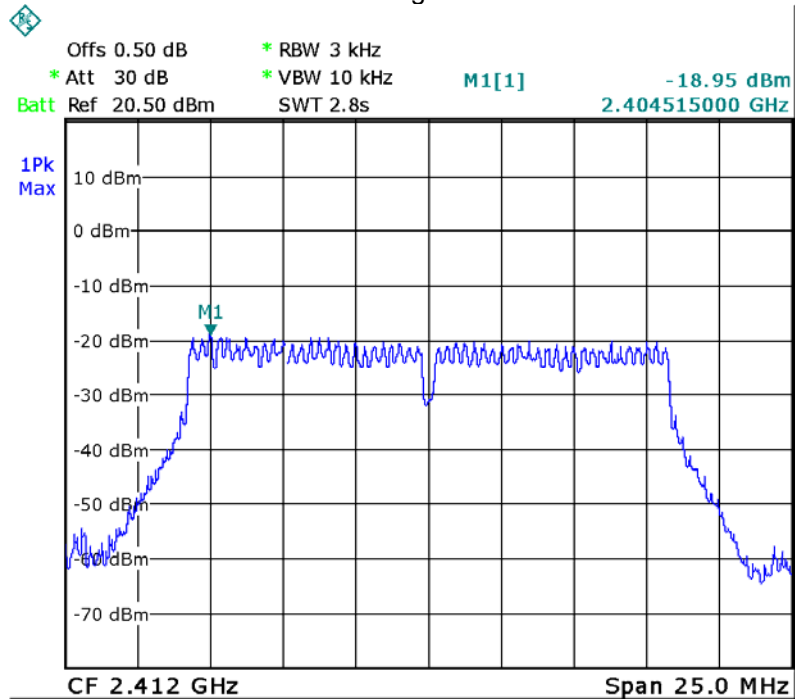

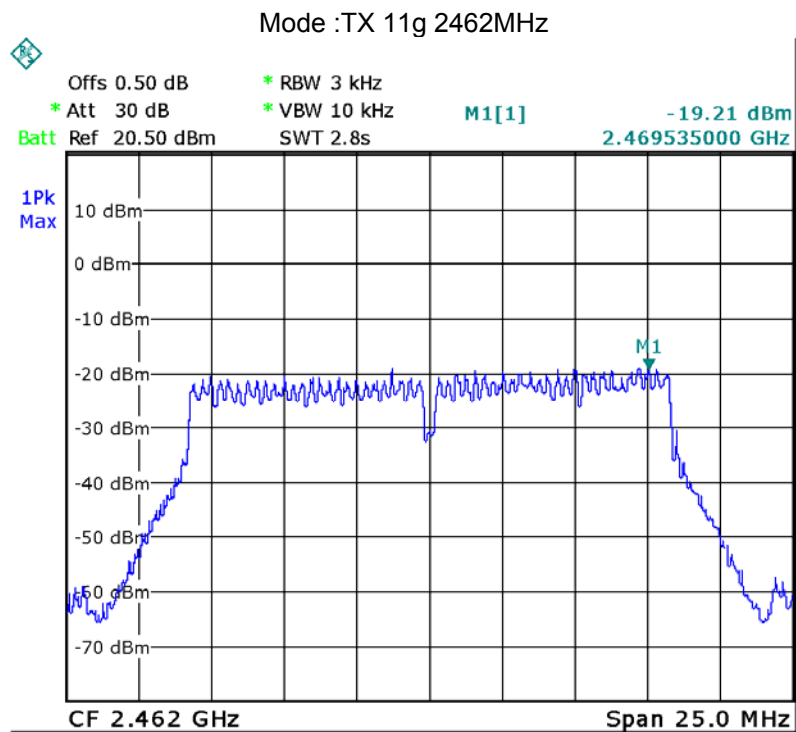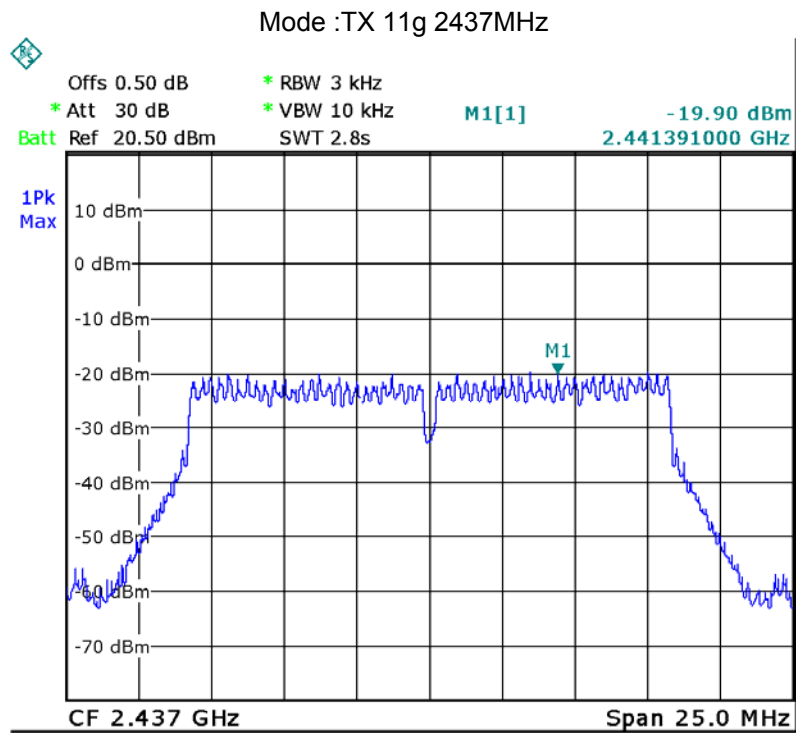

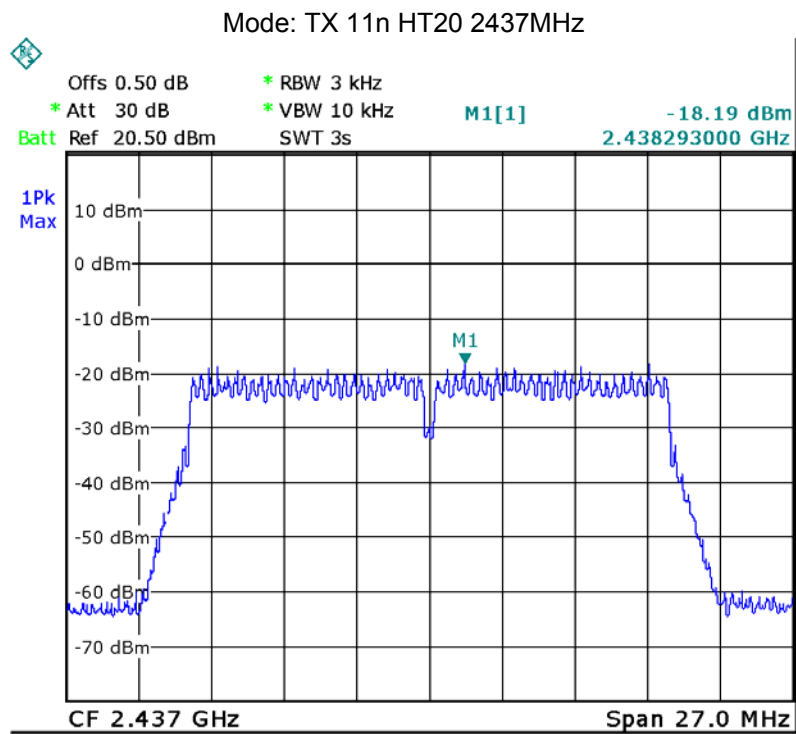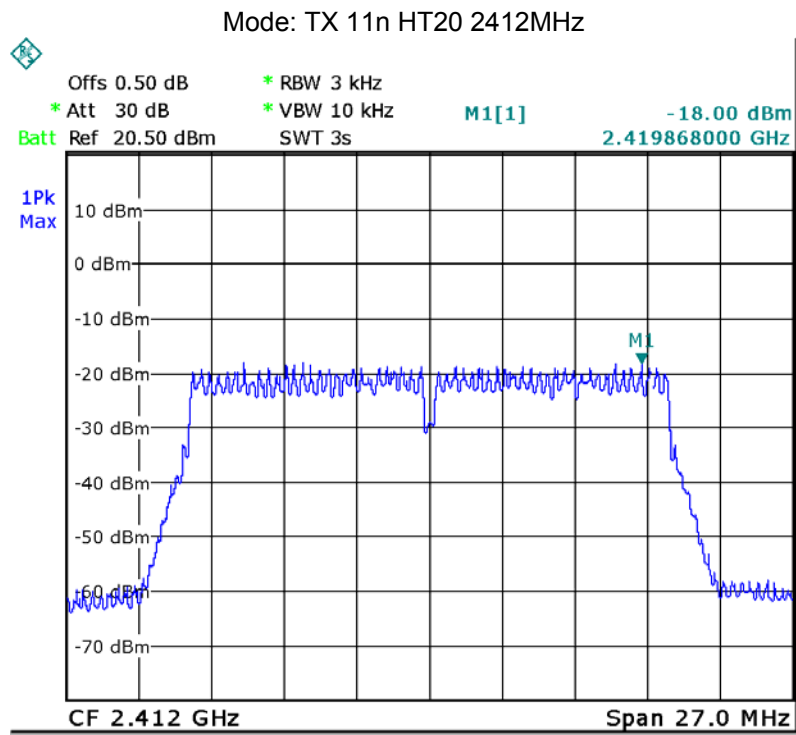

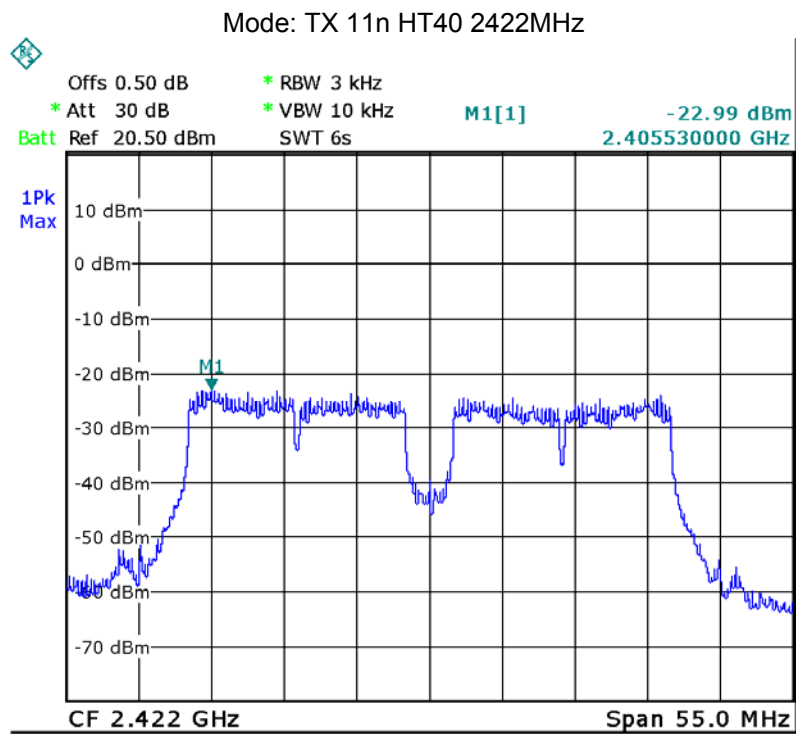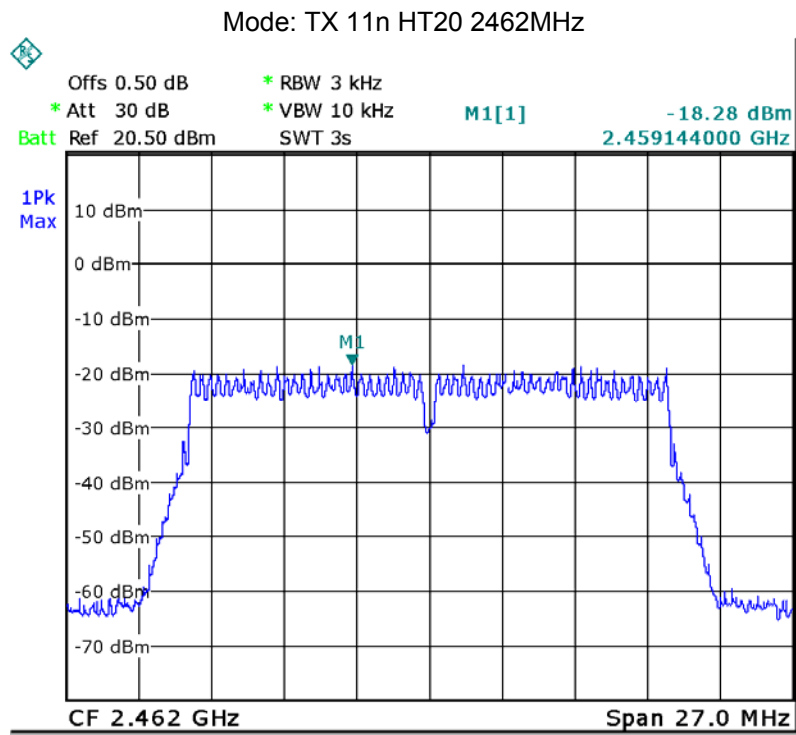

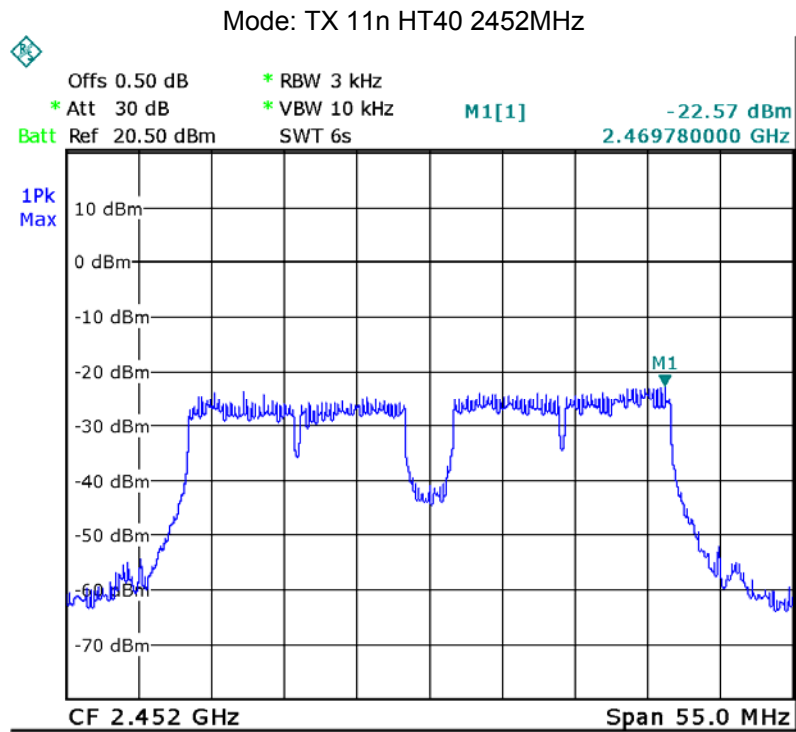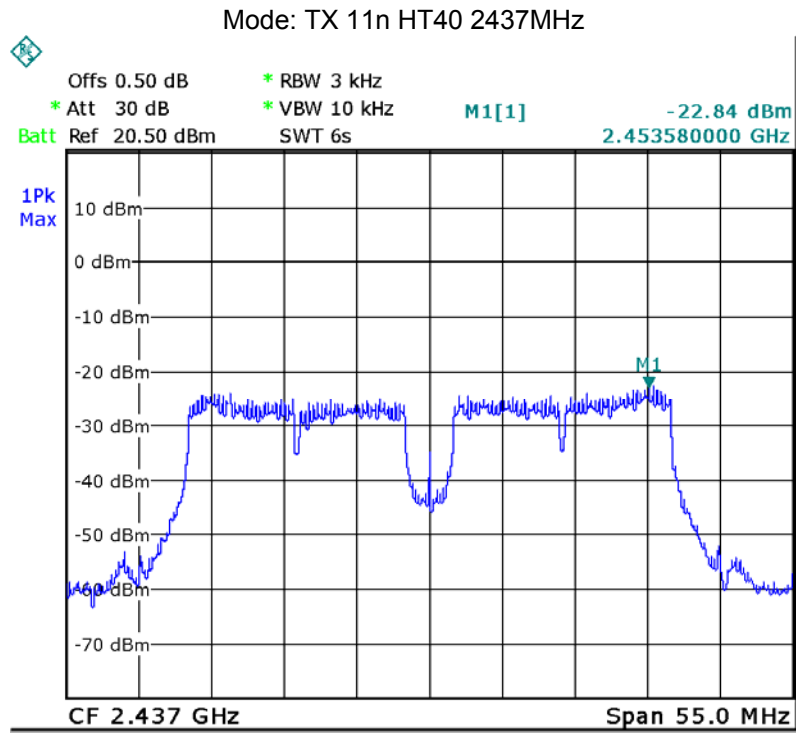


12 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Internal Integrated Antenna, meets the requirements of FCC 15.203.

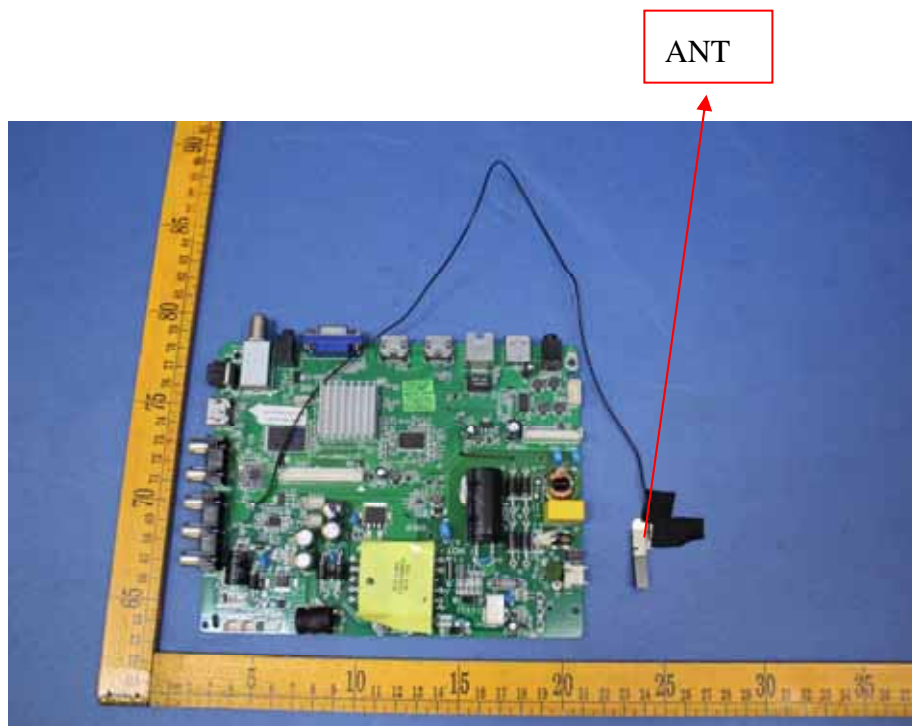

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091 & KDB 447498 D01 General RF Exposure Guidance v06

13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

13.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

13.3 MPE Calculation Method

S


14 Photographs – Model ELSFC5017 Test Setup

14.1 Radiated Emission

Test frequency Below 30MHz



Test frequency from 30MHz to 1GHz

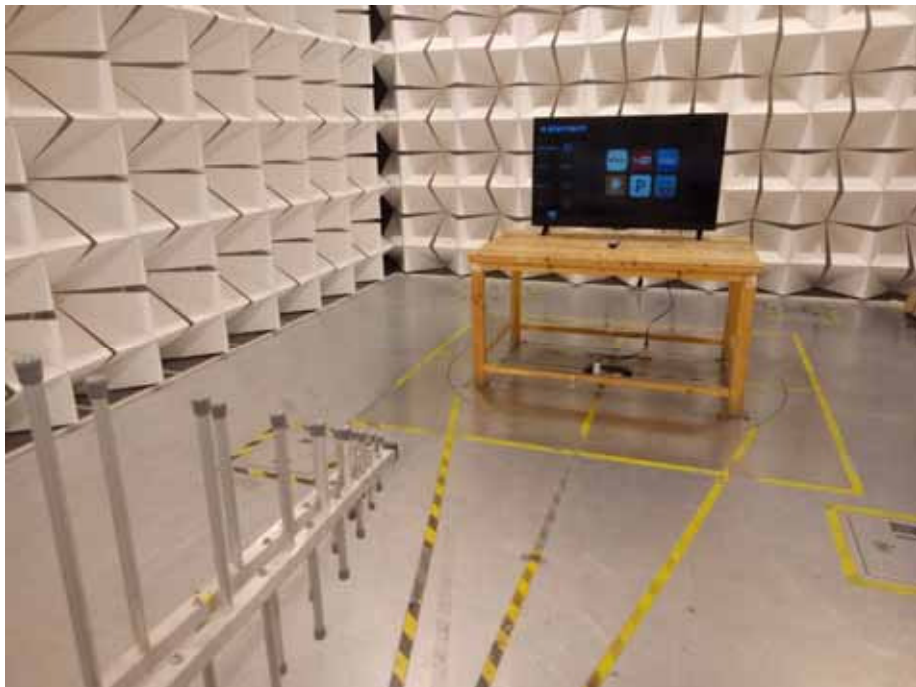

Test frequency above 1GHz



14.2 Conducted Emission at Test Site 1#



15 Photographs - Constructional Details

15.1 Model ELSFC5017-External Photos

















15.2 Model ELSFC5017-Internal Photos

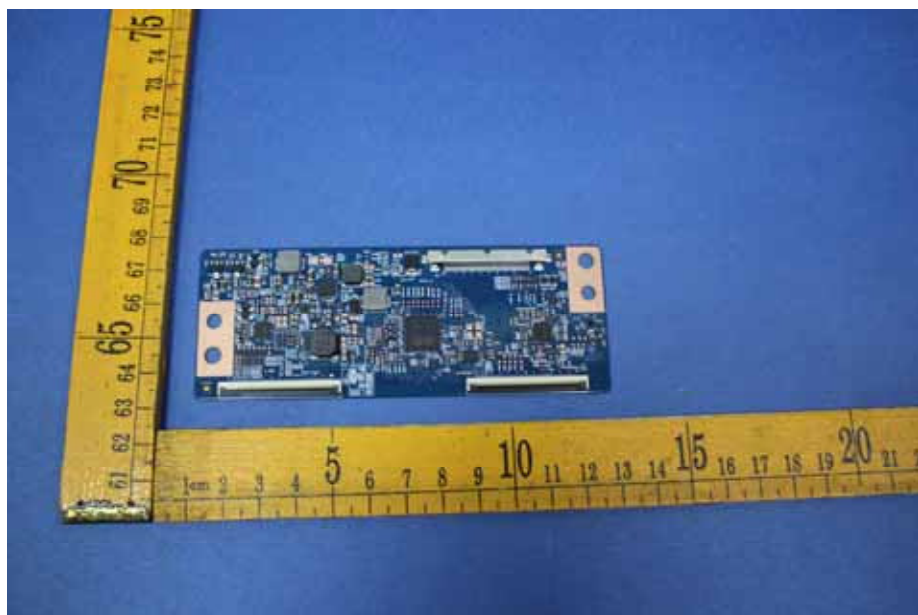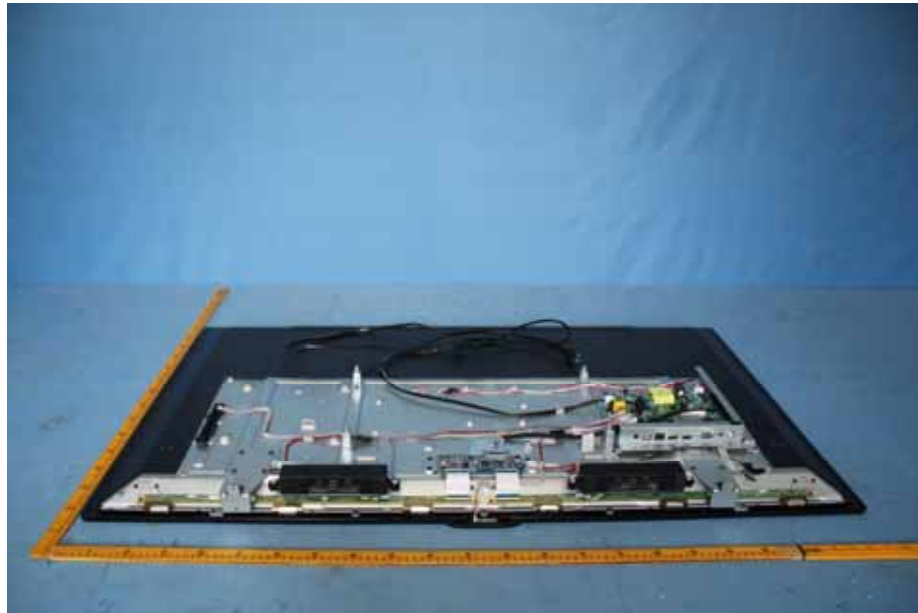

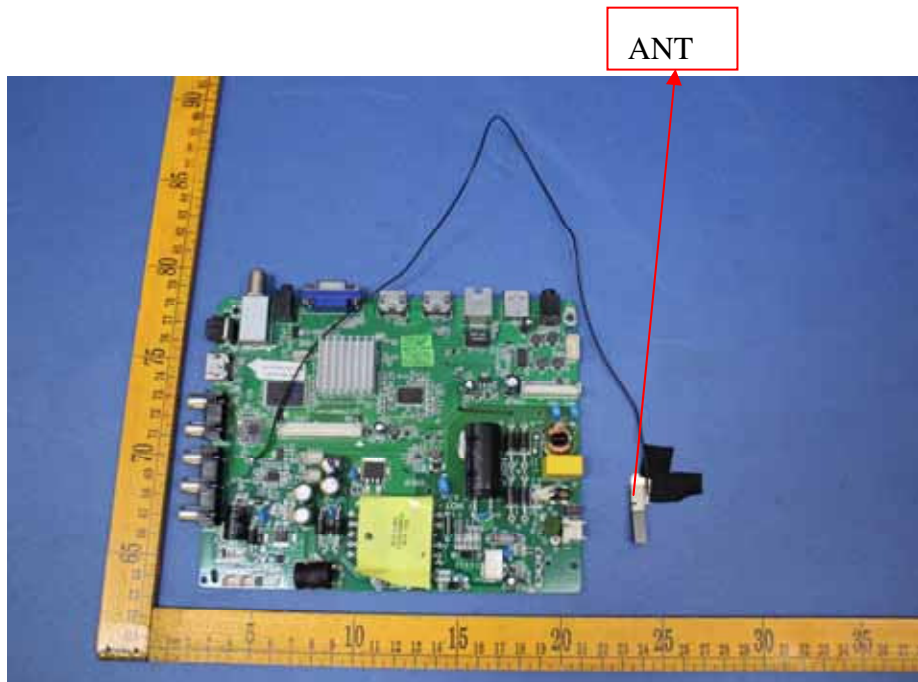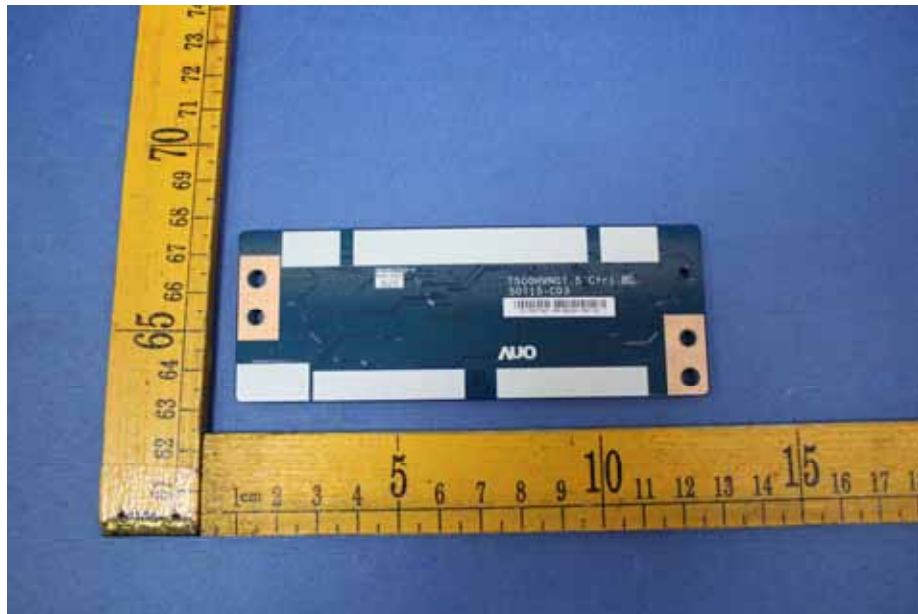

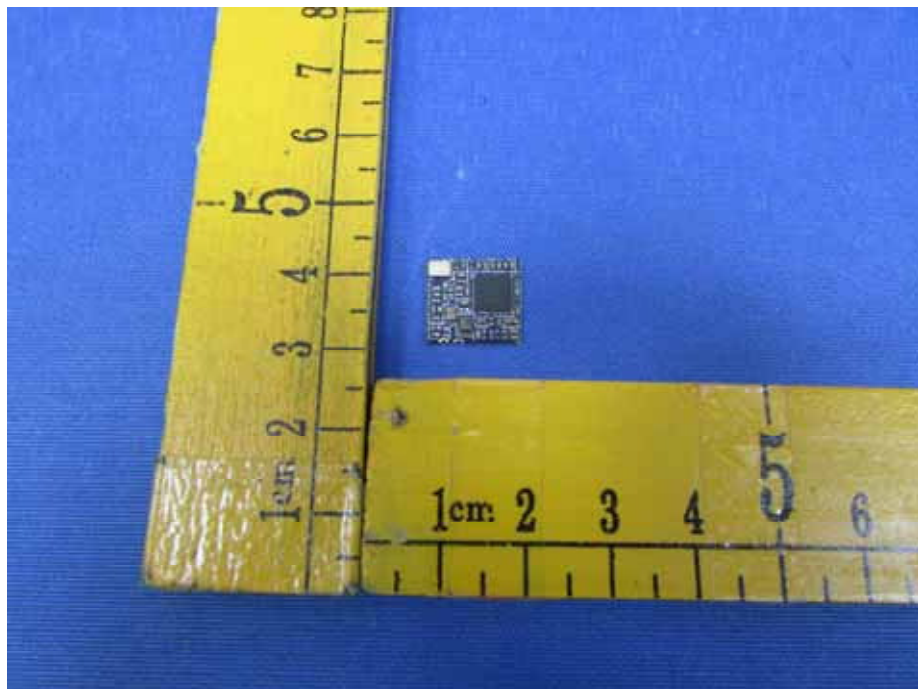

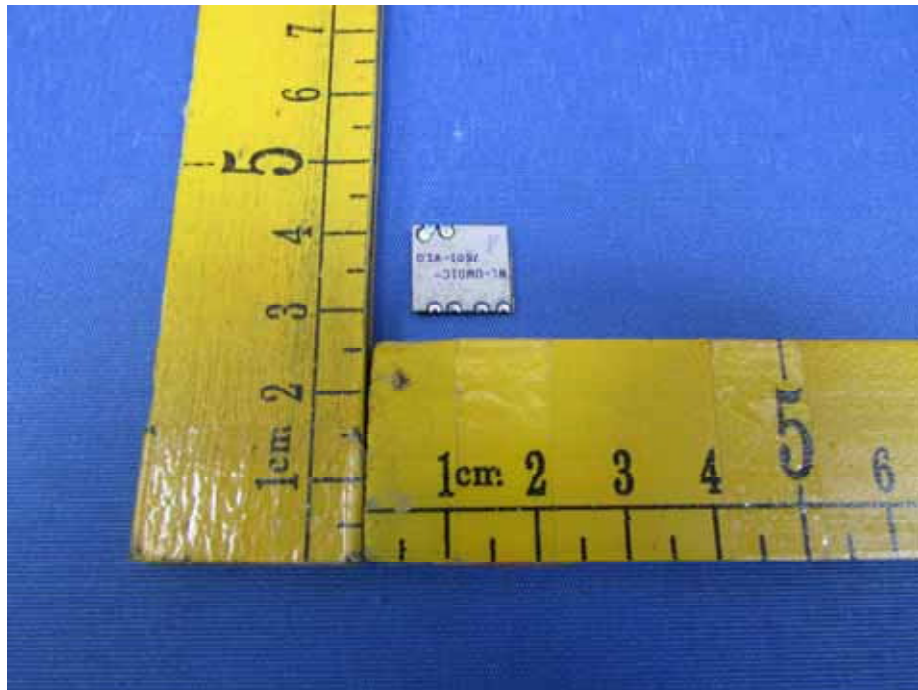

====End of Report====