



# Digital Signage

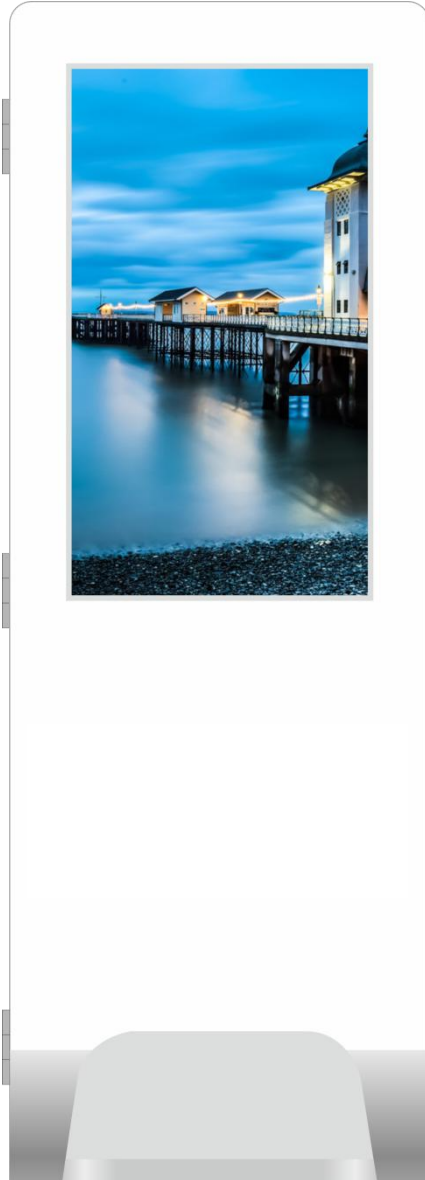

Product Model:TE-DS-215 (WAD)

1.Product Dimensions Picture

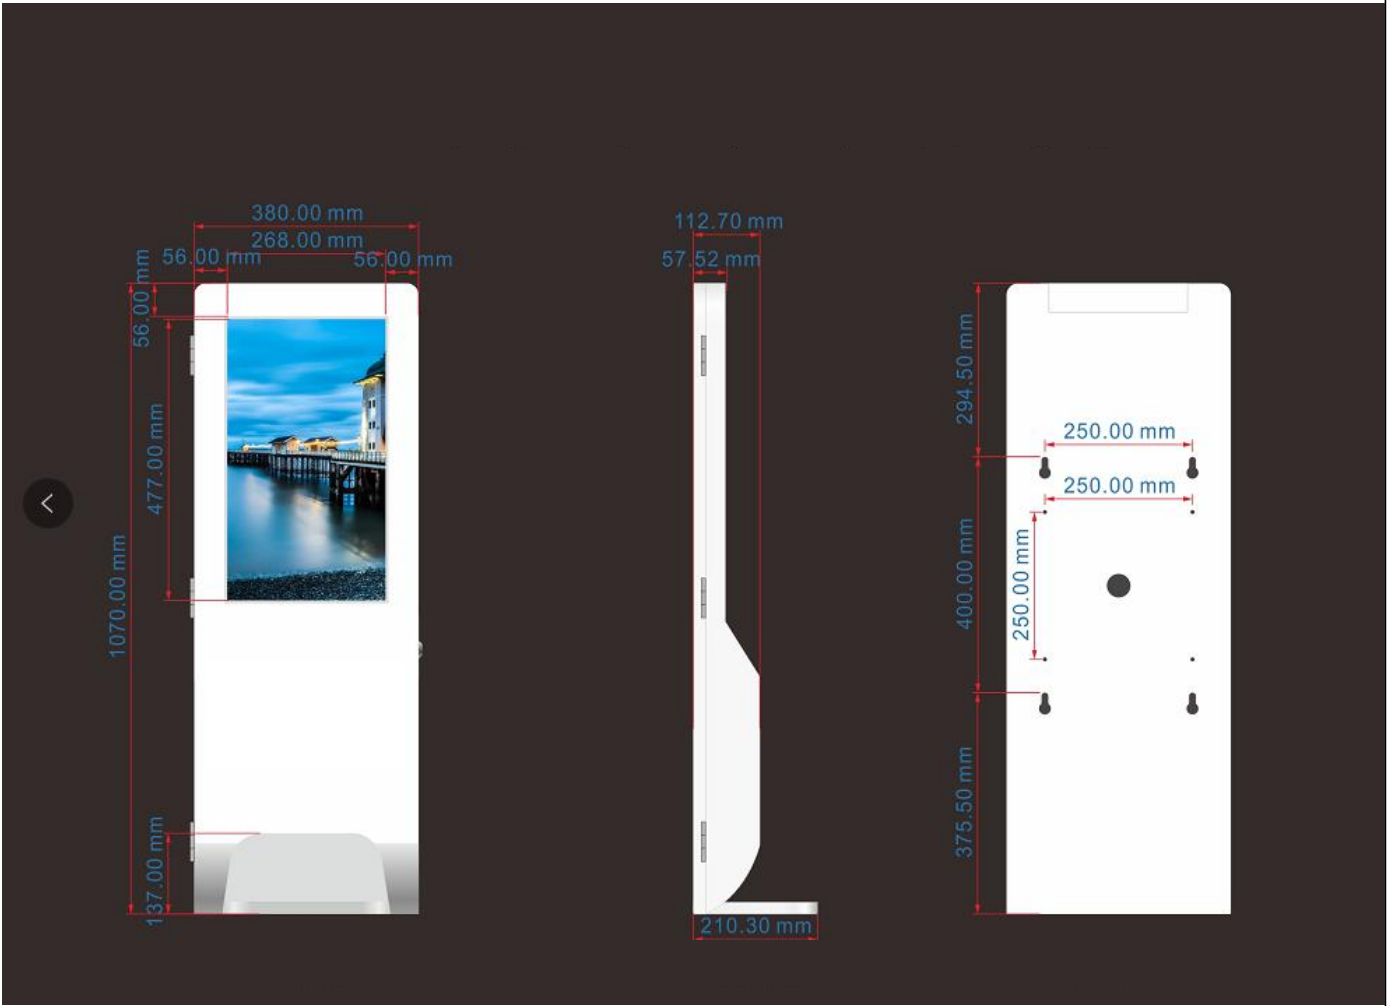

## 2.Display parameters

size	21.5 inch TFTLCD
Effective display area	476.64(H)×268.11(V) mm
screen ratio	16:9
Resolution	1920(RGB)×1080
brightness	280 cd/m <sup>2</sup>
Contrast	4000:1
View Angle	89/89/89/89(TyP.)(CRX≥10)
Response time	6ms
Touch	Optional PCAP touch

## 3.Hardware Configuration

CPU	Android quad core Main frequency1.3GHz.
RAM	1G DDR3
Built-in memory	EMMC 8G
Decoding resolution	Maximum support 1080P
USB socket	2
Network Interface	RJ45 10/100M
Audio output	Dual-channel stereo audio output
Video format	MPEG2、AVI、MP4、DIV、TS、TP、TRP、MKV MOV、DAT、ASF、WMV、RM、RMVB
Image Format	JPEG、PNG

#### 4. Disinfection machine configuration

Product capacity	1000-1200ml
Discharge mode	Spray, foam, Dripping soap
Ultraviolet	Ultraviolet disinfection

#### 3.5 Electronic data

Input voltage	AC100-240V 50/60HZ
Sensor voltage	AC 6V
Rating power	20W

#### 6. Packing List

equipment	21.5 inch Intelligent display automatic sterilizer
Packaging materials	Carton, Pearl cotton, PE bag
Accessories	WIFI antenna, key * 2

#### 7. Packing information

N.W. (with stand)	34.5KG
G.W.	39.5KG
Carton dimension	Panel: 1153*192*472mm Stand: 720*470*60mm Pillar: 153*179*250mm

## **8. Caution**

1. Make sure that the socket used is well grounded and connected to the power source away from high-power equipment.
2. Keep the power supply stable, and do grounding protection to avoid lightning strikes.
3. Do not squeeze the touch area of the whole machine shell or cabinet shell
4. Non-professionals are forbidden to touch the internal circuit of the whole machine to avoid electric shock or damage to the circuit.
5. Avoid using or storing in strong magnetic, high temperature, high humidity, high acid / alkali / salt environments.
6. Keep away from flammable materials, gas and dust.

## **9. FCC Statement:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful

interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment should be installed and operated with minimum distance 20cm between the radiator&your body.


## **10. Installation and Operation:**

10.1. the installation of the equipment is the United States standard power cable, directly plug in the power supply, to switch on. The equipment will automatically boot into the system.



Figure 1 电源开关

## 10.2 WIFI network connection:

Click the settings icon  to enter the settings option, click the "WLAN" option to open the right button, select the WIFI, to connect to enter the corresponding password to connect to use.

## 10.3. Ethernet connection:

Plug the Ethernet cable into the RJ45 port on the device, click on the "more" option in the setting to enter the setting Ethernet mode, and automatically connect to the external network after opening the Ethernet.

## 10.4 APK installation:

Insert the U disk above the device USB1 or USB2, click on the main menu "Explorer" to select "removable disk ", click USB\_DISK0" to select the APK installation to install.

When installing water sprinkler, open the front panel and put the water bottle down. , close the front panel, as shown in figure 1 below.



## 10.5 Water sprinkler Part

