

FCC Test Report

Application Purpose : Original grant

Applicant Name: : Zhongshan Boantong Communication Technology Co. , Ltd

FCC ID : 2AJFNJ-RTL00-01

Equipment Type : RTL8710 Module

Model Name : RTL00, RTL01

Report Number : FCC16073845

Standard(S) : FCC Part 15 Subpart C

Date Of Receipt : July 26, 2016

Date Of Issue : August 05, 2016

Test By : 
(Daisy Qin)

Reviewed By : 
(Sol Qin)

Authorized by : 
(Michal Ling)

Prepared by : **QTC Certification & Testing Co., Ltd.**
2nd Floor,BI Building,Fengyeyuan Industrial Plant,,
Liuxian 2st. Road, Xin'an Street, Bao'an
District,Shenzhen,518000
Registration Number: 588523

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	August 05, 2016	Valid	Original Report
V1.1	September 05,2016	August 05, 2016	Valid	Original Report

Table of Contents	Page
1. GENERAL INFORMATION	5
2. TEST DESCRIPTION	7
2.1 MEASUREMENT UNCERTAINTY	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 CONFIGURATION OF SYSTEM UNDER TEST	9
2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	9
3. SUMMARY OF TEST RESULTS	10
4. MEASUREMENT INSTRUMENTS	11
5. EMC EMISSION TEST	12
5.1 CONDUCTED EMISSION MEASUREMENT	12
5.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
5.2.4 TEST SETUP	17
5.2.5 EUT OPERATING CONDITIONS	18
5.2.5.1 RESULTS (BELOW 30 MHZ)	19
5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	20
5.2.5.3 TEST RESULTS (1GHZ TO 25GHZ)	24
6. ANTENNA APPLICATION	36
7. 6DB BANDWIDTH MEASUREMENT	37
7.1 TEST SETUP	37
7.2 LIMITS OF 6DB BANDWIDTH MEASUREMENT	37
7.3 TEST PROCEDURE	37
8. MAXIMUM PEAK OUTPUT POWER	45
8.1 TEST SETUP	45
8.2 LIMITS OF MAXIMUM PEAK OUTPUT POWER	45
8.3 TEST PROCEDURE	45
9. POWER SPECTRAL DENSITY MEASUREMENT	51
9.1 TEST SETUP	51
9.2 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
9.3 TEST PROCEDURE	51
9.4 TEST RESULT	52
10. OUT OF BAND MEASUREMENT	59
10.1 TEST SETUP FOR BAND EDGE	59

10.2 LIMITS OF OUT OF BAND EMISSIONS MEASUREMENT	59
10.4 TEST RESULT	59
11. EUT TEST PHOTO	74
12. PHOTOGRAPHS OF EUT	75

1. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Test Model	RTL00, RTL01
Applicant	Zhongshan Boantong Communication Technology Co. , Ltd
Address	3rd~4th Floor, Building A, DongFang Industrial Park, NanLang Town,ZhongShan City,China
Manufacturer	Zhongshan Boantong Communication Technology Co. , Ltd
Address	3rd~4th Floor, Building A, DongFang Industrial Park, NanLang Town,ZhongShan City,China
Equipment Type	RTL8710 Module
Brand Name	
Hardware version:	RTL00-V1.0,RTL01-V1.0
Software version:	RTL8710-AT-V3
Extreme Temp. Tolerance	-20℃ to +85℃ Brand Name
Battery information:	N/A
Adapter Information:	N/A
Operating Frequency	2412-2462MHz
Channels	11
Channel Spacing	5MHz
Modulation Type	CCK for IEEE 802.11b OFDM for IEEE 802.11g/n HT-20/n HT-40
Antenna Type:	Integral Antenna
Antenna gain:	RTL00: 3dBi, RTL01:2.21dBi
Data of receipt	July 01, 2016
Date of test	July 26, 2016 to August 04, 2016
Deviation	None
Condition of Test Sample	Normal

Notes: The main test RTL01

We hereby certify that:

The above equipment was tested by QTC Certification & Testing Co., Ltd.

Registration Number: 588523

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2014 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart C.

ALL the testing were referenced KDB NO.558074

The test results of this report relate only to the tested sample identified in this report.

2. TEST DESCRIPTION

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b
Mode 2	802.11g
Mode 3	802.11n20
Mode 4	802.11n40

For Conducted Emission	
Final Test Mode	Description
Mode 1	802.11b

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b
Mode 2	802.11g
Mode 3	802.11n20
Mode 4	802.11n40

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) The EUT use new battery.


(3) Record the worst case of each test item in this report.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Frequency(802.11b/g/n20)	2412 MHz	2437 MHz	2462 MHz
Frequency(802.11n40)	2422 MHz	2437 MHz	2452 MHz

2.4 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: RTL8710 Module)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
USB port	1	1m USB cable, unshielded	1

2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.

3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.107 & 15.207	Conducted Emission Test	N/A	N/A
15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
15.247(b)	Maximum peak outputpower Limit: max. 30dBm	PASS	Complies
15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

(2) With a duty cycle of greater than or equal to 98%.

Adjust the measurement by adding $10\log(1/x)$ in dBm, where x is the duty cycle to the measurement result.

4. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
EMI Test Receiver	R&S	ESCI	100005	2015-08-18	2016-08-17
Ultra Broadband ANT	R&S	HL562	100157	2015-08-18	2016-08-17
pre-amplifier	CDSI	PAP-1G18-38	--	2015-08-18	2016-08-17
System Controller	CT	SC100	-	2015-08-18	2016-08-17
Bi-log Antenna	Chase	CBRTL00, RTL01111C	2576	2015-08-18	2016-08-17
Spectrum analyzer	R&S	FSU26	200409	2015-08-18	2016-08-17
Horn Antenna	SCHWARZBECK	9120D	1141	2015-08-18	2016-08-17
Bi-log Antenna	Schwarebeck	VULB9163	9163/340	2015-08-18	2016-08-17
Loop Antenna	EMCO	6502	00042960	2015-08-21	2016-08-20
Pre Amplifier	H.P.	HP8447E	2945A02715	10/12/2015	10/11/2016
Pre-Amplifier	CDSI	PAP-1G18-38	--	10/12/2015	10/11/2016
9*6*6 Anechoic	--	--	--	08/20/2015	08/19/2016
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/12/2015	09/11/2016
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	08/22/2015	08/21/2016
Power meter	Anritsu	ML2487A	6K00003613	08/22/2015	08/21/2016
Power meter	Anritsu	MA2491A	32263	08/22/2015	08/21/2016
H & T Chamber	Guangzhou gongwen	GDJS-500-40	0329	08/18/2015	08/17/2016
EXA Signal Analyzer	Aglient	N9020A	--	08/18/2015	08/17/2016
USB Wideband Power Sensor	Aglient	U2021XA	--	08/18/2015	08/17/2016
RF cable	H+S	--	--	08/18/2015	08/17/2016

5. EMC EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


5.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

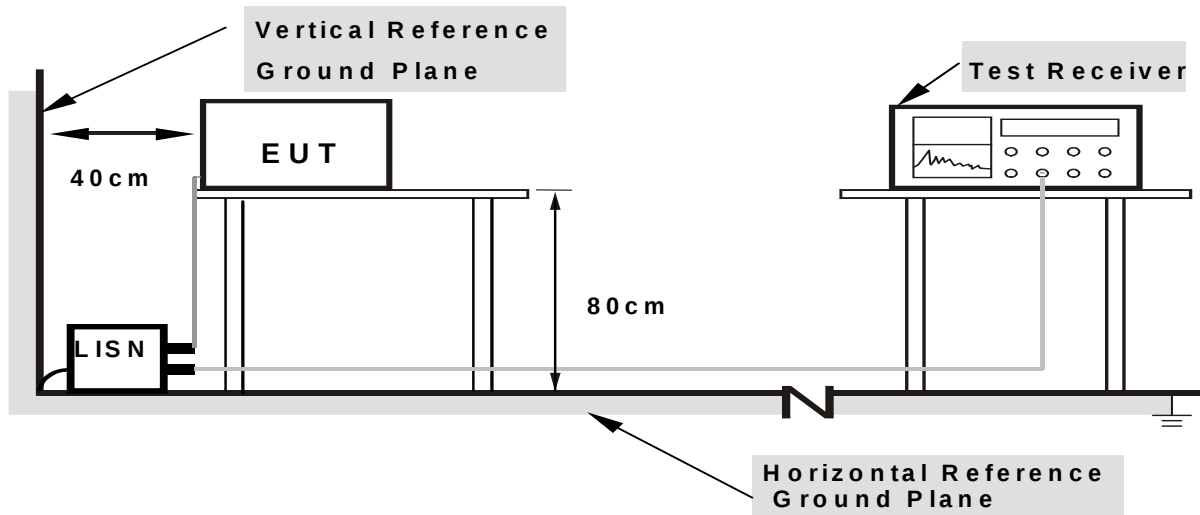

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 TEST RESULTS

N/A

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.3 DEVIATION FROM TEST STANDARD


No deviation

5.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

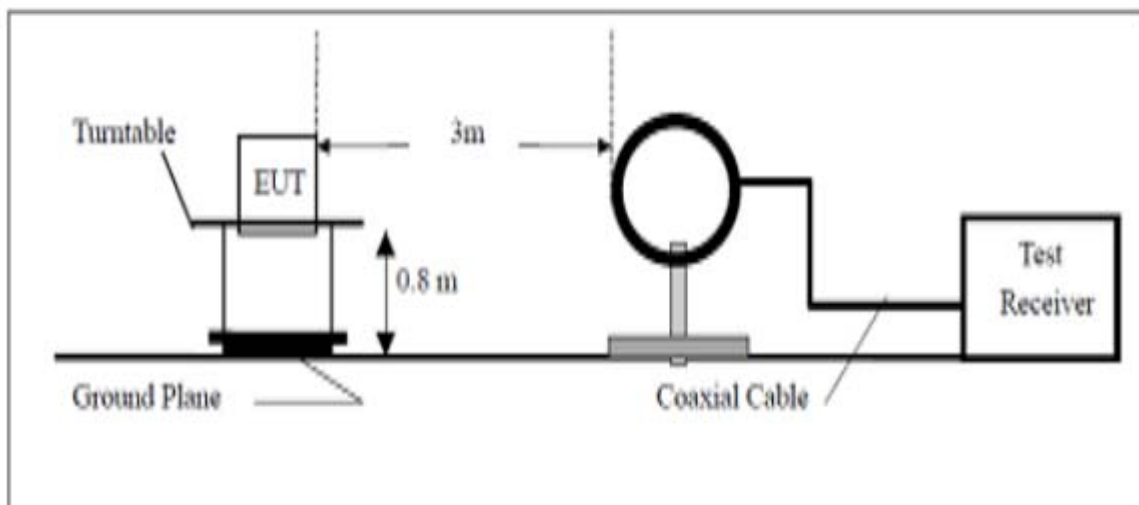

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

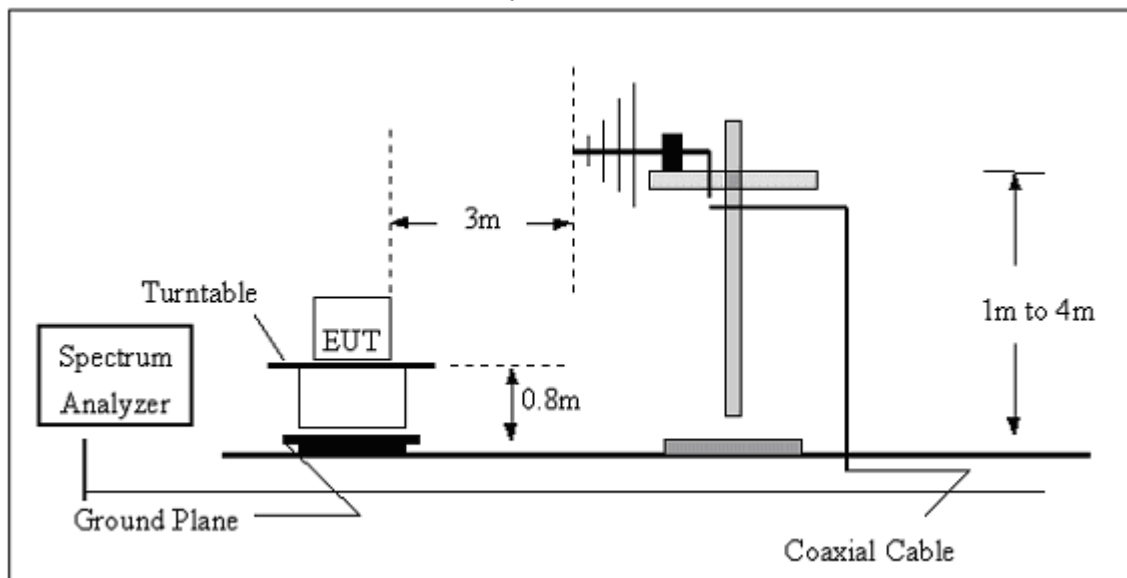

(C) Radiated Emission Test-Up Frequency Above 1GHz

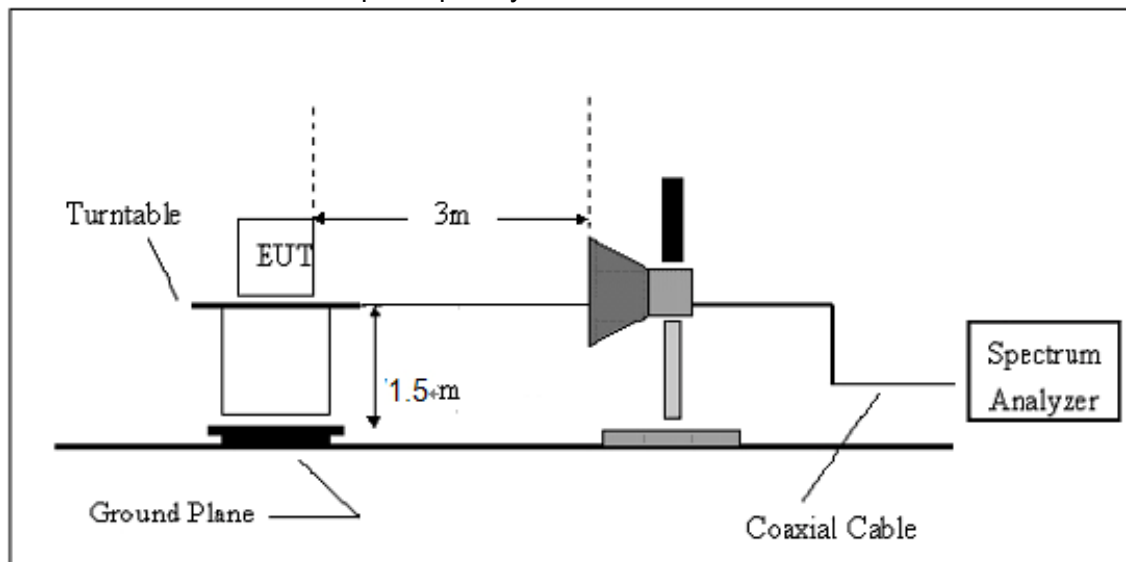**5.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5.1 RESULTS (BELOW 30 MHZ)

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	---
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	---
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

NOTE:

No result in this part for margin above 20dB.


Distance extrapolation factor = $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)


EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Horizontal
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

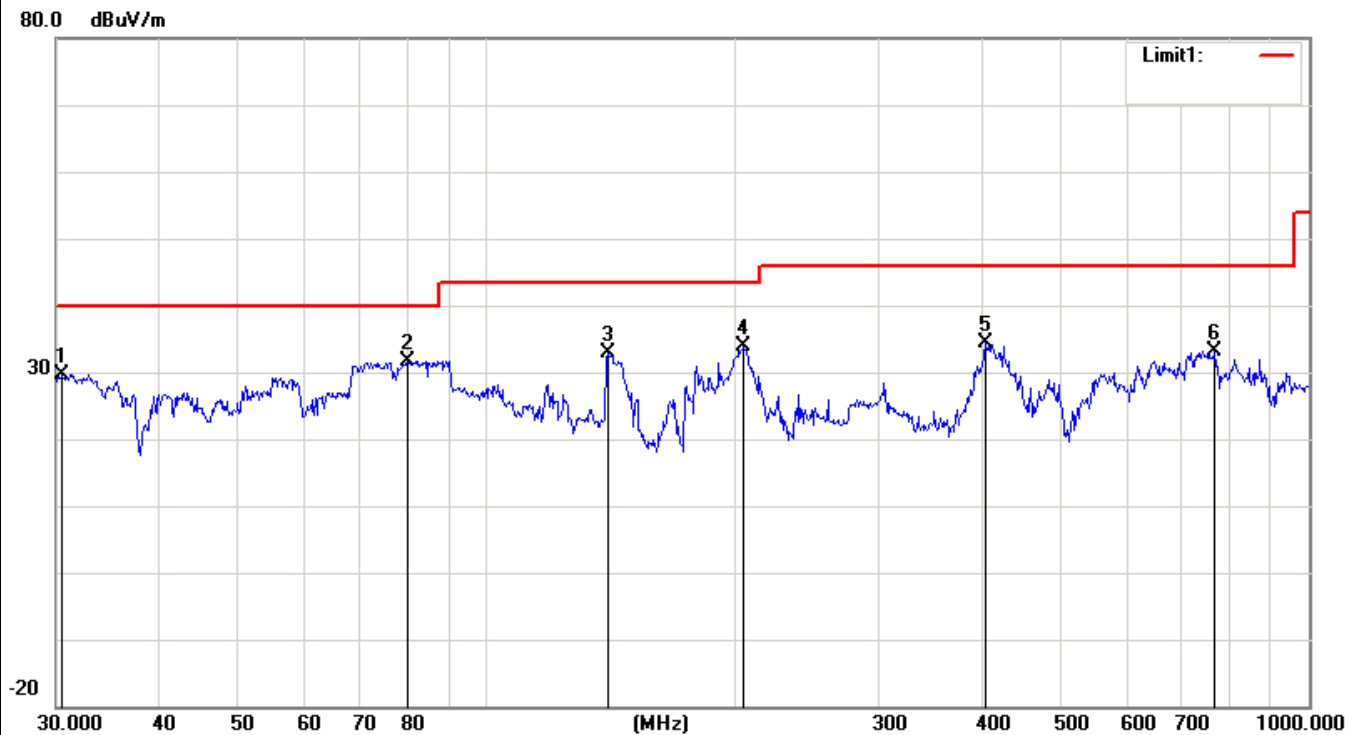

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		30.5304	26.56	3.13	29.69	40.00	-10.31	peak
2	*	80.3619	39.38	-7.76	31.62	40.00	-8.38	peak
3		140.8351	36.02	-3.13	32.89	43.50	-10.61	peak
4		205.6750	38.95	-5.03	33.92	43.50	-9.58	peak
5		404.6664	36.43	-2.17	34.26	46.00	-11.74	peak
6		768.7481	29.50	3.67	33.17	46.00	-12.83	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Vertical
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

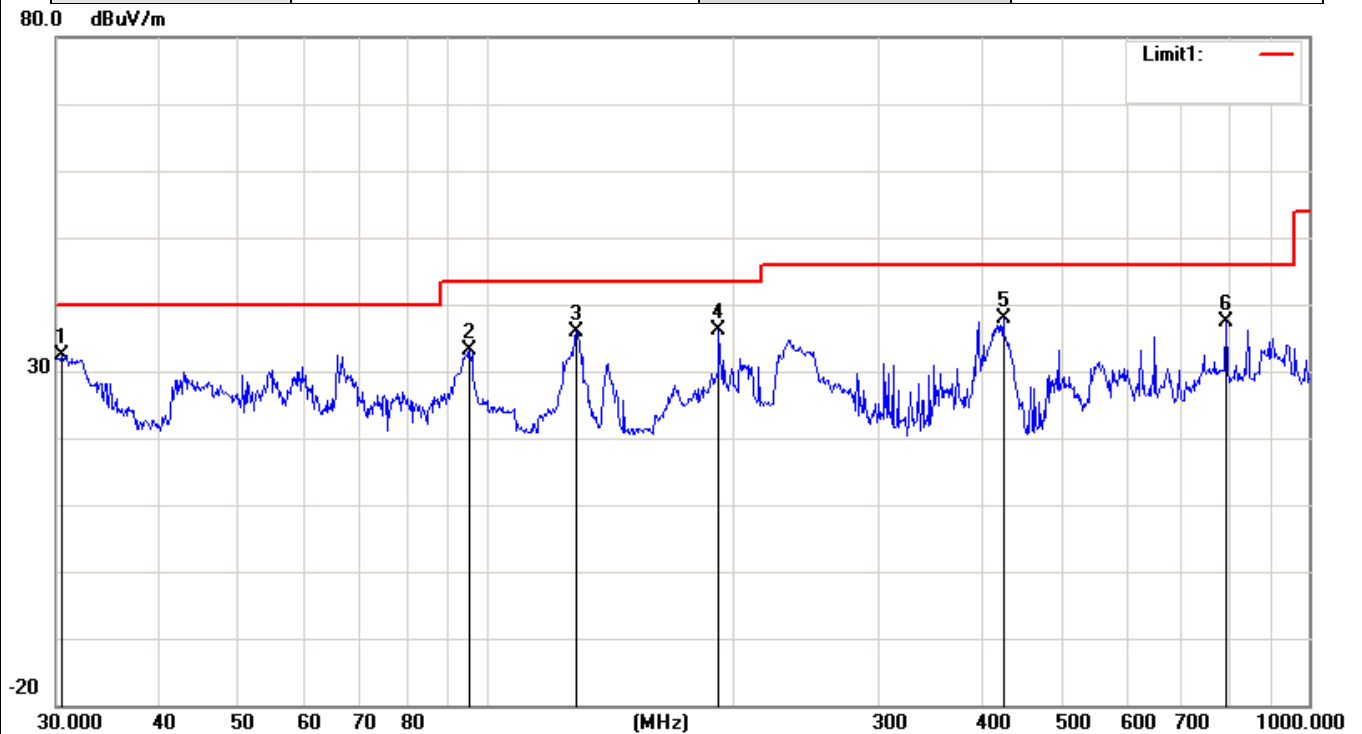


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		30.4237	29.28	3.20	32.48	40.00	-7.52	peak
2		95.4270	40.37	-7.26	33.11	43.50	-10.39	peak
3		128.5629	38.02	-2.17	35.85	43.50	-7.65	peak
4	*	191.7450	41.53	-5.29	36.24	43.50	-7.26	peak
5		425.0280	40.37	-2.42	37.95	46.00	-8.05	peak
6		793.3958	33.27	4.09	37.36	46.00	-8.64	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Horizontal
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

80.0 dBuV/m

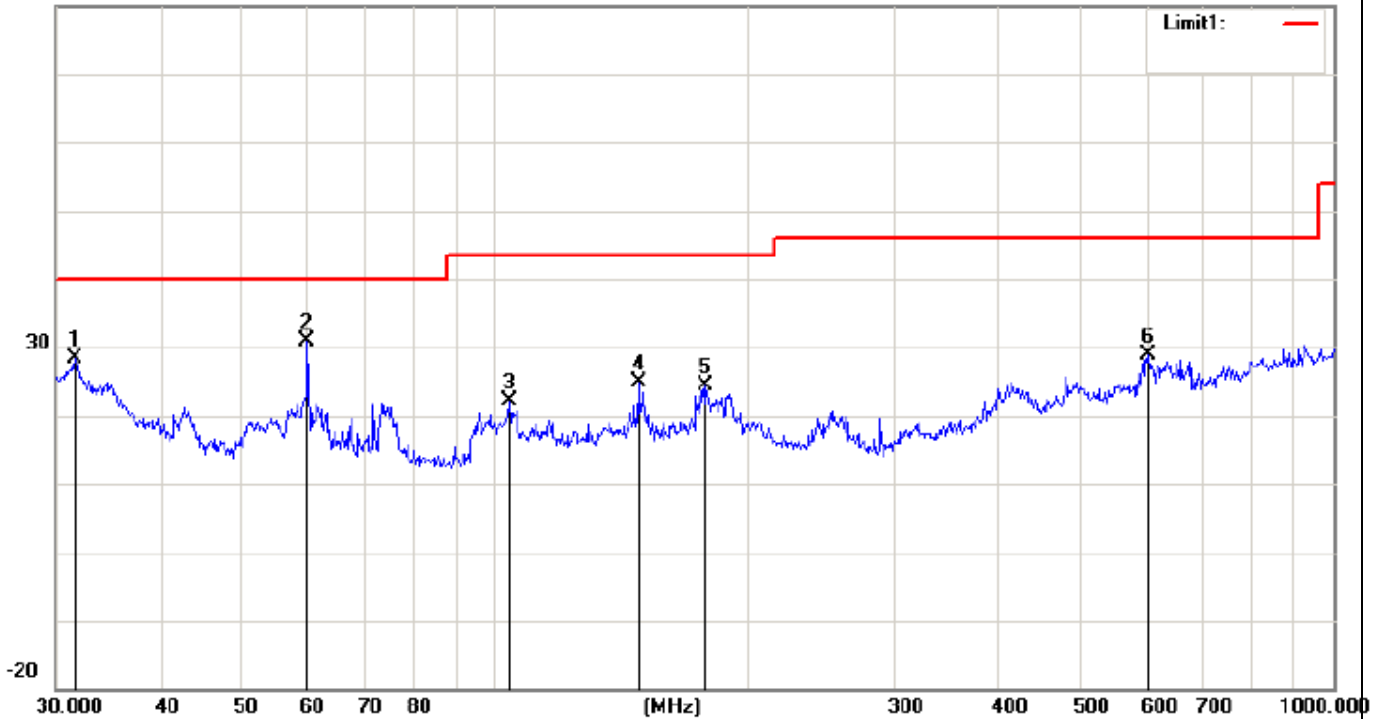


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31.6202	25.95	2.40	28.35	40.00	-11.65	peak
2	*	59.8588	40.16	-9.39	30.77	40.00	-9.23	peak
3		104.1701	27.35	-5.18	22.17	43.50	-21.33	peak
4		148.4410	28.53	-3.71	24.82	43.50	-18.68	peak
5		178.7581	29.45	-5.11	24.34	43.50	-19.16	peak
6		601.4265	27.82	1.04	28.86	46.00	-17.14	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Vertical
Test Mode	Keep WIFI Transmitting	Test Date	July 27, 2016

80.0 dBuV/m

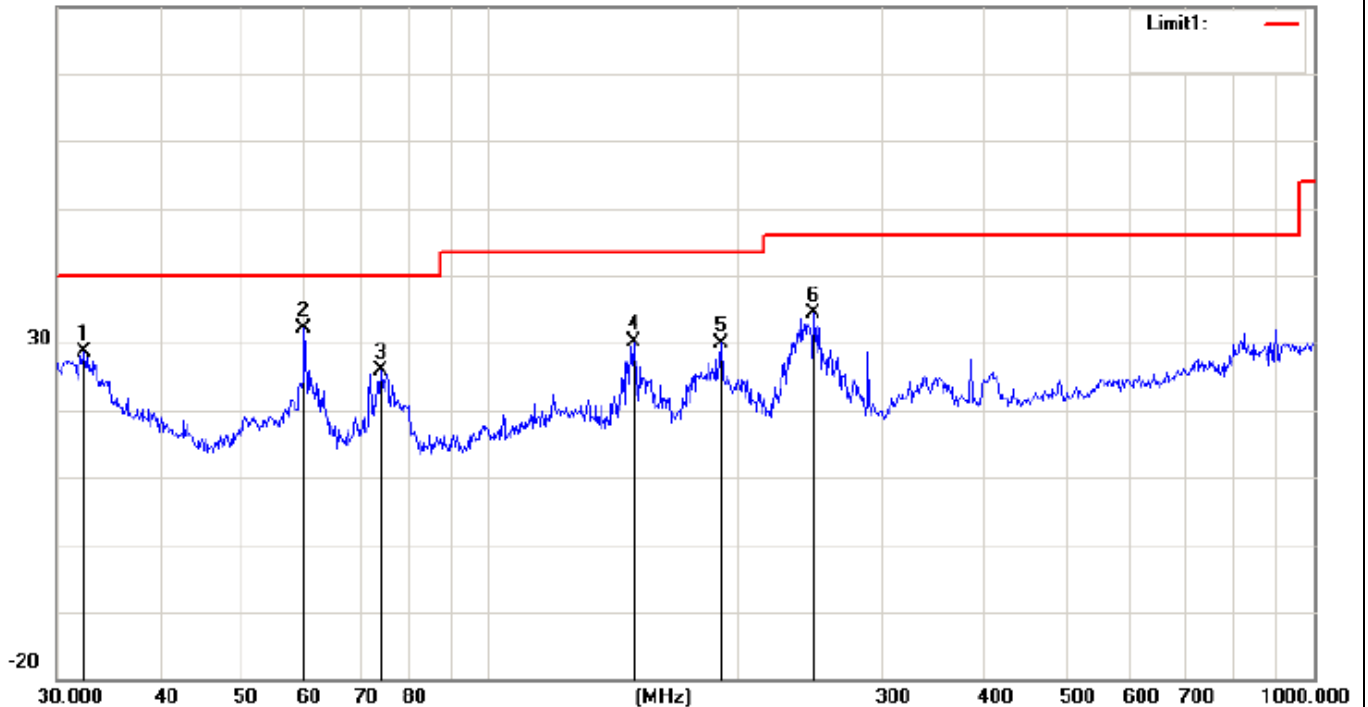

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.4059	26.66	1.87	28.53	40.00	-11.47	peak
2	*	59.8588	41.42	-9.39	32.03	40.00	-7.97	peak
3		74.1350	33.54	-7.58	25.96	40.00	-14.04	peak
4		150.0107	34.03	-3.86	30.17	43.50	-13.33	peak
5		191.7450	35.29	-5.29	30.00	43.50	-13.50	peak
6		247.6819	40.79	-6.52	34.27	46.00	-11.73	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

5.2.5.3 TEST RESULTS (1GHZ TO 25GHZ)

Note: *the worst case is 802.11b mode as result in this part.*

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	59.78	40.67	74	54	-14.22	-13.33
7236	V	59.03	39.29	74	54	-14.97	-14.71
4824	H	59.21	39.11	74	54	-14.79	-14.89
7236	H	59.29	40.29	74	54	-14.71	-13.71

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	59.49	40.14	74	54	-14.51	-13.86
7311	V	59.18	39.25	74	54	-14.82	-14.75
4874	H	58.18	40.06	74	54	-15.82	-13.94
7311	H	58.93	39.93	74	54	-15.07	-14.07

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	58.22	40.44	74	54	-15.78	-13.56
7386	V	58.06	40.90	74	54	-15.94	-13.10
4924	H	58.32	40.70	74	54	-15.68	-13.30
7386	H	59.01	40.01	74	54	-14.99	-13.99

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode2 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	58.60	39.34	74	54	-15.40	-14.66
7236	V	58.67	39.80	74	54	-15.33	-14.20
4824	H	58.81	39.73	74	54	-15.19	-14.27
7236	H	58.74	39.74	74	54	-15.26	-14.26

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	58.95	41.61	74	54	-15.05	-12.39
7311	V	59.92	39.09	74	54	-14.08	-14.91
4874	H	58.18	39.73	74	54	-15.82	-14.27
7311	H	59.10	40.10	74	54	-14.90	-13.90

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	59.34	39.73	74	54	-14.66	-14.27
7386	V	58.73	40.45	74	54	-15.27	-13.55
4924	H	59.27	39.83	74	54	-14.73	-14.17
7386	H	59.56	40.56	74	54	-14.44	-13.44

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode3 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	60.13	40.37	74	54	-13.87	-13.63
7236	V	58.40	40.60	74	54	-15.60	-13.40
4824	H	59.41	39.02	74	54	-14.59	-14.98
7236	H	59.32	40.32	74	54	-14.68	-13.68

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	60.25	41.60	74	54	-13.75	-12.40
7311	V	59.78	40.73	74	54	-14.22	-13.27
4874	H	59.15	39.95	74	54	-14.85	-14.05
7311	H	58.45	39.45	74	54	-15.55	-14.55

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	58.43	39.78	74	54	-15.57	-14.22
7386	V	59.21	40.01	74	54	-14.79	-13.99
4924	H	58.63	40.53	74	54	-15.37	-13.47
7386	H	59.67	40.67	74	54	-14.33	-13.33

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode4 TX
Test Date	July 27, 2016	Frequency	2422MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4844	V	59.32	40.08	74	54	-14.68	-13.92
7266	V	59.38	39.67	74	54	-14.62	-14.33
4844	H	59.37	39.14	74	54	-14.63	-14.86
7266	H	58.12	39.12	74	54	-15.88	-14.88

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 4 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	60.75	40.40	74	54	-13.25	-13.60
7311	V	58.94	39.42	74	54	-15.06	-14.58
4874	H	59.80	39.74	74	54	-14.20	-14.26
7311	H	59.29	40.29	74	54	-14.71	-13.71

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL01
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 4 TX
Test Date	July 27, 2016	Frequency	2452MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4904	V	59.63	40.14	74	54	-14.37	-13.86
7356	V	58.03	40.18	74	54	-15.97	-13.82
4904	H	58.13	39.62	74	54	-15.87	-14.38
7356	H	59.50	40.50	74	54	-14.50	-13.50

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	-59.41	-39.31	74	54	-14.59	-14.69
7236	V	-58.64	-40.58	74	54	-15.36	-13.42
4824	H	-59.11	-39.83	74	54	-14.89	-14.17
7236	H	-58.28	-40.36	74	54	-15.72	-13.64

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	-59.98	-39.24	74	54	-14.02	-14.76
7311	V	-58.24	-39.39	74	54	-15.76	-14.61
4874	H	-58.99	-39.59	74	54	-15.01	-14.41
7311	H	-58.18	-40.97	74	54	-15.82	-13.03

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	-58.66	-39.63	74	54	-15.34	-14.37
7386	V	-59.14	-40.41	74	54	-14.86	-13.59
4924	H	-58.72	-39.03	74	54	-15.28	-14.97
7386	H	-59.87	-39.37	74	54	-14.13	-14.63

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode2 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	-58.49	-39.29	74	54	-15.51	-14.71
7236	V	-59.00	-39.70	74	54	-15.00	-14.30
4824	H	-59.98	-39.94	74	54	-14.02	-14.06
7236	H	-58.72	-39.03	74	54	-15.28	-14.97

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	-59.69	-40.91	74	54	-14.31	-13.09
7311	V	-59.74	-39.70	74	54	-14.26	-14.30
4874	H	-58.49	-39.35	74	54	-15.51	-14.65
7311	H	-59.49	-40.23	74	54	-14.51	-13.77

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	-58.12	-39.51	74	54	-15.88	-14.49
7386	V	-58.58	-40.77	74	54	-15.42	-13.23
4924	H	-59.66	-39.15	74	54	-14.34	-14.85
7386	H	-58.37	-40.93	74	54	-15.63	-13.07

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode3 TX
Test Date	July 27, 2016	Frequency	2412MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4824	V	-58.55	-39.98	74	54	-15.45	-14.02
7236	V	-59.97	-40.48	74	54	-14.03	-13.52
4824	H	-59.74	-40.99	74	54	-14.26	-13.01
7236	H	-58.57	-39.63	74	54	-15.43	-14.37

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	-58.58	-40.61	74	54	-15.42	-13.39
7311	V	-59.88	-39.89	74	54	-14.12	-14.11
4874	H	-58.62	-39.91	74	54	-15.38	-14.09
7311	H	-59.90	-39.10	74	54	-14.10	-14.90

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX
Test Date	July 27, 2016	Frequency	2462MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4924	V	-58.16	-40.75	74	54	-15.84	-13.25
7386	V	-58.61	-39.63	74	54	-15.39	-14.37
4924	H	-58.71	-39.82	74	54	-15.29	-14.18
7386	H	-59.00	-40.31	74	54	-15.00	-13.69

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode4 TX
Test Date	July 27, 2016	Frequency	2422MHz

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4844	V	-59.64	-40.31	74	54	-14.36	-13.69
7266	V	-58.06	-39.89	74	54	-15.94	-14.11
4844	H	-59.78	-40.85	74	54	-14.22	-13.15
7266	H	-59.77	-39.80	74	54	-14.23	-14.20

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 4 TX
Test Date	July 27, 2016	Frequency	2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4874	V	-59.73	-39.81	74	54	-14.27	-14.19
7311	V	-59.05	-40.82	74	54	-14.95	-13.18
4874	H	-59.69	-40.44	74	54	-14.31	-13.56
7311	H	-58.86	-40.94	74	54	-15.14	-13.06

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT	RTL8710 Module	Model Name	RTL00
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 4 TX
Test Date	July 27, 2016	Frequency	2452MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4904	V	-59.94	-40.12	74	54	-14.06	-13.88
7356	V	-58.47	-39.29	74	54	-15.53	-14.71
4904	H	-59.41	-39.81	74	54	-14.59	-14.19
7356	H	-59.15	-39.20	74	54	-14.85	-14.80

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

6. ANTENNA APPLICATION

6.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements: Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

6.2 Result


EUT was designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. A broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. So the EUT meets the requirements of this section.

The antenna gain of RTL00 is 3dBi and meets the requirement.

The antenna gain of RTL01 is 2.21dBi and meets the requirement.

7.0. 6DB BANDWIDTH MEASUREMENT

7.1 TEST SETUP



7.2 LIMITS OF 6DB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 TEST RESULT

6dB Occupied Bandwidth


EUT		RTL8710 Module		Model		RTL01	
Mode		802.11b		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (kHz)	Minimum Limit (MHz)	Pass/ Fail		
1	2412	1	8125.0	0.5	Pass		
6	2437	1	8269.2	0.5	Pass		
11	2462	1	9663.4	0.5	Pass		

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11g		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (kHz)	Minimum Limit (MHz)	Pass/ Fail		
1	2412	6	12692.3	0.5	Pass		
6	2437	6	24411.3	0.5	Pass		
11	2462	6	16490.3	0.5	Pass		

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n20		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (kHz)	Minimum Limit (MHz)	Pass/ Fail		
1	2412	6.5	24091.1	0.5	Pass		
6	2437	6.5	15528.8	0.5	Pass		
11	2462	6.5	17692.3	0.5	Pass		


EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n40		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (kHz)	Minimum Limit (MHz)	Pass/ Fail		
3	2422	13.5	35288.4	0.5	Pass		
6	2437	13.5	20192.3	0.5	Pass		
9	2452	13.5	36153.8	0.5	Pass		

802.11b at 1Mbps of CH1

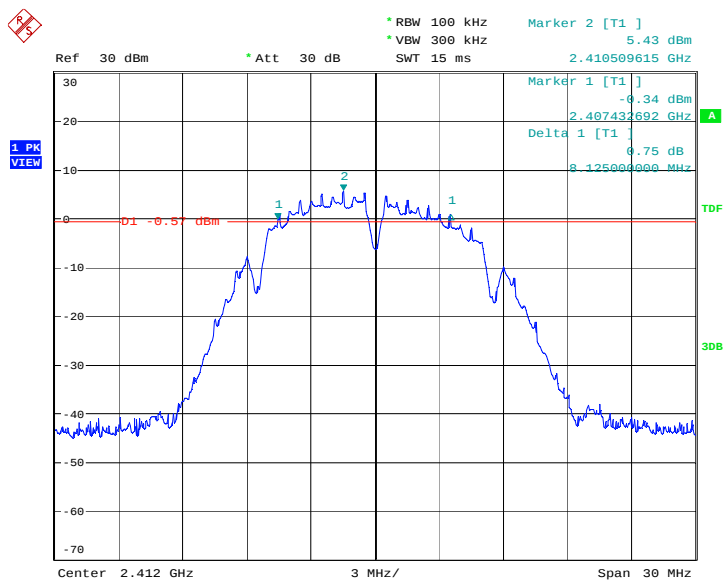


Date: 5.SEP.2016 14:25:44

802.11b at 1Mbps of CH6

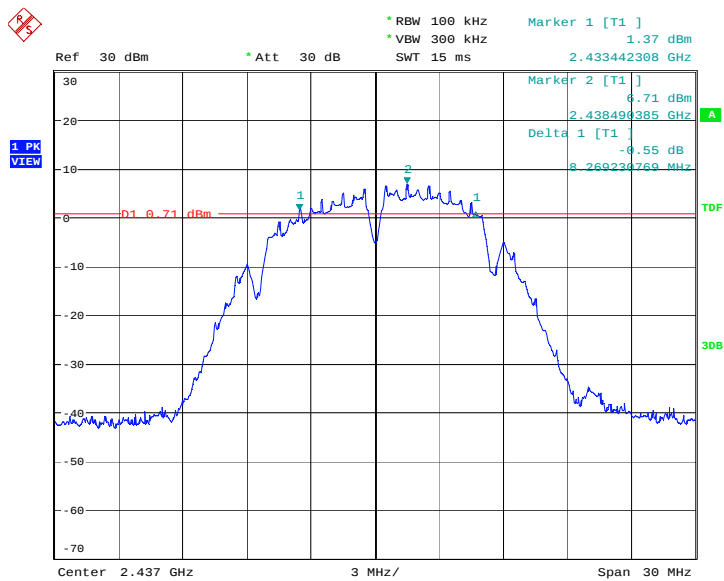


Date: 5.SEP.2016 14:28:05

802.11b at 1Mbps of CH11

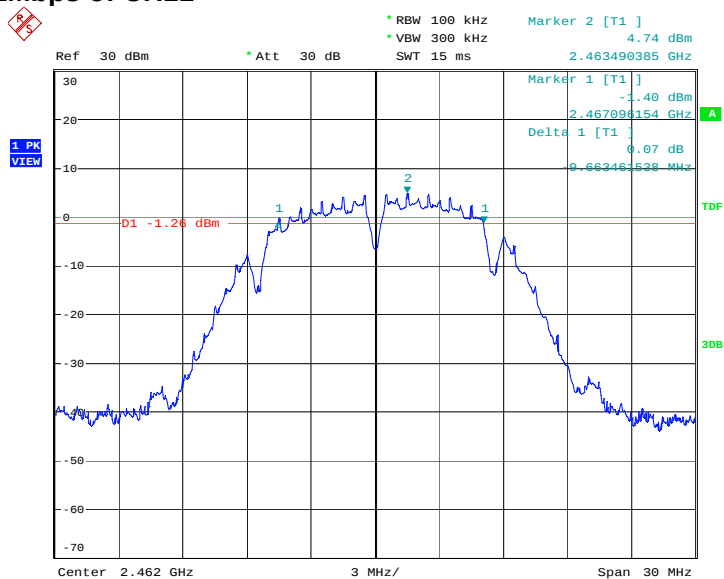


Date: 5.SEP.2016 14:29:28

802.11g at 6Mbps of CH1

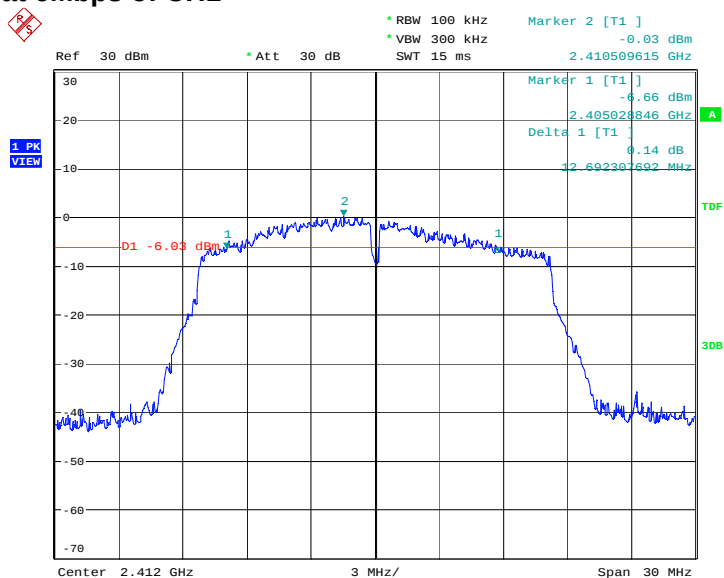


Date: 5.SEP.2016 14:31:57

802.11g at 6Mbps of CH6

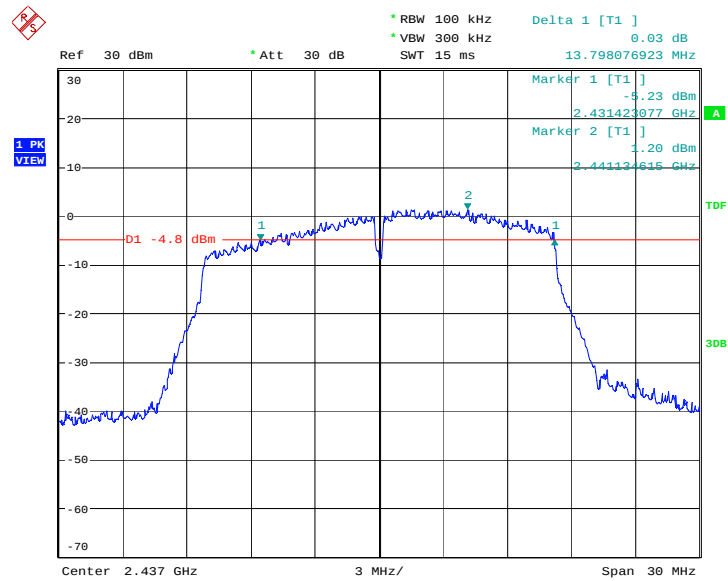


Date: 5.SEP.2016 14:33:13

802.11g at 6Mbps of CH11

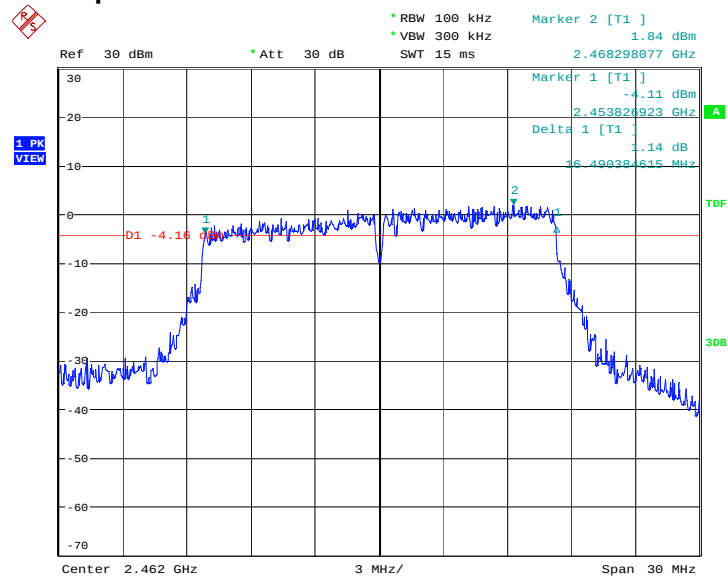


Date: 5.SEP.2016 14:34:51

802.11n at HT20 of CH1

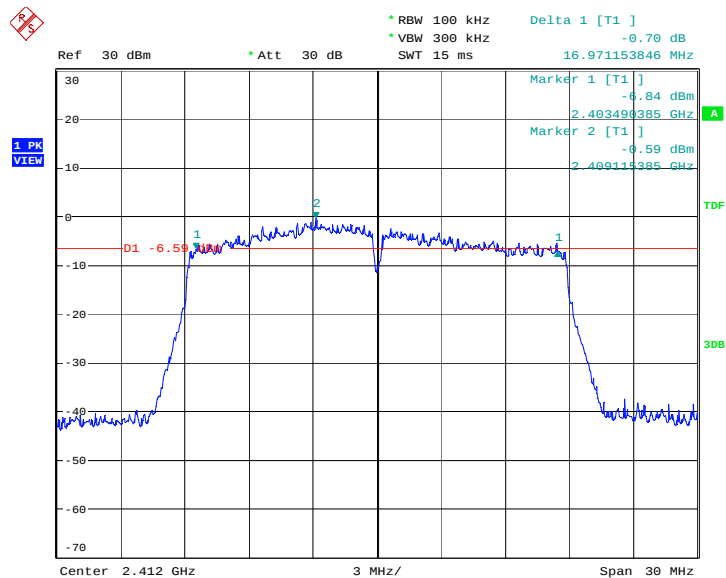


Date: 5.SEP.2016 14:36:40

802.11n at HT20 of CH6

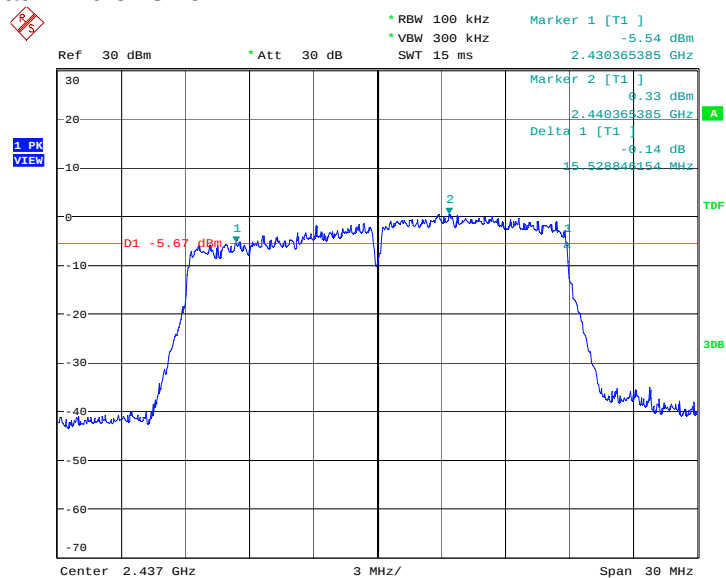


Date: 5.SEP.2016 14:38:19

802.11n at HT20 of CH11

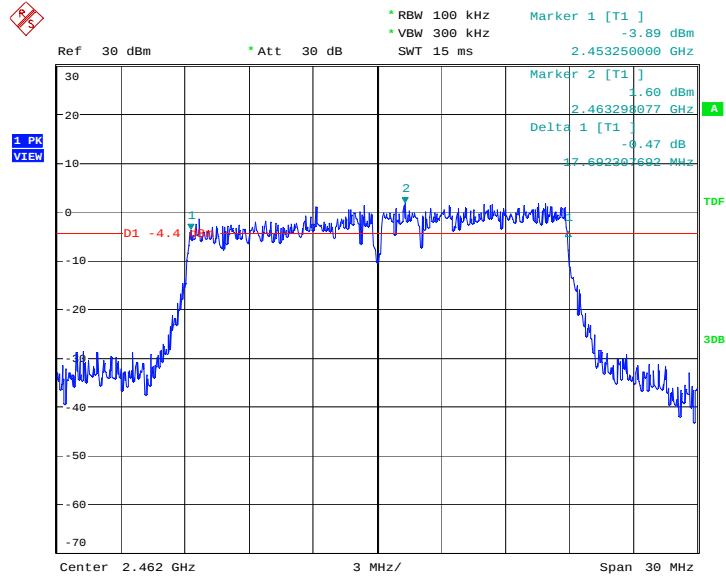


Date: 5.SEP.2016 14:40:04

802.11n at HT40 of CH3

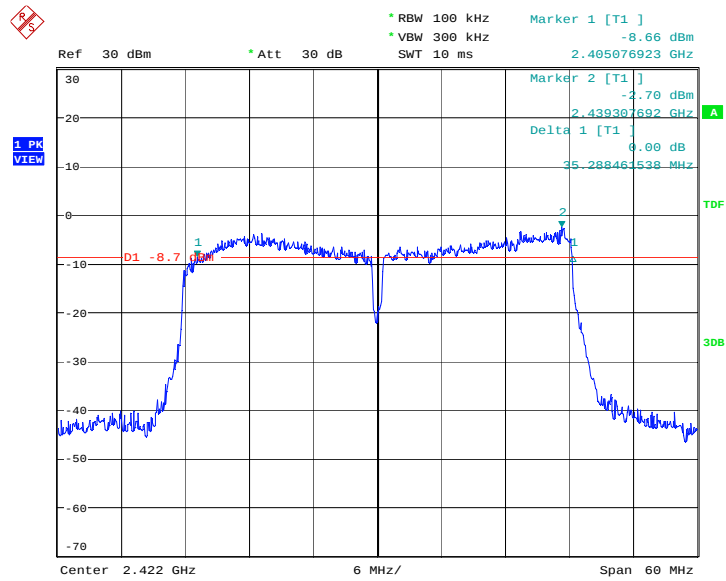


Date: 5.SEP.2016 14:42:23

802.11n at HT40 of CH6

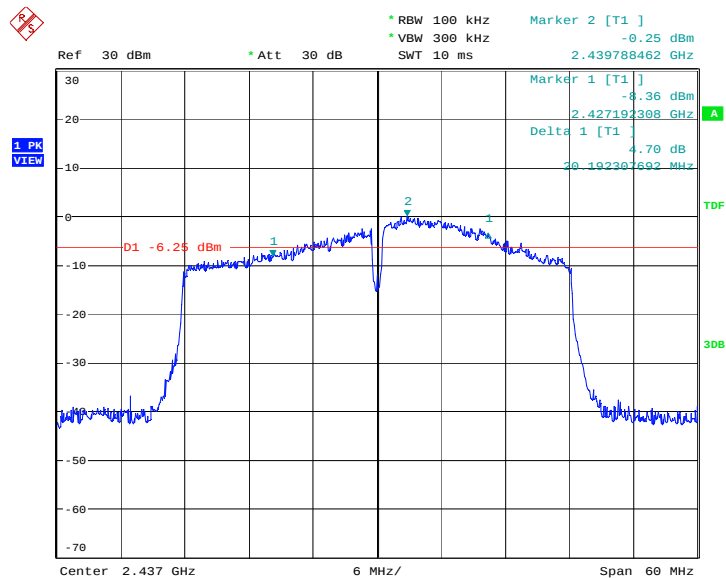

Date: 5.SEP.2016 14:51:43


802.11n at HT40 of CH9

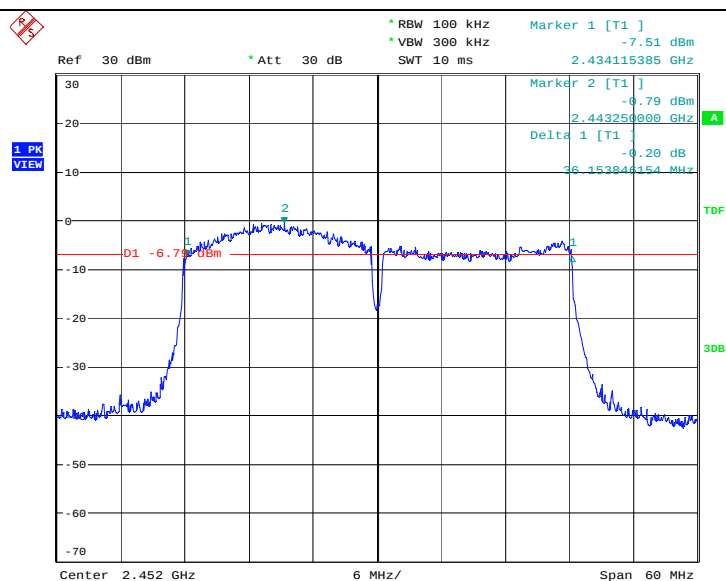

Date: 5.SEP.2016 14:53:10

8.0. MAXIMUM PEAK OUTPUT POWER

8.1 TEST SETUP

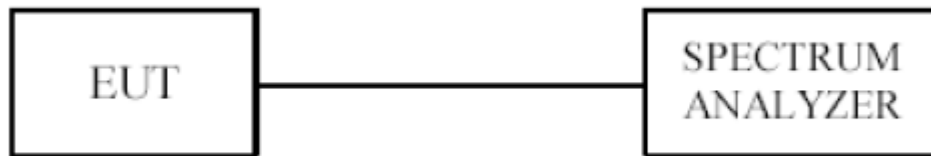

8.2 LIMITS OF MAXIMUM PEAK OUTPUT POWER

The Maximum Peak Output Power Measurement is 30dBm.

8.3 TEST PROCEDURE

The RF power output was measured with a Power meter connected to the RF Antenna connector measurement while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured.

8.4 TEST RESULTS

OF RESULTS

EUT	RTL8710 Module		Model	RTL01	
Mode	802.11b		Humidity	56% RH	
Temperature	24 deg. C,				
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail	
1	2412	7.04	30	Pass	
6	2437	8.25	30	Pass	
11	2462	8.15	30	Pass	

Note: 1. At final test to get the worst-case emission at 1Mbps for CH1, CH6 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11g		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1	2412		7.81		30		Pass
6	2437		9.55		30		Pass
11	2462		7.28		30		Pass

Note: 1. At final test to get the worst-case emission at 6 Mbps for CH1, CH6 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n(HT20)		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1	2412		6.26		30		Pass
6	2437		7.32		30		Pass
11	2462		6.46		30		Pass

Note: 1. At final test to get the worst-case emission at 6.5Mbps for CH1, CH6 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n (HT40)		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
3	2422		2.56		30		Pass
6	2437		4.56		30		Pass
9	2452		3.48		30		Pass


Note: 1. At final test to get the worst-case emission at 13.5Mbps for CH3, CH6 and CH9

2. The result basic equation calculation as follow:


Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded.


802.11b at 1Mbps of CH1

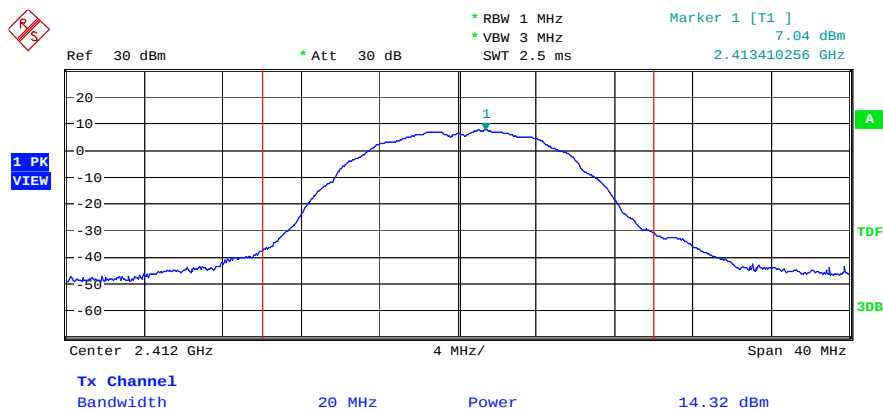


802.11b at 1Mbps of CH6

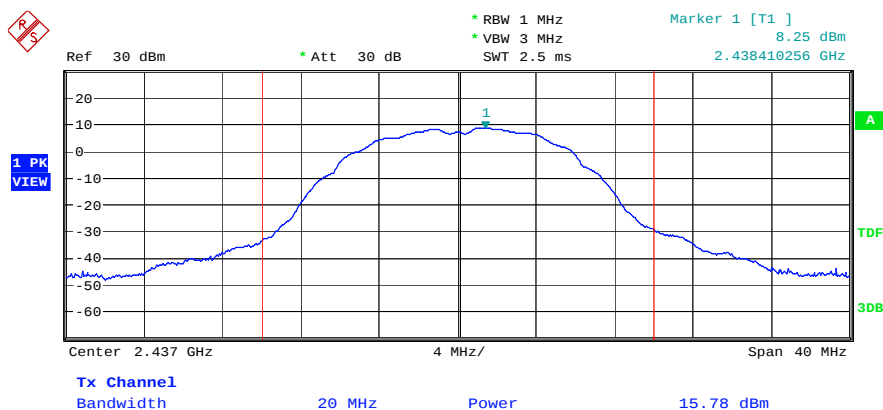


802.11b at 1Mbps of CH11

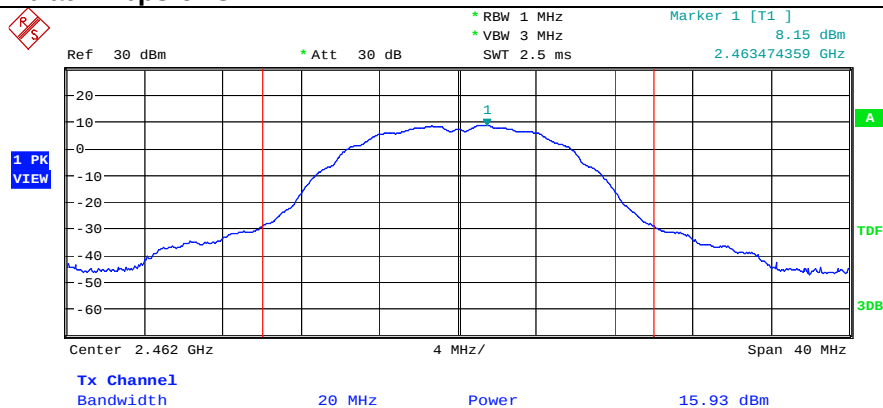


802.11g at 6Mbps of CH1

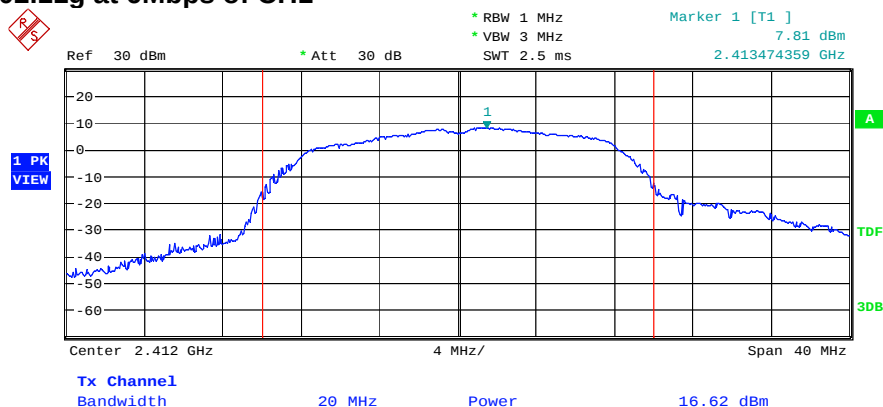


802.11g at 6Mbps of CH6

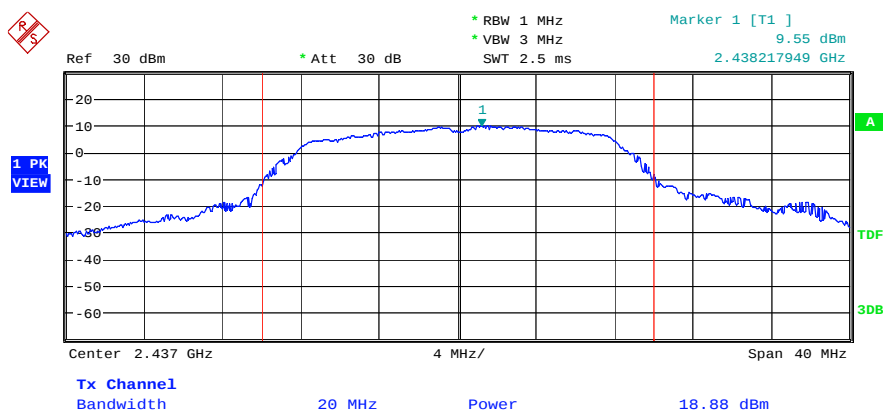


802.11g at 6Mbps of CH11

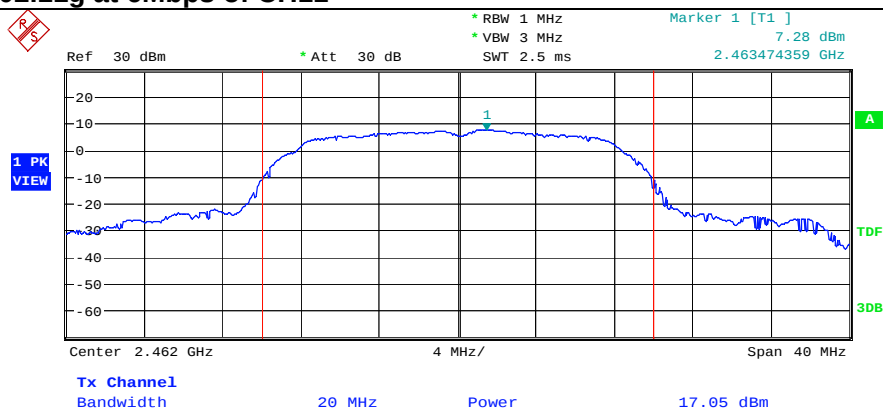


802.11n at HT20 of CH1

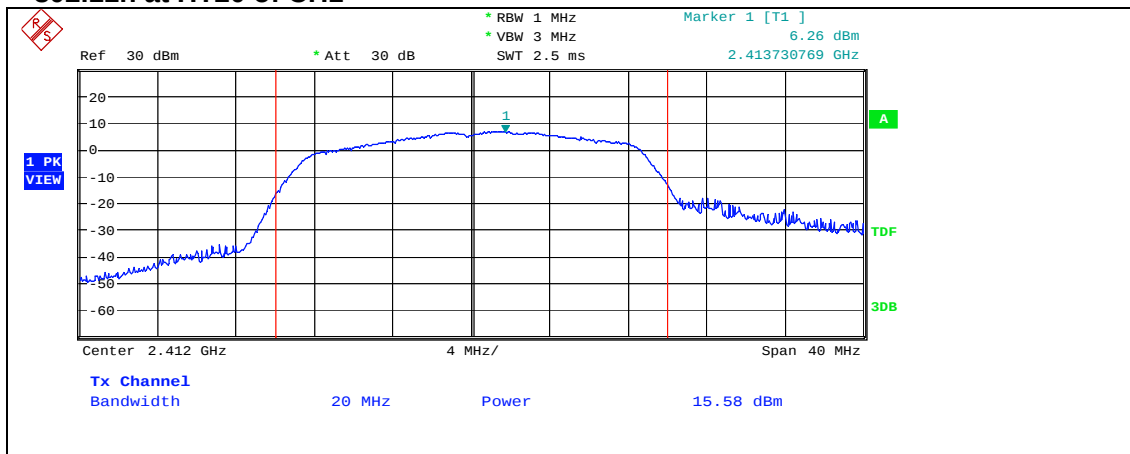


802.11n at HT20 of CH6

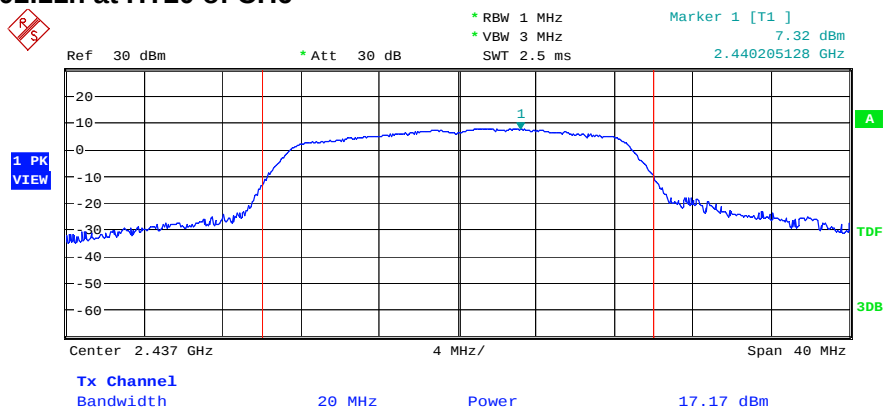


802.11n at HT20 of CH11

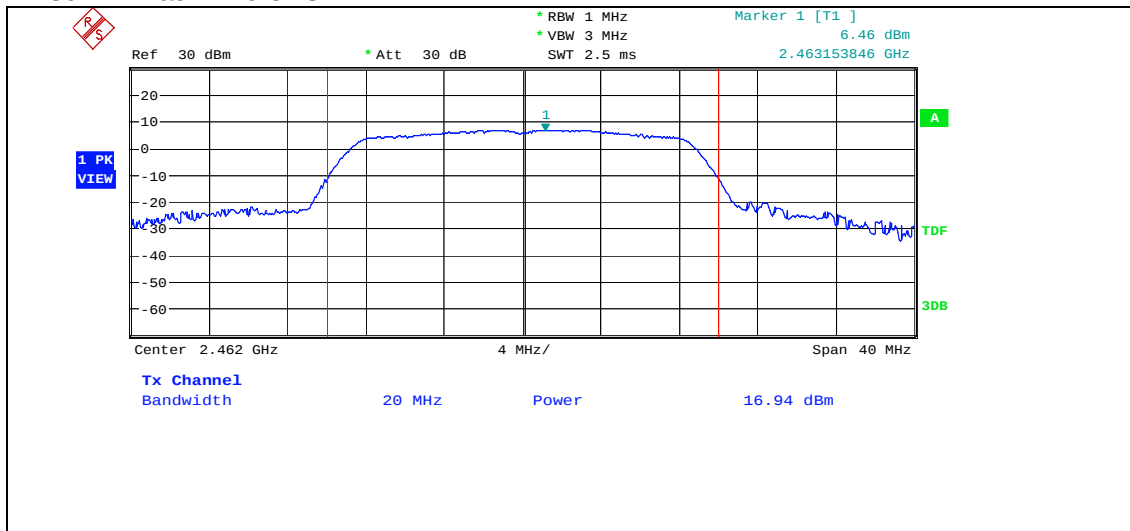


802.11n at HT40 of CH3

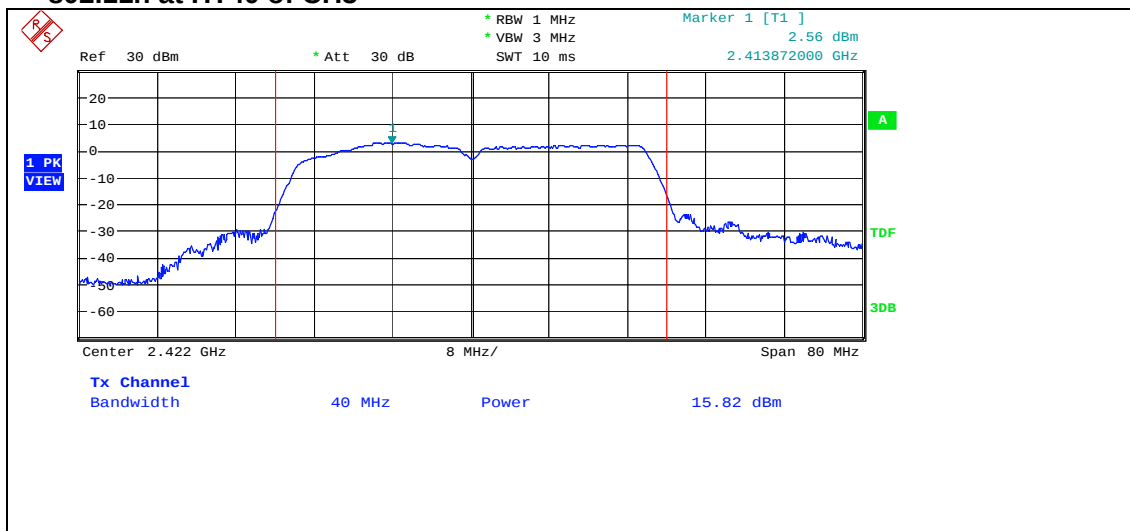

802.11n at HT40 of CH6

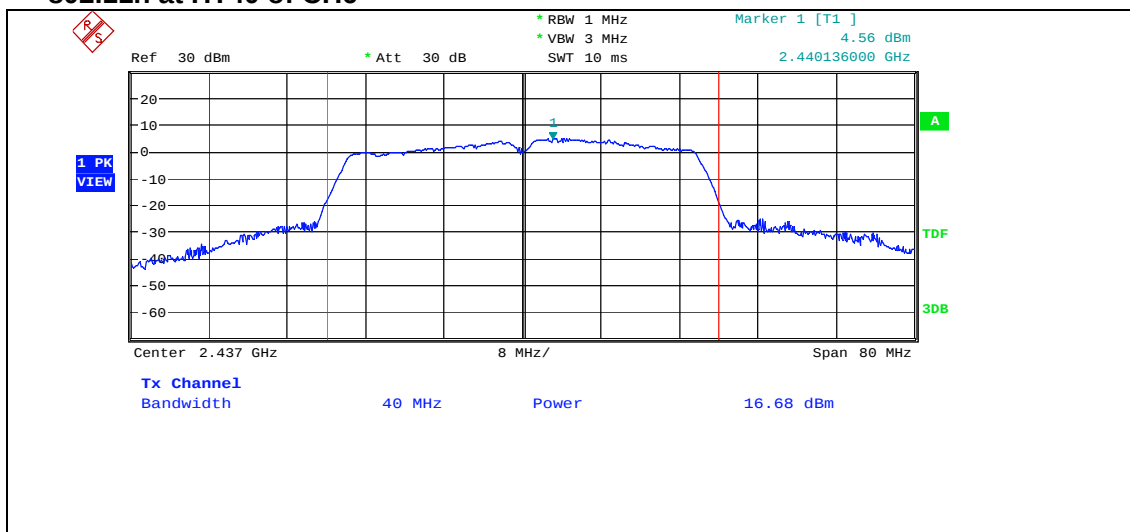


802.11n at HT40 of CH9

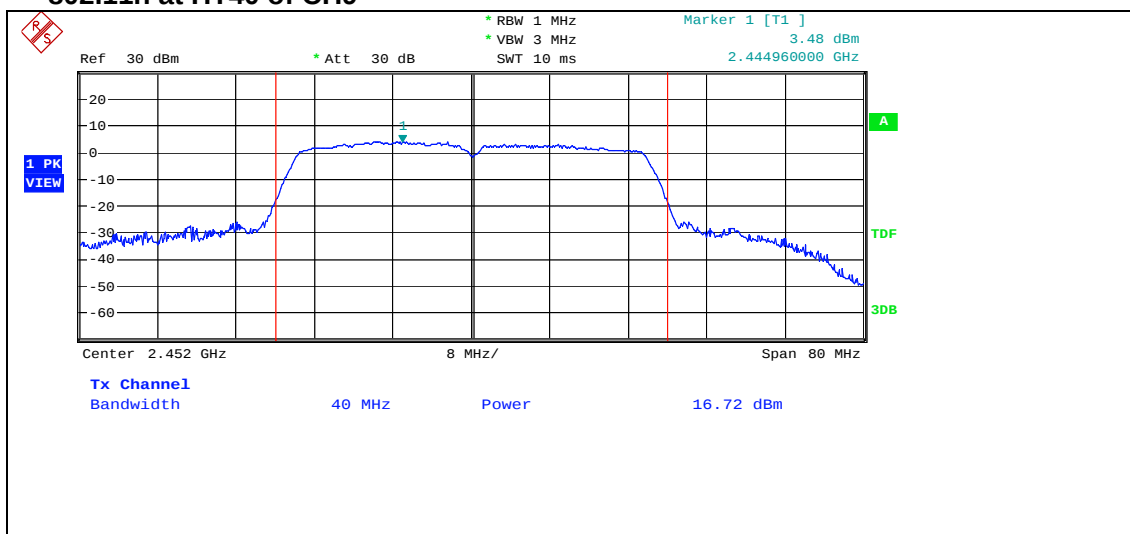

9. POWER SPECTRAL DENSITY MEASUREMENT

9.1 TEST SETUP

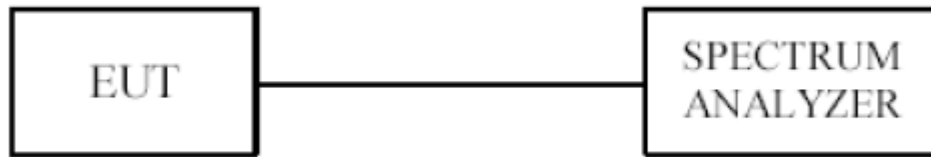

9.2 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 TEST PROCEDURE

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 3 kHz.
3. Set the VBW = 10 kHz.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be ≤ 8 dBm.

9.4 TEST RESULT

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11b		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Final RF Power Level in (dBm)		Maximum Limit (dBm)		Pass/ Fail
1Mbps							
1	2412		-11.88		8		Pass
6	2437		-9.81		8		Pass
11	2462		-11.88		8		Pass


EUT		RTL8710 Module		Model		RTL01	
Mode		802.11g		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Final RF Power Level in (dBm)		Maximum Limit (dBm)		Pass/ Fail
6Mbps							
1	2412		-11.73		8		Pass
6	2437		-10.99		8		Pass
11	2462		-11.63		8		Pass

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n HT20		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)		Final RF Power Level in (dBm)		Maximum Limit (dBm)		Pass/ Fail
6.5Mbps							
1	2412		-12.15		8		Pass
6	2437		-10.34		8		Pass
11	2462		-11.19		8		Pass

EUT		RTL8710 Module		Model		RTL01	
Mode		802.11n HT40		Humidity		56% RH	
Temperature		24 deg. C,					
Channel	Channel Frequency (MHz)	Final RF Power Level in (dBm)		Maximum Limit (dBm)		Pass/ Fail	
13.5Mbps							
3	2422	-15.14		8		Pass	
6	2437	-12.40		8		Pass	
9	2452	-13.02		8		Pass	


Remark: All of the modes have been investigated, and only worst mode is presented in this report.

802.11b at 1Mbps of CH1

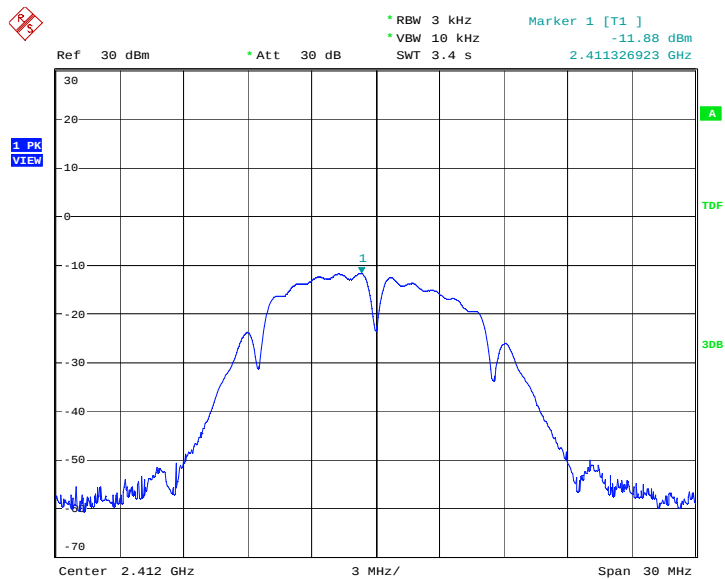


Date: 5.SEP.2016 14:57:07

802.11b at 1Mbps at CH6

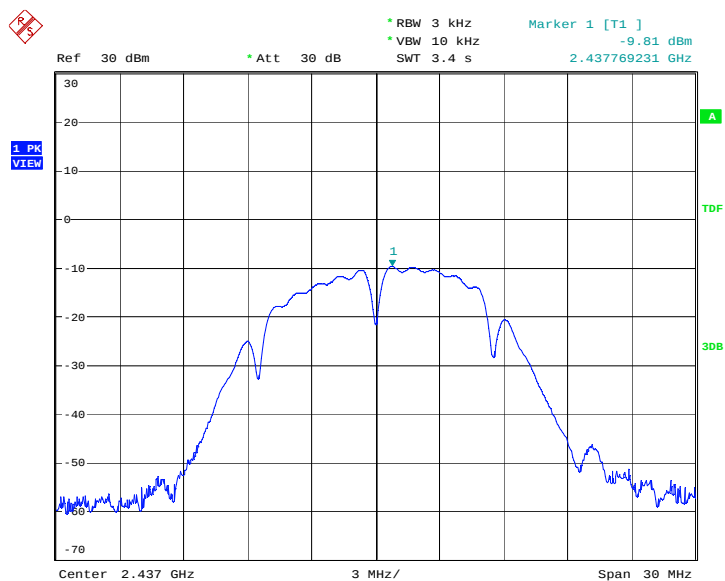


Date: 5.SEP.2016 14:57:28


802.11b at 1Mbps of CH11

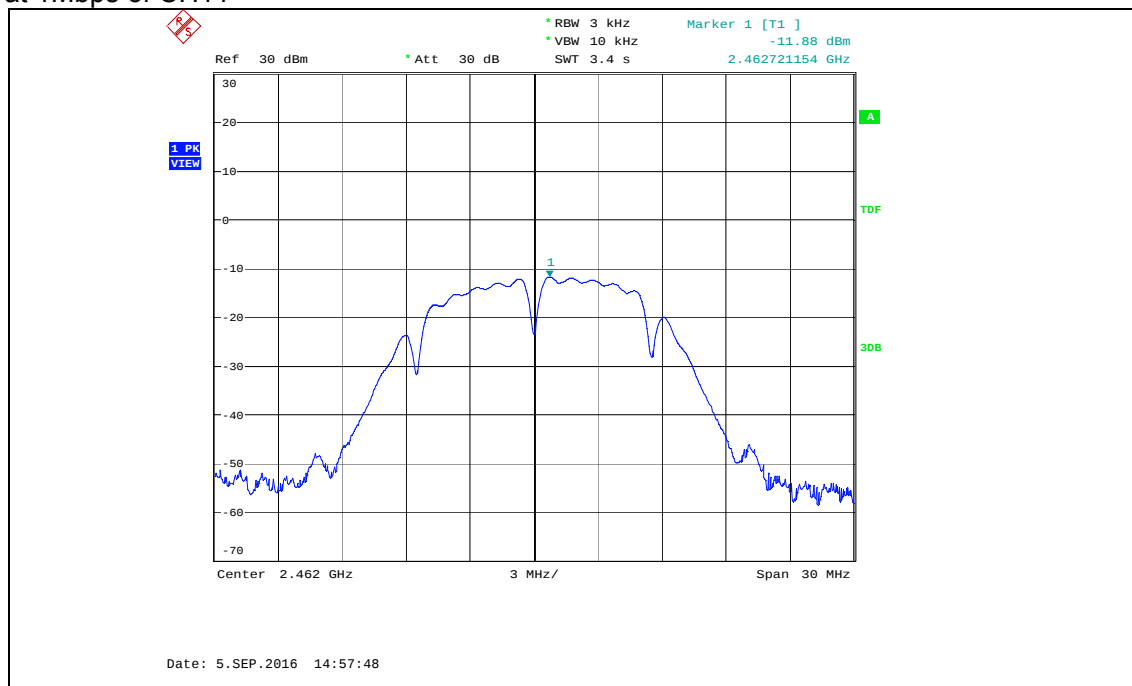

802.11g at 6Mbps of CH1

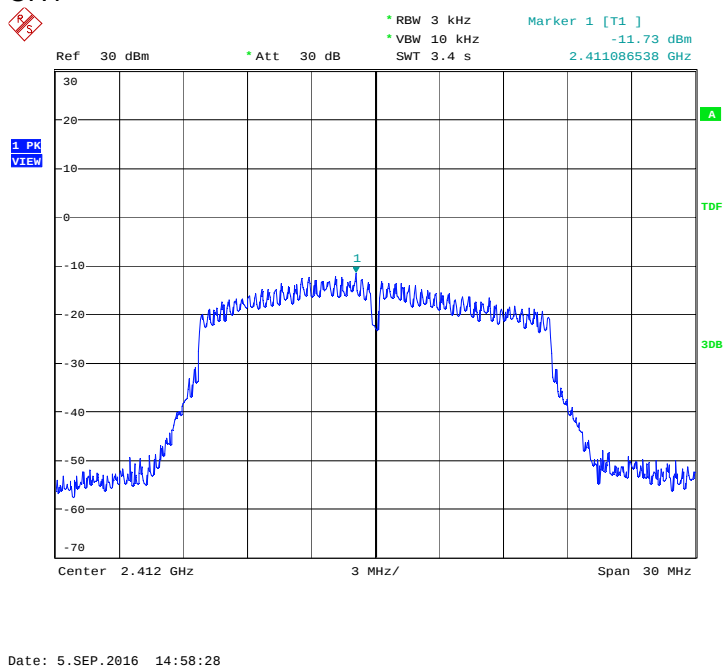


802.11g at 6Mbps of CH6

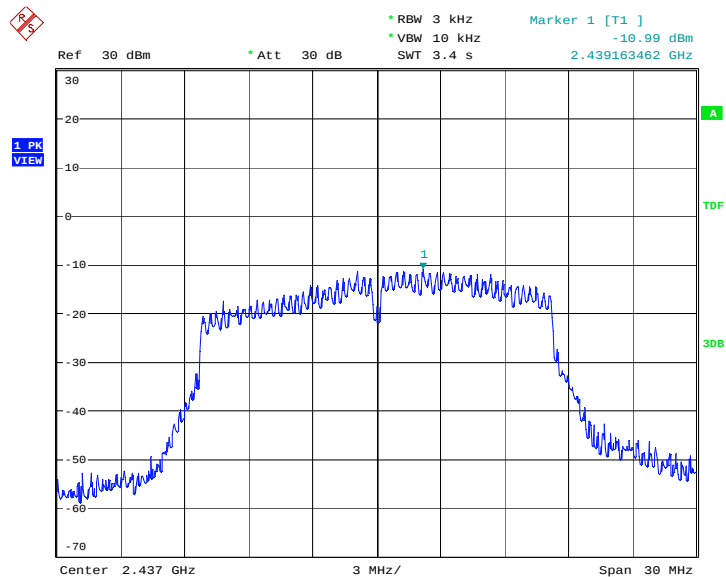


Date: 5.SEP.2016 14:58:45

802.11g at 6Mbps of CH11

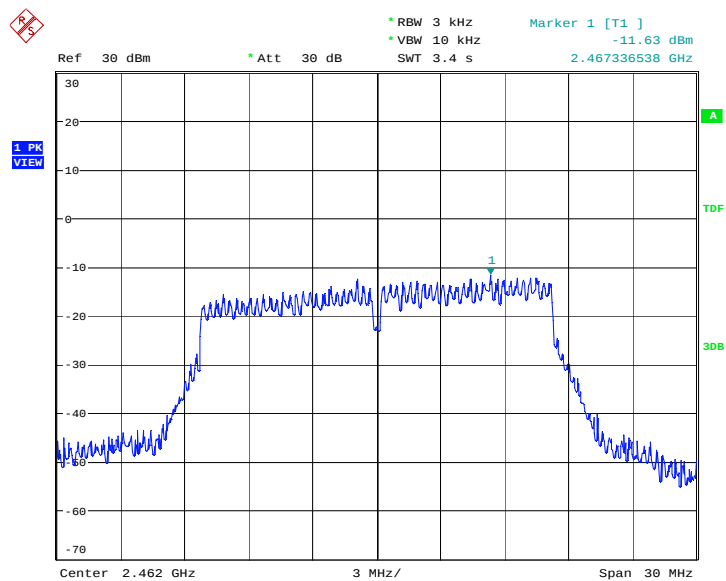


Date: 5.SEP.2016 14:59:05

802.11n HT20 at 6.5Mbps of CH1

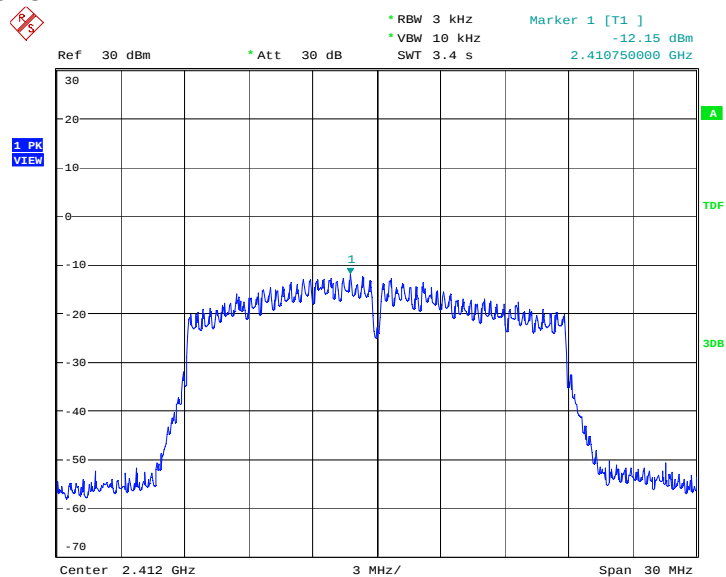


Date: 5.SEP.2016 14:59:30

802.11n HT20 at 6.5Mbps of CH6

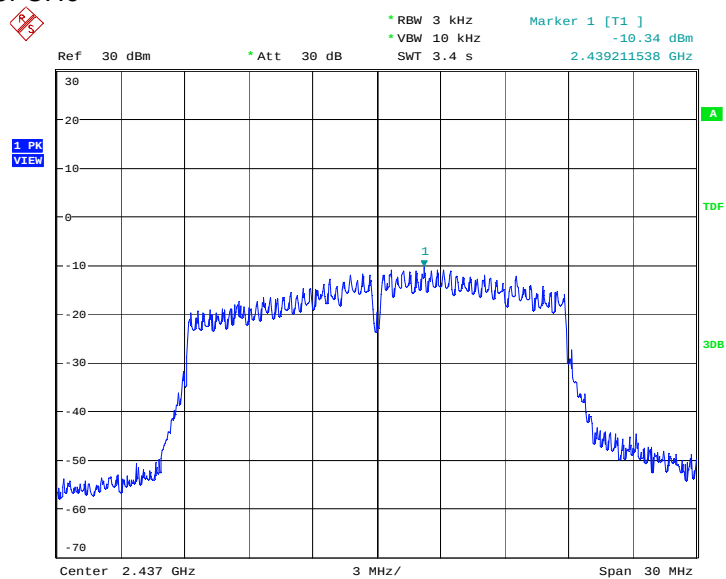


Date: 5.SEP.2016 14:59:46

802.11n HT20 at 6.5Mbps of CH11

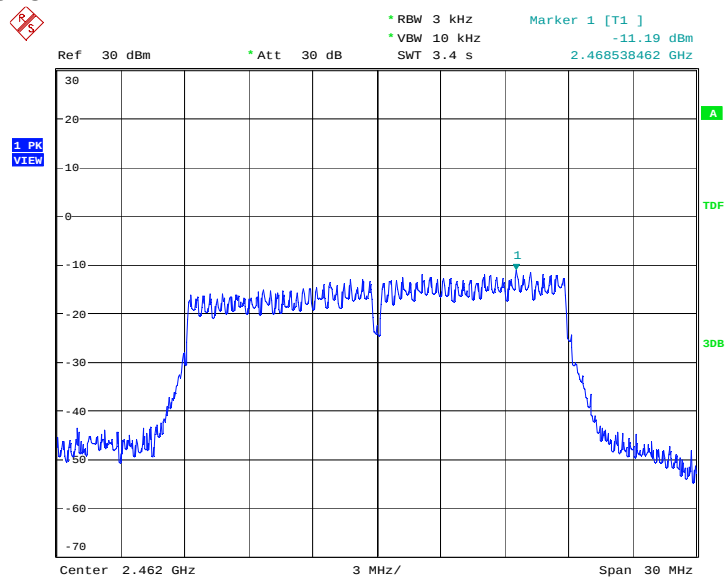


Date: 5.SEP.2016 15:00:04

802.11n HT40 at 13.5Mbps of CH3

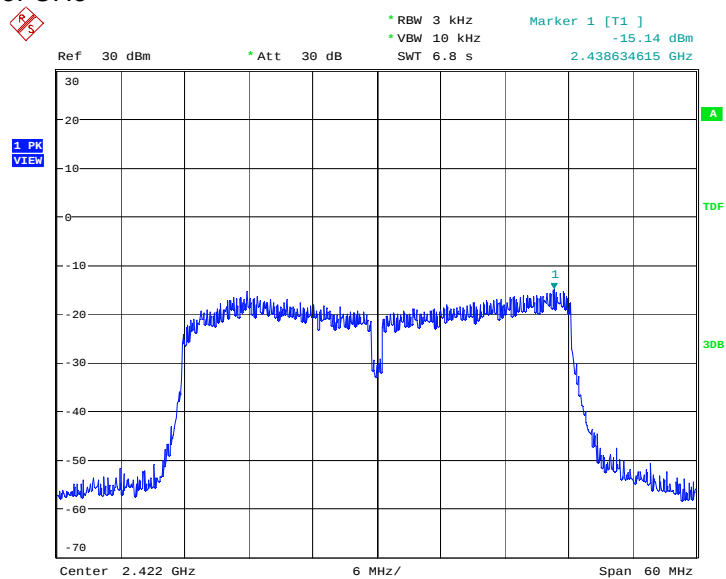


Date: 5.SEP.2016 15:01:03

802.11n HT40 at 13.5Mbps of CH6

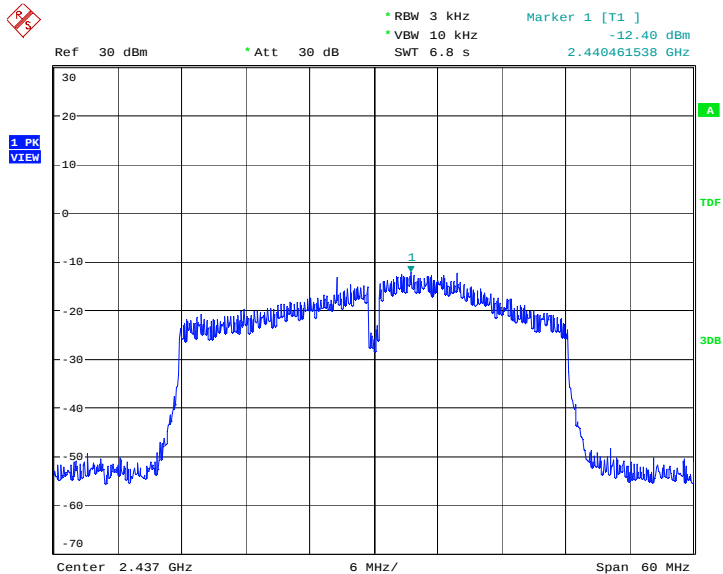

Date: 5.SEP.2016 15:01:26


802.11n HT40 at 13.5Mbps of CH9

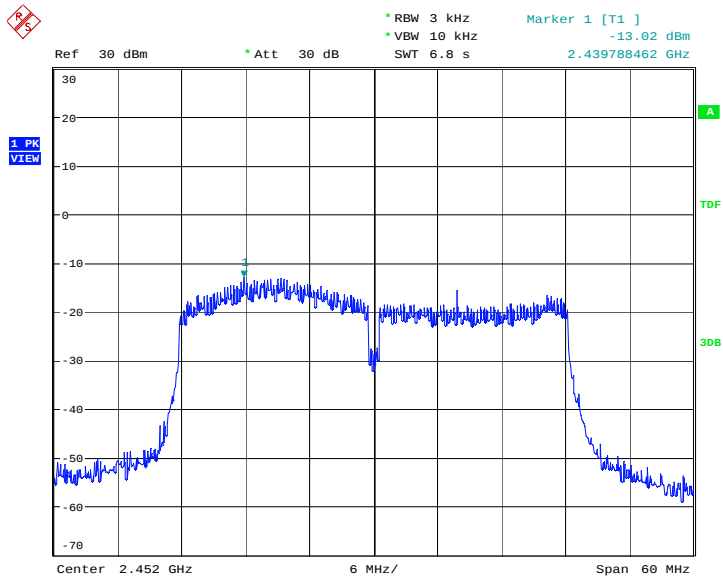

Date: 5.SEP.2016 15:01:54

10. OUT OF BAND MEASUREMENT

10.1 TEST SETUP FOR BAND EDGE

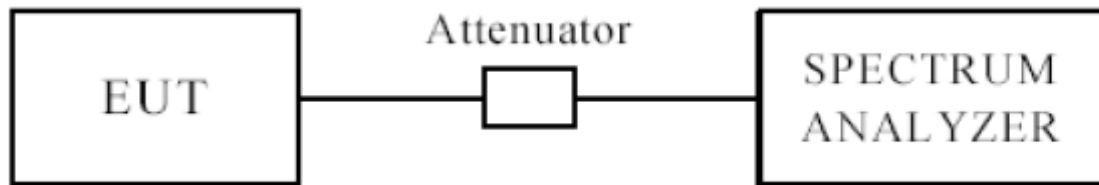

The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 LIMITS OF OUT OF BAND EMISSIONS MEASUREMENT

1. Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 TEST PROCEDURE

For signals in the restricted bands above and below the $2.4\text{--}2.4835\text{GHz}$ allocated band a measurement was made of radiated emission test. (Peak values with $\text{RBW}=\text{VBW}=1\text{MHz}$ and PK detector. AV value with $\text{RBW}=1\text{MHz}$, $\text{VBW}=10\text{Hz}$ and PK detector)

For bandage test, the spectrum set as follows: $\text{RBW}=100\text{ kHz}$, $\text{VBW}=300\text{ kHz}$. A conducted measurement used.

For conducted spurious emission test, the spectrum set as follows: $\text{RBW}=100\text{ kHz}$, $\text{VBW}=300\text{ kHz}$. A conducted measurement used.

10.4 TEST RESULT

Please see next pages

Note: This is a handheld device. The radiated emissions should be tested under 3-axes position (Lying, Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Radiated measurement:

Model: RTL01

802.11b

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	30.00	AV	V	30.3	4.1	33.1	31.30	54	22.70
2390	29.55	AV	H	30.3	4.1	33.1	30.85	54	23.15
2390	40.60	PK	V	30.3	4.1	33.1	41.90	74	32.10
2390	41.49	PK	H	30.3	4.1	33.1	42.79	74	31.21
High Channel (2462MHz)									
2483.5	29.45	AV	V	31	4.4	32.7	32.15	54	21.85
2483.5	31.00	AV	H	31	4.4	32.7	33.70	54	20.30
2483.5	39.83	PK	V	31	4.4	32.7	42.53	74	31.47
2483.5	39.72	PK	H	31	4.4	32.7	42.42	74	31.58

802.11g

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	34.68	AV	V	30.3	4.1	33.1	35.98	54	18.02
2390	33.95	AV	H	30.3	4.1	33.1	35.25	54	18.75
2390	49.47	PK	V	30.3	4.1	33.1	50.77	74	23.23
2390	49.38	PK	H	30.3	4.1	33.1	50.68	74	23.32
High Channel (2462MHz)									
2483.5	30.55	AV	V	31	4.4	32.7	33.25	54	20.75
2483.5	31.10	AV	H	31	4.4	32.7	33.80	54	20.20
2483.5	40.18	PK	V	31	4.4	32.7	42.88	74	31.12
2483.5	41.80	PK	H	31	4.4	32.7	44.50	74	29.50

Note: The BAND EDGE RESTRICTED BANDS emission is too low at least 20dB to the Fundamental.

802.11n HT20

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	38.12	AV	V	30.3	4.1	33.1	39.42	54	14.58
2390	37.61	AV	H	30.3	4.1	33.1	38.91	54	15.09
2390	52.71	PK	V	30.3	4.1	33.1	54.01	74	19.99
2390	54.70	PK	H	30.3	4.1	33.1	56.00	74	18.00
High Channel (2462MHz)									
2483.5	33.43	AV	V	31	4.4	32.7	36.13	54	17.87
2483.5	32.25	AV	H	31	4.4	32.7	34.95	54	19.05
2483.5	46.08	PK	V	31	4.4	32.7	48.78	74	25.22
2483.5	47.00	PK	H	31	4.4	32.7	49.70	74	24.30

802.11n HT40

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2422MHz)									
2390	33.28	AV	V	30.3	4.1	33.1	34.58	54	19.42
2390	33.29	AV	H	30.3	4.1	33.1	34.59	54	19.41
2390	51.40	PK	V	30.3	4.1	33.1	52.70	74	21.30
2390	49.91	PK	H	30.3	4.1	33.1	51.21	74	22.79
High Channel (2452MHz)									
2483.5	31.86	AV	V	31	4.4	32.7	34.56	54	19.44
2483.5	31.38	AV	H	31	4.4	32.7	34.08	54	19.92
2483.5	39.90	PK	V	31	4.4	32.7	42.60	74	31.40
2483.5	39.92	PK	H	31	4.4	32.7	42.62	74	31.38

Note: The BAND EDGE RESTRICTED BANDS emission is too low at least 20dB to the Fundamental.

Model: RTL00

802.11b

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	29.60	AV	V	30.3	4.1	33.1	30.90	54	23.10
2390	29.36	AV	H	30.3	4.1	33.1	30.66	54	23.34
2390	41.05	PK	V	30.3	4.1	33.1	42.35	74	31.65
2390	41.65	PK	H	30.3	4.1	33.1	42.95	74	31.05
High Channel (2462MHz)									
2483.5	30.42	AV	V	31	4.4	32.7	33.12	54	20.88
2483.5	31.26	AV	H	31	4.4	32.7	33.96	54	20.04
2483.5	40.90	PK	V	31	4.4	32.7	43.60	74	30.40
2483.5	41.30	PK	H	31	4.4	32.7	44.00	74	30.00

802.11g

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	29.96	AV	V	30.3	4.1	33.1	31.26	54	22.74
2390	30.57	AV	H	30.3	4.1	33.1	31.87	54	22.13
2390	41.04	PK	V	30.3	4.1	33.1	42.34	74	31.66
2390	39.91	PK	H	30.3	4.1	33.1	41.21	74	32.79
High Channel (2462MHz)									
2483.5	31.69	AV	V	31	4.4	32.7	34.39	54	19.61
2483.5	31.84	AV	H	31	4.4	32.7	34.54	54	19.46
2483.5	40.90	PK	V	31	4.4	32.7	43.60	74	30.40
2483.5	39.73	PK	H	31	4.4	32.7	42.43	74	31.57

Note: The BAND EDGE RESTRICTED BANDS emission is too low at least 20dB to the Fundamental.

802.11n HT20

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)									
2390	33.71	AV	V	30.3	4.1	33.1	35.01	54	18.99
2390	33.51	AV	H	30.3	4.1	33.1	34.81	54	19.19
2390	49.37	PK	V	30.3	4.1	33.1	50.67	74	23.33
2390	49.87	PK	H	30.3	4.1	33.1	51.17	74	22.83
High Channel (2462MHz)									
2483.5	29.73	AV	V	31	4.4	32.7	32.43	54	21.57
2483.5	30.51	AV	H	31	4.4	32.7	33.21	54	20.79
2483.5	41.85	PK	V	31	4.4	32.7	44.55	74	29.45
2483.5	42.13	PK	H	31	4.4	32.7	44.83	74	29.17



802.11n HT40

Indicated		result (PK/AV)	Antenna Polar (H/V)	Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2422MHz)									
2390	38.22	AV	V	30.3	4.1	33.1	39.52	54	14.48
2390	36.72	AV	H	30.3	4.1	33.1	38.02	54	15.98
2390	53.41	PK	V	30.3	4.1	33.1	54.71	74	19.29
2390	54.75	PK	H	30.3	4.1	33.1	56.05	74	17.95
High Channel (2452MHz)									
2483.5	32.02	AV	V	31	4.4	32.7	34.72	54	19.28
2483.5	33.52	AV	H	31	4.4	32.7	36.22	54	17.78
2483.5	47.07	PK	V	31	4.4	32.7	49.77	74	24.23
2483.5	47.10	PK	H	31	4.4	32.7	49.80	74	24.20



Note: The BAND EDGE RESTRICTED BANDS emission is too low at least 20dB to the Fundamental.

Conducted measurement:

802.11b:

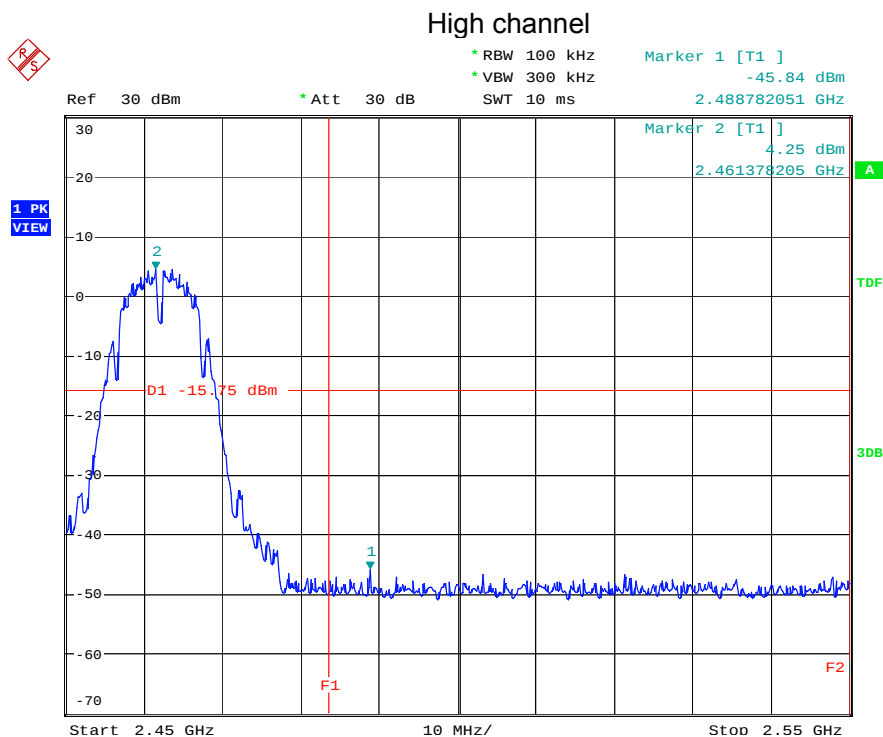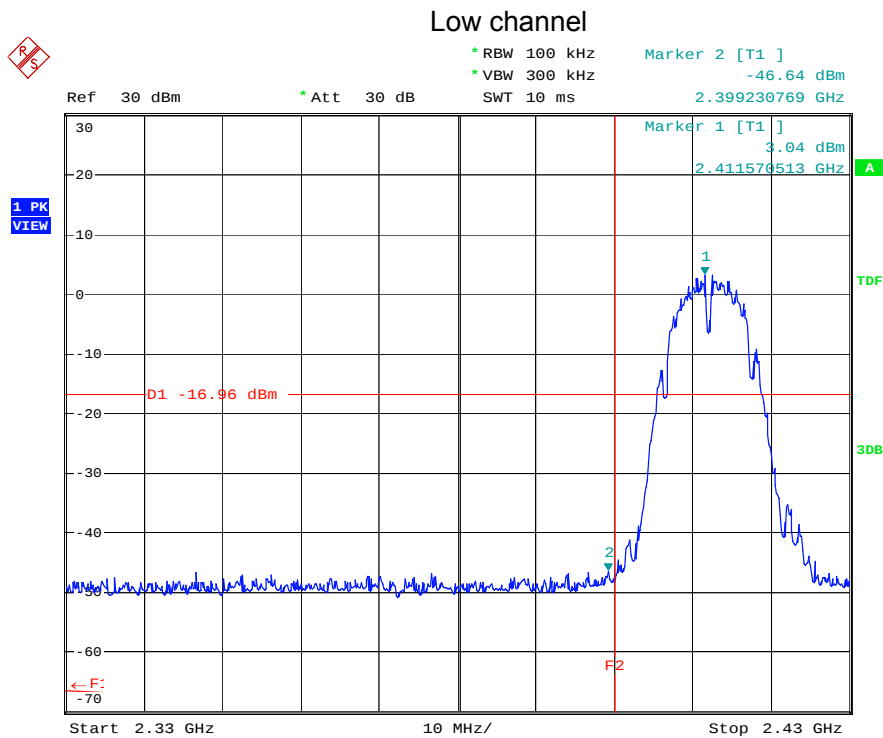


802.11g:

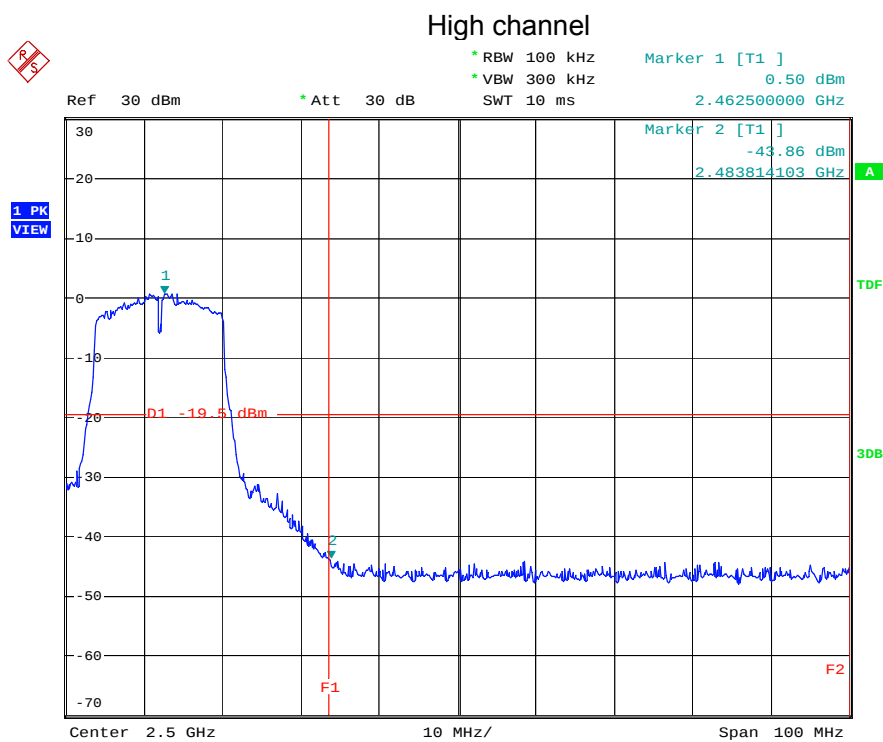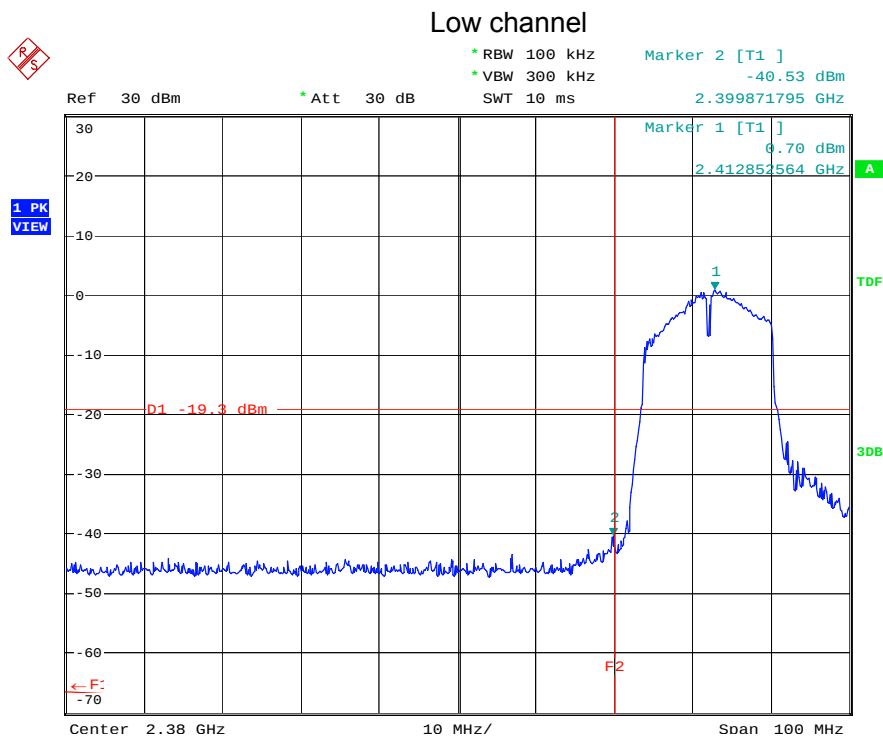


802.11n HT20:

Low channel

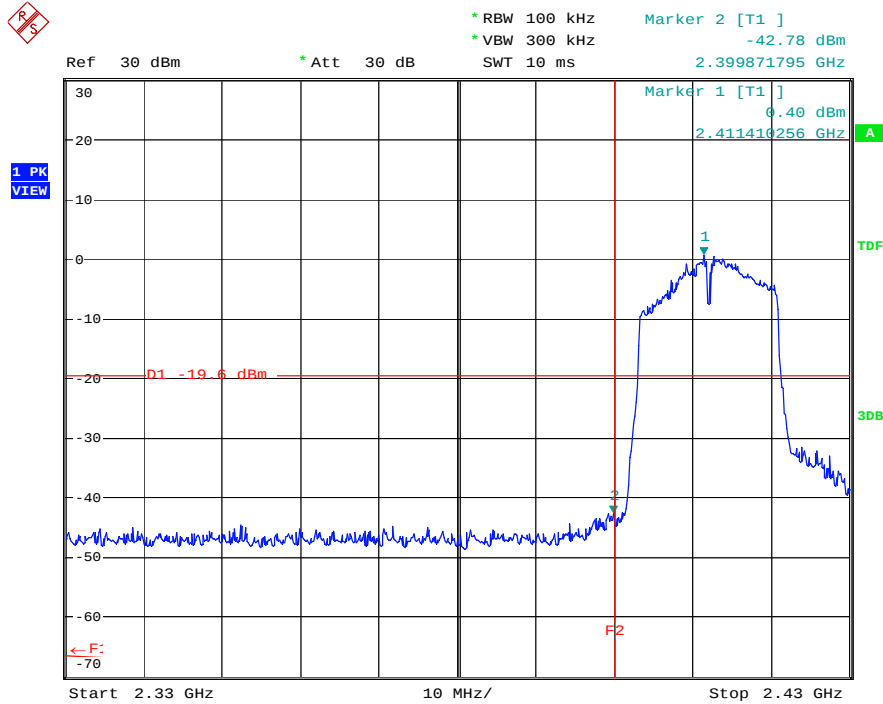


High channel

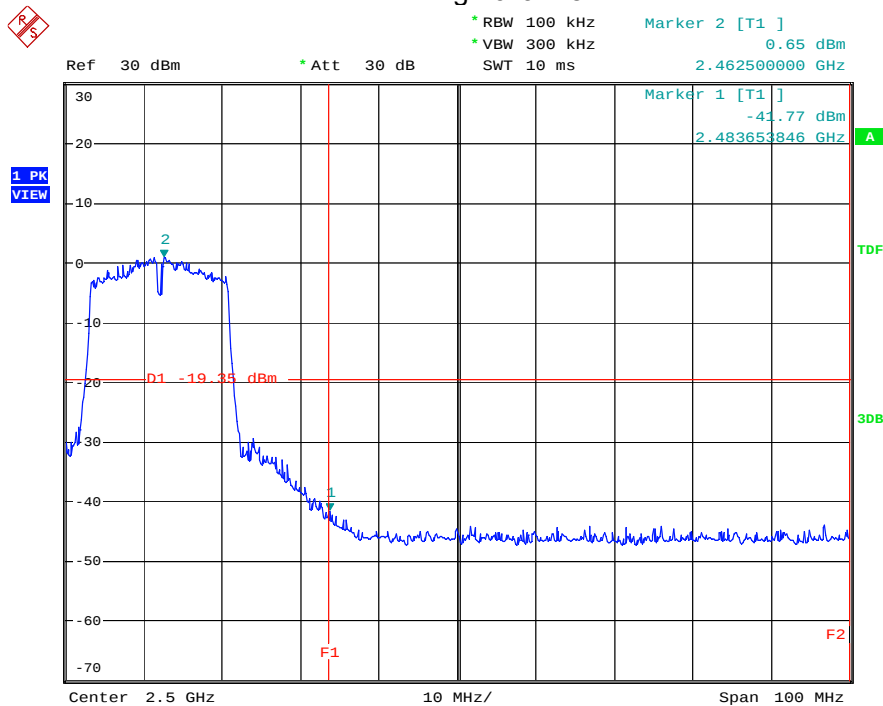


802.11n HT40:

Low channel


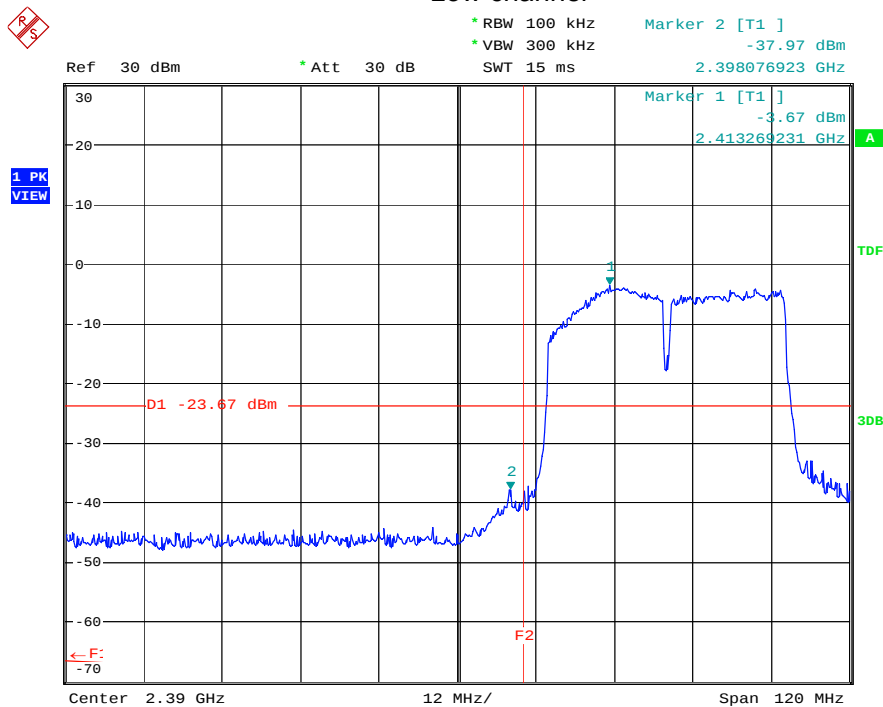


High channel

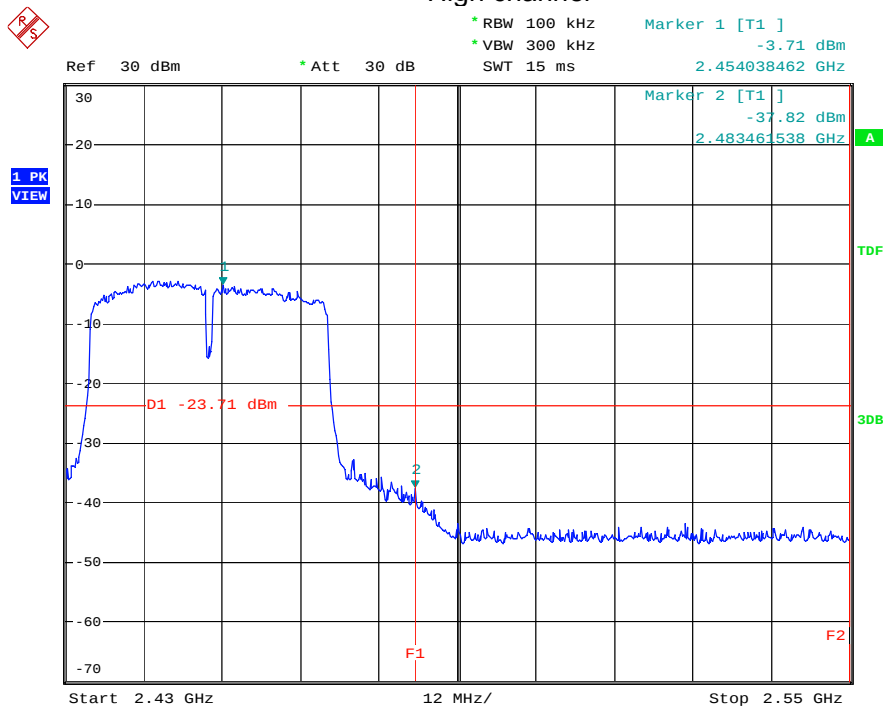


Conducted spurious emissions

802.11b:

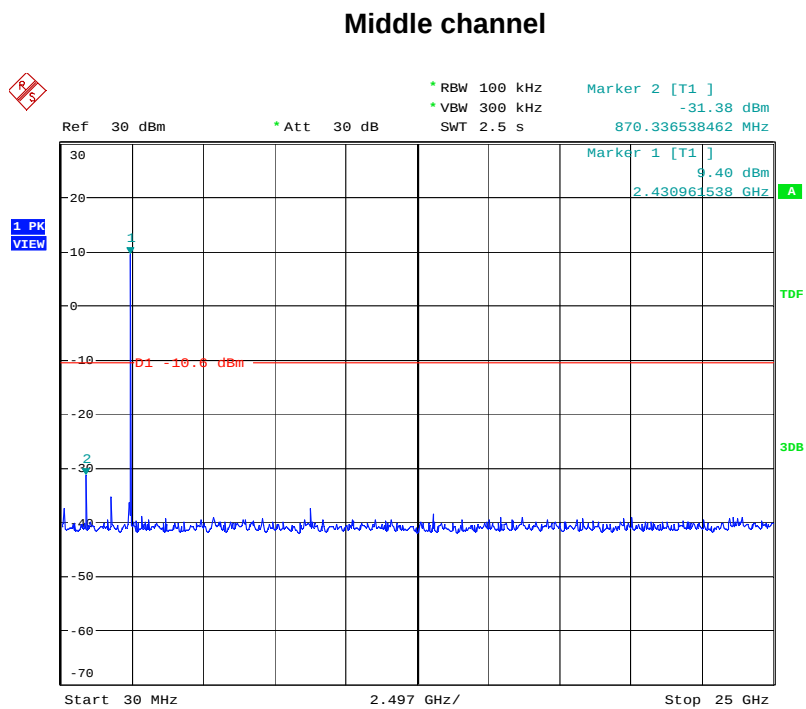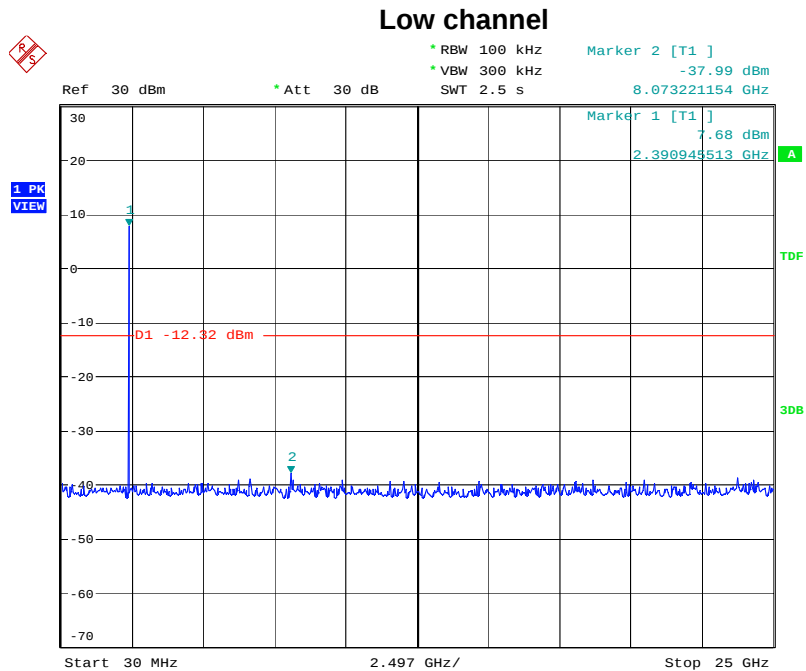

Date: 5.SEP.2016 15:07:25


High channel

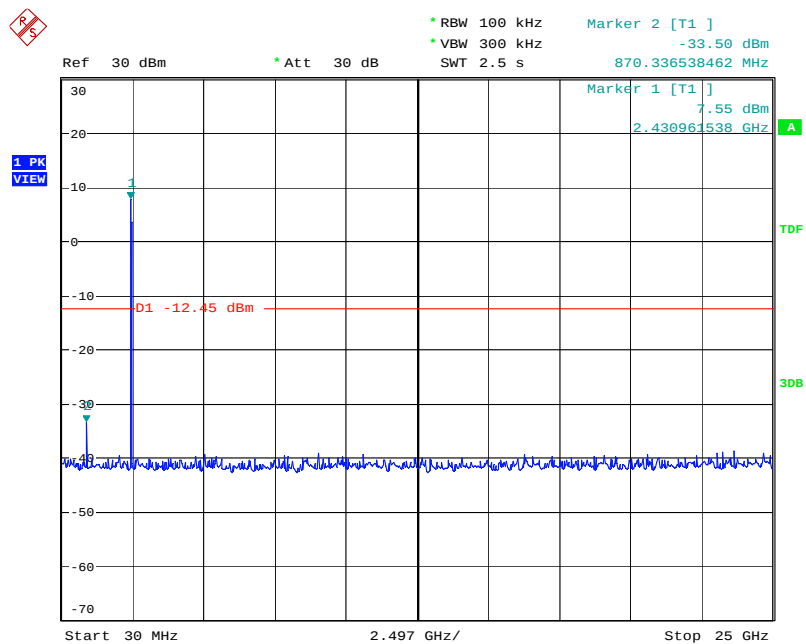


Date: 5.SEP.2016 15:08:22

802.11g:

Low channel

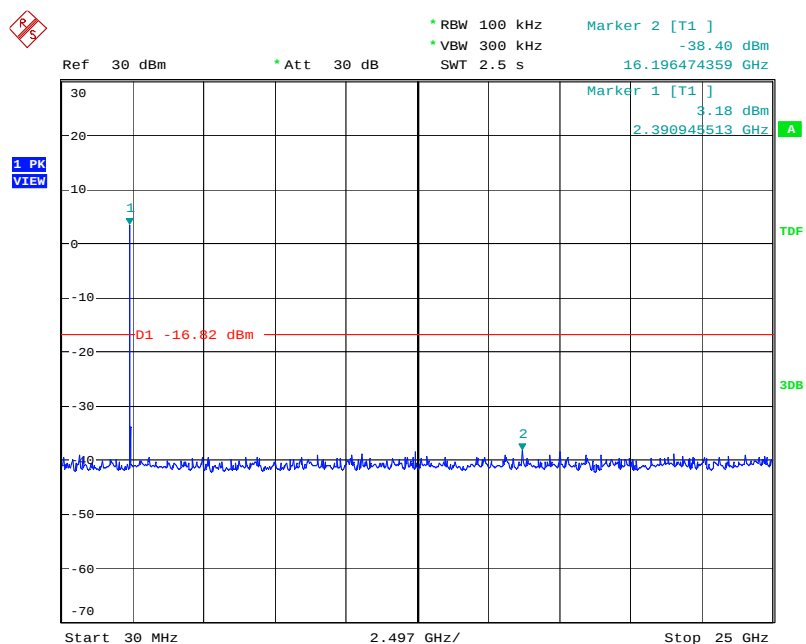


Middle channel

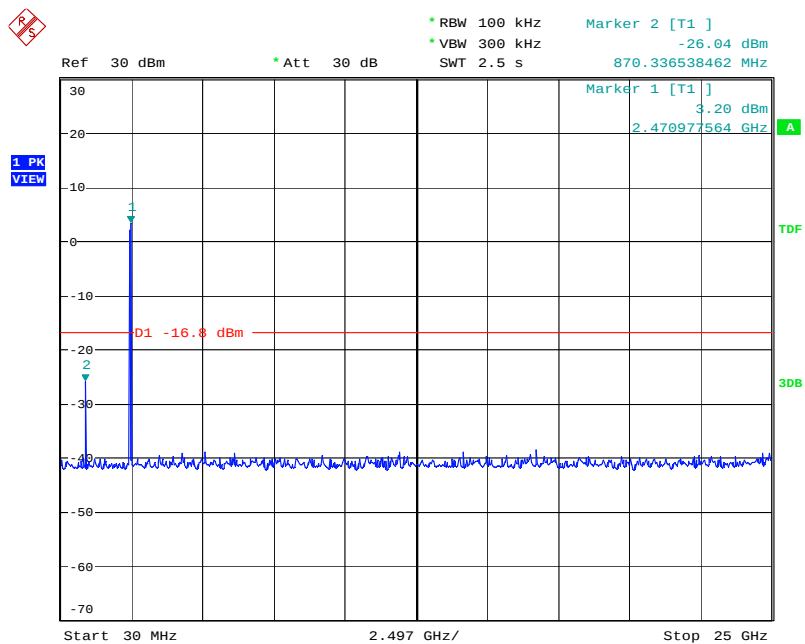

Date: 5.SEP.2016 15:11:07


High channel

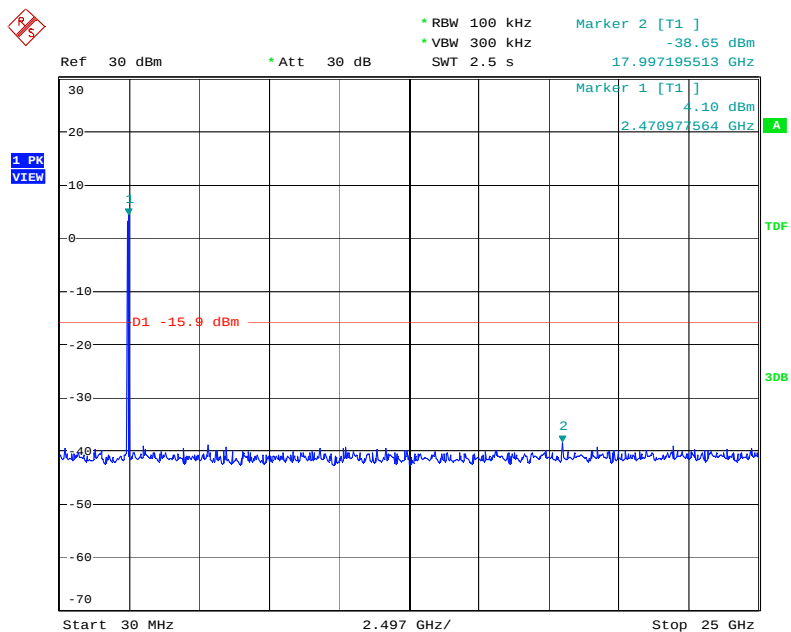

Date: 5.SEP.2016 15:16:05


802.11n HT20:

Low channel

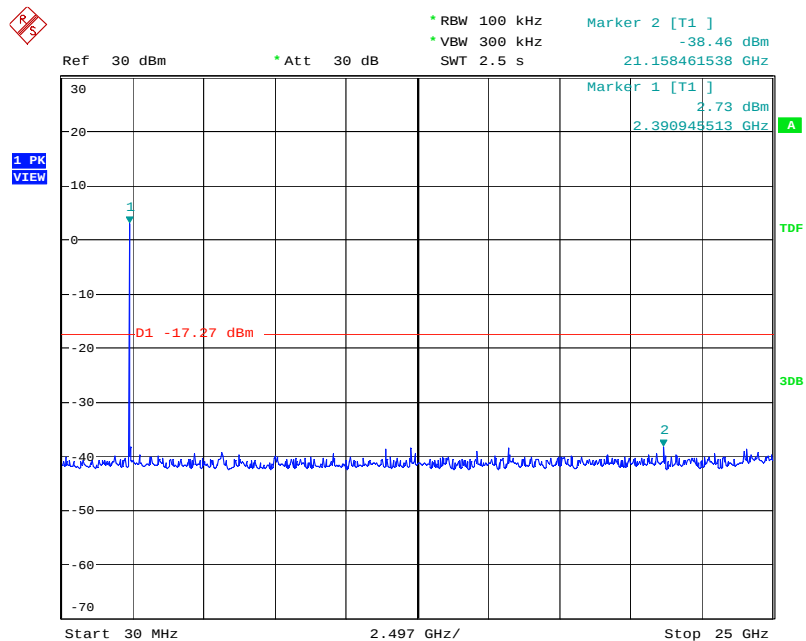


Date: 5.SEP.2016 15:14:59

Middle channel

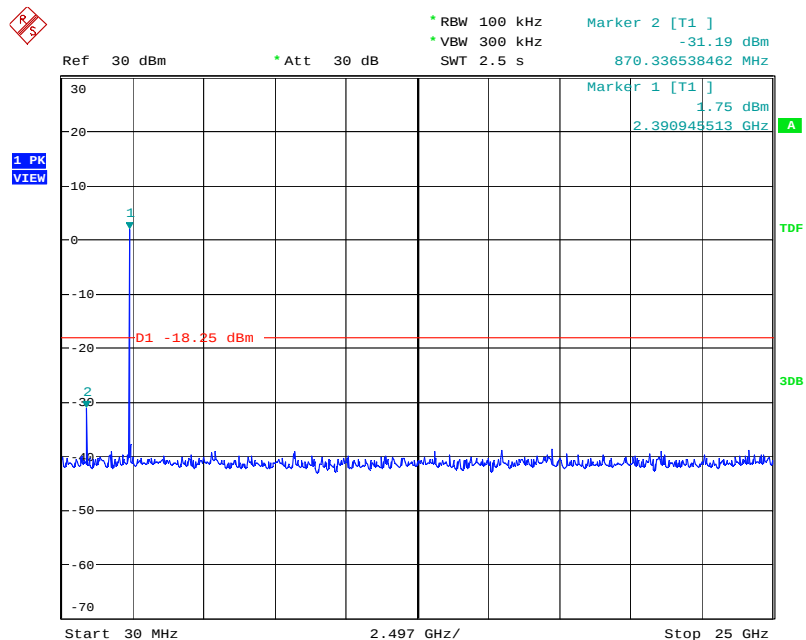

Date: 5.SEP.2016 15:16:55


High channel

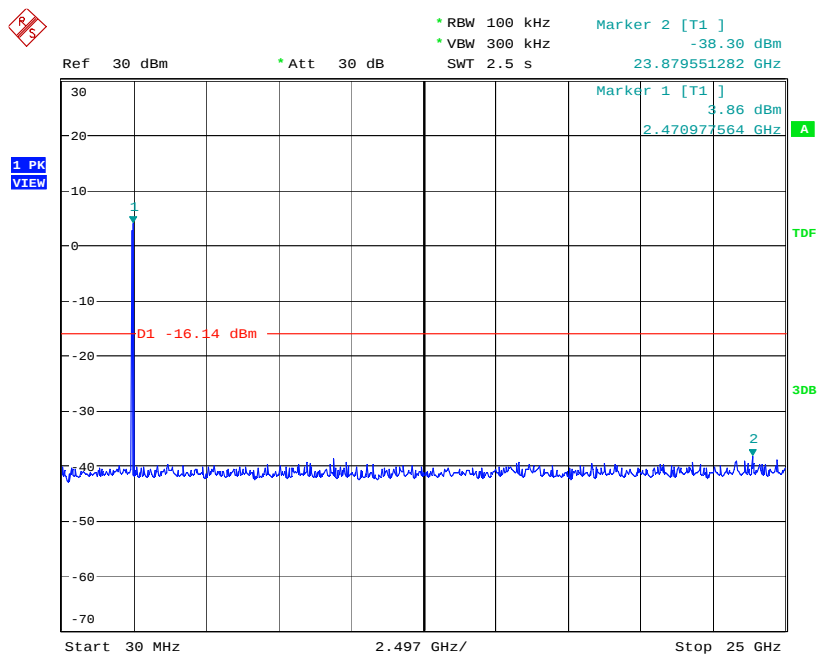

Date: 5.SEP.2016 15:18:09


802.11n HT40:

Low channel

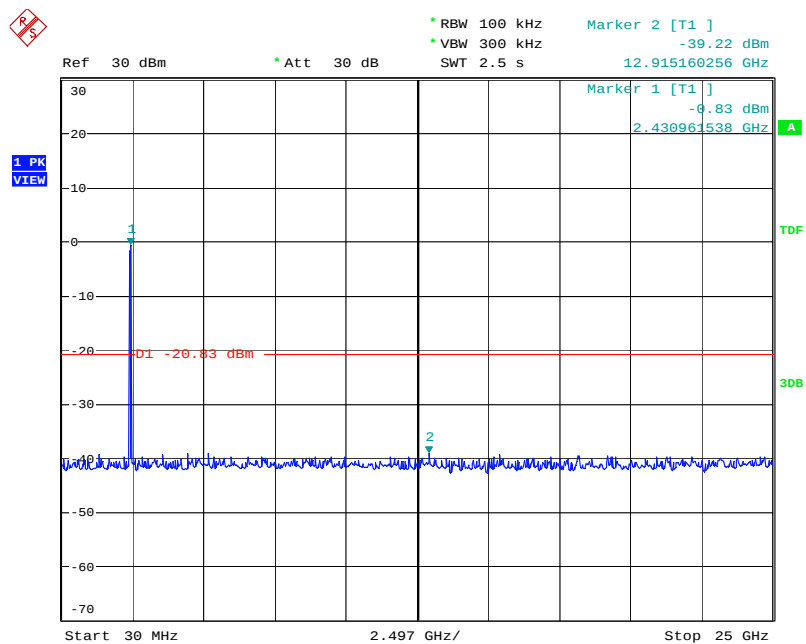


Date: 5.SEP.2016 15:19:31


Middle channel

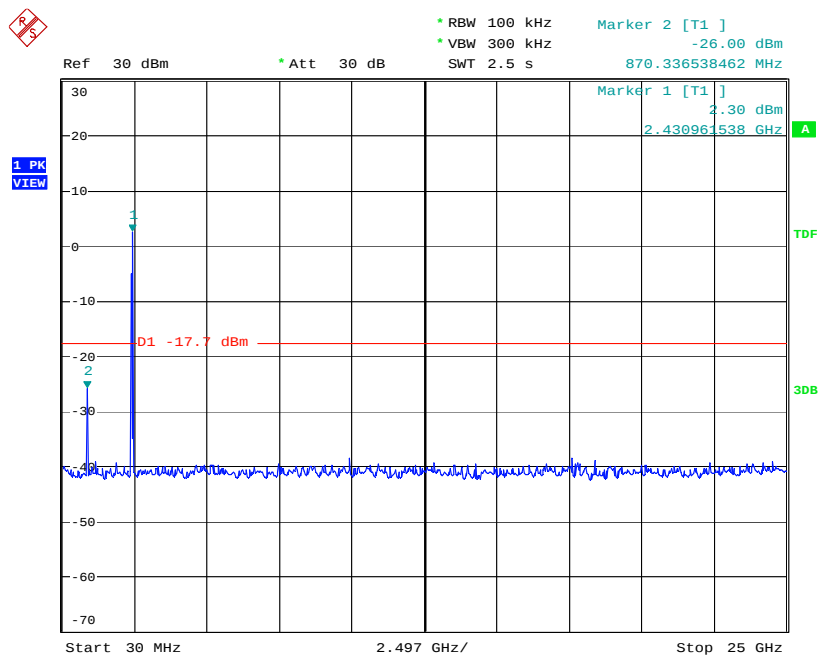


High channel

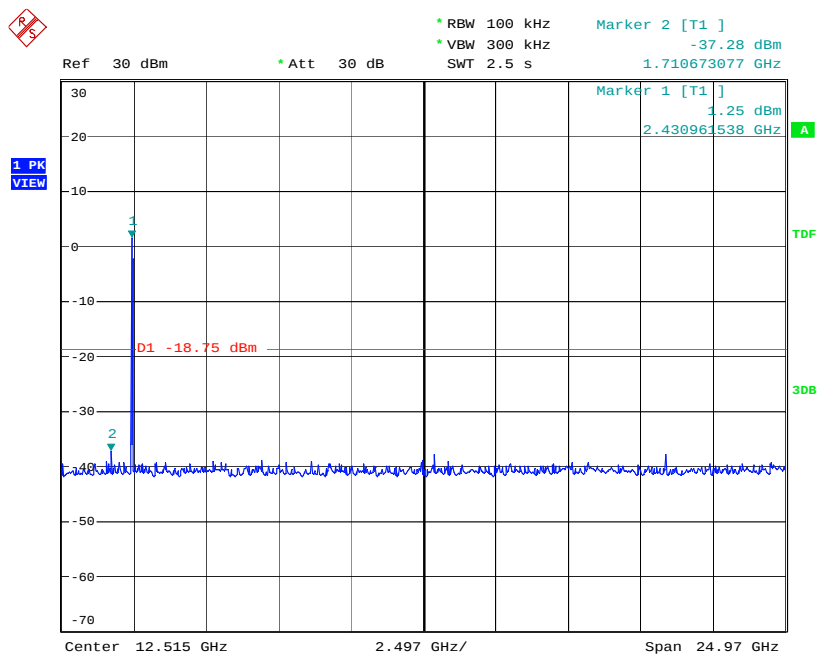

Date: 5.SEP.2016 15:21:28

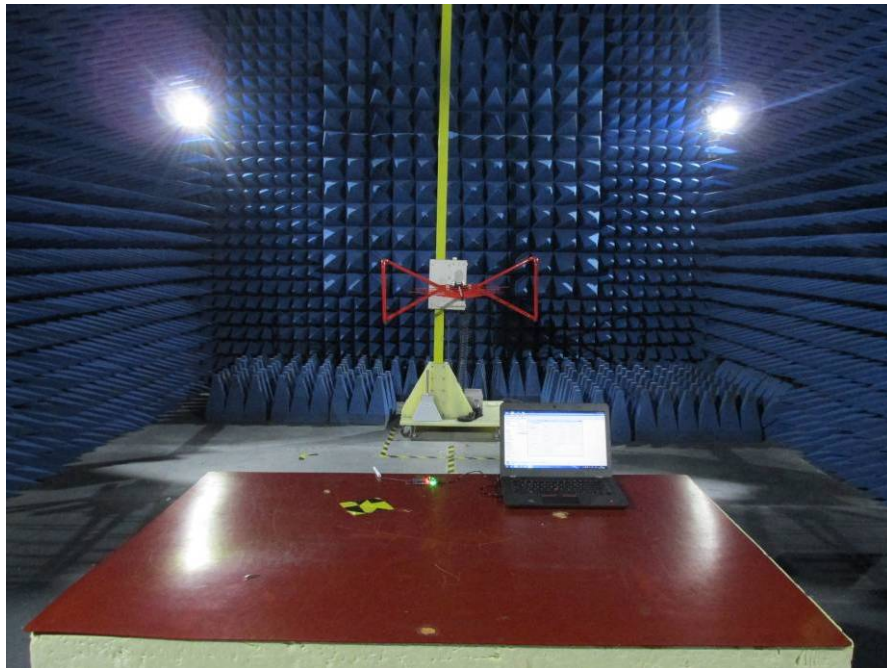
11. EUT TEST PHOTO**RADIATED EMISSION TEST**

RADIATED EMISSION TEST

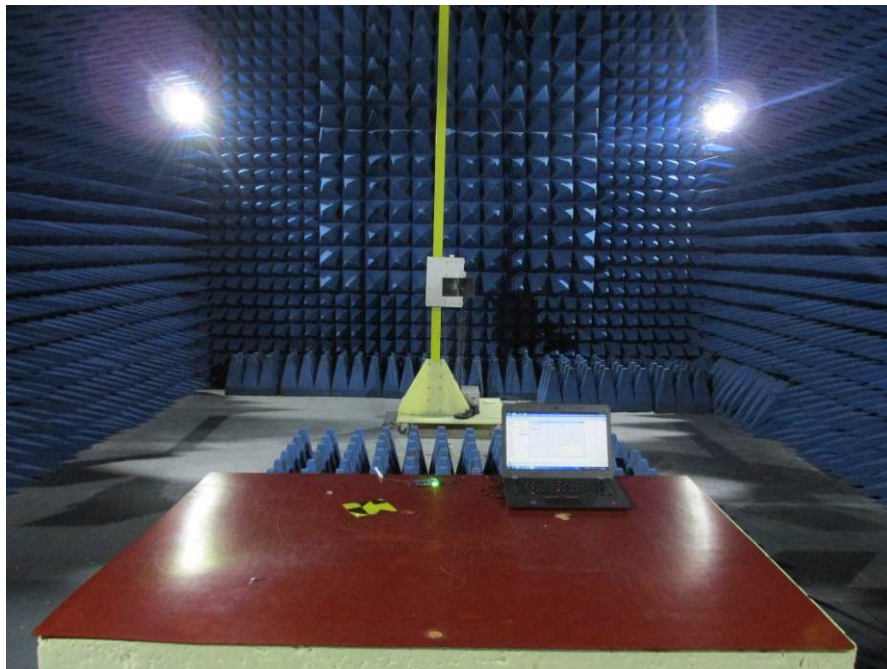


13. PHOTOGRAPHS OF EUT

Appearance photograph of EUT

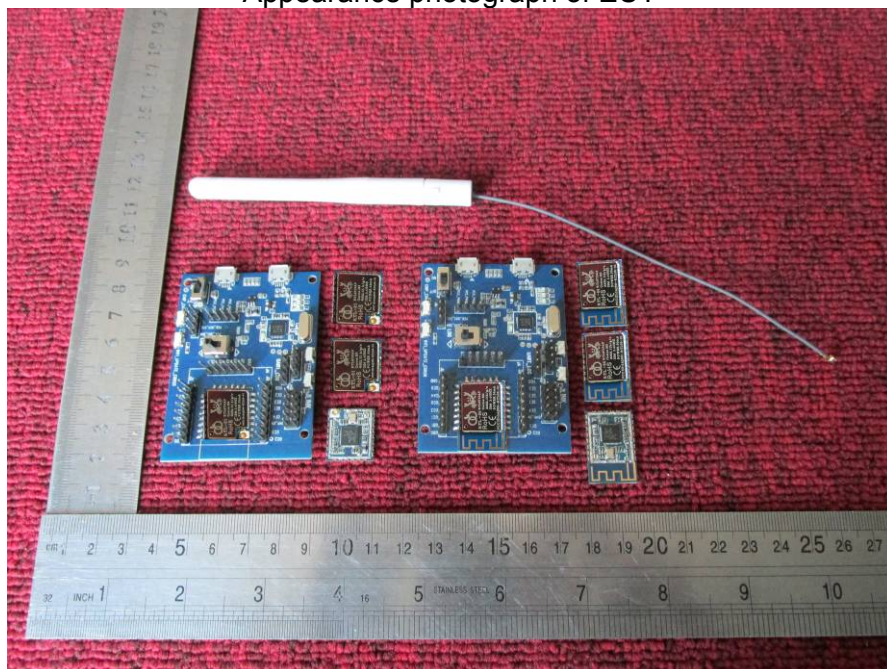


RTL00


Appearance photograph of EUT

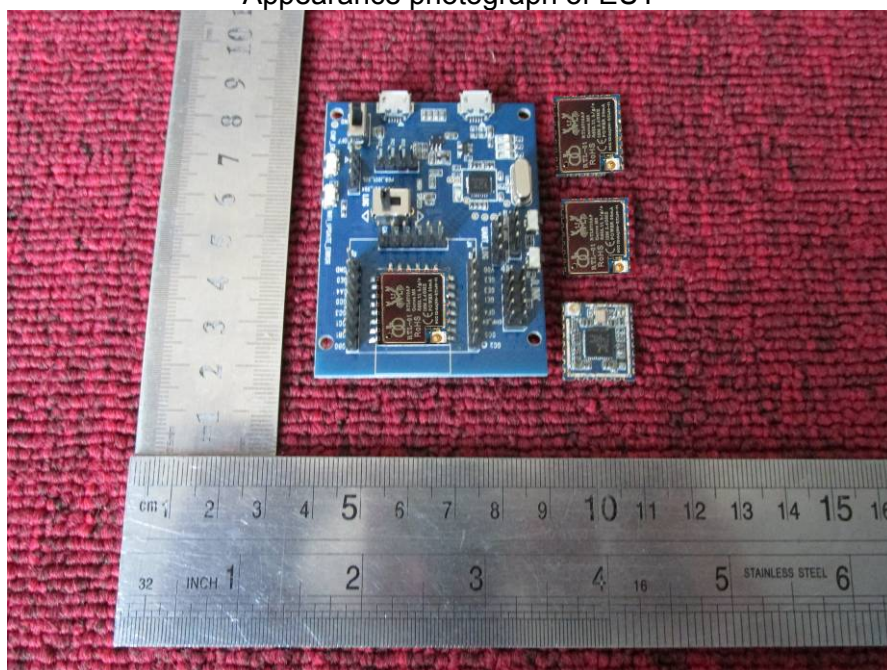


Appearance photograph of EUT

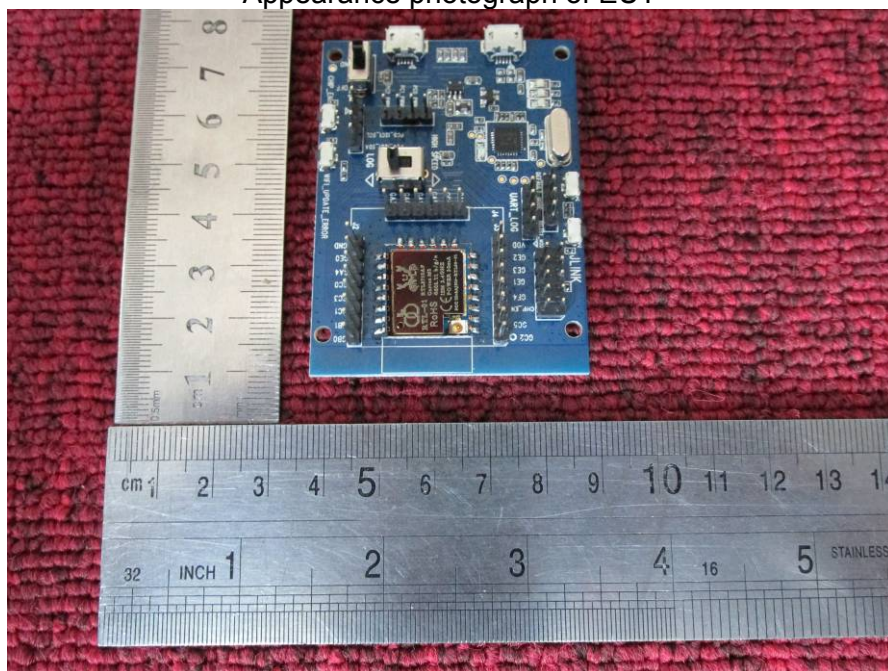

Appearance photograph of EUT

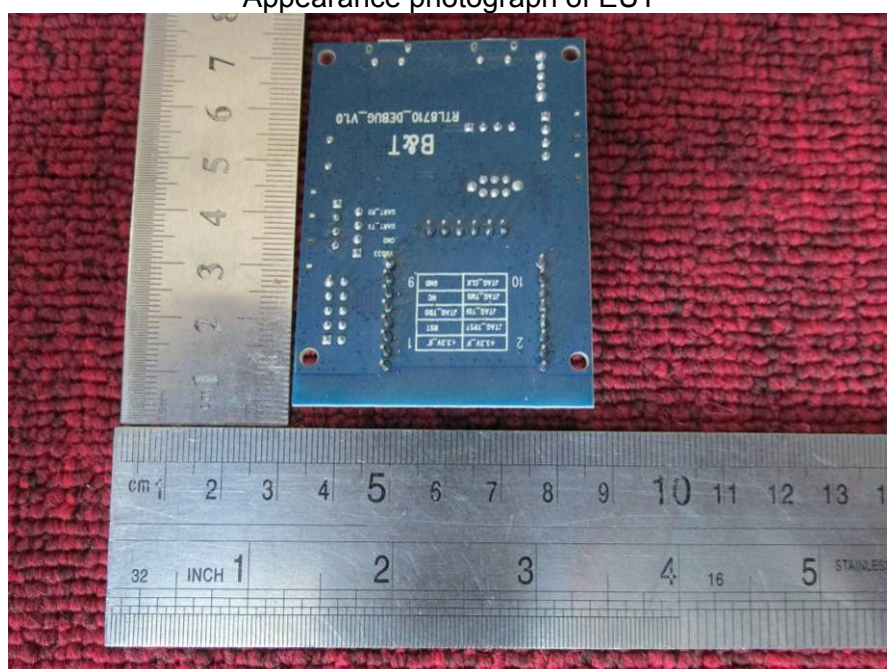


Appearance photograph of EUT

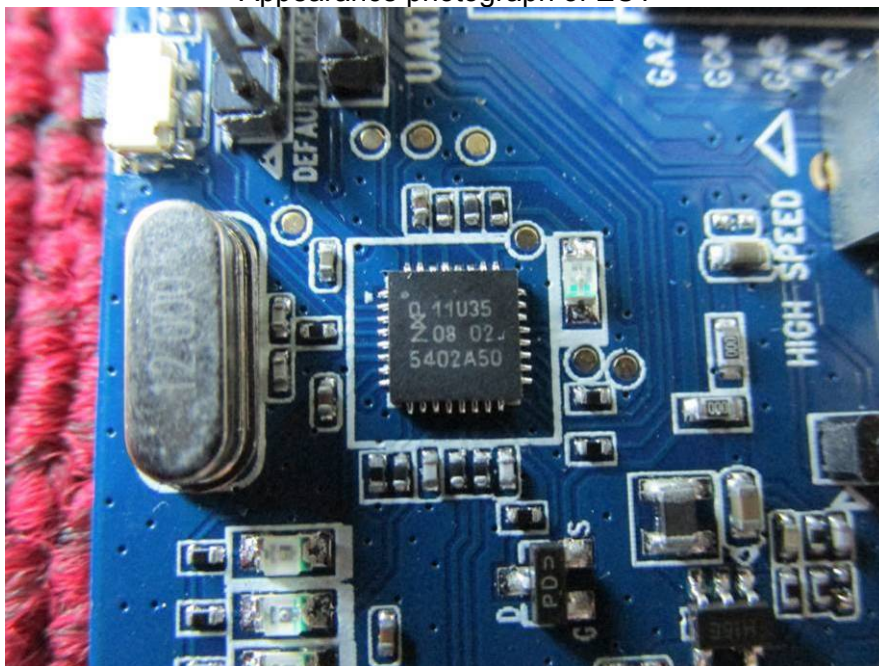


Appearance photograph of EUT




Appearance photograph of EUT

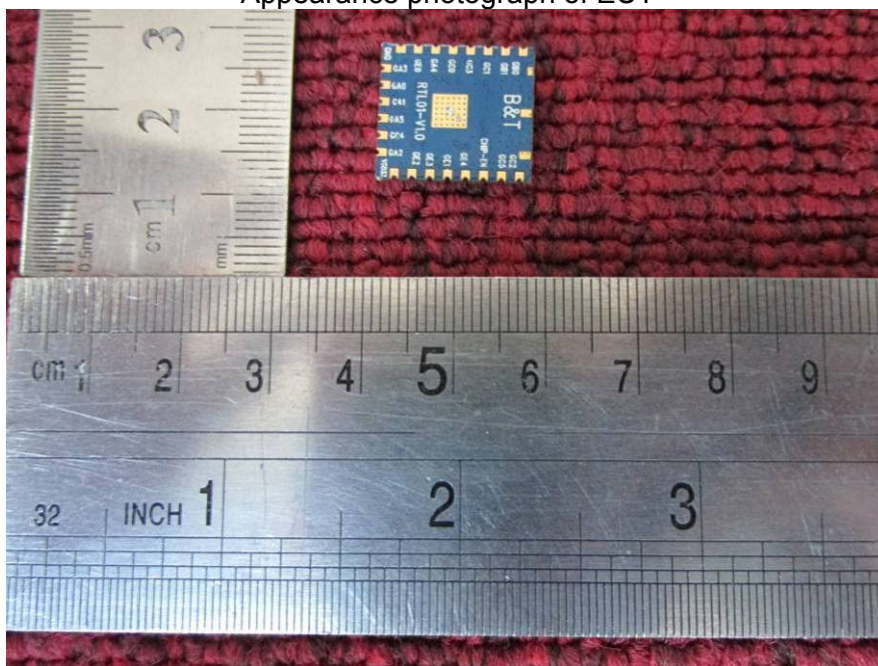


Internal photograph of EUT

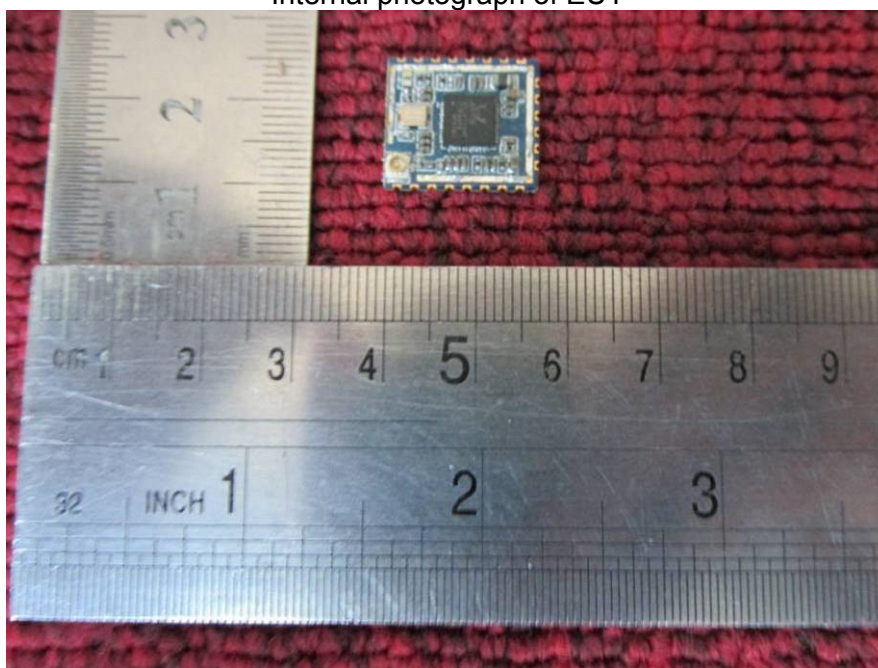


Internal photograph of EUT

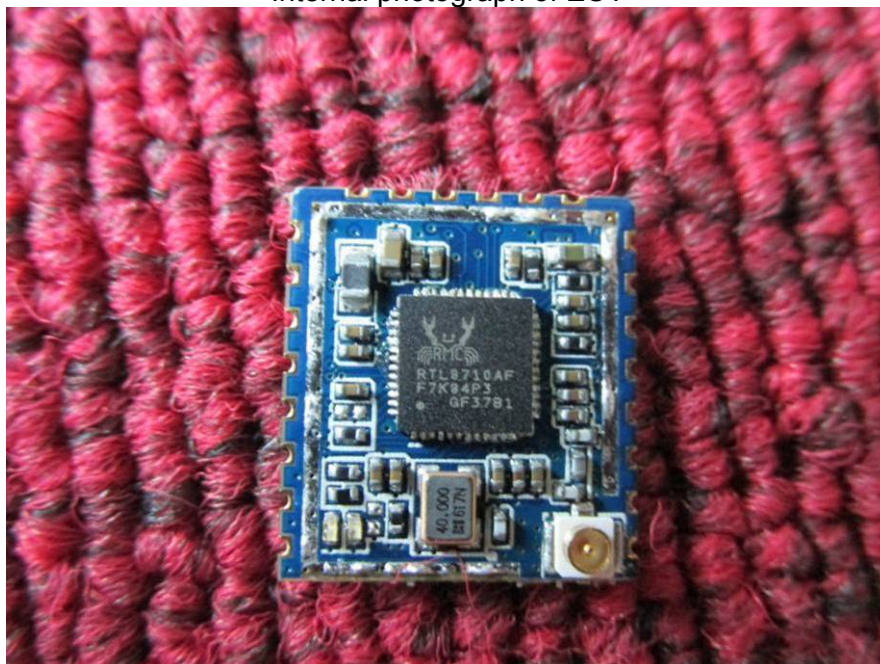


RTL01
Internal photograph of EUT

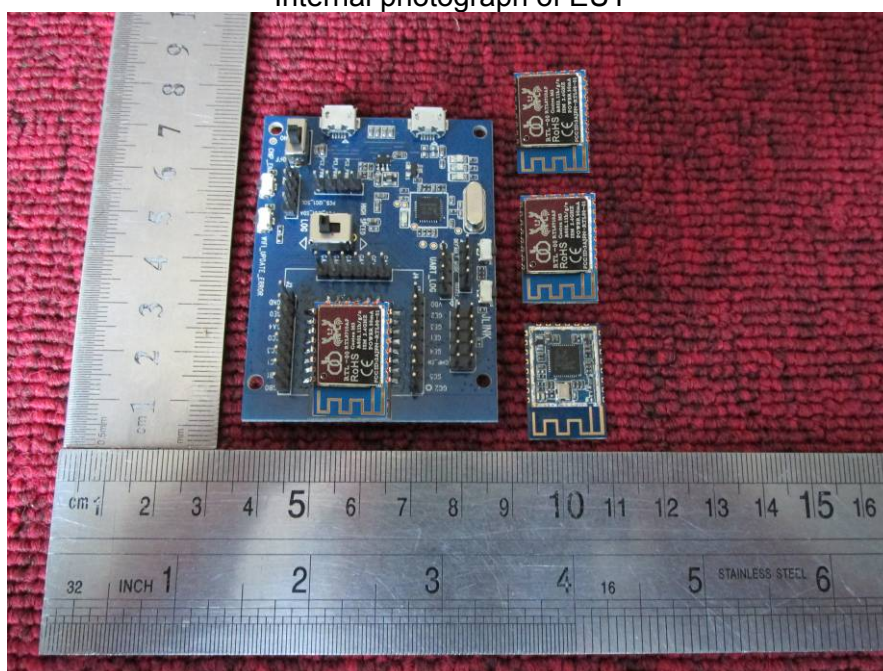


Internal photograph of EUT

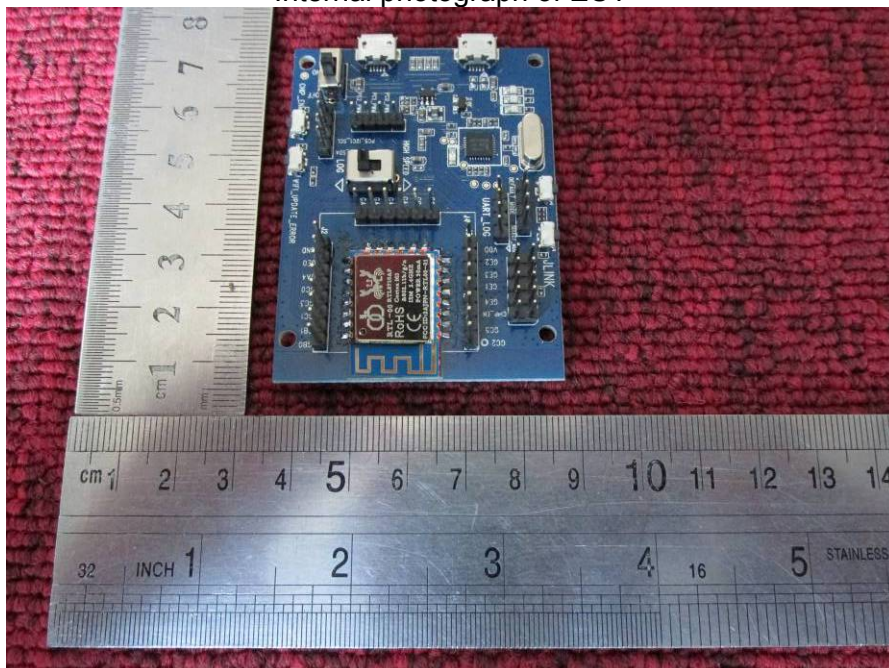


Internal photograph of EUT

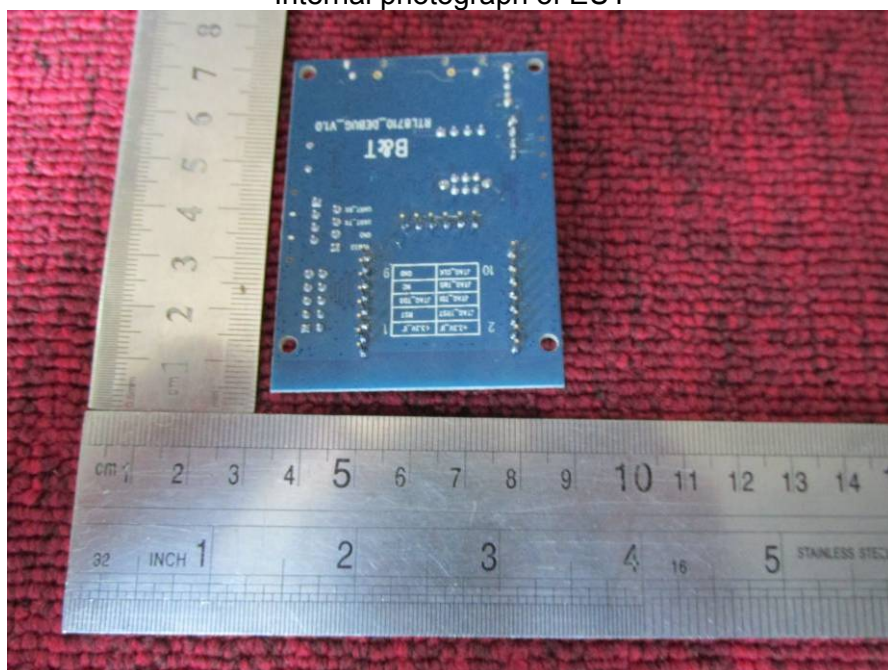


Internal photograph of EUT

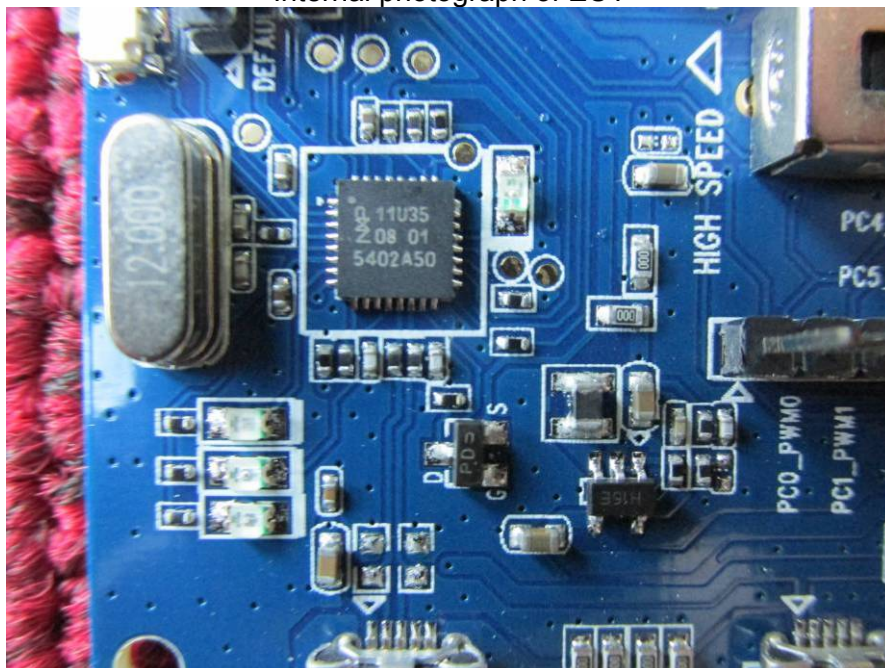


Internal photograph of EUT

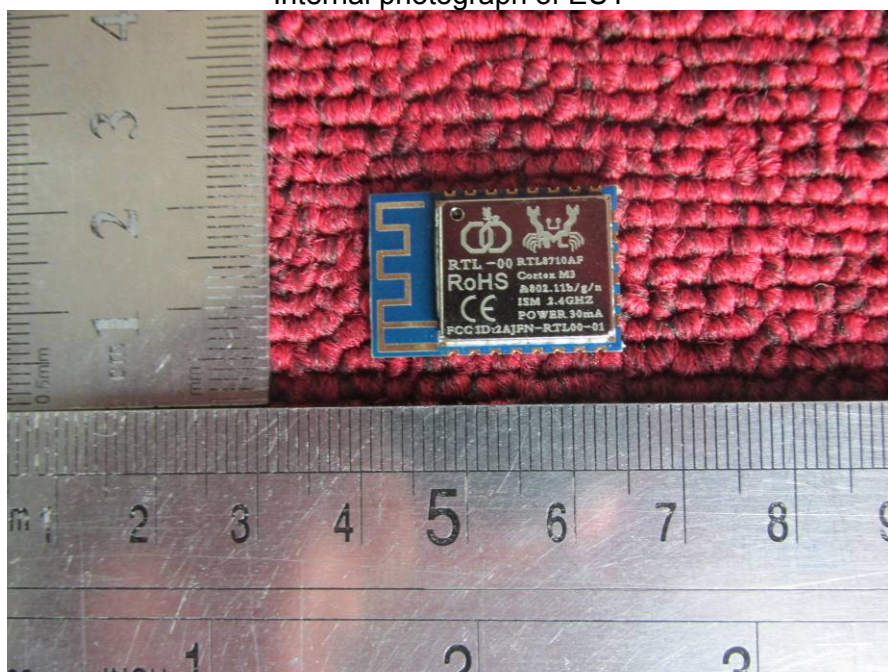


Internal photograph of EUT

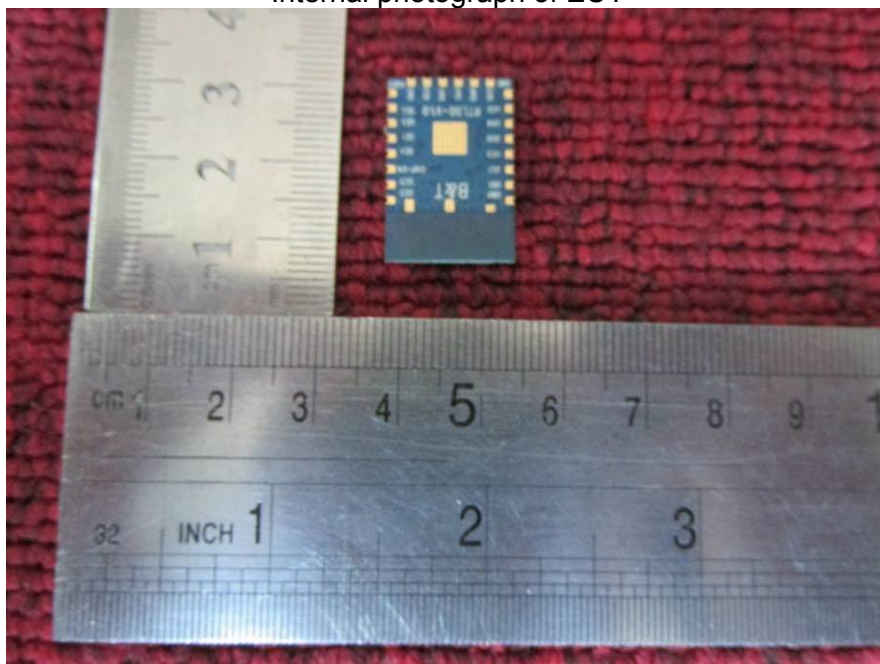

Internal photograph of EUT

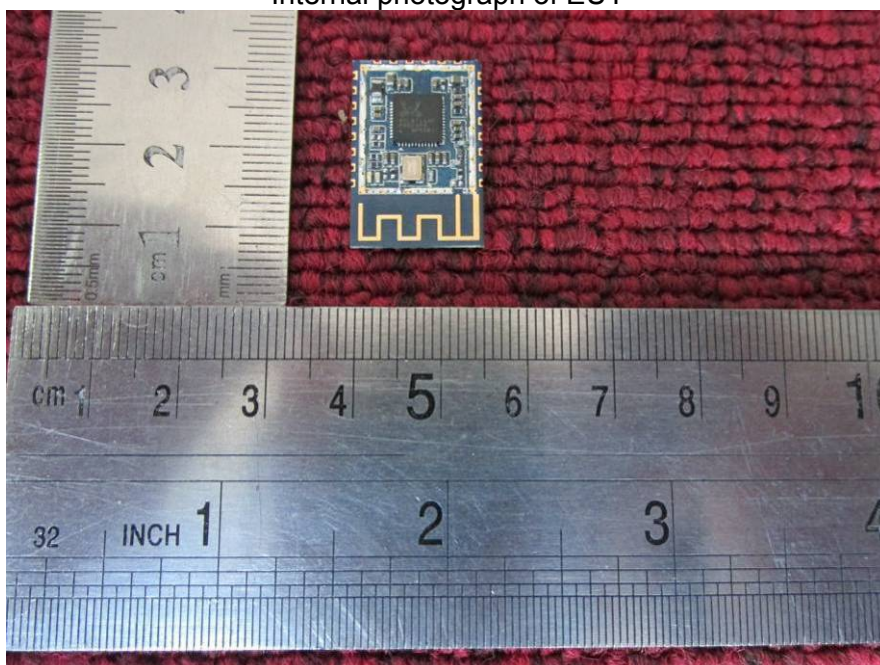

Internal photograph of EUT

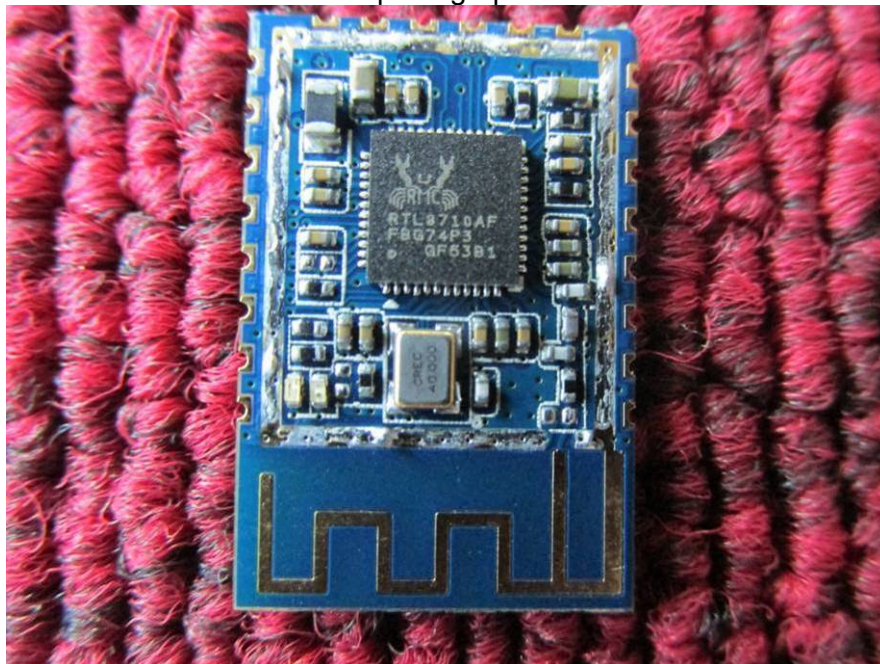

---END OF REPORT---