



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E, PART 27 MEASUREMENT AND TEST REPORT

For

Quanzhou Tesunho Electronics Co., Ltd

2#, 5F E-19# Phase 2 Xunmei, Quanzhou, Fujian, China

FCC ID: 2AKS9TM990

Report Type: Original Report	Product Type: PoC Radio
Report Number: RXM190308050-00B	
Report Date: 2019-03-27	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD	9
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50- RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA	30
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS ...	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	78
APPLICABLE STANDARD	78
TEST PROCEDURE	78
TEST EQUIPMENT LIST AND DETAILS.....	79
TEST DATA	80
FCC §22.917(A) & §24.238(A) & §27.53- BAND EDGES.....	83
APPLICABLE STANDARD	83
TEST PROCEDURE	83
TEST EQUIPMENT LIST AND DETAILS.....	83
TEST DATA	83

FCC §2.1055, §22.355 & §24.235 & §27.54- FREQUENCY STABILITY.....125

 APPLICABLE STANDARD125

 TEST PROCEDURE125

 TEST EQUIPMENT LIST AND DETAILS.....126

 TEST DATA126

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	PoC Radio
EUT Model:	TM990
Operation modes:	WCDMA(R99 (Data), HSDPA/HSUPA/HSPA+/DC-HSDPA Data) FDD-LTE
Operation Frequency:	WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX)
Maximum Output Power: (Conducted)	WCDMA Band 2: 22.22 dBm; WCDMA Band 5: 22.86 dBm LTE Band 2: 22.20 dBm; LTE Band 4: 22.32 dBm LTE Band 5: 23.35 dBm; LTE Band 12: 23.73 dBm; LTE Band 17: 23.92 dBm
Modulation Type:	QPSK, 16QAM
Rated Input Voltage:	DC13.6V from V-Car
External Dimension:	18.7cm*12cm*8cm
Serial Number:	190308050
EUT Received Date:	2019-3-12

Objective

This report is prepared on behalf of **Quanzhou Tesunho Electronics Co., Ltd** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode. The device operates on WCDMA Band 2/5, and LTE band 2/4/5/12/17, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704	707.5	711
LTE Band 17	5	706.5	710	713.5
	10	709	710	711

For LTE band 2 and 4, 10/15/20MHz bandwidth only supports QPSK modulation, 16QAM was not enabled,
For LTE band 5/12/17, 10MHz bandwidth only supports QPSK modulation, 16QAM was not enabled.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	147473
Un-known	ANTENNA	/	/

Configuration of Test Setup

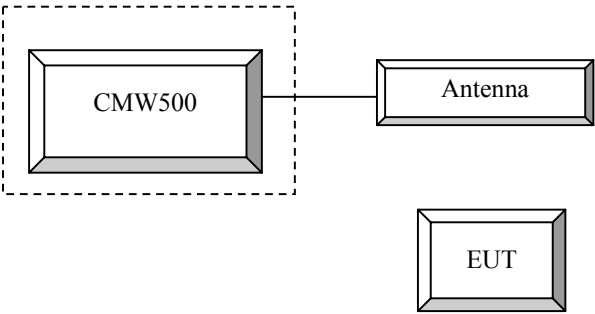

Block Diagram of Test Setup

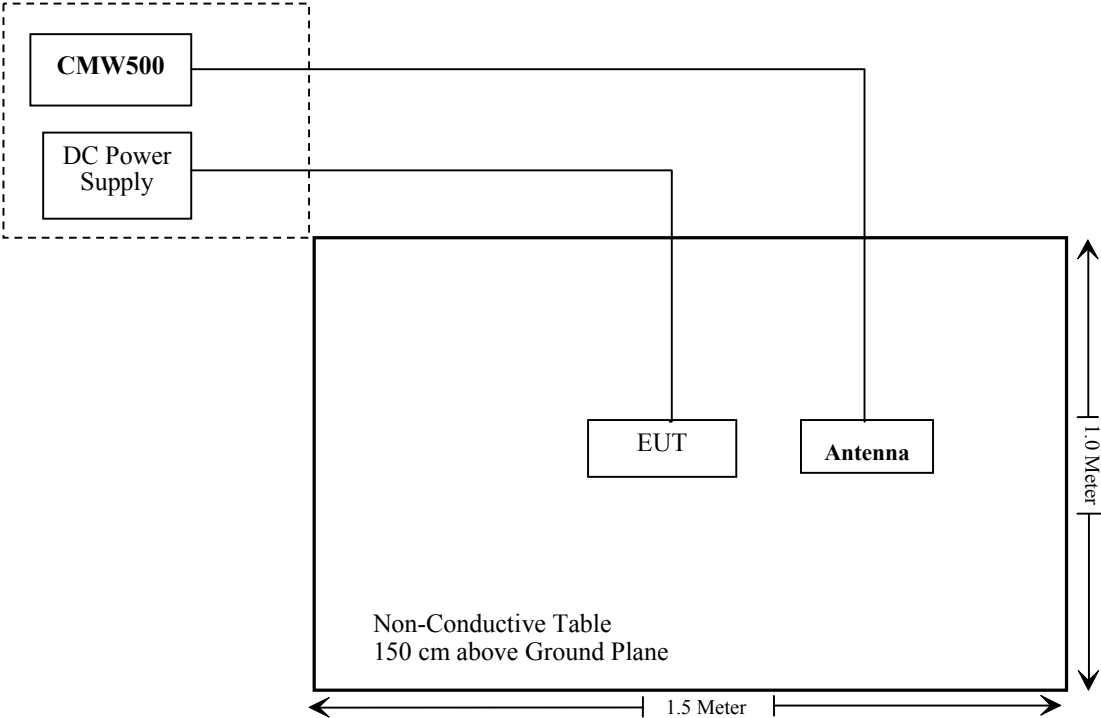

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Compliance
FCC§2.1046;§ 22.913 (a); § 24.232 (c);§27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a); §27.53;	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WCDMA band 2	1850-1910	3	2.00	23	199.53	20.00	0.08	1.0
WCDMA Band 5	824-849	3	2.00	23	199.53	20.00	0.08	0.55
LTE Band 2	1850-1910	3	2.00	23	199.53	20.00	0.08	1.0
LTE band 4	1710-1755	3	2.00	23	199.53	20.00	0.08	1.0
LTE Band 5	824-849	3	2.00	24	251.19	20.00	0.10	0.55
LTE Band 12	699-716	3	2.00	24	251.19	20.00	0.10	0.47
LTE Band 17	704-716	3	2.00	24	251.19	20.00	0.10	0.47

Note: the Max. Target Power including Tolerance was declared by manufacturer.

Result: Compliance, The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥ 20 cm.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	Not Required	/
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
R&S	Wideband Radio Communication Tester	CMW500	149216	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.5~25.5°C
Relative Humidity:	43~52 %
ATM Pressure:	100.5~101.2kPa

* The testing was performed by Neil Liao, Tyler Pan, Vern Shen, Elena Lei, Blake Yang from 2019-03-16 to 2019-03-20.

Conducted Output Power**WCDMA Band II**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.76	3.30	21.89	3.43	22.22	2.98
HSDPA	1	19.15	4.07	19.43	3.81	19.88	4.13
	2	19.31	4.00	19.49	3.97	19.55	4.09
	3	19.50	3.89	19.22	3.89	19.26	4.13
	4	19.09	4.14	19.29	4.14	19.09	4.14
HSUPA	1	19.21	5.42	19.52	5.64	19.86	6.06
	2	19.46	5.16	19.58	5.44	19.30	5.92
	3	19.41	5.14	19.61	5.19	19.56	5.96
	4	19.62	5.31	19.54	5.23	19.30	6.16
DC-HSDPA	1	19.54	5.51	19.42	5.43	19.54	6.28
	2	19.42	5.27	19.38	5.31	19.34	6.20
	3	19.26	5.19	19.46	5.51	19.54	6.28
	4	19.50	5.31	19.50	5.55	19.58	6.04
HSPA+ (16QAM)	1	19.42	5.35	19.34	5.55	19.54	6.04
	1	19.62	5.23	19.42	5.55	19.38	6.04

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.78	3.11	22.43	3.23	22.86	3.30
HSDPA	1	20.96	4.87	20.88	3.88	21.17	3.85
	2	21.19	4.90	21.23	3.78	21.04	3.98
	3	21.11	4.94	21.15	3.74	21.36	3.78
	4	21.15	4.98	21.07	3.66	21.04	3.78
HSUPA	1	21.05	5.61	20.96	3.97	21.22	6.51
	2	21.20	5.66	21.16	4.20	21.08	6.47
	3	21.24	5.42	21.32	4.28	21.04	6.47
	4	21.20	5.58	21.36	3.92	21.16	6.67
DC-HSDPA	1	21.40	5.70	21.16	4.24	21.32	6.51
	1	21.24	5.58	21.16	4.20	21.32	6.55
	2	21.40	5.42	21.04	3.92	21.32	6.71
	3	21.16	5.62	21.20	4.08	21.32	6.83
HSPA+ (16QAM)	1	21.24	5.54	21.08	4.12	21.28	6.55
	1	21.24	5.74	21.28	4.16	21.16	6.55

LTE Band 2

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	21.04	21.02	21.95
		RB1#3	21.14	21.19	22.02
		RB1#5	21.10	21.08	21.98
		RB3#0	21.16	21.20	21.90
		RB3#3	21.33	21.27	21.79
		RB6#0	20.14	20.10	20.68
	16QAM	RB1#0	20.67	20.12	20.89
		RB1#3	20.86	19.93	21.01
		RB1#5	20.84	19.85	20.82
		RB3#0	19.96	20.12	20.78
		RB3#3	20.06	20.13	20.90
		RB6#0	19.56	19.24	19.65
3MHz	QPSK	RB1#0	21.22	21.22	21.94
		RB1#8	21.28	21.09	21.88
		RB1#14	21.16	21.32	21.82
		RB6#0	20.02	20.14	20.67
		RB6#9	20.16	20.09	20.73
		RB15#0	20.11	20.12	20.72
	16QAM	RB1#0	21.04	20.66	20.37
		RB1#8	21.01	20.62	20.33
		RB1#14	20.89	20.86	20.36
		RB6#0	19.32	19.24	19.68
		RB6#9	19.46	19.16	19.75
		RB15#0	19.15	19.22	19.93
5MHz	QPSK	RB1#0	20.96	21.26	21.85
		RB1#13	21.03	21.14	21.80
		RB1#24	20.87	21.06	21.92
		RB15#0	20.17	20.03	20.61
		RB15#10	20.00	20.21	20.77
		RB25#0	20.07	20.14	20.64
	16QAM	RB1#0	19.90	20.29	20.20
		RB1#13	20.23	20.23	20.29
		RB1#24	19.40	20.34	20.41
		RB15#0	19.24	19.33	19.70
		RB15#10	19.25	19.11	19.77
		RB25#0	19.21	19.20	19.95

10MHz	QPSK	RB1#0	21.24	20.94	21.98
		RB1#25	20.95	21.53	21.90
		RB1#49	20.93	21.51	22.20
		RB25#0	20.07	20.21	20.86
		RB25#25	19.86	20.40	20.86
		RB50#0	20.02	20.23	20.84
15MHz	QPSK	RB1#0	21.24	21.11	20.90
		RB1#38	21.15	21.03	21.05
		RB1#74	21.24	21.07	21.13
		RB36#0	21.06	21.31	21.05
		RB36#39	21.03	20.95	20.89
		RB75#0	21.09	20.99	20.76
20MHz	QPSK	RB1#0	20.46	20.56	21.44
		RB1#50	20.76	20.88	21.40
		RB1#99	20.69	20.66	21.60
		RB50#0	19.20	19.39	19.97
		RB50#50	19.04	19.62	20.12
		RB100#0	20.05	20.37	20.14

LTE Band 4

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	20.62	20.17	21.94
		RB1#3	20.88	20.27	22.01
		RB1#5	20.73	20.24	22.00
		RB3#0	20.79	20.10	22.05
		RB3#3	20.72	20.12	22.13
		RB6#0	19.76	19.15	21.13
	16QAM	RB1#0	19.45	19.20	21.08
		RB1#3	19.50	21.18	21.36
		RB1#5	19.20	20.99	21.30
		RB3#0	19.31	21.08	20.90
		RB3#3	19.30	21.01	20.91
		RB6#0	19.36	19.92	19.73
3MHz	QPSK	RB1#0	21.72	22.16	21.84
		RB1#8	21.63	21.95	22.03
		RB1#14	21.69	22.08	22.20
		RB6#0	20.73	20.75	20.82
		RB6#9	20.65	20.65	21.09
		RB15#0	20.63	20.77	20.87
	16QAM	RB1#0	21.05	21.28	20.98
		RB1#8	20.87	21.35	21.06
		RB1#14	20.88	21.49	21.26
		RB6#0	19.61	20.17	19.55
		RB6#9	19.63	20.08	19.88
		RB15#0	19.52	20.12	20.05
5MHz	QPSK	RB1#0	21.54	21.77	21.74
		RB1#13	21.52	21.62	21.89
		RB1#24	21.53	21.70	22.25
		RB15#0	20.71	20.86	20.82
		RB15#10	20.62	20.67	20.99
		RB25#0	20.65	20.86	20.96
	16QAM	RB1#0	20.02	21.05	20.53
		RB1#13	20.14	20.85	20.56
		RB1#24	19.94	21.19	21.04
		RB15#0	19.65	19.65	19.87
		RB15#10	19.59	19.36	20.03
		RB25#0	19.73	19.71	20.01

10MHz	QPSK	RB1#0	21.81	22.08	21.86
		RB1#25	21.72	22.06	22.14
		RB1#49	21.73	21.71	22.32
		RB25#0	20.67	20.83	20.86
		RB25#25	20.68	20.81	20.93
		RB50#0	20.73	20.91	20.76
15MHz	QPSK	RB1#0	21.24	21.27	21.35
		RB1#38	21.15	21.23	21.10
		RB1#74	21.09	20.99	20.90
		RB36#0	21.21	21.23	21.20
		RB36#39	21.12	21.11	21.25
		RB75#0	21.06	21.15	20.95
20MHz	QPSK	RB1#0	21.18	21.15	21.30
		RB1#50	21.27	21.27	21.05
		RB1#99	21.21	21.31	21.10
		RB50#0	21.27	21.03	20.90
		RB50#50	21.15	21.11	20.95
		RB100#0	21.00	21.15	20.95

LTE Band 5

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	22.89	23.02	22.74
		RB1#3	22.98	22.99	23.03
		RB1#5	22.91	22.99	22.78
		RB3#0	22.64	23.10	23.00
		RB3#3	22.77	23.17	23.04
		RB6#0	21.75	22.11	22.04
	16QAM	RB1#0	21.98	22.48	21.61
		RB1#3	22.10	22.70	21.67
		RB1#5	21.86	22.83	21.48
		RB3#0	21.73	22.45	22.01
		RB3#3	21.58	22.38	22.06
3MHz	QPSK	RB1#0	22.64	23.18	22.58
		RB1#8	22.56	23.13	22.82
		RB1#14	22.59	23.00	22.79
		RB6#0	21.79	22.24	21.93
		RB6#9	21.61	22.25	22.00
		RB15#0	21.68	22.16	21.97
	16QAM	RB1#0	22.06	22.64	21.40
		RB1#8	21.99	22.53	21.26
		RB1#14	21.51	22.36	21.50
		RB6#0	20.80	21.35	20.85
		RB6#9	20.61	21.48	20.86
5MHz	QPSK	RB1#0	22.62	23.07	22.32
		RB1#13	22.65	23.18	22.67
		RB1#24	22.69	22.75	22.95
		RB15#0	21.60	22.17	21.60
		RB15#10	21.68	22.05	22.00
		RB25#0	21.67	22.07	21.69
	16QAM	RB1#0	21.31	22.49	21.17
		RB1#13	21.01	22.73	21.38
		RB1#24	20.95	22.50	21.56
		RB15#0	20.89	21.01	20.57
		RB15#10	20.76	21.25	20.97
10MHz	QPSK	RB25#0	20.67	20.96	20.78
		RB1#0	22.36	22.95	22.90
		RB1#25	22.54	23.23	23.35
		RB1#49	22.51	22.95	23.15
		RB25#0	22.39	22.95	23.30
		RB25#25	22.51	23.27	23.10
		RB50#0	22.57	23.19	23.05

LTE Band 12

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	23.46	23.33	23.14
		RB1#3	23.47	23.53	23.73
		RB1#5	23.43	23.61	23.51
		RB3#0	23.19	23.46	23.07
		RB3#3	23.23	23.56	23.35
		RB6#0	22.29	22.49	22.29
	16QAM	RB1#0	22.49	23.01	22.12
		RB1#3	22.54	23.20	22.42
		RB1#5	22.11	23.18	22.13
		RB3#0	22.04	22.46	22.20
		RB3#3	21.99	22.49	22.46
3MHz	QPSK	RB1#0	23.33	23.43	23.47
		RB1#8	23.42	23.60	23.40
		RB1#14	23.24	23.56	23.56
		RB6#0	22.41	22.36	22.44
		RB6#9	22.27	22.68	22.39
		RB15#0	22.37	22.47	22.34
	16QAM	RB1#0	23.04	23.07	22.51
		RB1#8	22.58	22.92	22.06
		RB1#14	22.46	22.66	22.53
		RB6#0	21.39	21.51	21.35
		RB6#9	21.35	21.74	21.35
5MHz	QPSK	RB1#0	23.27	23.34	23.44
		RB1#13	23.28	23.55	23.33
		RB1#24	23.15	23.30	23.43
		RB15#0	22.39	22.46	22.56
		RB15#10	22.19	22.54	22.39
		RB25#0	22.30	22.40	22.27
	16QAM	RB1#0	21.75	22.65	22.37
		RB1#13	22.11	23.01	22.16
		RB1#24	21.58	22.82	22.03
		RB15#0	21.39	21.36	21.19
		RB15#10	21.21	21.24	21.31
10MHz	QPSK	RB25#0	21.29	21.55	21.31
		RB1#0	23.19	22.85	23.21
		RB1#25	23.31	23.56	23.37
		RB1#49	23.20	23.17	23.36
		RB25#0	22.25	22.32	22.38
		RB25#25	22.38	22.40	22.38
		RB50#0	22.40	22.30	22.41

LTE Band 17

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5MHz	QPSK	RB1#0	22.89	23.08	22.86
		RB1#13	22.99	22.90	22.87
		RB1#24	22.85	22.99	22.76
		RB15#0	21.97	21.81	22.10
		RB15#10	21.97	21.88	21.80
		RB25#0	21.99	21.93	21.94
	16QAM	RB1#0	22.30	21.83	21.68
		RB1#13	22.46	21.78	21.36
		RB1#24	22.33	21.74	21.50
		RB15#0	20.81	20.98	21.03
		RB15#10	20.82	20.84	20.91
		RB25#0	20.97	20.93	20.94
10MHz	QPSK	RB1#0	23.12	23.92	23.90
		RB1#25	22.98	23.14	23.08
		RB1#49	23.10	23.73	23.62
		RB25#0	22.10	22.98	22.91
		RB25#25	21.97	22.96	22.76
		RB50#0	22.06	23.00	22.94

PAR, Band 2

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.94	4.97	5.03	13
	100 RB		5.35	5.35	5.35	13
16QAM	1 RB	5 MHz	5.48	5.93	5.64	13
	25 RB		6.03	6.09	6.22	13

PAR, Band 4

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.81	4.81	4.81	13
	100 RB		5.22	5.16	5.26	13
16QAM	1 RB	5 MHz	5.61	5.42	5.54	13
	25 RB		5.93	5.96	6.03	13

PAR, Band 5

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	4.78	4.81	4.84	13
	50 RB		5.19	5.29	5.26	13
16QAM	1 RB	5 MHz	5.45	5.38	5.74	13
	25 RB		5.96	5.93	5.96	13

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V Middle Channel								
836.60	H	93.73	18.81	0.00	0.97	17.84	38.45	20.61
836.60	V	92.08	20.29	0.00	0.97	19.32	38.45	19.13
WCDMA Band II Middle Channel								
1880.00	H	85.83	13.22	11.66	2.66	22.22	33.00	10.78
1880.00	V	78.12	5.65	11.66	2.66	14.65	33.00	18.35

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

LTE Band 2

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1880.00	1.40	QPSK	H	83.34	10.73	11.66	2.66	19.73	33.00	13.27
1880.00			V	76.19	3.72	11.66	2.66	12.72	33.00	20.28
1880.00	3.00		H	83.31	10.70	11.66	2.66	19.70	33.00	13.30
1880.00			V	76.14	3.67	11.66	2.66	12.67	33.00	20.33
1880.00	5.00		H	83.14	10.53	11.66	2.66	19.53	33.00	13.47
1880.00			V	76.12	3.65	11.66	2.66	12.65	33.00	20.35
1880.00	10.00		H	82.34	9.73	11.66	2.66	18.73	33.00	14.27
1880.00			V	75.40	2.93	11.66	2.66	11.93	33.00	21.07
1880.00	15.00		H	83.46	10.85	11.66	2.66	19.85	33.00	13.15
1880.00			V	76.23	3.76	11.66	2.66	12.76	33.00	20.24
1880.00	20.00		H	83.61	11.00	11.66	2.66	20.00	33.00	13.00
1880.00			V	76.35	3.88	11.66	2.66	12.88	33.00	20.12
1880.00	1.40	16QAM	H	82.46	9.85	11.66	2.66	18.85	33.00	14.15
1880.00			V	75.30	2.83	11.66	2.66	11.83	33.00	21.17
1880.00	3.00		H	82.43	9.82	11.66	2.66	18.82	33.00	14.18
1880.00			V	75.26	2.79	11.66	2.66	11.79	33.00	21.21
1880.00	5.00		H	82.39	9.78	11.66	2.66	18.78	33.00	14.22
1880.00			V	75.27	2.80	11.66	2.66	11.80	33.00	21.20

LTE Band 4

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1732.50	1.40	QPSK	H	84.44	10.39	10.90	2.51	18.78	30.00	11.22
1732.50			V	77.95	3.58	10.90	2.51	11.97	30.00	18.03
1732.50	3.00		H	84.35	10.30	10.90	2.51	18.69	30.00	11.31
1732.50			V	77.90	3.53	10.90	2.51	11.92	30.00	18.08
1732.50	5.00		H	84.29	10.24	10.90	2.51	18.63	30.00	11.37
1732.50			V	77.86	3.49	10.90	2.51	11.88	30.00	18.12
1732.50	10.00		H	83.67	9.62	10.90	2.51	18.01	30.00	11.99
1732.50			V	76.88	2.51	10.90	2.51	10.90	30.00	19.10
1732.50	15.00		H	83.71	9.66	10.90	2.51	18.05	30.00	11.95
1732.50			V	76.79	2.42	10.90	2.51	10.81	30.00	19.19
1732.50	20.00		H	83.75	9.70	10.90	2.51	18.09	30.00	11.91
1732.50			V	76.64	2.27	10.90	2.51	10.66	30.00	19.34
1732.50	1.40	16QAM	H	83.27	9.22	10.90	2.51	17.61	30.00	12.39
1732.50			V	76.46	2.09	10.90	2.51	10.48	30.00	19.52
1732.50	3.00		H	83.30	9.25	10.90	2.51	17.64	30.00	12.36
1732.50			V	76.43	2.06	10.90	2.51	10.45	30.00	19.55
1732.50	5.00		H	83.17	9.12	10.90	2.51	17.51	30.00	12.49
1732.50			V	76.39	2.02	10.90	2.51	10.41	30.00	19.59

LTE Band 5

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
836.50	1.40	QPSK	H	97.93	23.00	0.00	0.97	22.03	38.45	16.42
836.50			V	88.15	16.36	0.00	0.97	15.39	38.45	23.06
836.50	3.00		H	96.04	21.11	0.00	0.97	20.14	38.45	18.31
836.50			V	87.55	15.76	0.00	0.97	14.79	38.45	23.66
836.50	5.00		H	95.24	20.31	0.00	0.97	19.34	38.45	19.11
836.50			V	86.87	15.08	0.00	0.97	14.11	38.45	24.34
836.50	10.00		H	94.29	19.36	0.00	0.97	18.39	38.45	20.06
836.50			V	85.77	13.98	0.00	0.97	13.01	38.45	25.44
836.50	1.40	16QAM	H	98.05	23.12	0.00	0.97	22.15	38.45	16.30
836.50			V	88.73	16.94	0.00	0.97	15.97	38.45	22.48
836.50	3.00		H	96.98	22.05	0.00	0.97	21.08	38.45	17.37
836.50			V	87.87	16.08	0.00	0.97	15.11	38.45	23.34
836.50	5.00		H	95.87	20.94	0.00	0.97	19.97	38.45	18.48
836.50			V	87.00	15.21	0.00	0.97	14.24	38.45	24.21

LTE Band 12

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
707.50	1.40	QPSK	H	92.70	15.84	0.00	0.94	14.90	34.77	19.87
707.50			V	84.48	10.06	0.00	0.94	9.12	34.77	25.65
707.50	3.00		H	92.62	15.76	0.00	0.94	14.82	34.77	19.95
707.50			V	84.00	9.58	0.00	0.94	8.64	34.77	26.13
707.50	5.00		H	92.11	15.25	0.00	0.94	14.31	34.77	20.46
707.50			V	83.88	9.46	0.00	0.94	8.52	34.77	26.25
707.50	10.00		H	92.01	15.15	0.00	0.94	14.21	34.77	20.56
707.50			V	83.44	9.02	0.00	0.94	8.08	34.77	26.69
707.50	1.40	16QAM	H	93.56	16.70	0.00	0.94	15.76	34.77	19.01
707.50			V	85.44	11.02	0.00	0.94	10.08	34.77	24.69
707.50	3.00		H	93.11	16.25	0.00	0.94	15.31	34.77	19.46
707.50			V	85.10	10.68	0.00	0.94	9.74	34.77	25.03
707.50	5.00		H	92.88	16.02	0.00	0.94	15.08	34.77	19.69
707.50			V	84.52	10.10	0.00	0.94	9.16	34.77	25.61

LTE Band 17

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
710.00	5	QPSK	H	90.30	13.49	0.00	0.94	12.55	34.77	22.22
710.00			V	81.80	7.44	0.00	0.94	6.50	34.77	28.27
710.00	10		H	90.29	13.48	0.00	0.94	12.54	34.77	22.23
710.00			V	81.78	7.42	0.00	0.94	6.48	34.77	28.29
710.00	5	16QAM	H	90.01	13.20	0.00	0.94	12.26	34.77	22.51
710.00			V	81.77	7.41	0.00	0.94	6.47	34.77	28.30

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

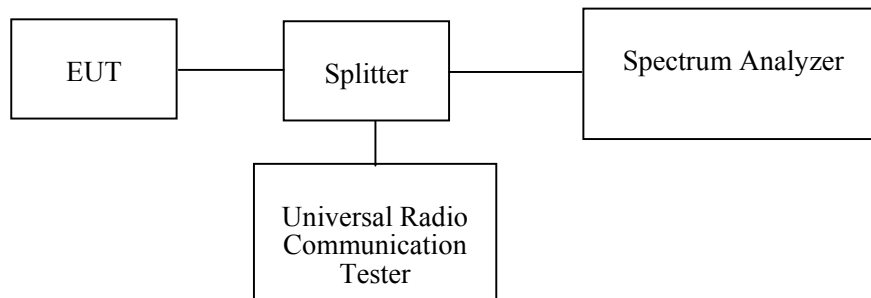**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.8~25.1°C
Relative Humidity:	43~52 %
ATM Pressure:	100.5~101.2 kPa

The testing was performed by Elena Lei on 2019-03-18 and 2019-03-20.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
WCDMA Band II	M	Rel 99	4.119	4.728
		HSDPA	4.119	4.744
		HSUPA	4.135	4.760
WCDMA Band V		Rel 99	4.119	4.728
		HSDPA	4.135	4.808
		HSUPA	4.135	4.696


Band	Bandwidth	Modulation	99% occupied bandwidth (MHz)	26 dB bandwidth (MHz)
LTE Band 2	1.4 MHz	QPSK	1.110	1.287
		16QAM	1.104	1.299
	3 MHz	QPSK	2.700	2.922
		16QAM	2.700	2.946
	5 MHz	QPSK	4.540	5.030
		16QAM	4.520	5.010
	10 MHz	QPSK	8.960	9.739
LTE Band 4	1.4 MHz	QPSK	1.110	1.281
		16QAM	1.104	1.305
	3 MHz	QPSK	2.700	2.934
		16QAM	2.700	2.946
	5 MHz	QPSK	4.540	4.990
		16QAM	4.520	4.970
	10 MHz	QPSK	8.960	9.739
LTE Band 5	1.4 MHz	QPSK	1.116	1.293
		16QAM	1.104	1.311
	3 MHz	QPSK	2.700	2.934
		16QAM	2.688	2.922
	5 MHz	QPSK	4.540	4.990
		16QAM	4.520	4.950
	10 MHz	QPSK	8.960	9.699
LTE Band 12	1.4 MHz	QPSK	1.110	1.287
		16QAM	1.098	1.287
	3 MHz	QPSK	2.688	2.922
		16QAM	2.700	2.946
	5 MHz	QPSK	4.540	5.010
		16QAM	4.520	4.970
	10 MHz	QPSK	8.960	9.739
LTE Band 17	5 MHz	QPSK	4.520	4.990
		16QAM	4.540	4.990
	10 MHz	QPSK	8.960	9.659

WCDMA Band II, Rel 99

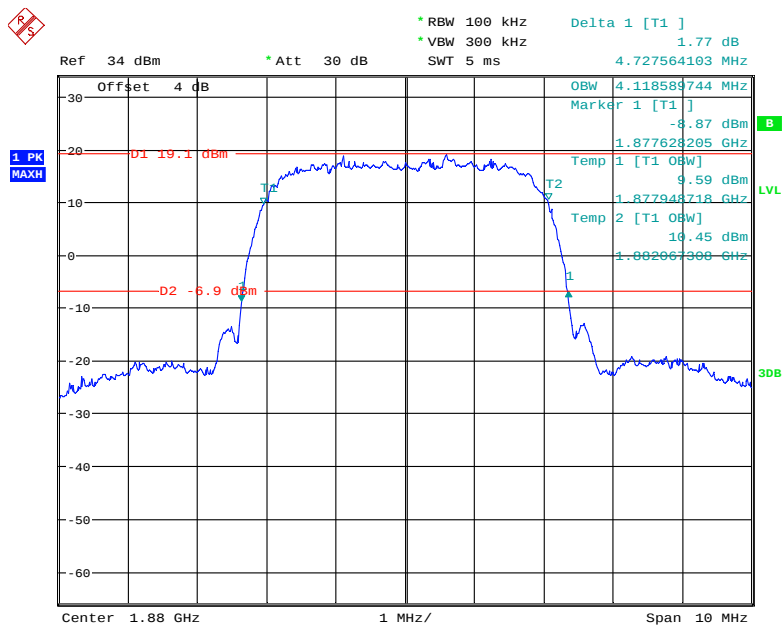


Date: 20.MAR.2019 09:25:18

WCDMA Band II, HSUPA

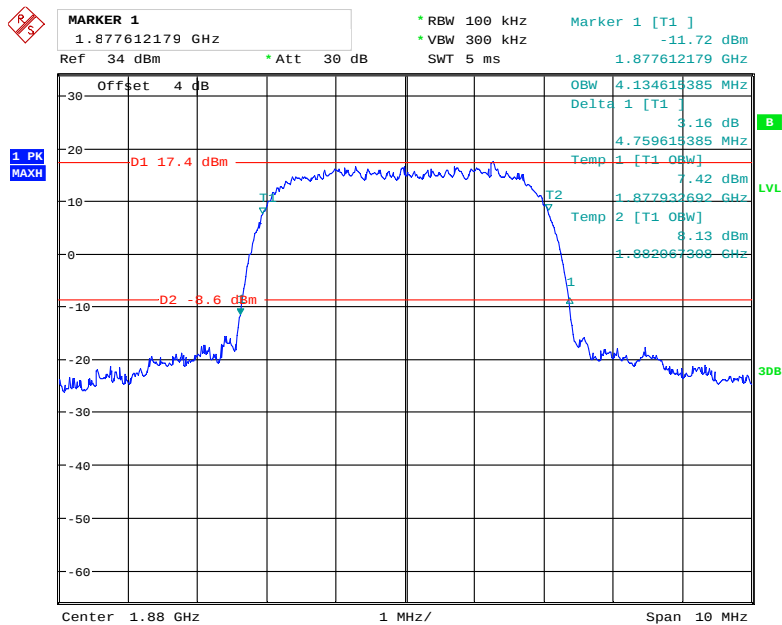


Date: 20.MAR.2019 09:33:26

WCDMA Band II, HSDPA

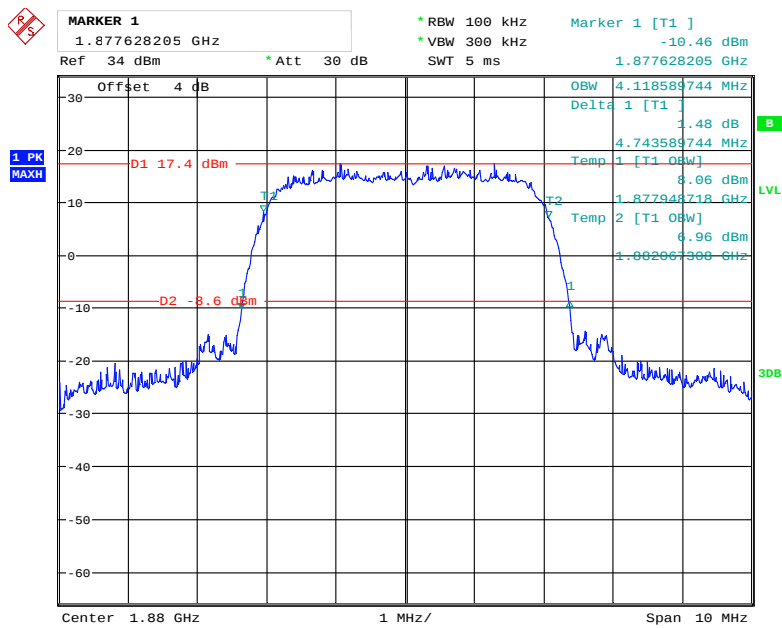


Date: 20.MAR.2019 09:38:43

WCDMA Band V, Rel 99

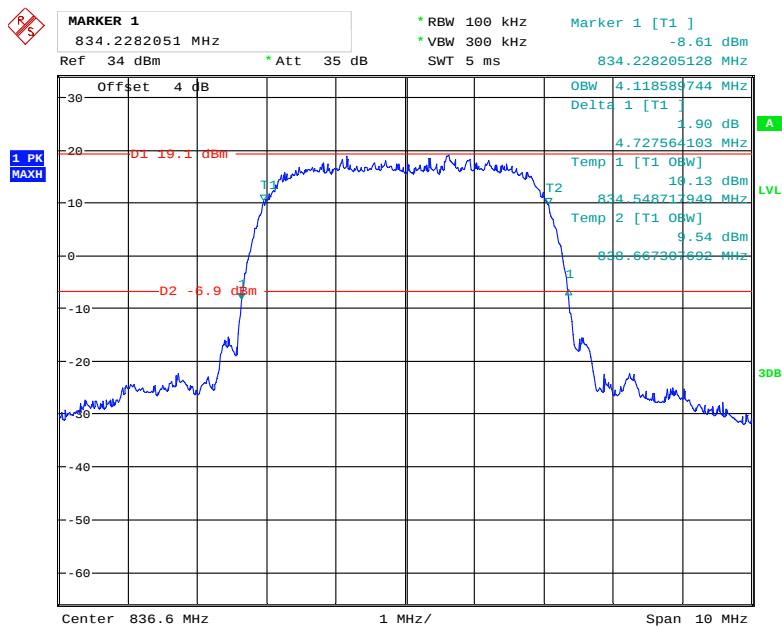


Date: 20.MAR.2019 10:15:24

WCDMA Band V, HSDPA

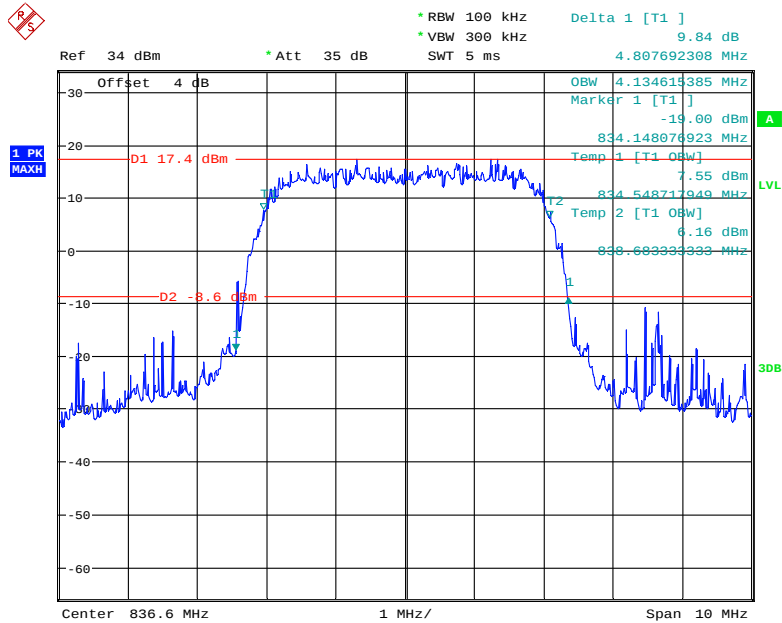

Date: 20.MAR.2019 10:19:52


WCDMA Band V, HSUPA

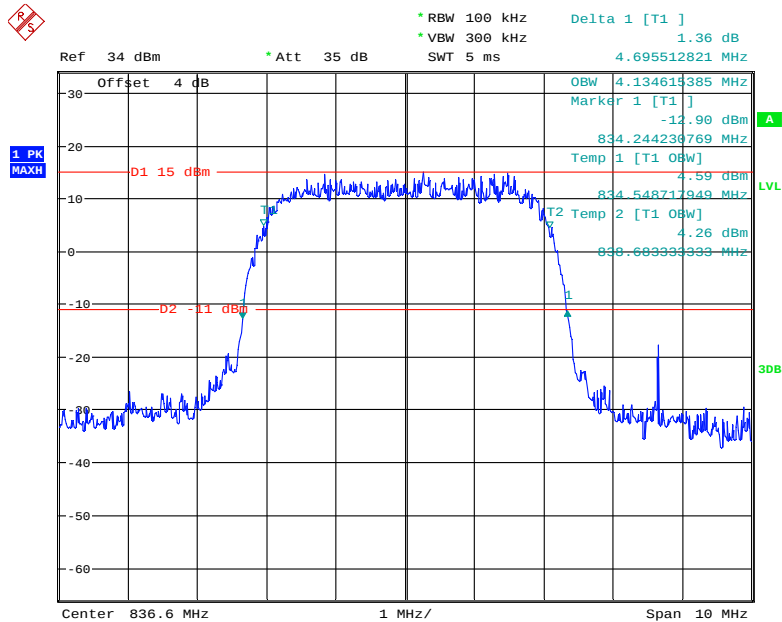

Date: 20.MAR.2019 10:49:54


LTE Band 2

QPSK_1.4 MHz

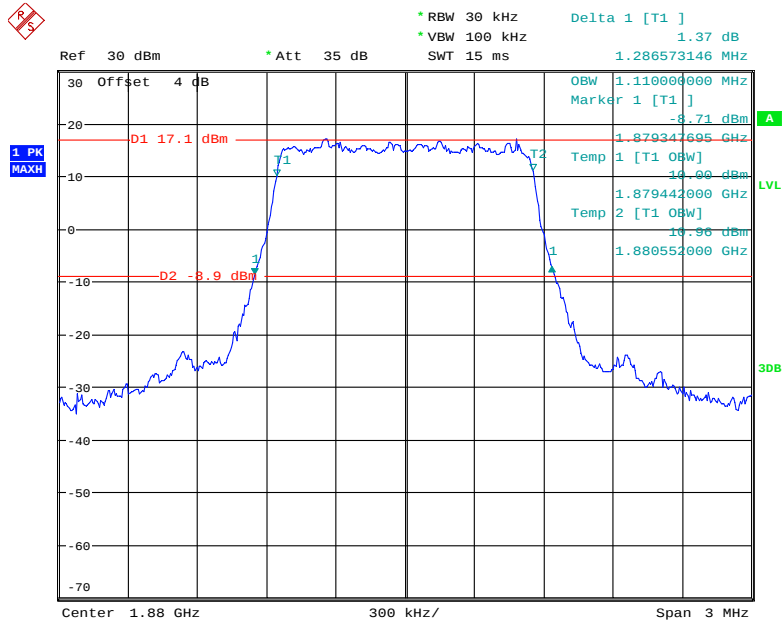


Date: 16.MAR.2019 13:25:38

QPSK_3 MHz

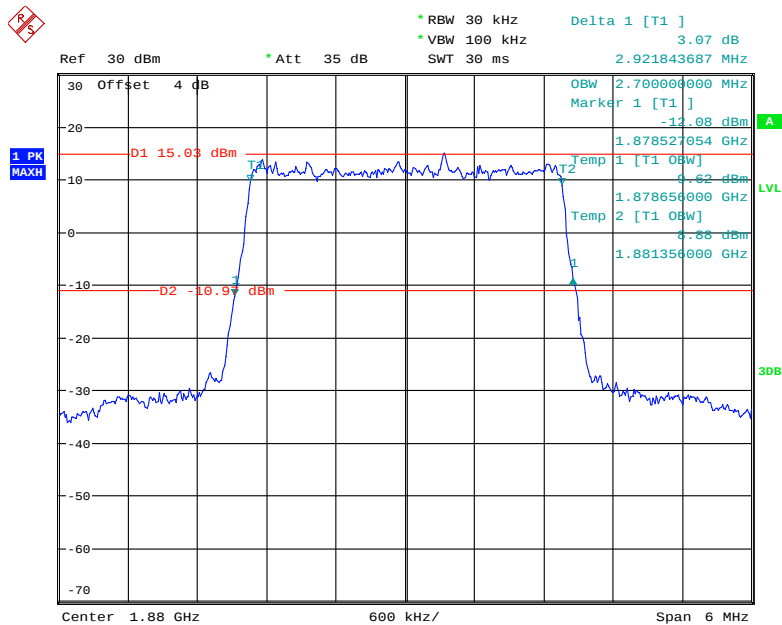


Date: 16.MAR.2019 13:26:52

QPSK_5 MHz

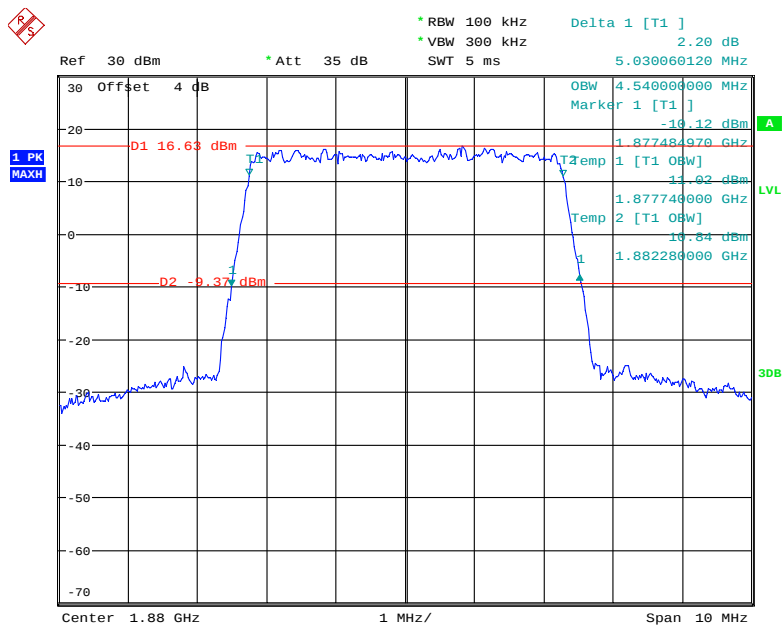


Date: 16.MAR.2019 13:28:12

QPSK_10 MHz

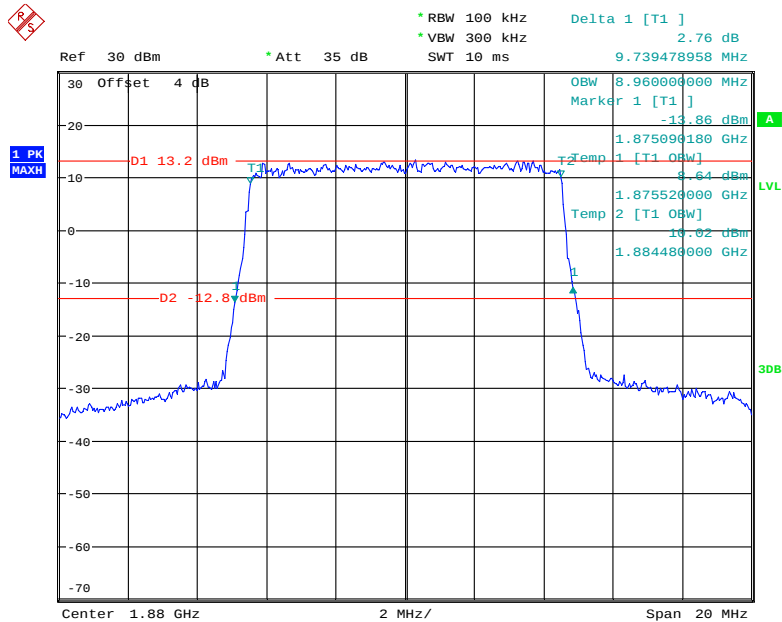


Date: 16.MAR.2019 13:40:20

QPSK_15 MHz

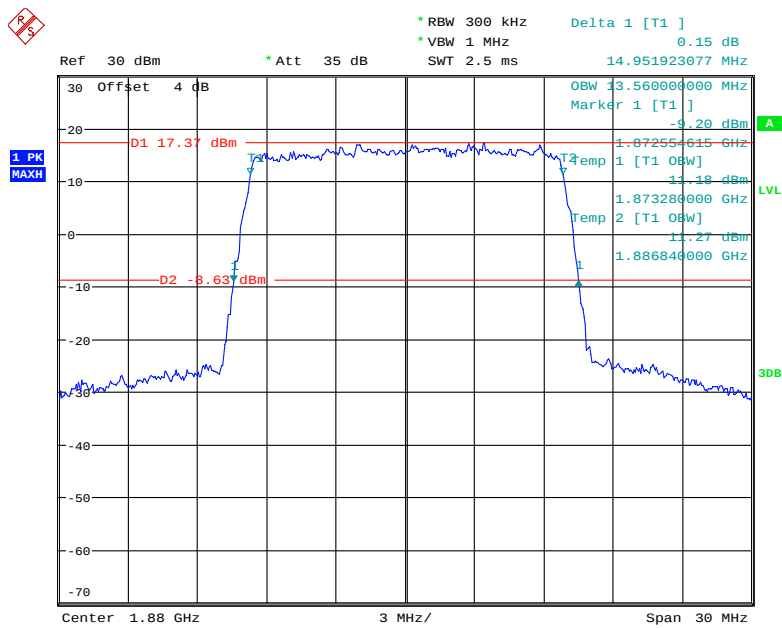

Date: 16.MAR.2019 13:50:33

QPSK_20 MHz

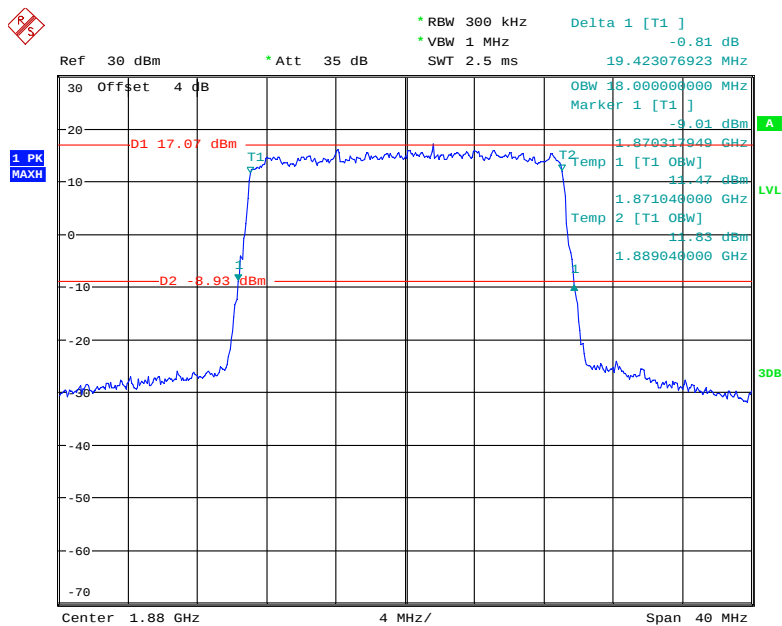


Date: 16.MAR.2019 13:52:24

The screenshot displays a spectrum analyzer interface with the following details:


- Top Bar:**
 - Left: A red diamond icon with the number '9' inside.
 - Center: Measurement parameters including 'Ref 30 dBm', 'Att 35 dB', 'RBW 30 kHz', 'VBW 100 kHz', and 'SWT 15 ms'.
 - Right: Frequency and level information: 'Delta 1 [T1] 1.25 dB', '1.298597194 MHz', and '1.25 dB'.
- Plot Area:**
 - Y-axis: Labeled 'Offset 4 dB' at the top. The scale ranges from -70 to 30 dBm.
 - X-axis: Labeled 'Center 1.88 GHz' and 'Span 3 MHz'.
 - Signal: A blue trace showing a signal with two distinct peaks. The first peak is labeled 'D1 16.26 dBm' and the second is labeled 'D2 9.74 dBm'.
 - Grid: A grid is visible with major lines every 10 dB on the y-axis and every 300 kHz on the x-axis.
- Right Panel:**
 - Marker 1 [T1]: 1.879341683 GHz, -9.86 dBm.
 - Temp 1 [T1 OBW]: 1.879448000 GHz, -9.06 dBm.
 - Marker 2 [T1 OBW]: 1.880552000 GHz, -9.65 dBm.
 - Temp 2 [T1 OBW]: 1.880552000 GHz, -9.65 dBm.
- Bottom Bar:**
 - Center: 1.88 GHz
 - Span: 3 MHz

16QAM_3 MHz

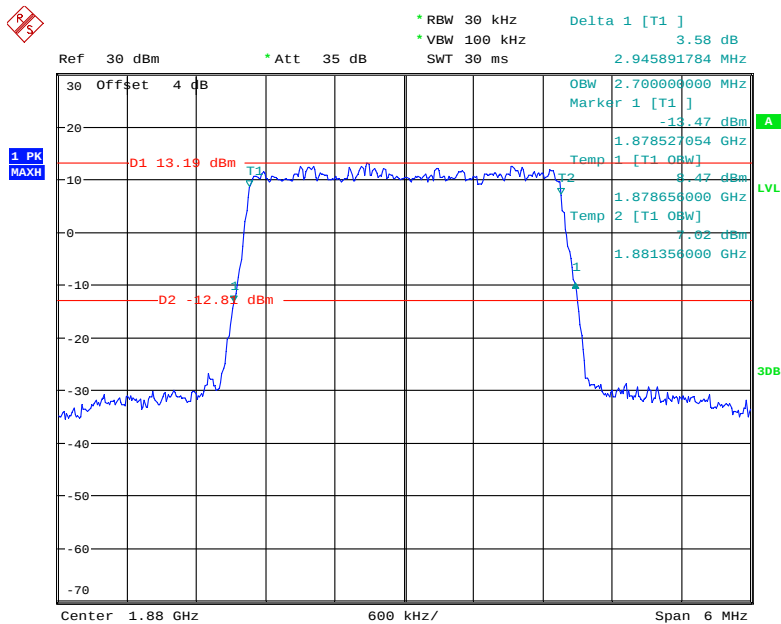

Page 38 of 131


16QAM_5 MHz

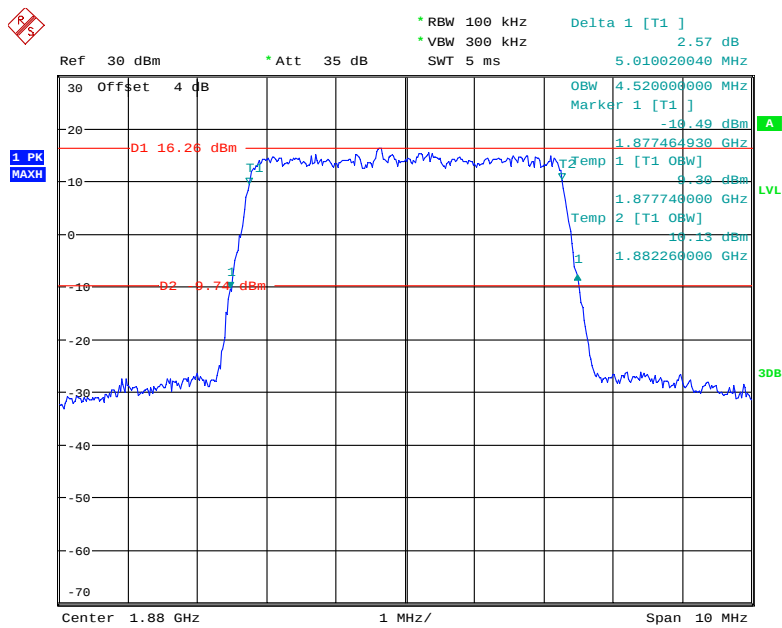

Date: 16.MAR.2019 13:28:48


LTE Band 4

QPSK_1.4 MHz

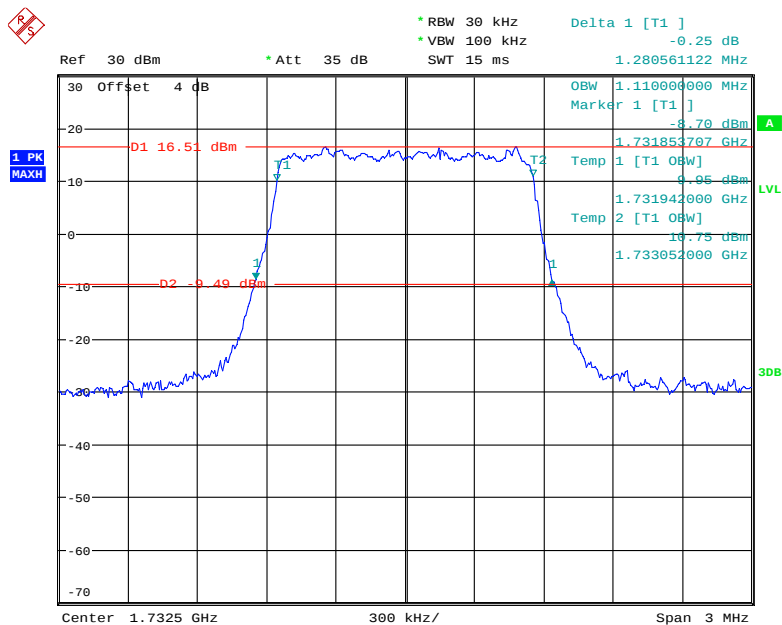


Date: 16.MAR.2019 13:55:10

QPSK_3 MHz

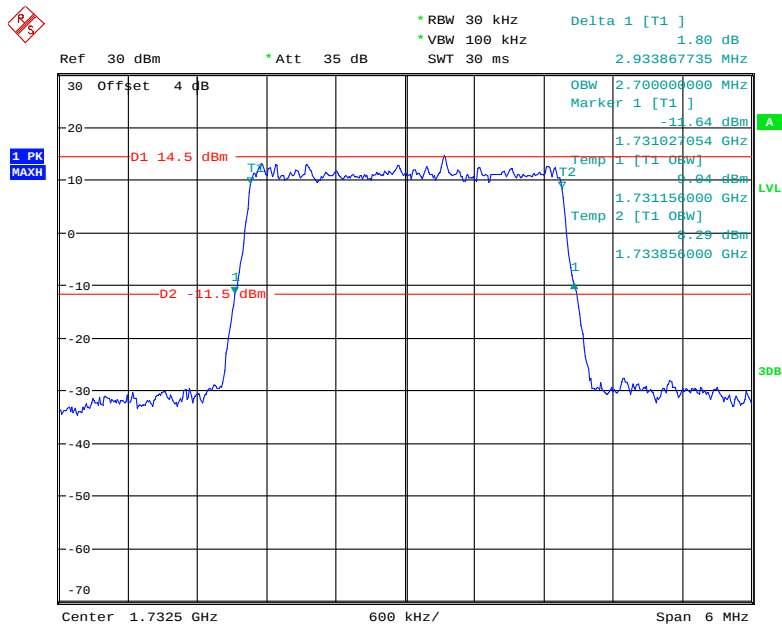


Date: 16.MAR.2019 13:56:24

QPSK_5 MHz

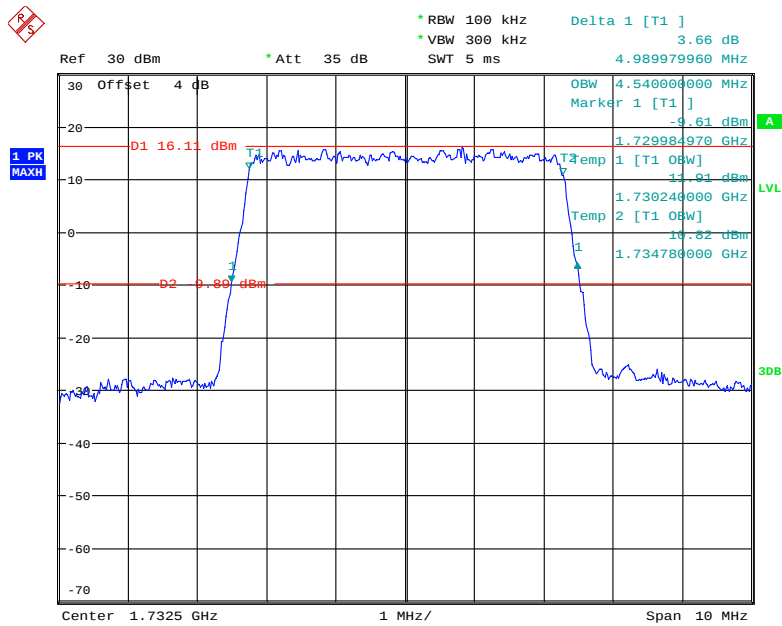


Date: 16.MAR.2019 13:57:29

QPSK_10 MHz

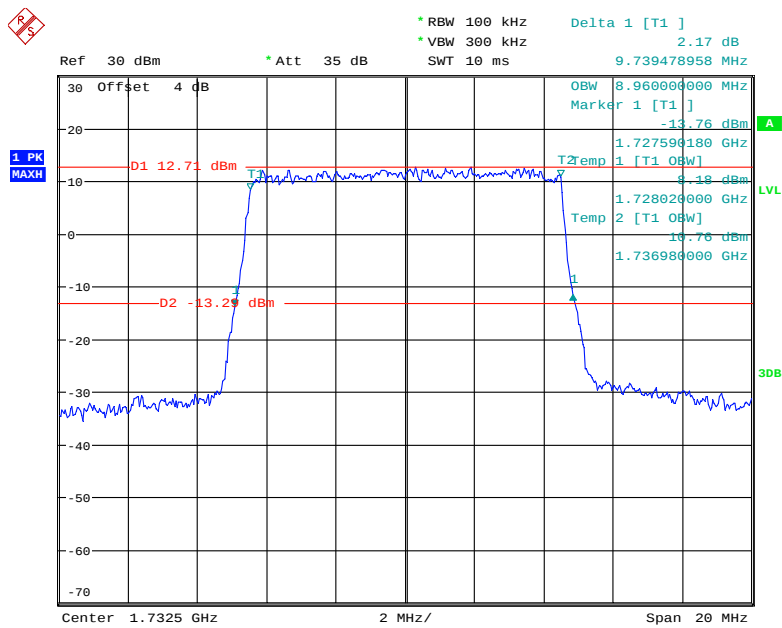


Date: 16.MAR.2019 13:58:47

QPSK_15 MHz

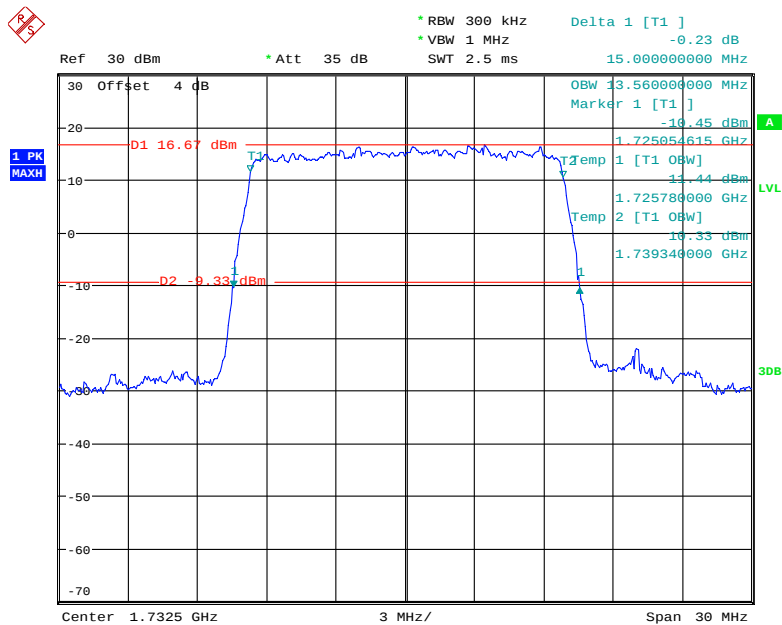


Date: 16.MAR.2019 14:01:09

QPSK_20 MHz

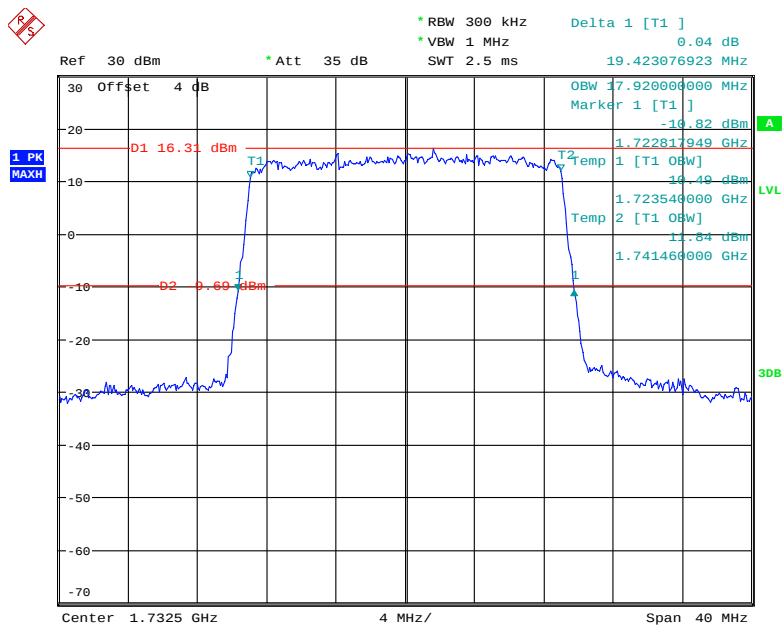


Date: 16.MAR.2019 14:02:30

16QAM_1.4 MHz

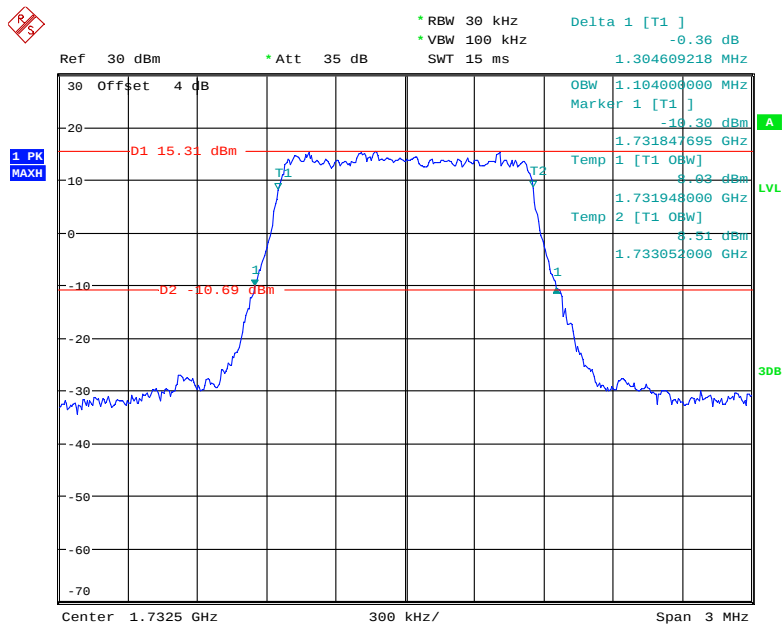


Date: 16.MAR.2019 13:55:47

16QAM_3 MHz

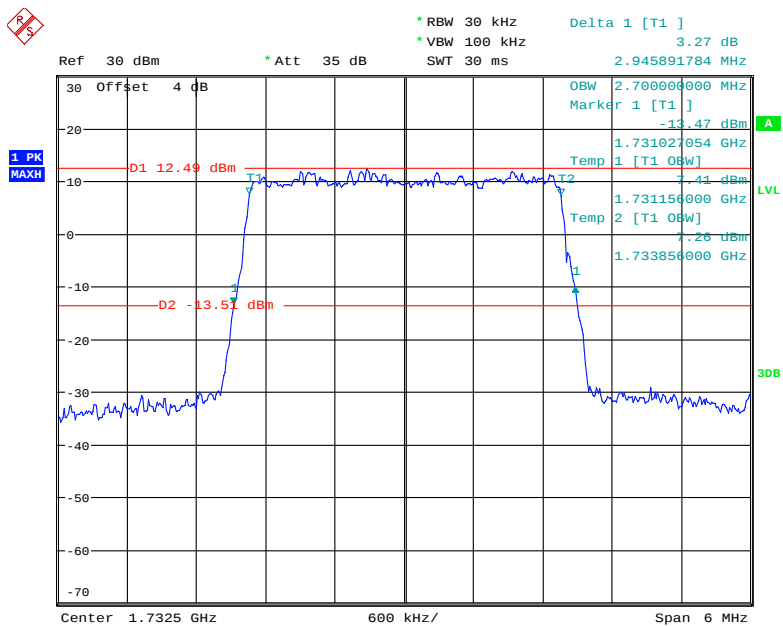

Date: 16.MAR.2019 13:56:51


16QAM_5 MHz

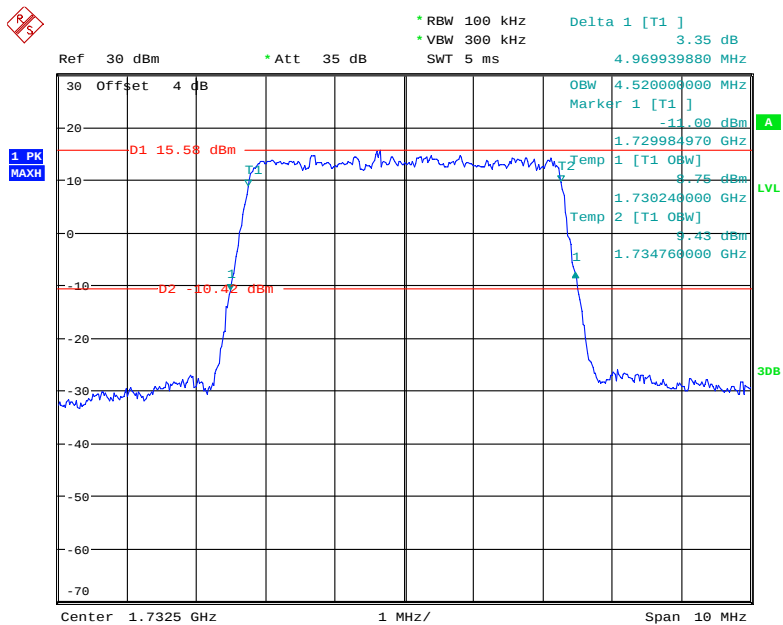

Date: 16.MAR.2019 13:58:07


LTE Band 5:

QPSK_1.4 MHz

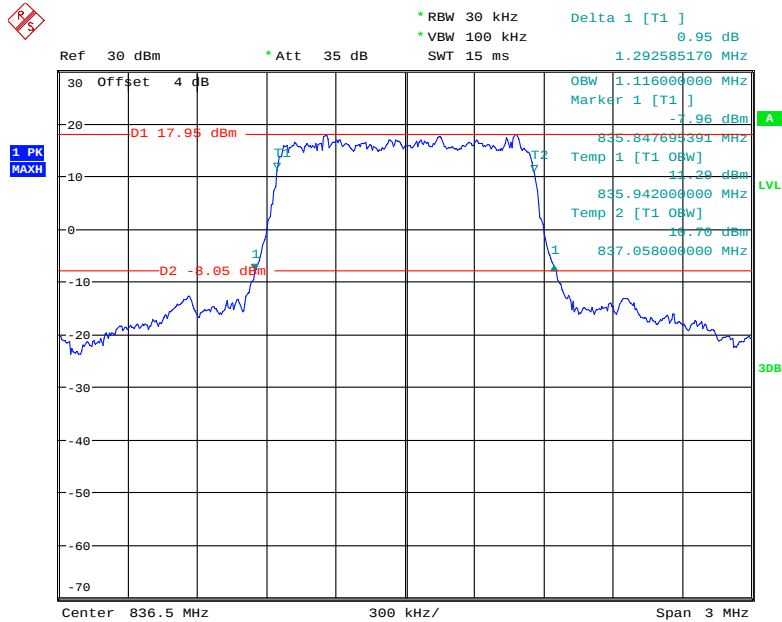


Date: 16.MAR.2019 14:06:04

QPSK_3 MHz

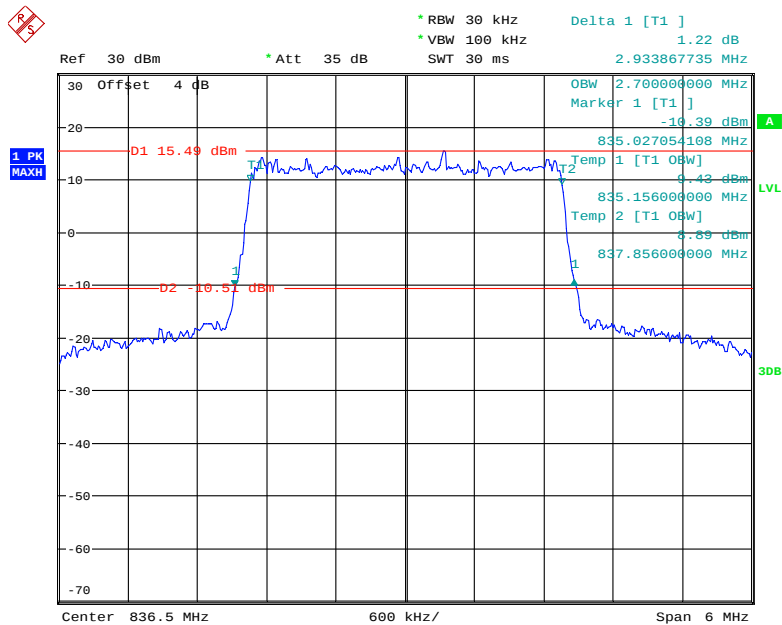


Date: 16.MAR.2019 14:07:14

QPSK_5 MHz

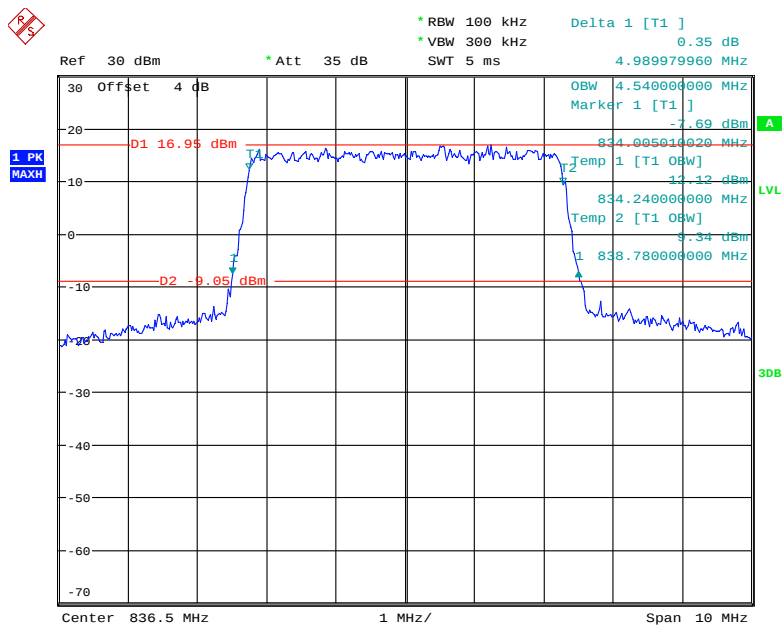


Date: 16.MAR.2019 14:08:22

QPSK_10 MHz

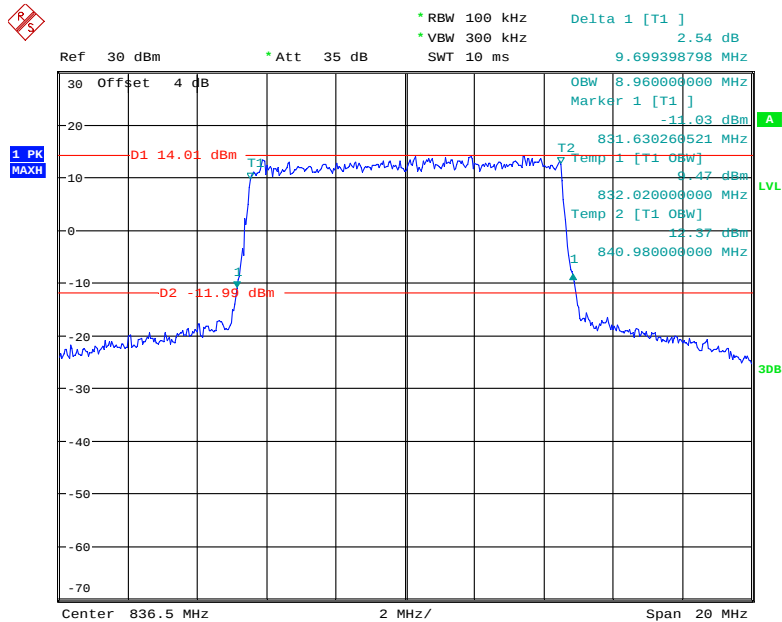


Date: 16.MAR.2019 14:09:55

16QAM_1.4 MHz

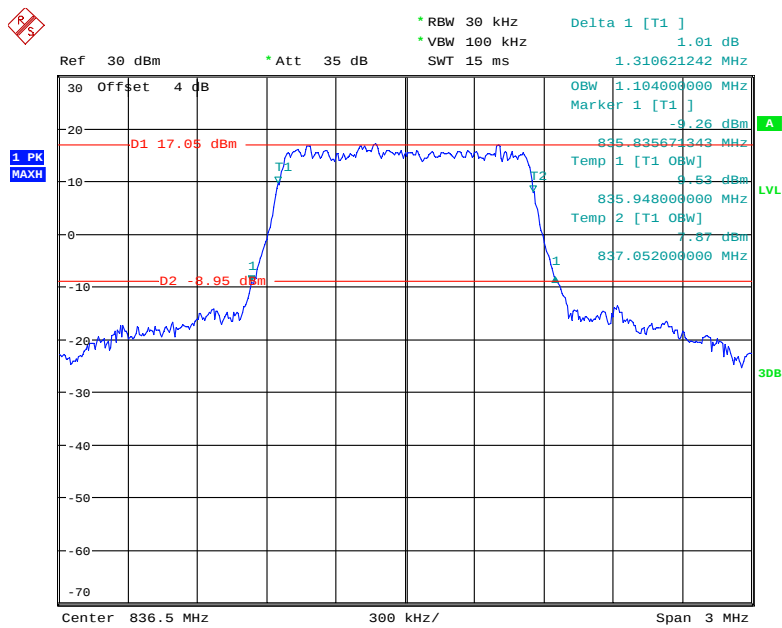


Date: 16.MAR.2019 14:06:39

16QAM_3 MHz

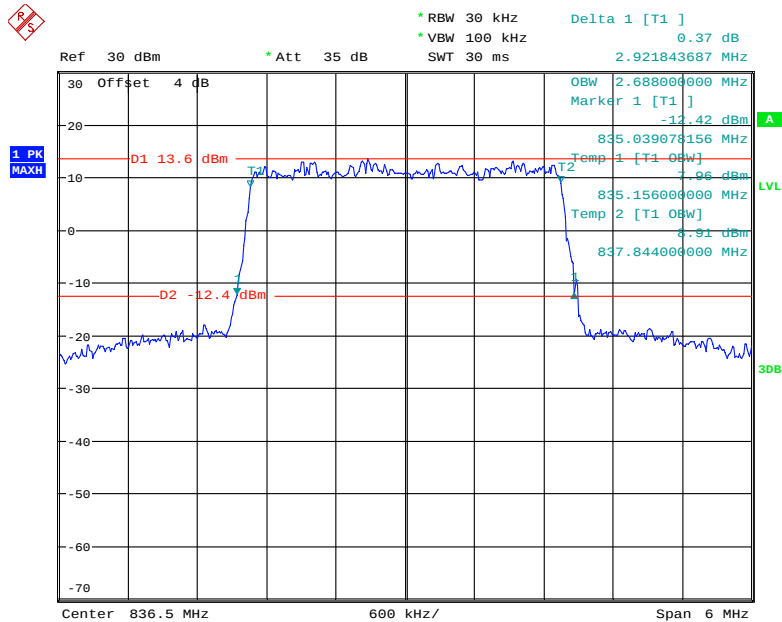

Date: 16.MAR.2019 14:07:41


16QAM_5 MHz

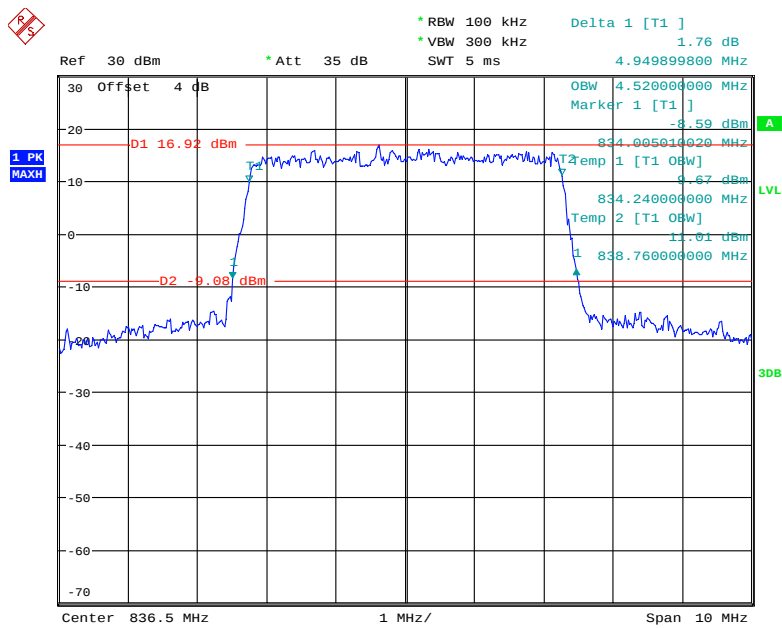

Date: 16.MAR.2019 14:09:09


LTE Band 12:

QPSK_1.4 MHz

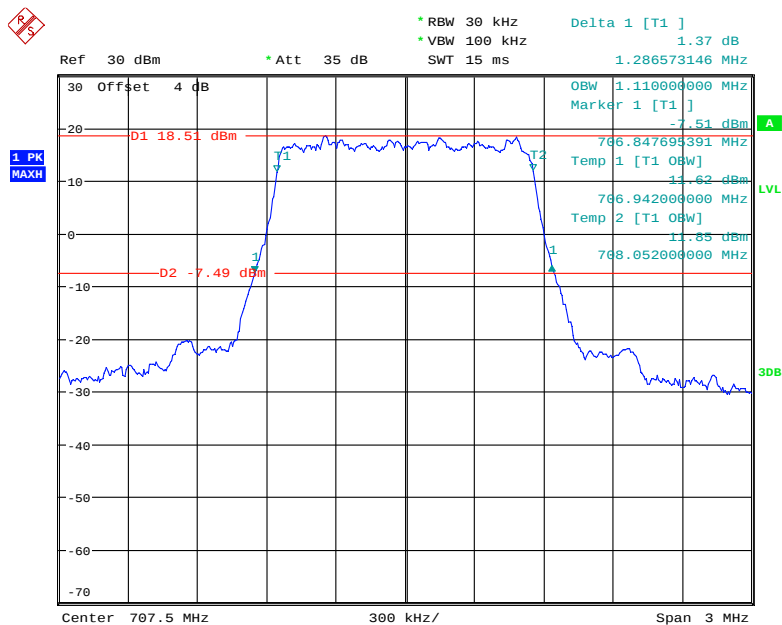


Date: 16.MAR.2019 14:12:28

QPSK_3 MHz

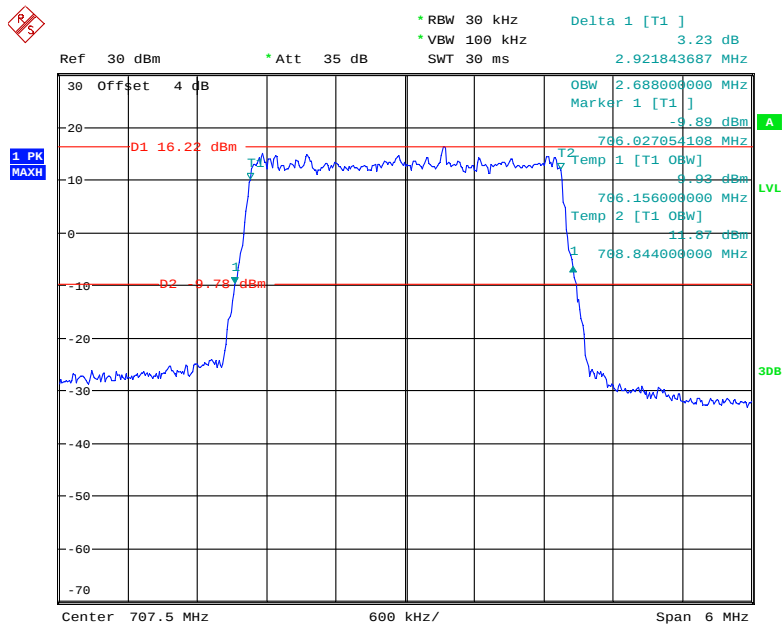


Date: 16.MAR.2019 14:13:34

QPSK_5 MHz

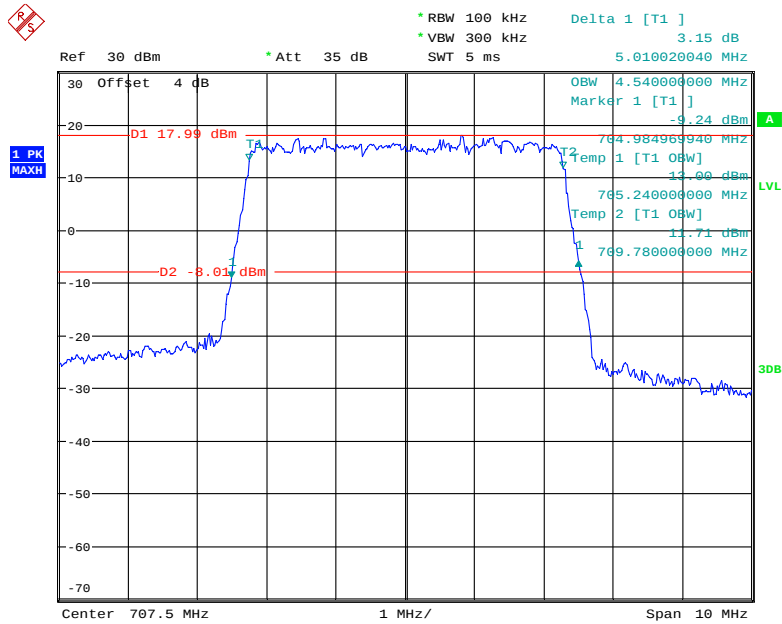


Date: 16.MAR.2019 14:15:01

QPSK_10 MHz

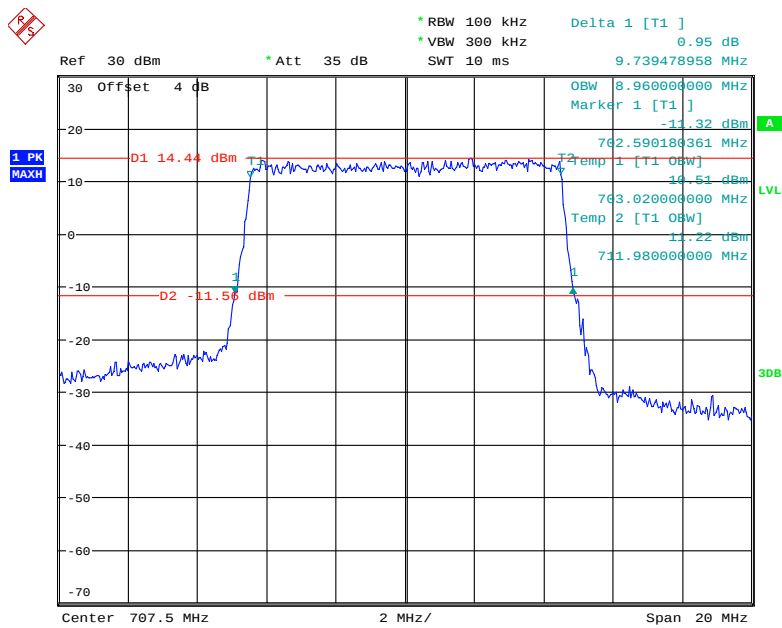


Date: 16.MAR.2019 14:16:19

16QAM_1.4 MHz

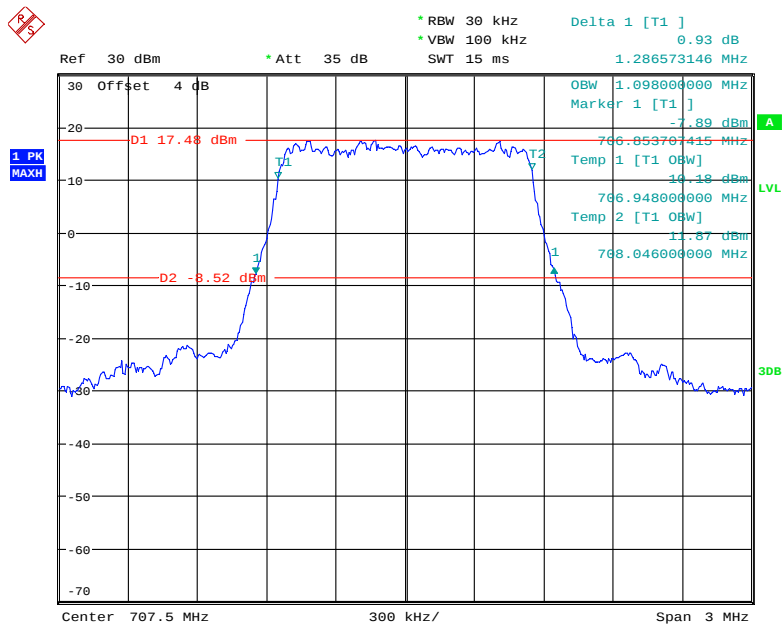


Date: 16.MAR.2019 14:13:00

16QAM_3 MHz

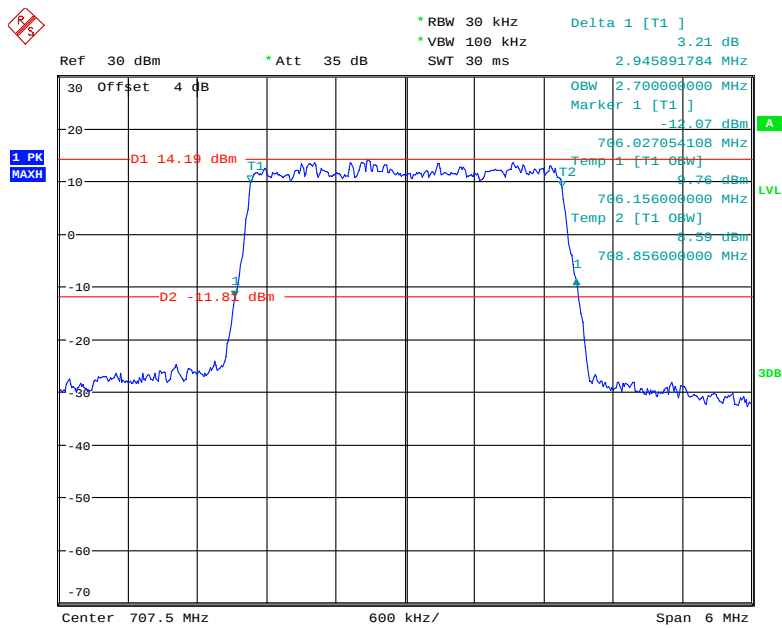


Date: 16.MAR.2019 14:14:13


16QAM_5 MHz

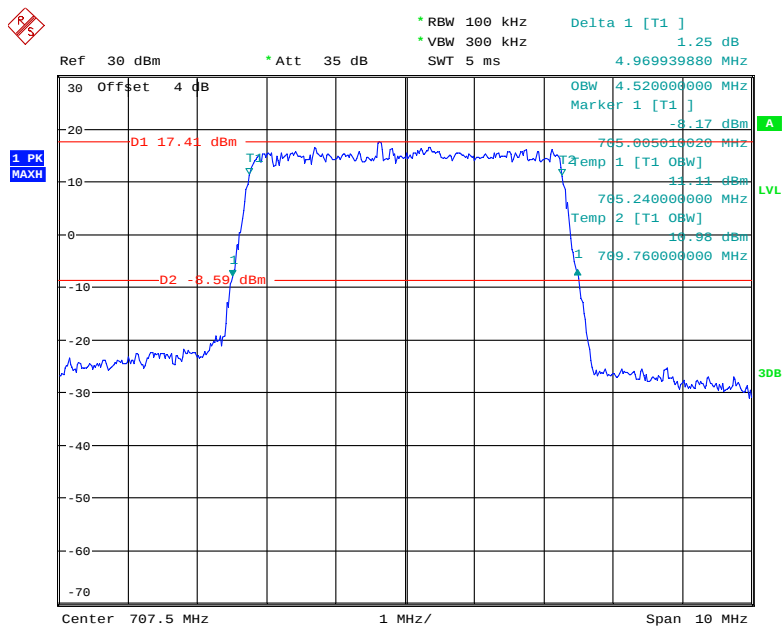

Date: 16.MAR.2019 14:15:40

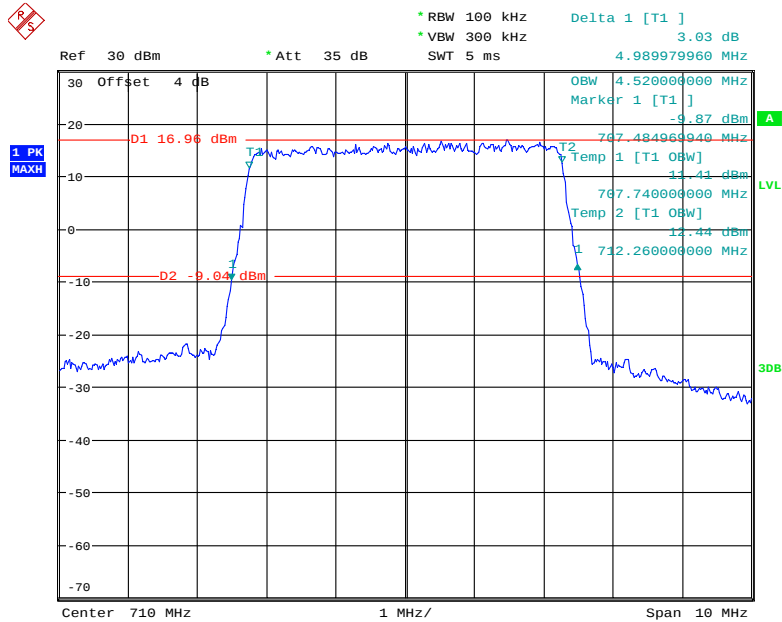
LTE Band 17:**QPSK_5 MHz**

Date: 16.MAR.2019 14:20:17

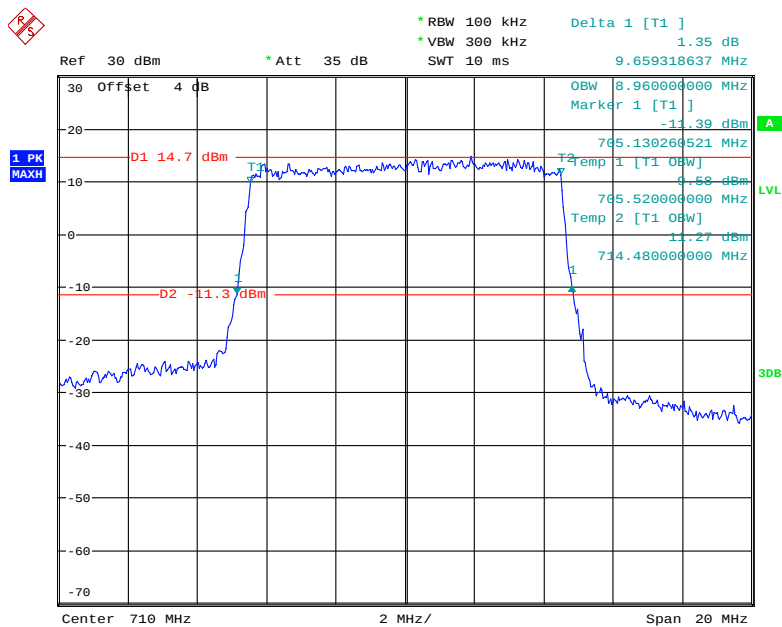QPSK_10 MHz

Date: 16.MAR.2019 14:21:35

16QAM_5 MHz

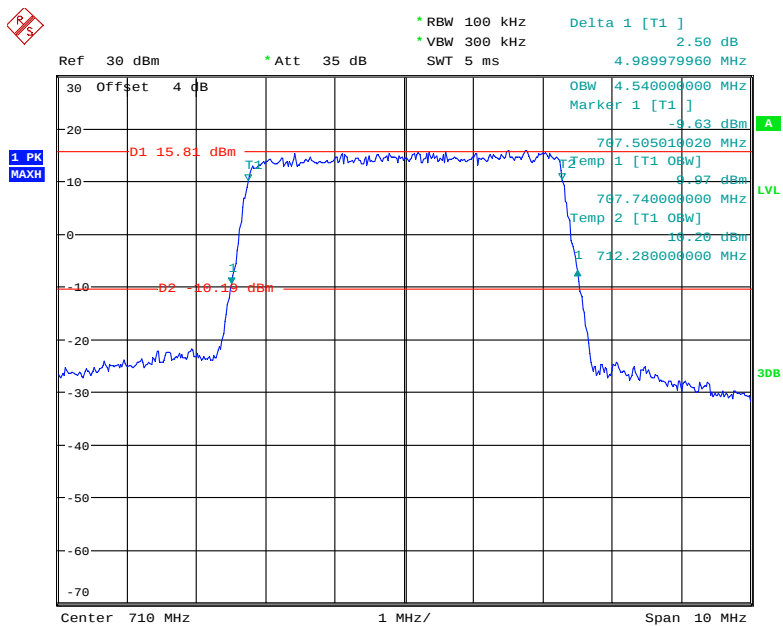

Date: 16.MAR.2019 14:20:52

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

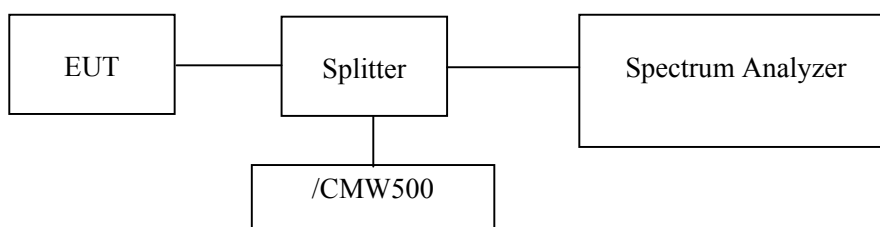

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	23.8~25.1°C
Relative Humidity:	43~52 %
ATM Pressure:	100.4~101.2 kPa

The testing was performed by Elena Lei on 2019-03-16 and 2019-03-20.

Test mode: Transmitting(Middle Channel)


Test Result: Compliance, Please refer to the following plots.

WCDMA Band II, Rel99

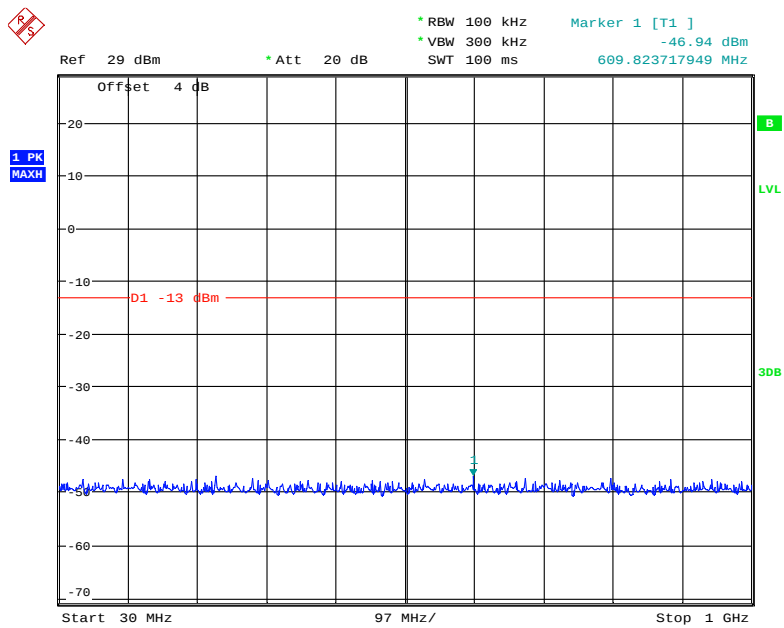


Date: 20.MAR.2019 09:19:46

Fundamental

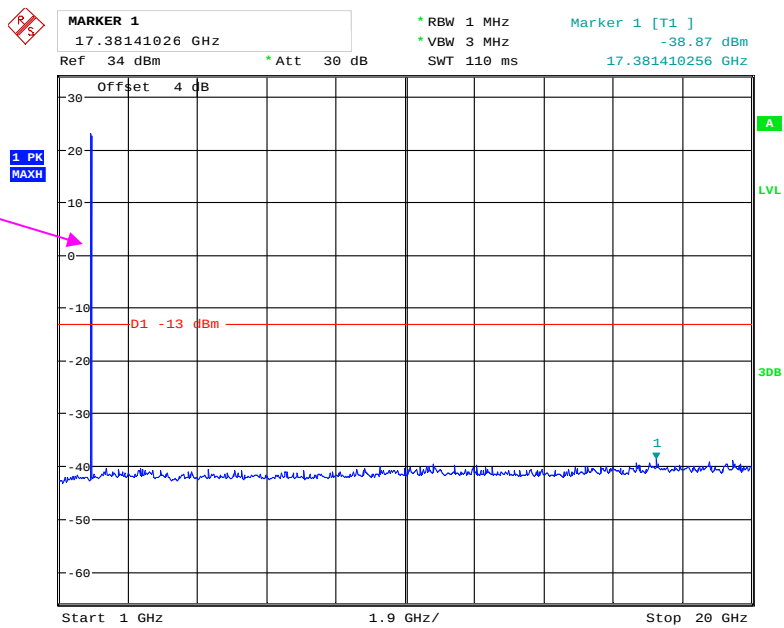


Date: 20.MAR.2019 09:22:13

WCDMA Band V, Rel99

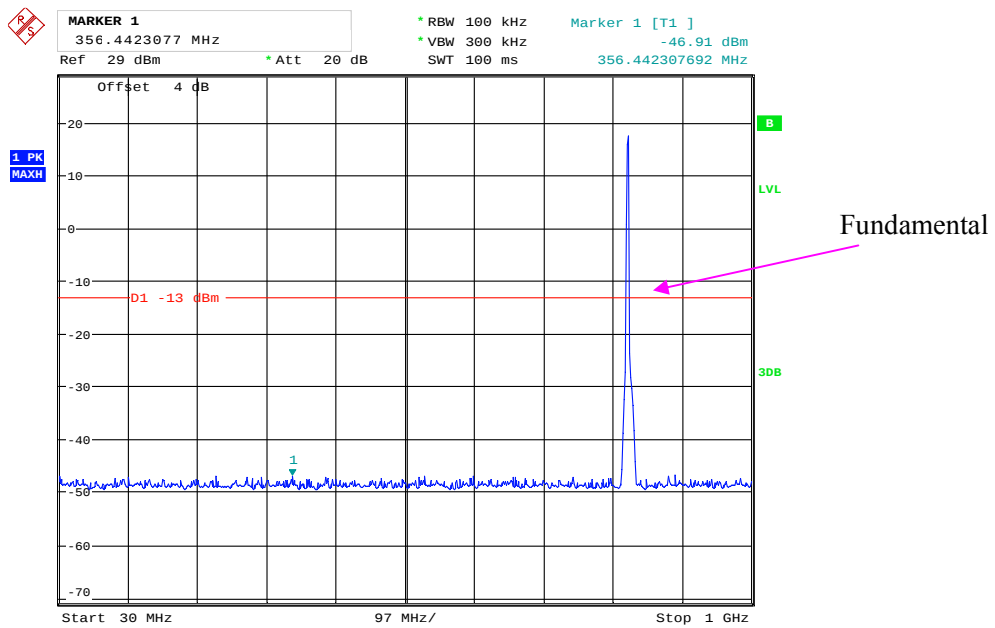


Date: 20.MAR.2019 09:20:30

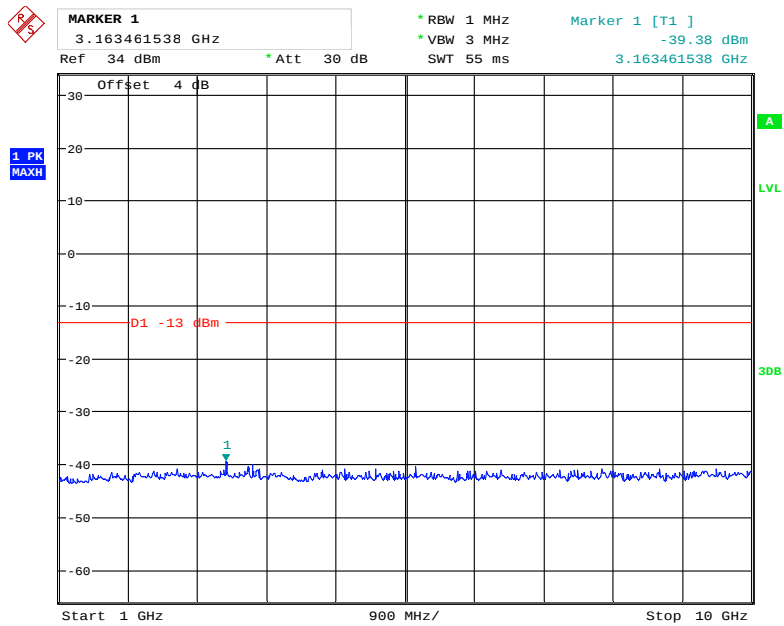

Date: 20.MAR.2019 09:26:24


LTE Band 2 (Middle Channel)

QPSK_1.4 MHz

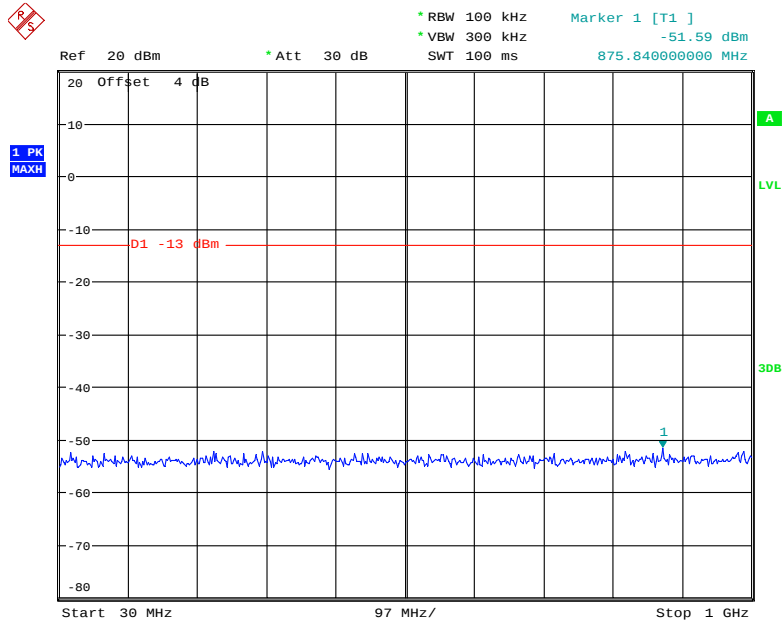


Date: 16.MAR.2019 10:52:19

Fundamental

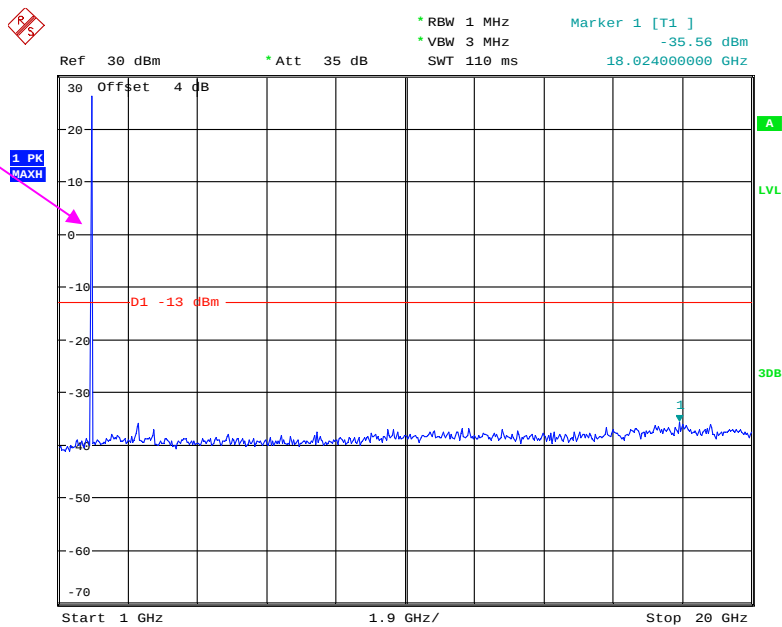


Date: 16.MAR.2019 10:52:30

QPSK_3 MHz

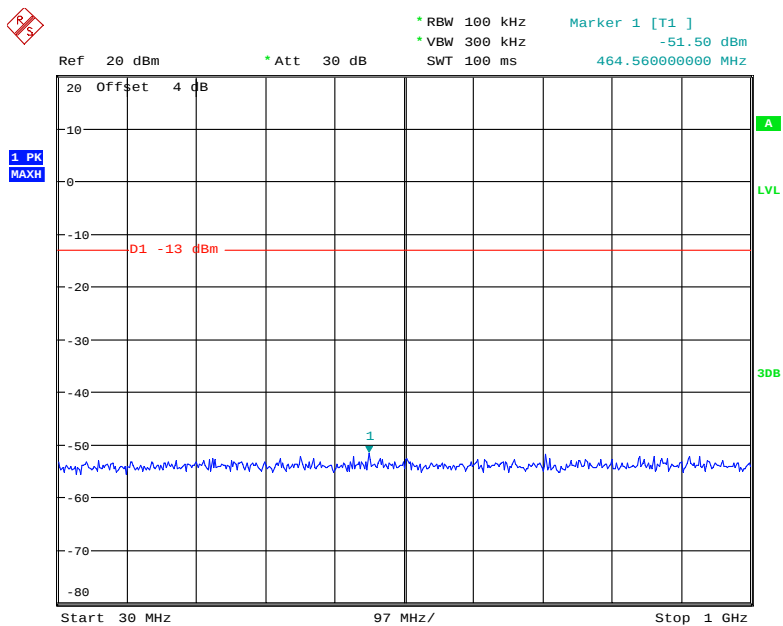


Date: 16.MAR.2019 10:52:51

Fundamental

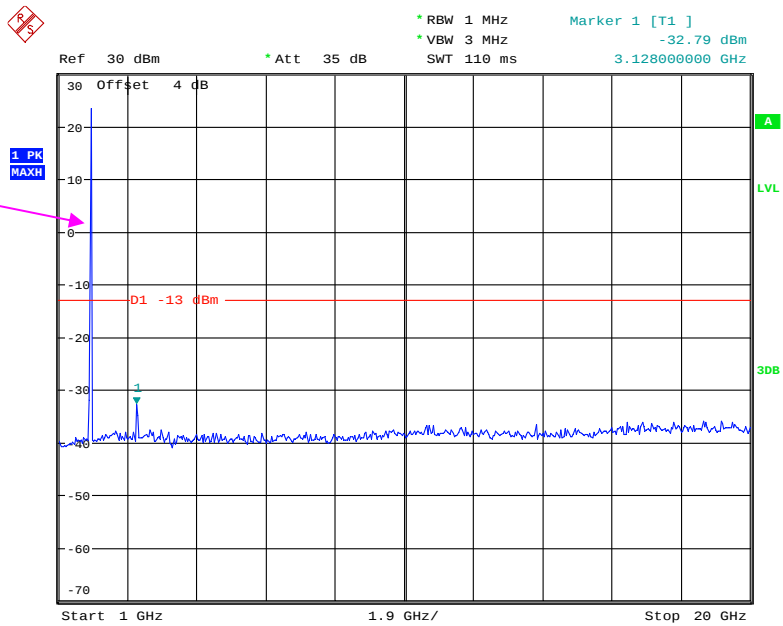


Date: 16.MAR.2019 10:53:05

QPSK_5 MHz

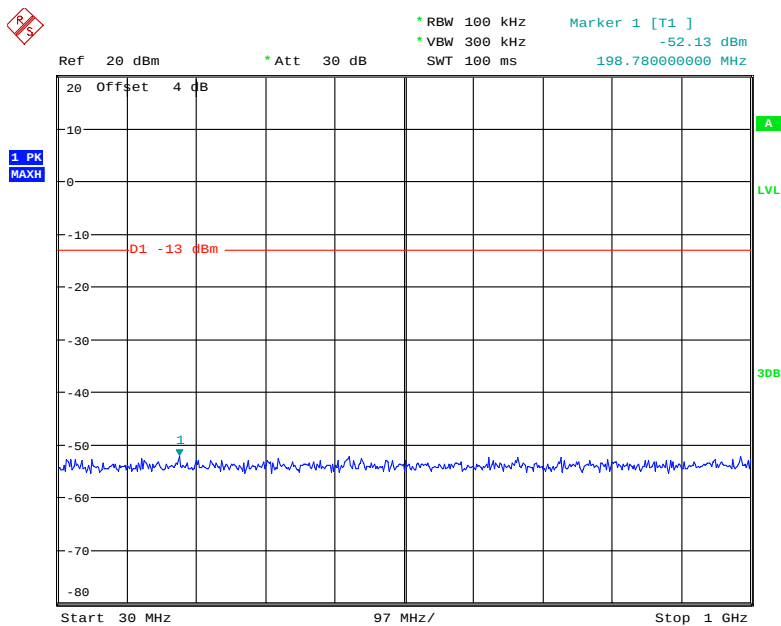


Date: 16.MAR.2019 10:53:27

Fundamental

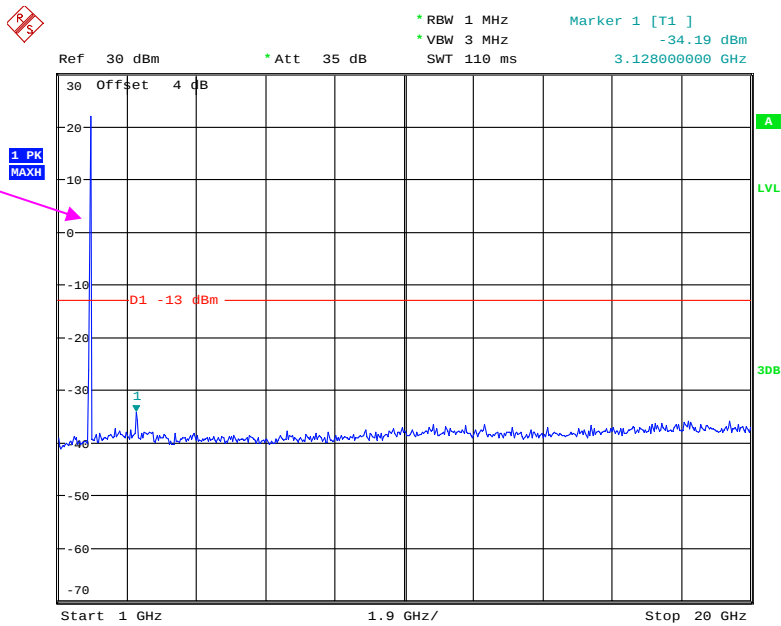


Date: 16.MAR.2019 10:53:42

QPSK_10 MHz

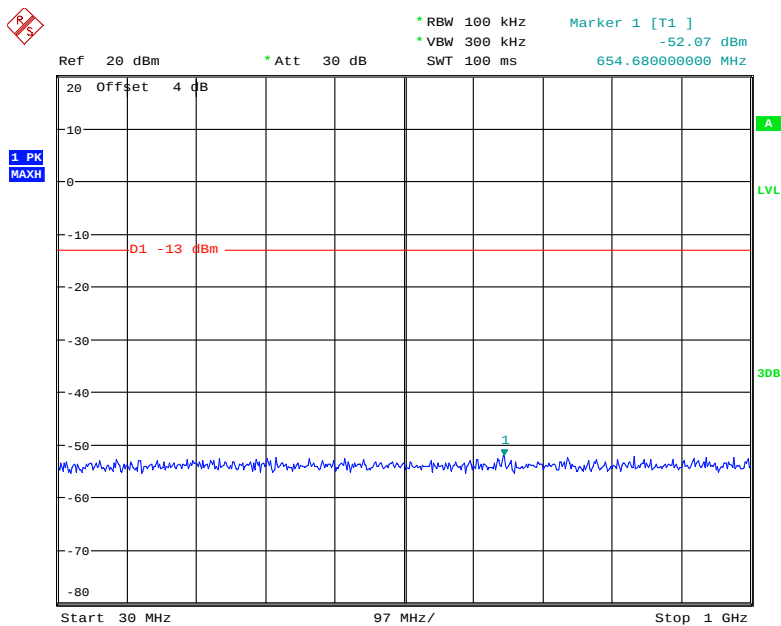


Date: 16.MAR.2019 10:54:04

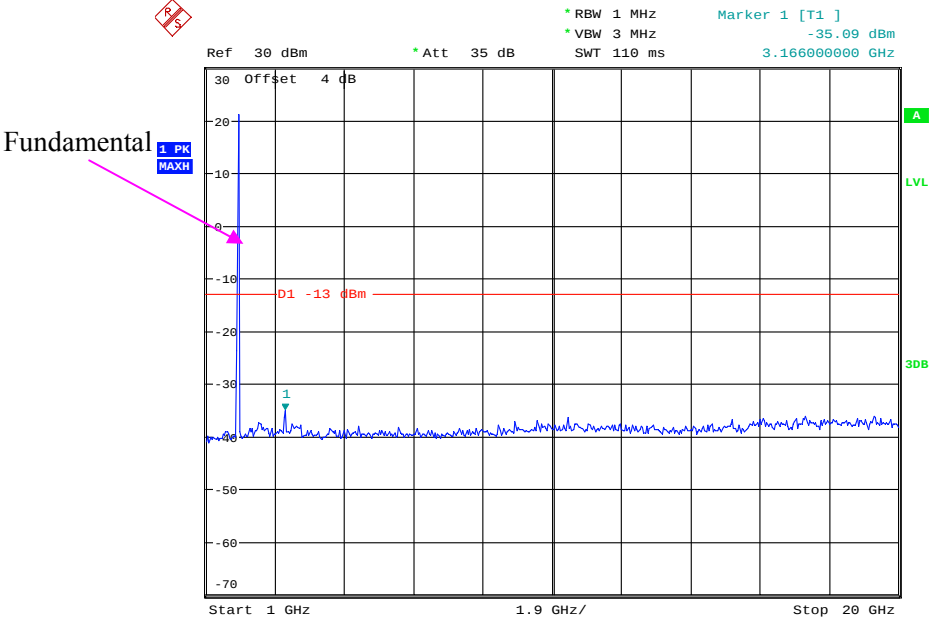


Date: 16.MAR.2019 10:54:15

QPSK_15 MHz

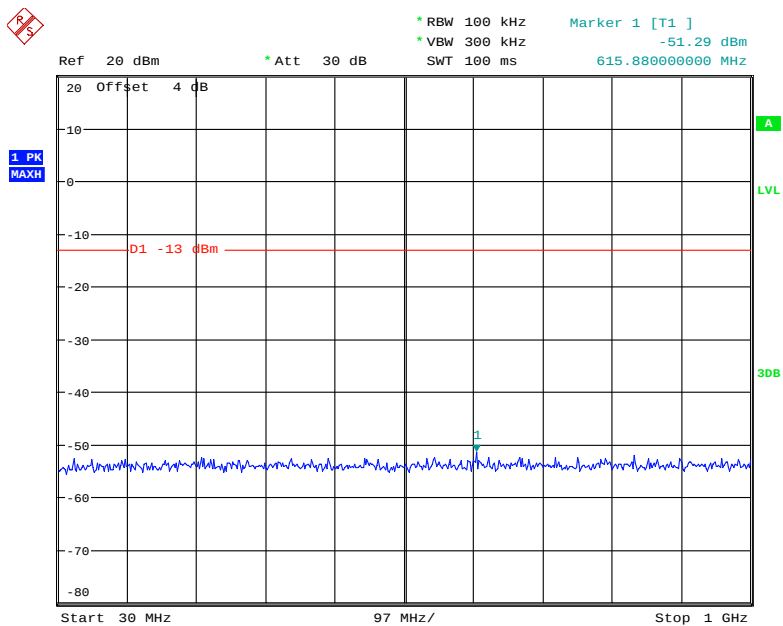


Date: 16.MAR.2019 10:54:40

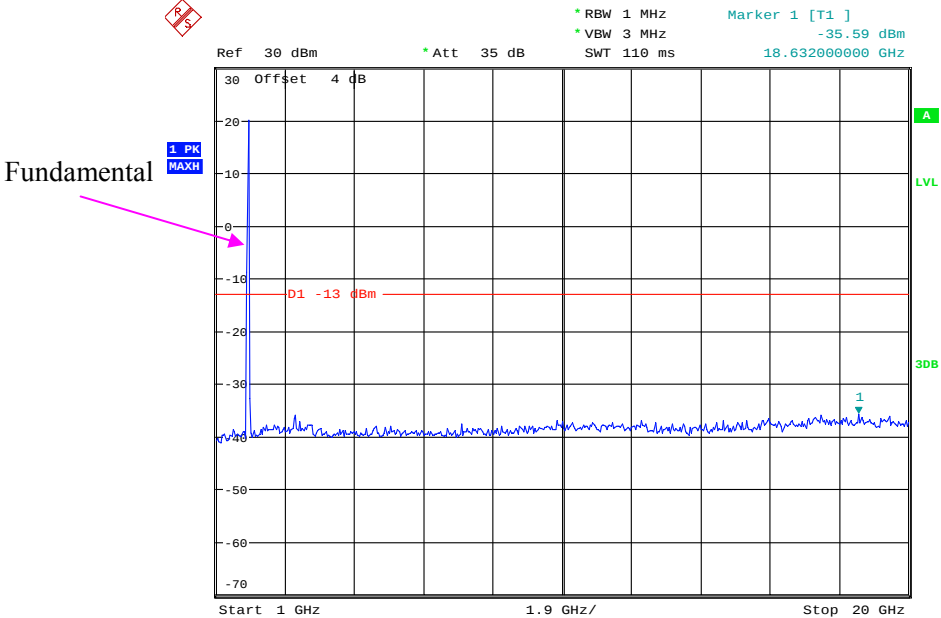


Date: 16.MAR.2019 10:54:55

QPSK_20 MHz

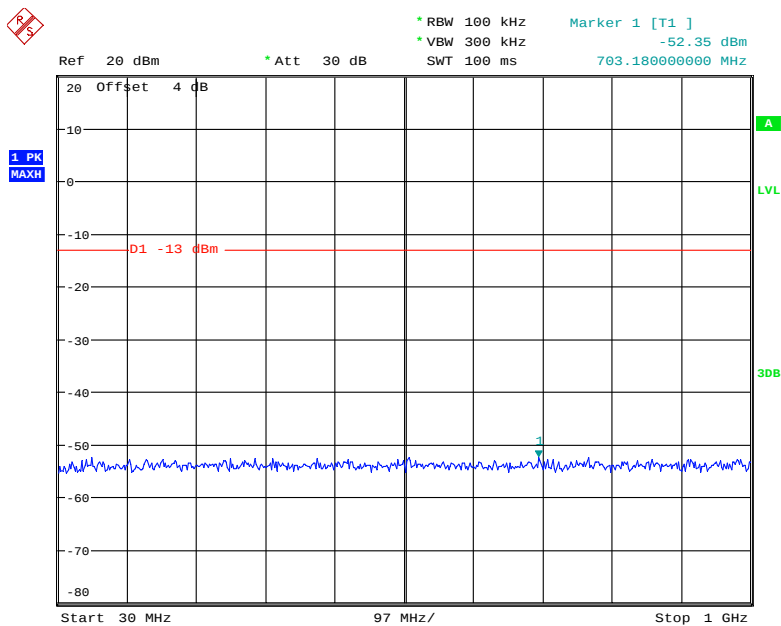

Date: 16.MAR.2019 10:55:21


Fundamental

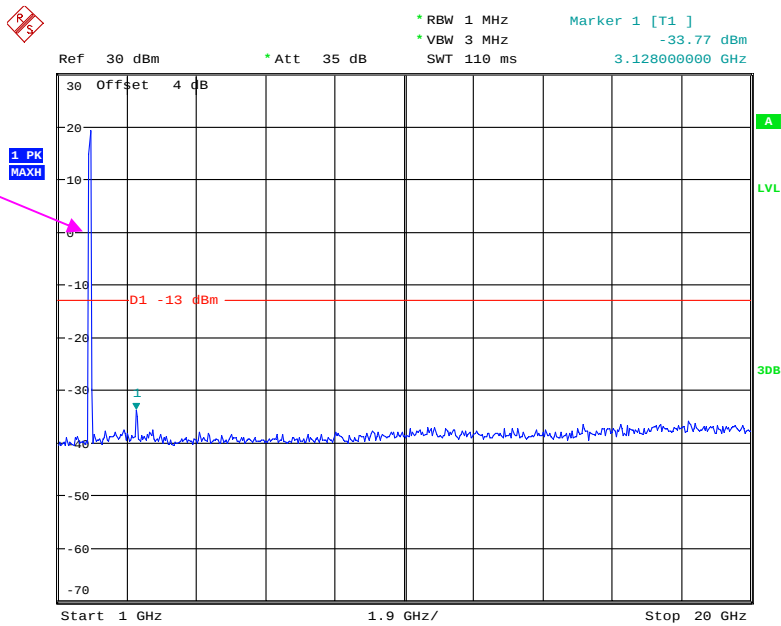

Date: 16.MAR.2019 10:55:31


LTE Band 4 (Middle Channel)

QPSK_1.4 MHz

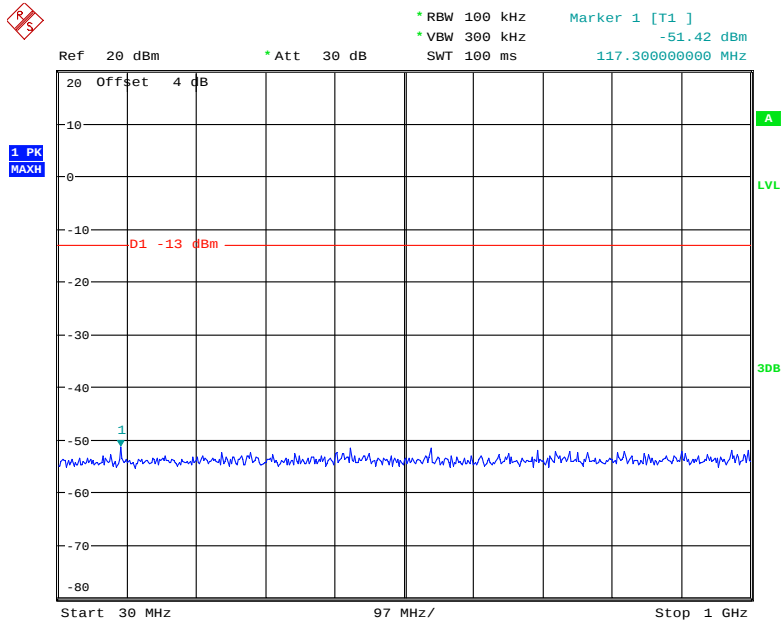


Date: 16.MAR.2019 10:55:56

Fundamental

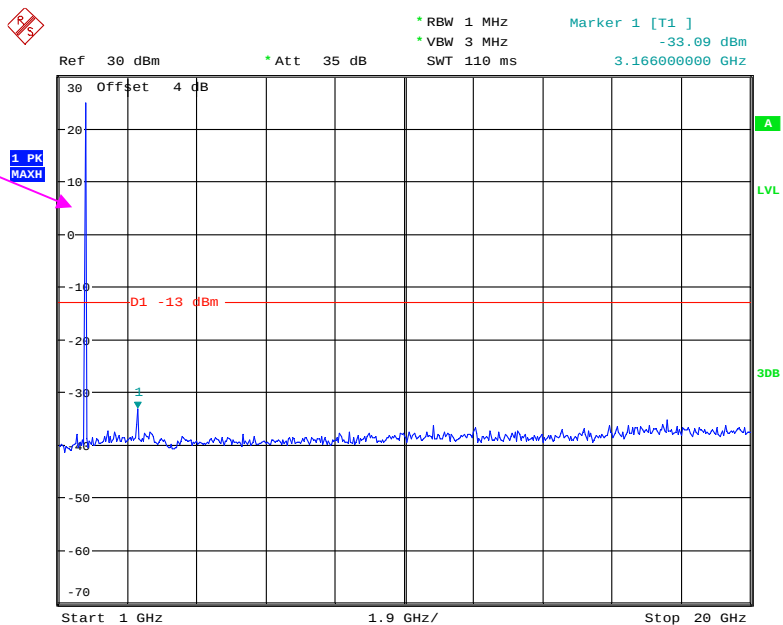


Date: 16.MAR.2019 10:56:07

QPSK_3 MHz

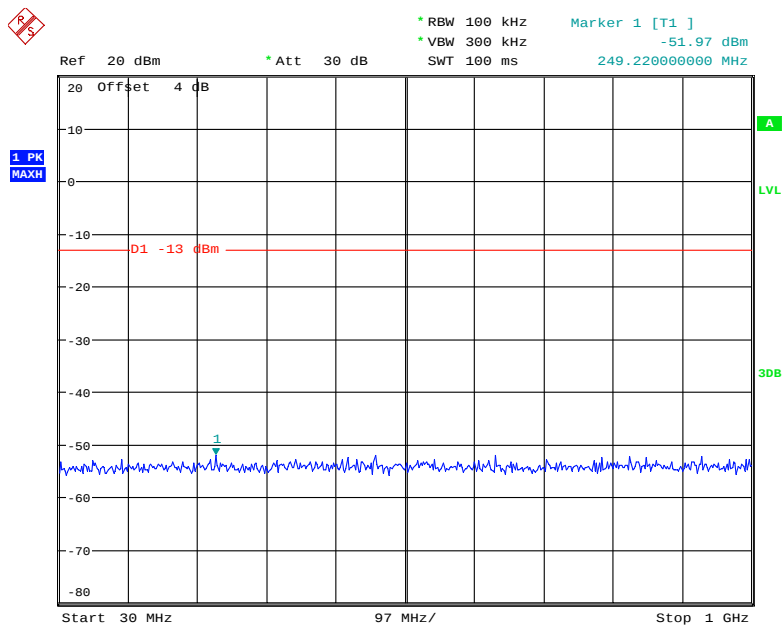


Date: 16.MAR.2019 10:56:24

Fundamental

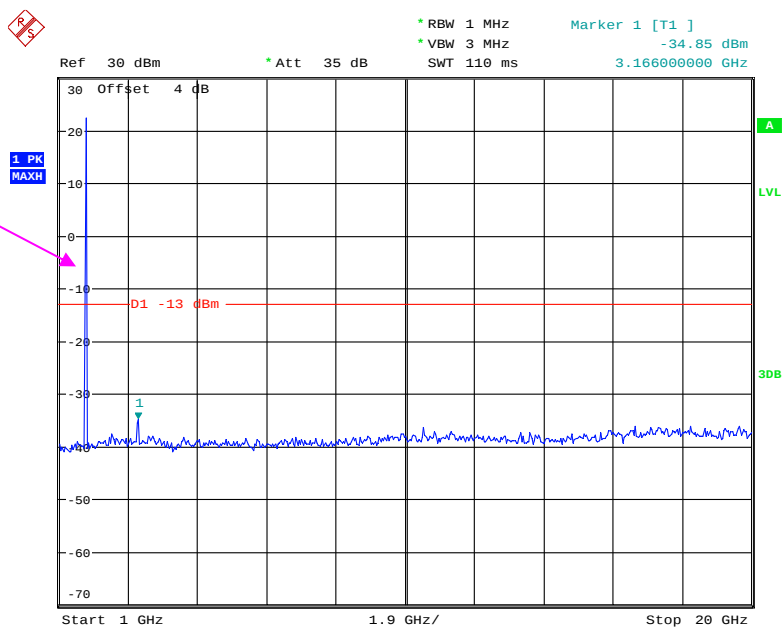


Date: 16.MAR.2019 10:56:35

QPSK_5 MHz

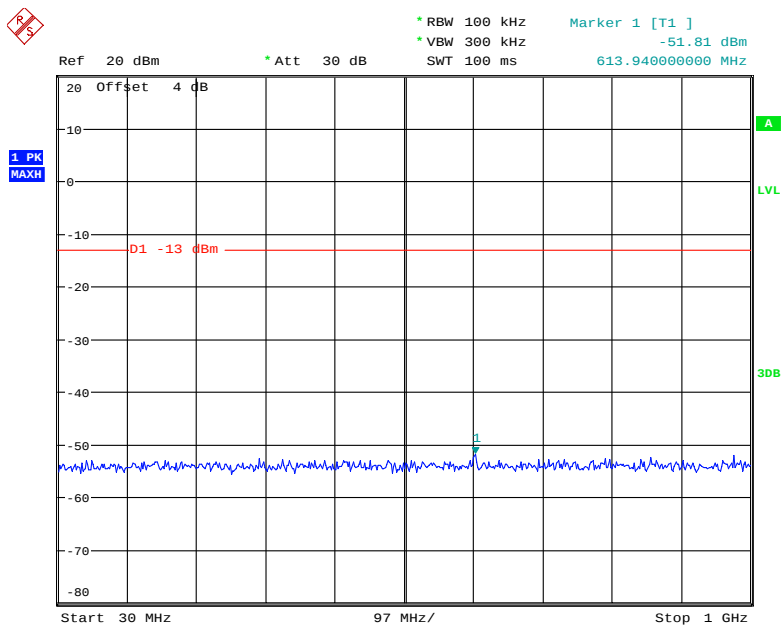


Date: 16.MAR.2019 10:56:57

Fundamental

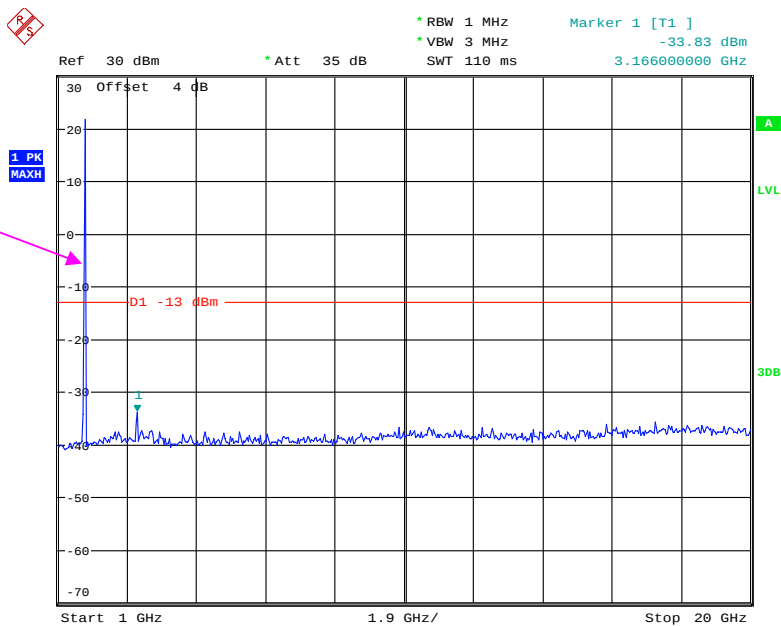


Date: 16.MAR.2019 10:57:12

QPSK_10 MHz

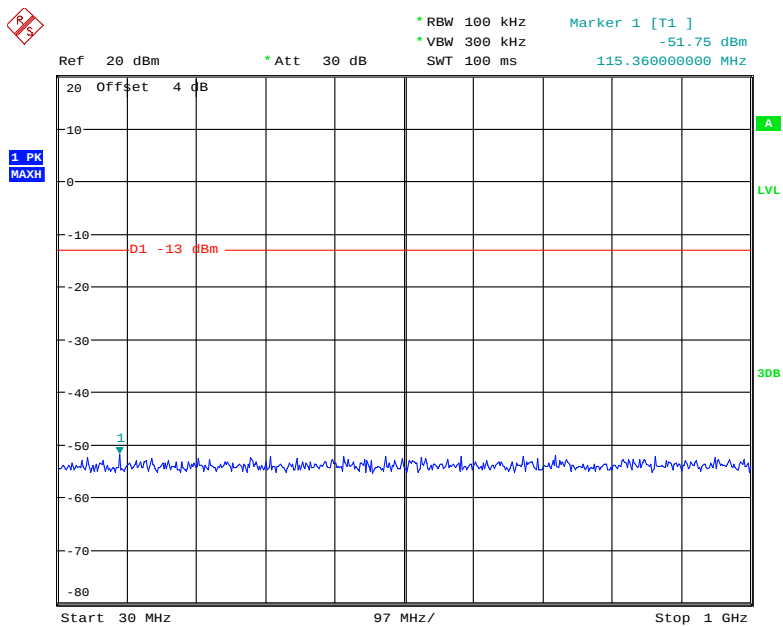


Date: 16.MAR.2019 10:57:33

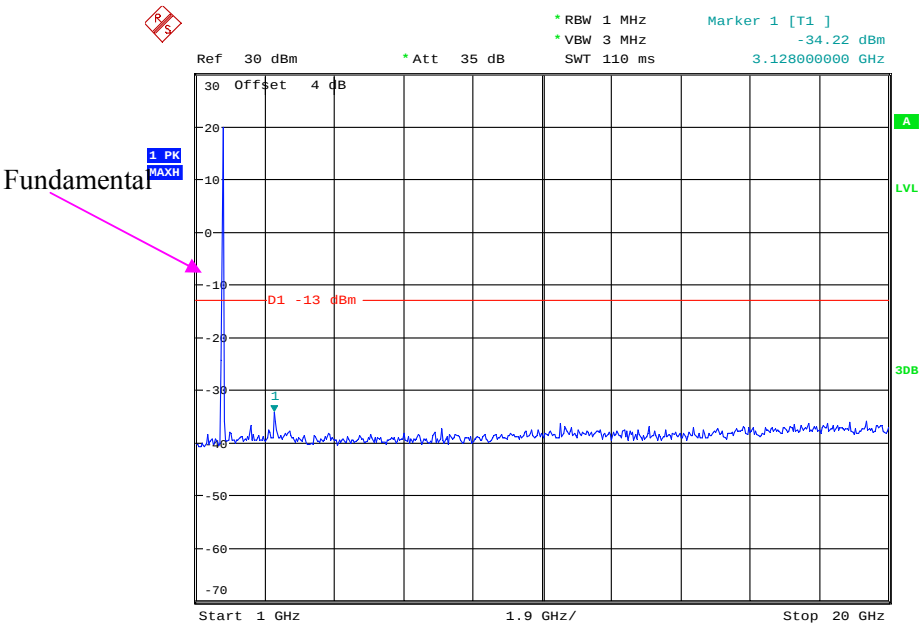


Date: 16.MAR.2019 10:57:44

QPSK_15 MHz

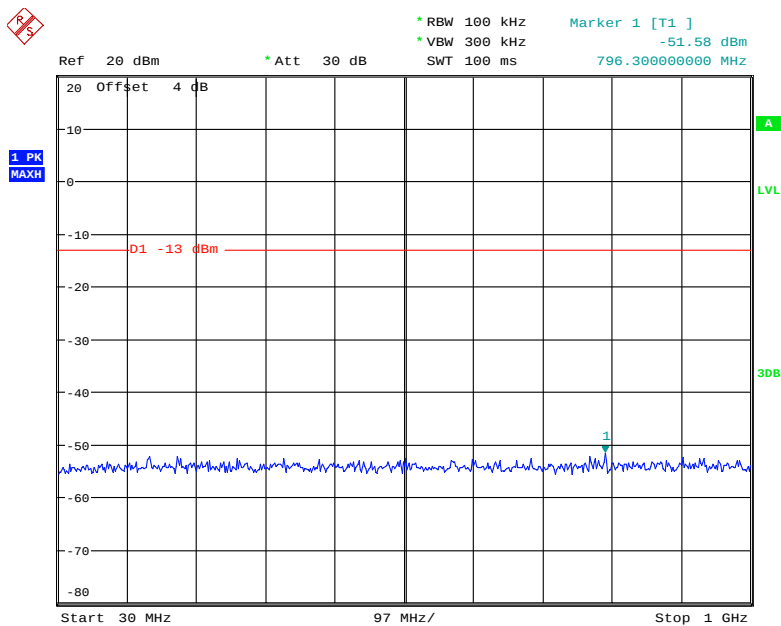


Date: 16.MAR.2019 10:58:06

Fundamental

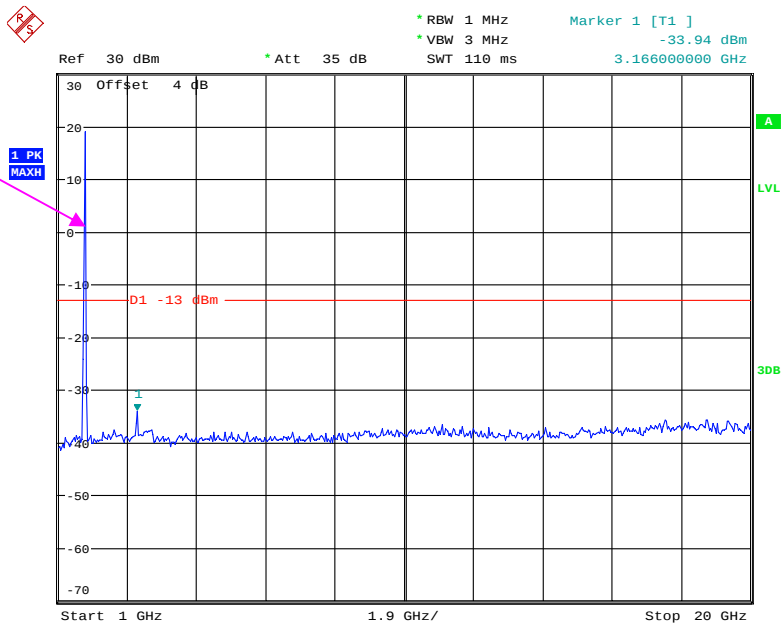


Date: 16.MAR.2019 10:58:21

QPSK_20 MHz

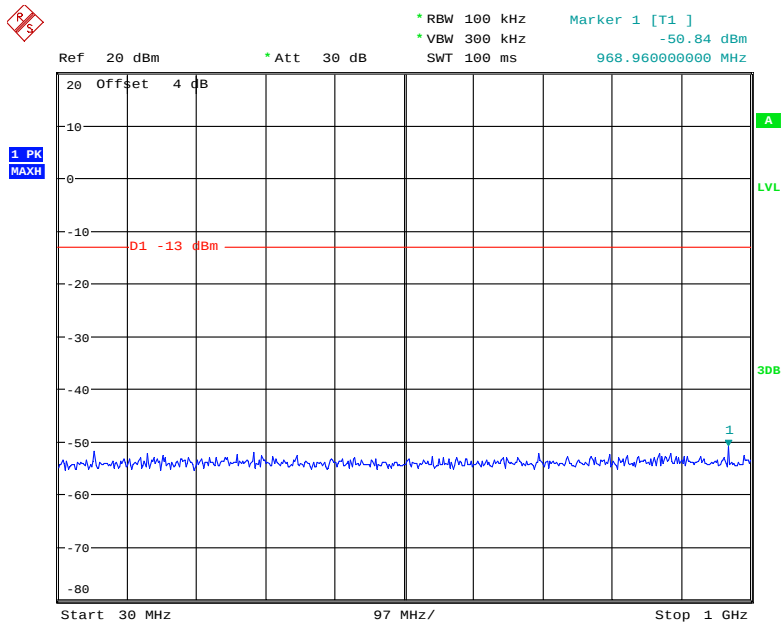


Date: 16.MAR.2019 10:58:46

Fundamental

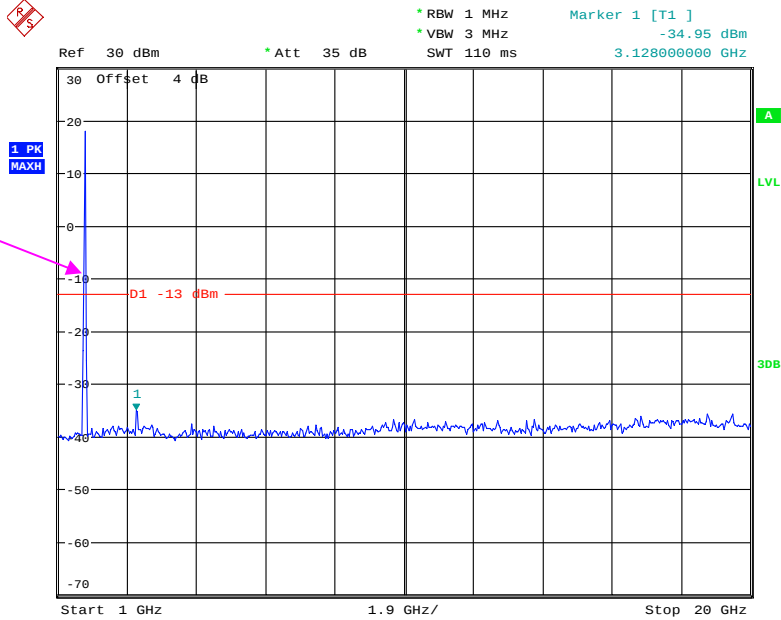


Date: 16.MAR.2019 10:58:57


LTE Band 5 (Middle Channel)


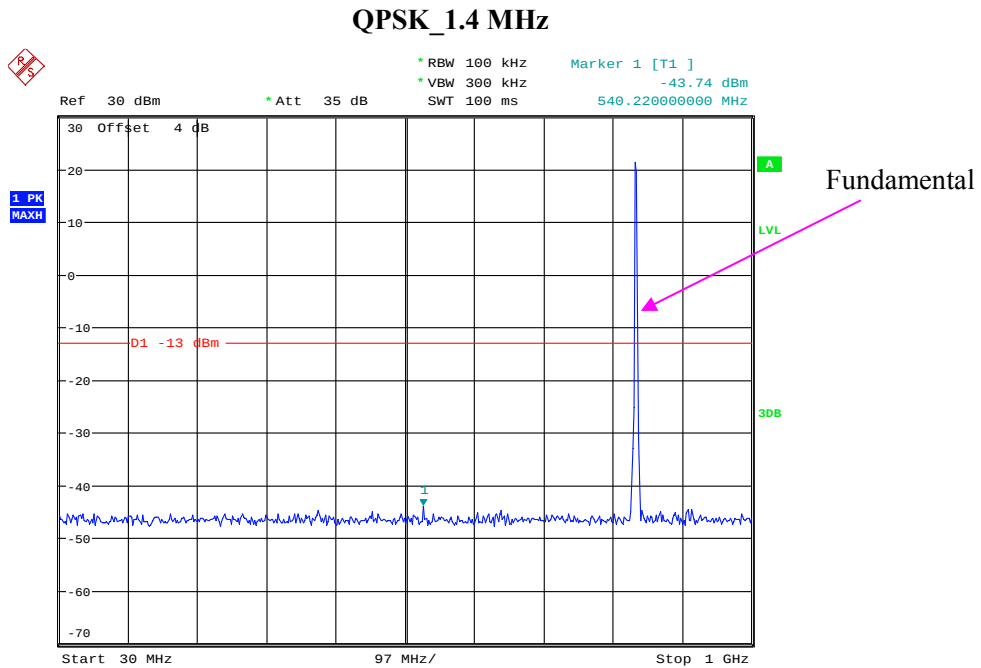


Date: 16.MAR.2019 10:59:24

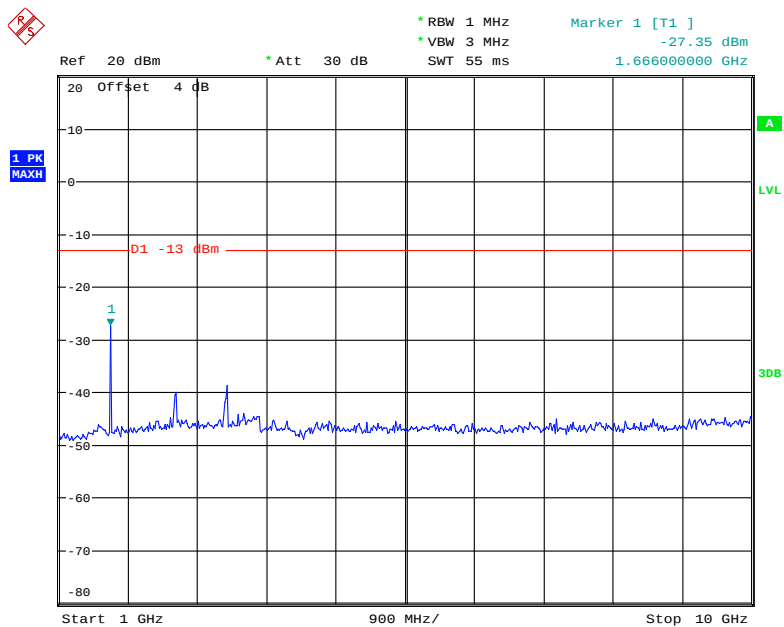


Date: 16.MAR.2019 10:59:38






QPSK_10 MHz

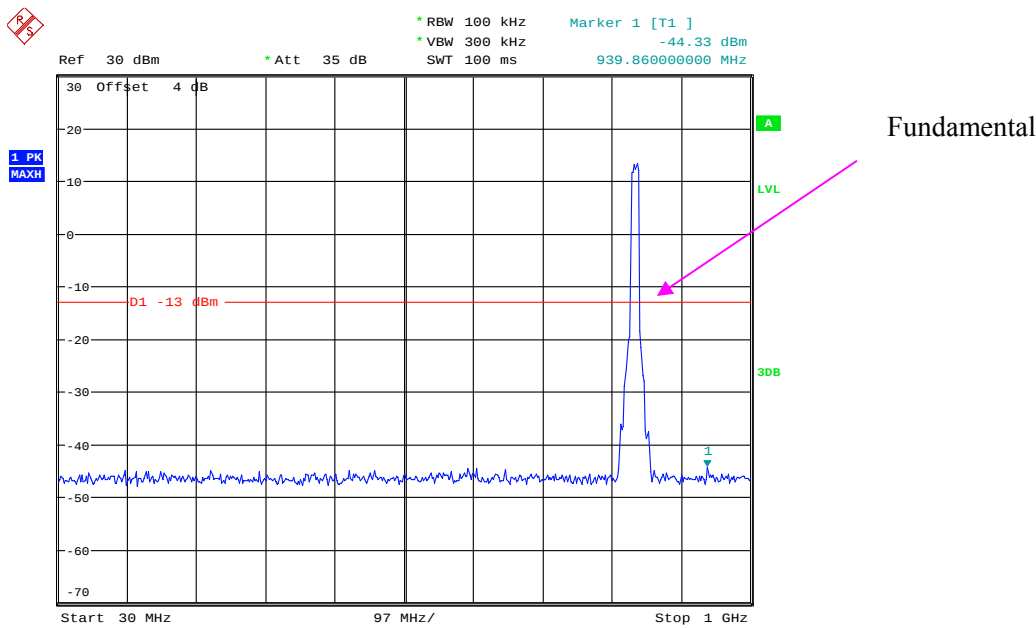


Date: 16.MAR.2019 11:01:05

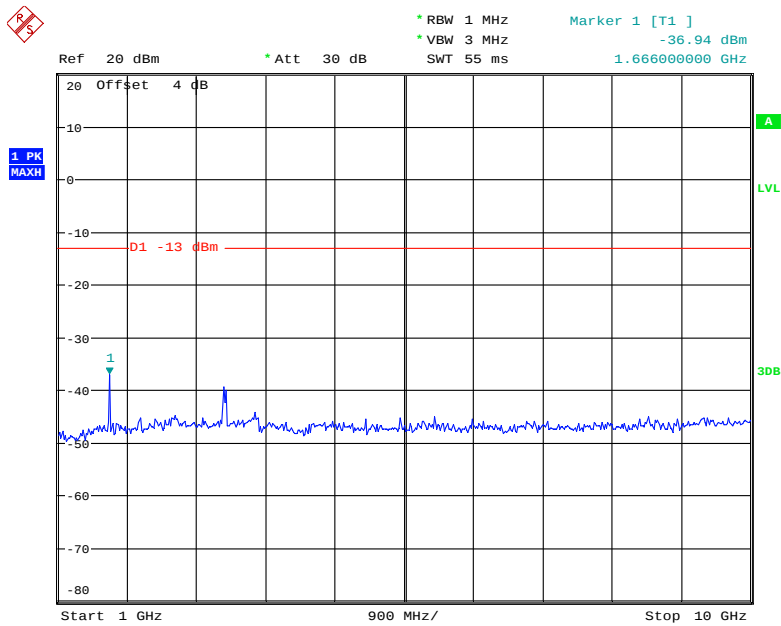


Date: 16.MAR.2019 11:01:15

LTE Band 12 (Middle Channel)

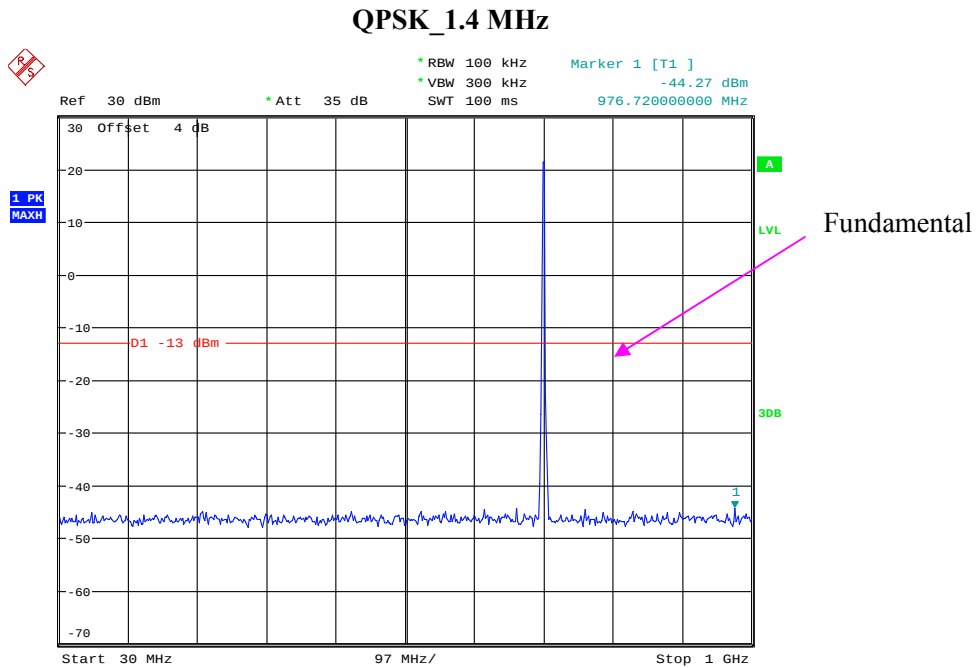


Date: 16.MAR.2019 11:01:43

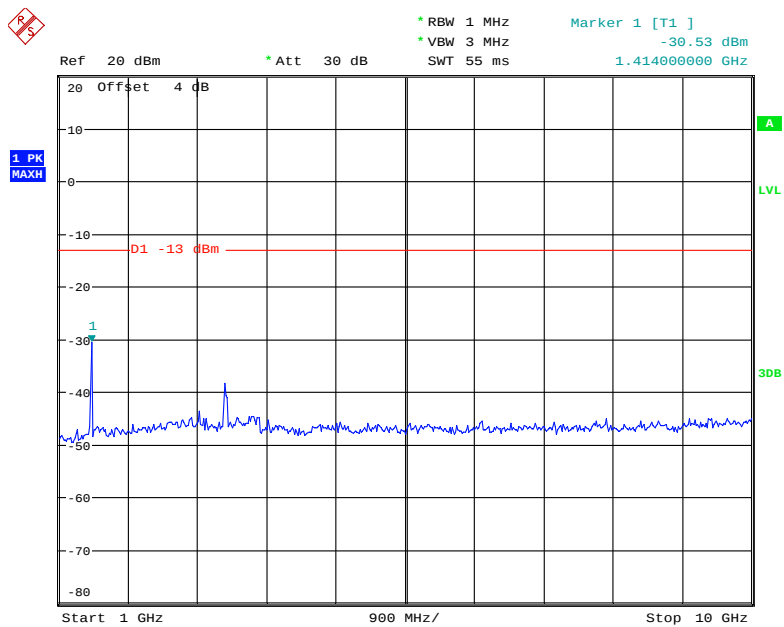


Date: 16.MAR.2019 11:01:57

QPSK_3 MHz

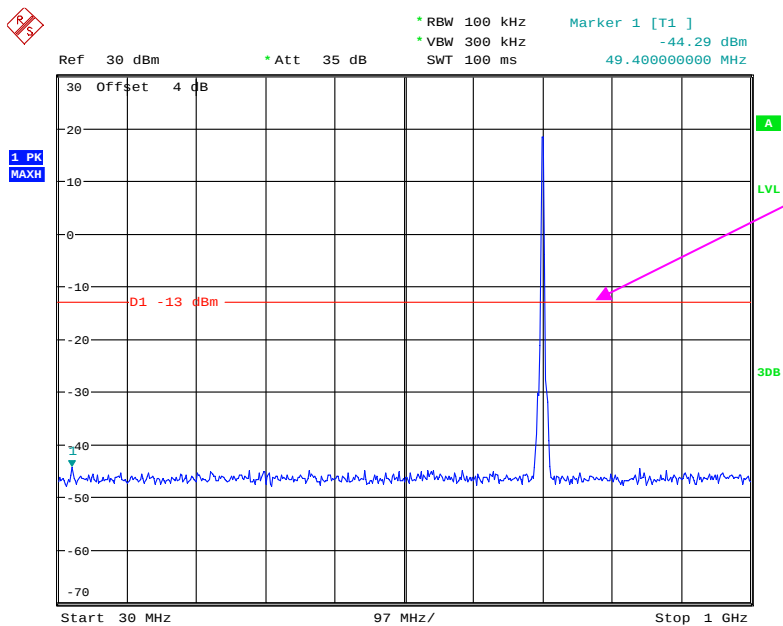


Date: 16.MAR.2019 11:02:18

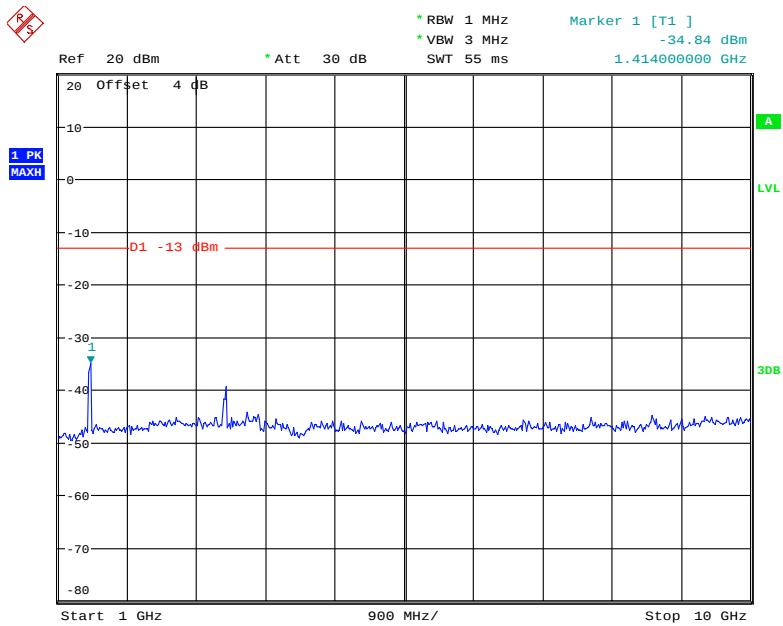


Date: 16.MAR.2019 11:02:29

QPSK_5 MHz

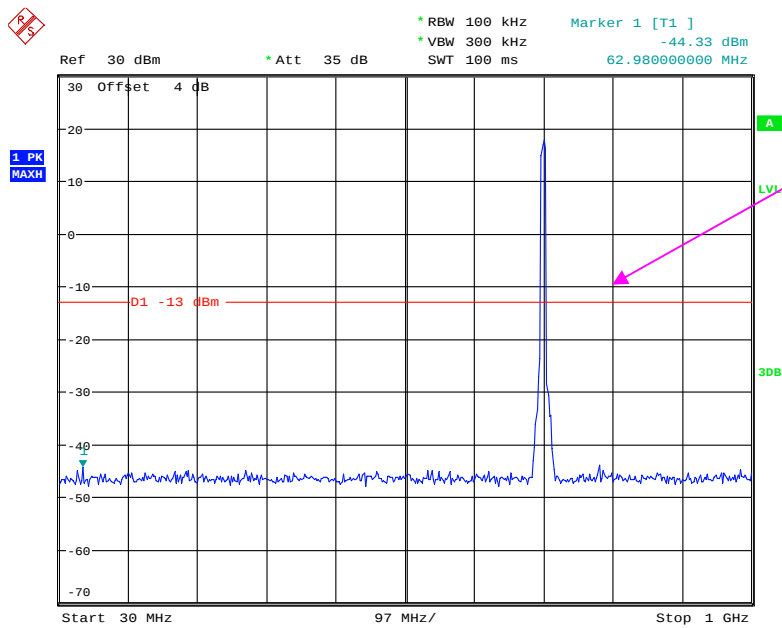


Fundamental

Date: 16.MAR.2019 11:02:51

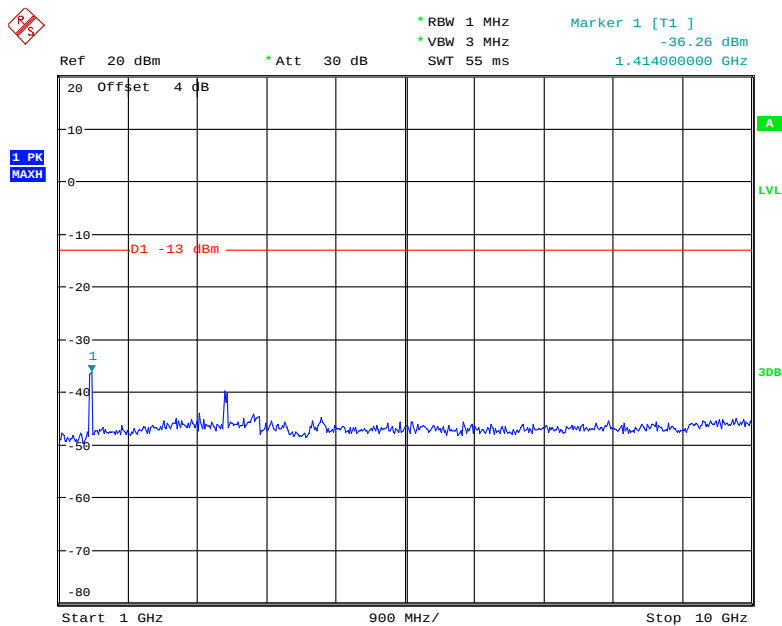


Date: 16.MAR.2019 11:03:02

QPSK_10 MHz

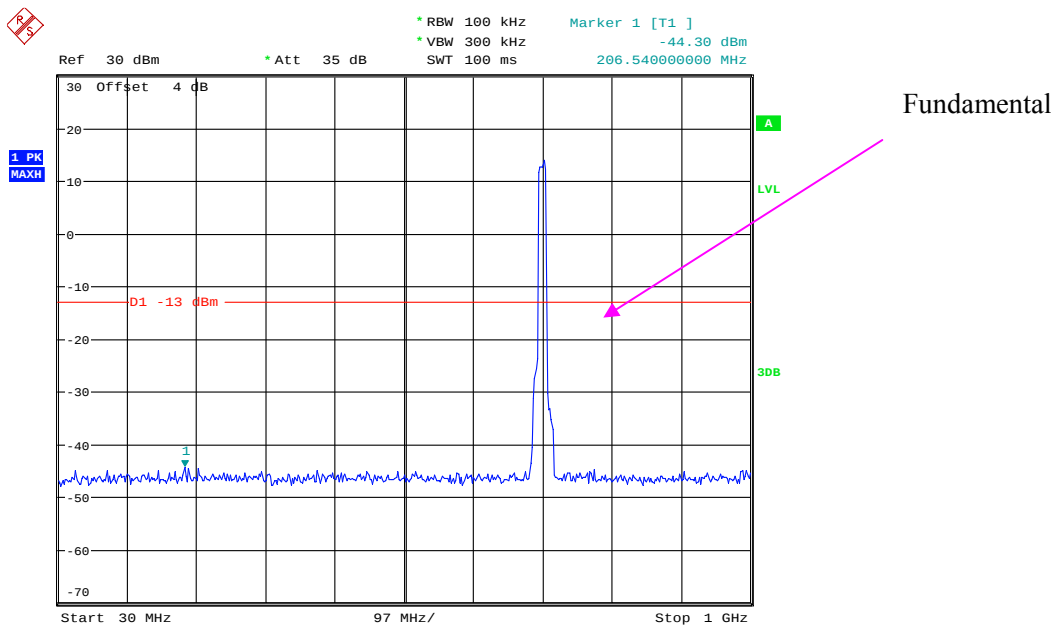


Date: 16.MAR.2019 11:03:24

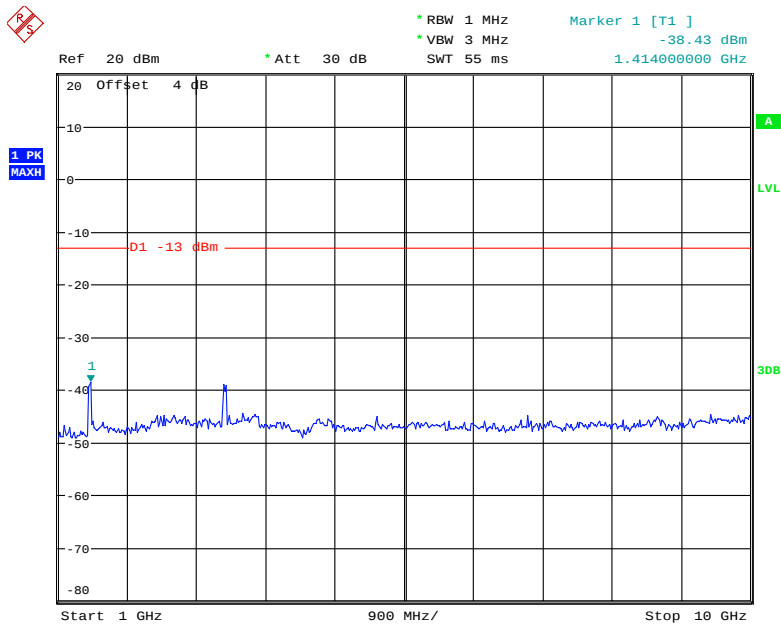


Date: 16.MAR.2019 11:03:39

LTE Band 17 (Middle Channel)

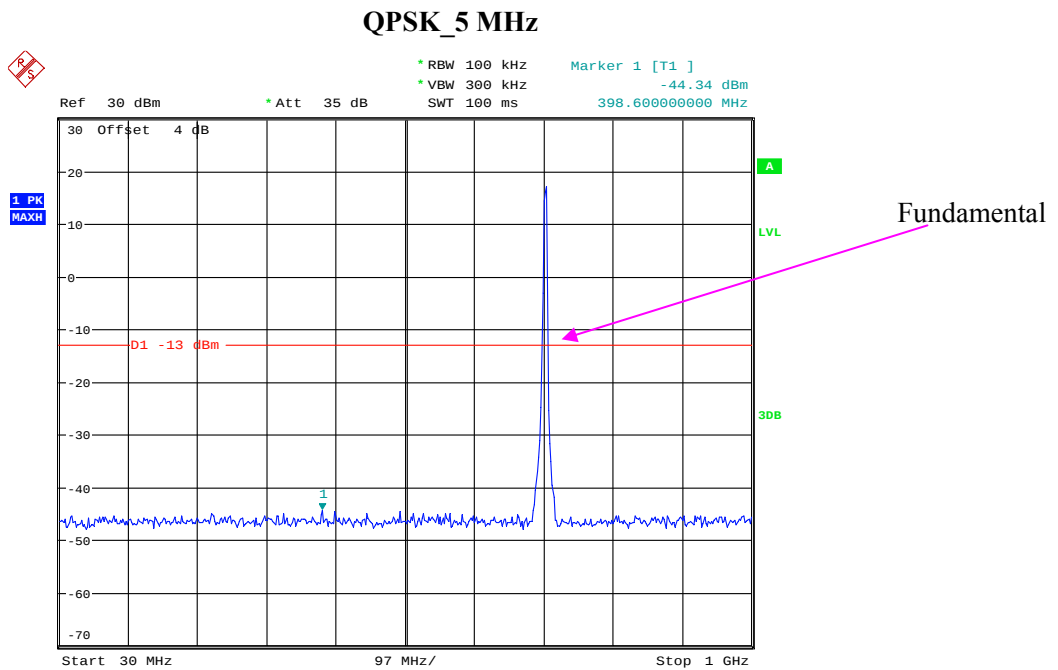


Date: 16.MAR.2019 11:04:01

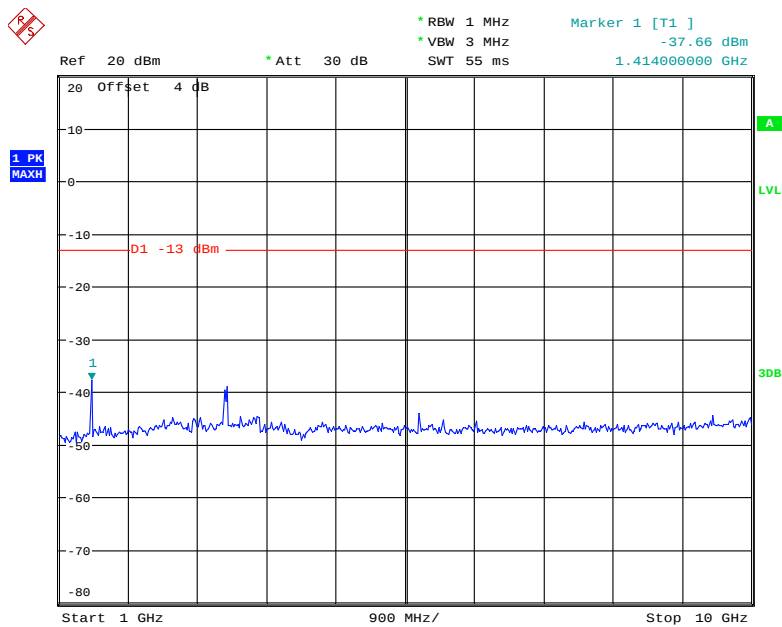


Date: 16.MAR.2019 11:04:11

QPSK_10 MHz

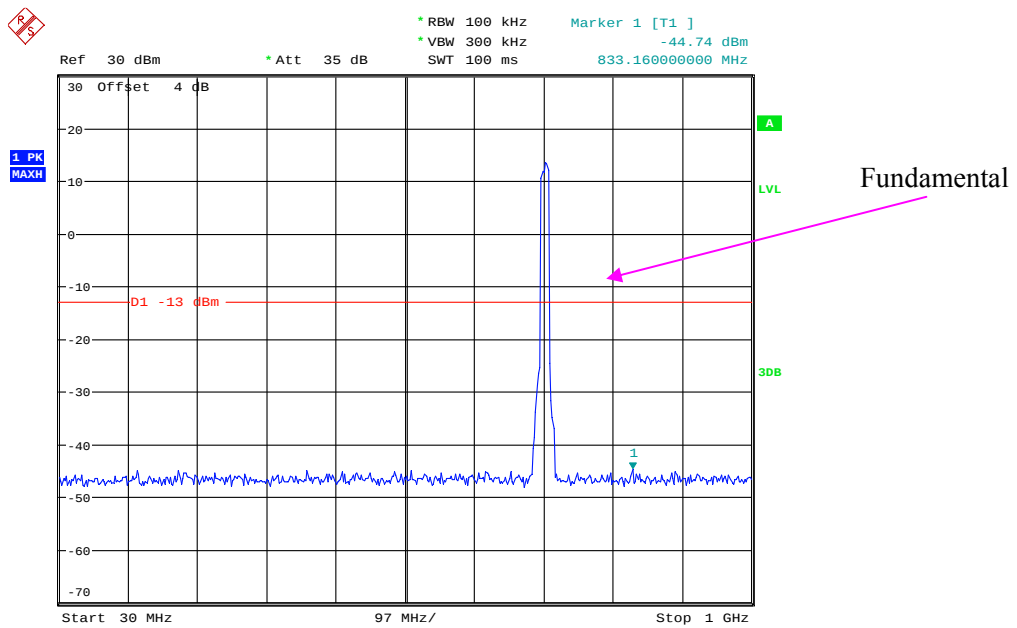

Date: 16.MAR.2019 11:04:30

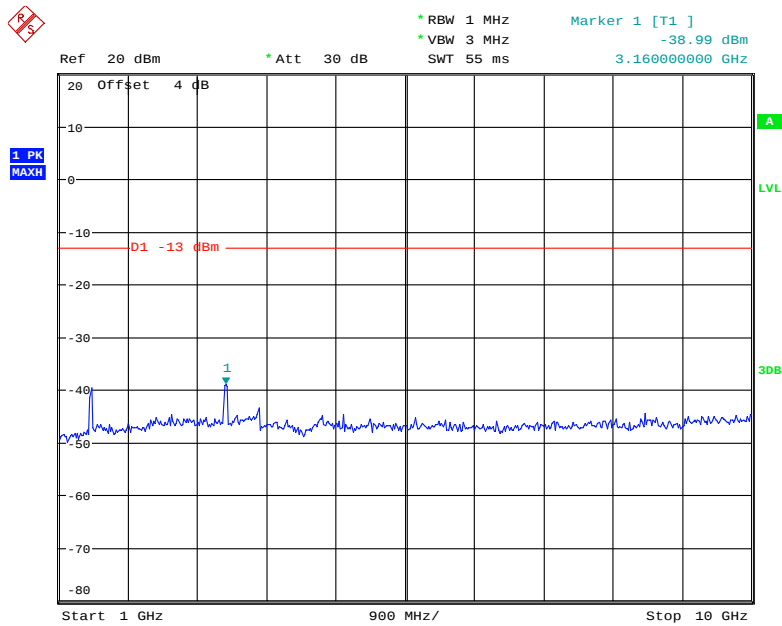

Date: 16.MAR.2019 11:04:45

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53;

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1710-1785MN-0383-003	0383003	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.8~25.1°C
Relative Humidity:	43~52 %
ATM Pressure:	100.4~101.2 kPa

* The testing was performed by Tyler Pan, Vern Shen, Neil Liao on 2019-03-16~2019-03-20.

Operation Mode: Transmitting

Test Result: Compliance, please refer to the below tables.

30 MHz-10 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V R99, Frequency: 836.600 MHz								
1673.200	H	72.47	-41.74	10.6	0.73	-31.9	-13.0	18.9
1673.200	V	68.49	-46.32	10.6	0.73	-36.4	-13.0	23.4
2509.800	H	58.63	-54.39	13.1	1.25	-42.5	-13.0	29.5
2509.800	V	57.24	-55.81	13.1	1.25	-44.0	-13.0	31.0
3346.400	H	57.17	-53.49	13.8	1.61	-41.3	-13.0	28.3
3346.400	V	57.55	-53.16	13.8	1.61	-40.9	-13.0	27.9
404.420	H	58.31	-46.47	0.0	0.61	-47.1	-13.0	34.1
47.460	V	61.30	-35.92	-17.4	0.21	-53.5	-13.0	40.5

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II R99,Frequency: 1880.000 MHz								
3760.000	H	56.21	-52.59	13.8	1.63	-40.5	-13.0	27.5
3760.000	V	55.29	-53.38	13.8	1.63	-41.3	-13.0	28.3
5640.000	H	46.33	-59.7	14.0	1.31	-47.0	-13.0	34.0
5640.000	V	45.98	-59.93	14.0	1.31	-47.2	-13.0	34.2
90.140	H	50.94	-59.54	0.0	0.36	-59.9	-13.0	46.9
53.280	V	58.39	-44.97	-13.4	0.22	-58.6	-13.0	45.6

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1880.000 MHz								
3760.00	H	60.33	-48.47	13.76	1.63	-36.34	-13.00	23.34
3760.00	V	64.63	-44.04	13.76	1.63	-31.91	-13.00	18.91
5640.00	H	49.42	-56.61	14.02	1.31	-43.90	-13.00	30.90
5640.00	V	54.35	-51.56	14.02	1.31	-38.85	-13.00	25.85
7520.00	H	47.35	-52.97	13.20	1.33	-41.10	-13.00	28.10
7520.00	V	47.76	-53.03	13.20	1.33	-41.16	-13.00	28.16
181.33	H	54.49	-55.21	0.00	0.45	-55.66	-13.00	42.66
140.58	V	51.34	-61.37	0.00	0.35	-61.72	-13.00	48.72

LTE Band 4 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1732.500 MHz								
3465.00	H	60.03	-50.21	13.91	1.62	-37.92	-13.00	24.92
3465.00	V	69.08	-41.20	13.91	1.62	-28.91	-13.00	15.91
5197.50	H	50.24	-56.18	14.00	1.52	-43.70	-13.00	30.70
5197.50	V	50.76	-55.73	14.00	1.52	-43.25	-13.00	30.25
6930.00	H	51.15	-51.15	13.64	1.81	-39.32	-13.00	26.32
6930.00	V	55.65	-46.51	13.64	1.81	-34.68	-13.00	21.68
181.32	H	52.15	-57.55	0.00	0.45	-58.00	-13.00	45.00
216.24	V	50.29	-60.89	0.00	0.49	-61.38	-13.00	48.38

LTE Band 5 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:836.500 MHz								
1673.00	H	80.63	-33.59	10.61	0.73	-23.71	-13.00	10.71
1673.00	V	83.83	-30.99	10.61	0.73	-21.11	-13.00	8.11
2509.50	H	62.98	-50.04	13.11	1.25	-38.18	-13.00	25.18
2509.50	V	70.15	-42.90	13.11	1.25	-31.04	-13.00	18.04
3346.00	H	59.01	-51.65	13.83	1.61	-39.43	-13.00	26.43
3346.00	V	65.86	-44.85	13.83	1.61	-32.63	-13.00	19.63
4182.50	H	48.97	-60.03	13.95	1.56	-47.64	-13.00	34.64
4182.50	V	51.47	-57.52	13.95	1.56	-45.13	-13.00	32.13
5019.00	H	46.77	-60.77	13.98	1.41	-48.20	-13.00	35.20
5019.00	V	51.66	-55.65	13.98	1.41	-43.08	-13.00	30.08
5855.50	H	47.02	-58.52	14.04	1.57	-46.05	-13.00	33.05
5855.50	V	52.19	-53.41	14.04	1.57	-40.94	-13.00	27.94
148.34	H	50.11	-56.28	0.00	0.37	-56.65	-13.00	43.65
216.24	V	49.61	-61.57	0.00	0.49	-62.06	-13.00	49.06

LTE Band 12 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:707.500 MHz								
1415.00	H	71.86	-41.64	9.08	1.22	-33.78	-13.00	20.78
1415.00	V	69.19	-44.84	9.08	1.22	-36.98	-13.00	23.98
2122.50	H	57.14	-55.65	11.27	1.11	-45.49	-13.00	32.49
2122.50	V	59.82	-52.95	11.27	1.11	-42.79	-13.00	29.79
2830.00	H	61.82	-50.26	13.34	1.36	-38.28	-13.00	25.28
2830.00	V	64.51	-47.80	13.34	1.36	-35.82	-13.00	22.82
3537.50	H	52.91	-57.23	13.91	1.57	-44.89	-13.00	31.89
3537.50	V	58.84	-51.30	13.91	1.57	-38.96	-13.00	25.96
4245.00	H	52.17	-56.83	13.96	1.21	-44.08	-13.00	31.08
4245.00	V	54.25	-54.75	13.96	1.21	-42.00	-13.00	29.00
4952.50	H	52.87	-54.77	13.95	1.45	-42.27	-13.00	29.27
4952.50	V	51.85	-55.18	13.95	1.45	-42.68	-13.00	29.68
5660.00	H	46.85	-59.30	13.98	1.32	-46.64	-13.00	33.64
5660.00	V	52.89	-53.16	13.98	1.32	-40.50	-13.00	27.50
148.34	H	55.77	-50.62	0.00	0.37	-50.99	-13.00	37.99
51.34	V	46.58	-55.61	-14.28	0.21	-70.10	-13.00	57.10

LTE Band 17 (30MHz-10GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:710.000 MHz								
1420.00	H	74.44	-39.16	9.10	1.23	-31.29	-13.00	18.29
1420.00	V	67.32	-46.78	9.10	1.23	-38.91	-13.00	25.91
2130.00	H	54.10	-58.65	11.22	1.11	-48.54	-13.00	35.54
2130.00	V	57.41	-55.31	11.22	1.11	-45.20	-13.00	32.20
2840.00	H	55.16	-56.88	13.42	1.36	-44.82	-13.00	31.82
2840.00	V	61.04	-51.24	13.42	1.36	-39.18	-13.00	26.18
3550.00	H	56.02	-54.13	13.95	1.56	-41.74	-13.00	28.74
3550.00	V	57.34	-52.81	13.95	1.56	-40.42	-13.00	27.42
4260.00	H	50.86	-58.14	13.94	1.08	-45.28	-13.00	32.28
4260.00	V	52.22	-56.80	13.94	1.08	-43.94	-13.00	30.94
4970.00	H	48.21	-59.49	13.97	1.45	-46.97	-13.00	33.97
4970.00	V	47.26	-59.97	13.97	1.45	-47.45	-13.00	34.45
5680.00	H	46.37	-59.90	13.94	1.33	-47.29	-13.00	34.29
5680.00	V	52.14	-54.04	13.94	1.33	-41.43	-13.00	28.43
216.50	H	50.27	-58.57	0.00	0.49	-59.06	-13.00	46.06
51.34	V	55.73	-46.46	-14.28	0.21	-60.95	-13.00	47.95

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53- BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53;

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

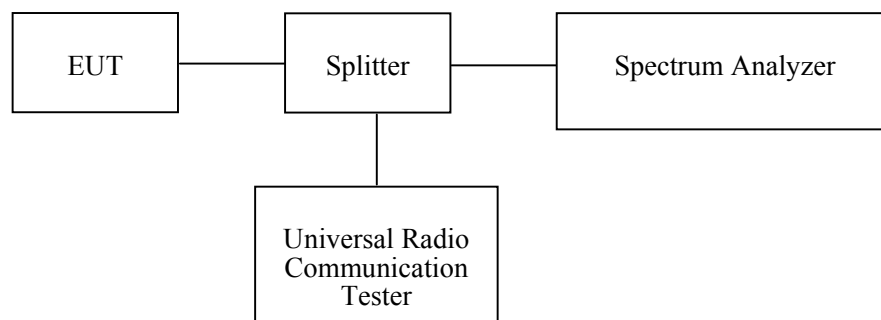

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	23.8~25.1°C
Relative Humidity:	43~52 %
ATM Pressure:	100.4~101.2 kPa

The testing was performed by Elena Lei & Blake Yang on 2019-03-16~2019-03-20.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

WCDMA Band II Rel 99, Left Band Edge

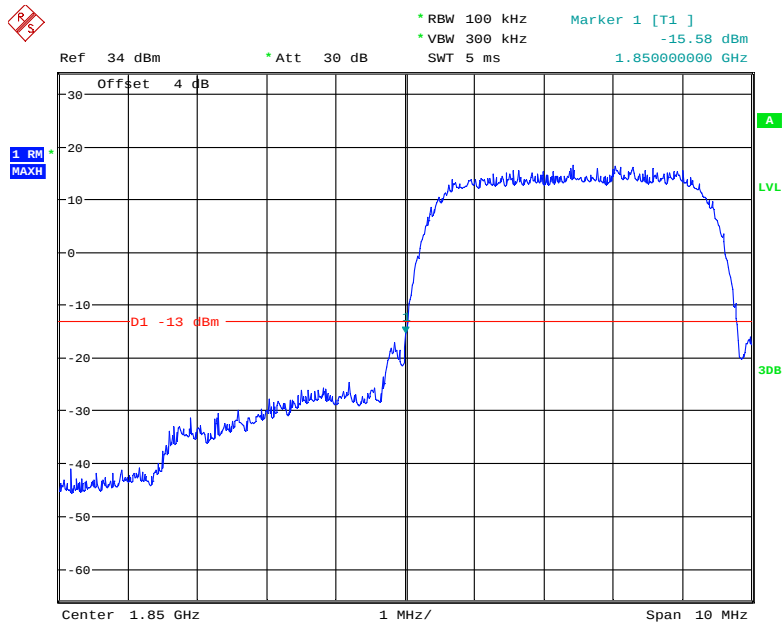


Date: 20.MAR.2019 09:40:25

WCDMA Band II Rel 99, Right Band Edge

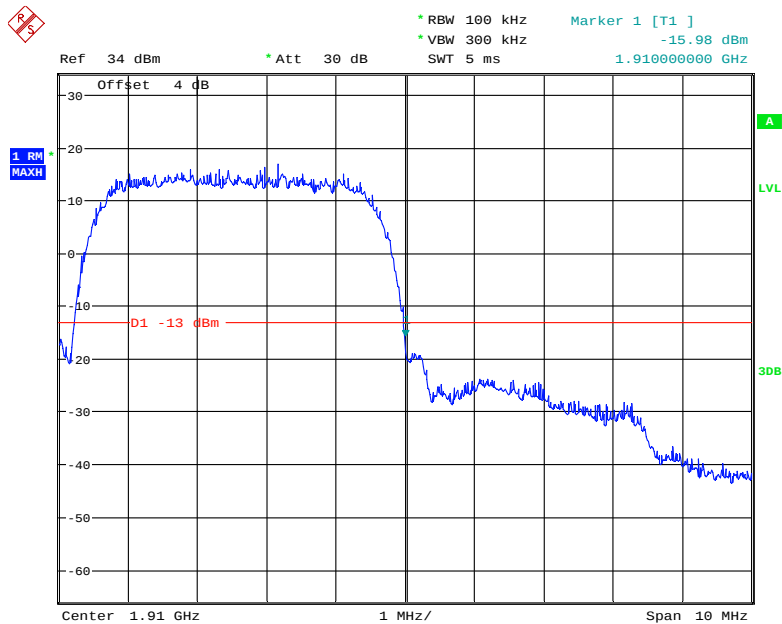


Date: 20.MAR.2019 09:41:15

WCDMA Band II HSDPA, Left Band Edge

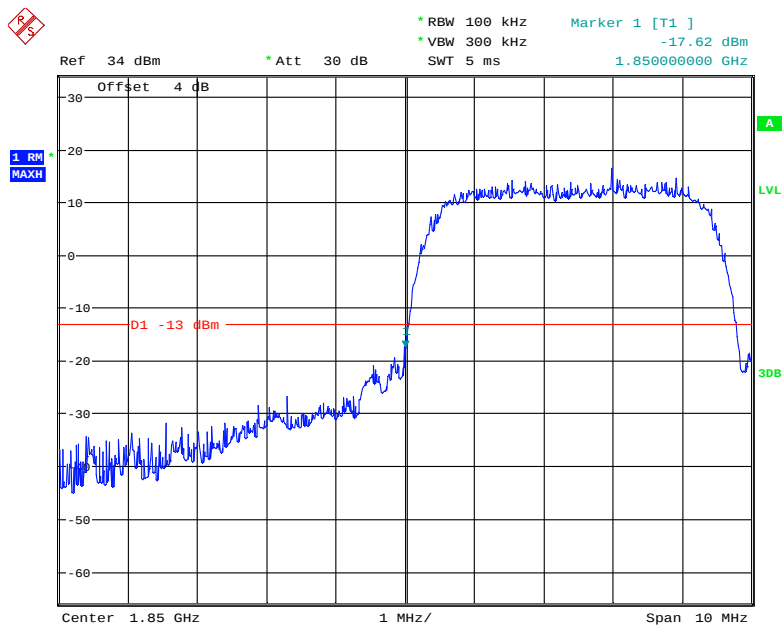

Date: 20.MAR.2019 09:37:48

WCDMA Band II HSDPA, Right Band Edge

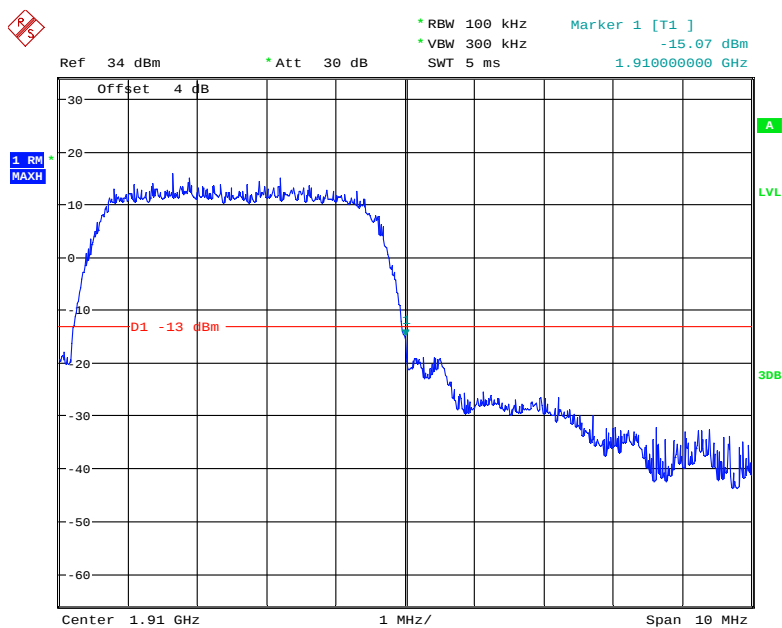

Date: 20.MAR.2019 09:36:53

MARKER 1
 1.85 GHz
 -15.41 dBm
 1.850000000 GHz

RBW 100 kHz
 VBW 300 kHz
 Att 30 dB
 SWT 5 ms

Offset 4 dB
 Ref 34 dBm


1 RM
 MAXH

A
 LVL
 3dB


D1 -13 dBm

Center 1.85 GHz
 1 MHz/
 Span 10 MHz

WCDMA Band II HSUPA, Right Band Edge




WCDMA Band V Rel 99, Left Band Edge

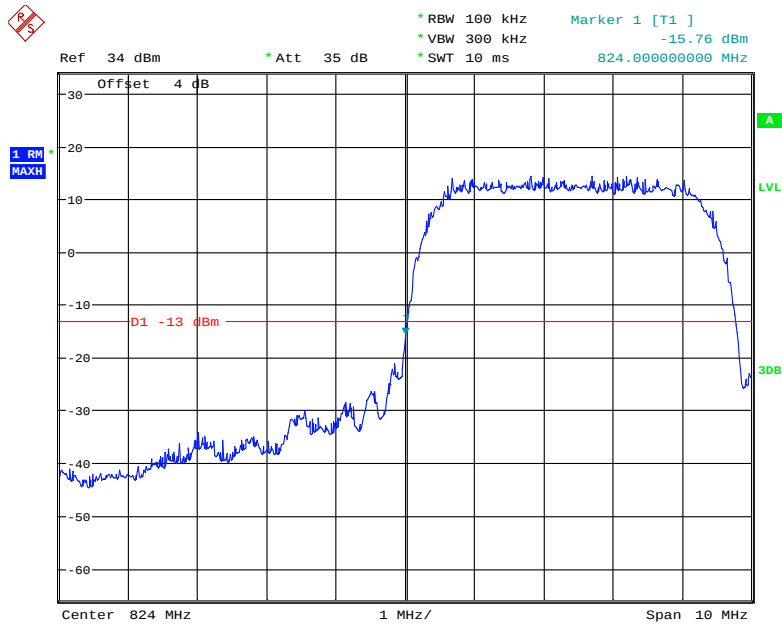


Date: 20.MAR.2019 09:59:27

WCDMA Band V Rel 99, Right Band Edge

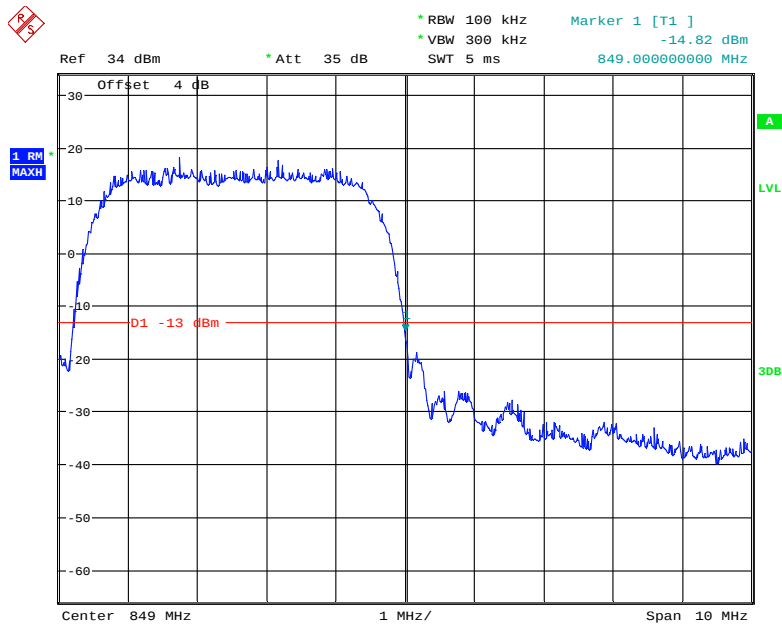


Date: 20.MAR.2019 09:59:56

WCDMA Band V HSDPA, Left Band Edge

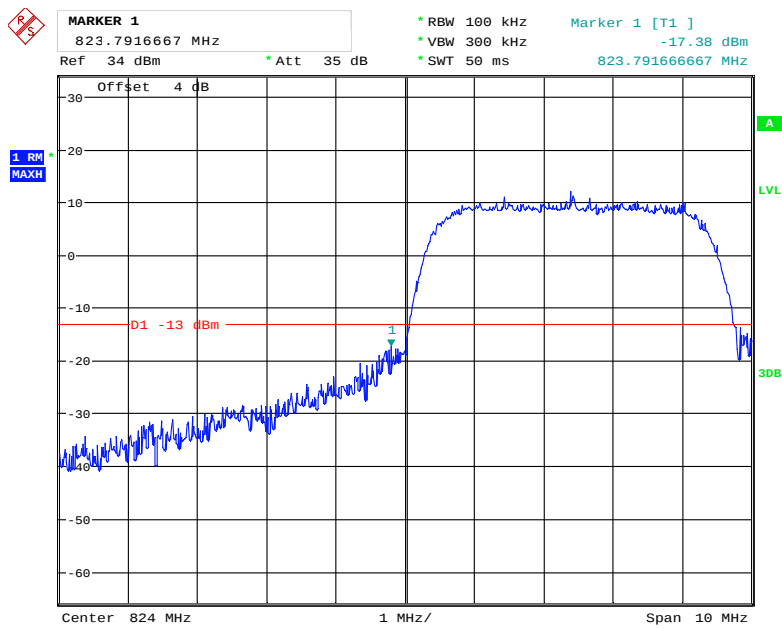


Date: 20.MAR.2019 09:58:37

WCDMA Band V HSDPA, Right Band Edge

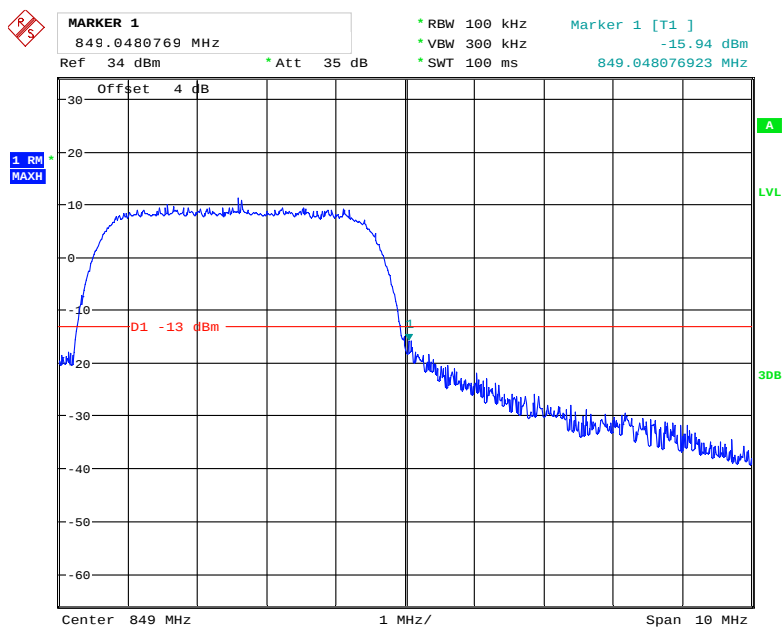


Date: 20.MAR.2019 09:57:57

WCDMA Band V HSUPA, Left Band Edge

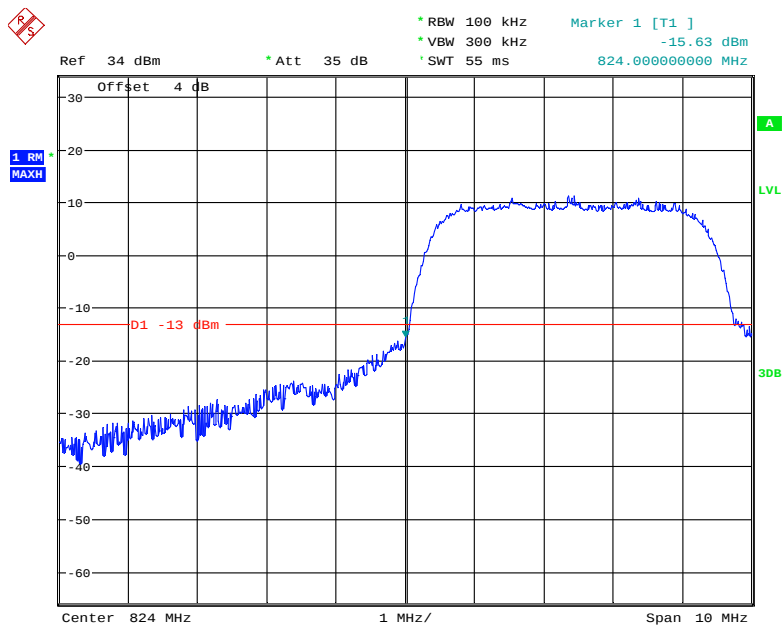

Date: 20.MAR.2019 09:52:30


WCDMA Band V HSUPA, Right Band Edge

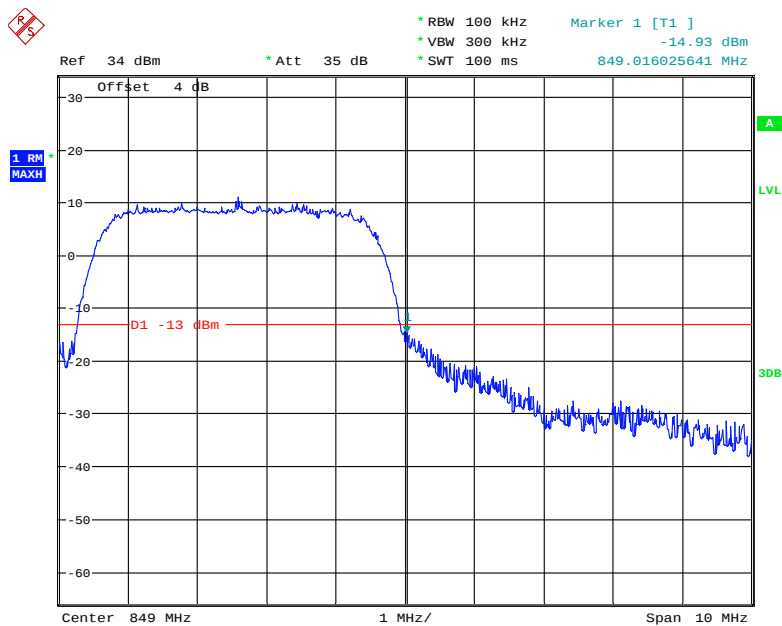


Date: 20.MAR.2019 09:54:21

LTE Band 2

QPSK_1.4MHz_6 RB_ Left

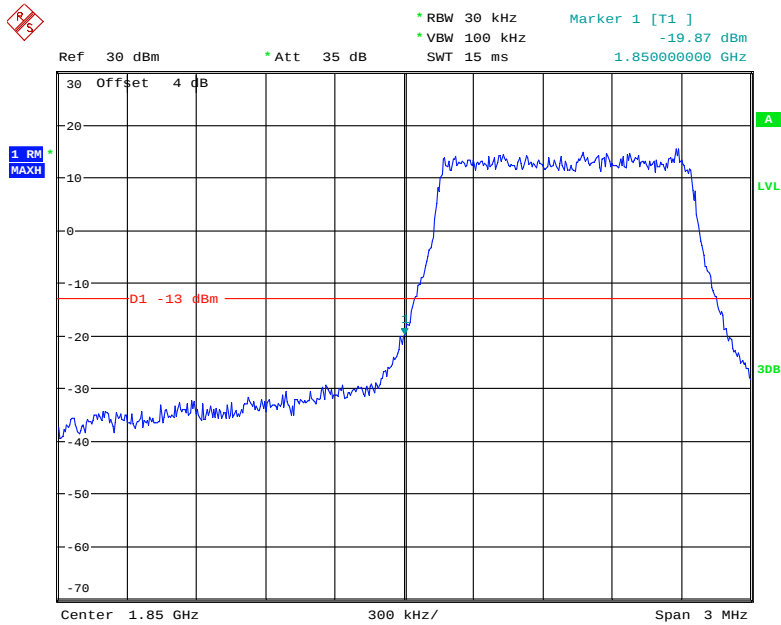


QPSK_1.4MHz_6 RB_ Right

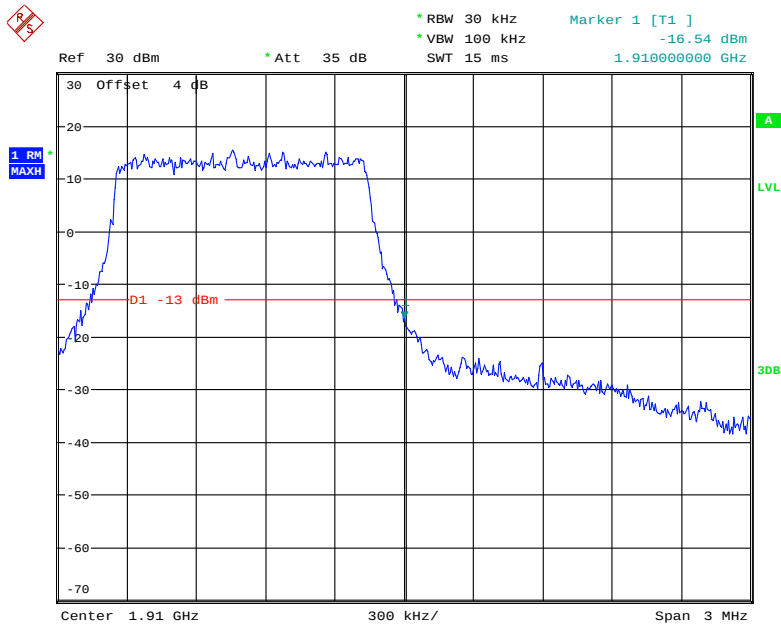


Date: 16.MAR.2019 11:05:59

QPSK_3MHz_15 RB_Left

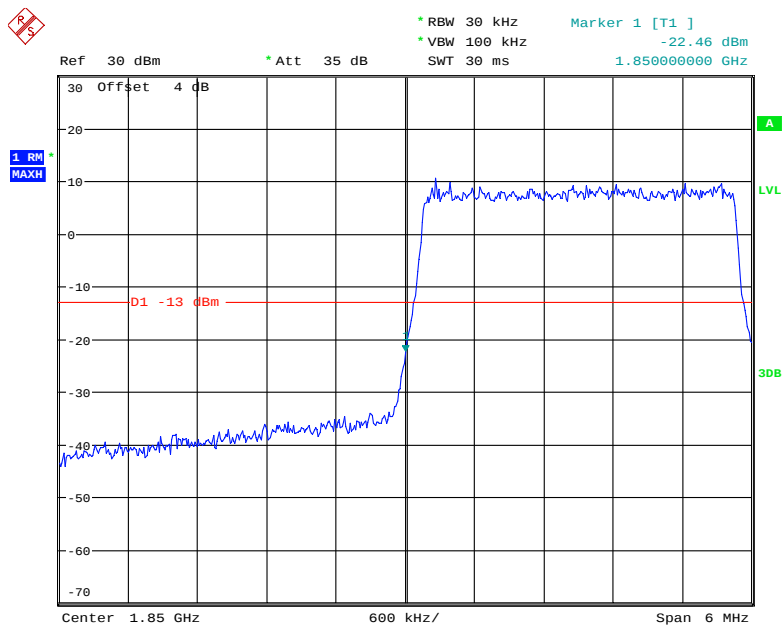


Date: 16.MAR.2019 11:06:36

QPSK_3MHz_15 RB_Right

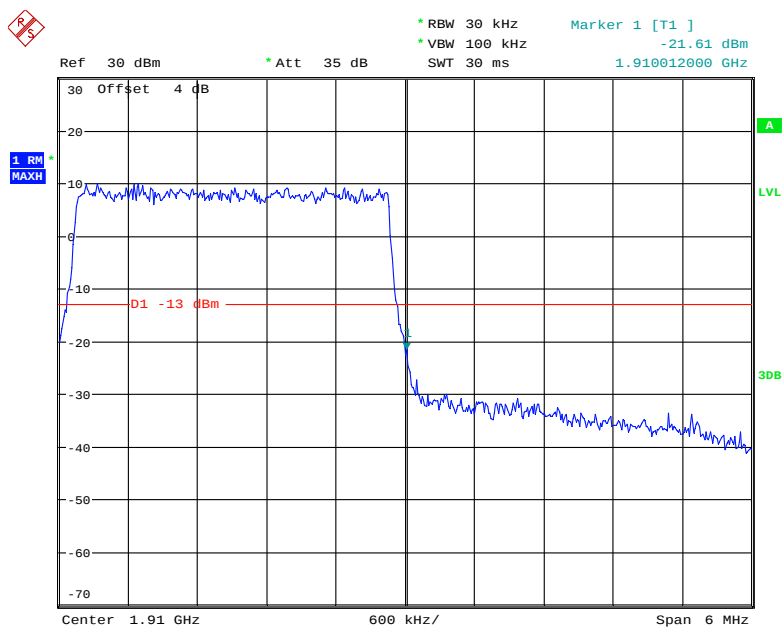


Date: 16.MAR.2019 11:07:11

QPSK_5MHz_25 RB_ Left

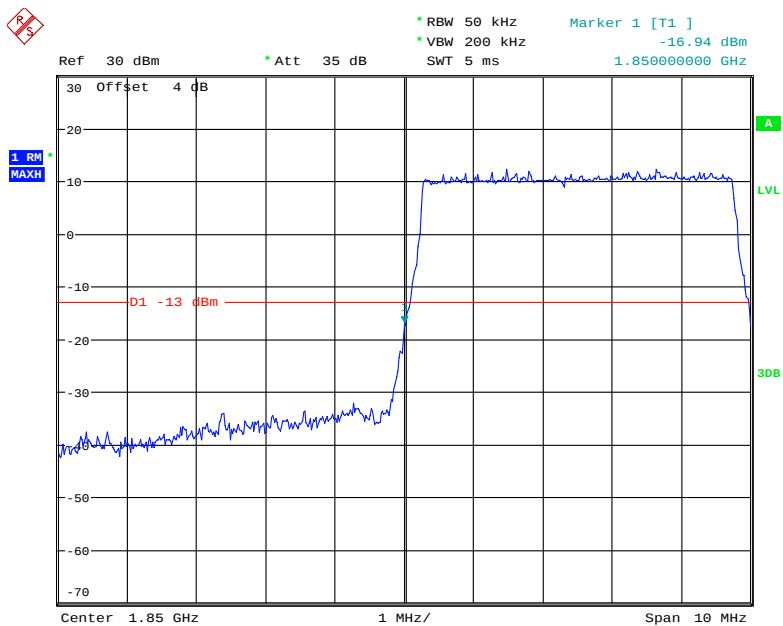


Date: 16.MAR.2019 11:08:05

QPSK_5MHz_25 RB_ Right

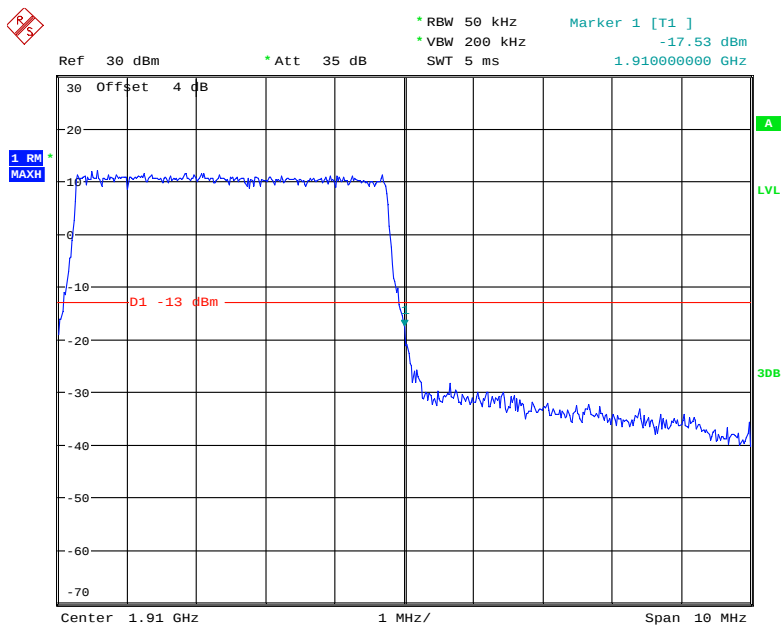


Date: 16.MAR.2019 11:09:03

QPSK_10MHz_50 RB_ Left

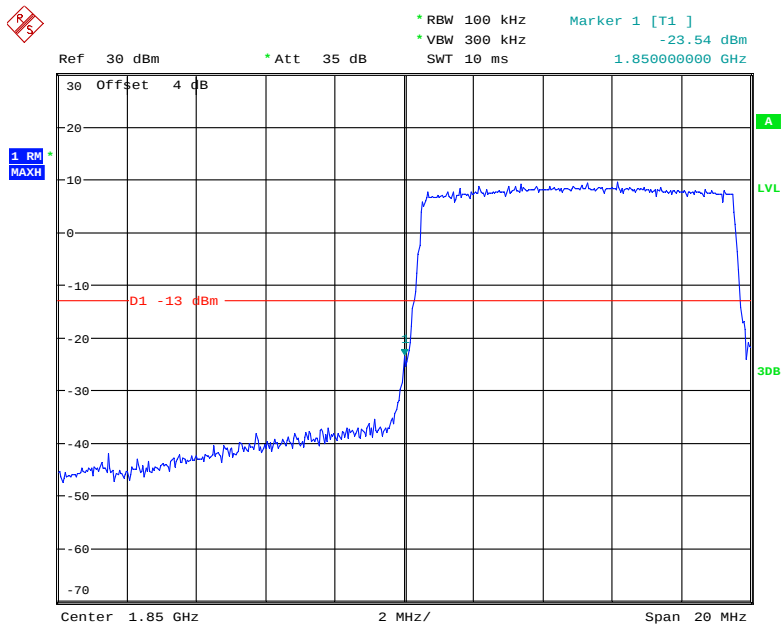


Date: 16.MAR.2019 11:09:54

QPSK_10MHz_50 RB_ Right

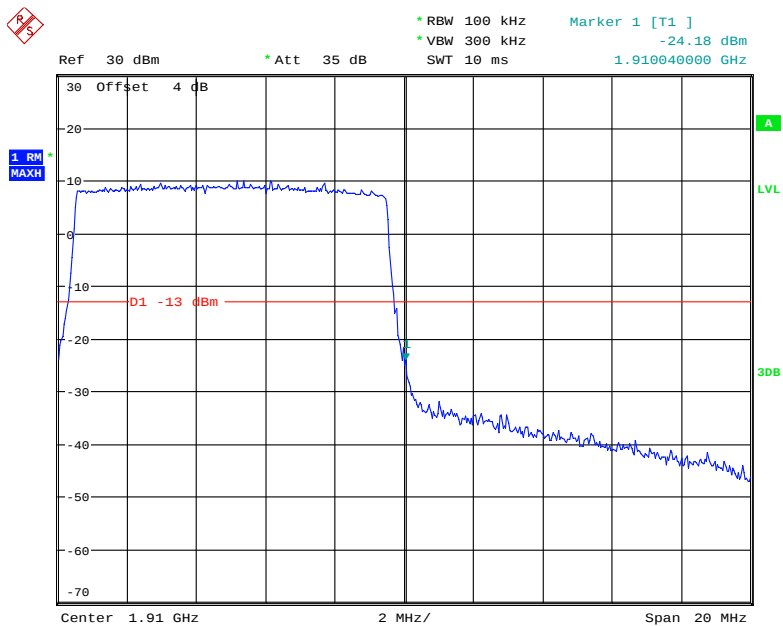


Date: 16.MAR.2019 11:11:32

QPSK_15MHz_75 RB_Left

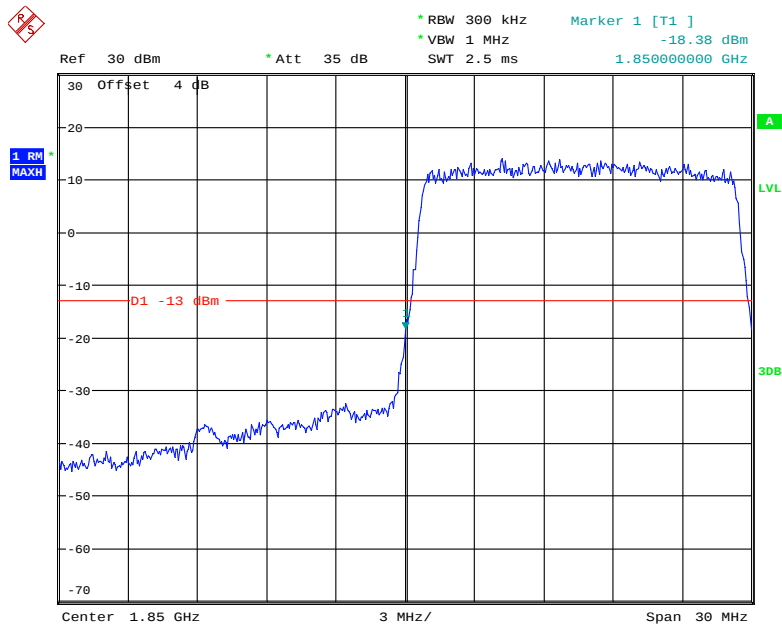


Date: 16.MAR.2019 11:13:05

QPSK_15MHz_75 RB_Right

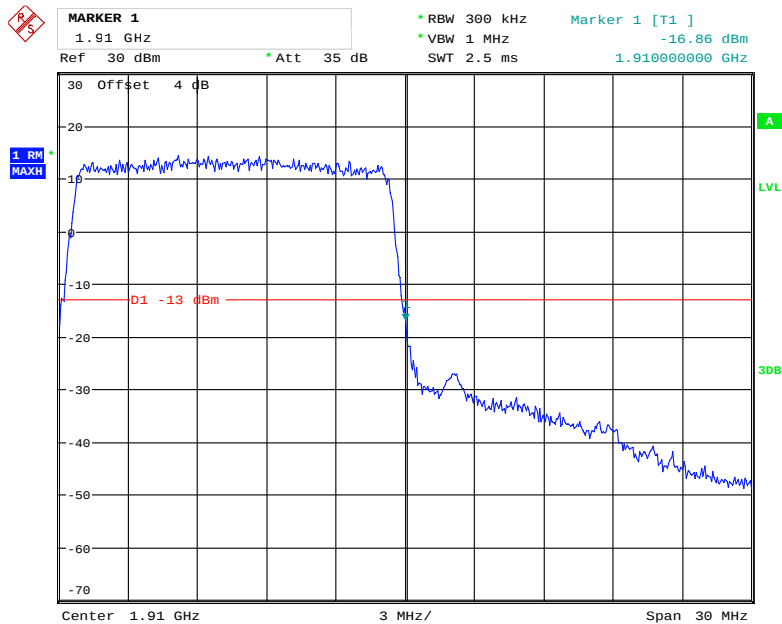


Date: 16.MAR.2019 15:13:08

QPSK_20MHz_FULL RB_Left

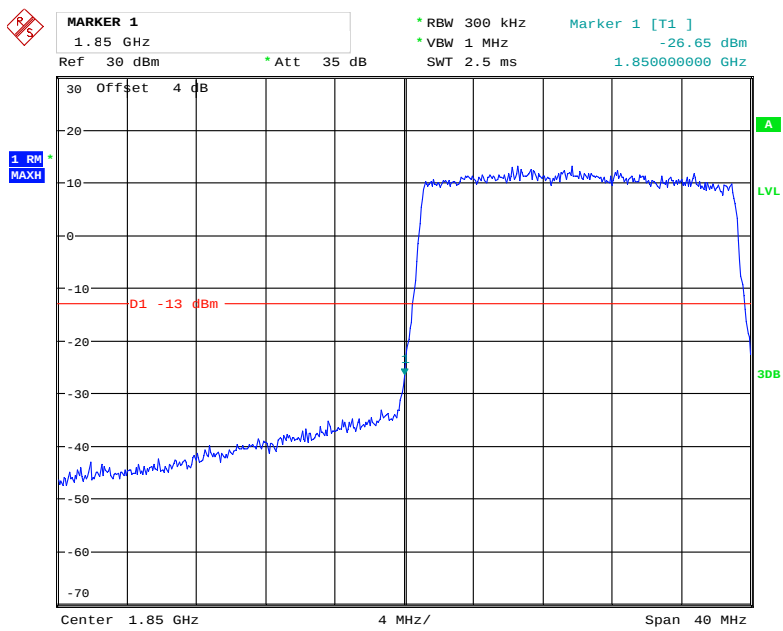


Date: 16.MAR.2019 15:16:07

QPSK_20MHz_FULL RB_Right

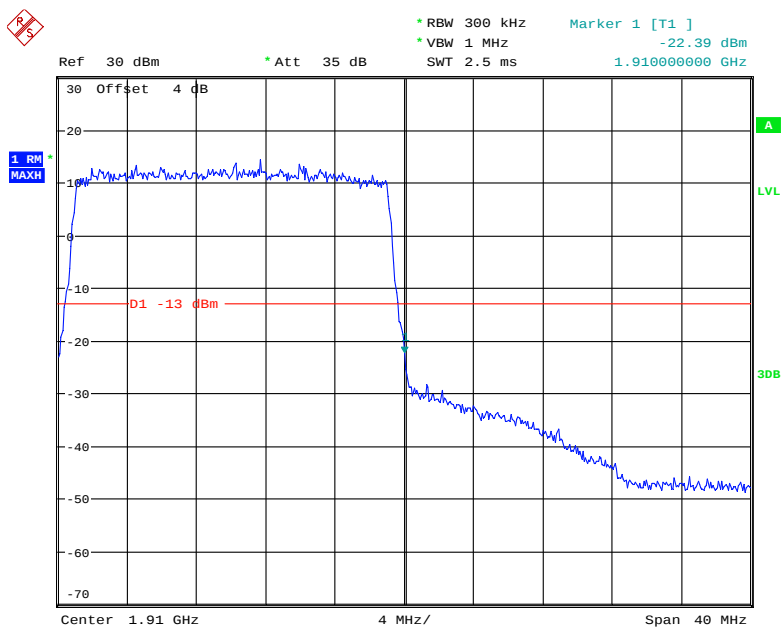


Date: 16.MAR.2019 15:15:17

16QAM_1.4MHz_6 RB_ Left

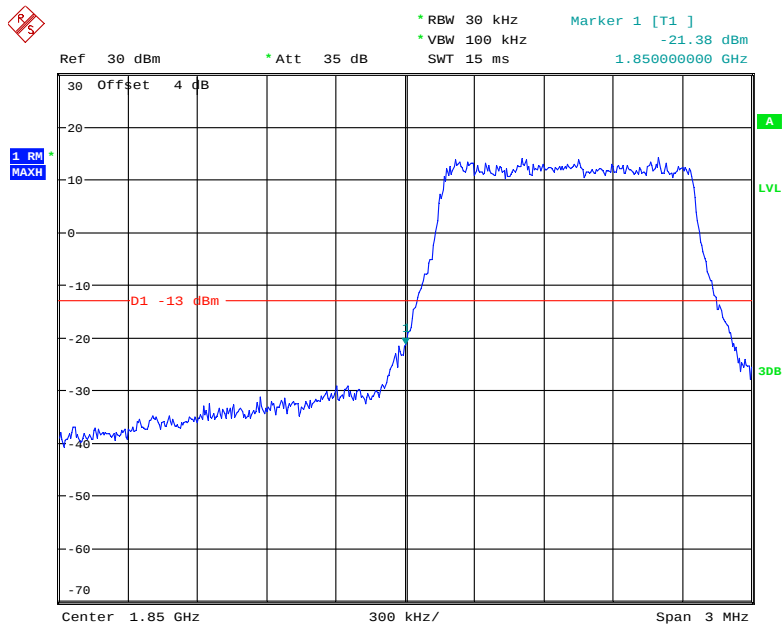


Date: 16.MAR.2019 11:05:39


16QAM_1.4MHz_6 RB_ Right

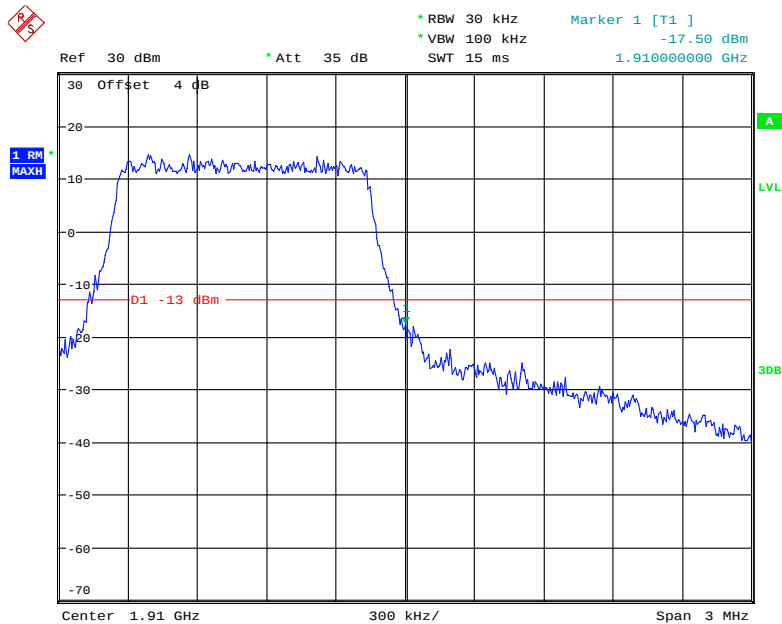


Date: 16.MAR.2019 11:06:17

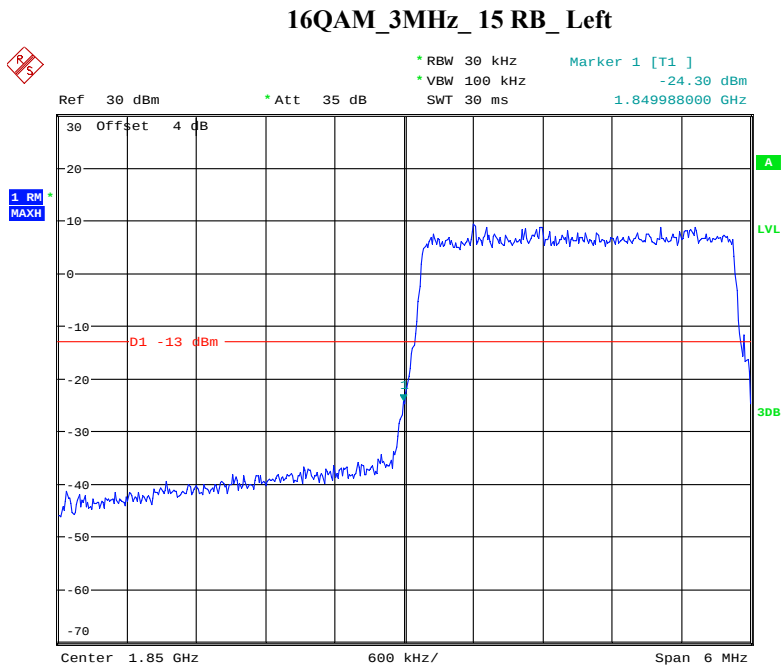


Date: 16.MAR.2019 11:06:51

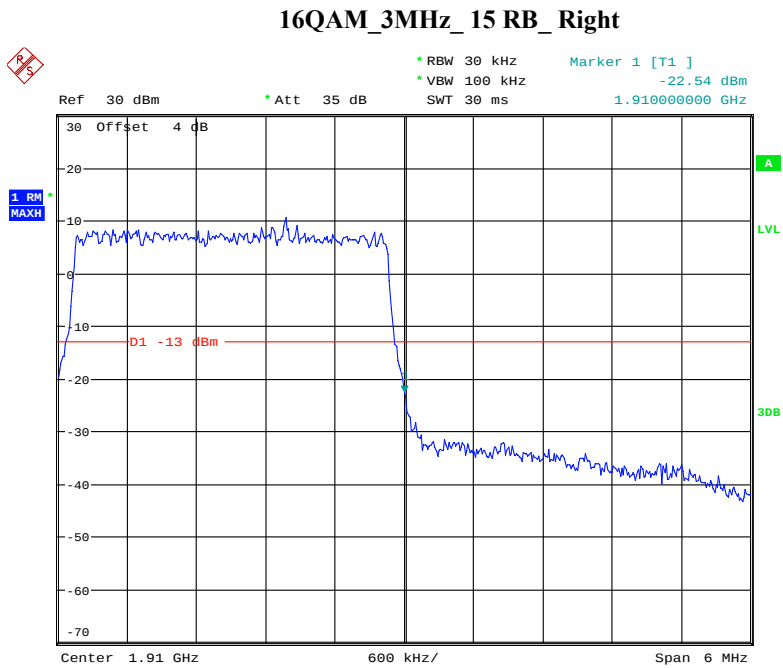

Date: 16.MAR.2019 11:07:30

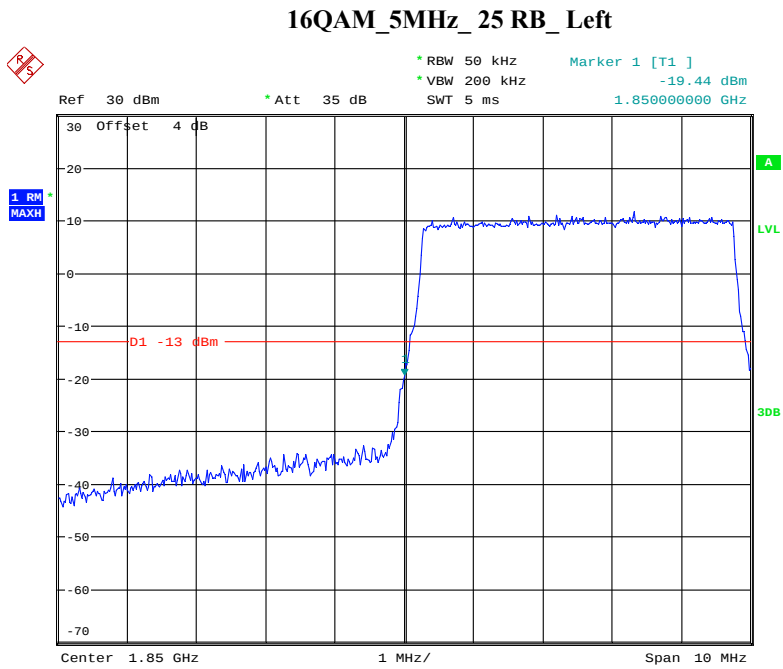


Date: 16.MAR.2019 11:08:32

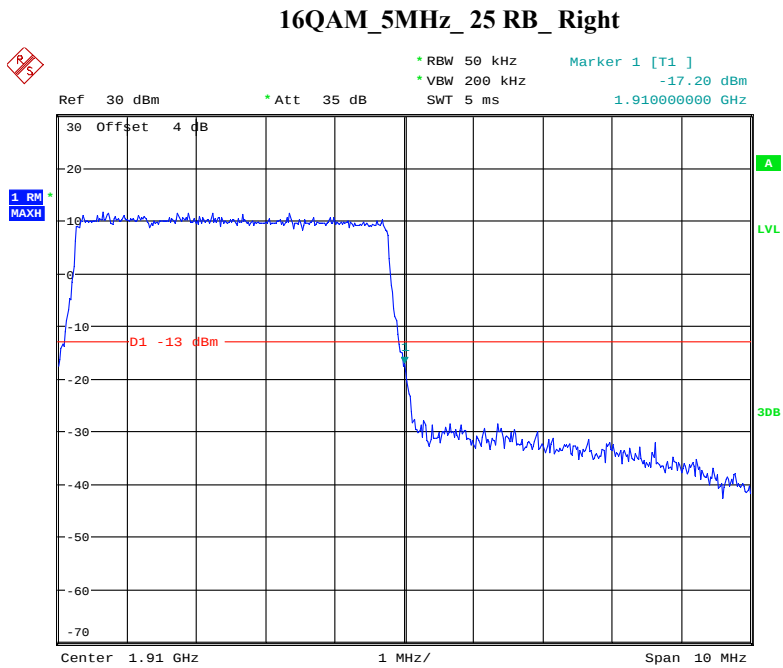

Date: 16.MAR.2019 11:09:34


LTE Band 4

QPSK_1.4MHz_6 RB_ Left

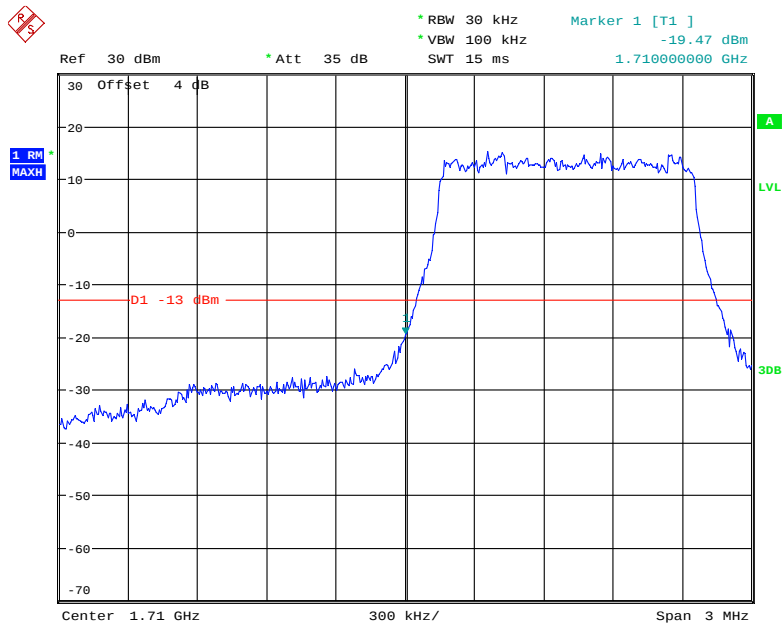


Date: 16.MAR.2019 11:14:36

QPSK_1.4MHz_6 RB_ Right

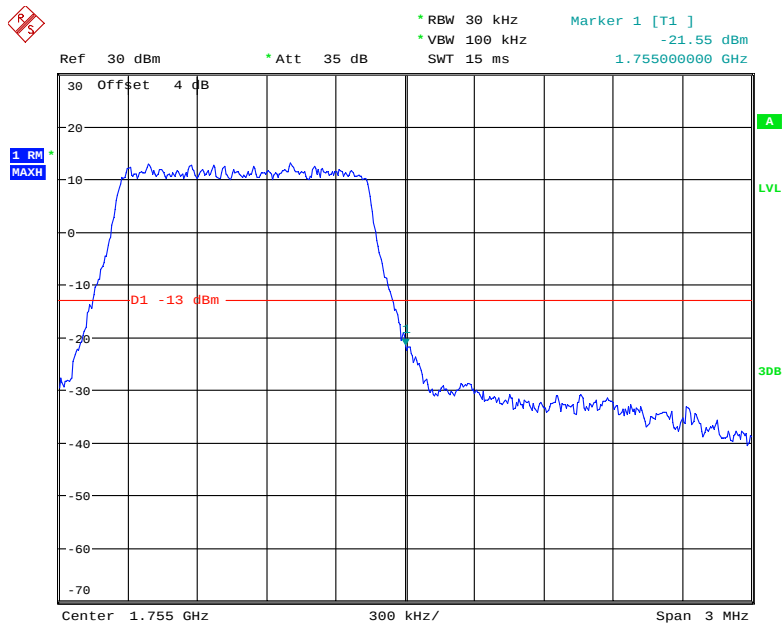


Date: 16.MAR.2019 11:16:40

QPSK_3MHz_15 RB_ Left

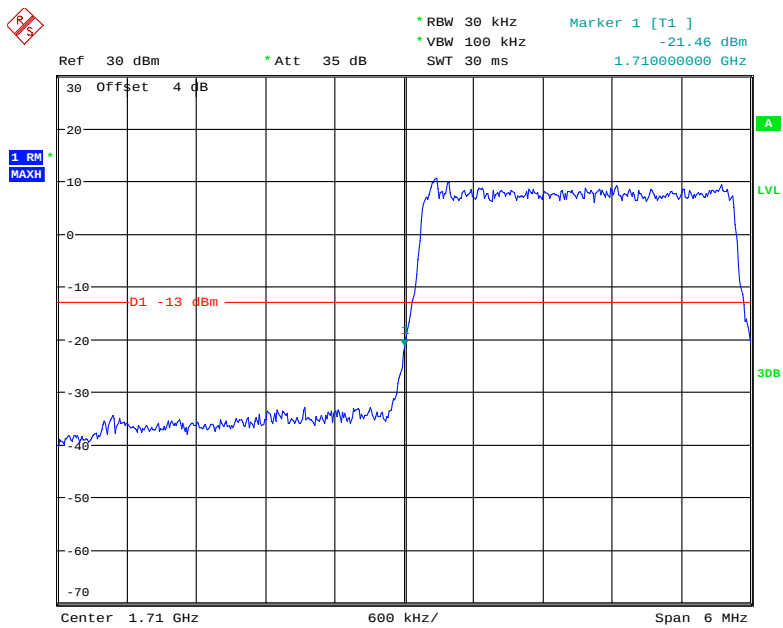


Date: 16.MAR.2019 11:17:13

QPSK_3MHz_15 RB_ Right

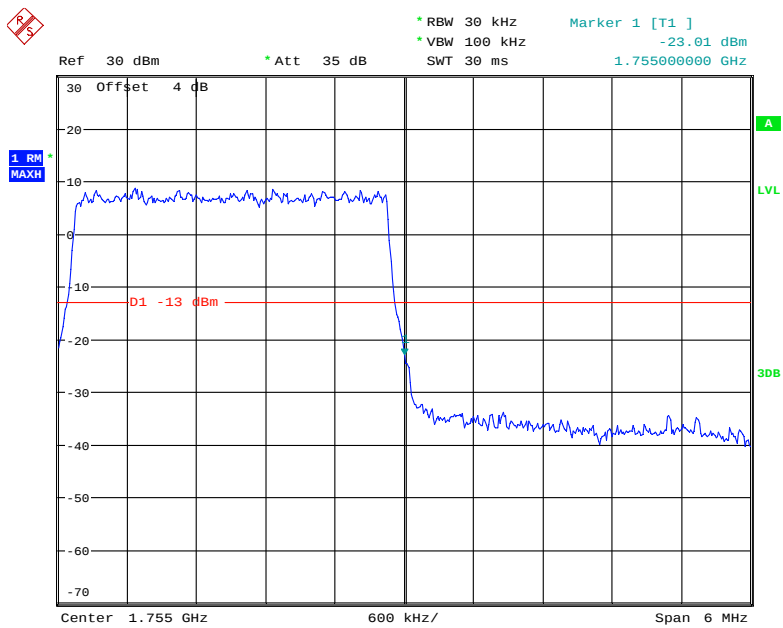


Date: 16.MAR.2019 11:18:24

QPSK_5MHz_25 RB_ Left

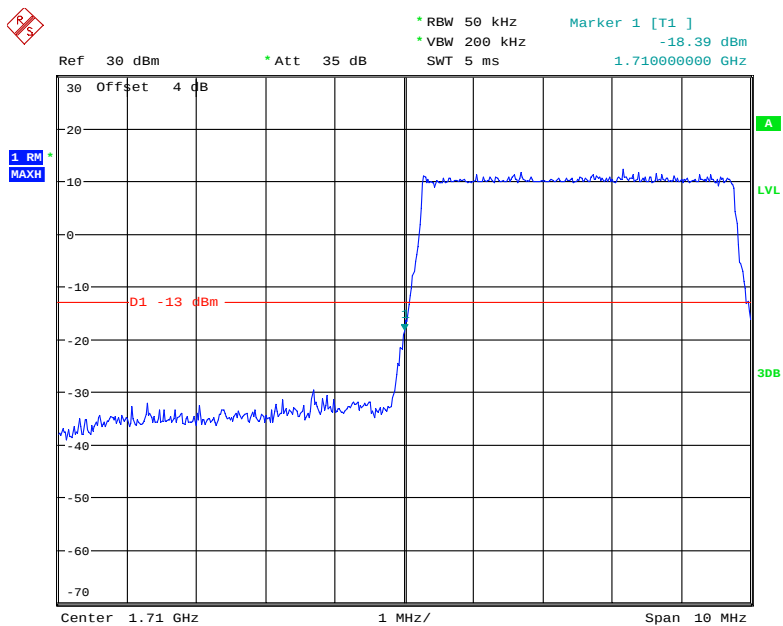


Date: 16.MAR.2019 11:19:49

QPSK_5MHz_25 RB_ Right

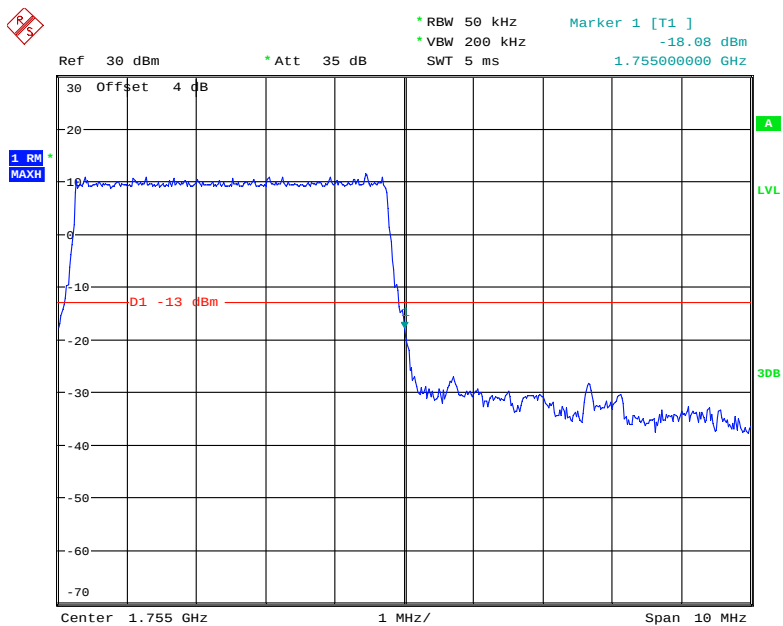


Date: 16.MAR.2019 11:21:31

QPSK_10MHz_50 RB_Left

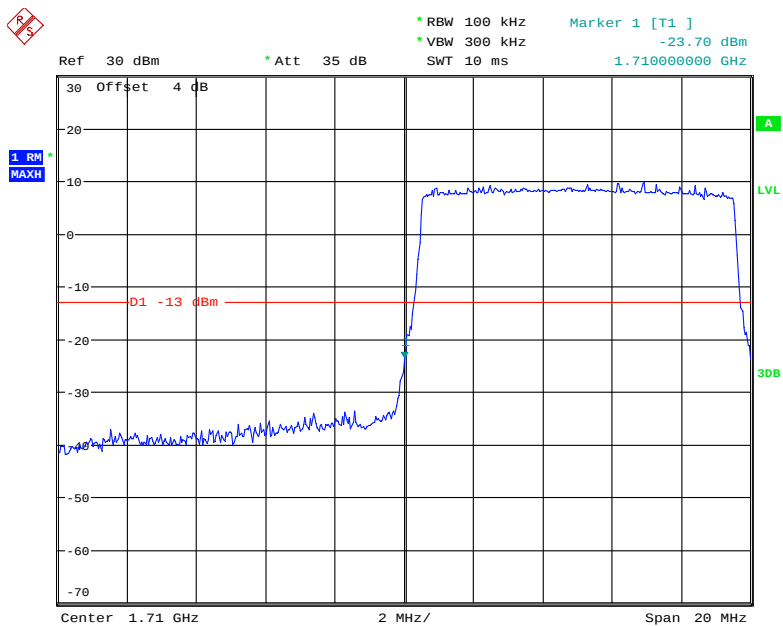


Date: 16.MAR.2019 11:26:15


QPSK_10MHz_50 RB_Right

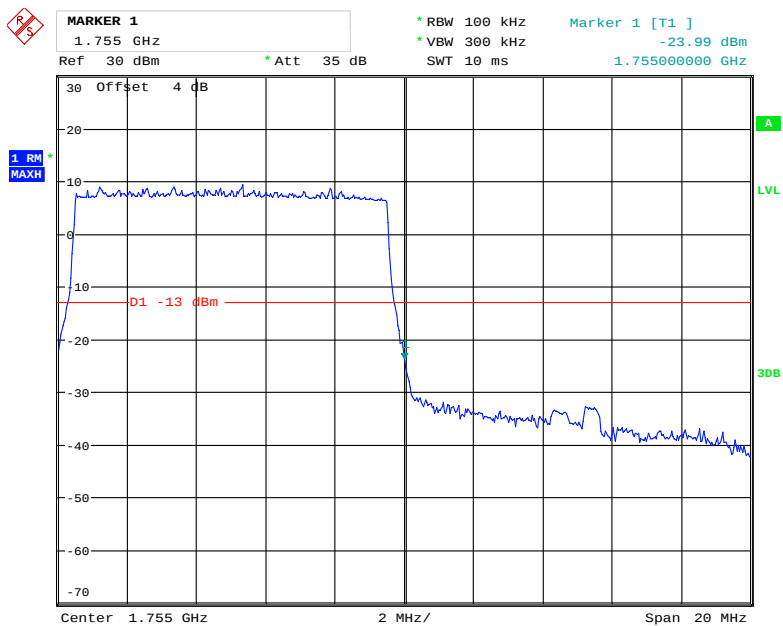

Date: 16.MAR.2019 15:19:40

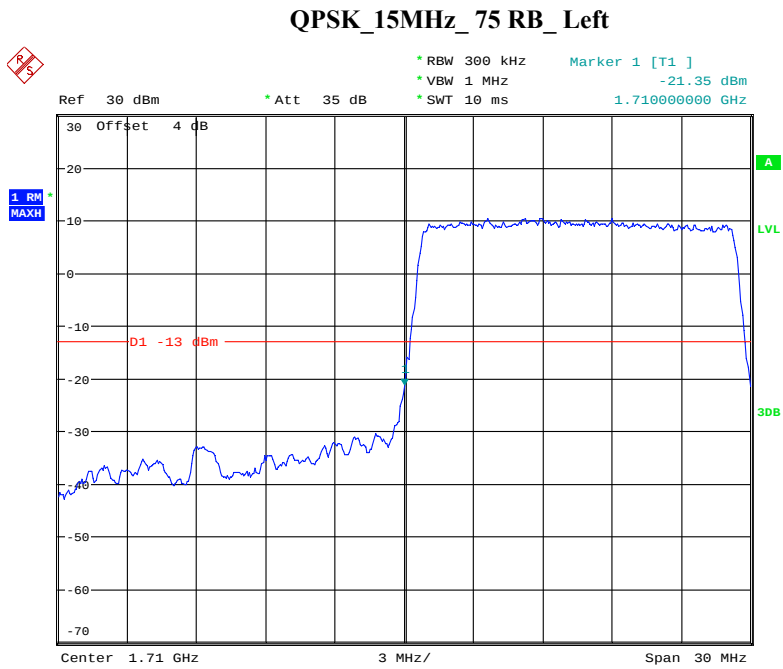


Date: 16.MAR.2019 15:24:16

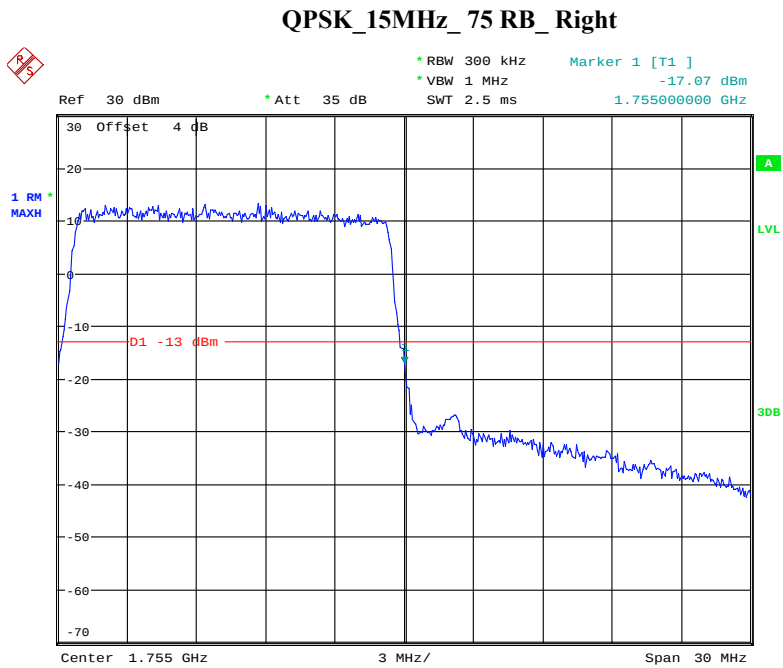


Date: 16.MAR.2019 15:21:19

QPSK_20MHz_FULL RB_Left

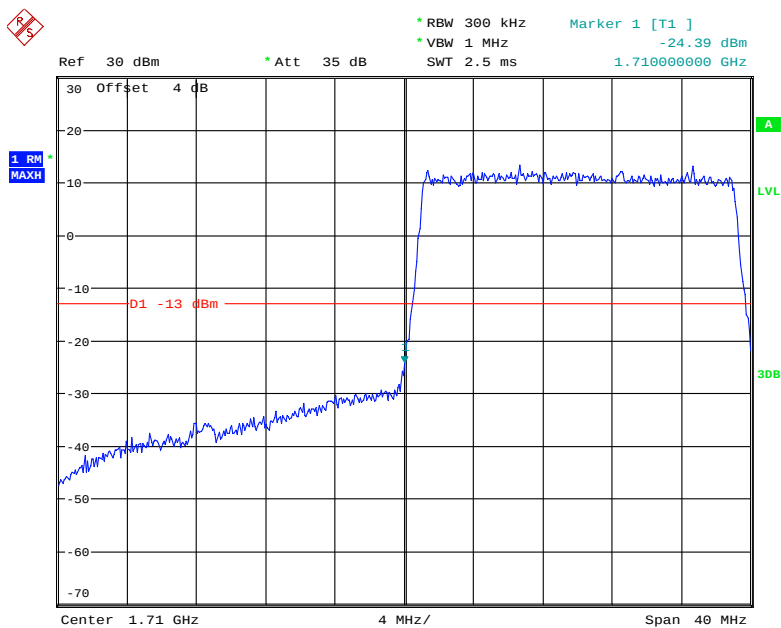


Date: 16.MAR.2019 15:25:48


QPSK_20MHz_FULL RB_Right

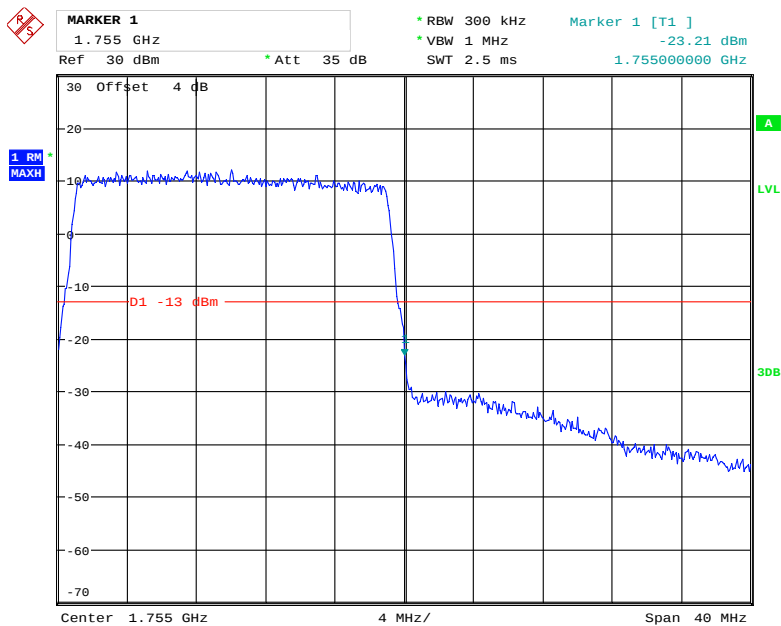


Date: 16.MAR.2019 15:26:34

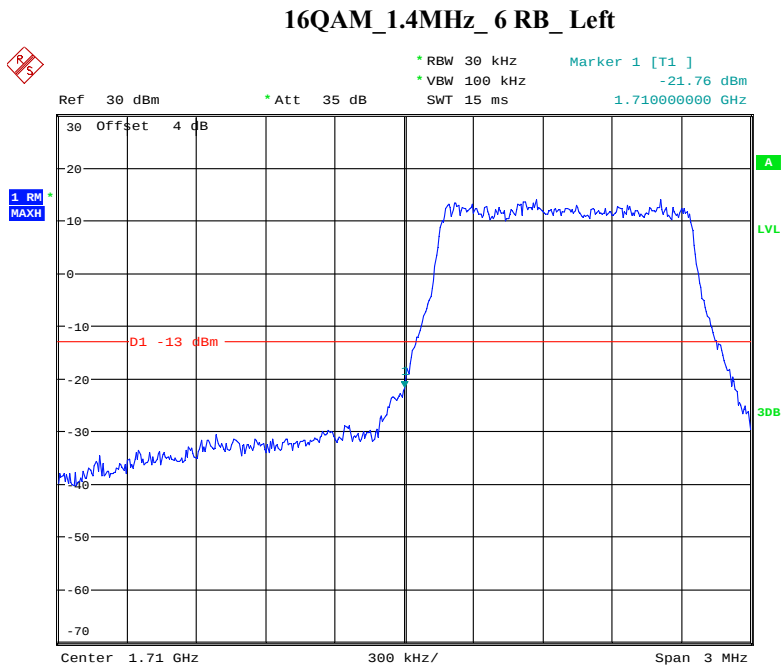


Date: 16.MAR.2019 11:15:13

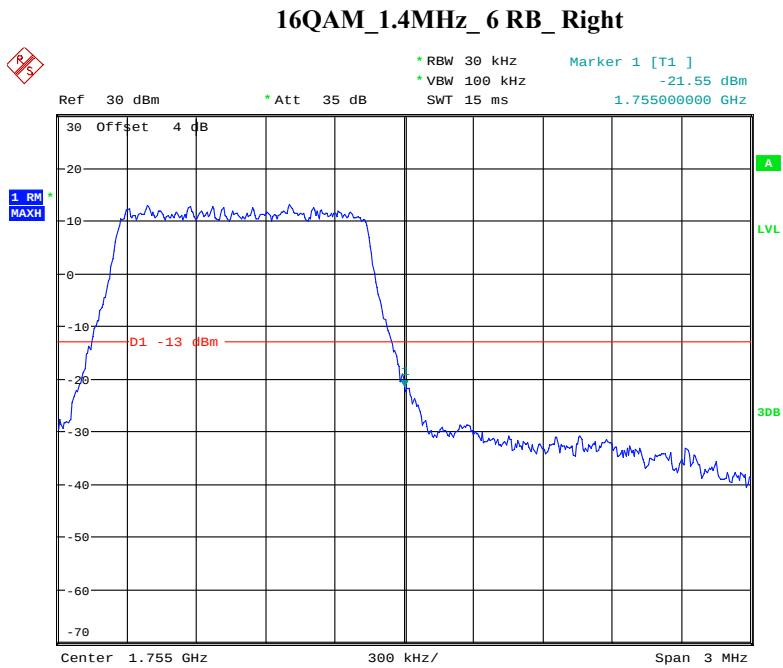


Date: 16.MAR.2019 11:16:40

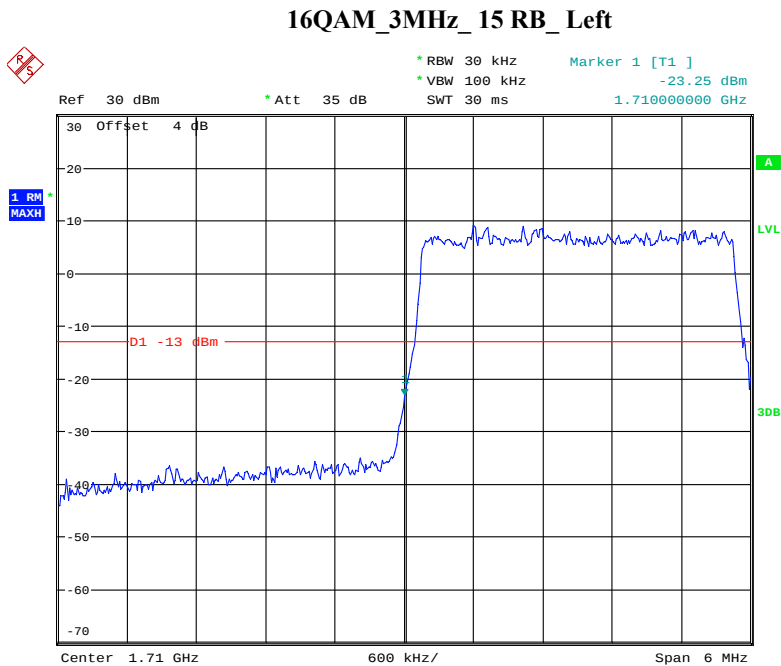


Date: 16.MAR.2019 11:17:50

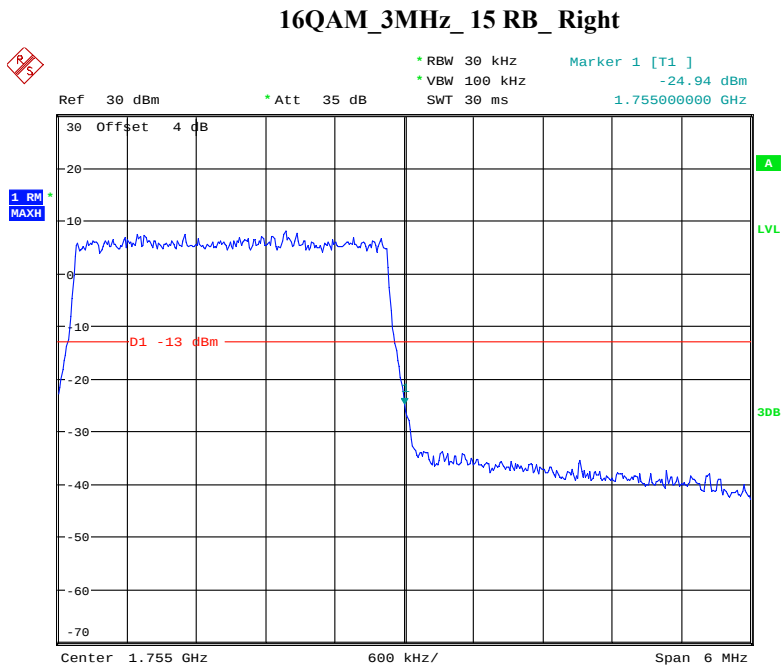

Date: 16.MAR.2019 11:18:53

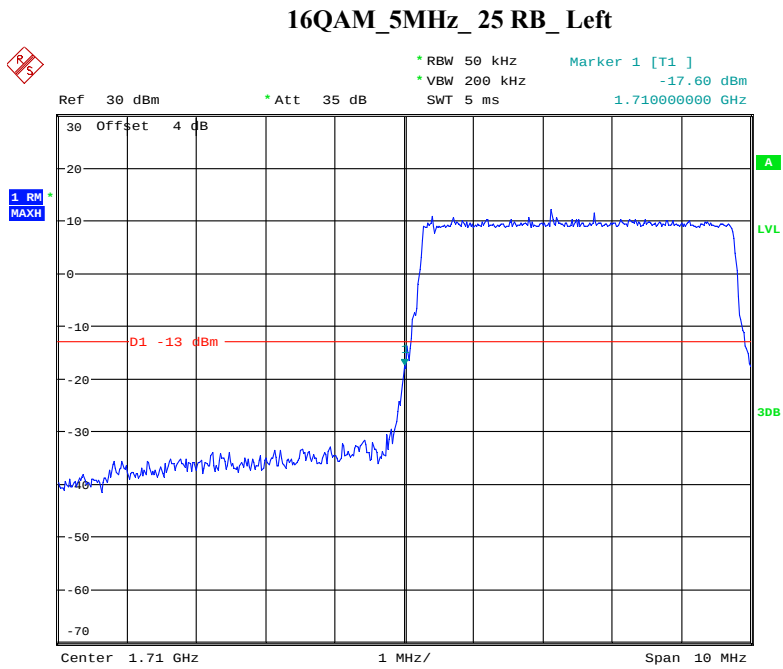


Date: 16.MAR.2019 11:20:35

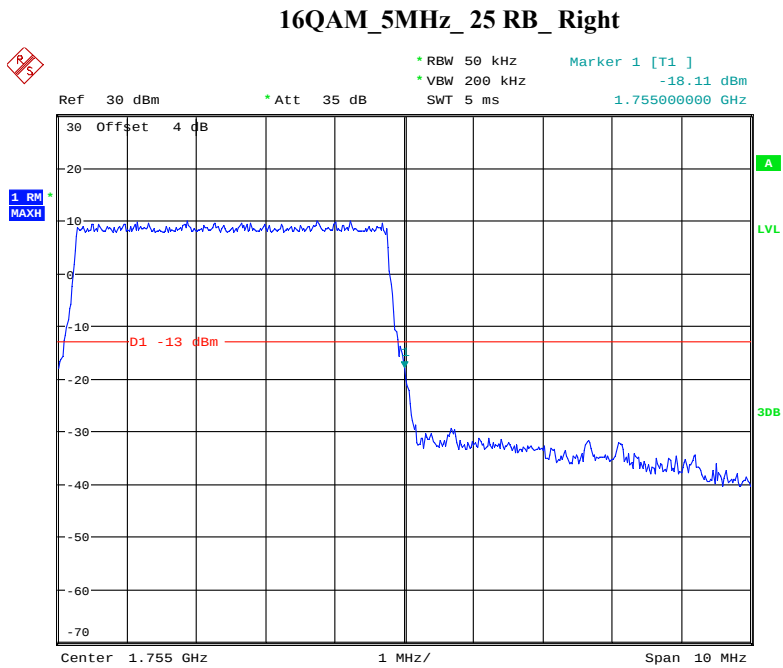

Date: 16.MAR.2019 11:22:16


LTE Band 5

QPSK_1.4MHz_6 RB_ Left

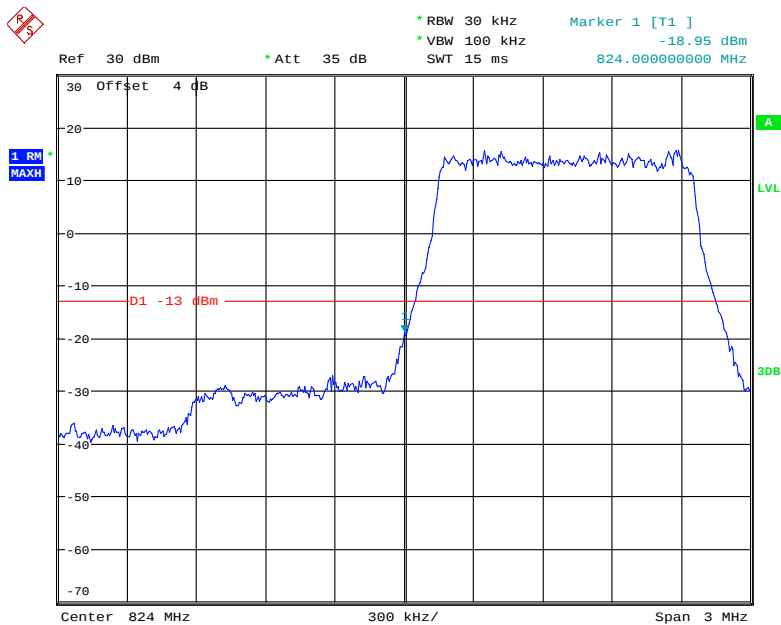


Date: 16.MAR.2019 11:28:09

QPSK_1.4MHz_6 RB_ Right

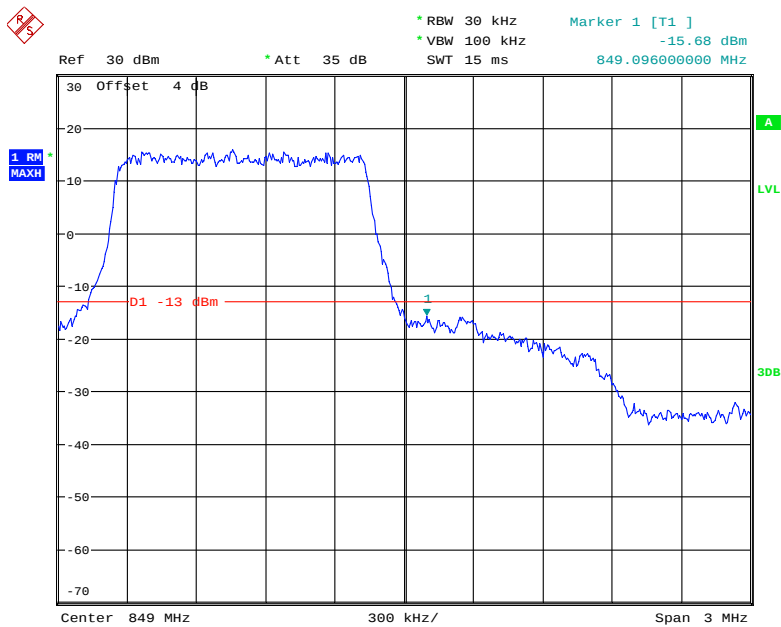


Date: 16.MAR.2019 11:29:17

QPSK_3MHz_15 RB_Left

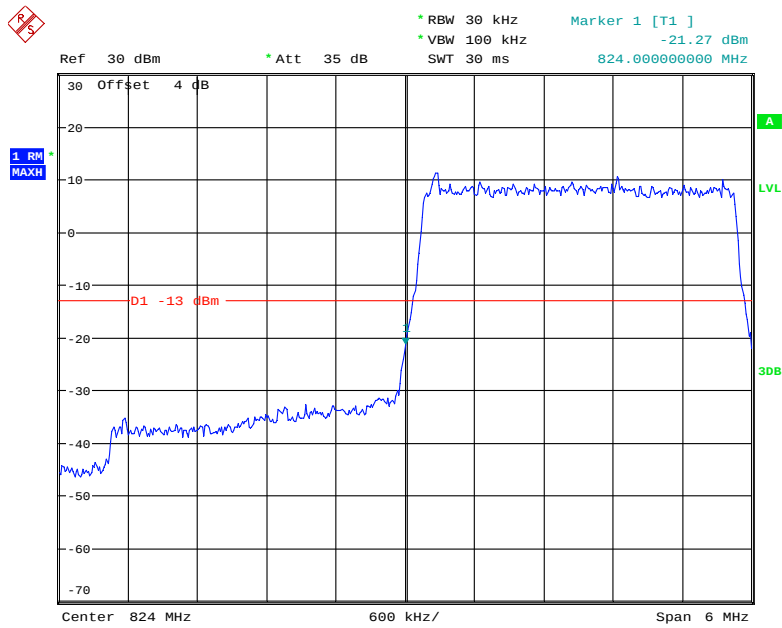


Date: 16.MAR.2019 11:30:24

QPSK_3MHz_15 RB_Right

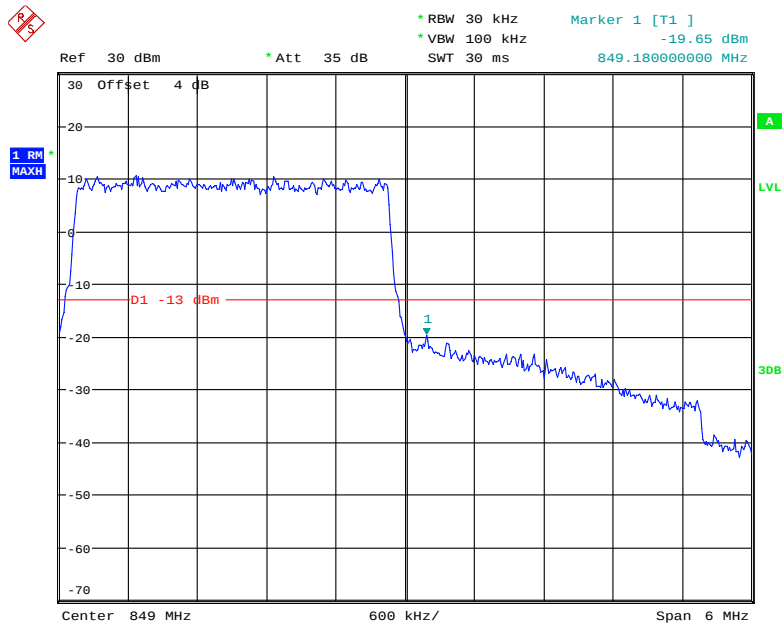


Date: 16.MAR.2019 11:31:34

QPSK_5MHz_25 RB_ Left

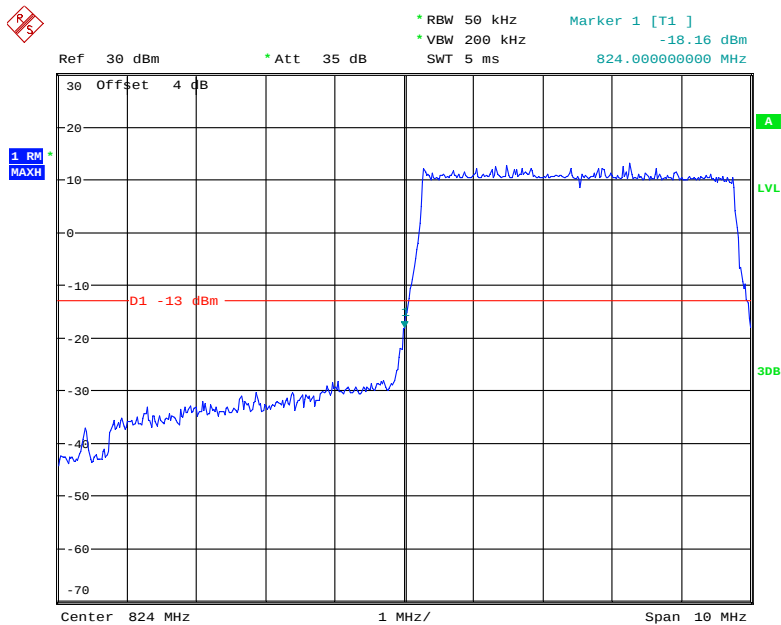


Date: 16.MAR.2019 11:32:52


QPSK_5MHz_25 RB_ Right

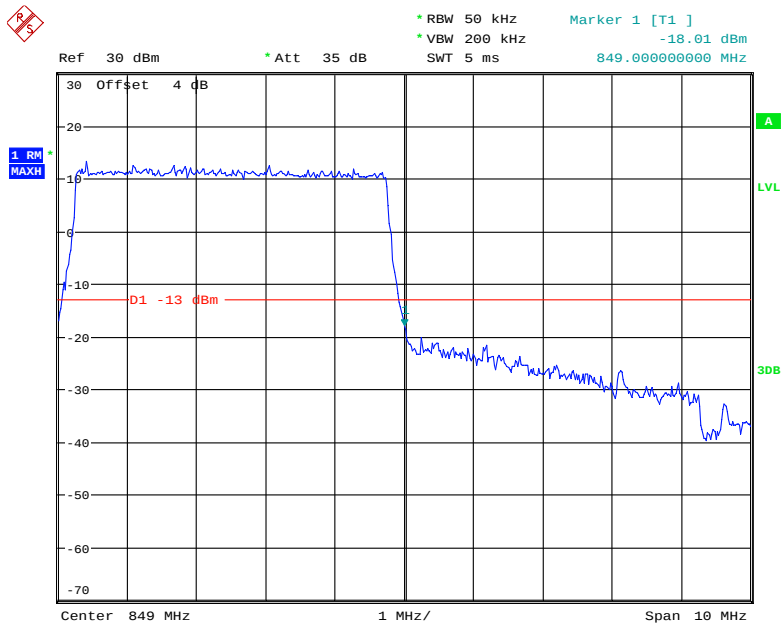

Date: 16.MAR.2019 11:34:08

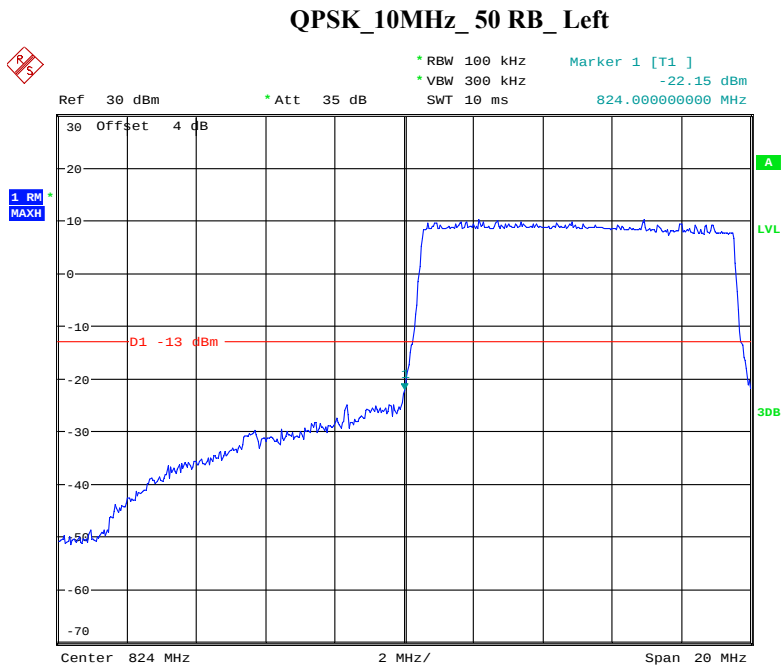


Date: 16.MAR.2019 11:38:39

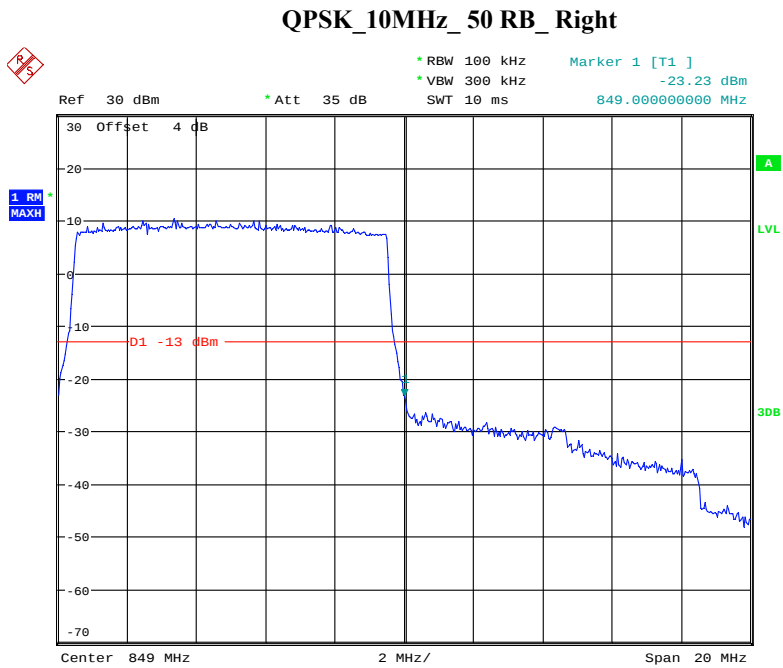


Date: 16.MAR.2019 11:42:08

16QAM_1.4MHz_6 RB_ Left

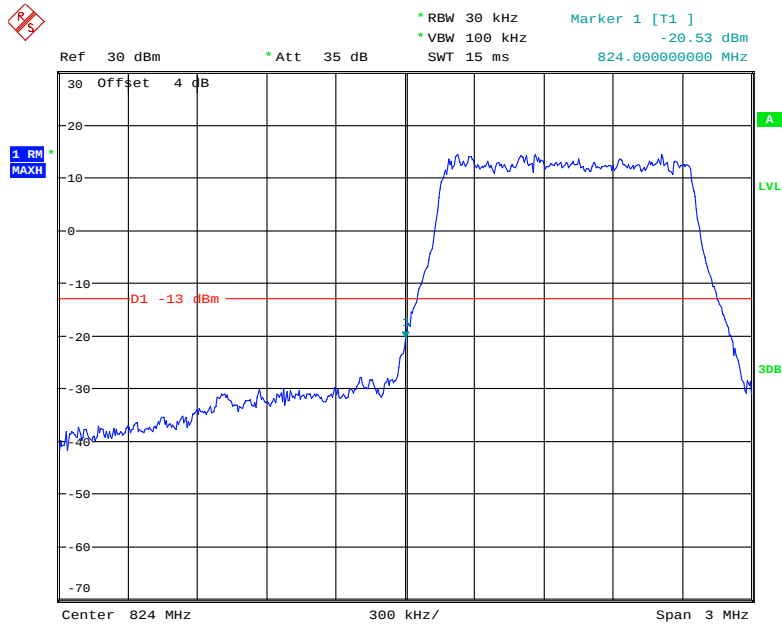


Date: 16.MAR.2019 11:28:46


16QAM_1.4MHz_6 RB_ Right

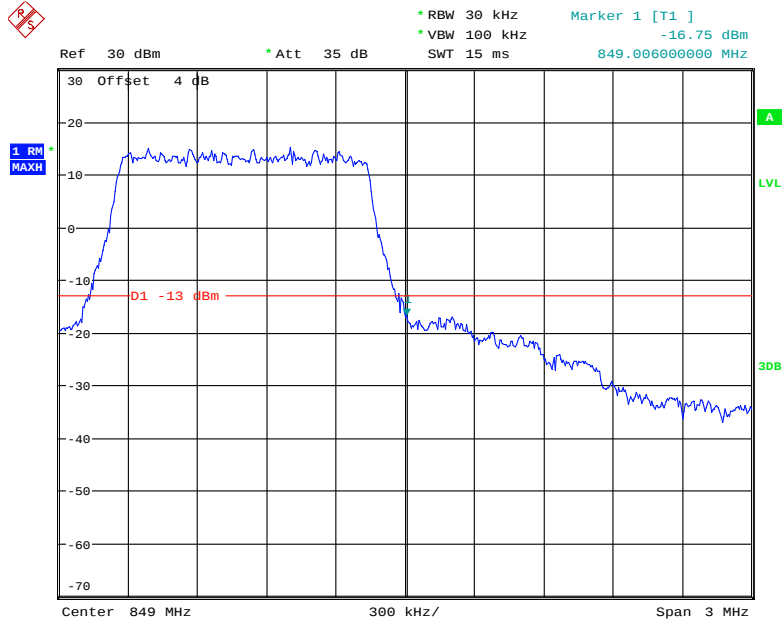


Date: 16.MAR.2019 11:29:51

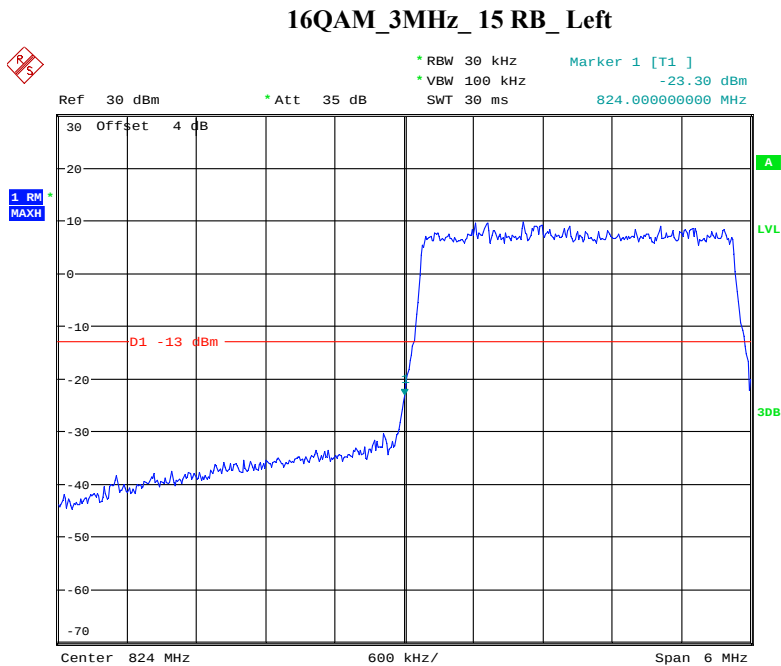


Date: 16.MAR.2019 11:30:57

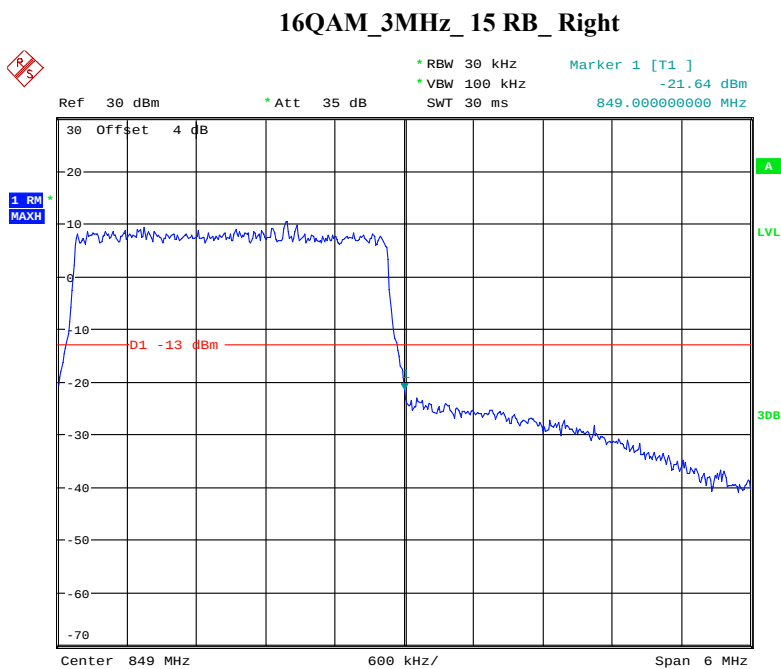

Date: 16.MAR.2019 11:32:07

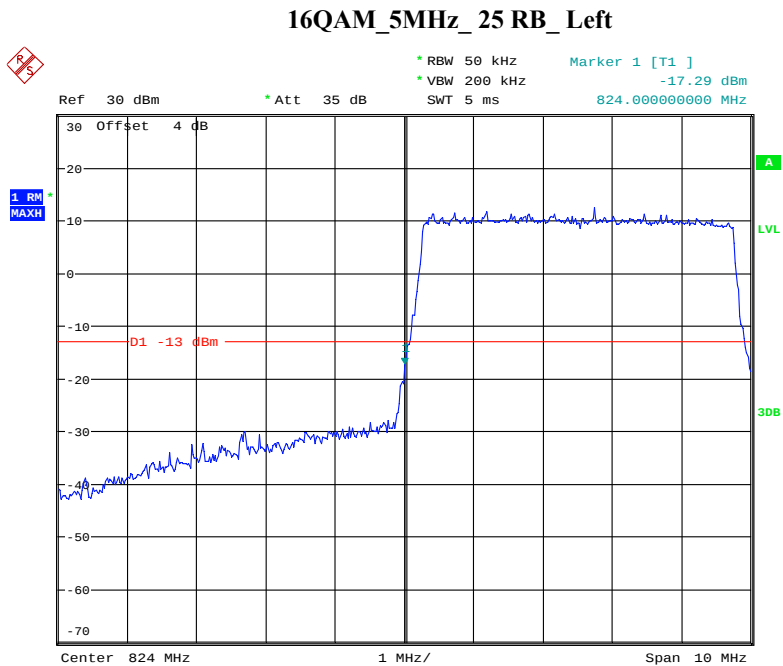


Date: 16.MAR.2019 11:33:33

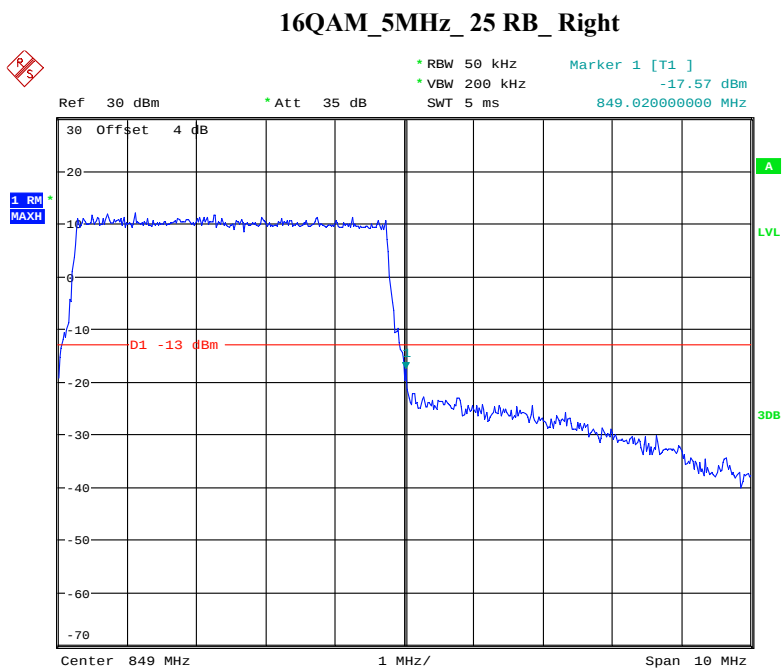

Date: 16.MAR.2019 11:34:41


LTE Band 12

QPSK_1.4MHz_6 RB_ Left

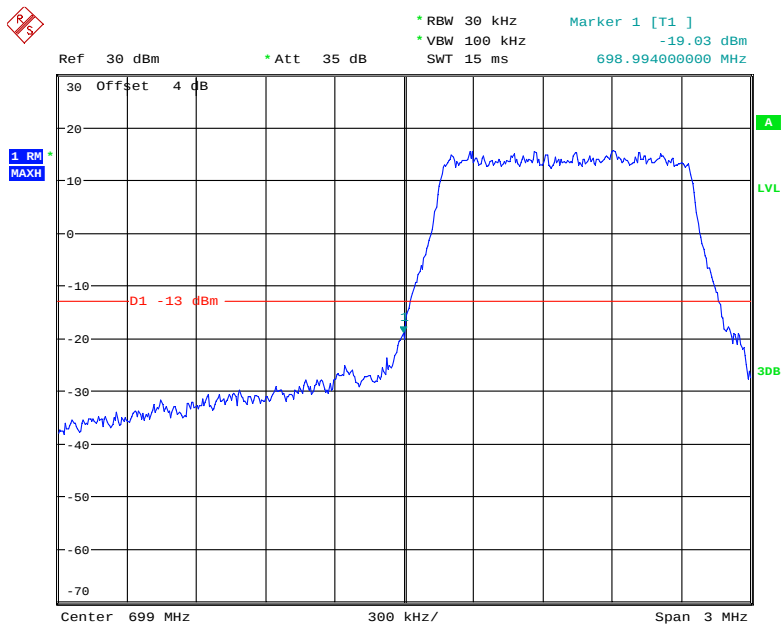


Date: 16.MAR.2019 11:44:41

QPSK_1.4MHz_6 RB_ Right

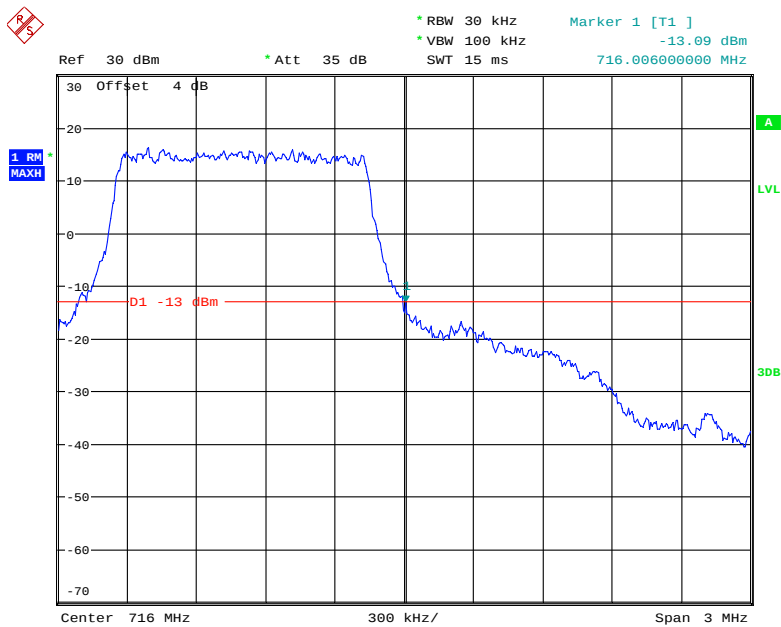


Date: 16.MAR.2019 11:45:45

QPSK_3MHz_15 RB_Left

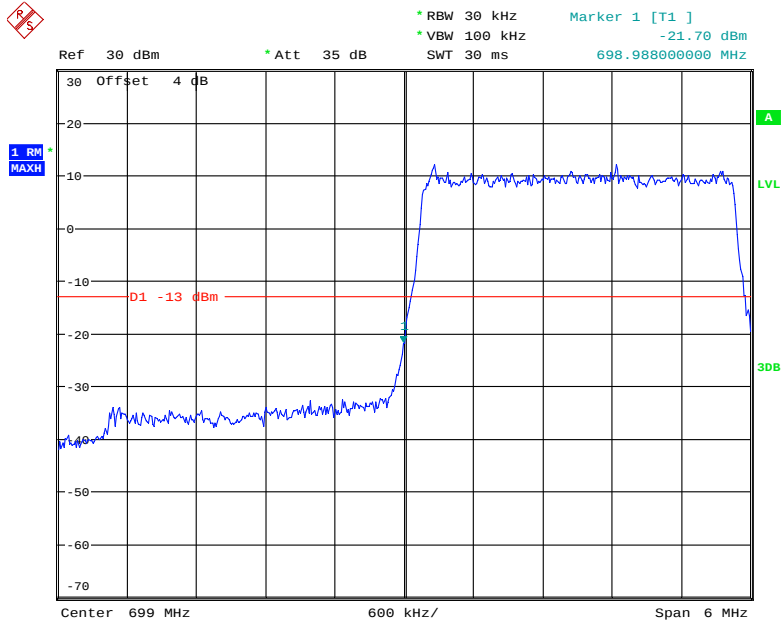


Date: 16.MAR.2019 11:46:47

QPSK_3MHz_15 RB_Right

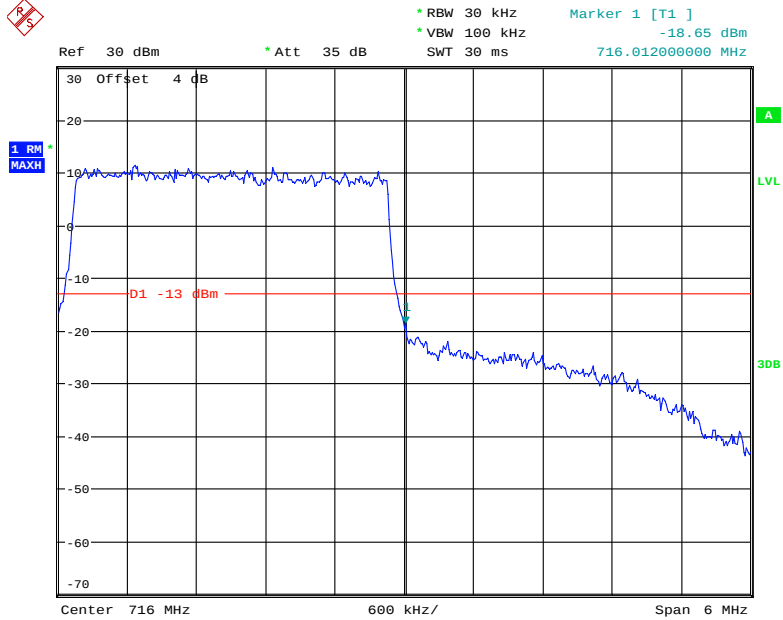


Date: 16.MAR.2019 11:47:57

QPSK_5MHz_25 RB_Left

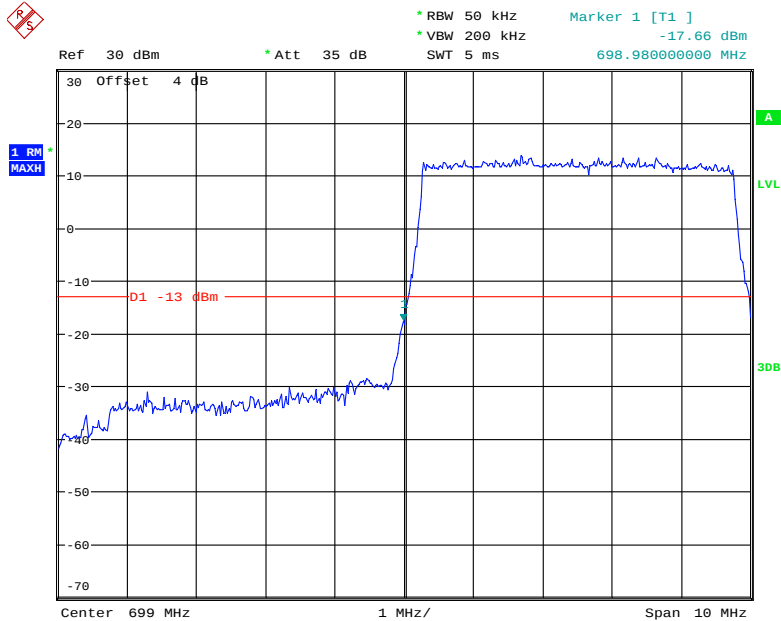


Date: 16.MAR.2019 11:49:34

QPSK_5MHz_25 RB_Right

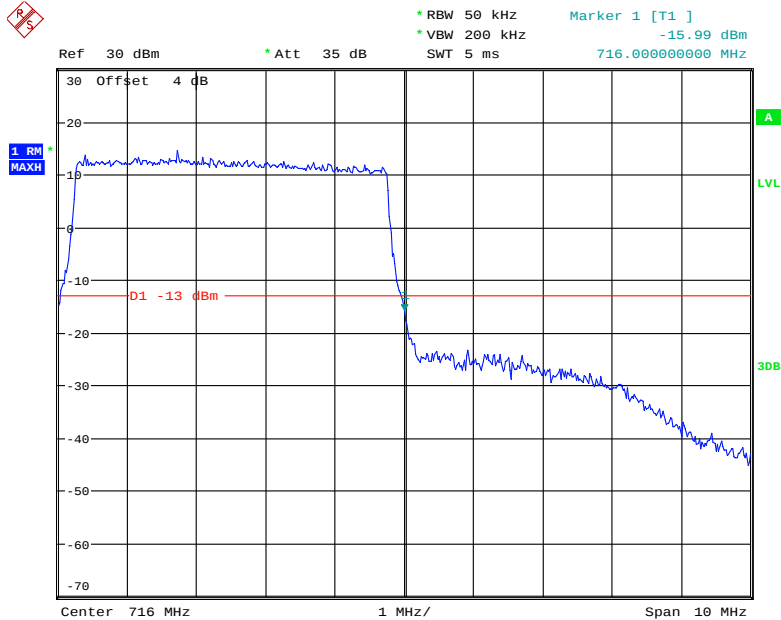


Date: 16.MAR.2019 11:51:01

QPSK_10MHz_50 RB_ Left

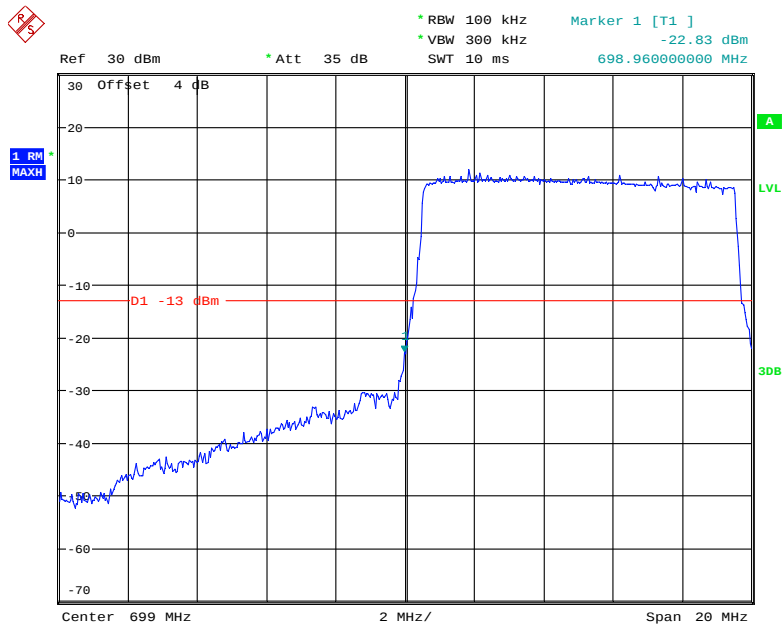


Date: 16.MAR.2019 11:52:28


QPSK_10MHz_50 RB_ Right

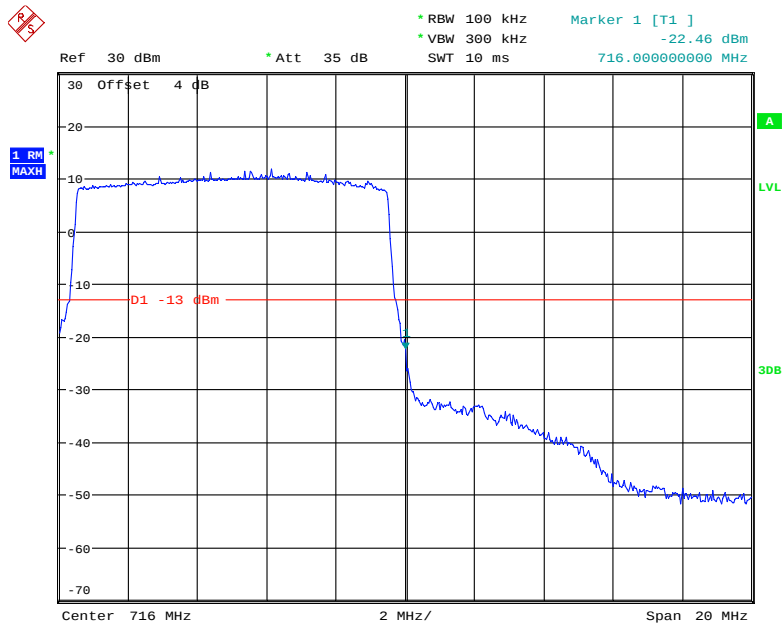


Date: 16.MAR.2019 13:14:03

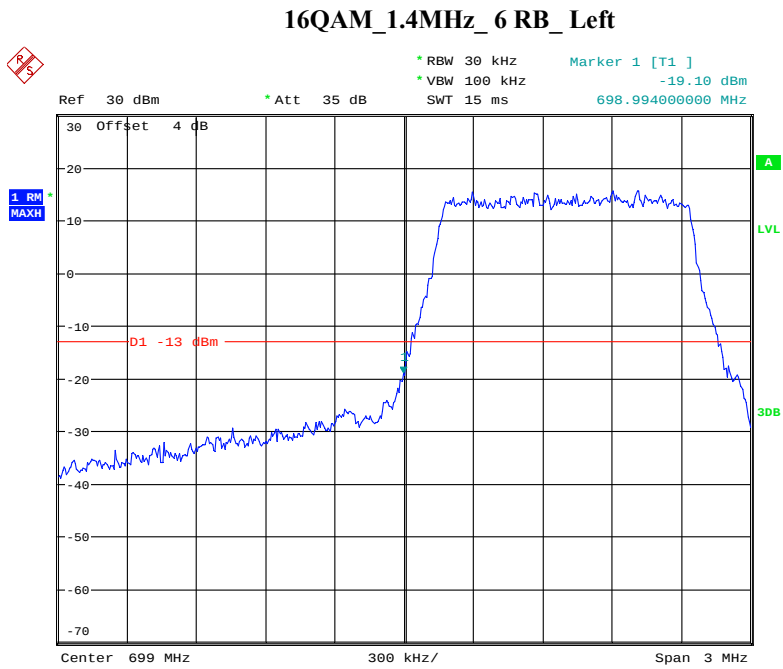


Date: 16.MAR.2019 11:45:11

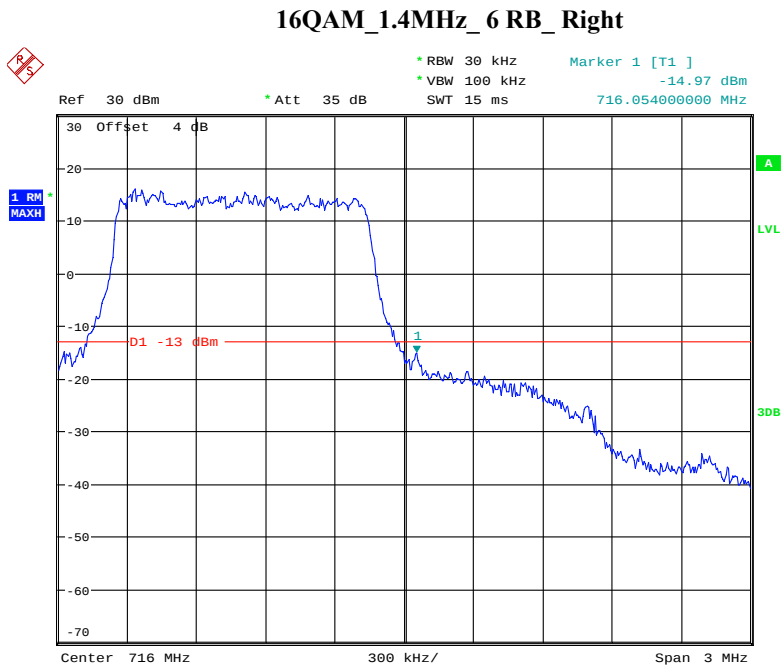

Date: 16.MAR.2019 11:46:09

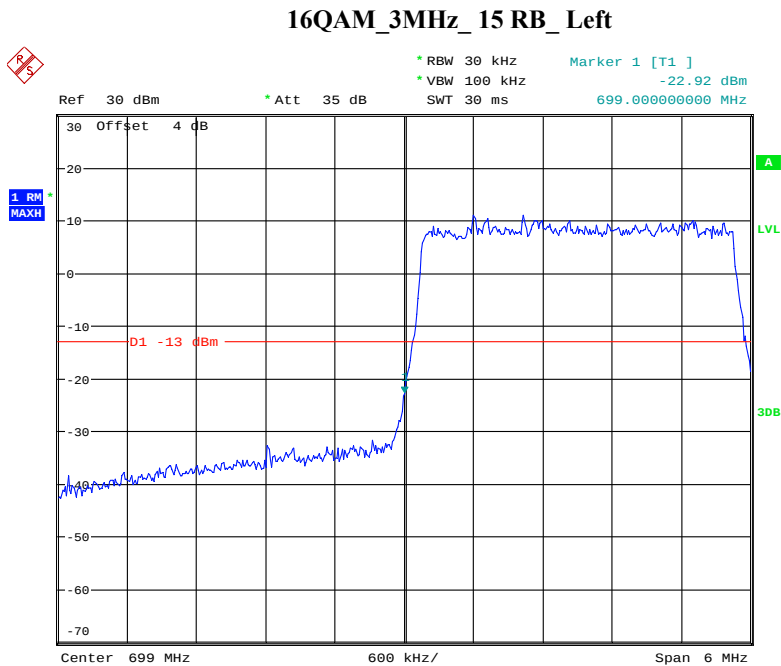


Date: 16.MAR.2019 11:47:27

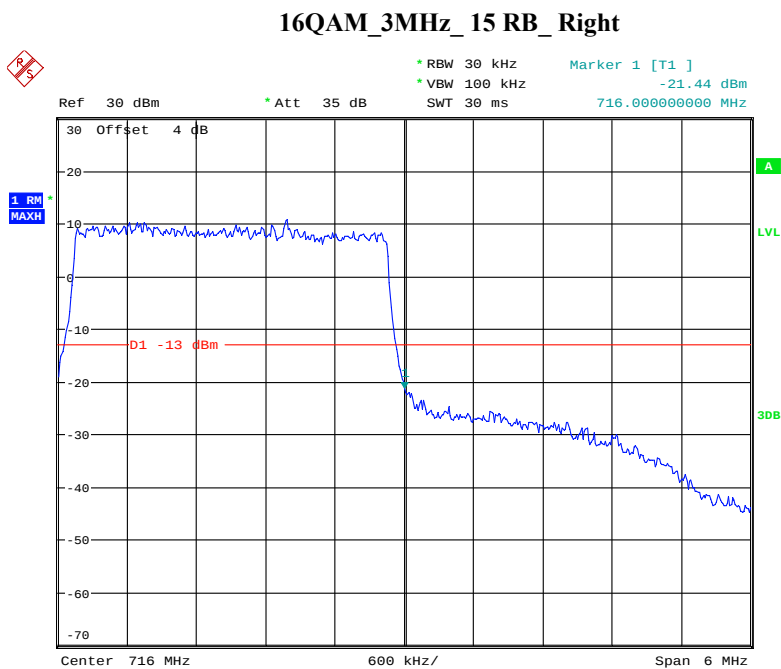


Date: 16.MAR.2019 11:48:33

16QAM_5MHz_25 RB_ Left

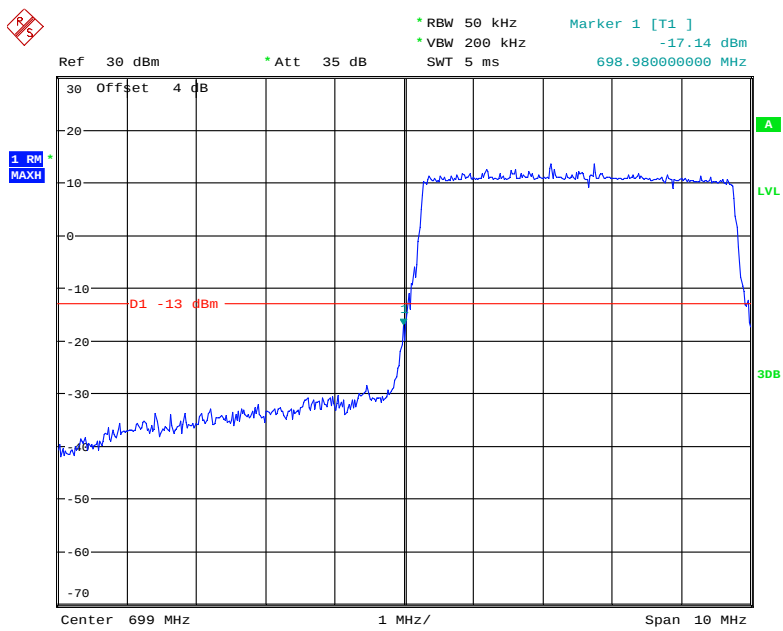

Date: 16.MAR.2019 11:50:15


16QAM_5MHz_25 RB_ Right

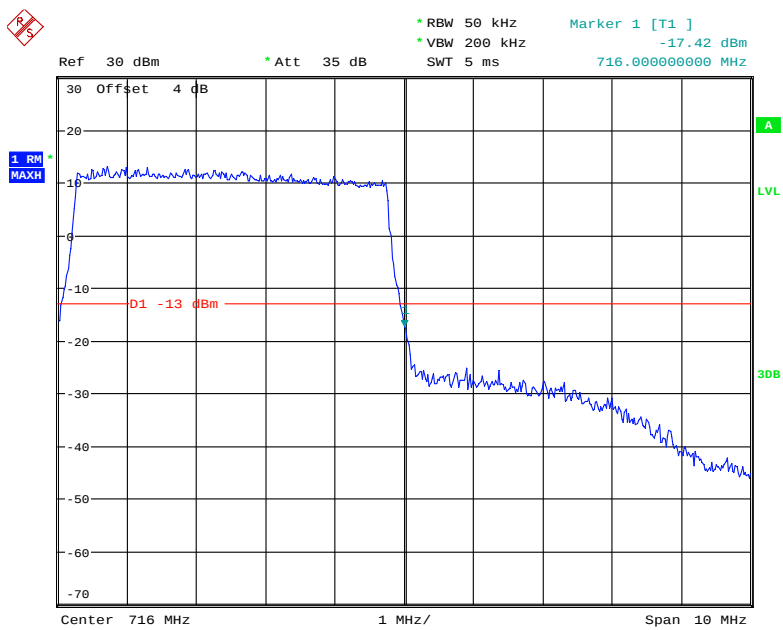

Date: 16.MAR.2019 11:51:53


LTE Band 17

QPSK_5MHz_25 RB_Left

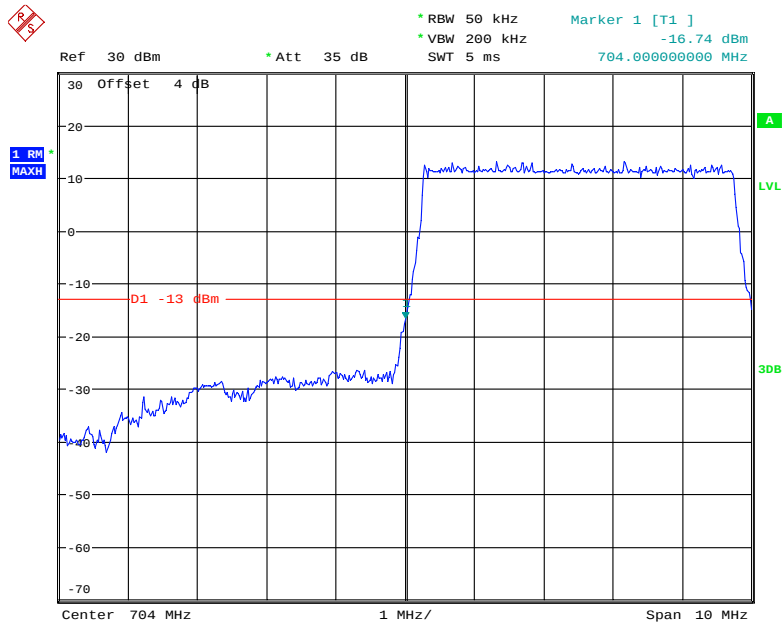


Date: 16.MAR.2019 13:18:27

QPSK_5MHz_25 RB_Right

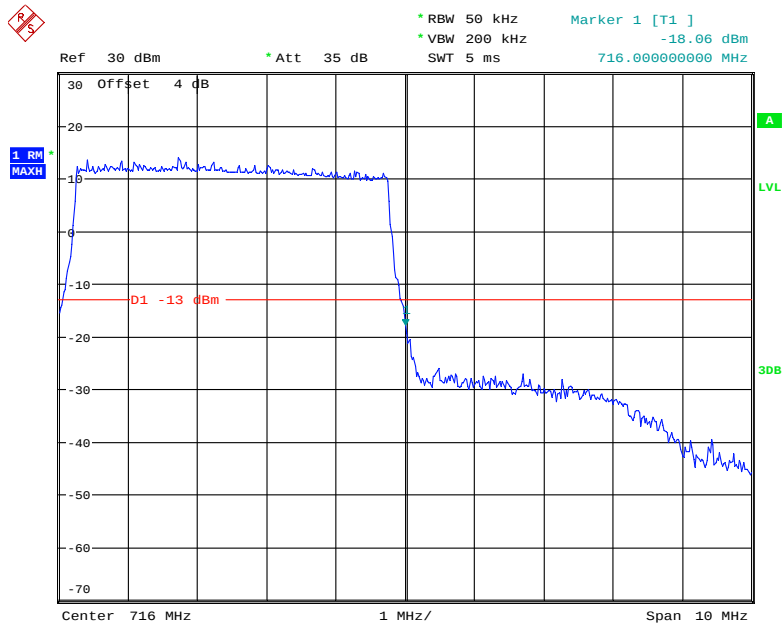


Date: 16.MAR.2019 13:20:12

QPSK_10MHz_50 RB_ Left

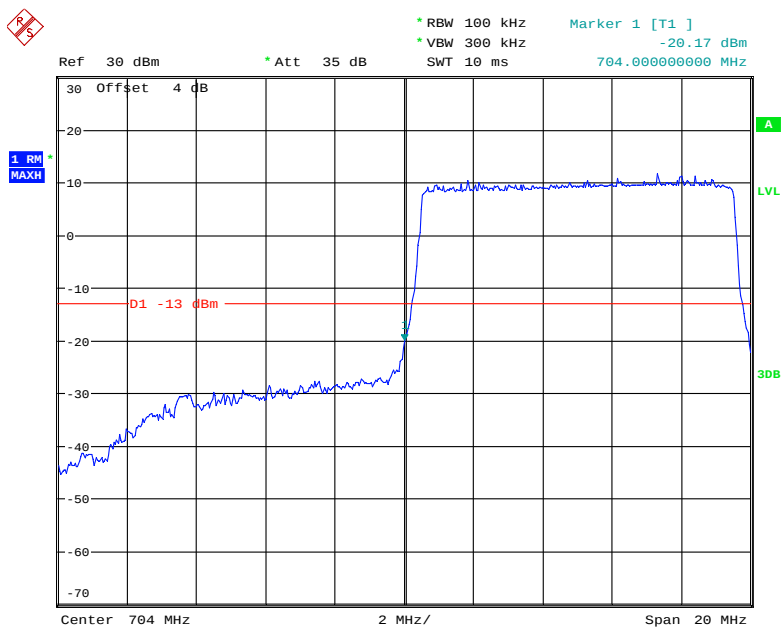


Date: 16.MAR.2019 13:22:11


QPSK_10MHz_50 RB_ Right

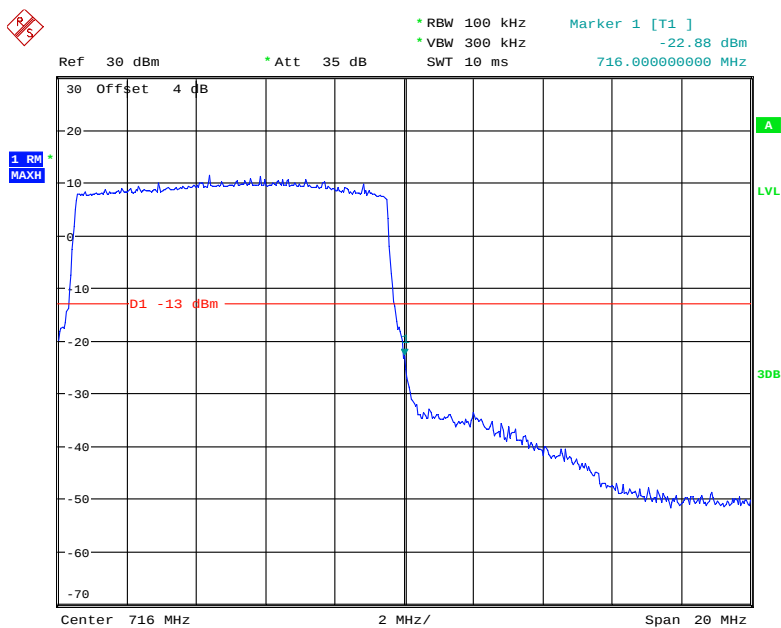

Date: 16.MAR.2019 13:23:58

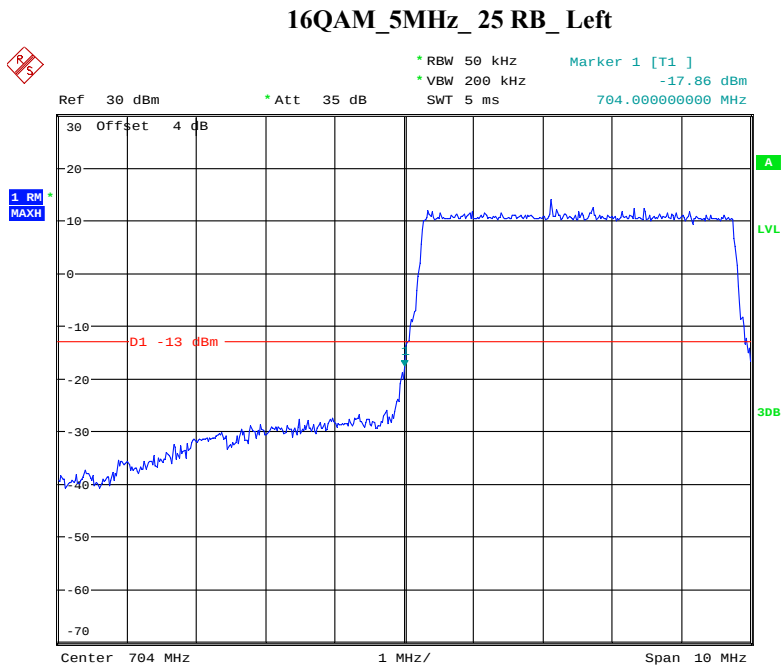

Date: 16.MAR.2019 13:19:33

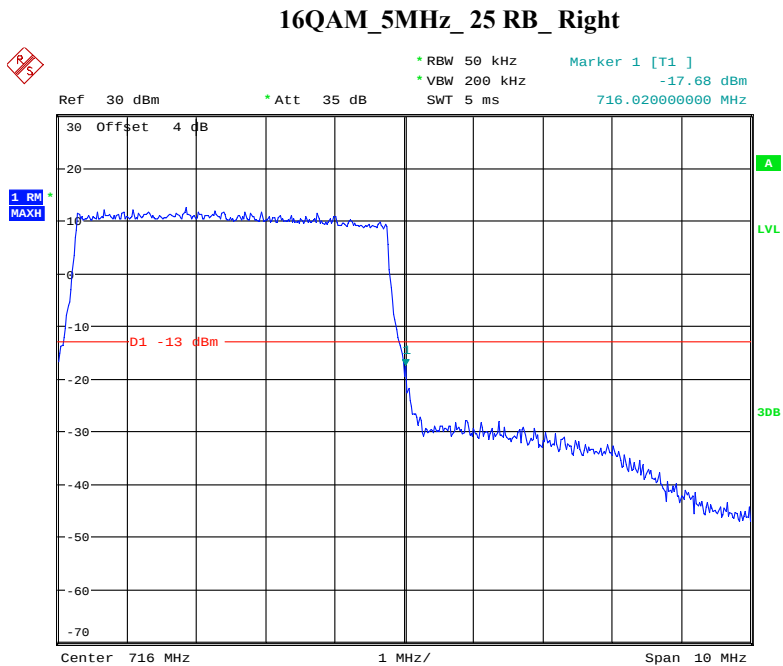

Date: 16.MAR.2019 13:20:53

FCC §2.1055, §22.355 & §24.235 & §27.54- FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

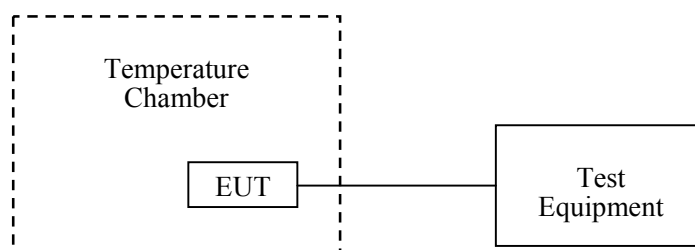

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2018-03-26	2019-03-26
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.8~25.1°C
Relative Humidity:	43~52 %
ATM Pressure:	100.4~101.2 kPa

The testing was performed by Elena Lei from 2019-03-16 to 2019-03-20.

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	13.6	1	0.00053	Pass
-20		3	0.00160	
-10		-1	-0.00053	
0		4	0.00213	
10		-3	-0.00160	
20		2	0.00106	
30		5	0.00266	
40		6	0.00319	
50		-2	-0.00106	
20	12	-6	-0.00319	
20	36	1	0.00053	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limits
°C	V _{DC}	Hz	ppm	ppm
-30	13.6	-3	-0.00359	2.5
-20		-2	-0.00239	
-10		1	0.00120	
0		5	0.00598	
10		4	0.00478	
20		-6	-0.00717	
30		-8	-0.00956	
40		-1	-0.00120	
50		2	0.00239	
20	12	6	0.00717	
20	36	3	0.00359	

LTE Band 2:

QPSK, Channel Bandwidth:1.4MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	13.6	8	0.0043	Pass
-20		6	0.0032	
-10		5	0.0027	
0		4	0.0021	
10		2	0.0011	
20		8	0.0043	
30		7	0.0037	
40		6	0.0032	
50		8	0.0043	
20	12	6	0.0032	
20	36	7	0.0037	

16QAM, Channel Bandwidth:1.4MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	13.6	8	0.0043	Pass
-20		7	0.0037	
-10		6	0.0032	
0		8	0.0043	
10		2	0.0011	
20		8	0.0043	
30		6	0.0032	
40		5	0.0027	
50		4	0.0021	
20	12	6	0.0032	
20	36	7	0.0037	

LTE Band 4:

QPSK, Channel Bandwidth:1.4MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	1710.51	1754.43	1710	1755
-20		1710.52	1754.39	1710	1755
-10		1710.54	1754.48	1710	1755
0		1710.43	1754.47	1710	1755
10		1710.57	1754.38	1710	1755
20		1710.61	1754.43	1710	1755
30		1710.49	1754.54	1710	1755
40		1710.44	1754.43	1710	1755
50		1710.59	1754.49	1710	1755
20	12	1710.61	1754.57	1710	1755
20	36	1710.52	1754.48	1710	1755

16QAM, Channel Bandwidth:1.4MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	1710.51	1754.43	1710	1755
-20		1710.52	1754.39	1710	1755
-10		1710.54	1754.48	1710	1755
0		1710.59	1754.49	1710	1755
10		1710.61	1754.57	1710	1755
20		1710.52	1754.48	1710	1755
30		1710.49	1754.54	1710	1755
40		1710.43	1754.47	1710	1755
50		1710.57	1754.38	1710	1755
20	12	1710.44	1754.43	1710	1755
20	36	1710.61	1754.43	1710	1755

LTE Band 5:

QPSK, Middle Channel, f _c = 836.5 MHz, Channel Bandwidth:1.4MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	13.6	-6	-0.0072	2.5
-20		-4	-0.0048	
-10		-5	-0.006	
0		1	0.0012	
10		-1	-0.0012	
20		-2	-0.0024	
30		4	0.0048	
40		-3	-0.0036	
50		-2	-0.0024	
20	12	-2	-0.0024	
20	36	-1	-0.0012	

16QAM, Middle Channel, f _c = 836.5 MHz, Channel Bandwidth:1.4MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	13.6	-2	-0.0024	2.5
-20		-1	-0.0012	
-10		-5	-0.006	
0		4	0.0048	
10		-3	-0.0036	
20		-2	-0.0024	
30		1	0.0012	
40		-1	-0.0012	
50		-2	-0.0024	
20	12	-6	-0.0072	
20	36	-4	-0.0048	

LTE Band 12:

QPSK, Channel Bandwidth:1.4MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	699.56	715.40	699	716
-20		699.42	715.38	699	716
-10		699.56	715.40	699	716
0		699.58	715.43	699	716
10		699.58	715.49	699	716
20		699.52	715.44	699	716
30		699.58	715.46	699	716
40		699.50	715.45	699	716
50		699.59	715.53	699	716
20	12	699.45	715.41	699	716
20	36	699.50	715.37	699	716

16QAM, Channel Bandwidth:1.4MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	699.58	715.43	699	716
-20		699.58	715.49	699	716
-10		699.56	715.40	699	716
0		699.51	715.42	699	716
10		699.42	715.38	699	716
20		699.52	715.44	699	716
30		699.58	715.46	699	716
40		699.45	715.41	699	716
50		699.50	715.37	699	716
20	12	699.50	715.45	699	716
20	36	699.59	715.53	699	716

LTE Band 17:

QPSK, Channel Bandwidth:5MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	704.54	715.43	704	716
-20		704.57	715.52	704	716
-10		704.44	715.37	704	716
0		704.50	715.52	704	716
10		704.44	715.50	704	716
20		704.52	715.44	704	716
30		704.62	715.51	704	716
40		704.49	715.38	704	716
50		704.56	715.47	704	716
20	12	704.61	715.41	704	716
20	36	704.56	715.48	704	716

16QAM, Channel Bandwidth:5MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	13.6	704.44	715.50	704	716
-20		704.52	715.44	704	716
-10		704.62	715.51	704	716
0		704.50	715.52	704	716
10		704.54	715.43	704	716
20		704.57	715.52	704	716
30		704.49	715.38	704	716
40		704.44	715.37	704	716
50		704.56	715.47	704	716
20	12	704.61	715.41	704	716
20	36	704.56	715.48	704	716

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******