

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
Shenzhen First Coating Technology Co., Ltd

Smart Bracelet

Model No.: F8, B15P, B15, S1, D2, H1, TALK, M8, M2, E07, E5, F9, H7

FCC ID: 2ALY5-F8

Prepared for : Shenzhen First Coating Technology Co., Ltd  
Address : Floor 501, Bldg. A, Rongfeng Packaging Ind. Park,  
Nanwan Street, Longgang District, Shenzhen,  
Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan  
Rd. Science & Industry Park, Nan Shan, Shenzhen,  
Guangdong P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20170457  
Date of Test : April 18, 2017  
Date of Report : April 25, 2017

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	7
1.5. Measurement Uncertainty .....	7
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>9</b>
3.1. Operating Mode .....	9
3.2. Configuration and peripherals .....	9
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>10</b>
<b>5. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>11</b>
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement .....	11
5.4. Operating Condition of EUT .....	11
5.5. Test Procedure .....	12
5.6. Power Line Conducted Emission Measurement Results .....	13
<b>6. 6DB BANDWIDTH MEASUREMENT .....</b>	<b>19</b>
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement .....	19
6.4. Operating Condition of EUT .....	19
6.5. Test Procedure .....	19
6.6. Test Result .....	20
<b>7. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>22</b>
7.1. Block Diagram of Test Setup.....	22
7.2. The Requirement For Section 15.247(b)(3).....	22
7.3. EUT Configuration on Measurement .....	22
7.4. Operating Condition of EUT .....	22
7.5. Test Procedure .....	22
7.6. Test Result .....	23
<b>8. POWER SPECTRAL DENSITY MEASUREMENT .....</b>	<b>25</b>
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(e).....	25
8.3. EUT Configuration on Measurement .....	25
8.4. Operating Condition of EUT .....	25
8.5. Test Procedure .....	26
8.6. Test Result .....	27
<b>9. BAND EDGE COMPLIANCE TEST .....</b>	<b>29</b>
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(d) .....	29

9.3.	EUT Configuration on Measurement .....	29
9.4.	Operating Condition of EUT .....	30
9.5.	Test Procedure .....	30
9.6.	Test Result .....	30
<b>10.</b>	<b>RADIATED SPURIOUS EMISSION TEST .....</b>	<b>37</b>
10.1.	Block Diagram of Test Setup.....	37
10.2.	The Limit For Section 15.247(d) .....	38
10.3.	Restricted bands of operation .....	39
10.4.	Configuration of EUT on Measurement .....	39
10.5.	Operating Condition of EUT .....	39
10.6.	Test Procedure .....	40
10.7.	The Field Strength of Radiation Emission Measurement Results .....	40
<b>11.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>53</b>
11.1.	The Requirement .....	53
11.2.	Antenna Construction .....	53

## Test Report Certification

Applicant : Shenzhen First Coating Technology Co., Ltd  
 Manufacturer : Shenzhen First Coating Technology Co., Ltd  
 EUT Description : Smart Bracelet  
 (A) MODEL NO.: F8, B15P, B15, S1, D2, H1, TALK, M8, M2, E07, E5, F9, H7  
 (B) TRADE NAME.: dido  
 (C) POWER SUPPLY: DC 3.7V & DC 5V (Power by USB Port)

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.10: 2013**


The EUT was tested according to DTS test procedure of KDB558074 D01 DTS Meas Guidance v03r03 June 2015 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : April 18, 2017  
 Date of Report : April 25, 2017

Prepared by :   
 (Bob Wang, Engineer)

Approved & Authorized Signer :   
 ( Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Smart Bracelet
Model Number	:	F8, B15P, B15, S1, D2, H1, TALK, M8, M2, E07, E5, F9, H7 (Note: We hereby state that these models are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement. Therefore only model F8 is tested for EMC tests.)
Trade Mark	:	dido
Bluetooth version	:	Bluetooth V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	0dBi
Antenna type	:	Integral Antenna
Power Supply	:	DC 3.7V & DC 5V (Power by USB Port)
Modulation mode	:	GFSK
Applicant	:	Shenzhen First Coating Technology Co., Ltd
Address	:	Floor 501, Bldg. A, Rongfeng Packaging Ind. Park, Nanwan Street, Longgang District, Shenzhen, Guangdong, China
Manufacturer	:	Shenzhen First Coating Technology Co., Ltd
Address	:	Floor 501, Bldg. A, Rongfeng Packaging Ind. Park, Nanwan Street, Longgang District, Shenzhen, Guangdong, China
Date of sample received	:	April 10, 2017
Date of Test	:	April 18, 2017

### 1.2. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 1.3. Special Accessory and Auxiliary Equipment

Notebook PC : Manufacturer: LENOVO  
M/N: 4290-RT8  
S/N: R9-FW93G 11/08

## 1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD  
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty  
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty  
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty  
(Above 1GHz) = 4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 7, 2017	Jan. 6, 2018
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 7, 2017	Jan. 6, 2018
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 7, 2017	Jan. 6, 2018
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 7, 2017	Jan. 6, 2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 12, 2018	Jan. 12, 2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 12, 2018	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 12, 2018	Jan. 12, 2017
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 12, 2018	Jan. 12, 2018
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 7, 2017	Jan. 6, 2018
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 7, 2017	Jan. 6, 2018
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 7, 2017	Jan. 6, 2018
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 7, 2017	Jan. 6, 2018

### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

#### 3.2. Configuration and peripherals

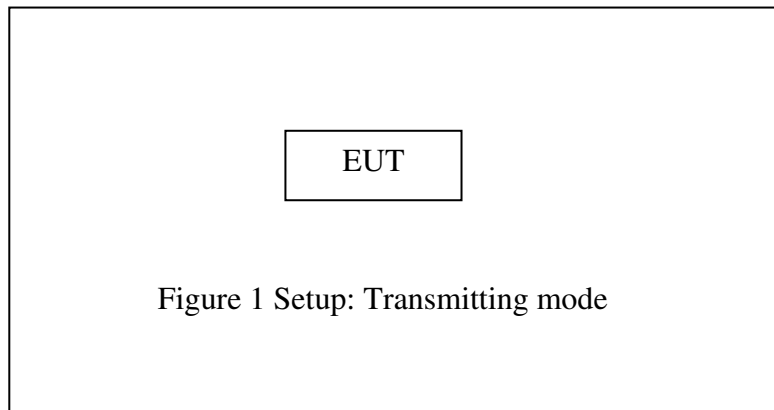


#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. POWER LINE CONDUCTED MEASUREMENT

### 5.1. Block Diagram of Test Setup

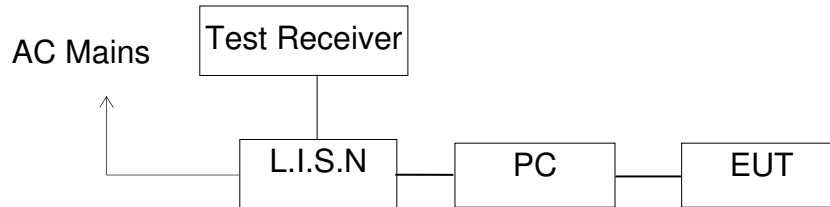

(EUT: Smart Bracelet)

### 5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

### 5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 5.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Test mode : Charging AC 120V; 60Hz								
<b>MEASUREMENT RESULT: "FC-0418-02_fin"</b>								
4/18/2017 5:41PM								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.150000	53.50	10.5	66	12.5	QP	N	GND	
0.490000	38.50	10.7	56	17.7	QP	N	GND	
1.905000	28.70	11.0	56	27.3	QP	N	GND	
2.760000	25.20	11.0	56	30.8	QP	N	GND	
5.180000	20.70	11.2	60	39.3	QP	N	GND	
29.530000	23.30	11.5	60	36.7	QP	N	GND	
<b>MEASUREMENT RESULT: "FC-0418-02_fin2"</b>								
4/18/2017 5:41PM								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.155000	38.30	10.5	56	17.4	AV	N	GND	
0.490000	34.70	10.7	46	11.5	AV	N	GND	
1.905000	23.90	11.0	46	22.1	AV	N	GND	
2.140000	23.90	11.0	46	22.1	AV	N	GND	
5.150000	13.10	11.2	50	36.9	AV	N	GND	
23.995000	21.20	11.5	50	28.8	AV	N	GND	
<b>MEASUREMENT RESULT: "FC-0418-01_fin"</b>								
4/18/2017 5:37PM								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.165000	51.30	10.5	65	13.9	QP	L1	GND	
0.490000	38.80	10.7	56	17.4	QP	L1	GND	
2.000000	28.50	11.0	56	27.5	QP	L1	GND	
3.560000	23.90	11.1	56	32.1	QP	L1	GND	
5.250000	18.70	11.2	60	41.3	QP	L1	GND	
26.890000	23.40	11.5	60	36.6	QP	L1	GND	
<b>MEASUREMENT RESULT: "FC-0418-01_fin2"</b>								
4/18/2017 5:37PM								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.170000	36.40	10.5	55	18.6	AV	L1	GND	
0.490000	34.90	10.7	46	11.3	AV	L1	GND	
1.990000	22.90	11.0	46	23.1	AV	L1	GND	
2.280000	23.10	11.0	46	22.9	AV	L1	GND	
5.260000	11.00	11.2	50	39.0	AV	L1	GND	
23.995000	22.40	11.5	50	27.6	AV	L1	GND	

Test mode : Charging AC 240V; 60Hz								
<b>MEASUREMENT RESULT: "FC-0418-04_fin"</b>								
4/18/2017 8:39AM								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.155000	50.90	10.5	66	14.8	QP	L1	GND	
0.505000	37.80	10.7	56	18.2	QP	L1	GND	
1.835000	28.80	11.0	56	27.2	QP	L1	GND	
2.670000	27.80	11.0	56	28.2	QP	L1	GND	
5.310000	20.10	11.2	60	39.9	QP	L1	GND	
26.080000	25.80	11.5	60	34.2	QP	L1	GND	
<b>MEASUREMENT RESULT: "FC-0418-04_fin2"</b>								
4/18/2017 8:39AM								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.155000	35.80	10.5	56	19.9	AV	L1	GND	
0.505000	34.70	10.7	46	11.3	AV	L1	GND	
2.050000	27.80	11.0	46	18.2	AV	L1	GND	
2.370000	22.50	11.0	46	23.5	AV	L1	GND	
6.290000	15.80	11.2	50	34.2	AV	L1	GND	
25.840000	20.70	11.5	50	29.3	AV	L1	GND	
<b>MEASUREMENT RESULT: "FC-0418-03_fin"</b>								
4/18/2017 5:45PM								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.175000	48.70	10.5	65	16.0	QP	N	GND	
0.505000	38.10	10.7	56	17.9	QP	N	GND	
1.825000	28.30	11.0	56	27.7	QP	N	GND	
2.170000	30.40	11.0	56	25.6	QP	N	GND	
5.140000	21.80	11.2	60	38.2	QP	N	GND	
28.120000	26.50	11.5	60	33.5	QP	N	GND	
<b>MEASUREMENT RESULT: "FC-0418-03_fin2"</b>								
4/18/2017 5:45PM								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.155000	36.70	10.5	56	19.0	AV	N	GND	
0.505000	34.90	10.7	46	11.1	AV	N	GND	
2.030000	28.50	11.0	46	17.5	AV	N	GND	
2.150000	26.00	11.0	46	20.0	AV	N	GND	
6.450000	17.30	11.2	50	32.7	AV	N	GND	
23.995000	22.70	11.5	50	27.3	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Smart Bracelet M/N:F8  
 Manufacturer: FIRST COATING  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: N 120V/60Hz  
 Comment: Report NO.:ATE20170457  
 Start of Test: 4/18/2017 / 5:38:22PM

SCAN TABLE: "V 9K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

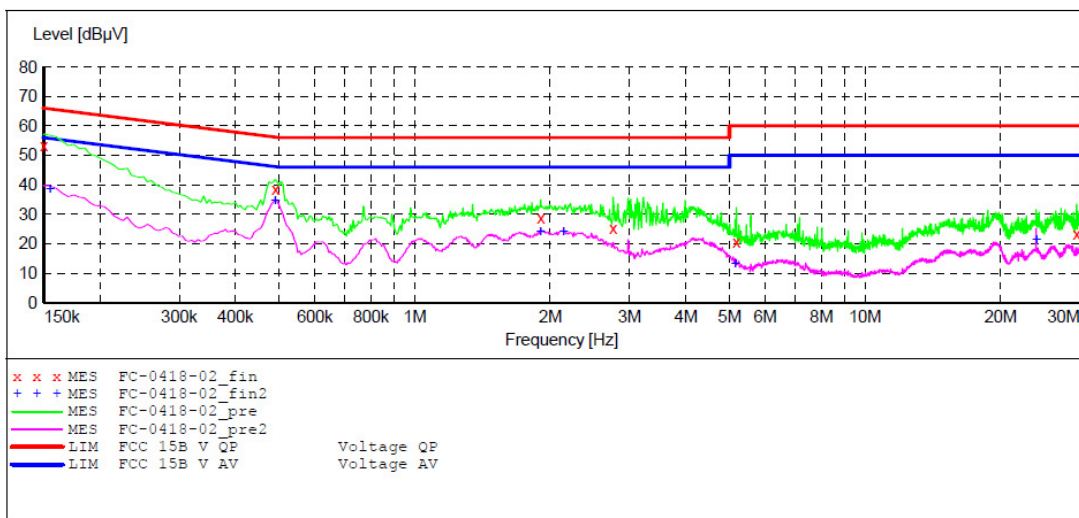

MEASUREMENT RESULT: "FC-0418-02\_fin"

4/18/2017 5:41PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	53.50	10.5	66	12.5	QP	N	GND
0.490000	38.50	10.7	56	17.7	QP	N	GND
1.905000	28.70	11.0	56	27.3	QP	N	GND
2.760000	25.20	11.0	56	30.8	QP	N	GND
5.180000	20.70	11.2	60	39.3	QP	N	GND
29.530000	23.30	11.5	60	36.7	QP	N	GND

MEASUREMENT RESULT: "FC-0418-02\_fin2"

4/18/2017 5:41PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	38.30	10.5	56	17.4	AV	N	GND
0.490000	34.70	10.7	46	11.5	AV	N	GND
1.905000	23.90	11.0	46	22.1	AV	N	GND
2.140000	23.90	11.0	46	22.1	AV	N	GND
5.150000	13.10	11.2	50	36.9	AV	N	GND
23.995000	21.20	11.5	50	28.8	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Smart Bracelet M/N:F8  
 Manufacturer: FIRST COATING  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: L 120V/60Hz  
 Comment: Report NO.:ATE20170457  
 Start of Test: 4/18/2017 / 5:34:13PM

**SCAN TABLE: "V 9K-30MHz fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008	
			Average				
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008	
			Average				

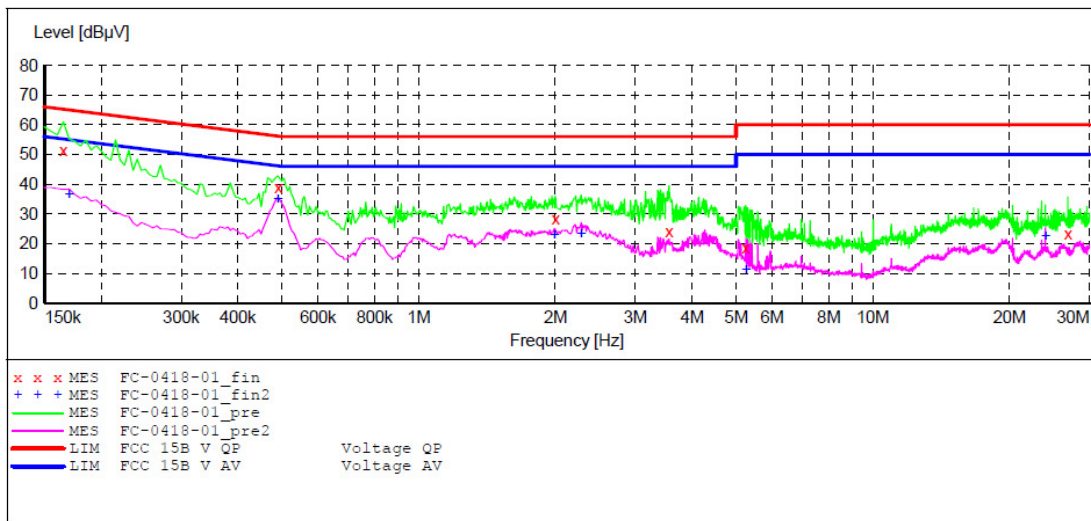

**MEASUREMENT RESULT: "FC-0418-01\_fin"**

4/18/2017 5:37PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.165000	51.30	10.5	65	13.9	QP	L1	GND
0.490000	38.80	10.7	56	17.4	QP	L1	GND
2.000000	28.50	11.0	56	27.5	QP	L1	GND
3.560000	23.90	11.1	56	32.1	QP	L1	GND
5.250000	18.70	11.2	60	41.3	QP	L1	GND
26.890000	23.40	11.5	60	36.6	QP	L1	GND

**MEASUREMENT RESULT: "FC-0418-01\_fin2"**

4/18/2017 5:37PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.170000	36.40	10.5	55	18.6	AV	L1	GND
0.490000	34.90	10.7	46	11.3	AV	L1	GND
1.990000	22.90	11.0	46	23.1	AV	L1	GND
2.280000	23.10	11.0	46	22.9	AV	L1	GND
5.260000	11.00	11.2	50	39.0	AV	L1	GND
23.995000	22.40	11.5	50	27.6	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Smart Bracelet M/N:F8  
 Manufacturer: FIRST COATING  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: L 240V/60Hz  
 Comment: Report NO.:ATE20170457  
 Start of Test: 4/18/2017 / 8:36:34AM

SCAN TABLE: "V 9K-30MHz fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

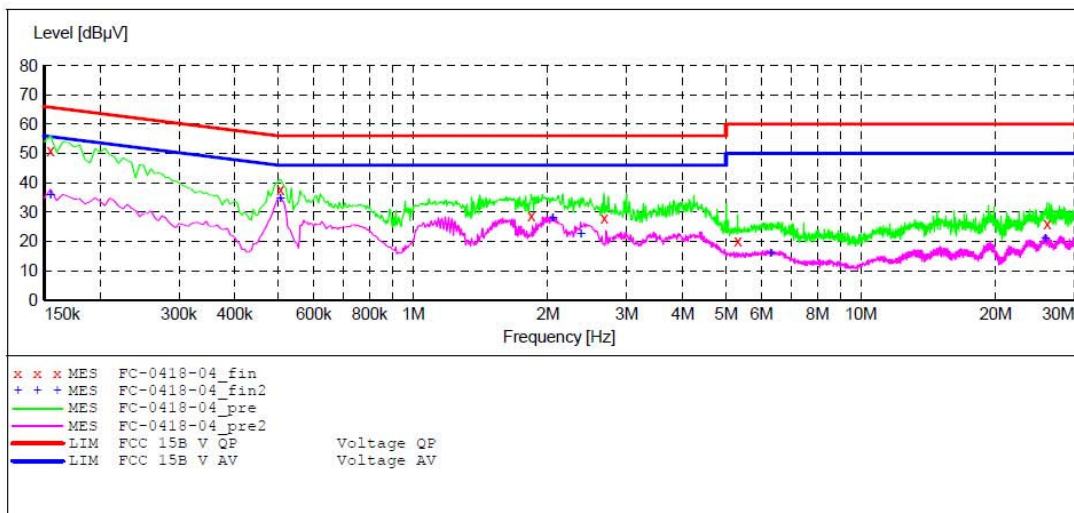

MEASUREMENT RESULT: "FC-0418-04\_fin"

4/18/2017 8:39AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	50.90	10.5	66	14.8	QP	L1	GND
0.505000	37.80	10.7	56	18.2	QP	L1	GND
1.835000	28.80	11.0	56	27.2	QP	L1	GND
2.670000	27.80	11.0	56	28.2	QP	L1	GND
5.310000	20.10	11.2	60	39.9	QP	L1	GND
26.080000	25.80	11.5	60	34.2	QP	L1	GND

MEASUREMENT RESULT: "FC-0418-04\_fin2"

4/18/2017 8:39AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	35.80	10.5	56	19.9	AV	L1	GND
0.505000	34.70	10.7	46	11.3	AV	L1	GND
2.050000	27.80	11.0	46	18.2	AV	L1	GND
2.370000	22.50	11.0	46	23.5	AV	L1	GND
6.290000	15.80	11.2	50	34.2	AV	L1	GND
25.840000	20.70	11.5	50	29.3	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Smart Bracelet M/N:F8  
 Manufacturer: FIRST COATING  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: DING  
 Test Specification: N 240V/60Hz  
 Comment: Report NO.:ATE20170457  
 Start of Test: 4/18/2017 / 5:42:14PM

SCAN TABLE: "V 9K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

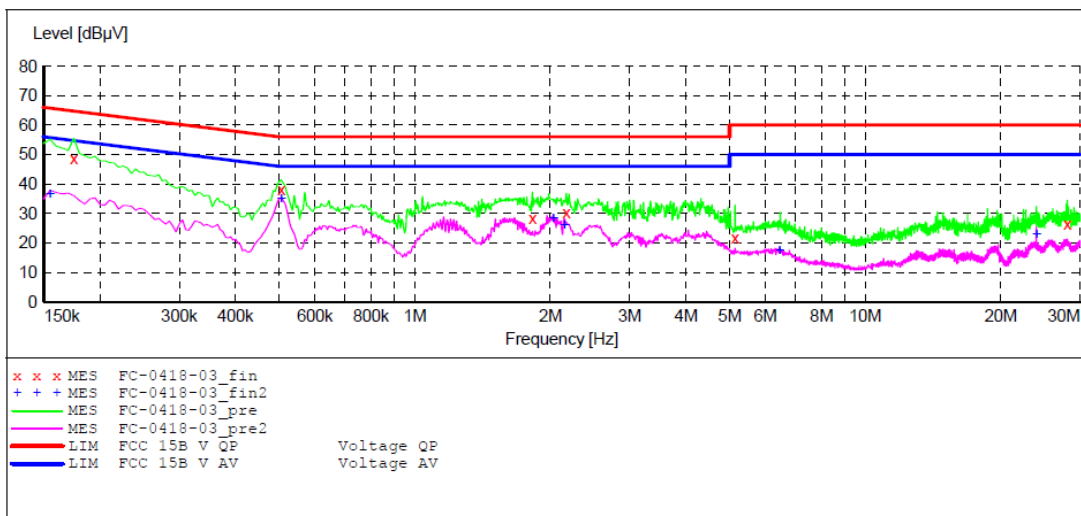

MEASUREMENT RESULT: "FC-0418-03\_fin"

4/18/2017 5:45PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.175000	48.70	10.5	65	16.0	QP	N	GND
0.505000	38.10	10.7	56	17.9	QP	N	GND
1.825000	28.30	11.0	56	27.7	QP	N	GND
2.170000	30.40	11.0	56	25.6	QP	N	GND
5.140000	21.80	11.2	60	38.2	QP	N	GND
28.120000	26.50	11.5	60	33.5	QP	N	GND


MEASUREMENT RESULT: "FC-0418-03\_fin2"

4/18/2017 5:45PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	36.70	10.5	56	19.0	AV	N	GND
0.505000	34.90	10.7	46	11.1	AV	N	GND
2.030000	28.50	11.0	46	17.5	AV	N	GND
2.150000	26.00	11.0	46	20.0	AV	N	GND
6.450000	17.30	11.2	50	32.7	AV	N	GND
23.995000	22.70	11.5	50	27.3	AV	N	GND

## 6. 6DB BANDWIDTH MEASUREMENT

### 6.1. Block Diagram of Test Setup



(EUT: Smart Bracelet)

### 6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

20dB bandwidth

1. Set resolution bandwidth (RBW) = 1%-5% OBW.


2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the -20 dB levels with respect to the reference level

### 6.6. Test Result


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.692	0.5	PASS
19	2440	0.676	0.5	PASS
39	2480	0.672	0.5	PASS

The spectrum analyzer plots are attached as below.


*channel 0*

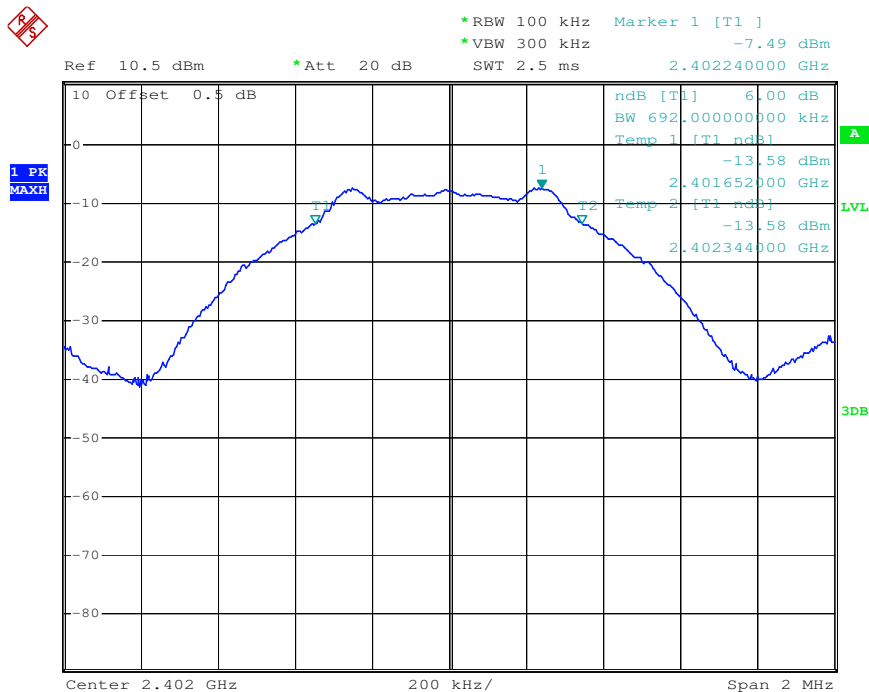

## channel 19

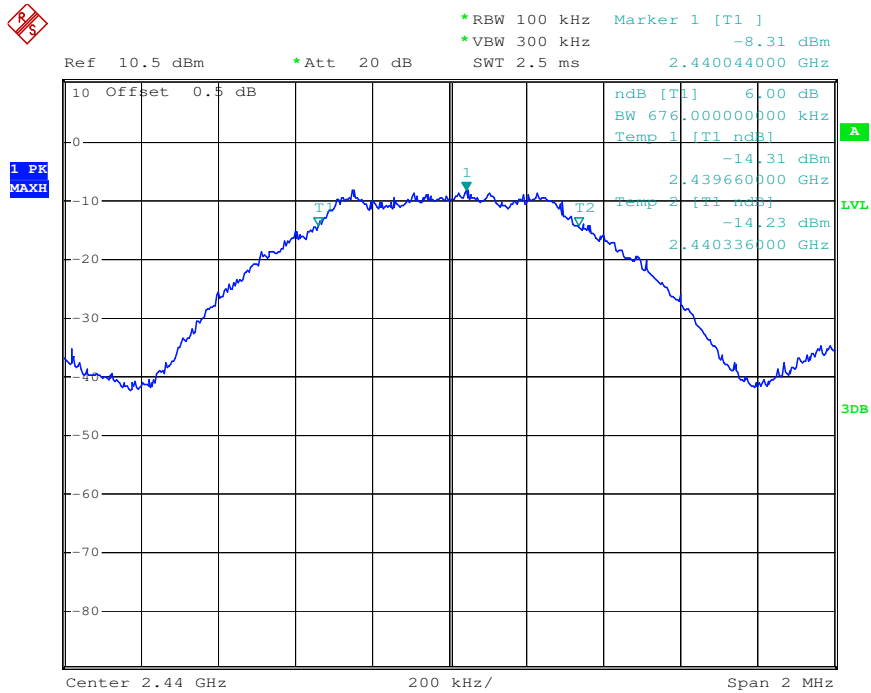


## channel 39

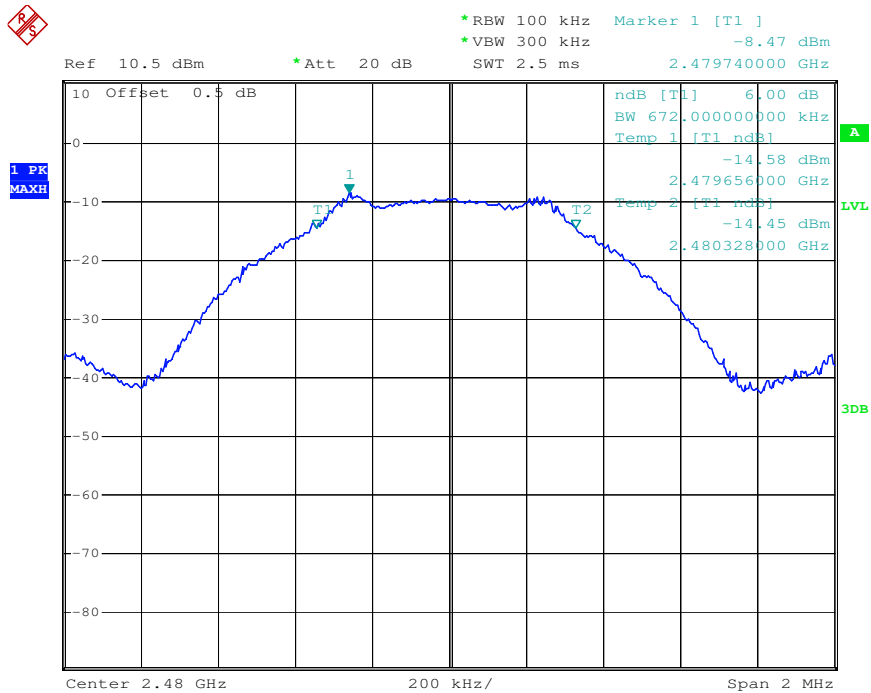

## 7. MAXIMUM PEAK OUTPUT POWER

### 7.1. Block Diagram of Test Setup



(EUT: Smart Bracelet)

### 7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 6.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.


7.5.3. Measurement the maximum peak output power.

### 7.6. Test Result


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-7.59	30	PASS
19	2440	-7.58	30	PASS
39	2480	-7.63	30	PASS

The spectrum analyzer plots are attached as below.


channel 0

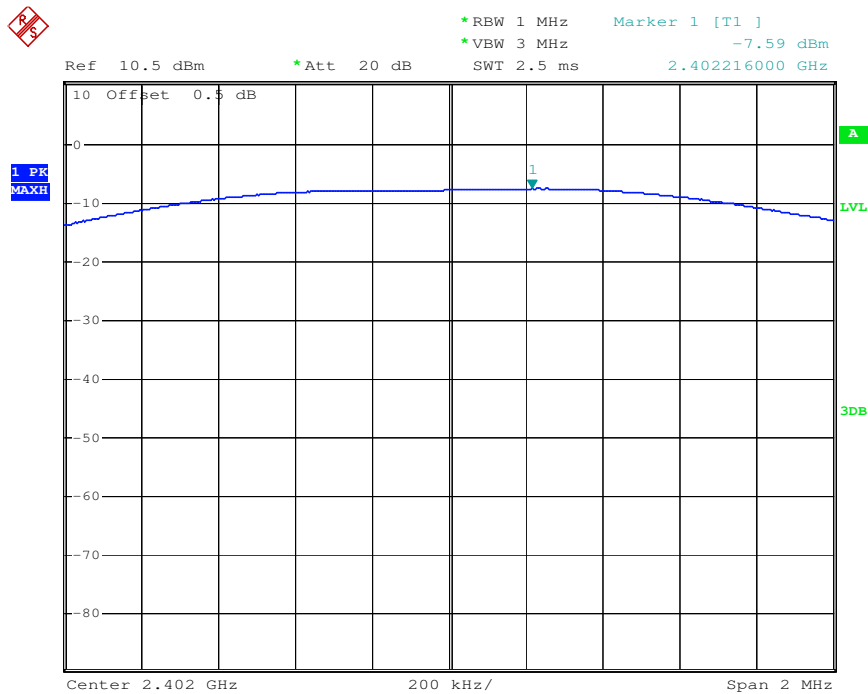

*channel 19*

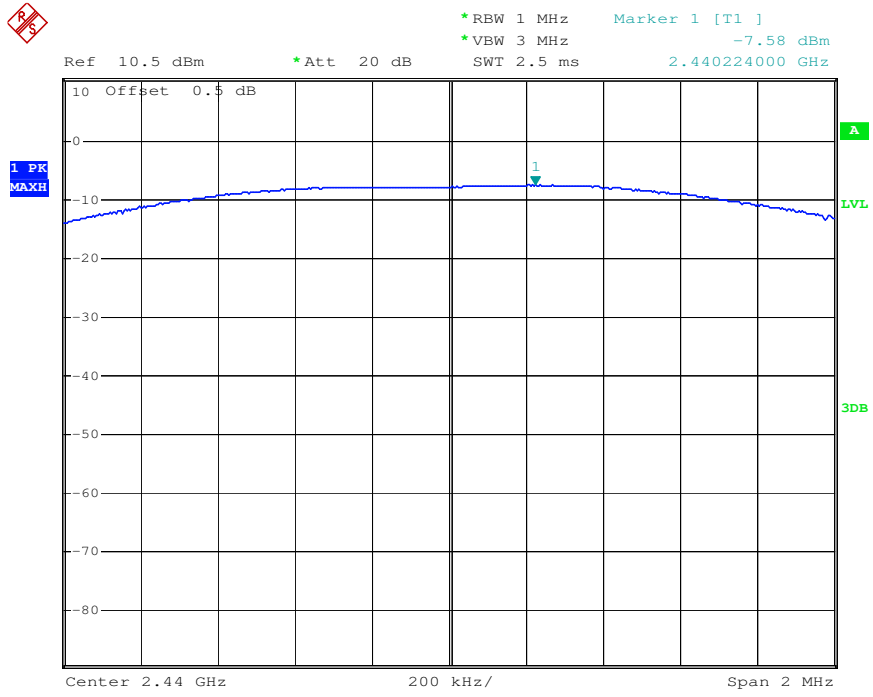


*channel 39*

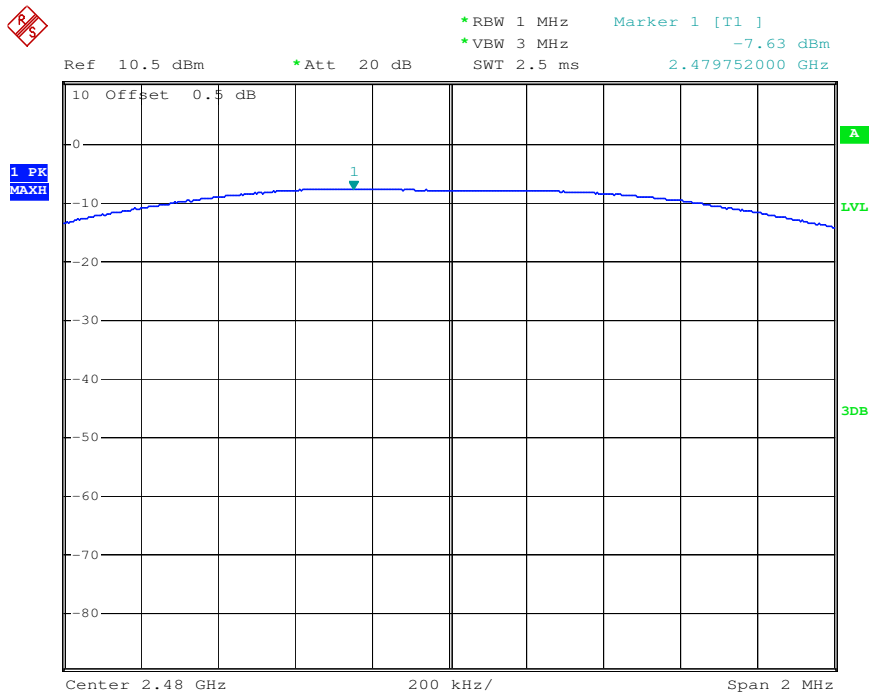

## 8. POWER SPECTRAL DENSITY MEASUREMENT

### 8.1. Block Diagram of Test Setup



(EUT: Smart Bracelet)

### 8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 7.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

8.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.4. Measurement the maximum power spectral density.

### 8.6. Test Result


CHANNEL NUMBER	FREQUENCY (MHz )	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-20.08	8	PASS
19	2440	-20.10	8	PASS
39	2480	-20.37	8	PASS

The spectrum analyzer plots are attached as below.


*channel 0*

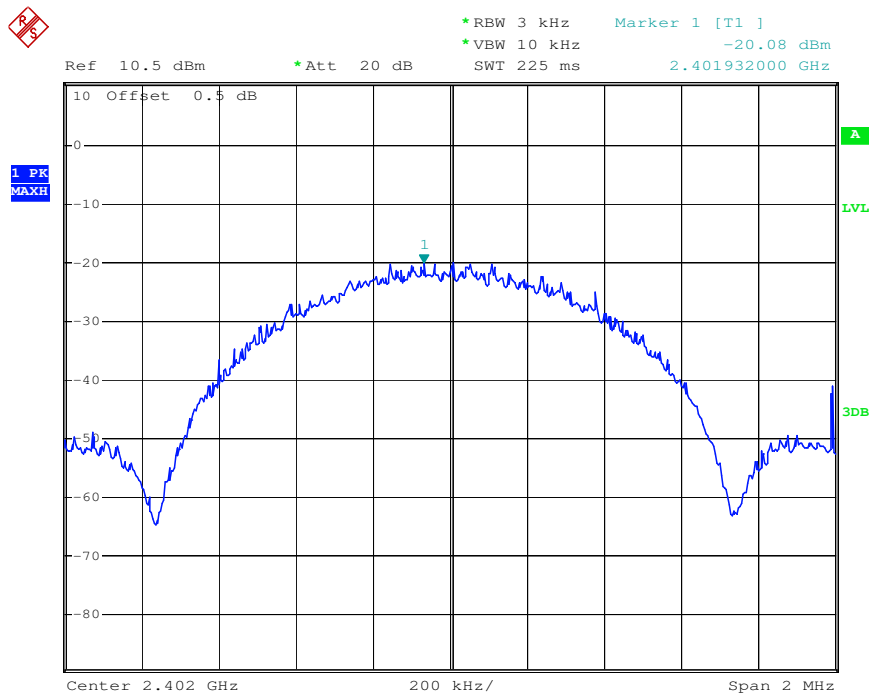

*channel 19*

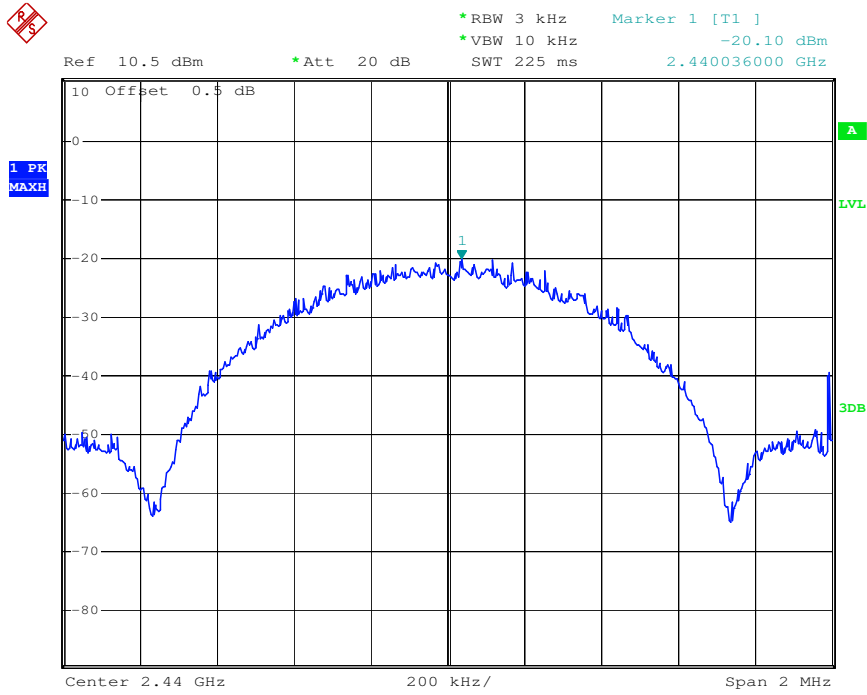


*channel 39*

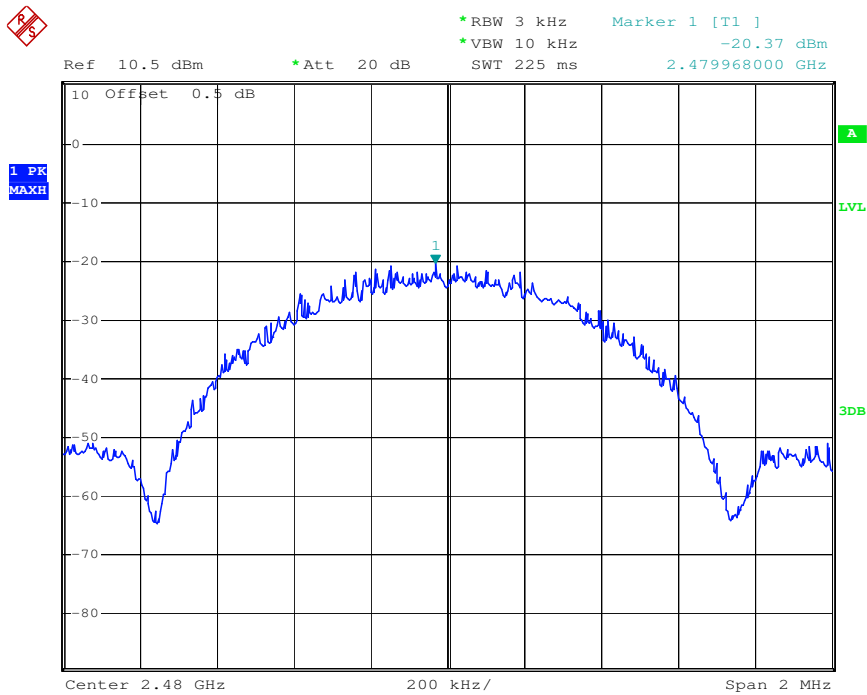

## 9. BAND EDGE COMPLIANCE TEST

### 9.1. Block Diagram of Test Setup



(EUT: Smart Bracelet)

### 9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 8.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 9.5. Test Procedure

### Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8. RBW=1MHz, VBW=1MHz

9.5.9. The band edges was measured and recorded.

## 9.6. Test Result

**Pass**

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	22.21	20
39	2.4835GHz	36.03	20



## Radiated Band Edge Result

### Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

### Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

We select 2402MHz, 2480MHz TX frequency to transmit(GFSK mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING1 #1361  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Smart Bracelet  
Mode: TX 2402MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Vertical  
Power Source: DC 3.7V  
Date: 17/04/18/  
Time: 9/16/31  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

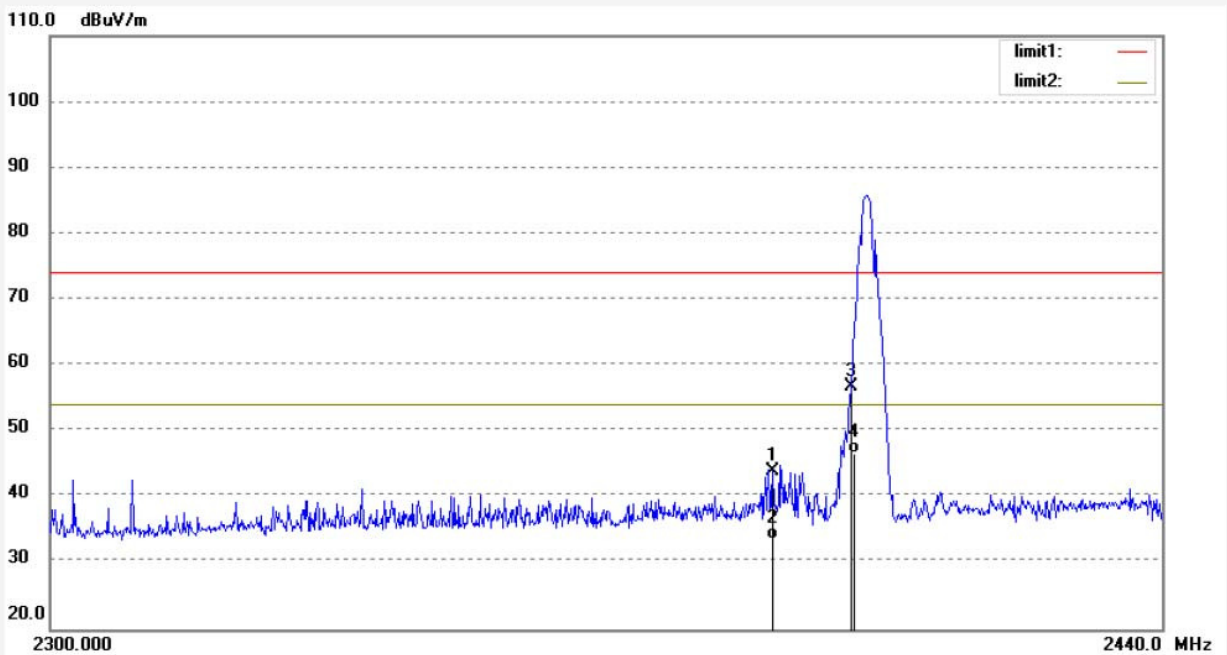

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	49.90	-5.89	44.01	74.00	-29.99	peak			
2	2390.000	39.52	-5.89	33.63	54.00	-20.37	AVG			
3	2400.000	62.58	-5.80	56.78	74.00	-17.22	peak			
4	2400.000	52.41	-5.80	46.61	54.00	-7.39	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING1 #1362	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 17/04/18/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 9/20/00
EUT: Smart Bracelet	Engineer Signature: DING
Mode: TX 2402MHz	Distance: 3m
Model: F8	
Manufacturer: FIRST COATING	

Note: Report NO.:ATE20170457

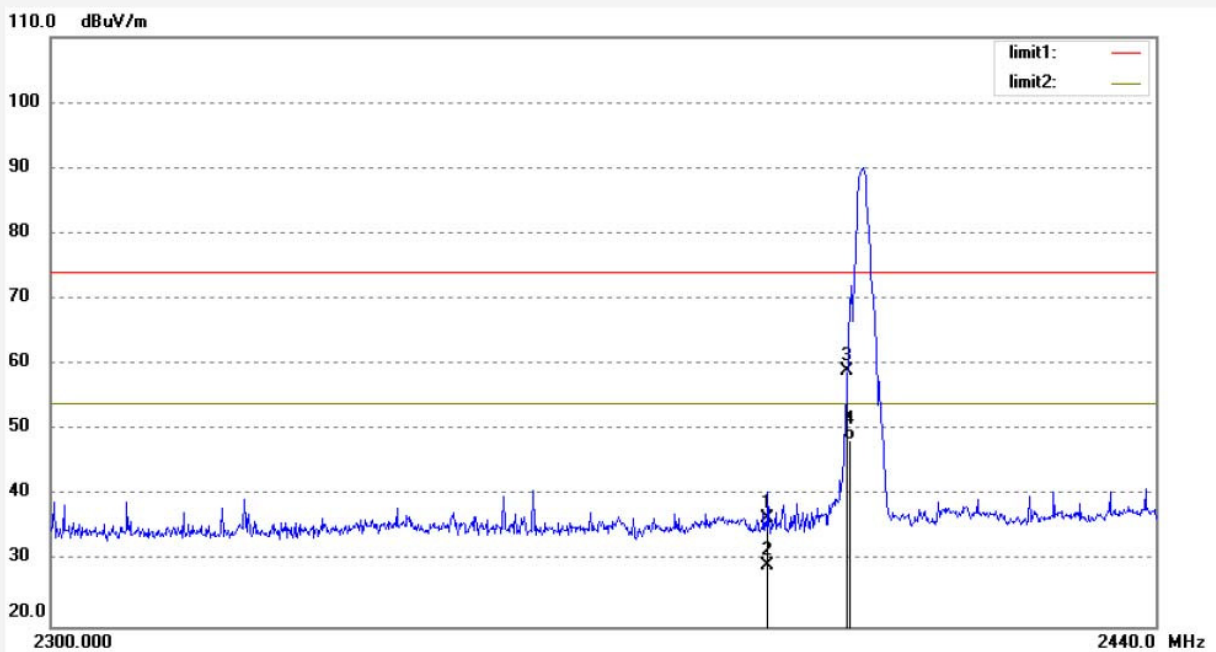

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	42.34	-5.89	36.45	74.00	-37.55	peak			
2	2390.000	35.12	-5.89	29.23	74.00	-44.77	peak			
3	2400.000	64.79	-5.80	58.99	74.00	-15.01	peak			
4	2400.000	54.23	-5.80	48.43	54.00	-5.57	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING1 #1363  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Smart Bracelet  
Mode: TX 2480MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Horizontal  
Power Source: DC 3.7V  
Date: 17/04/18/  
Time: 9/25/19  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

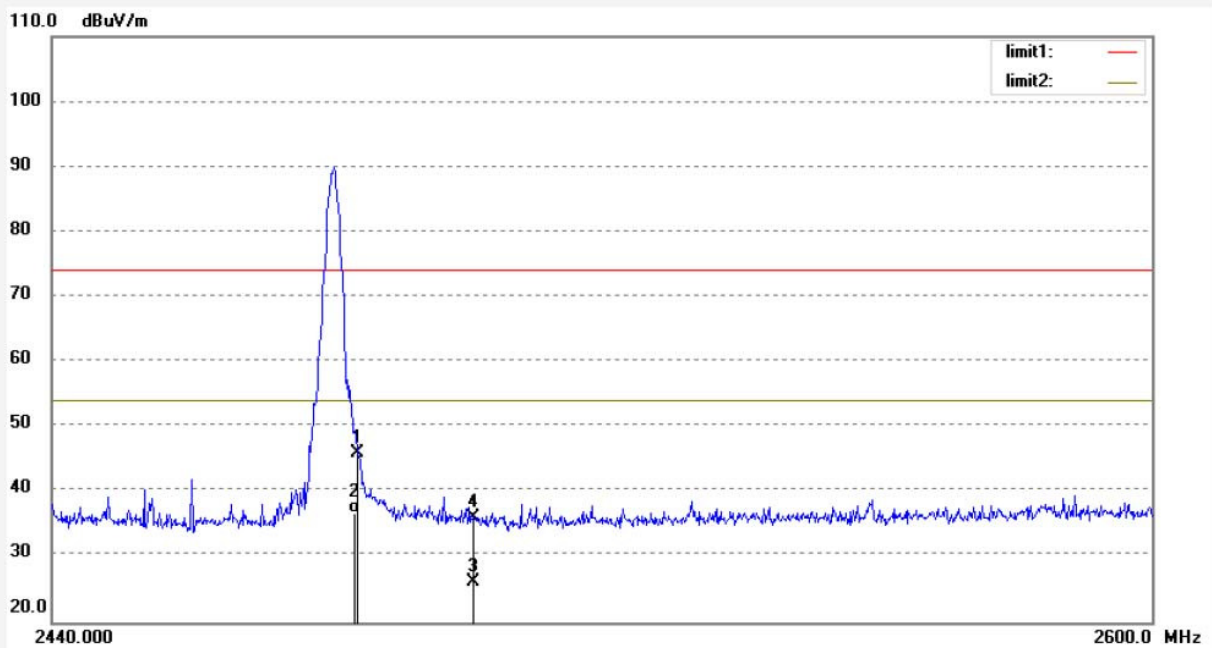


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.50	-5.51	45.99	74.00	-28.01	peak			
2	2483.500	42.26	-5.51	36.75	54.00	-17.25	AVG			
3	2500.000	31.72	-5.50	26.22	74.00	-47.78	peak			
4	2500.000	41.53	-5.50	36.03	74.00	-37.97	peak			

Job No.: DING1 #1364  
 Standard: FCC PK  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Smart Bracelet  
 Mode: TX 2480MHz  
 Model: F8  
 Manufacturer: FIRST COATING

Polarization: Vertical  
 Power Source: DC 3.7V  
 Date: 17/04/18/  
 Time: 9/38/50  
 Engineer Signature: DING  
 Distance: 3m

Note: Report NO.:ATE20170457

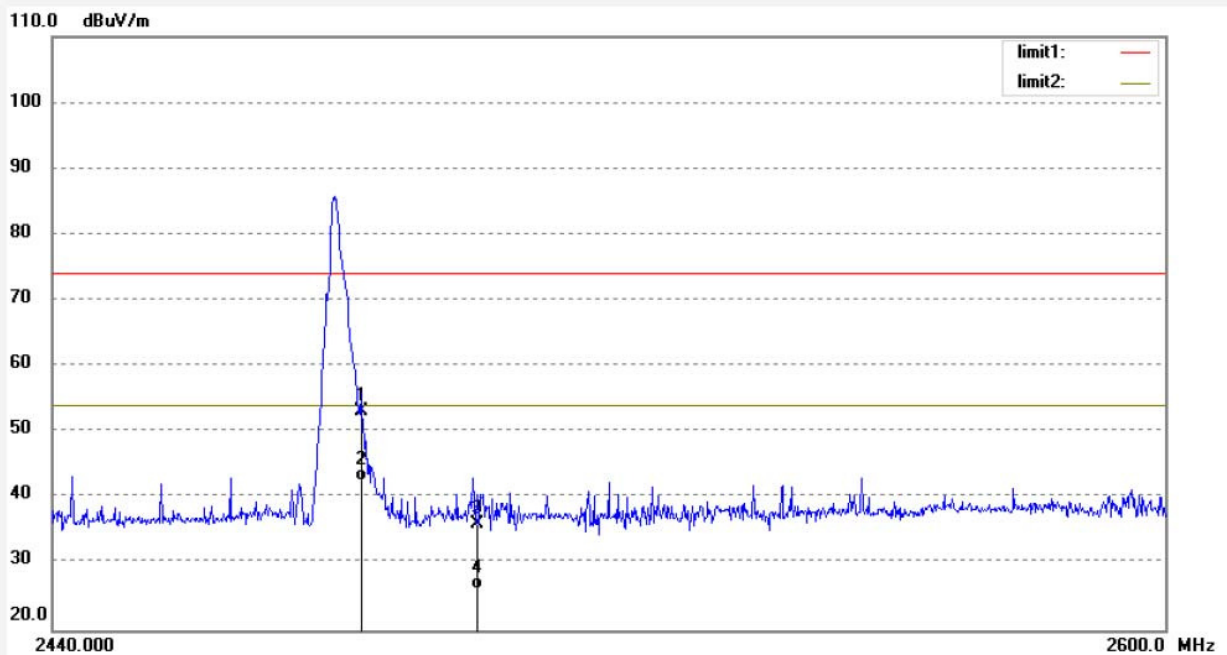


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	58.75	-5.51	53.24	74.00	-20.76	peak			
2	2483.500	48.02	-5.51	42.51	54.00	-11.49	AVG			
3	2500.000	41.57	-5.50	36.07	74.00	-37.93	peak			
4	2500.000	31.63	-5.50	26.13	54.00	-27.87	AVG			

## 10.RADIATED SPURIOUS EMISSION TEST

### 10.1.Block Diagram of Test Setup

#### 10.1.1.Block diagram of connection between the EUT and peripherals

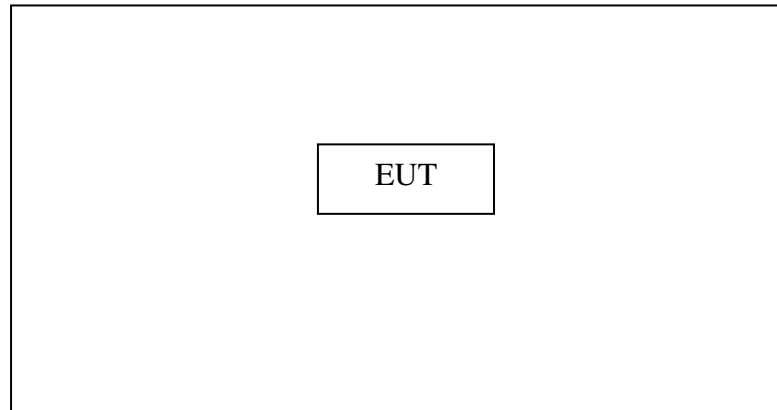


Setup: Transmitting mode

(EUT: Smart Bracelet)


#### 10.1.2.Semi-Anechoic Chamber Test Setup Diagram

**Below 30MHz**

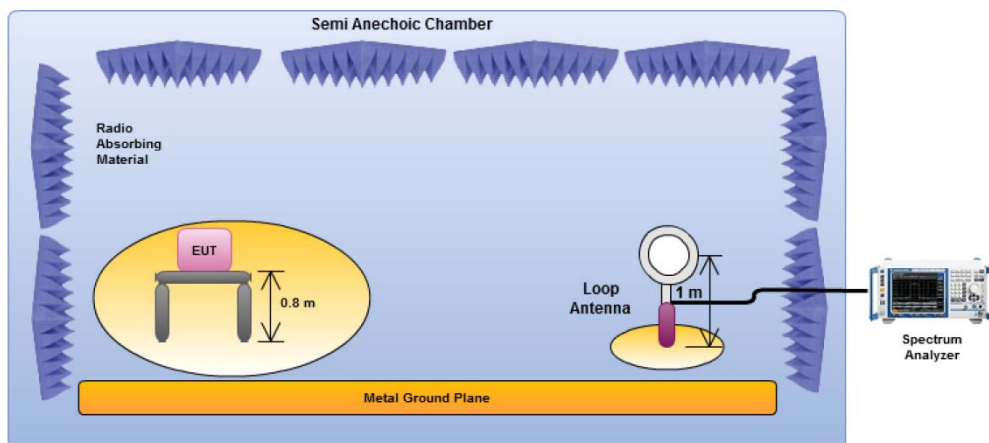


**30MHz-1GHz**

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

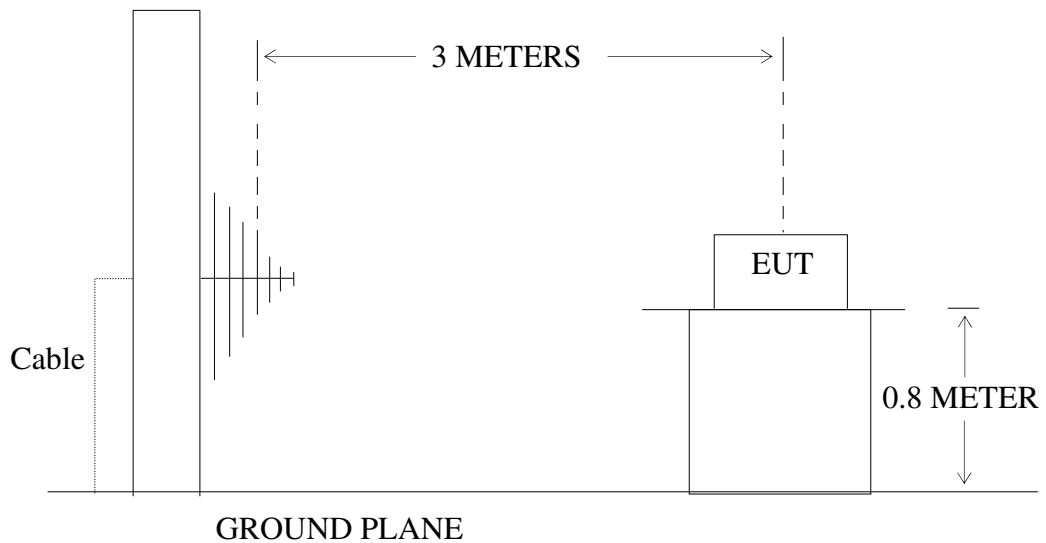

**Above 1GHz**

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

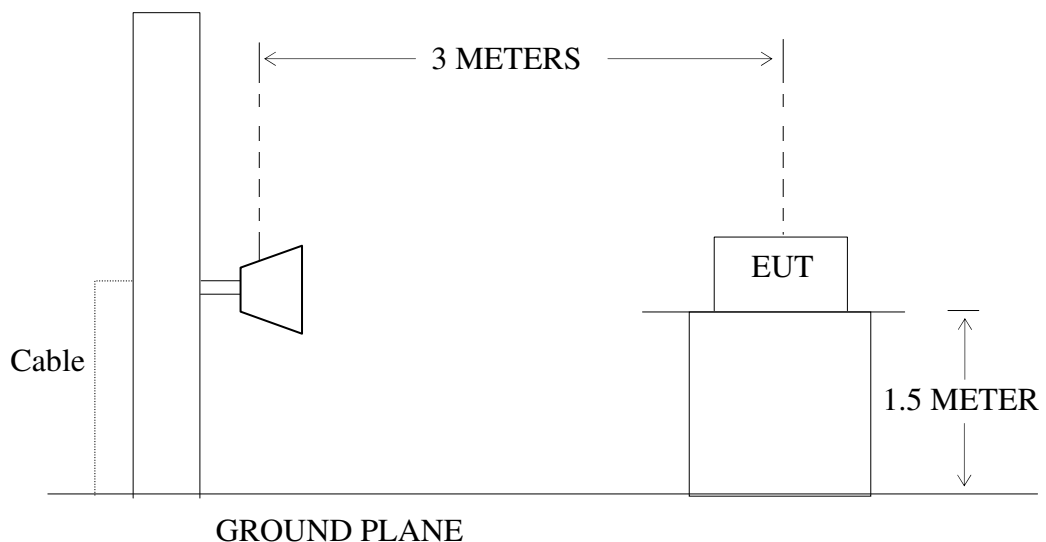

**10.2. The Limit For Section 15.247(d)**

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated

emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3.Restricted bands of operation

#### 10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 9.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 10.7. The Field Strength of Radiation Emission Measurement Results

**PASS.**

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.**

Job No.: DING #3476

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Smart Bracelet

Mode: TX 2402MHz

Model: F8

Manufacturer: FIRST COATING

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/04/18/

Time: 12/47/39

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20170457

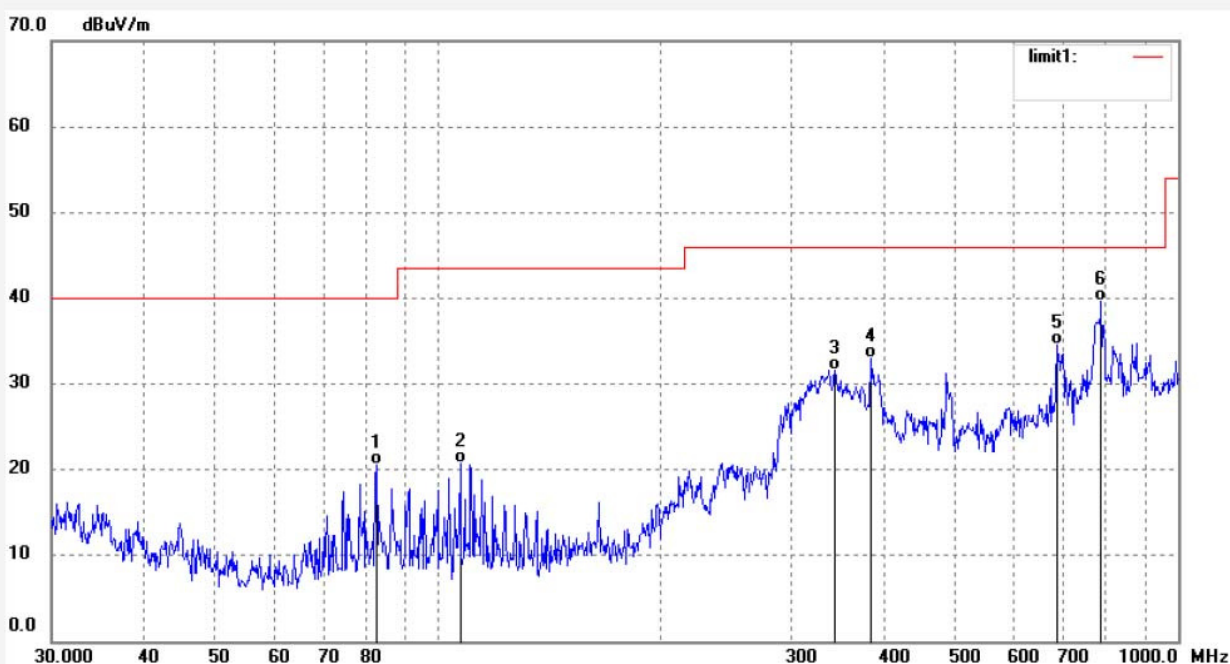

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	82.5257	42.61	-21.99	20.62	40.00	-19.38	QP			
2	107.0306	43.07	-22.35	20.72	43.50	-22.78	QP			
3	343.6506	45.65	-14.08	31.57	46.00	-14.43	QP			
4	384.5447	46.12	-13.21	32.91	46.00	-13.09	QP			
5	686.6342	41.27	-6.62	34.65	46.00	-11.35	QP			
6	787.4749	44.00	-4.40	39.60	46.00	-6.40	QP			

Job No.: DING #3477

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Smart Bracelet

Mode: TX 2402MHz

Model: F8

Manufacturer: FIRST COATING

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/04/18/

Time: 12/48/23

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20170457

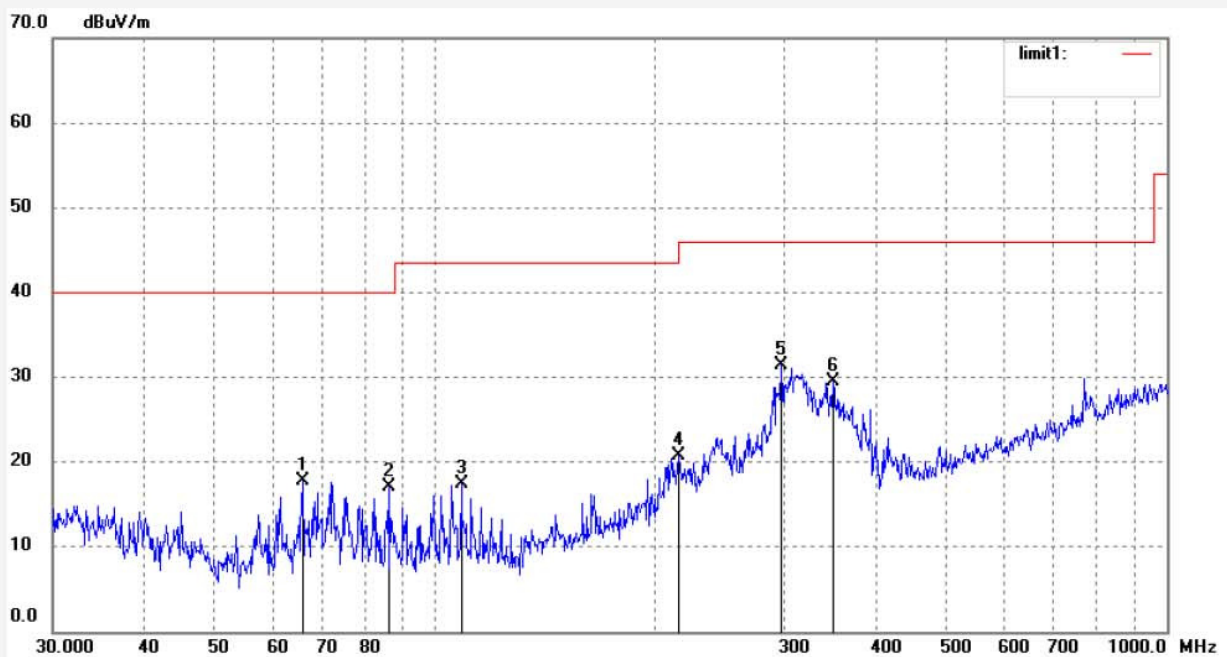


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	65.9067	39.69	-21.93	17.76	40.00	-22.24	peak			
2	86.3826	38.99	-21.95	17.04	40.00	-22.96	peak			
3	108.5455	39.47	-22.07	17.40	43.50	-26.10	peak			
4	215.3616	39.20	-18.41	20.79	43.50	-22.71	peak			
5	297.5459	47.15	-15.82	31.33	46.00	-14.67	peak			
6	349.7412	43.37	-13.82	29.55	46.00	-16.45	peak			

Job No.: DING #3478  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Smart Bracelet  
 Mode: TX 2440MHz  
 Model: F8  
 Manufacturer: FIRST COATING

Polarization: Horizontal  
 Power Source: DC 3.7V  
 Date: 17/04/18/  
 Time: 12/49/18  
 Engineer Signature: DING  
 Distance: 3m

Note: Report NO.:ATE20170457

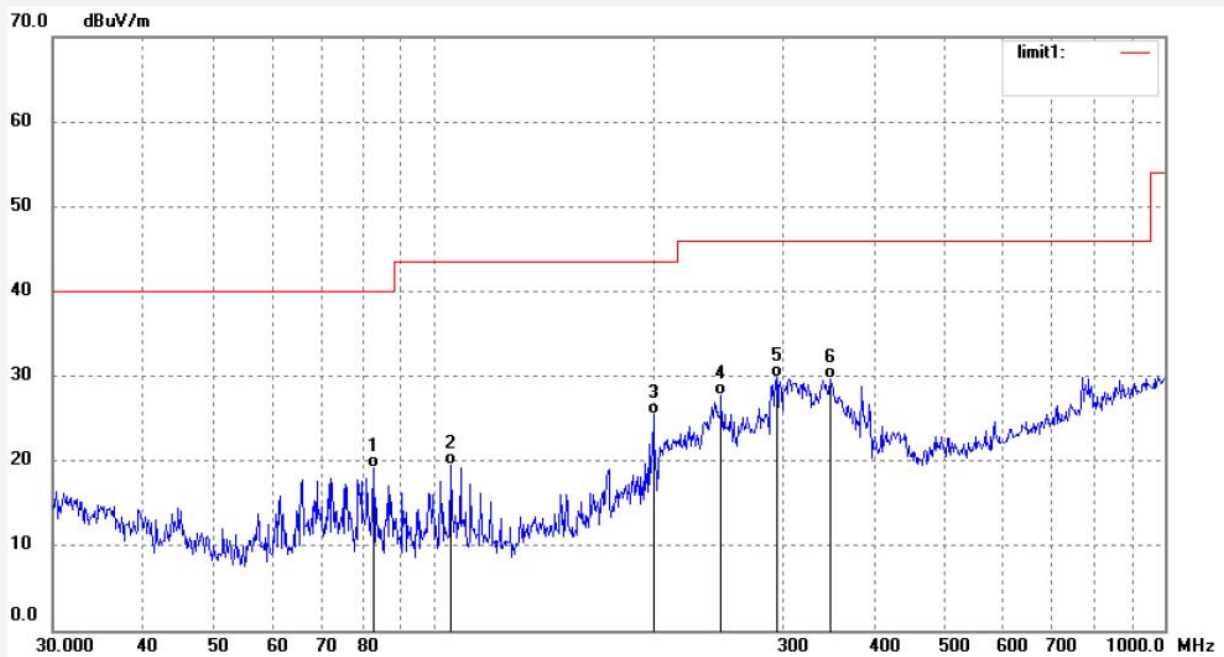

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	82.5257	41.10	-21.99	19.11	40.00	-20.89	QP			
2	105.1668	42.24	-22.69	19.55	43.50	-23.95	QP			
3	199.3416	44.14	-18.69	25.45	43.50	-18.05	QP			
4	246.9901	45.93	-18.14	27.79	46.00	-18.21	QP			
5	294.4260	45.86	-15.95	29.91	46.00	-16.09	QP			
6	348.5145	43.61	-13.87	29.74	46.00	-16.26	QP			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING #3479  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Smart Bracelet  
Mode: TX 2440MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Vertical  
Power Source: DC 3.7V  
Date: 17/04/18/  
Time: 12/50/32  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

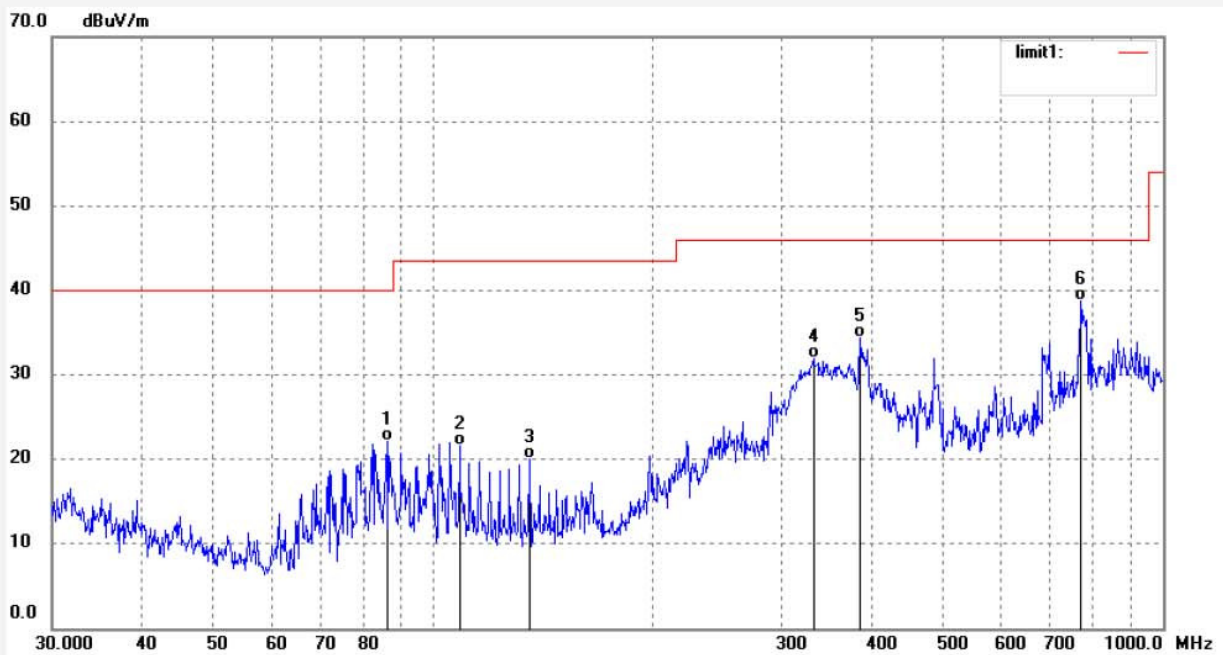

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	86.3826	44.15	-21.95	22.20	40.00	-17.80	QP			
2	108.5455	43.76	-22.07	21.69	43.50	-21.81	QP			
3	135.4395	42.24	-22.24	20.00	43.50	-23.50	QP			
4	331.7858	46.50	-14.57	31.93	46.00	-14.07	QP			
5	384.5447	47.66	-13.21	34.45	46.00	-11.55	QP			
6	771.0475	43.48	-4.73	38.75	46.00	-7.25	QP			

Job No.: DING #3480

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Smart Bracelet

Mode: TX 2480MHz

Model: F8

Manufacturer: FIRST COATING

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/04/18/

Time: 12/50/58

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20170457

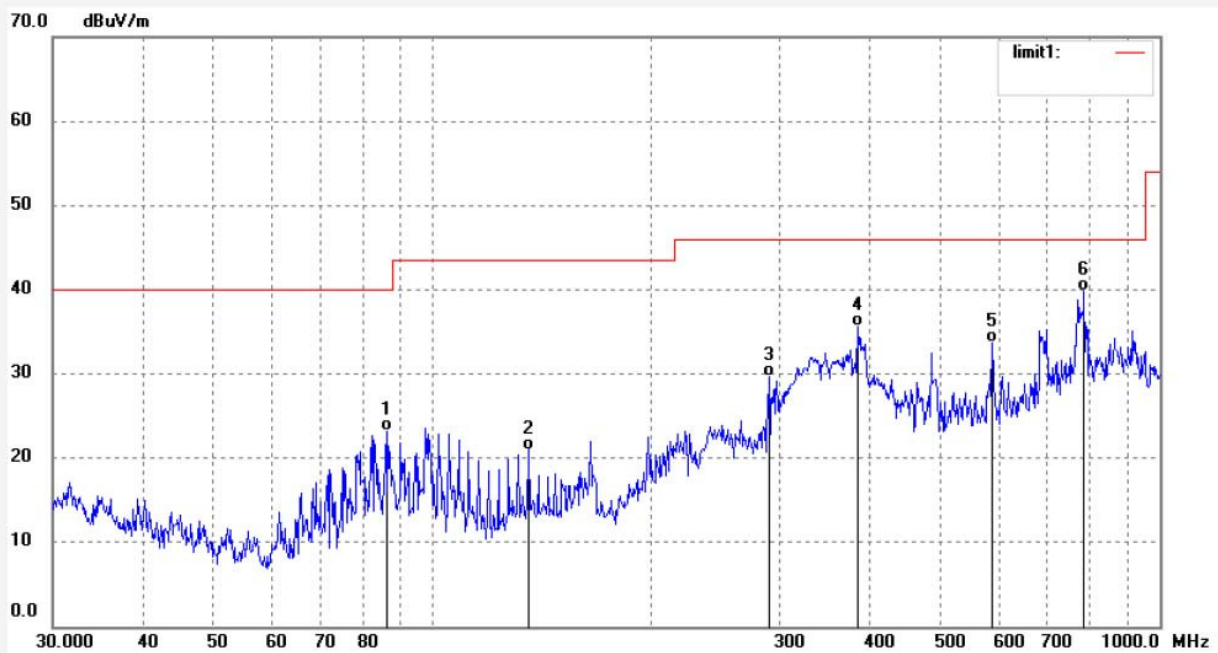


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	86.3825	45.15	-21.95	23.20	40.00	-16.80	QP			
2	135.4395	43.24	-22.24	21.00	43.50	-22.50	QP			
3	290.3170	45.79	-16.15	29.64	46.00	-16.36	QP			
4	384.5446	48.74	-13.21	35.53	46.00	-10.47	QP			
5	588.2804	42.42	-8.69	33.73	46.00	-12.27	QP			
6	787.4749	44.29	-4.40	39.89	46.00	-6.11	QP			

Job No.: DING #3481  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Smart Bracelet  
 Mode: TX 2480MHz  
 Model: F8  
 Manufacturer: FIRST COATING

Polarization: Horizontal  
 Power Source: DC 3.7V  
 Date: 17/04/18/  
 Time: 12/51/48  
 Engineer Signature: DING  
 Distance: 3m

Note: Report NO.:ATE20170457

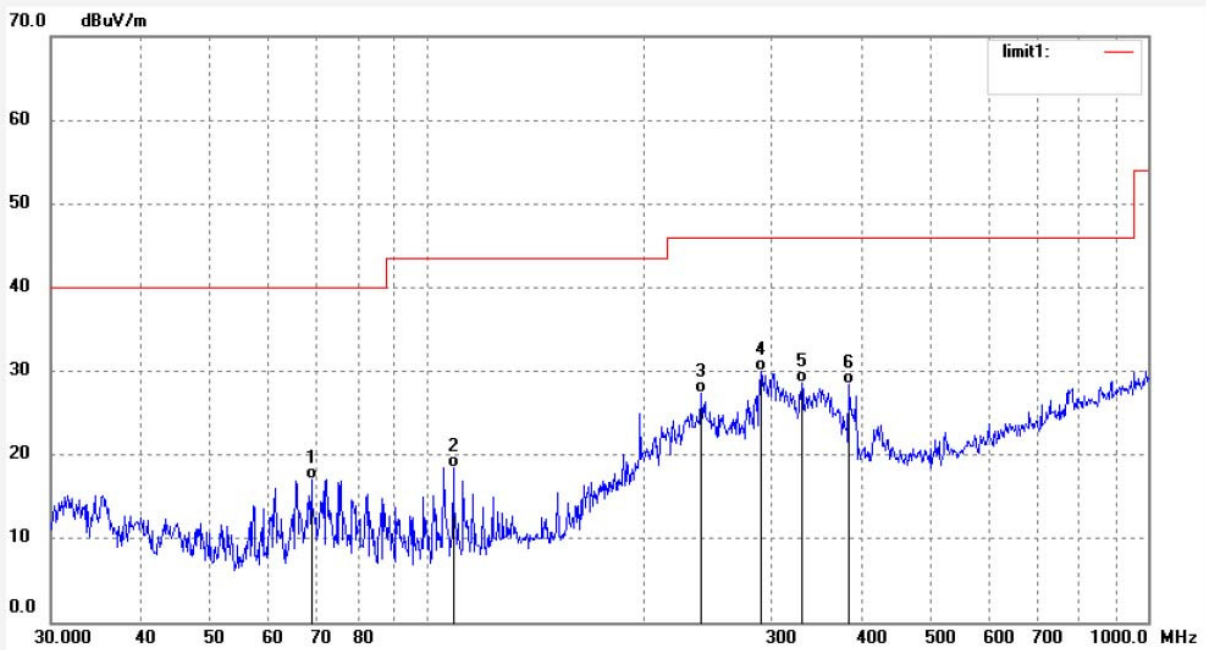

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	68.9869	39.12	-22.04	17.08	40.00	-22.92	QP			
2	108.5455	40.59	-22.07	18.52	43.50	-24.98	QP			
3	239.3020	45.52	-18.18	27.34	46.00	-18.66	QP			
4	290.3170	46.20	-16.15	30.05	46.00	-15.95	QP			
5	330.6220	43.16	-14.63	28.53	46.00	-17.47	QP			
6	384.5447	41.72	-13.21	28.51	46.00	-17.49	QP			



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ding1 #1355  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Intelligent Bracelet  
Mode: TX 2402MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Horizontal  
Power Source: DC 5V  
Date: 17/04/18/  
Time: 8/51/06  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

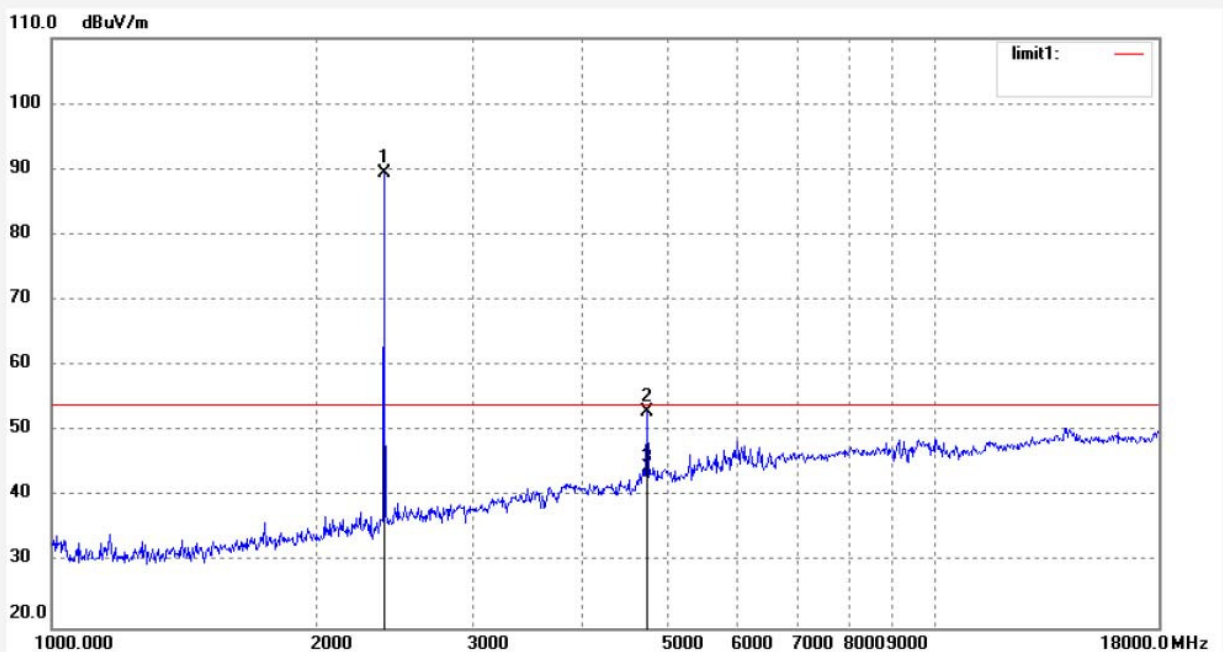

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.35	-5.98	89.37	114.00	-24.63	peak			
2	4804.000	49.91	3.15	53.06	74.00	-20.94	peak			
3	4804.000	39.64	3.15	42.79	54.00	-11.21	AVG			

Job No.: ding1 #1356

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Intelligent Bracelet

Mode: TX 2402MHz

Model: F8

Manufacturer: FIRST COATING

Polarization: Vertical

Power Source: DC 5V


Date: 17/04/18/

Time: 8/54/29

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20170457

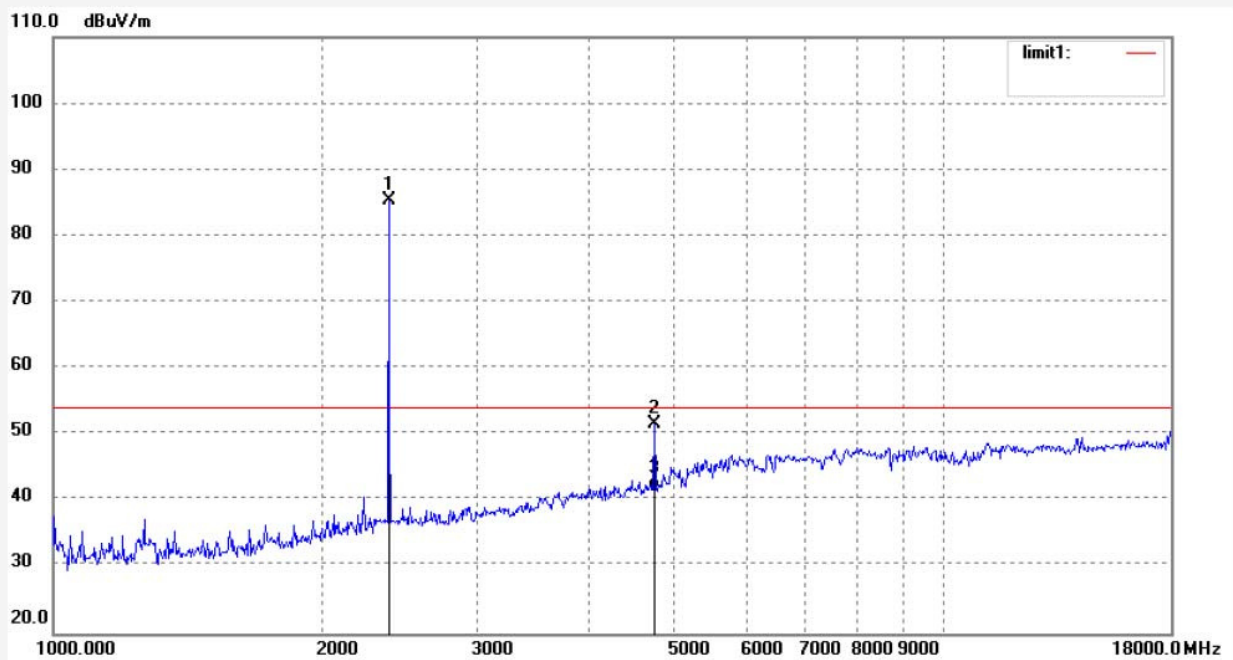

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	91.44	-5.98	85.46	114.00	-28.64	peak			
2	4804.000	48.42	3.15	51.57	74.00	-22.43	peak			
3	4804.000	38.49	3.15	41.64	54.00	-12.36	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ding1 #1357  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Intelligent Bracelet  
Mode: TX 2440MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Vertical  
Power Source: DC 5V  
Date: 17/04/18/  
Time: 8/57/32  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

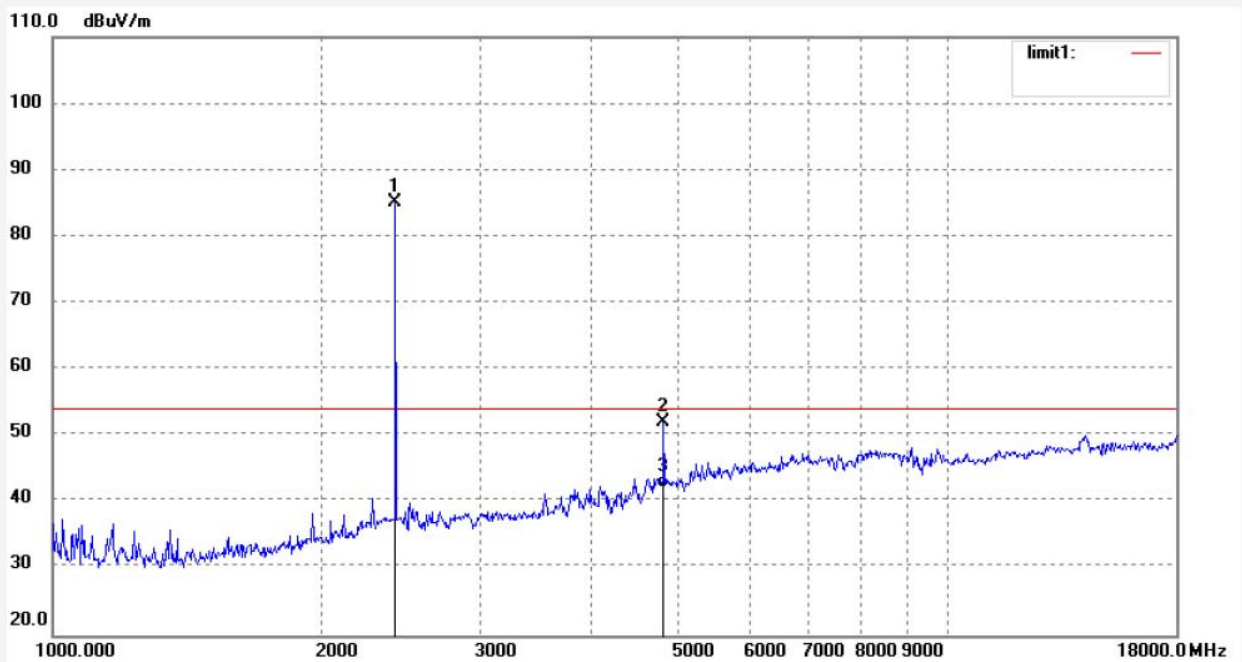

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	90.84	-5.72	85.12	114.00	-28.88	peak			
2	4880.000	48.46	3.67	52.13	74.00	-21.87	peak			
3	4880.000	38.54	3.67	42.21	54.00	-11.79	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ding1 #1358  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Intelligent Bracelet  
Mode: TX 2440MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Horizontal  
Power Source: DC 5V  
Date: 17/04/18/  
Time: 9/00/30  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

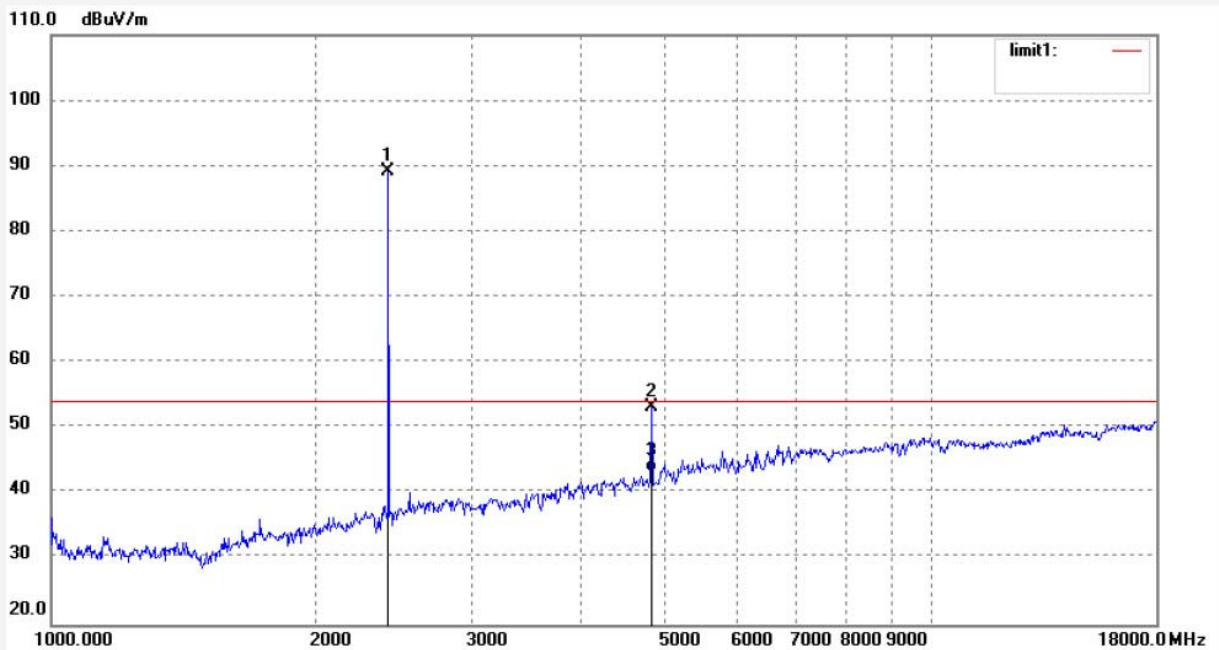

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	94.90	-5.72	89.18	114.00	-24.82	peak			
2	4880.000	49.63	3.53	53.16	74.00	-20.84	peak			
3	4880.000	39.74	3.53	43.27	54.00	-10.73	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ding1 #1359  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Intelligent Bracelet  
Mode: TX 2480MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Horizontal  
Power Source: DC 5V  
Date: 17/04/18/  
Time: 9/03/40  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

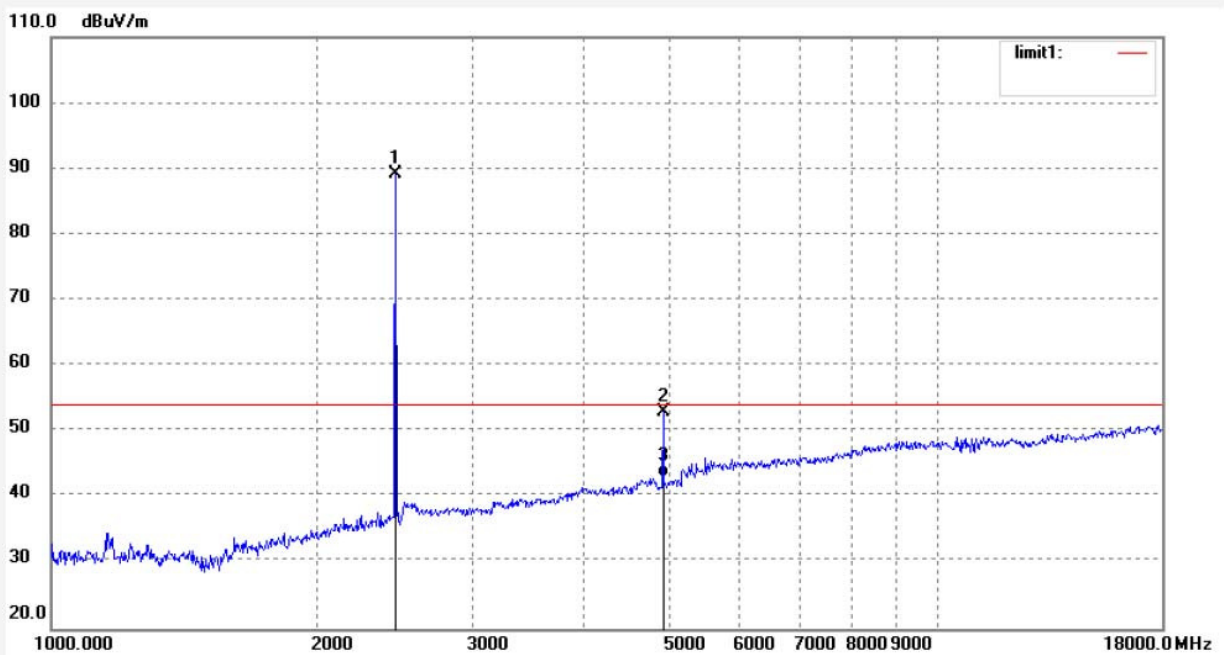

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	94.72	-5.55	89.17	114.00	-24.83	peak			
2	4960.000	48.52	4.54	53.06	74.00	-20.94	peak			
3	4960.000	38.49	4.54	43.03	54.00	-10.97	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ding1 #1360  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Intelligent Bracelet  
Mode: TX 2480MHz  
Model: F8  
Manufacturer: FIRST COATING

Polarization: Vertical  
Power Source: DC 5V  
Date: 17/04/18/  
Time: 9/07/43  
Engineer Signature: DING  
Distance: 3m

Note: Report NO.:ATE20170457

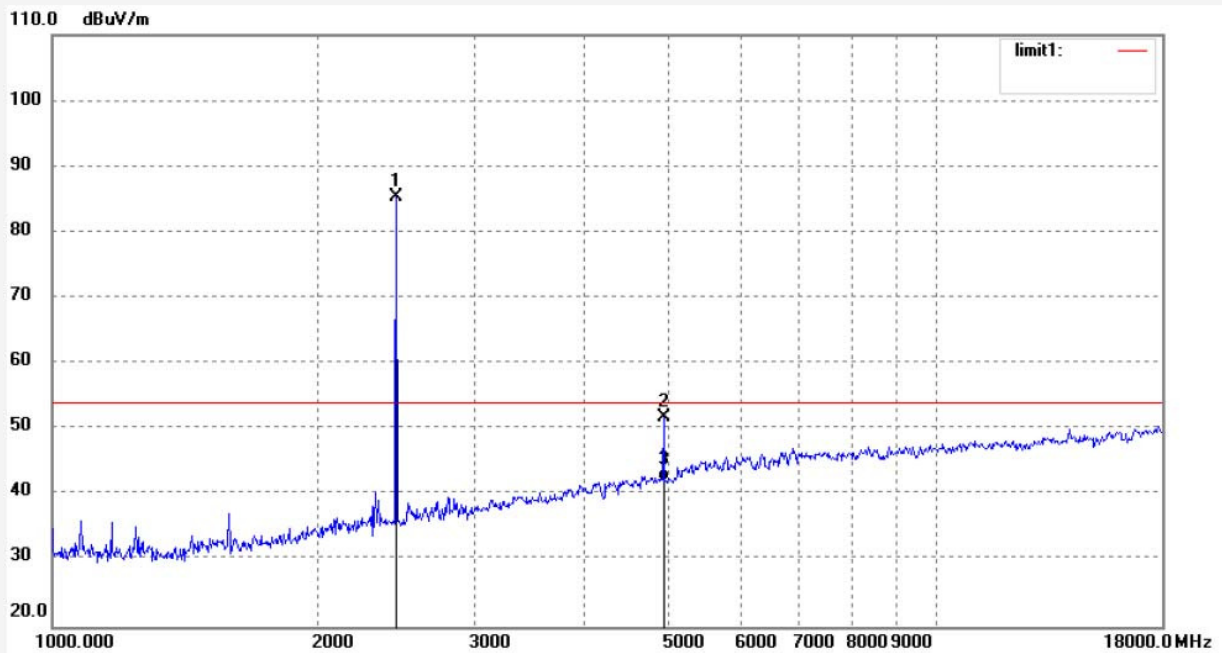

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	90.95	-5.55	85.40	114.00	-28.60	peak			
2	4960.000	47.32	4.54	51.86	74.00	-22.14	peak			
3	4960.000	37.56	4.54	42.10	54.00	-11.90	AVG			


## 11. ANTENNA REQUIREMENT

### 11.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

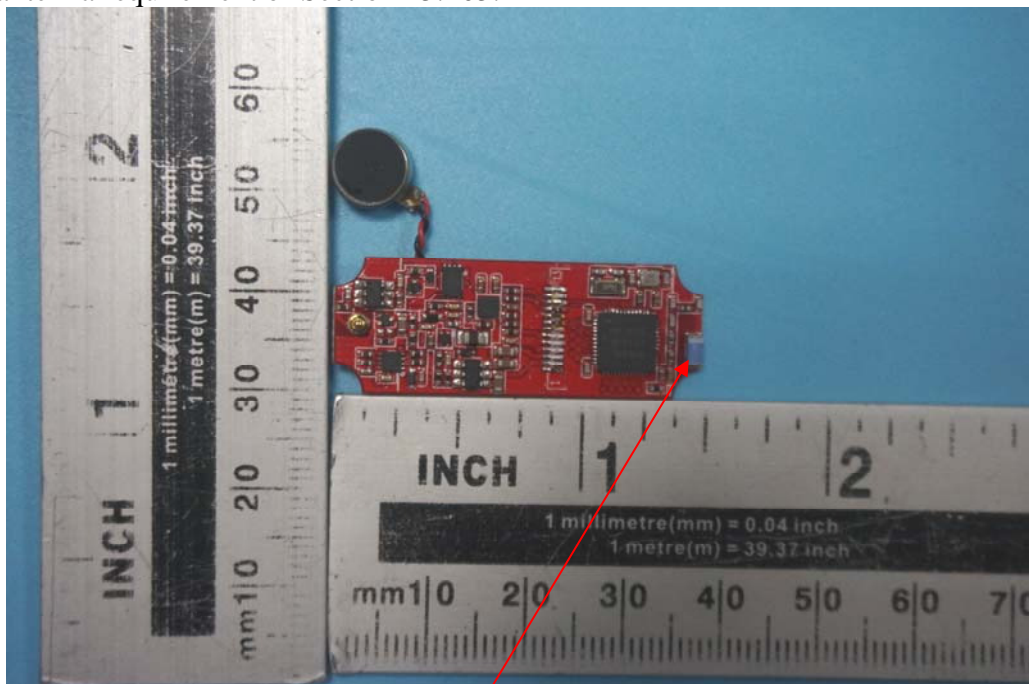

**Antenna**