

FCC PART 15C TEST REPORT

For

Gouldin Technologies, LLC

2150 Chenault Dr. Carrollton, Texas 75006 United States

FCC ID: 2AOQ7-WP460

Report Type: Original Report	Product Name: Watchman
Report Number: RXM180103053-00	
Report Date: 2018-02-26	
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” .

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC§15.203 - ANTENNA REQUIREMENT.....	8
APPLICABLE STANDARD	8
ANTENNA CONNECTED CONSTRUCTION	8
FCC §15.207 – AC LINE CONDUCTED EMISSION	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	16
APPLICABLE STANDARD	16
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC§15.225(E) - FREQUENCY STABILITY.....	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	24
FCC §15.215(C) – 20 DB EMISSION BANDWIDTH.....	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

EUT Name:	Watchman
EUT Model:	WP460
FCC ID:	2AOQ7-WP460
Rated Input Voltage:	DC 12V from DC pin or DC48V from PoE port
External Dimension:	156mm (L)*140mm (W)*302mm (H)
Serial Number:	180103053
EUT Received Date:	2018.01.10

Objective

This Type approval report is prepared on behalf of *Gouldin Technologies, LLC* in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209, 15.215 and 15.225.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
radiated Emissions	9kHz~30MHz: 4.12dB 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode

The device operates in 125 kHz and 13.56 MHz for RFID detection, two frequencies transmit simultaneously when test.

EUT Exercise Software

No software used in test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
L.T.E.	DC Adapter	G0548B-480-050	N/A
Fujia	PoE Adapter	FJ-SW1201000C	N/A
Guohua Xiangcan	Load	RXG20	N/A
Lotus	Entrance guard	L8MF-W	N/A
Schneider	Relay	RXM2LB2BD	N/A
TP-LINK	Switch	TL-SF1008P	114A297001782
Tenda	Wireless router	D301	N/A

External Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	5.00	RJ45 Port of EUT	Wireless router
Power Cable	No	No	5.00	Power Port of EUT	Load
Signal Cable	No	No	5.00	Wiegand Port of EUT	Entrance guard
Signal Cable	No	No	5.00	RS485 Port of EUT	Switch
Signal Cable	No	No	5	Relay Port of EUT	Relay
RJ45 Cable	No	No	1	RJ45 Port of EUT	PoE
RJ45 Cable	No	No	5	RJ45 Port of PoE	Wireless router

Block Diagram of Test Setup

DC Adapter supply

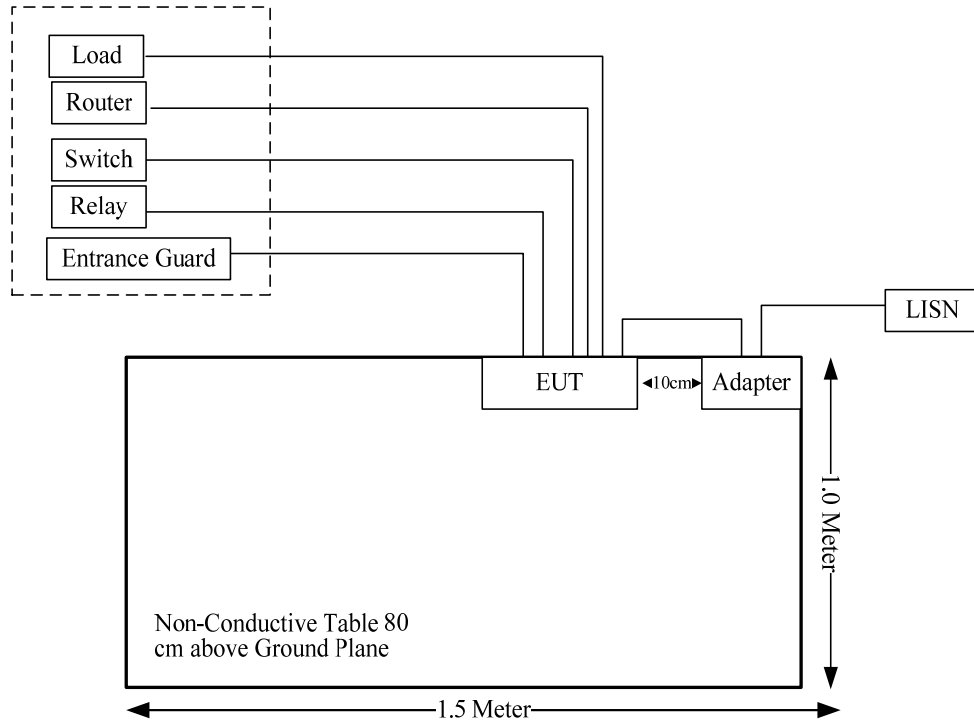

PoE supply

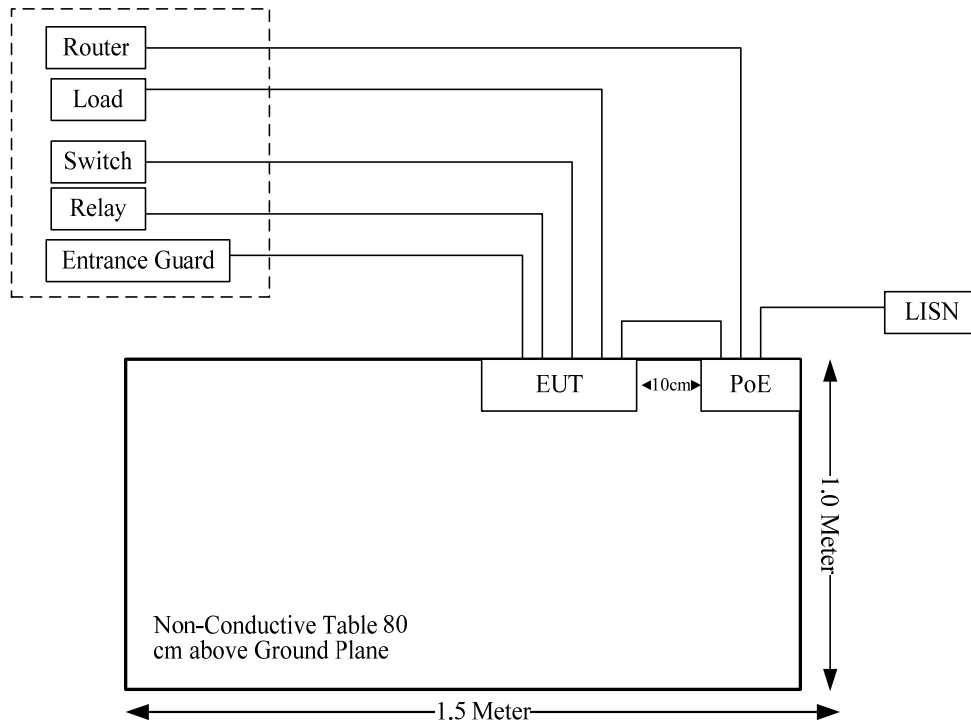

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Emission Bandwidth	Compliance

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


Antenna Connected Construction

The EUT has two integral antenna arrangement, which was permanently attached and fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSION

EUT Setup

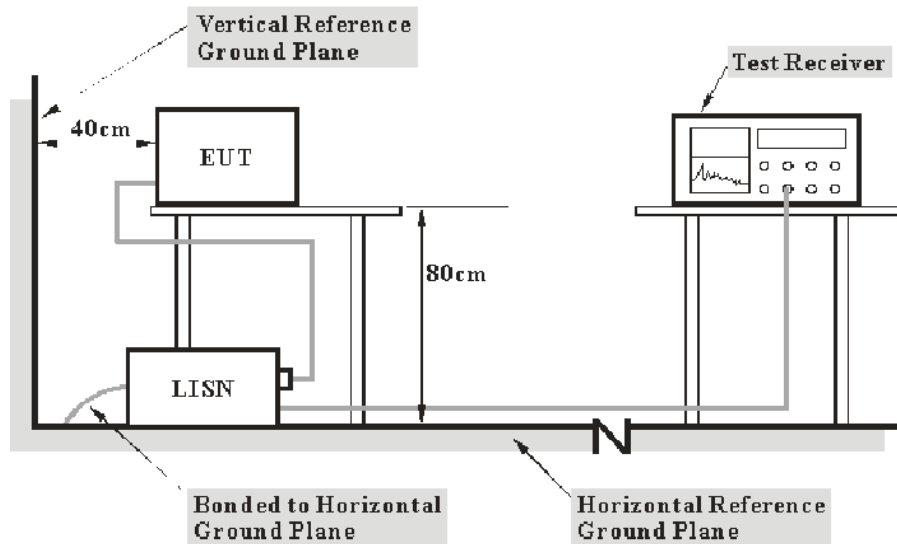

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter or POE was connected to the main LISN with an AC 120V/60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08
N/A	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter or POE was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data**Environmental Conditions**


Temperature:	22.3 °C
Relative Humidity:	28 %
ATM Pressure:	102.0 kPa

The testing was performed by Alex You on 2018-02-13.

Test Mode: Transmitting


Adapter supply

AC 120V, 60 Hz, Line:

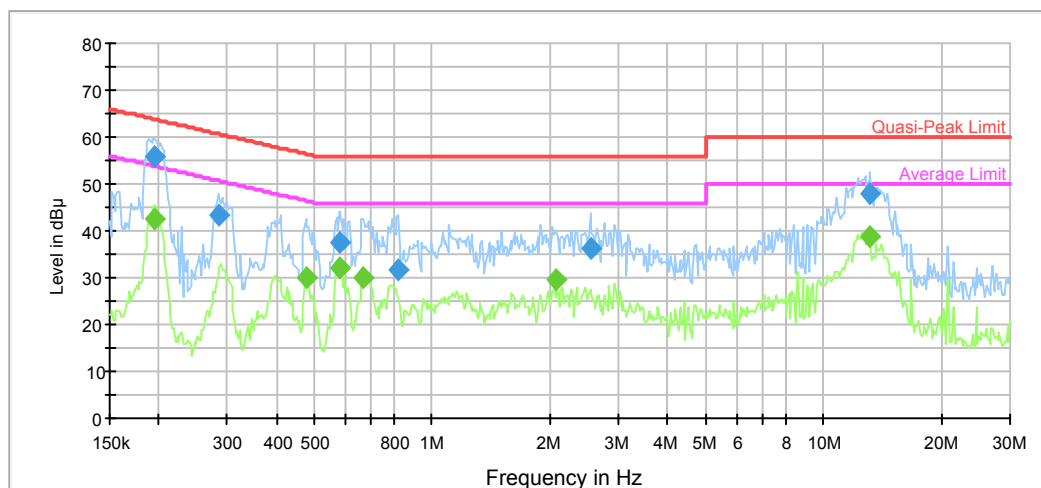


Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.195114	55.7	9.000	L1	10.7	8.1	63.8	Compliance
0.283749	43.4	9.000	L1	10.2	17.3	60.7	Compliance
0.581275	37.4	9.000	L1	9.8	18.6	56.0	Compliance
0.818813	31.8	9.000	L1	9.8	24.2	56.0	Compliance
2.538519	36.1	9.000	L1	9.8	19.9	56.0	Compliance
13.210237	47.9	9.000	L1	9.9	12.1	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.195114	42.7	9.000	L1	10.7	11.1	53.8	Compliance
0.480097	30.0	9.000	L1	9.9	16.3	46.3	Compliance
0.581275	31.9	9.000	L1	9.8	14.1	46.0	Compliance
0.665597	30.1	9.000	L1	9.8	15.9	46.0	Compliance
2.080018	29.4	9.000	L1	9.7	16.6	46.0	Compliance
13.105393	38.9	9.000	L1	9.9	11.1	50.0	Compliance

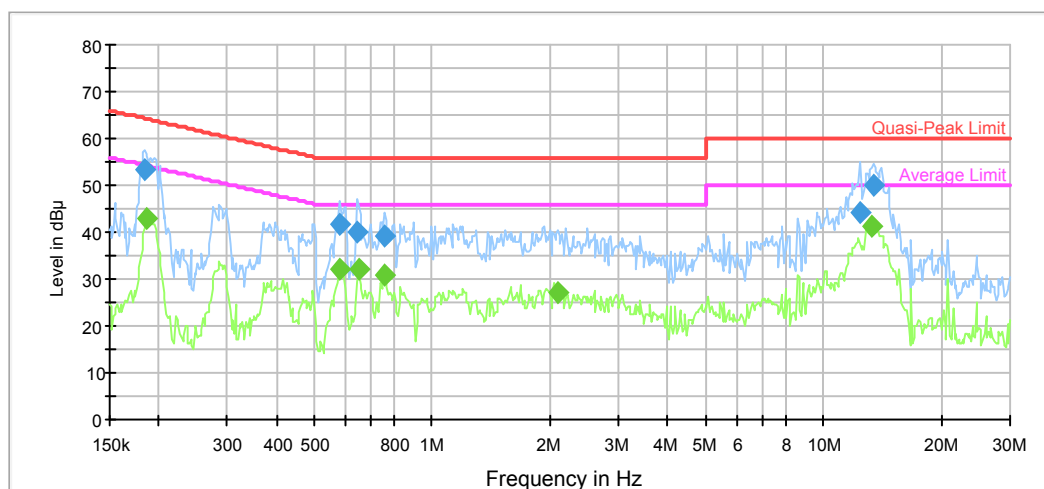AC120 V, 60 Hz, Neutral:

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.184529	53.2	9.000	N	10.8	11.1	64.3	Compliance
0.581275	41.6	9.000	N	9.8	14.4	56.0	Compliance
0.644717	40.1	9.000	N	9.8	15.9	56.0	Compliance
0.756101	39.3	9.000	N	9.8	16.7	56.0	Compliance
12.394424	44.0	9.000	N	9.9	16.0	60.0	Compliance
13.422446	50.1	9.000	N	9.9	9.9	60.0	Compliance


Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.187494	42.8	9.000	N	10.7	11.3	54.1	Compliance
0.581275	32.1	9.000	N	9.8	13.9	46.0	Compliance
0.649874	32.0	9.000	N	9.8	14.0	46.0	Compliance
0.756101	30.8	9.000	N	9.8	15.2	46.0	Compliance
2.096658	27.3	9.000	N	9.8	18.7	46.0	Compliance
13.315918	41.3	9.000	N	9.9	8.7	50.0	Compliance

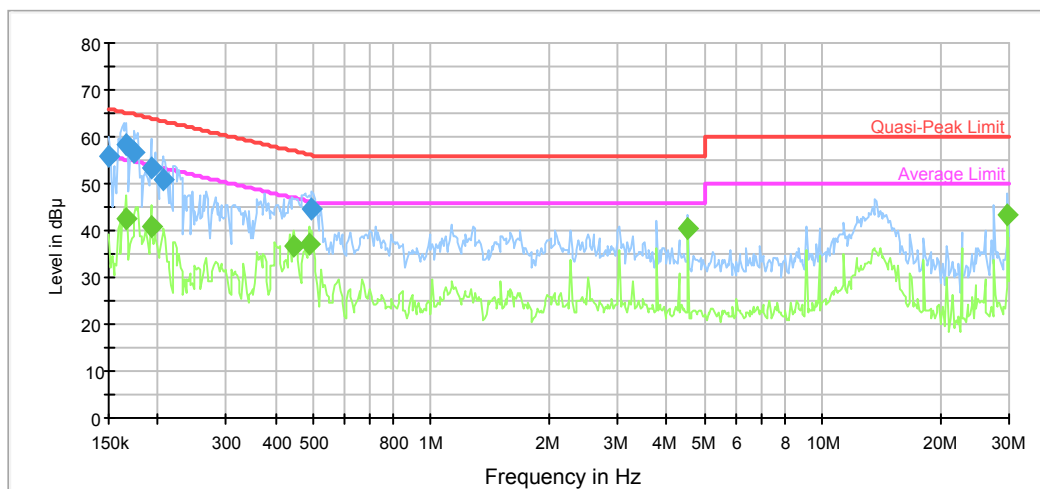PoE supply**AC 120V, 60 Hz, Line:**

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	56.0	9.000	L1	11.2	10.0	66.0	Compliance
0.166371	58.3	9.000	L1	11.0	6.8	65.1	Compliance
0.174519	56.6	9.000	L1	10.9	8.1	64.7	Compliance
0.192030	53.2	9.000	L1	10.7	10.7	63.9	Compliance
0.206306	50.8	9.000	L1	10.6	12.6	63.4	Compliance
0.495646	44.8	9.000	L1	9.9	11.3	56.1	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.166371	42.5	9.000	L1	11.0	12.6	55.1	Compliance
0.192030	40.9	9.000	L1	10.7	13.0	53.9	Compliance
0.446873	36.5	9.000	L1	9.9	10.4	46.9	Compliance
0.487810	37.0	9.000	L1	9.9	9.2	46.2	Compliance
4.541500	40.5	9.000	L1	9.8	5.5	46.0	Compliance
29.777269	43.2	9.000	L1	10.2	6.8	50.0	Compliance

AC120 V, 60 Hz, Neutral:

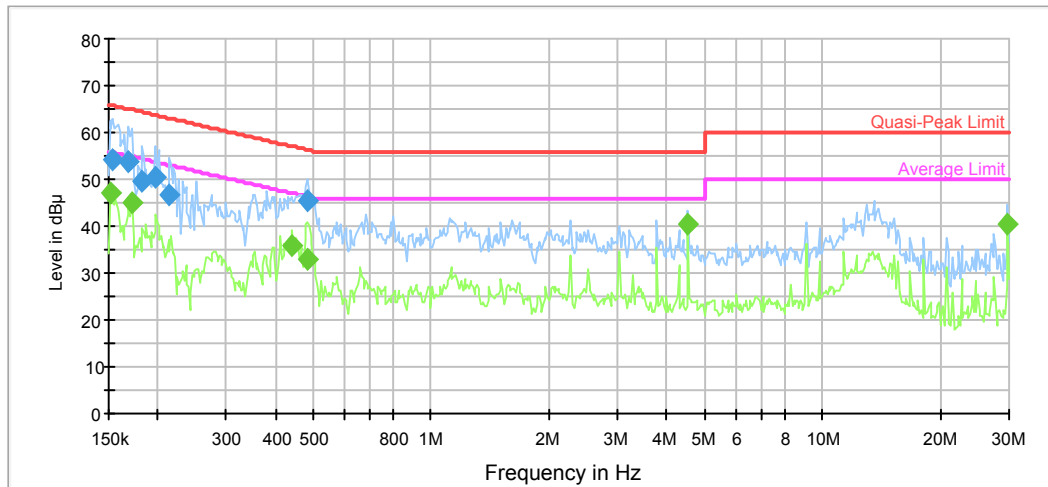

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.153629	54.1	9.000	N	11.1	11.7	65.8	Compliance
0.169044	53.9	9.000	N	10.9	11.1	65.0	Compliance
0.183065	49.7	9.000	N	10.8	14.6	64.3	Compliance
0.196675	50.2	9.000	N	10.6	13.5	63.7	Compliance
0.214692	46.5	9.000	N	10.5	16.5	63.0	Compliance
0.483938	45.4	9.000	N	9.9	10.9	56.3	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.151200	47.2	9.000	N	11.2	8.7	55.9	Compliance
0.171759	44.9	9.000	N	10.9	9.9	54.8	Compliance
0.443327	36.0	9.000	N	9.9	11.0	47.0	Compliance
0.483938	32.9	9.000	N	9.9	13.4	46.3	Compliance
4.541500	40.6	9.000	N	9.8	5.4	46.0	Compliance
29.777269	40.5	9.000	N	10.2	9.5	50.0	Compliance

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

FCC Part 15.205, 15.209, 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.


As per FCC Part 15.209

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

EUT Setup

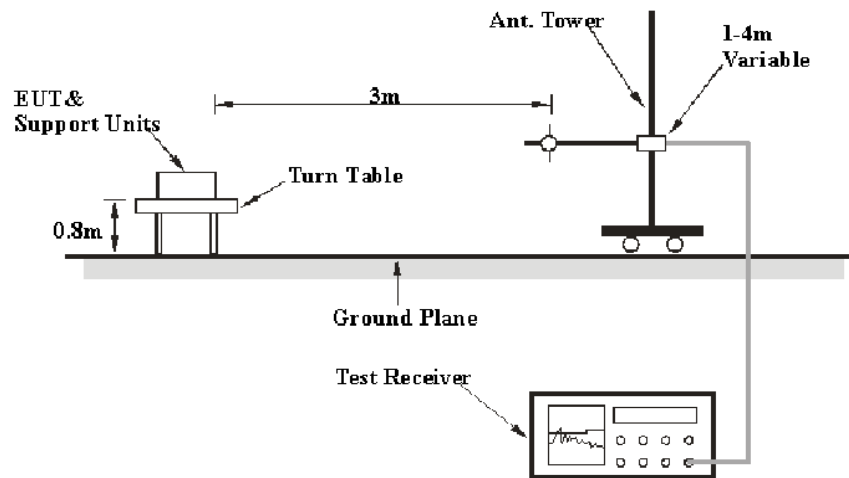

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2016-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209&15.225.


Test Data**Environmental Conditions**

Temperature:	21.9 °C
Relative Humidity:	34 %
ATM Pressure:	101.4 kPa


* The testing was performed by Eric Xiao on 2018-02-23.

Test mode: Transmitting (Adapter supply mode was the worst)

1) 9 kHz~30MHz:

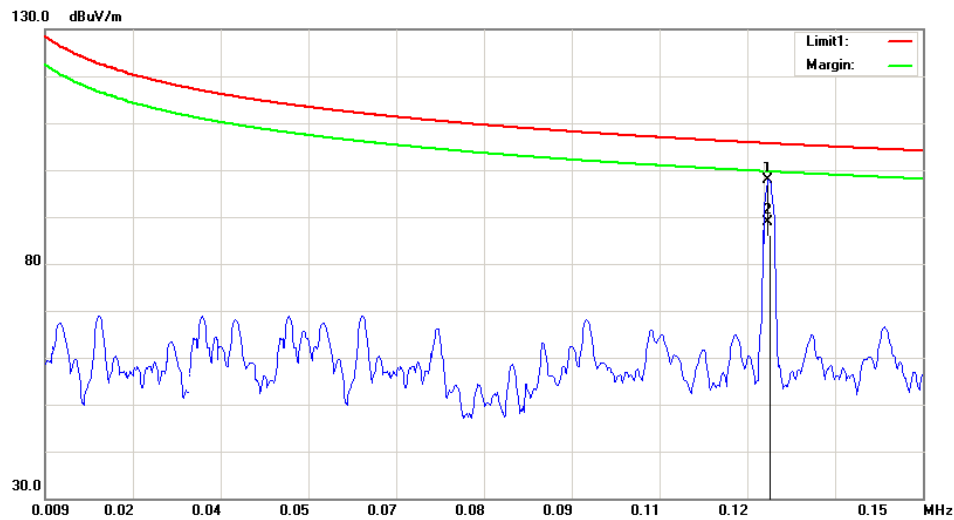


No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	0.1253	57.48	peak	39.91	97.39	105.63	8.24

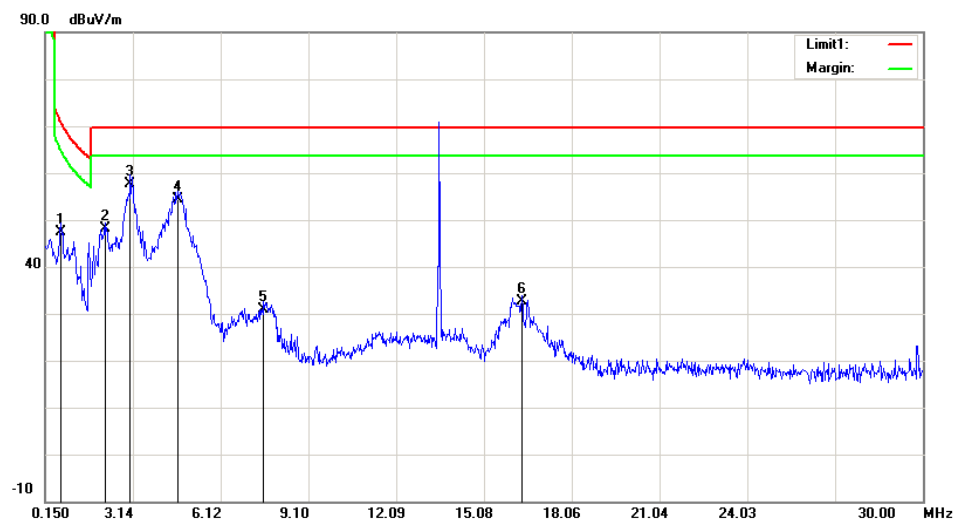


No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	0.6873	24.04	peak	23.26	47.30	70.86	23.56
2	2.1798	34.12	peak	14.08	48.20	69.54	21.34
3	3.0455	45.40	peak	12.20	57.60	69.54	11.94
4	4.6573	44.87	peak	9.43	54.30	69.54	15.24
5	7.5826	23.84	peak	6.96	30.80	69.54	38.74
6	16.3584	26.68	peak	5.92	32.60	69.54	36.94

Fundamental:

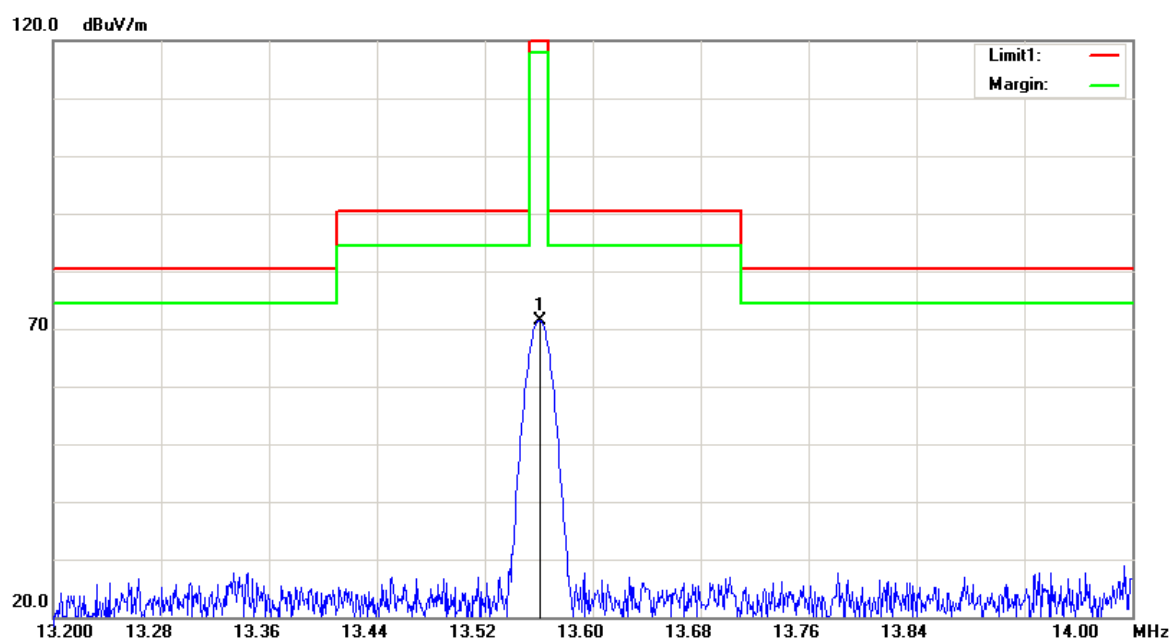


No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	13.5608	60.10	peak	11.34	71.44	124.00	52.56

2) Above 30 MHz

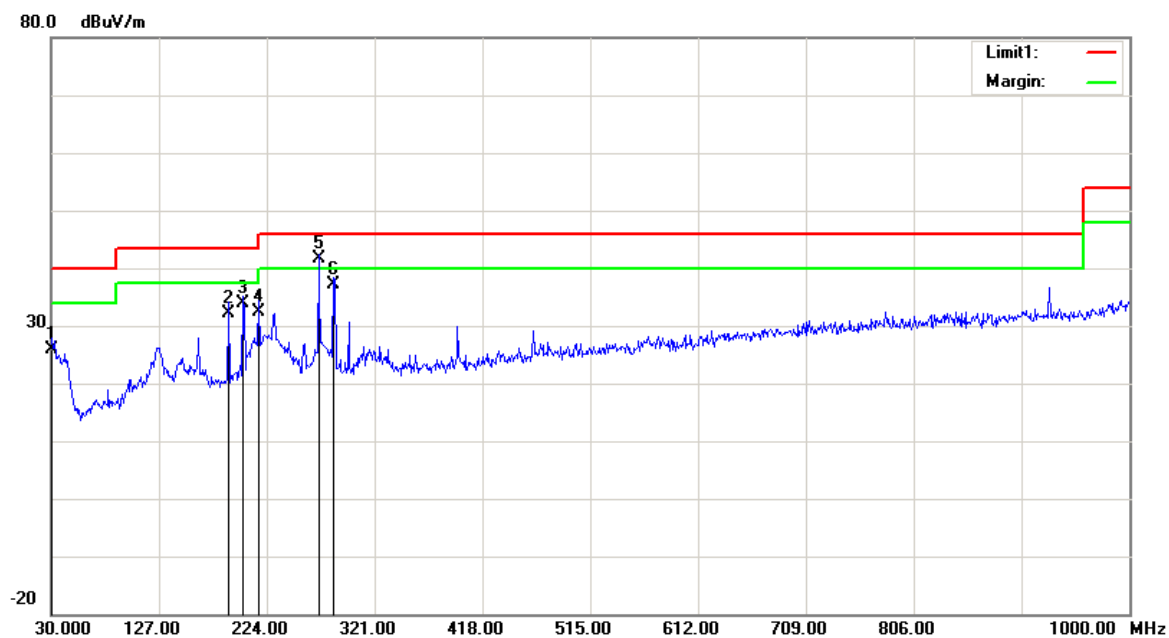Horizontal

No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	30.0000	24.26	QP	1.54	25.80	40.00	14.20
2	190.0500	39.46	QP	-7.36	32.10	43.50	11.40
3	202.6600	39.95	QP	-6.15	33.80	43.50	9.70
4	216.2400	39.55	QP	-7.15	32.40	46.00	13.60
5	270.5600	45.88	QP	-4.28	41.60	46.00	4.40
6	284.1400	41.18	QP	-4.08	37.10	46.00	8.90

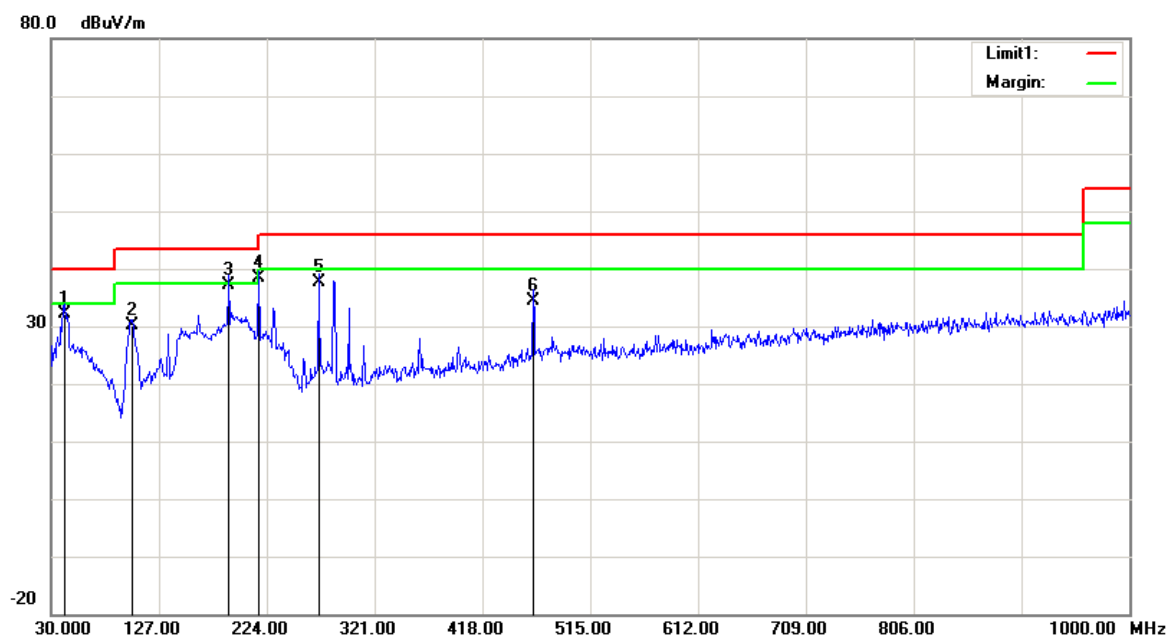Vertical

No.	Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	42.6100	39.78	QP	-7.68	32.10	40.00	7.90
2	102.7500	38.26	QP	-8.16	30.10	43.50	13.40
3	190.0500	44.56	QP	-7.36	37.20	43.50	6.30
4	216.2400	45.45	QP	-7.15	38.30	46.00	7.70
5	270.5600	41.88	QP	-4.28	37.60	46.00	8.40
6	463.5900	35.20	QP	-0.70	34.50	46.00	11.50

FCC§15.225(e) - FREQUENCY STABILITY**Applicable Standard**

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
UNI-T	Multimeter	UT39A	M130199938	2017-05-09	2018-05-09
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-08-28	2018-08-28
Pro instrument	DC Power Supply	pps3300	01	N/A	N/A
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21.9 °C
Relative Humidity:	34 %
ATM Pressure:	101.4 kPa

* The testing was performed by Eric Xiao on 2018-02-23.

Test Mode: Transmitting

Test Result: Pass

f₀ = 13.56 MHz				
Temperature	Voltage	Measured frequency	Frequency Error	Limit
°C	V_{DC}	MHz	Hz	Hz
-20	12.0	13.5609	900	±1356
-10		13.5608	800	±1356
0		13.5604	400	±1356
10		13.5608	800	±1356
20		13.5607	700	±1356
25		13.5602	200	±1356
30		13.5602	200	±1356
40		13.5604	400	±1356
50		13.5605	500	±1356
25	9.0	13.5607	700	±1356
25	15.0	13.5602	200	±1356

Note: the operation power supply voltage range is declared by manufacturer.

FCC §15.215(c) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	21.9 °C
Relative Humidity:	34 %
ATM Pressure:	101.4 kPa

* The testing was performed by Eric Xiao on 2018-02-23.

Test Mode: Transmitting

20 dB Emission Bandwidth(1.04 kHz)

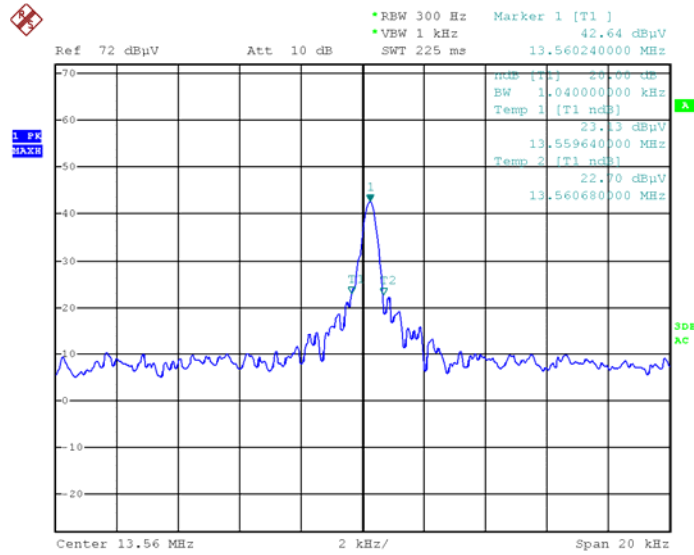

Date: 23.FEB.2018 21:34:28

***** END OF REPORT *****