

FCC Test Report

(Class II Permissive Change)

Product Name	WAH0001
Model No.	QI-150P
FCC ID.	2AOV3QI-150P

Applicant	Hitachi Information & Telecommunication Engineering, Ltd.
Address	Queen's Tower B 22F, 2-3-3, Minatomirai, Nishi-ku, Yokohama 220-6122, Japan

Date of Receipt	May. 10, 2018
Issued Date	Jul. 16, 2018
Report No.	1850118R-RFUSP23V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report


Issued Date: Jul. 16, 2018

Report No.: 1850118R-RFUSP23V00




Product Name	WAH0001
Applicant	Hitachi Information & Telecommunication Engineering, Ltd.
Address	Queen's Tower B 22F, 2-3-3, Minatomirai, Nishi-ku, Yokohama 220-6122, Japan
Manufacturer	Hitachi Information & Telecommunication Engineering, Ltd.
Model No.	QI-150P
FCC ID.	2AOV3QI-150P
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V
Trade Name	Hitachi Information & Telecommuniatiion Engineering, Ltd
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Anny Chou)

Tested By :



(Engineer / Paul Jiang)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System.....	7
1.5. EUT Exercise Software	7
1.6. Test Facility.....	8
1.7. List of Test Equipment.....	9
2. PEAK POWER OUTPUT.....	10
2.1. Test Setup.....	10
2.2. Limit	10
2.3. Test Procedure.....	10
2.4. Uncertainty.....	10
2.5. Test Result of Peak Power Output.....	11
3. RADIATED EMISSION	13
3.1. Test Setup.....	13
3.2. Limits.....	14
3.3. Test Procedure.....	15
3.4. Uncertainty.....	15
3.5. Test Result of Radiated Emission.....	16
4. BAND EDGE	24
4.1. Test Setup.....	24
4.2. Limit	24
4.3. Test Procedure.....	25
4.4. Uncertainty.....	25
4.5. Test Result of Band Edge.....	26
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	WAH0001
Trade Name	Hitachi Information & Telecommunication Engineering, Ltd
Model No.	QI-150P
FCC ID.	2AOV3QI-150P
Frequency Range	2402-2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	STAF	T17-002-1054	Dipole Antenna	0.65dBi for 2.4 GHz

Note:

1. The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a WAH0001 with a built-in WiGig、WLAN and Bluetooth transceiver, this report for Bluetooth V3.0, V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. This is to request a Class II permissive change for FCC ID: 2AOV3QI-150P, originally granted on 07/25/2018.

The major change filed under this application is:

Change #1: Reduce the Output Power through firmware(only reduce Bluetooth Output Power, WLAN Output Power haven't changes), All other hardware is identical with original granted.

#2: Addition one new antenna(WLAN and Bluetooth), the antenna type is different, the antenna gain is lower than the original application.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK)
	Mode 2: Transmit - 3Mbps (8DPSK)

1.2. Operational Description

The EUT is a WAH0001 with built-in 2.4GHz Bluetooth V3.0, V2.1+EDR transceiver. The number of the channels is 79 in 2402-2480MHz. This device provides three kinds of transmitting speed and modulation, respectively GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps). The antenna is Dipole Antenna and provides diversity function to improve the receiving function.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

This equipment includes WiGig、WLAN and Bluetooth, which can not transmit signals simultaneously.

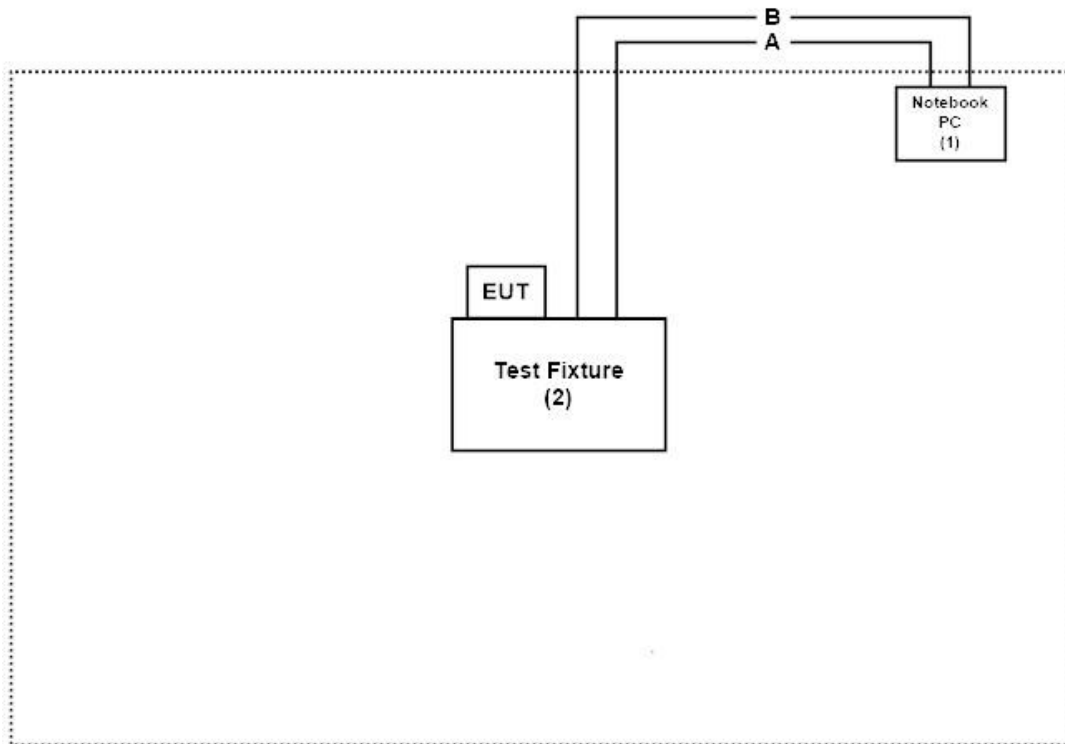
1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	Latitude E5440	B6TYTZ1	Non-shielded, 1.8m
2 Test Fixture	Hitachi Information & Telecommuniation Engineering, Ltd	N/A	N/A	Non-shielded, 1.8m

Signal Cable Type	Signal cable Description
A LAN Cable	Non-shielded, 3m
B USB Cable	Shielded, 1.2m

1.4. Configuration of Tested System



1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software "Qualcomm v3.0.244.0" on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
 Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
 Taiwan, R.O.C.
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2018/2/12	2019/2/11
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2017/10/13	2018/10/12
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2017/7/19	2018/7/18
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2018/7/6	2019/7/5
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2018/7/6	2019/7/5
	EMI Test Receiver	R&S	ESCS 30	100369	2017/11/7	2018/11/6
	LISN	R&S	ESH3-Z5	836679/017	2018/2/9	2019/2/8
	LISN	R&S	ENV216	100097	2018/2/9	2019/2/8
	Coaxial Cable	DEKRA	RG 400	LC018-RG	2018/6/22	2019/6/21

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2018/3/12	2019/3/11
	Loop Antenna	Teseq	HLA6121	37133	2017/10/13	2018/10/12
X	Bilog Antenna	Schaffner Chase	CBL6112B	2707	2018/6/25	2019/6/24
X	Coaxial Cable	DEKRA	RG 214	LC003-RG	2018/6/15	2019/6/14
X	Pre-Amplifier	Jet-Power	JPA-10M1G33	170101000330010	2017/7/19	2018/7/18
X	Horn Antenna	ETS-Lindgren	3117	00135205	2018/5/3	2019/5/2
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2018/4/10	2019/4/9
X	Coaxial Cable	QuieTek	SF-106	LC035/37/41-SF LC038-SF,LC037-SF	2018/6/21	2019/6/20
	Amplifier + Cable	EMCI	EMC184045SE	980370	2018/3/21	2019/3/20
	Horn Antenna	Com-Power	AH-840	101043	2018/1/9	2019/1/8
X	Filter	MicroTRON	BRM50701	019	2017/11/21	2018/11/20
	Filter	Microwave Circuits	N0257881	36681	2018/1/22	2019/1/21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuieTek EMI 2.0 V2.1.113.

2. Peak Power Output

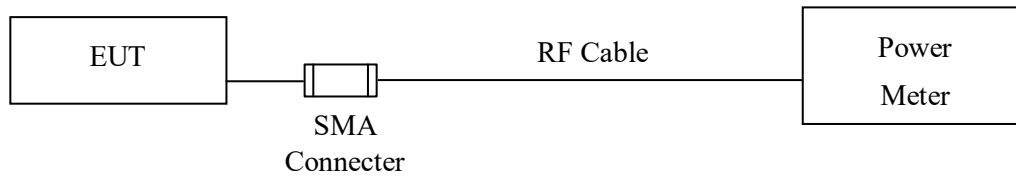2.1. Test Setup



2.2. Limit

The maximum peak power shall be less 1 Watt.

2.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.4. Uncertainty

± 1.19 dB

2.5. Test Result of Peak Power Output

Product : WAH0001
Test Item : Peak Power Output
Test Site : No.3 OATS
Test date : 2018/07/10
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	4.83	1 Watt= 30 dBm	Pass
Channel 39	2441.00	4.96	1 Watt= 30 dBm	Pass
Channel 78	2480.00	4.74	1 Watt= 30 dBm	Pass


Product : WAH0001
Test Item : Peak Power Output
Test Site : No.3 OATS
Test date : 2018/07/10
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	5.65	1 Watt= 30 dBm	Pass
Channel 39	2441.00	5.72	1 Watt= 30 dBm	Pass
Channel 78	2480.00	5.48	1 Watt= 30 dBm	Pass


3. Radiated Emission

3.1. Test Setup

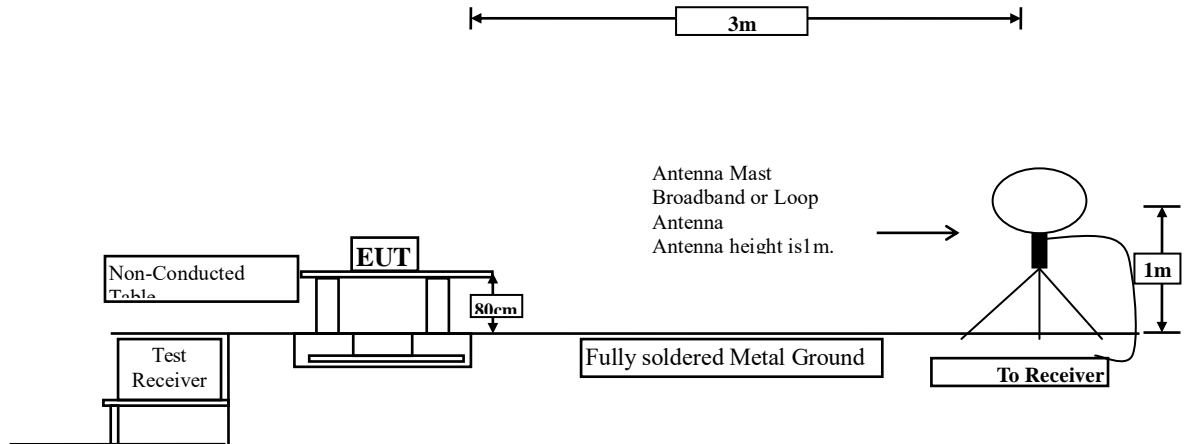
Under 30MHz



Below 1GHz

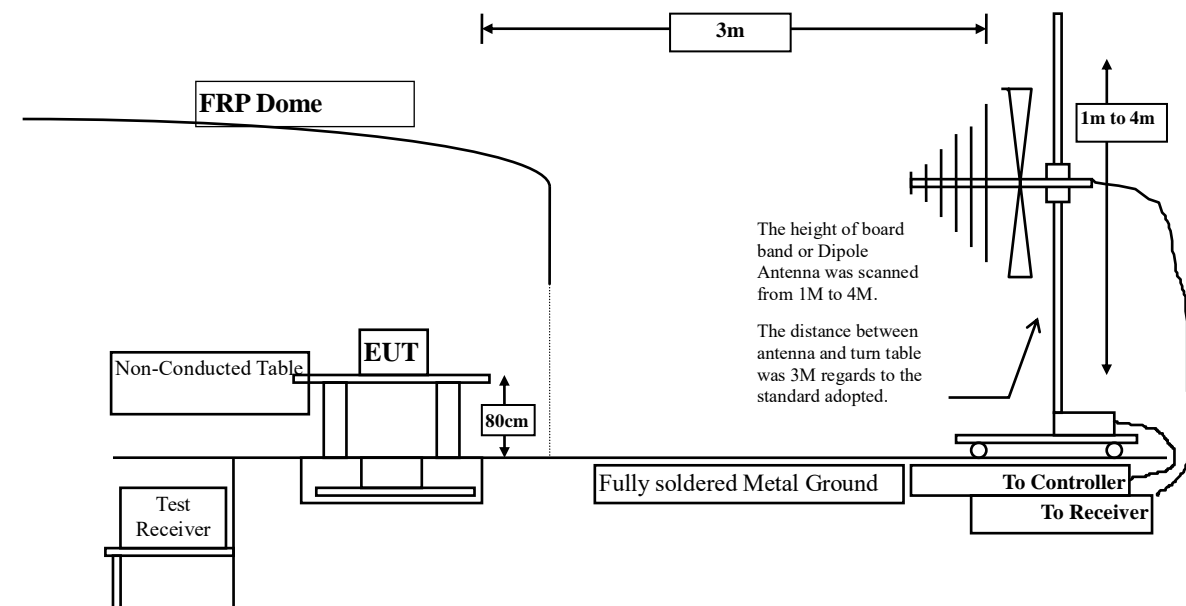

Above 1GHz

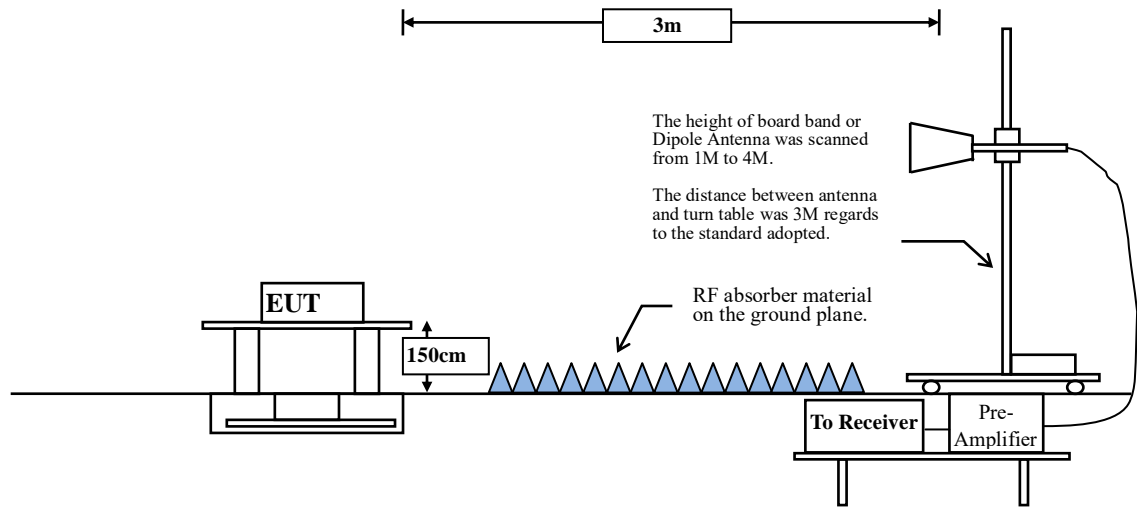

3.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

3.5. Test Result of Radiated Emission

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4804.000	2.342	45.570	47.912	-26.088	74.000
7206.000	9.700	39.610	49.310	-24.690	74.000
9608.000	10.395	39.880	50.275	-23.725	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	2.754	45.620	48.374	-25.626	74.000
7206.000	10.177	39.810	49.987	-24.013	74.000
9608.000	10.848	39.410	50.257	-23.743	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal**Peak Detector:**

4882.000	1.908	44.870	46.778	-27.222	74.000
7323.000	9.977	39.760	49.737	-24.263	74.000
9764.000	9.826	39.210	49.036	-24.964	74.000

Average**Detector:**

--

Vertical**Peak Detector:**

4882.000	2.371	45.030	47.400	-26.600	74.000
7323.000	10.590	39.230	49.820	-24.180	74.000
9764.000	10.459	39.130	49.589	-24.411	74.000

Average**Detector:**

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal**Peak Detector:**

4960.000	2.387	44.710	47.097	-26.903	74.000
7440.000	10.517	39.610	50.127	-23.873	74.000
9920.000	10.042	40.330	50.372	-23.628	74.000

Average**Detector:**

--

Vertical**Peak Detector:**

4960.000	3.203	45.970	49.174	-24.826	74.000
7440.000	11.176	39.870	51.046	-22.954	74.000
9920.000	11.081	39.930	51.011	-22.989	74.000

Average**Detector:**

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4804.000	2.342	44.210	46.552	-27.448	74.000
7206.000	9.700	39.750	49.450	-24.550	74.000
9608.000	10.395	39.540	49.935	-24.065	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4804.000	2.754	44.610	47.364	-26.636	74.000
7206.000	10.177	39.720	49.897	-24.103	74.000
9608.000	10.848	39.960	50.807	-23.193	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4882.000	1.908	43.940	45.848	-28.152	74.000
7323.000	9.977	39.610	49.587	-24.413	74.000
9764.000	9.826	39.570	49.396	-24.604	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4882.000	2.371	42.640	45.010	-28.990	74.000
7323.000	10.590	39.530	50.120	-23.880	74.000
9764.000	10.459	39.650	50.109	-23.891	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/09
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal**Peak Detector:**

4960.000	2.387	43.170	45.557	-28.443	74.000
7440.000	10.517	39.210	49.727	-24.273	74.000
9920.000	10.042	39.640	49.682	-24.318	74.000

Average**Detector:**

--

Vertical**Peak Detector:**

4960.000	3.203	43.860	47.064	-26.936	74.000
7440.000	11.176	38.960	50.136	-23.864	74.000
9920.000	11.081	39.560	50.641	-23.359	74.000

Average**Detector:**

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/06
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
74.620	-10.424	41.458	31.034	-8.966	40.000
350.100	-10.623	39.941	29.318	-16.682	46.000
499.480	-7.470	38.877	31.407	-14.593	46.000
606.180	-5.442	32.487	27.045	-18.955	46.000
800.180	-3.656	38.246	34.590	-11.410	46.000
961.200	-3.242	34.011	30.769	-23.231	54.000
Vertical					
88.200	-5.862	38.515	32.653	-10.847	43.500
220.120	-15.765	37.458	21.693	-24.307	46.000
350.100	-10.603	35.084	24.481	-21.519	46.000
499.480	-9.660	44.905	35.245	-10.755	46.000
600.360	-8.328	35.600	27.272	-18.728	46.000
875.840	-9.610	36.564	26.954	-19.046	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WAH0001
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2018/07/06
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
74.620	-10.424	43.022	32.598	-7.402	40.000
222.060	-19.350	45.692	26.342	-19.658	46.000
350.100	-10.623	39.257	28.634	-17.366	46.000
499.480	-7.470	39.211	31.741	-14.259	46.000
800.180	-3.656	38.856	35.200	-10.800	46.000
1000.000	-0.430	36.068	35.638	-18.362	54.000
Vertical					
88.200	-5.862	39.520	33.658	-9.842	43.500
375.320	-8.967	37.678	28.711	-17.289	46.000
499.480	-9.660	44.605	34.945	-11.055	46.000
600.360	-8.328	35.747	27.419	-18.581	46.000
802.120	-7.115	30.707	23.592	-22.408	46.000
926.280	-6.762	30.669	23.907	-22.093	46.000

Note:

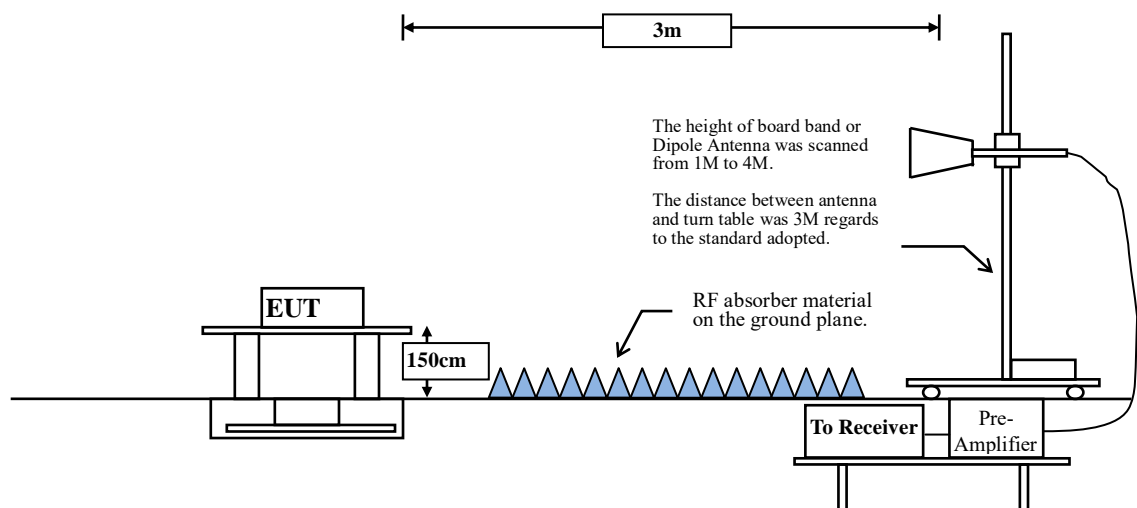
1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

4. Band Edge


4.1. Test Setup

RF Radiated Measurement:

Above 1GHz



RF Conducted Measurement

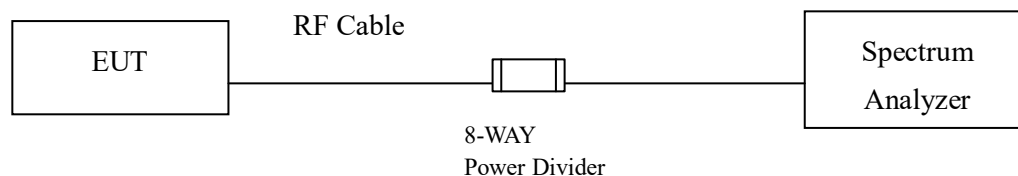

4.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Band Edge

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2386.812	6.461	35.833	42.294	74.00	54.00	Pass
00 (Peak)	2390.000	6.474	34.477	40.952	74.00	54.00	Pass
00 (Peak)	2400.000	6.528	52.101	58.629	--	--	--
00 (Peak)	2402.174	6.541	85.126	91.667	--	--	--
00 (Average)	2390.000	6.474	18.401	24.876	74.00	54.00	Pass
00 (Average)	2400.000	6.528	32.267	38.795	--	--	--
00 (Average)	2402.029	6.540	71.760	78.300	--	--	--

Figure Channel 00:

Horizontal (Peak)


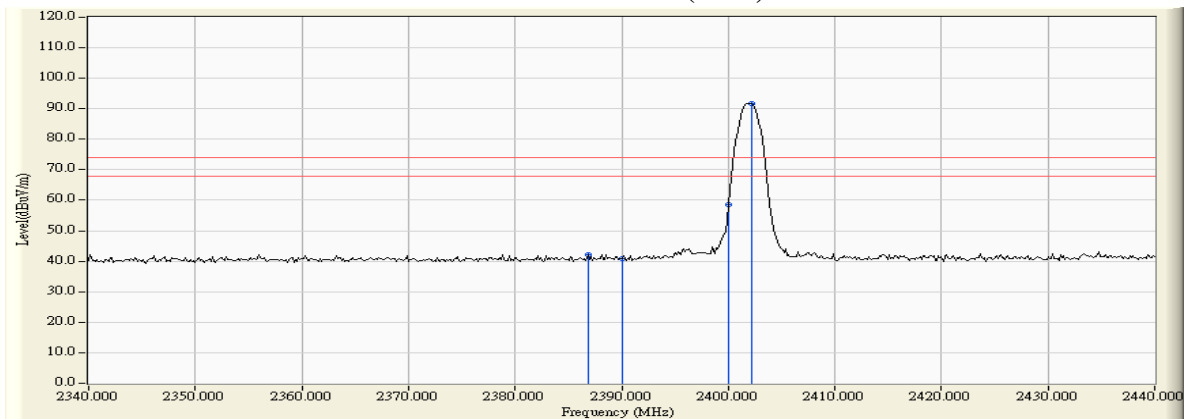


Figure Channel 00:

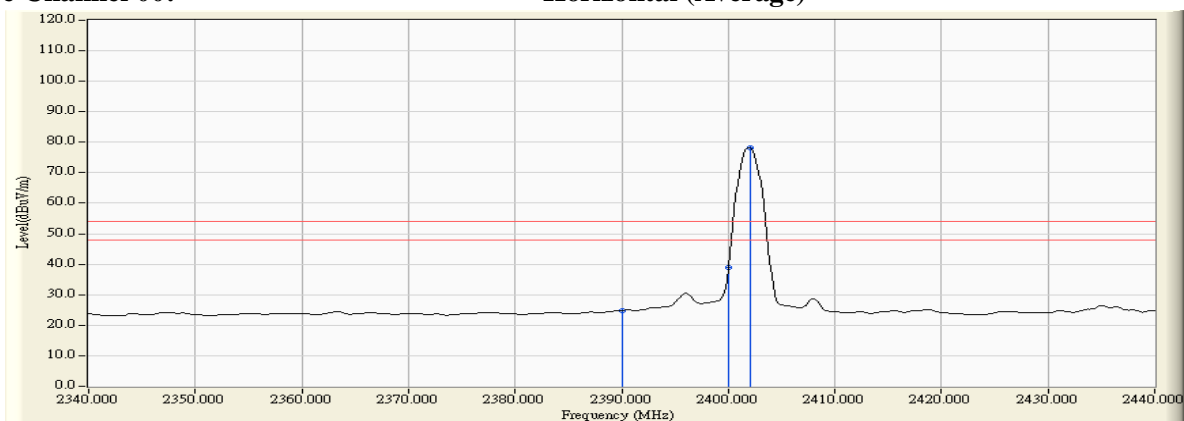Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2389.710	5.882	37.001	42.883	74.00	54.00	Pass
00 (Peak)	2390.000	5.880	36.594	42.475	74.00	54.00	Pass
00 (Peak)	2400.000	5.879	58.562	64.441	--	--	--
00 (Peak)	2401.884	5.884	91.772	97.656	--	--	--
00 (Average)	2390.000	5.880	21.677	27.558	74.00	54.00	Pass
00 (Average)	2400.000	5.879	38.580	44.459	--	--	--
00 (Average)	2401.739	5.883	78.285	84.168	--	--	--

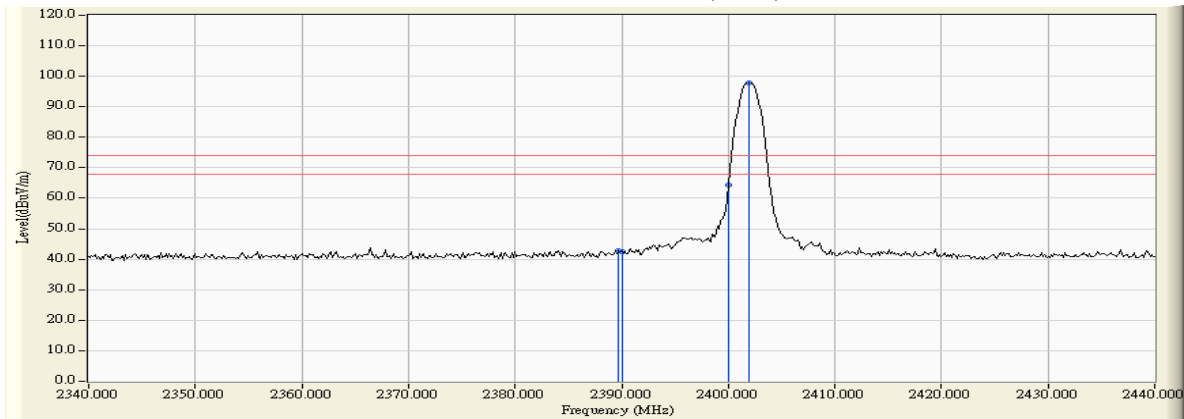
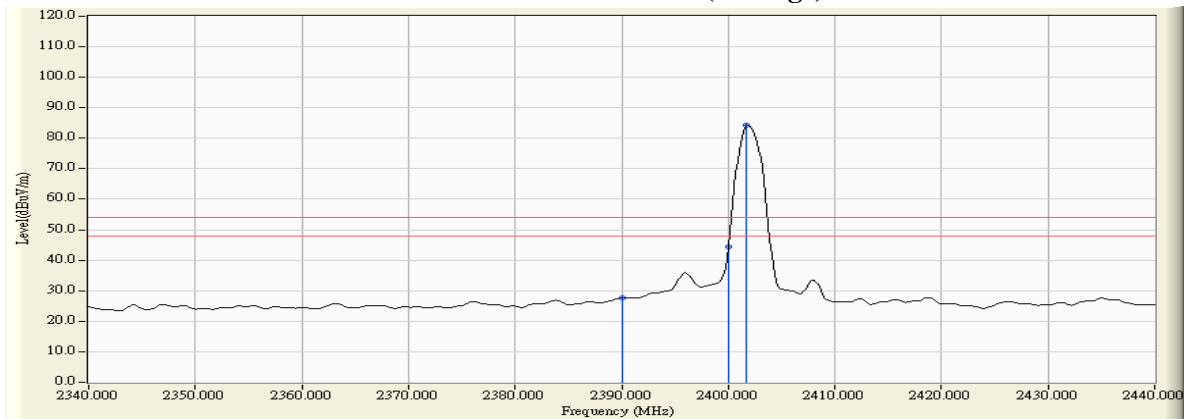
Figure Channel 00:**VERTICAL (Peak)****Figure Channel 00:****VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	7.085	86.583	93.667	--	--	Pass
78 (Peak)	2483.500	7.110	38.666	45.776	74.00	54.00	Pass
78 (Peak)	2499.877	7.190	39.451	46.641	74.00	54.00	Pass
78 (Average)	2480.022	7.086	73.711	80.796	--	--	Pass
78 (Average)	2483.500	7.110	21.045	28.155	74.00	54.00	Pass
78 (Average)	2500.022	7.190	28.543	35.733	74.00	54.00	Pass

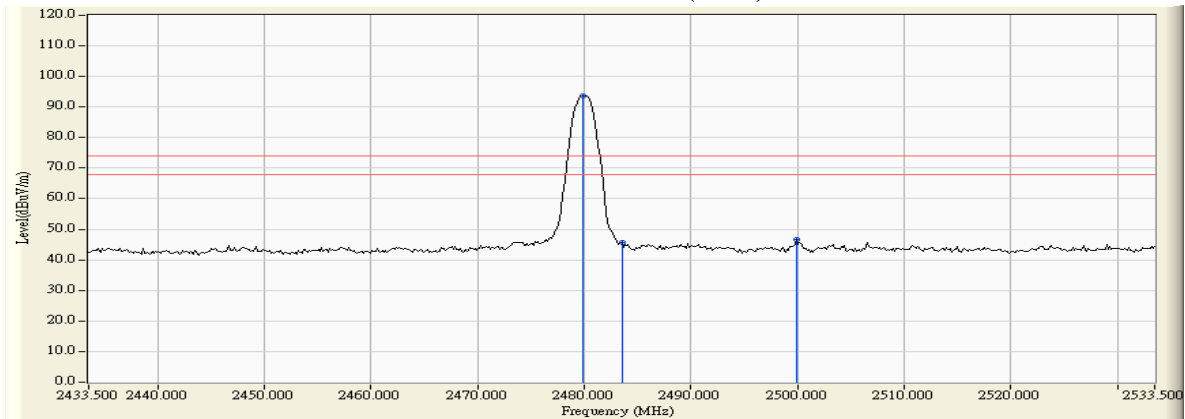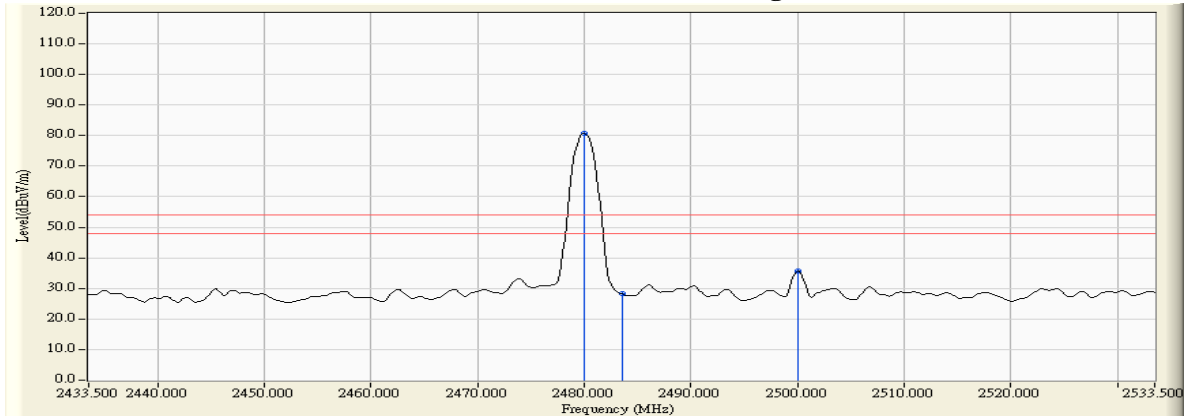Figure Channel 78: Horizontal (Peak)

Figure Channel 78: Horizontal (Average)


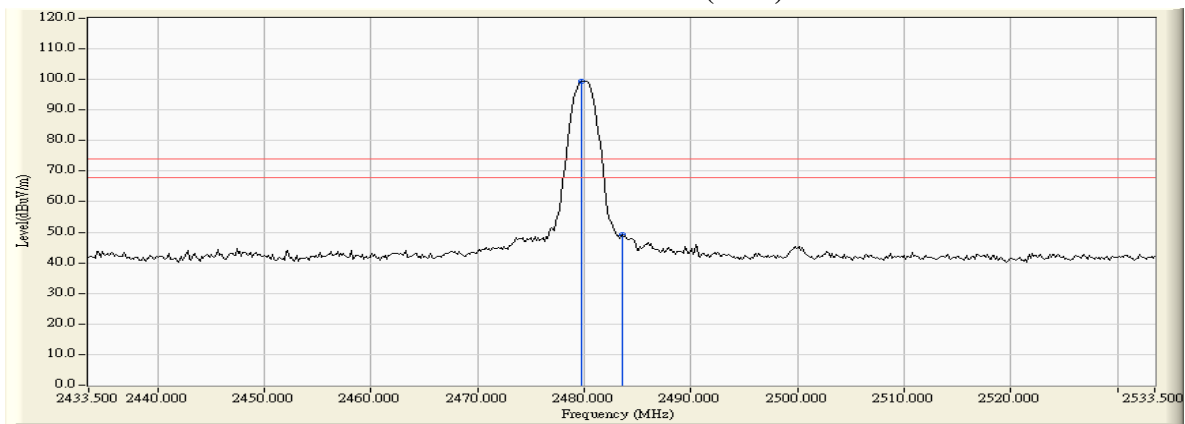
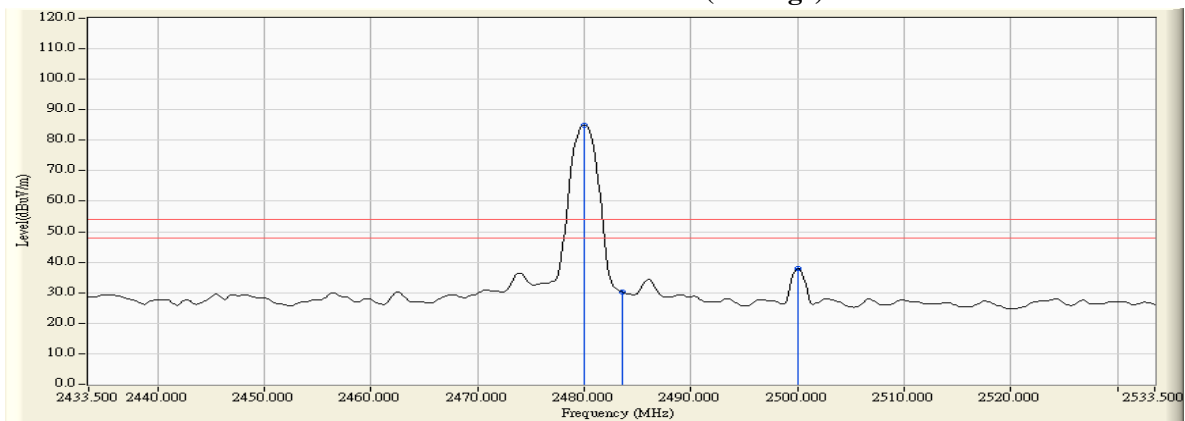
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.732	6.340	92.949	99.289	--	--	Pass
78 (Peak)	2483.500	6.363	42.782	49.145	74.00	54.00	Pass
78 (Average)	2480.022	6.342	78.667	85.009	--	--	Pass
78 (Average)	2483.500	6.363	23.880	30.243	74.00	54.00	Pass
78 (Average)	2500.022	6.448	31.452	37.900	74.00	54.00	Pass



Figure Channel 78:**VERTICAL (Peak)****Figure Channel 78:****VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2388.841	6.470	36.998	43.468	74.00	54.00	Pass
00 (Peak)	2390.000	6.474	35.751	42.226	74.00	54.00	Pass
00 (Peak)	2400.000	6.528	57.849	64.377	--	--	--
00 (Peak)	2402.029	6.540	85.137	91.677	--	--	--
00 (Average)	2390.000	6.474	18.192	24.667	74.00	54.00	Pass
00 (Average)	2400.000	6.528	37.134	43.662	--	--	--
00 (Average)	2402.029	6.540	67.115	73.655	--	--	--

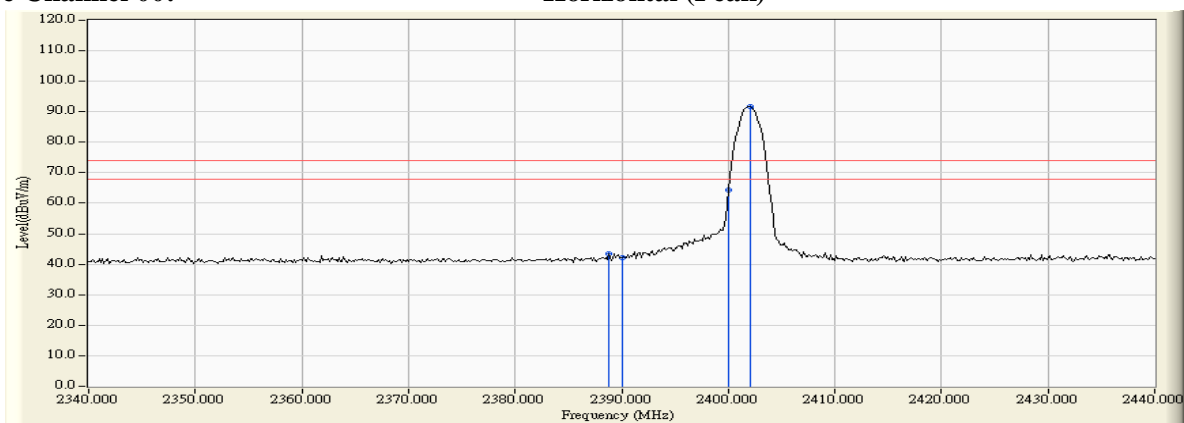
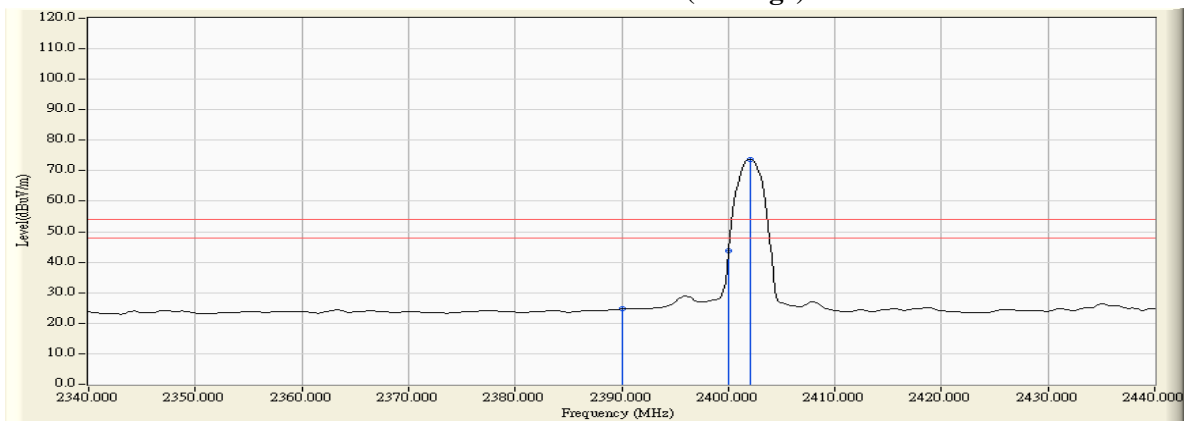
Figure Channel 00:**Horizontal (Peak)****Figure Channel 00:****Horizontal (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2389.275	5.884	42.089	47.973	74.00	54.00	Pass
00 (Peak)	2390.000	5.880	40.524	46.405	74.00	54.00	Pass
00 (Peak)	2400.000	5.879	64.423	70.302	--	--	--
00 (Peak)	2401.884	5.884	91.826	97.710	--	--	--
00 (Average)	2390.000	5.880	21.232	27.113	74.00	54.00	Pass
00 (Average)	2400.000	5.879	43.450	49.329	--	--	--
00 (Average)	2402.029	5.884	73.396	79.280	--	--	--

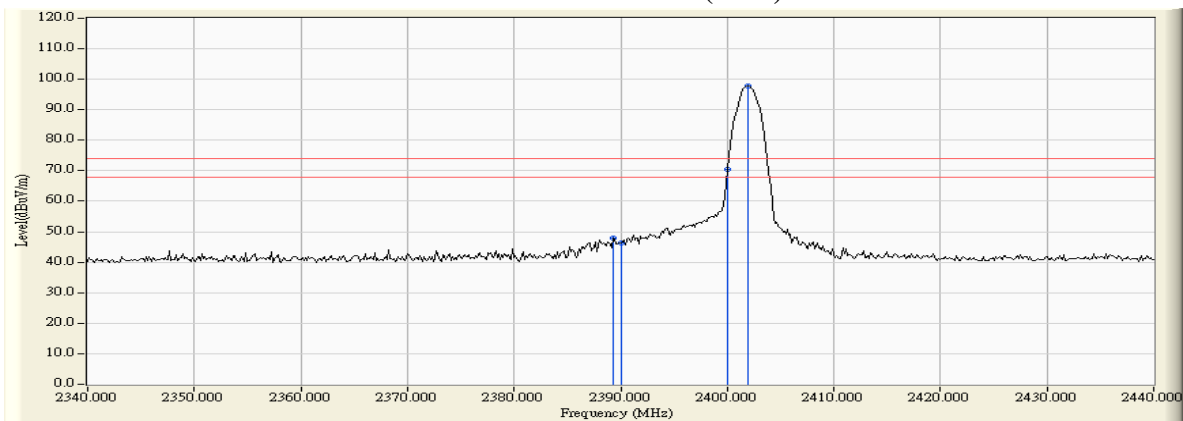
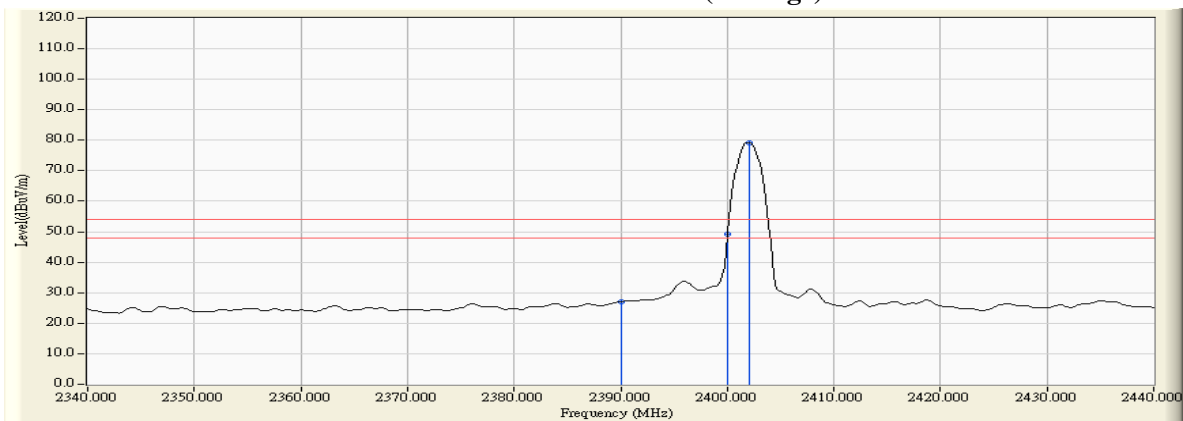
Figure Channel 00:**VERTICAL (Peak)****Figure Channel 00:****VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.022	7.086	86.579	93.664	--	--	Pass
78 (Peak)	2483.500	7.110	39.626	46.736	74.00	54.00	Pass
78 (Average)	2479.877	7.085	69.490	76.574	--	--	Pass
78 (Average)	2483.500	7.110	20.849	27.959	74.00	54.00	Pass
78 (Average)	2500.022	7.190	28.376	35.566	74.00	54.00	Pass

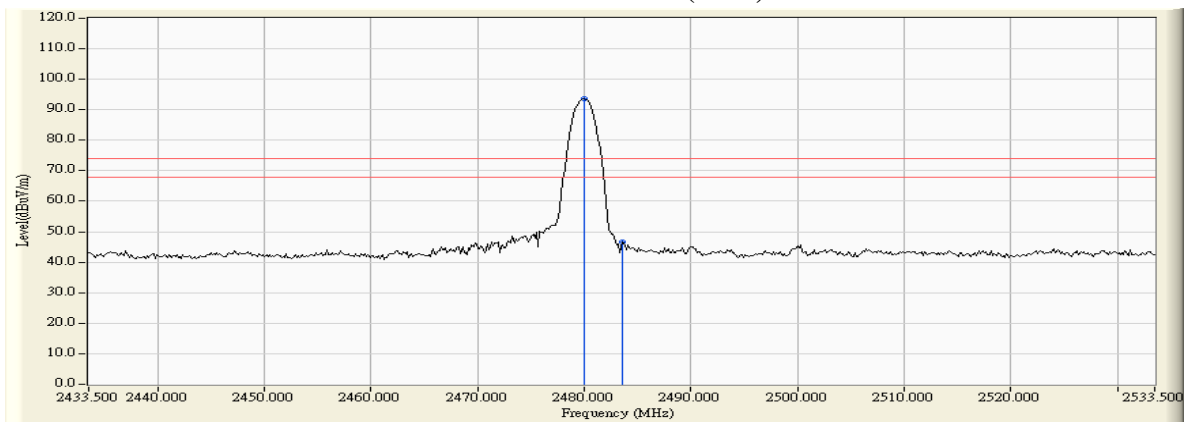
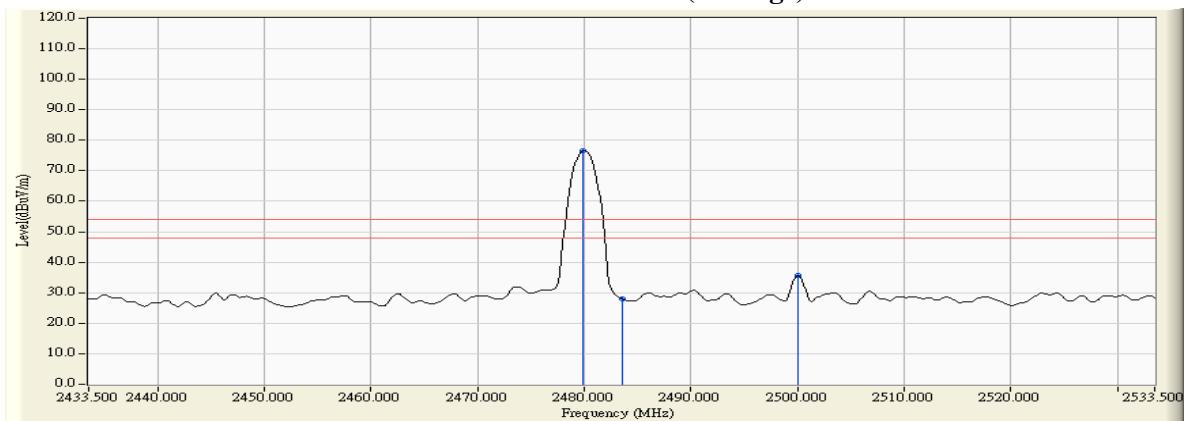
Figure Channel 00:**Horizontal (Peak)****Figure Channel 00:****Horizontal (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : WAH0001
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2018/07/05
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	6.341	93.010	99.351	--	--	Pass
78 (Peak)	2483.500	6.363	44.593	50.956	74.00	54.00	Pass
78 (Average)	2480.022	6.342	75.001	81.343	--	--	Pass
78 (Average)	2483.500	6.363	23.403	29.766	74.00	54.00	Pass
78 (Average)	2500.022	6.448	31.447	37.895	74.00	54.00	Pass

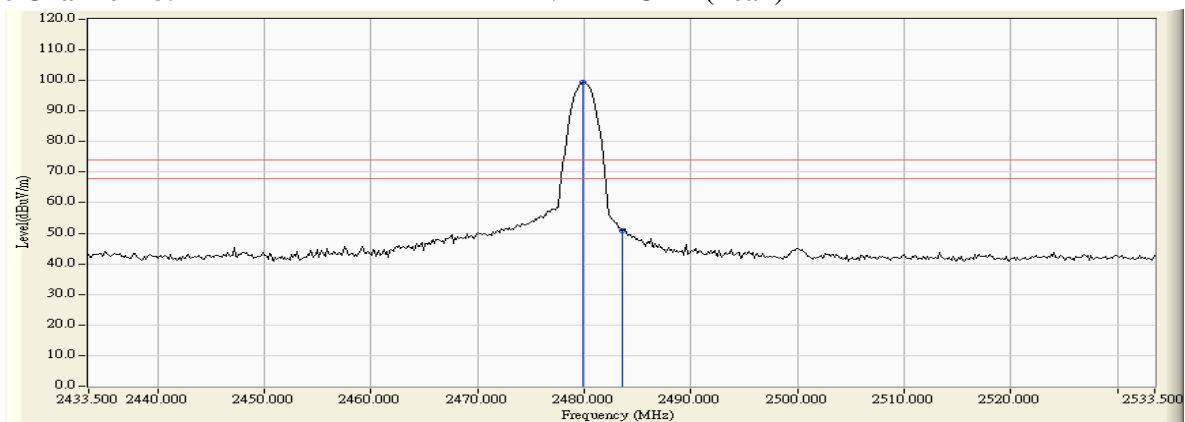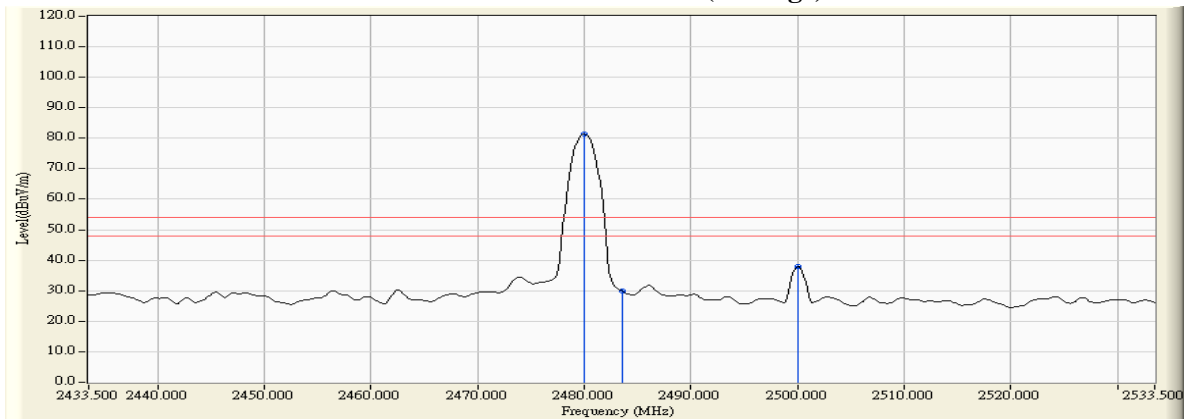Figure Channel 78:**VERTICAL (Peak)****Figure Channel 78:****VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.