

Professional HD IP Camera Quick Start Guide

Please download CD information at www.ipcam.xin.

Please read this manual carefully before using this product and keep it for future reference.

This manual is applies to our professional series IP cameras such as:

Bullet HD IP cameras

Dome HD IP cameras

PTZ HD IP cameras

The product does not contain CD, please download the correct product CD information at www.ipcam.xin before operating the camera.

Recommend operating the IP camera according to the content below.

Content

1. About camera	3
2. Connect camera	4
3. View via mobile phone	5
4. View via PC	6
5. Set WIFI	8
6. Set Micro SD card records	


1. About camera

1.1 Product introduction.

This is a HD IP camera for monitoring. It connects to the Internet to send and receive data, you can use it to remotely view real-time images from your mobile phone, computer or other device anytime and anywhere, it can save surveillance videos in the Micro SD card, computer or other device, The camera also supports alarm functions such as sending alarm emails, alarming phone message push and other functions.

1.2 Product should contain:

- ①IP Camera
- ②Power adapter
- ③User manual
- ④Network cable
- ⑤WIFI Antenna
- ⑥Screws bag

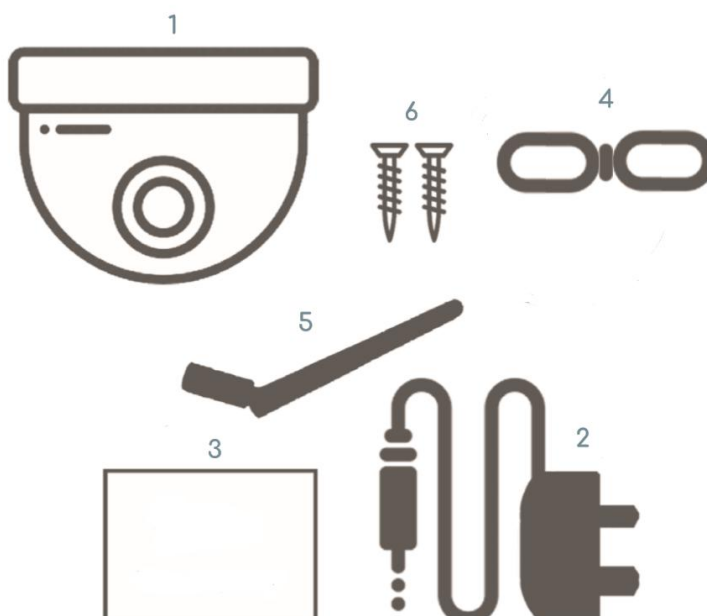


1.3 Product interface.



2. Connect camera


2.1 Connect network cable to router and plug in power adapter.

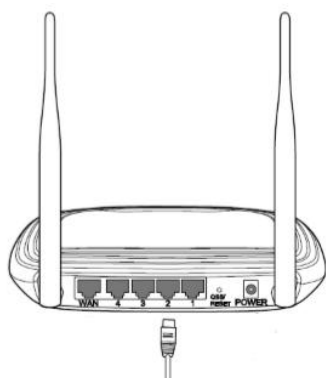

The router must be able to connect to the Internet!

Please use the standard power supply.

2.2 Connect network cable and power to the camera, it needs about a few minutes to self checking and then start working.

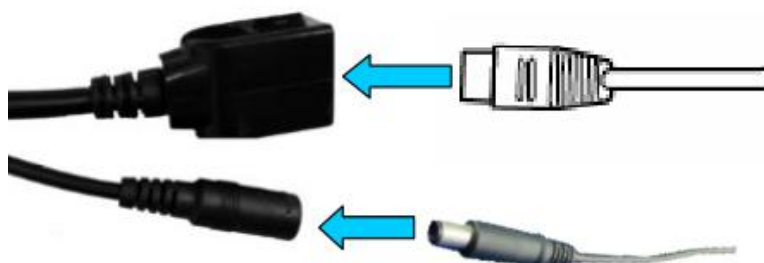

Network indicator light (green): always flashing means network data transmission is normal.

The camera will turn on AP mode when the camera is only connected to the power supply. you can connect the camera via the AP mode. For details, please find help documentation “How to use the AP mode of the camera” in the CD information.

3.1 Download “CamHi” or “CamHiPro” from Google Play Store / Apple



App Store or scan the QR code below to get APP information.



Android

IOS


3.2 Run APP and Add Camera.

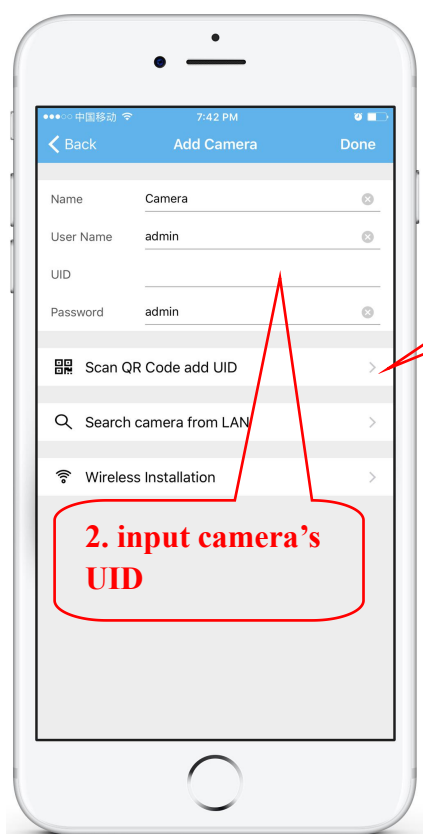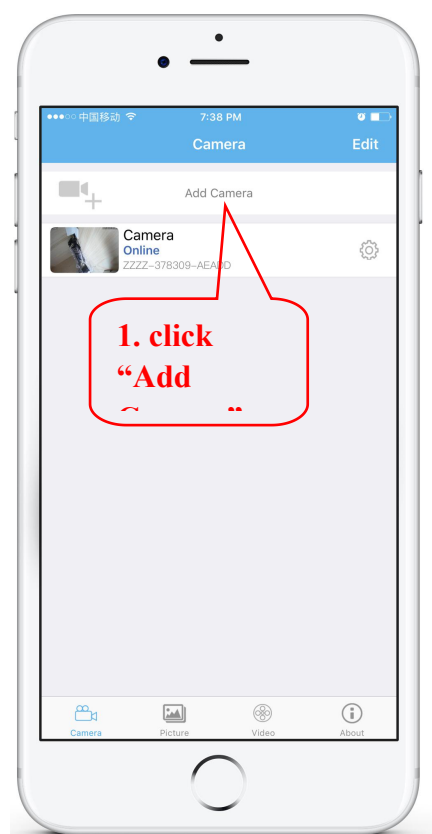

You can quickly enter the UID by scanning the QR code on the camera's label, as shown below






3.3 After adding the camera, click online camera to view real-time image.

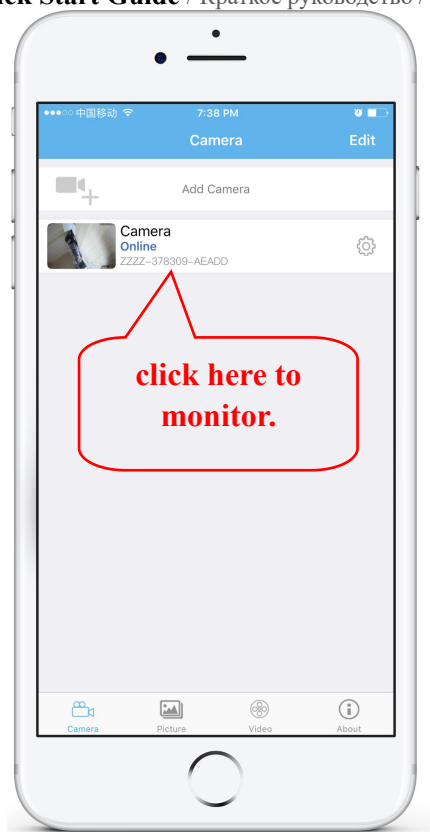

Detailed instructions for CamHI are available in the CD information.

4. View via PC

4.1 Install the “Search tool” from the CD information, then run it to find the cameras.

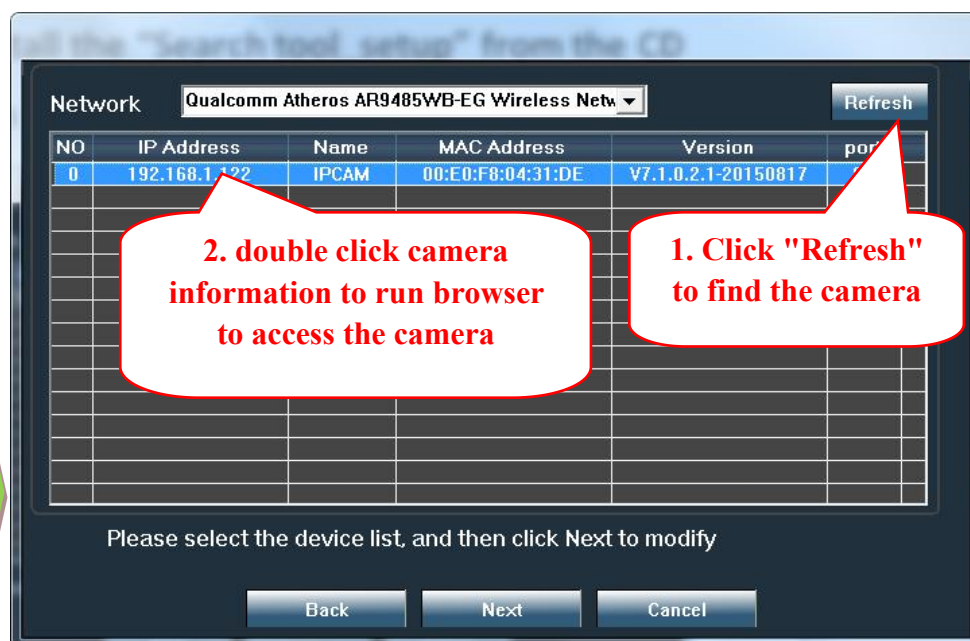

Click “Next” can modify network parameters of the camera.

Local 192.168.1.18
☒ DHCP
The software finds available network setting for the Ipcamera automatically. We suggest you just use it you want to modify it manually

IP 192 . 168 . 1 . 19 Name IPCAM
SubMask 255 . 255 . 255 . 0 User admin
GateWay 192 . 168 . 1 . 1 Password *****
Port 80 Pwd Reset

IP 192.168.1.122 Name IPCAM
SubMas 255.255.255.0 Port 80
GateWa 192.168.1.1
MAC 00:E0:F8:04:31:DE

Click Next to confirm the selected device, click Back to reselect the

Back Next Cancel

Default user name:

admin

Default password:

admin


4.2 Access to the camera via browser on windows PC.



In browser you can view image and configure all parameters of camera.

if you are not using IE browser some settings will be missing.


4.3 Connect and manage the multiple cameras via CMS on windows PC!

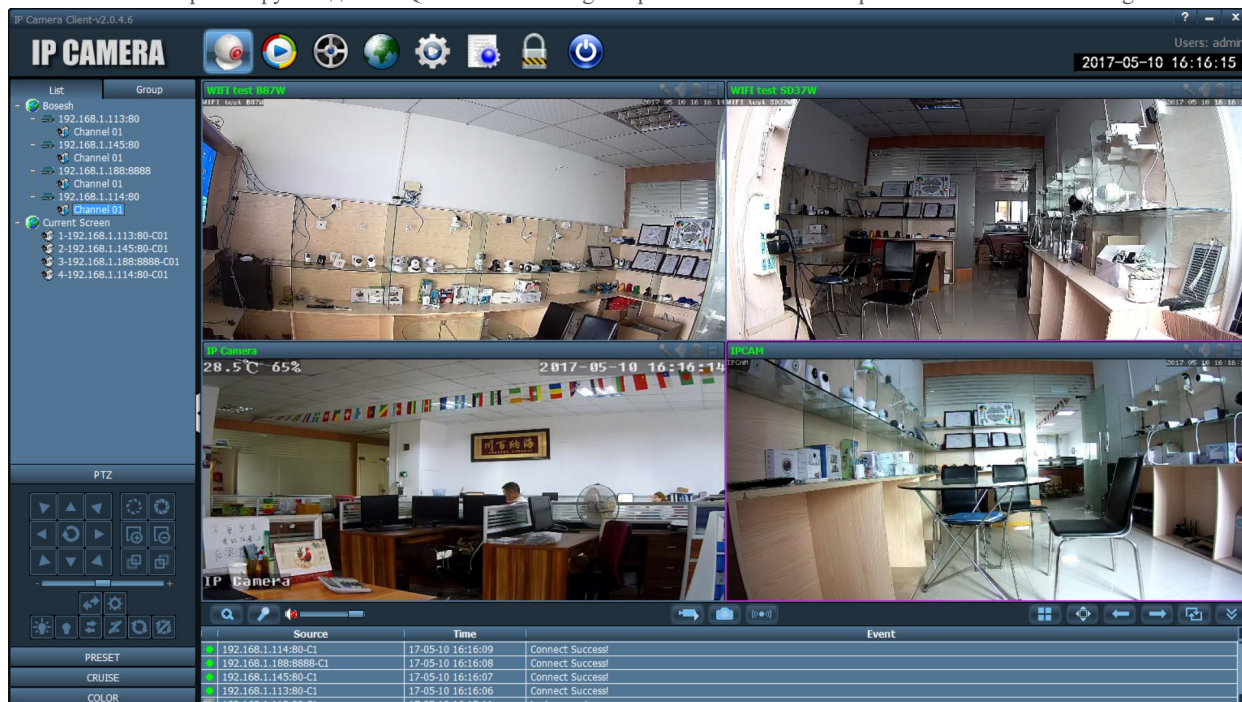

CMS installation packages and instructions are available in the CD

5. Set WIFI

5.1 Set WIFI on phone.

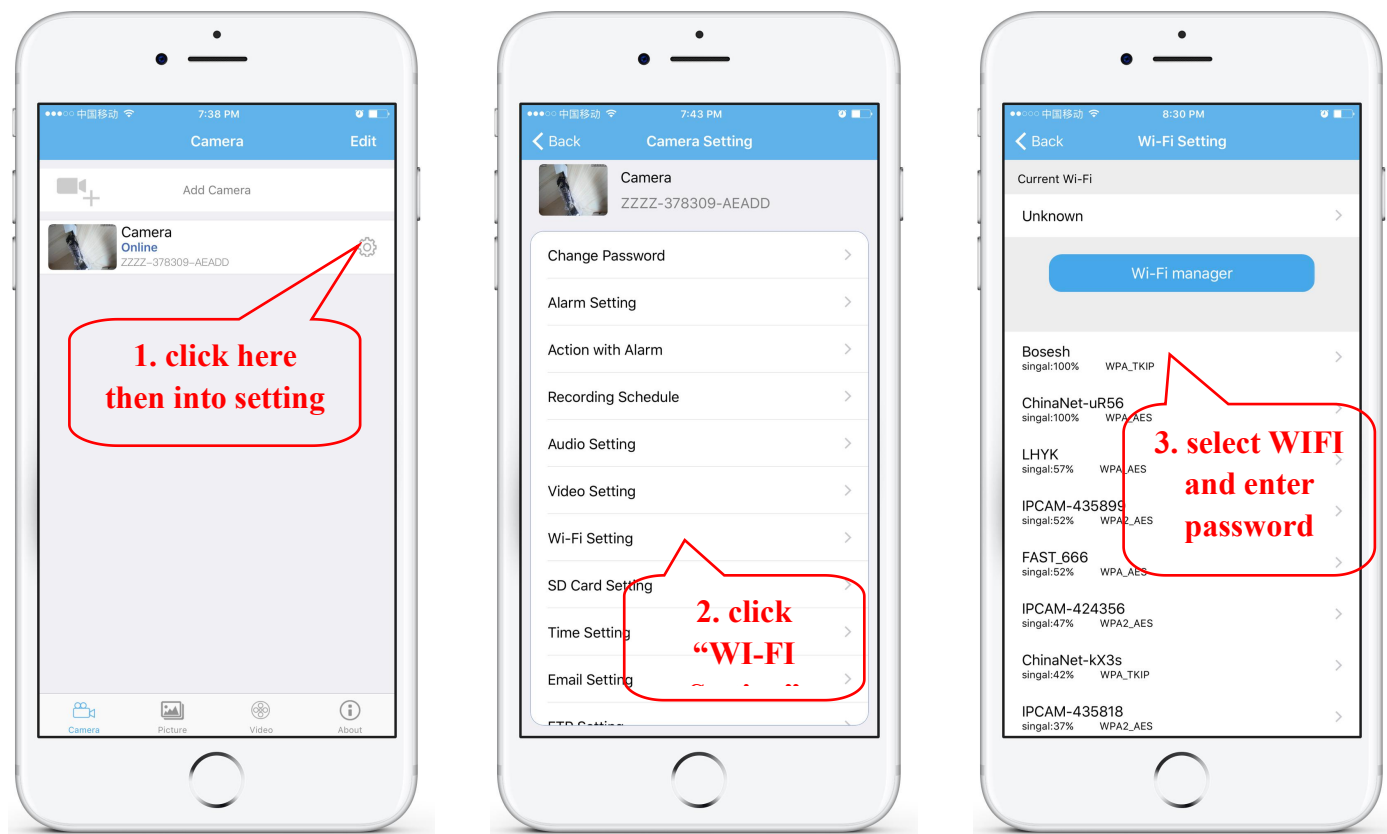

5.2 Set WIFI via browser on PC.

Settings

Media

Network

Network

Wireless

Ddns

Platform

ONVIF

P2P

Alarm

Advanced

System

Wireless

Enable Wireless: ☒ On ☐ Off

SSID: Bosesh **search**

Security mode: WPA-PSK ▼

WPA Algorithm: TKIP ▼

Key:

Re-type key:

Check Wireless Setup: **check**

Apply **Cancel**


5. Save settings

The WIFI connected to the camera must have a signal value greater than 50% and WIFI name must be english and can not contain special characters.



After the WIFI setting is completed, the camera will automatically switch to the WIFI connection when the network cable is unplugged.

6. Set Micro SD card record

6.1 Find the camera Micro SD card installation tutorials in the CD information, install the Micro SD card to the camera.

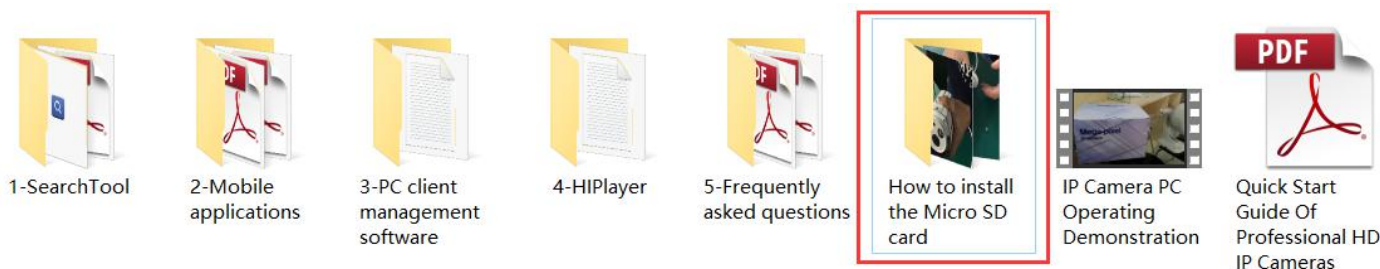


6.2 Set motion detection alarm recording on the phone.

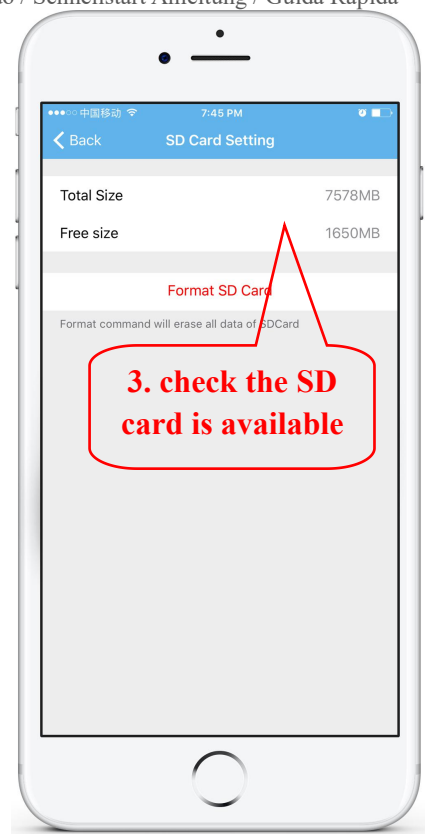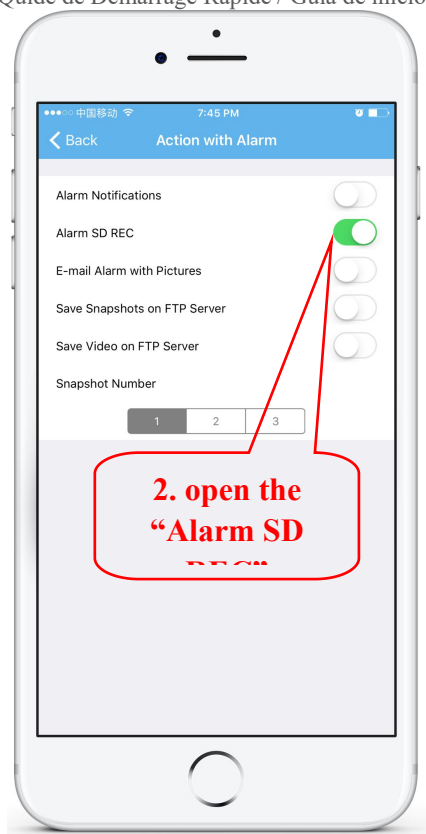

Motion detection alarm recording is recommended when the Micro SD card is small.

6.3 Set schedule recording on phone.

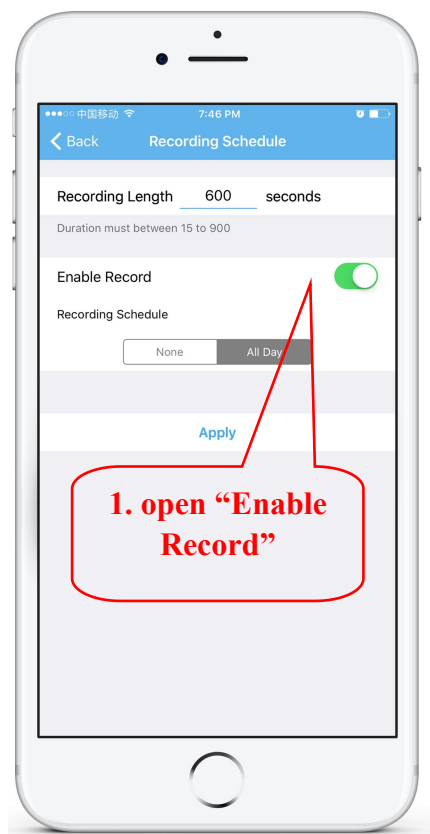

6.4 Playback record on phone.



These parameters can be set in more detail via IE browser on the PC!

7. Reboot and restore factory settings

7.1 Reconnect the power to restart the camera.



7.2 Press and hold the reset button for 15 seconds and the camera will

restore to factory settings.



Also you can restart or reset the camera via mobile phone or PC.

8. More info

This manual is to help customers to know and use the camera quickly, For detailed instructions and video tutorials please refer to the content of CD information at www.ipcam.xin.

This manual may have descriptions and operations that do not match the product, If you have any questions or need technical support Please feel free to contact us or our dealers.

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co - located for operating in conjunction with any other antenna or transmitter.