



1 Cover Page

RF Exposure REPORT

Application No.: SHEM2003001531CR
FCC ID: 2ATA8-MWCC-01A
Applicant: Ningbo Medkinetic Medical Device Co., Ltd.
Address of Applicant: Lushan West Road 167-8, Ningbo Free Trade Zone(South), 315806 Ningbo
Manufacturer: Ningbo Medkinetic Medical Device Co., Ltd.
Address of Manufacturer: Lushan West Road 167-8, Ningbo Free Trade Zone(South), 315806 Ningbo
Factory: Ningbo Medkinetic Medical Device Co., Ltd.
Address of Factory: Lushan West Road 167-8, Ningbo Free Trade Zone(South), 315806 Ningbo
Equipment Under Test (EUT):
EUT Name: Wireless Charging Cradle
Model No.: MWCC-01A
Standard(s) : 47 CFR PART 1, Subpart I, Section 1.1310
KDB 680106
Date of Receipt: 2020-03-10
Date of Test: 2020-04-18 to 2020-04-23
Date of Issue: 2020-04-26

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Parlam Zhan

Parlam Zhan
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
Testing Center EMC Laboratory


NO. 588 West Jindu Road, Songjiang District, Shanghai, China 201612
中国·上海·松江区金都西路588号 邮编: 201612

t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn
t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Revision Record			
Version	Description	Date	Remark
00	Original	2020-04-26	/

Authorized for issue by:				
				
		Micheal Niu / Project Engineer		
				
		Parlam Zhan /Reviewer		



2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS.....	3
3 GENERAL INFORMATION	4
3.1 GENERAL DESCRIPTION OF E.U.T.....	4
3.2 TEST LOCATION.....	5
3.3 TEST FACILITY.....	5
4 EQUIPMENTS USED DURING TEST	6
5 TEST RESULT.....	7
5.1 RF EXPOSURE TEST	7
5.1.1 E.U.T. Operation.....	7
5.1.2 Operating Environment:.....	7
5.1.3 EUT Operation:.....	7
5.2 RF EXPOSURE MEASUREMENT DATA	8
6 PHOTOGRAPHS.....	9
6.1 TEST PHOTOS.....	9



3 General Information

3.1 General Description of E.U.T.

Power supply:	DC 5V/500mA by adapter
Test voltage:	AC 120V/60Hz
Output power	DC 5V/200mA
Operation frequency:	170 kHz
Antenna type:	Inductive Loop Coil Antenna
Modulation type:	Load modulation
Cable:	USB Cable 50cm



3.2 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China.

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (LAB CODE: 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

- **FCC (Designation Number: CN5033)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.



4 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ST	N/A	SHEM078-2	2017-07-20	2020-07-21
2	Electromagnetic Field Probe	WANDEL & GOLTERMANN	EMR-20	SHEM0907	2020-04-09	2021-04-10



5 Test Result

5.1 RF Exposure Test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 15 cm for surrounding the device and 20 cm for above the top surface.

Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				

5.1.1 E.U.T. Operation

5.1.2 Operating Environment:

Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1015 mbar

5.1.3 EUT Operation:

This device has been tested the worst status(AC input) of full load



5.2 RF Exposure Measurement Data

Electric Field Emissions					
Test Position	Operating Frequency	Test Distance (cm)	Probe Measure Result (V/m)	Limit (V/m)	50% Limit (V/m)
Side 1	170KHz	15	9.26	614	307
Side 2	170KHz	15	9.11	614	307
Side 3	170KHz	15	9.83	614	307
Side 4	170KHz	15	9.39	614	307
Top	170KHz	20	8.55	614	307
Bottom	170KHz	15	9.34	614	307

Magnetic Field Emissions					
Test Position	Operating Frequency	Test Distance (cm)	Probe Measure Result (A/m)	Limit (A/m)	50% Limit (A/m)
Side 1	170KHz	15	0.1256	1.63	0.815
Side 2	170KHz	15	0.1124	1.63	0.815
Side 3	170KHz	15	0.1035	1.63	0.815
Side 4	170KHz	15	0.1022	1.63	0.815
Top	170KHz	20	0.2356	1.63	0.815
Bottom	170KHz	15	0.1258	1.63	0.815

6 Photographs

6.1 Test photos


Side 1



Side 2




Side 3

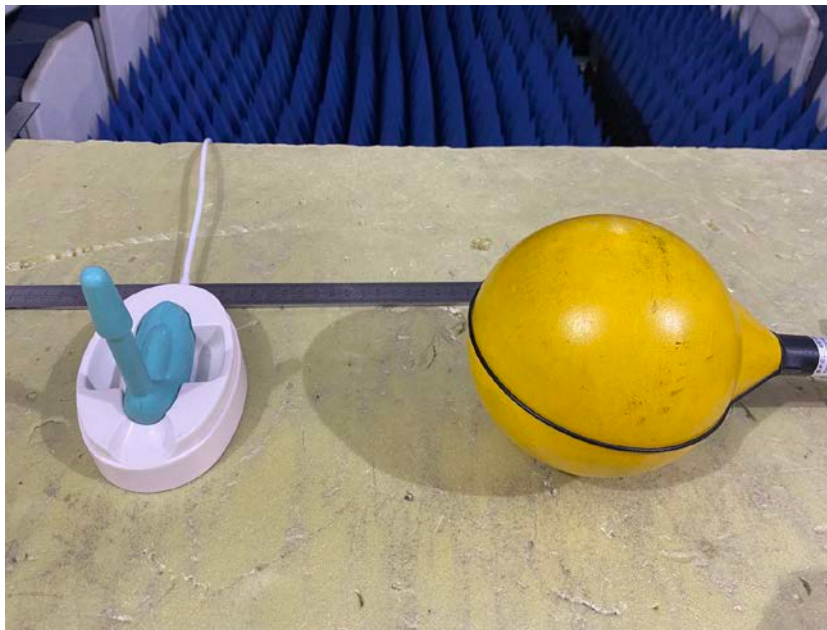

Side 4



Top

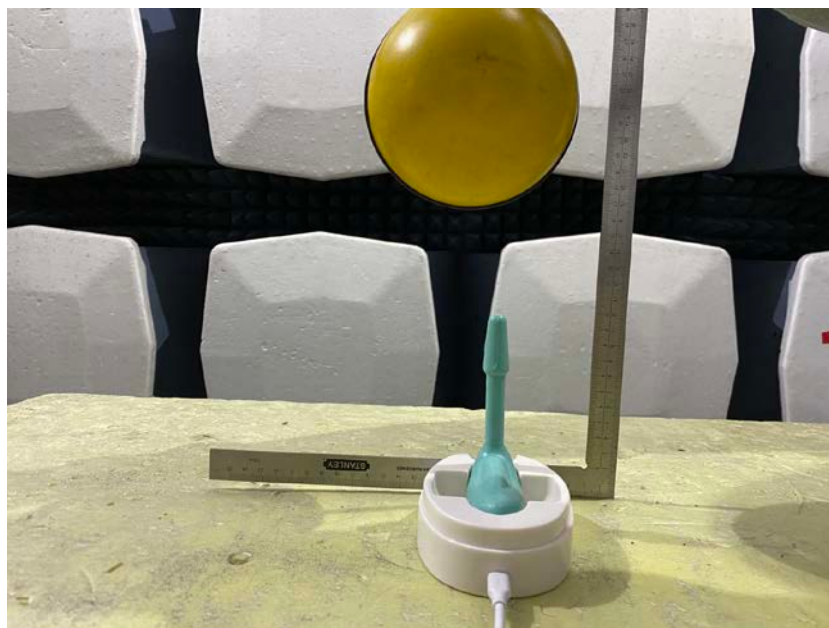

Bottom



--End of the Report--