


DESCRIPTION	LABEL, UL CERTIFICATION	PAGE 1 OF 2	 <i>mPower</i>
PART NO.	CER90095	REV	1
DRAWN BY	HU JUN	DATE	2019/6/14
CHECKED BY	HANG YIQING	DATE	2019/6/14

UPPER LABEL

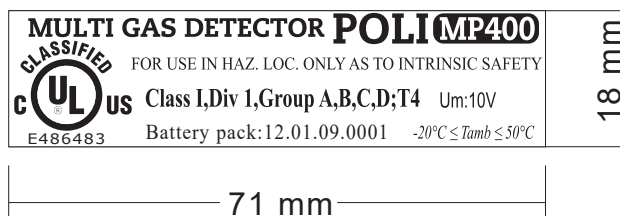

2:1

NOTE:

- Material: 0.2mm thickness white mylar with Lamination matte mylar.
- Tolerance: +/-0.1mm.

DESCRIPTION	LABEL, UL CERTIFICATION	PAGE 2 OF 2	 <i>mPower</i>
PART NO.	CER90095	REV	1
DRAWN BY	HU JUN	DATE	2019/6/14
CHECKED BY	HANG YIQING	DATE	2019/6/14

LOWER LABEL




2:1

NOTE:

- Material: 0.2mm thickness white mylar with Lamination matte mylar.
- Tolerance: +/-0.1mm.

MULTI GAS DETECTOR POLIMP400
CLASSIFIED
FOR USE IN HAZ. LOC. ONLY AS TO INTRINSIC SAFETY
UL c us Class I, Div 1, Group A, B, C, D; T4 Um: 10V
E486483 Battery pack: 12.01.09.0001 -20°C ≤ Tamb ≤ 50°C

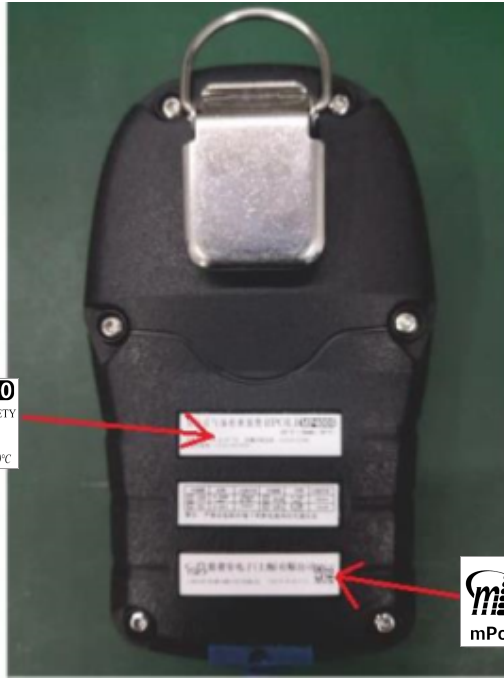

WARNING: UNDERSTAND MANUAL BEFORE
OPERATING
AVERTISSEMENT: LIRE ATTENTIVEMENT LES
INSTRUCTIONS AVANT DE METTRE EN
MARCHÉ
FCC ID: 2ATGPPM400 101010101010
mPower Electronics(Shanghai)Co., Ltd.