



TEST REPORT

ISSUED FOR

DONGGUAN HOGNYUANWEI Technology Co.,LTD

**155 East Central Road, Xiansha Second Industrial Zone,
GaoBu Town, Dongguan City, Guangdong Province**

MANUFACTURER	:	DONGGUAN HOGNYUANWEI Technology Co.,LTD
PRODUCT NAME	:	PCB Antenna
MODEL NAME	:	2.4G ANT
TRADE NAME	:	N/A
Test Standard	:	IEEE149-1979
TEST DATE	:	2022-09-25
ISSUE DATE	:	2022-10-10

Testing Engineer :



Authorized Signatory :

Jim he





DIRECTORY

1. Technical Information	3
1.1. Manufacturer and Factory Information	3
1.2. Equipment Under Test (EUT) Description	3
2. Test Results	4
2.1. Applied Reference Documents	4
2.2. Test Conditions	4
2.3. Test Results lists	4
Annex A Photographs	5
Annex B Figures	6
1. 2D Radiation Pattern	6
2. 3D Radiation Pattern	8
Annex C Photographs	10
Annex D General Information	13
1.1 Identification of the Responsible Testing Laboratory	13
1.2 Identification of the Responsible Testing Location	13
1.3 Test Equipments Utilized	13

Change History		
Issue	Date	Reason
1.0	2022-10-10	First edition




1. Technical Information

Note: Provide by manufacturer.

1.1. Equipment Under Test (EUT) Description

Frequency Range(MHZ)	2400-2500
Impedance(Ω)	50 $\pm$ 10
Gain(dBi)	0
ReTurnLoss(dB)	$\leq$ -10
VSWR	$\leq$ 1.92
Polarization	omni
Manufacture	DONGGUAN HOGNYUANWEI Technology Co.,LTD

1.2. Equipment Under Test (EUT) Specification

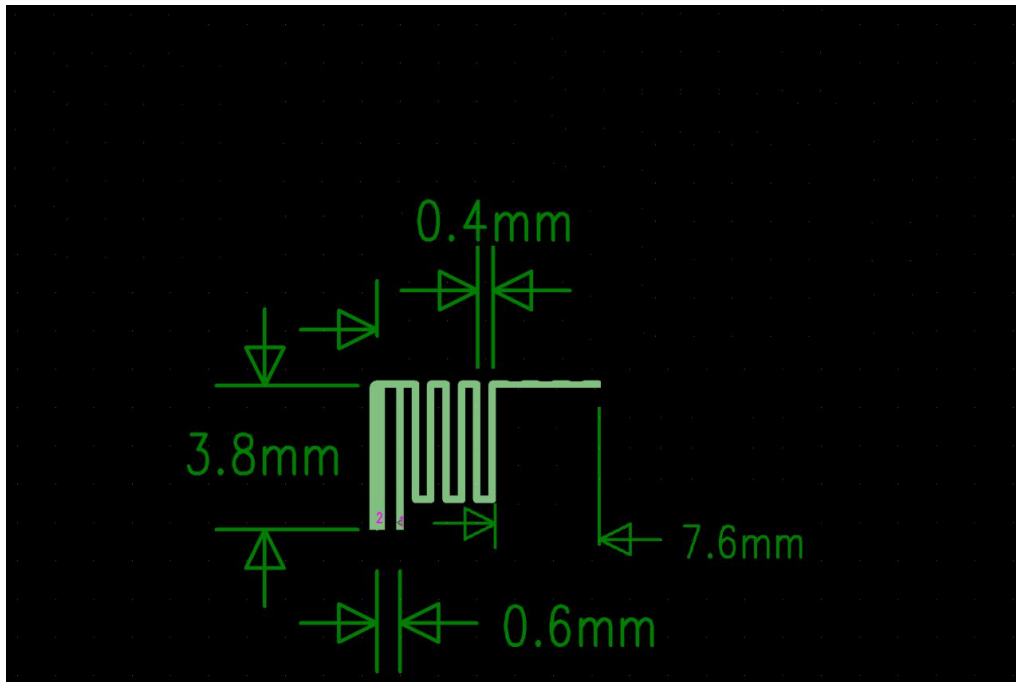



2. Test Results

2.1. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	IEEE149-1979	IEEE Standard Test Procedures for Antennas

2.2. Test Conditions

Test Environment Conditions:

Relative Humidity:	15 ... 75 %
Temperature:	+10 °C to +30 °C

2.3. Test Results lists


2.3.1. Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
频率	效率	增益
2400	9.4125	-3.585
2410	10.3365	-3.511
2420	11.2108	-3.425
2430	11.9845	-3.425
2440	13.5167	-3.311
2450	15.3369	-2.541
2460	16.0597	-2.245
2470	17.1025	-2.181
2480	17.3316	-1.154
2490	18.2557	-1.002
2500	19.1582	-0.001



Annex A Photographs

1. Test Setup

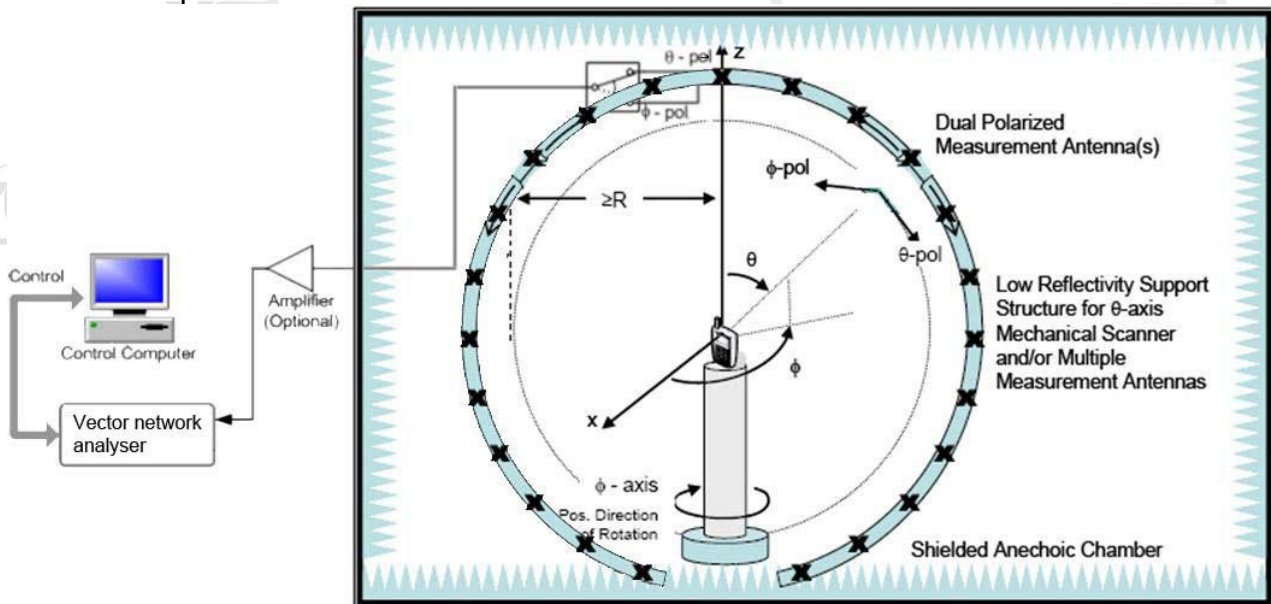




Annex B Figures

1. 2D Radiation Pattern


Phi=0°

Max: -5
Min: -40
Scale: 5/div

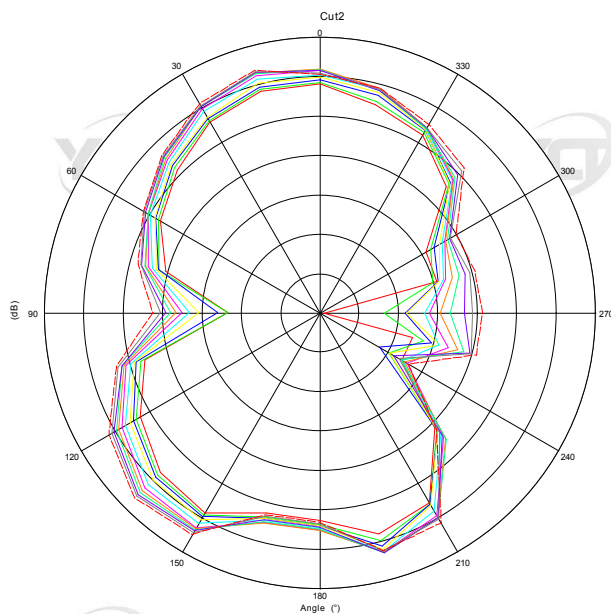


Phi=90°

Max: -5
Min: -30
Scale: 5/div

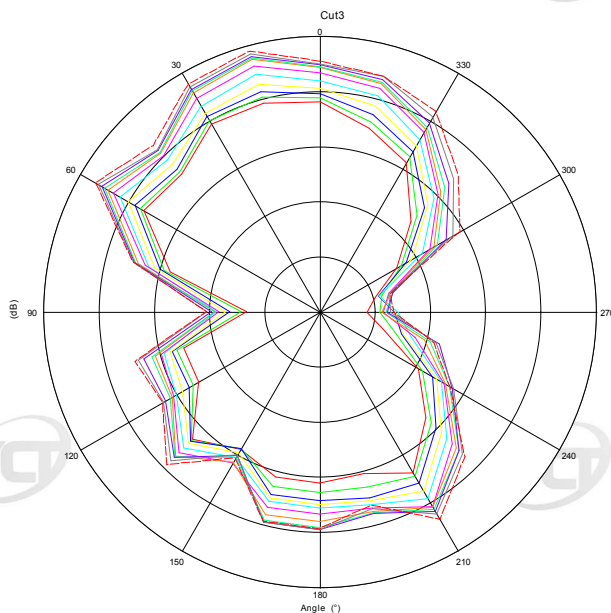





Theta=90°

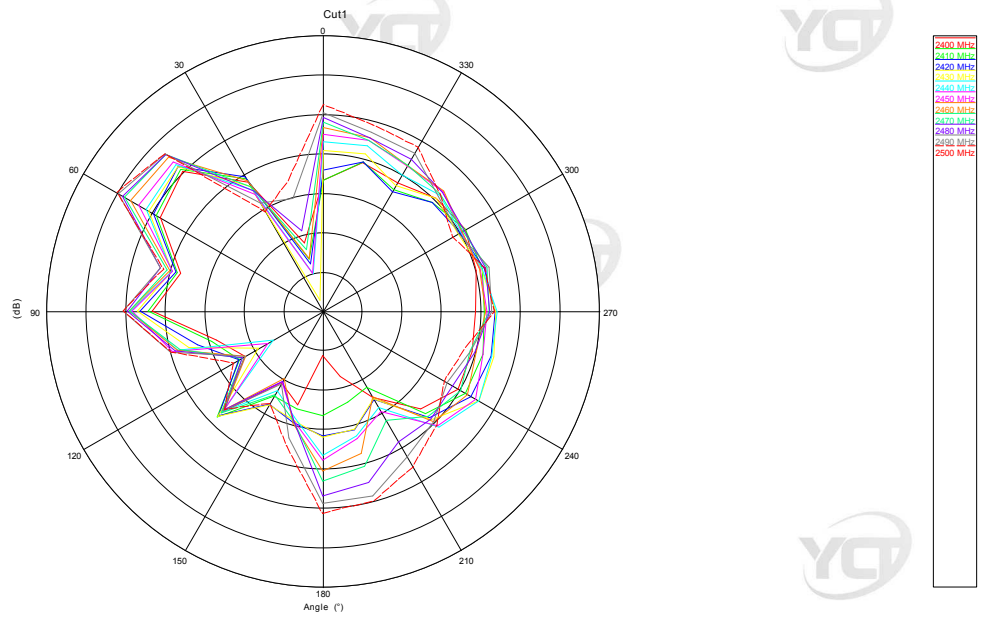


2. 3D Radiation Pattern




2400.000MHz




2400.000MHz H



2400.000MHz E1





2400.000MHz E2




2400MHz




2440.000MHz




2440.000MHz H




2440.000MHz E1



2440.000MHz E2



2440MHz

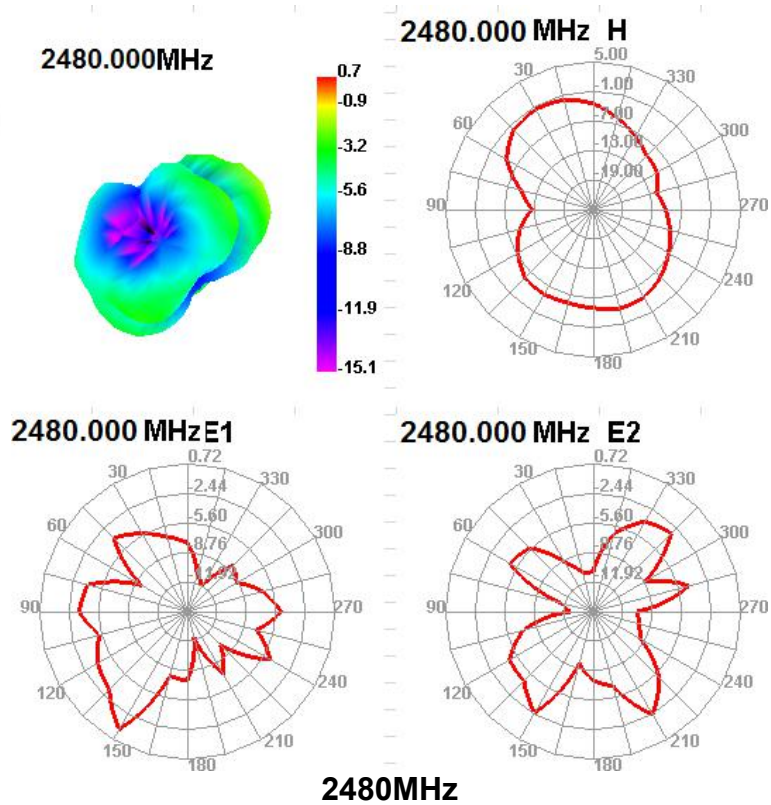

--The end of report--