



SAR TEST REPORT

For

Siragon Corporate

SMARTPHONE

Test Model: SP-7300

Prepared for : Siragon Corporate
Address : CR MANZANA A LOCAL SHED NRO 1-4 VALLE ALTO
GUAYABAL NAGUANAGUA CARABOBO ZIP 2005.
IVORY STORE; Venezuela

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel : (86)755-82591330
Fax : (86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : July 26, 2023
Number of tested samples : 1
Sample No. : A072123080-1
Serial number : Prototype
Date of Test : July 26, 2023~ August 01, 2023
Date of Report : August 01, 2023



**SAR TEST REPORT****Report Reference No. : LCSA072123080E****Date Of Issue : August 01, 2023****Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China****Applicant's Name..... : Siragon Corporate****Address : CR MANZANA A LOCAL SHED NRO 1-4 VALLE ALTO
GUAYABAL NAGUANAGUA CARABOBO ZIP 2005. IVORY
STORE; Venezuela****Test Specification:****Standard : IEEE Std C95.1, 2019/IEC-IEEE 62209-1528-2020/FCC Part 2.1093****Test Report Form No. : LCSEMC-1.0****TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF : Dated 2011-03****Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : SMARTPHONE**Trade Mark : SIRAGON****Model/Type Reference : SP-7300****Operation Frequency : GSM 850/PCS1900,WCDMA Band II/V;****Operation Frequency : LTE Band 2/4/5/12/41;
WLAN2.4G,WLAN5.2G,WLAN5.3G and Bluetooth5.0.****Ratings : DC 3.87V 4850mAh for Battery****Result : Positive****Compiled by:**

Jay Zhan / File administrators

Supervised by:

Cary Luo / Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



SAR -- TEST REPORT

Test Report No. :	LCSA072123080E	<u>August 01, 2023</u> Date of issue
Type / Model.....	: SP-7300	
EUT.....	: SMARTPHONE	
Applicant.....	: Siragon Corporate	
Address.....	: CR MANZANA A LOCAL SHED NRO 1-4 VALLE ALTO GUAYABAL NAGUANAGUA CARABOBO ZIP 2005. IVORY STORE; Venezuela	
Telephone.....	: /	
Fax.....	: /	
Manufacturer.....	: Shenzhen KEP Technology CO., LTD	
Address.....	: #101, #201 and #301, building B, 1st/ 2nd/3rd floor, Building A, FenghuangGang First Industrial Area, FenghuangGang Community, Xixiang Street, Bao an District, Shenzhen	
Telephone.....	: /	
Fax.....	: /	
Factory.....	: Shenzhen KEP Technology CO., LTD	
Address.....	: #101, #201 and #301, building B, 1st/ 2nd/3rd floor, Building A, FenghuangGang First Industrial Area, FenghuangGang Community, Xixiang Street, Bao an District, Shenzhen	
Telephone.....	: /	
Fax.....	: /	

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revision Content	Revised By
000	August 01, 2023	Initial Issue	---





TABLE OF CONTENTS

1. TEST STANDARDS AND TEST DESCRIPTION.....	6
1.1. TEST STANDARDS	6
1.2. TEST DESCRIPTION.....	6
1.3. GENERAL REMARKS	6
1.4. PRODUCT DESCRIPTION	6
1.5. STATEMENT OF COMPLIANCE	9
2. TEST ENVIRONMENT	10
2.1. TEST FACILITY	10
2.2. ENVIRONMENTAL CONDITIONS	10
2.3. SAR LIMITS	10
2.4. EQUIPMENTS USED DURING THE TEST	11
3. SAR MEASUREMENTS SYSTEM CONFIGURATION	12
3.1. SAR MEASUREMENT SET-UP	12
3.2. OPENSAR E-FIELD PROBE SYSTEM.....	13
3.3. PHANTOMS.....	14
3.4. DEVICE HOLDER	14
3.5. SCANNING PROCEDURE	15
3.6. DATA STORAGE AND EVALUATION.....	17
3.7. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....	18
3.8. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	20
3.9. TISSUE EQUIVALENT LIQUID PROPERTIES	20
3.10. SYSTEM CHECK	21
3.11. SAR MEASUREMENT PROCEDURE	24
3.12. POWER REDUCTION	29
3.13. POWER DRIFT	29
4. TEST CONDITIONS AND RESULTS.....	30
4.1. CONDUCTED POWER RESULTS	30
4.2. TRANSMIT ANTENNAS AND SAR MEASUREMENT POSITION	58
4.3. SAR MEASUREMENT RESULTS	59
4.4. SIMULTANEOUS TX SAR CONSIDERATIONS	66
4.5. SAR MEASUREMENT VARIABILITY	69
4.6. GENERAL DESCRIPTION OF TEST PROCEDURES	70
4.7. MEASUREMENT UNCERTAINTY (450MHz-6GHz)	70
4.8. SYSTEM CHECK RESULTS	71
4.9. SAR TEST GRAPH RESULTS	79
5. CALIBRATION CERTIFICATES	103
5.1. PROBE-EPGO376 CALIBRATION CERTIFICATE.....	103
5.1. SID750DIPOLE CALIBRATION CERITICATE.....	114
5.2. SID835DIPOLE CALIBRATION CERITICATE.....	125
5.3. SID1800 DIPOLE CALIBRATION CERTIFICATE	136
5.4. SID1900 DIPOLE CALIBRATION CERTIFICATE	147
5.5. SID2450 DIPOLE CALIBRATION CERITICATE.....	158
5.6. SID2600 DIPOLE CALIBRATION CERITICATE.....	169
5.7. SID5G-6G DIPOLE CALIBRATION CERITICATE.....	180
6. SAR SYSTEM PHOTOGRAPHS	193
7. SETUP PHOTOGRAPHS.....	194
8. EUT PHOTOGRAPHS	195





1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

[IEEE Std C95.1, 2019](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEC-IEEE 62209-1528-2020](#): Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

[KDB447498 D01 General RF Exposure Guidance](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB648474 D04](#): Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets

[KDB865664 D01 SAR Measurement 100 MHz to 6 GHz](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 RF Exposure Reporting](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB248227 D01 802.11 Wi-Fi SAR](#): SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters

[KDB941225 D01 3G SAR Procedures](#): 3G SAR Measurement Procedures

[KDB 941225 D06 Hotspot Mode](#): SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities

[KDB 941225 D05 SAR for LTE Devices](#): SAR Evaluation Considerations For LTE Devices

1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power. And Test device is identical prototype.

1.3. General Remarks

Date of receipt of test sample	:	July 26, 2023
Testing commenced on	:	July 26, 2023
Testing concluded on	:	August 01, 2023

1.4. Product Description

The Siragon Corporate. Model: SP-7300 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.


General Description	
Product Name:	SMARTPHONE
Test Model:	SP-7300
List Model No.:	/
Modulation Type:	/
Hardware Version:	/
Software Version:	/
Power supply:	DC 3.87V 4850mAh for Battery
<i>The EUT is SMARTPHONE. the SMARTPHONE is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850, PCS1900, WCDMA Band II, Band V, LTE Band2, Band4, Band5, Band12 and Band41, Bluetooth, Wi-Fi 2.4G, Wi-Fi 5.2G, Wi-Fi 5.3G functions. For more information see the following datasheet</i>	

Technical Characteristics	
GSM	
Support Band:	☐ GSM 900 (EU-Band) ☐ DCS 1800 (EU-Band) ☒ GSM 850 (U.S.-Band) ☒ PCS 1900 (U.S.-Band)
Release Version:	R99
GPRS Class	Class 12





EGPRS Class	Class 12
Modulation Type:	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description:	FPC Antenna -5.0dBi (max.) For GSM 850 -0.8dBi (max.) For PCS 1900
UMTS	
Support Band:	☒ WCDMA Band II (U.S.-Band) ☒ WCDMA Band V (U.S.-Band) ☐ WCDMA Band IV (U.S.-Band) ☐ WCDMA Band I (EU-Band) ☐ WCDMA Band VIII (EU-Band)
Release Version:	R8
Modulation Type:	QPSK,16QAM
Antenna Description:	FPC Antenna -1.0dBi (max.) For WCDMA Band II -5.0dBi (max.) For WCDMA Band V
LTE	
Support Band:	☒ E-UTRA Band 2(U.S.-Band) ☒ E-UTRA Band 4(U.S.-Band) ☒ E-UTRA Band 5(U.S.-Band) ☒ E-UTRA Band 12(U.S.-Band) ☒ E-UTRA Band 41(U.S.-Band)
Power Class:	Class 3
LTE Release Version:	R9
Modulation Type:	QPSK/16QAM
Antenna Description:	FPC Antenna -0.80dBi (max.) For E-UTRA Band 2 -0.80dBi (max.) For E-UTRA Band 4 -5.0dBi (max.) For E-UTRA Band 5 -4.80dBi (max.) For E-UTRA Band 12 -0.70dBi (max.) For E-UTRA Band 41
Bluetooth	
Frequency Range:	2402MHz-2480MHz
Bluetooth Version:	V4.2
Bluetooth Channel Number:	79 channels for Bluetooth V4.2 (DSS) 40 channels for Bluetooth V4.2 (DTS)
Bluetooth Channel Spacing:	1MHz for Bluetooth V4.2 (DSS) 2MHz for Bluetooth V4.2 (DTS)
Bluetooth Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.2(DSS) GFSK for Bluetooth V4.2 (DTS)
Antenna Description:	FPC Antenna, -0.70dBi(Max.)
2.4G WLAN	
Frequency Range:	2412 – 2462 MHz
Channel Number:	11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz)
Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Antenna Description:	FPC Antenna, -0.70dBi(Max.)
5.2G WLAN	
Frequency Range	5180-5240MHz
Channel Number	4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description:	FCB Antenna, -2.80dBi(Max.)
5.3G WLAN	
Frequency Range	5260MHz~5320MHz





Channel Number	4 Channels for 20MHz bandwidth(5260MHz-5320MHz) 2 channels for 40MHz bandwidth(5270MHz~5310MHz) 1 channels for 80MHz bandwidth(5290MHz)
Modulation Type	IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	FCB Antenna, -2.80dBi(Max.)





1.5. Statement of Compliance

The maximum of results of SAR found during testing for SP-7300 are follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Head (Report SAR _{1-g} (W/kg))	Hotspot (Report SAR _{1-g} (W/kg))	Body-worn (Report SAR _{1-g} (W/kg))
			(Separation Distance 10mm)	
PCE	GSM 850	0.146	0.238	0.238
	GSM1900	0.116	0.260	0.260
	WCDMA Band V	0.092	0.129	0.129
	WCDMA Band II	0.231	0.547	0.547
	LTE Band 2	0.220	0.551	0.551
	LTE Band 4	0.340	1.199	1.199
	LTE Band 5	0.101	0.129	0.129
	LTE Band 12	0.090	0.296	0.296
	LTE Band 41	0.127	0.154	0.154
DTS	WIFI2.4G	0.270	0.095	0.095
NII	WIFI5.2G	0.191	0.132	0.132
	WIFI5.3G	0.161	0.127	0.127

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported simultaneous SAR Summary>

Exposure Position	Classment Class	Head (Report SAR _{1-g} (W/kg))	Highest Reported Simultaneous Transmission SAR _{1-g} (W/kg)
Body-worn (hotspot open)	PCE	1.199	1.331
	NII	0.132	





2. TEST ENVIRONMENT

2.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description

Sar Lab.

: NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

2.3. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2.4. Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	PC	Lenovo	G5005	MY42081102	N/A	N/A
2	SAR Measurement system	SATIMO	4014_01	SAR_4014_01	N/A	N/A
3	Signal Generator	Agilent	E4438C	MY49072627	2023-06-09	2024-06-08
4	S-parameter Network Analyzer	Agilent	8753ES	US38432944	2023-06-09	2024-06-08
5	Wideband Radio Communication Tester	R&S	CMW500	103818-1	2022-10-29	2023-10-28
6	E-Field PROBE	MVG	SSE2	SN 25/22 EPGO376	2023-06-22	2024-06-21
7	DIPOLE 750	SATIMO	SID 750	SN 30/14 DIP 0G750-302	2021-09-29	2024-09-28
8	DIPOLE 835	SATIMO	SID 835	SN 07/14 DIP 0G835-303	2021-09-29	2024-09-28
9	DIPOLE 1800	SATIMO	SID 1800	SN 07/14 DIP 1G800-301	2021-09-29	2024-09-28
10	DIPOLE 1900	SATIMO	SID 1900	SN 38/18 DIP 1G900-466	2021-09-22	2024-09-21
11	DIPOLE 2450	SATIMO	SID 2450	SN 07/14 DIP 2G450-306	2021-09-29	2024-09-28
12	DIPOLE 2600	SATIMO	SID 2600	SN 38/18 DIP 2G600-468	2021-09-22	2024-09-21
13	DIPOLE 5000-6000	SATIMO	SWG5500	SN 49/16 WGA 43	2021-09-22	2024-09-21
14	COMOSAR OPENCoaxial Probe	SATIMO	OCPG 68	SN 40/14 OCPG68	2022-10-29	2023-10-28
15	SAR Locator	SATIMO	VPS51	SN 40/14 VPS51	2022-10-29	2023-10-28
16	Communication Antenna	SATIMO	ANTA57	SN 39/14 ANTA57	2022-10-29	2023-10-28
17	FEATURE PHONEPOSITIONING DEVICE	SATIMO	MSH98	SN 40/14 MSH98	N/A	N/A
18	DUMMY PROBE	SATIMO	DP60	SN 03/14 DP60	N/A	N/A
19	SAM PHANTOM	SATIMO	SAM117	SN 40/14 SAM117	N/A	N/A
20	Liquid measurement Kit	HP	85033D	3423A03482	N/A	N/A
21	Power meter	Agilent	E4419B	MY45104493	2022-10-29	2023-10-28
22	Power meter	Agilent	E4419B	MY45100308	2022-10-29	2023-10-28
23	Power sensor	Agilent	E9301H	MY41495616	2022-10-29	2023-10-28
24	Power sensor	Agilent	E9301H	MY41495234	2022-10-29	2023-10-28
25	Directional Coupler	MCLI/USA	4426-20	03746	2023-06-09	2024-06-08

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated values;
 - c) The most recent return-loss results,measued at least annually,deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



3.SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch,It sends an “Emergency signal” to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

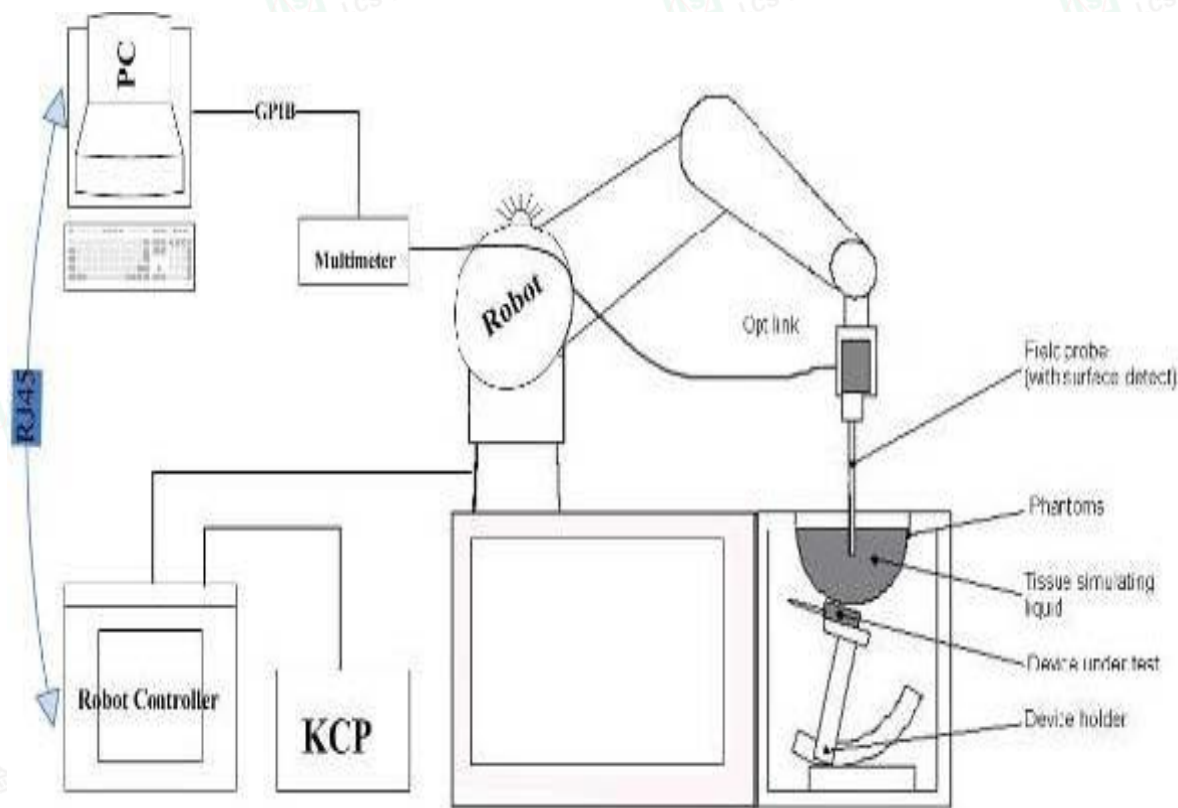

3.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EPG0376 (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)


Calibration ISO/IEC 17025 calibration service available.

Frequency	450 MHz to 6 GHz; Linearity: 0.25dB(450 MHz to 6 GHz)
Directivity	0.25 dB in HSL (rotation around probe axis) 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	0.01W/kg to > 100 W/kg; Linearity: 0.25 dB
Dimensions	Overall length: 330 mm (Tip: 16mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to sensor centers: 2.5 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of SMARTPHONES

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.


The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

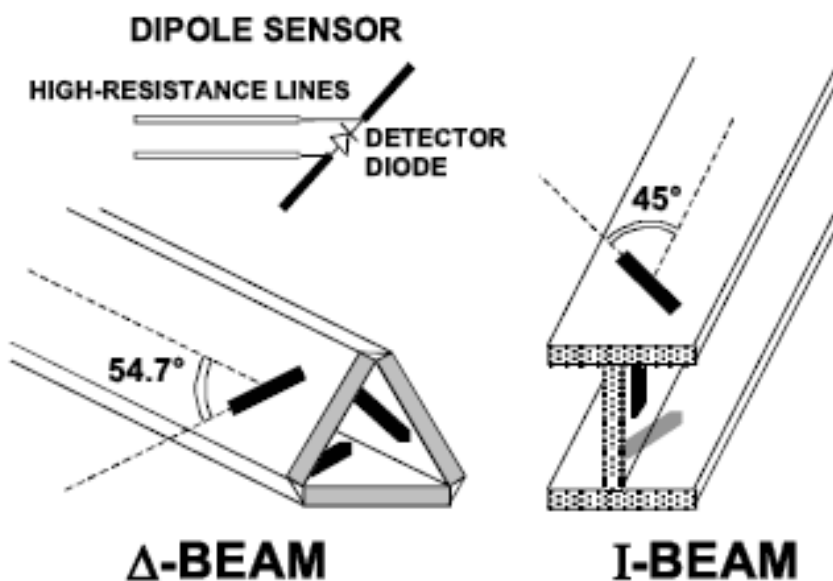

3.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1, EN62209-2:2010. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

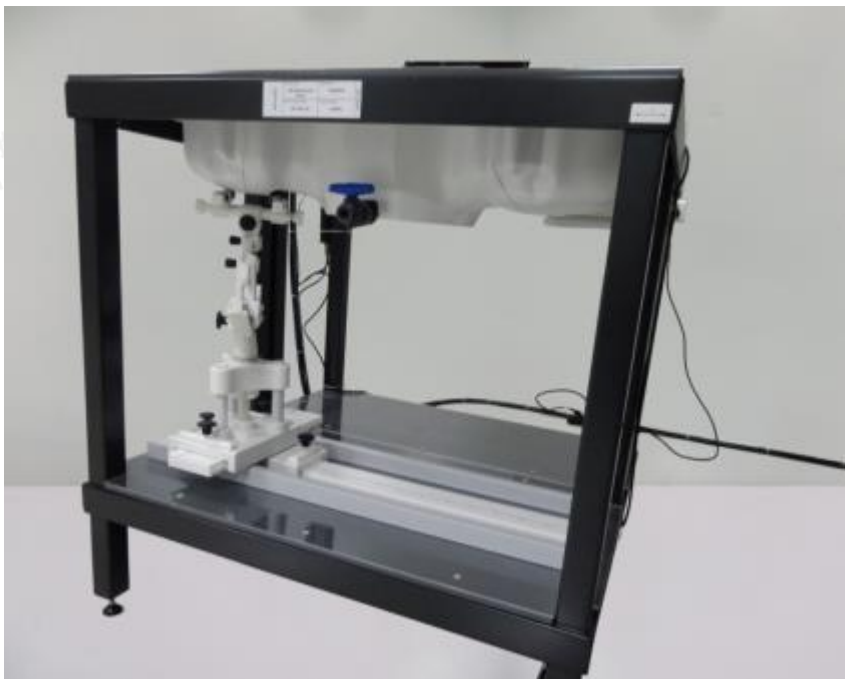

SAM Twin Phantom

3.4. Device Holder

In combination with the Generic Twin Phantom SAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).





Device holder supplied by SATIMO

3.5. Scanning Procedure

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.





Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				





Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

3.6. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field

dcp_i = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H - \text{fieldprobes} : H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

$[mV/(V/m)^2]$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

3.7. Position of the wireless device in relation to the phantom

General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.



The power flow density is calculated assuming the excitation field as a free space field

$$P_{(pwe)} = \frac{E_{tot}^2}{3770} \text{ or } P_{(pwe)} = H_{tot}^2 \cdot 37.7$$

Where P_{pwe} = Equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

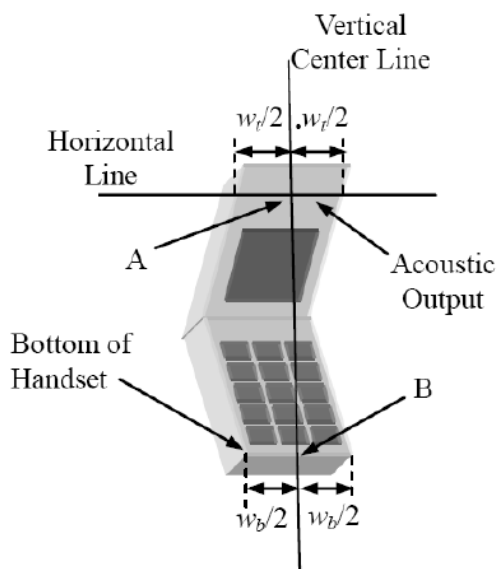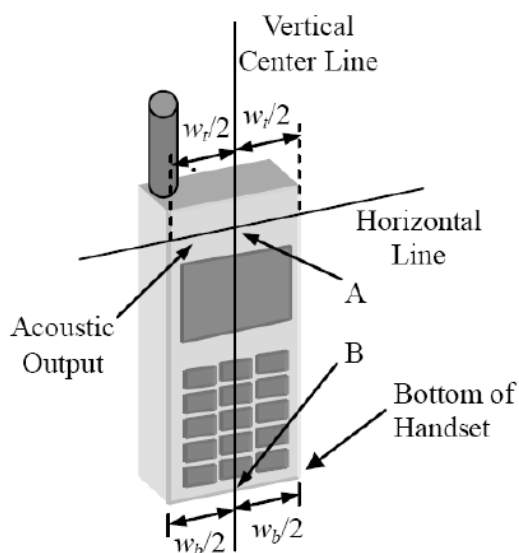

w_t Width of the handset at the level of the acoustic

w_b Width of the bottom of the handset

A Midpoint of the width w_t of the handset at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the handset

Picture 1-a Typical “fixed” case handset Picture 1-b Typical “clam-shell” case handset




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

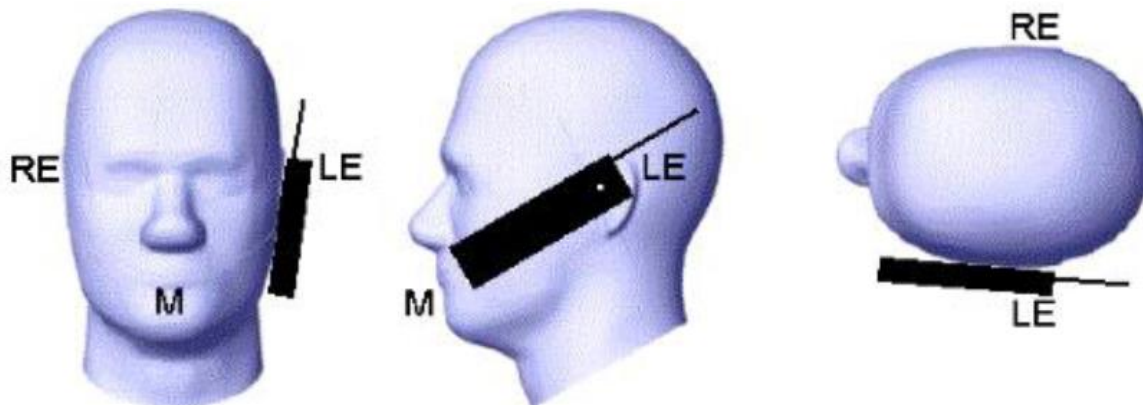

Picture 2 Cheek position of the wireless device on the left side of SAM

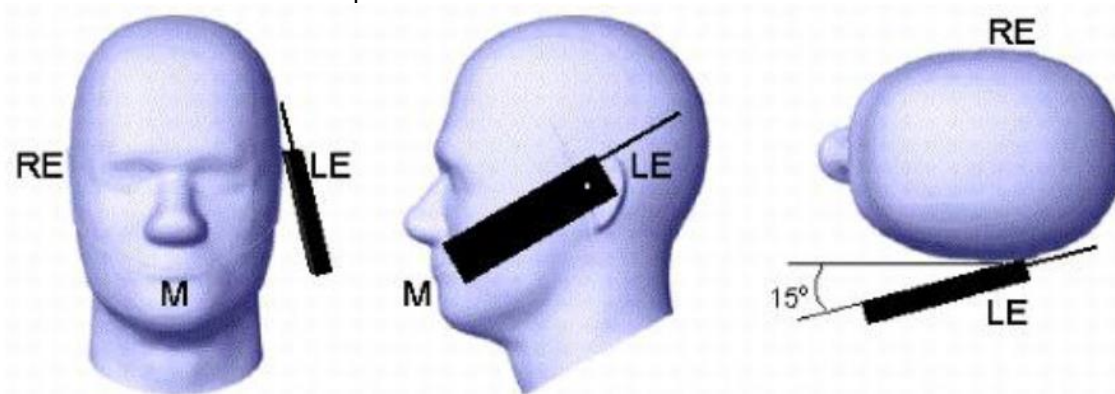

Picture 3 Tilt position of the wireless device on the left side of SAM

For body SAR test we applied to FCC KDB941225, KDB447498, KDB248227, KDB648654;





3.8. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

The composition of the tissue simulating liquid

Ingredient (% Weight)	750MHz		835MHz		1800 MHz		1900 MHz		2450MHz		2600MHz		5000MHz	
	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	39.28	51.3	41.45	52.5	54.5	40.2	54.9	40.4	62.7	73.2	60.3	71.4	65.5	78.6
Preventol	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HEC	1.00	1.00	1.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
DGBE	0.00	0.00	0.00	0.00	45.33	59.31	44.92	59.10	36.80	26.70	39.10	28.40	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.2	10.7

Target Frequency (MHz)	Head	
	ϵ_r	$\sigma(S/m)$
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1640	40.2	1.31
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27

3.9. Tissue equivalent liquid properties

Dielectric Performance of Head Tissue Simulating Liquid


Test Engineer: bob.yang									
Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
		σ	ϵ_r	σ	Dev.	ϵ_r	Dev.		
750H	750	0.89	41.90	0.86	-3.37%	43.62	4.11%	21.7	07/26/2023
835H	835	0.90	41.50	0.87	-3.33%	42.64	2.75%	21.4	07/27/2023
1800H	1800	1.40	40.00	1.37	-2.14%	41.33	3.33%	22.1	07/28/2023
1900H	1900	1.40	40.00	1.42	1.43%	38.62	-3.45%	22.2	07/28/2023
2450H	2450	1.80	39.20	1.78	-1.11%	39.48	0.71%	23.5	07/29/2023
2600H	2600	1.96	39.00	1.98	1.02%	38.66	-0.87%	21.5	07/31/2023
5200H	5200	4.66	36.00	4.64	-0.43%	36.24	0.67%	22.5	08/01/2023
5400H	5400	4.86	35.80	4.83	-0.62%	36.21	1.15%	22.6	08/01/2023



3.10. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

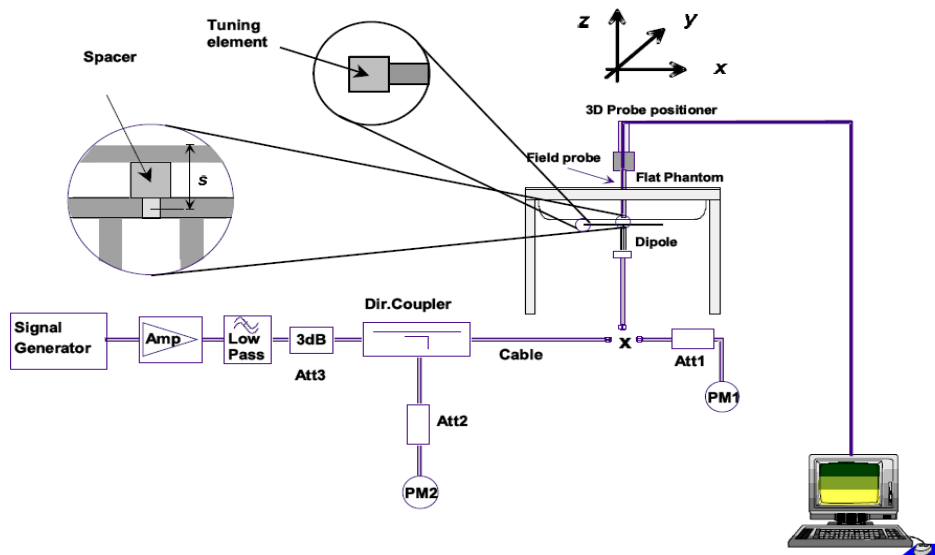

The output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.



Photo of Dipole Setup



**Justification for Extended SAR Dipole Calibrations**

Referring to KDB 865664D01V01r04, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended. While calibration intervals not exceed 3 years.

SID750 SN 07/14 DIP 0G750-302 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-29	-34.80		50.7		1.6	
2022-09-29	-34.35	-1.29	51.2	0.5	1.5	-0.1

SID835 SN 07/14 DIP 0G835-303 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-29	-24.49		54.9		2.8	
2022-09-29	-24.17	-1.31	54.5	-0.4	2.6	-0.2

SID1800 SN 30/14 DIP 1G800-301 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-29	-20.26		43.1		6.9	
2022-09-29	-20.13	-0.64	42.9	-0.2	6.7	-0.2

SID1900 SN 38/18 DIP 1G900-466 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-22	-26.43		50.5		4.7	
2022-09-22	-26.33	-0.38	50.2	-0.3	4.5	-0.2

SID2450 SN 07/14 DIP 2G450-306 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-29	-25.59		44.7		-1.1	
2022-09-29	-25.68	0.35	44.8	0.1	-1.0	0.1

SID2600 SN 38/18 DIP 2G600-468 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-22	-29.14		49.2		3.4	
2022-09-22	-29.12	-0.07	49.1	-0.1	3.2	-0.2

SID5200 SN 49/16 DIP WGA43 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-22	-8.59		19.38		13.50	
2022-09-22	-8.62	0.35	19.25	-0.13	13.47	-0.03

SID5400 SN 49/16 DIP WGA43 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2021-09-22	-10.58		77.13		1.81	
2022-09-22	-10.55	0.28	77.15	0.02	1.74	-0.07



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (%)	1W Target		Difference percentage		Liquid Temp	Date
						SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	1g	10g		
Head	750	100 mW	0.851	0.562	3.98	8.38	5.53	1.55%	1.63%	21.7	07/26/2023
		Normalize to 1 Watt	8.51	5.62							
Head	835	100 mW	0.947	0.641	-0.06	9.60	6.20	-	3.39%	21.4	07/27/2023
		Normalize to 1 Watt	9.47	6.41							
Head	1800	100 mW	3.833	2.038	-4.85	38.13	20.20	0.52%	0.89%	22.1	07/28/2023
		Normalize to 1 Watt	38.33	20.38							
Head	1900	100 mW	3.975	2.085	-2.30	40.03	20.55	-	1.46%	22.2	07/28/2023
		Normalize to 1 Watt	39.75	20.85							
Head	2450	100 mW	5.410	2.502	-3.96	53.89	24.15	0.39%	3.60%	23.5	07/29/2023
		Normalize to 1 Watt	54.10	25.02							
Head	2600	100 mW	5.721	2.362	0.01	56.91	24.69	0.53%	-	21.5	07/31/2023
		Normalize to 1 Watt	57.21	23.62							
Head	5200	100 mW	17.302	5.966	3.96	165.77	57.2	4.37%	4.30%	22.5	08/01/2023
		Normalize to 1 Watt	173.02	59.66							
Head	5400	100 mW	16.478	5.769	3.21	173.20	59.22	0.12%	0.51%	22.6	08/01/2023
		Normalize to 1 Watt	164.78	57.69							





3.11. SAR measurement procedure

The measurement procedures are as follows:

3.11.1 Conducted power measurement

- For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

3.11.2 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

3.11.3 UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

3.11.4 LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

3.11.5 WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.

a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



- c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions.
- a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
- b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures.
6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.²⁰ In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.





- a. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- b. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- c. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- d. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a. Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- b. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.
- c. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- a. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- c. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.





- 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
- 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
 - d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - 1) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - 2) replace “initial test configuration” with “all tested higher output power configurations.

3.12. Power Reduction

The product without any power reduction.

3.13. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within 5%.





4. TEST CONDITIONS AND RESULTS

4.1 Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. According to October 2013TCB Workshop, for GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest frame-average maximum output power configuration, considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slot) for GSM850/GSM1900 band due to their highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.

Conducted power measurement results for GSM850/PCS1900

GSM 850		Tune-up	Burst Conducted power (dBm)			Division Factors	Tune-up	Average power (dBm)		
			Channel/Frequency(MHz)					Channel/Frequency(MHz)		
		Max	128/824.2	190/836.6	251/848.8		Max	128/824.2	190/836.6	251/848.8
GSM		32.50	32.35	32.43	32.49	-9.03dB	23.47	23.32	23.40	23.46
GPRS (GMSK)	1TX slot	32.50	32.17	32.19	32.30	-9.03dB	23.47	23.14	23.16	23.27
	2TX slot	30.50	30.12	30.04	30.08	-6.02dB	24.48	24.10	24.02	24.06
	3TX slot	29.50	29.22	29.20	29.24	-4.26dB	25.24	24.96	24.94	24.98
	4TX slot	27.50	26.91	26.86	27.01	-3.01dB	24.49	23.90	23.85	24.00
EGPRS (8PSK)	1TX slot	27.00	26.26	26.40	26.53	-9.03dB	17.97	17.23	17.37	17.50
	2TX slot	23.50	23.22	23.43	23.45	-6.02dB	17.48	17.20	17.41	17.43
	3TX slot	22.00	21.42	21.58	21.62	-4.26dB	17.74	17.16	17.32	17.36
	4TX slot	22.00	20.98	21.13	21.62	-3.01dB	18.99	17.97	18.12	18.61
GSM 1900		Tune-up	Burst Conducted power (dBm)			Division Factors	Tune-up	Average power (dBm)		
			Channel/Frequency(MHz)					Channel/Frequency(MHz)		
		Max	512/1850.2	661/1880	810/1909.8		Max.	512/1850.2	661/1880	810/1909.8
GSM		31.50	31.20	31.17	30.94	-9.03dB	22.47	22.17	22.14	21.91
GPRS (GMSK)	1TX slot	31.50	31.23	31.21	30.93	-9.03dB	22.47	22.20	22.18	21.90
	2TX slot	30.50	30.07	30.13	30.08	-6.02dB	24.48	24.05	24.11	24.06
	3TX slot	27.50	26.90	26.92	27.09	-4.26dB	23.24	22.64	22.66	22.83
	4TX slot	26.00	25.58	25.62	25.84	-3.01dB	22.99	22.57	22.61	22.83
EGPRS (8PSK)	1TX slot	26.00	25.66	25.64	25.80	-9.03dB	16.97	16.63	16.61	16.77
	2TX slot	25.00	24.74	24.61	24.82	-6.02dB	18.98	18.72	18.59	18.80
	3TX slot	23.00	22.64	22.58	22.82	-4.26dB	18.74	18.38	18.32	18.56
	4TX slot	22.00	21.54	21.50	21.72	-3.01dB	18.99	18.53	18.49	18.71

Notes:

1. Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.00dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.00dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.00dB

2. According to the conducted power as above, the GPRS measurements are performed with 3Txslot for GPRS850 and 2Txslot GPRS1900.

<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- The EUT was connected to Base Station CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set Gain Factors (β_c and β_d) and parameters were set according to each
 - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -86 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - Select HSDPA Uplink Parameters
 - Set Delta ACK, Delta NACK and Delta CQI = 8
 - Set Ack-Nack Repetition Factor to 3
 - Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2
 - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.							
Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.							
Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.							
Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station R&S CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Conducted Power Measurement Results(WCDMA Band II/V)

Band	Channel	Power(dBm)	Limit(dBm)	Verdict
Band2	9262	24.03	33.01	PASS
Band2	9400	24.01	33.01	PASS
Band2	9538	24.04	33.01	PASS
Band5	4132	24.04	38.45	PASS
Band5	4182	23.85	38.45	PASS
Band5	4233	23.68	38.45	PASS



**LTE Band2**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	24.35	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	24.27	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	24.31	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	24.43	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	24.39	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	24.37	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	23.46	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	24.40	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	24.41	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	24.45	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	24.55	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	24.50	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	24.55	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	23.58	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	24.39	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	24.38	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	24.39	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	24.47	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	24.49	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	24.51	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	23.59	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	23.38	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	23.43	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	23.42	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	23.29	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	23.24	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	23.28	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	22.49	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	23.56	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	23.59	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	23.59	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	23.45	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	23.47	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	23.44	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	22.47	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	23.29	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	1.4MHz	16QAM	19193	1RB#2	23.34	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	23.29	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	23.31	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	23.30	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	23.28	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	22.60	PASS
Band2	3MHz	QPSK	18615	1RB#0	24.09	PASS
Band2	3MHz	QPSK	18615	1RB#8	24.23	PASS
Band2	3MHz	QPSK	18615	1RB#14	24.12	PASS
Band2	3MHz	QPSK	18615	8RB#0	23.32	PASS
Band2	3MHz	QPSK	18615	8RB#4	23.27	PASS
Band2	3MHz	QPSK	18615	8RB#7	23.45	PASS
Band2	3MHz	QPSK	18615	15RB#0	23.32	PASS
Band2	3MHz	QPSK	18900	1RB#0	24.30	PASS
Band2	3MHz	QPSK	18900	1RB#8	24.42	PASS
Band2	3MHz	QPSK	18900	1RB#14	24.37	PASS
Band2	3MHz	QPSK	18900	8RB#0	23.48	PASS
Band2	3MHz	QPSK	18900	8RB#4	23.50	PASS
Band2	3MHz	QPSK	18900	8RB#7	23.53	PASS
Band2	3MHz	QPSK	18900	15RB#0	23.57	PASS
Band2	3MHz	QPSK	19185	1RB#0	24.37	PASS
Band2	3MHz	QPSK	19185	1RB#8	24.38	PASS
Band2	3MHz	QPSK	19185	1RB#14	24.33	PASS
Band2	3MHz	QPSK	19185	8RB#0	23.57	PASS
Band2	3MHz	QPSK	19185	8RB#4	23.57	PASS
Band2	3MHz	QPSK	19185	8RB#7	23.56	PASS
Band2	3MHz	QPSK	19185	15RB#0	23.50	PASS
Band2	3MHz	16QAM	18615	1RB#0	23.24	PASS
Band2	3MHz	16QAM	18615	1RB#8	23.40	PASS
Band2	3MHz	16QAM	18615	1RB#14	23.27	PASS
Band2	3MHz	16QAM	18615	8RB#0	22.35	PASS
Band2	3MHz	16QAM	18615	8RB#4	22.37	PASS
Band2	3MHz	16QAM	18615	8RB#7	22.39	PASS
Band2	3MHz	16QAM	18615	15RB#0	22.38	PASS
Band2	3MHz	16QAM	18900	1RB#0	23.45	PASS
Band2	3MHz	16QAM	18900	1RB#8	23.55	PASS
Band2	3MHz	16QAM	18900	1RB#14	23.47	PASS
Band2	3MHz	16QAM	18900	8RB#0	22.49	PASS





Band2	3MHz	16QAM	18900	8RB#4	22.49	PASS
Band2	3MHz	16QAM	18900	8RB#7	22.52	PASS
Band2	3MHz	16QAM	18900	15RB#0	22.48	PASS
Band2	3MHz	16QAM	19185	1RB#0	23.20	PASS
Band2	3MHz	16QAM	19185	1RB#8	23.29	PASS
Band2	3MHz	16QAM	19185	1RB#14	23.17	PASS
Band2	3MHz	16QAM	19185	8RB#0	22.55	PASS
Band2	3MHz	16QAM	19185	8RB#4	22.57	PASS
Band2	3MHz	16QAM	19185	8RB#7	22.49	PASS
Band2	3MHz	16QAM	19185	15RB#0	22.38	PASS
Band2	5MHz	QPSK	18625	1RB#0	24.40	PASS
Band2	5MHz	QPSK	18625	1RB#12	24.57	PASS
Band2	5MHz	QPSK	18625	1RB#24	24.45	PASS
Band2	5MHz	QPSK	18625	12RB#0	23.38	PASS
Band2	5MHz	QPSK	18625	12RB#6	23.37	PASS
Band2	5MHz	QPSK	18625	12RB#13	23.48	PASS
Band2	5MHz	QPSK	18625	25RB#0	23.45	PASS
Band2	5MHz	QPSK	18900	1RB#0	24.57	PASS
Band2	5MHz	QPSK	18900	1RB#12	24.67	PASS
Band2	5MHz	QPSK	18900	1RB#24	24.52	PASS
Band2	5MHz	QPSK	18900	12RB#0	23.51	PASS
Band2	5MHz	QPSK	18900	12RB#6	23.56	PASS
Band2	5MHz	QPSK	18900	12RB#13	23.49	PASS
Band2	5MHz	QPSK	18900	25RB#0	23.58	PASS
Band2	5MHz	QPSK	19175	1RB#0	24.60	PASS
Band2	5MHz	QPSK	19175	1RB#12	24.72	PASS
Band2	5MHz	QPSK	19175	1RB#24	24.50	PASS
Band2	5MHz	QPSK	19175	12RB#0	23.64	PASS
Band2	5MHz	QPSK	19175	12RB#6	23.59	PASS
Band2	5MHz	QPSK	19175	12RB#13	23.50	PASS
Band2	5MHz	QPSK	19175	25RB#0	23.57	PASS
Band2	5MHz	16QAM	18625	1RB#0	23.39	PASS
Band2	5MHz	16QAM	18625	1RB#12	23.52	PASS
Band2	5MHz	16QAM	18625	1RB#24	23.50	PASS
Band2	5MHz	16QAM	18625	12RB#0	22.42	PASS
Band2	5MHz	16QAM	18625	12RB#6	22.35	PASS
Band2	5MHz	16QAM	18625	12RB#13	22.42	PASS
Band2	5MHz	16QAM	18625	25RB#0	22.49	PASS





Band2	5MHz	16QAM	18900	1RB#0	23.77	PASS
Band2	5MHz	16QAM	18900	1RB#12	23.89	PASS
Band2	5MHz	16QAM	18900	1RB#24	23.73	PASS
Band2	5MHz	16QAM	18900	12RB#0	22.61	PASS
Band2	5MHz	16QAM	18900	12RB#6	22.54	PASS
Band2	5MHz	16QAM	18900	12RB#13	22.56	PASS
Band2	5MHz	16QAM	18900	25RB#0	22.57	PASS
Band2	5MHz	16QAM	19175	1RB#0	23.59	PASS
Band2	5MHz	16QAM	19175	1RB#12	23.66	PASS
Band2	5MHz	16QAM	19175	1RB#24	23.51	PASS
Band2	5MHz	16QAM	19175	12RB#0	22.59	PASS
Band2	5MHz	16QAM	19175	12RB#6	22.59	PASS
Band2	5MHz	16QAM	19175	12RB#13	22.53	PASS
Band2	5MHz	16QAM	19175	25RB#0	22.60	PASS
Band2	10MHz	QPSK	18650	1RB#0	24.49	PASS
Band2	10MHz	QPSK	18650	1RB#24	24.50	PASS
Band2	10MHz	QPSK	18650	1RB#49	24.55	PASS
Band2	10MHz	QPSK	18650	25RB#0	23.40	PASS
Band2	10MHz	QPSK	18650	25RB#12	23.40	PASS
Band2	10MHz	QPSK	18650	25RB#25	23.55	PASS
Band2	10MHz	QPSK	18650	50RB#0	23.53	PASS
Band2	10MHz	QPSK	18900	1RB#0	24.62	PASS
Band2	10MHz	QPSK	18900	1RB#24	24.61	PASS
Band2	10MHz	QPSK	18900	1RB#49	24.65	PASS
Band2	10MHz	QPSK	18900	25RB#0	23.53	PASS
Band2	10MHz	QPSK	18900	25RB#12	23.62	PASS
Band2	10MHz	QPSK	18900	25RB#25	23.59	PASS
Band2	10MHz	QPSK	18900	50RB#0	23.64	PASS
Band2	10MHz	QPSK	19150	1RB#0	24.72	PASS
Band2	10MHz	QPSK	19150	1RB#24	24.69	PASS
Band2	10MHz	QPSK	19150	1RB#49	24.62	PASS
Band2	10MHz	QPSK	19150	25RB#0	23.64	PASS
Band2	10MHz	QPSK	19150	25RB#12	23.67	PASS
Band2	10MHz	QPSK	19150	25RB#25	23.55	PASS
Band2	10MHz	QPSK	19150	50RB#0	23.60	PASS
Band2	10MHz	16QAM	18650	1RB#0	23.59	PASS
Band2	10MHz	16QAM	18650	1RB#24	23.71	PASS
Band2	10MHz	16QAM	18650	1RB#49	23.76	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	10MHz	16QAM	18650	25RB#0	22.41	PASS
Band2	10MHz	16QAM	18650	25RB#12	22.41	PASS
Band2	10MHz	16QAM	18650	25RB#25	22.58	PASS
Band2	10MHz	16QAM	18650	50RB#0	22.51	PASS
Band2	10MHz	16QAM	18900	1RB#0	23.78	PASS
Band2	10MHz	16QAM	18900	1RB#24	23.84	PASS
Band2	10MHz	16QAM	18900	1RB#49	23.85	PASS
Band2	10MHz	16QAM	18900	25RB#0	22.66	PASS
Band2	10MHz	16QAM	18900	25RB#12	22.63	PASS
Band2	10MHz	16QAM	18900	25RB#25	22.67	PASS
Band2	10MHz	16QAM	18900	50RB#0	22.57	PASS
Band2	10MHz	16QAM	19150	1RB#0	23.67	PASS
Band2	10MHz	16QAM	19150	1RB#24	23.58	PASS
Band2	10MHz	16QAM	19150	1RB#49	23.53	PASS
Band2	10MHz	16QAM	19150	25RB#0	22.64	PASS
Band2	10MHz	16QAM	19150	25RB#12	22.74	PASS
Band2	10MHz	16QAM	19150	25RB#25	22.55	PASS
Band2	10MHz	16QAM	19150	50RB#0	22.66	PASS
Band2	15MHz	QPSK	18675	1RB#0	24.40	PASS
Band2	15MHz	QPSK	18675	1RB#38	24.62	PASS
Band2	15MHz	QPSK	18675	1RB#74	24.62	PASS
Band2	15MHz	QPSK	18675	38RB#0	23.64	PASS
Band2	15MHz	QPSK	18675	38RB#18	23.63	PASS
Band2	15MHz	QPSK	18675	38RB#37	23.66	PASS
Band2	15MHz	QPSK	18675	75RB#0	23.67	PASS
Band2	15MHz	QPSK	18900	1RB#0	24.62	PASS
Band2	15MHz	QPSK	18900	1RB#38	24.69	PASS
Band2	15MHz	QPSK	18900	1RB#74	24.66	PASS
Band2	15MHz	QPSK	18900	38RB#0	23.70	PASS
Band2	15MHz	QPSK	18900	38RB#18	23.71	PASS
Band2	15MHz	QPSK	18900	38RB#37	23.72	PASS
Band2	15MHz	QPSK	18900	75RB#0	23.68	PASS
Band2	15MHz	QPSK	19125	1RB#0	24.71	PASS
Band2	15MHz	QPSK	19125	1RB#38	24.80	PASS
Band2	15MHz	QPSK	19125	1RB#74	24.60	PASS
Band2	15MHz	QPSK	19125	38RB#0	23.77	PASS
Band2	15MHz	QPSK	19125	38RB#18	23.82	PASS
Band2	15MHz	QPSK	19125	38RB#37	23.80	PASS





Band2	15MHz	QPSK	19125	75RB#0	23.78	PASS
Band2	15MHz	16QAM	18675	1RB#0	23.55	PASS
Band2	15MHz	16QAM	18675	1RB#38	23.80	PASS
Band2	15MHz	16QAM	18675	1RB#74	23.83	PASS
Band2	15MHz	16QAM	18675	38RB#0	23.66	PASS
Band2	15MHz	16QAM	18675	38RB#18	23.63	PASS
Band2	15MHz	16QAM	18675	38RB#37	23.61	PASS
Band2	15MHz	16QAM	18675	75RB#0	22.55	PASS
Band2	15MHz	16QAM	18900	1RB#0	23.81	PASS
Band2	15MHz	16QAM	18900	1RB#38	23.93	PASS
Band2	15MHz	16QAM	18900	1RB#74	23.96	PASS
Band2	15MHz	16QAM	18900	38RB#0	23.74	PASS
Band2	15MHz	16QAM	18900	38RB#18	23.68	PASS
Band2	15MHz	16QAM	18900	38RB#37	23.67	PASS
Band2	15MHz	16QAM	18900	75RB#0	22.68	PASS
Band2	15MHz	16QAM	19125	1RB#0	23.64	PASS
Band2	15MHz	16QAM	19125	1RB#38	23.68	PASS
Band2	15MHz	16QAM	19125	1RB#74	23.53	PASS
Band2	15MHz	16QAM	19125	38RB#0	23.85	PASS
Band2	15MHz	16QAM	19125	38RB#18	23.78	PASS
Band2	15MHz	16QAM	19125	38RB#37	23.82	PASS
Band2	15MHz	16QAM	19125	75RB#0	22.76	PASS
Band2	20MHz	QPSK	18700	1RB#0	24.46	PASS
Band2	20MHz	QPSK	18700	1RB#49	24.81	PASS
Band2	20MHz	QPSK	18700	1RB#99	24.73	PASS
Band2	20MHz	QPSK	18700	50RB#0	23.52	PASS
Band2	20MHz	QPSK	18700	50RB#25	23.54	PASS
Band2	20MHz	QPSK	18700	50RB#50	23.79	PASS
Band2	20MHz	QPSK	18700	100RB#0	23.67	PASS
Band2	20MHz	QPSK	18900	1RB#0	24.64	PASS
Band2	20MHz	QPSK	18900	1RB#49	24.76	PASS
Band2	20MHz	QPSK	18900	1RB#99	24.73	PASS
Band2	20MHz	QPSK	18900	50RB#0	23.65	PASS
Band2	20MHz	QPSK	18900	50RB#25	23.65	PASS
Band2	20MHz	QPSK	18900	50RB#50	23.71	PASS
Band2	20MHz	QPSK	18900	100RB#0	23.65	PASS
Band2	20MHz	QPSK	19100	1RB#0	24.65	PASS
Band2	20MHz	QPSK	19100	1RB#49	24.89	PASS





Band2	20MHz	QPSK	19100	1RB#99	24.59	PASS
Band2	20MHz	QPSK	19100	50RB#0	23.78	PASS
Band2	20MHz	QPSK	19100	50RB#25	23.75	PASS
Band2	20MHz	QPSK	19100	50RB#50	23.63	PASS
Band2	20MHz	QPSK	19100	100RB#0	23.70	PASS
Band2	20MHz	16QAM	18700	1RB#0	23.49	PASS
Band2	20MHz	16QAM	18700	1RB#49	23.83	PASS
Band2	20MHz	16QAM	18700	1RB#99	23.70	PASS
Band2	20MHz	16QAM	18700	50RB#0	22.49	PASS
Band2	20MHz	16QAM	18700	50RB#25	22.51	PASS
Band2	20MHz	16QAM	18700	50RB#50	22.80	PASS
Band2	20MHz	16QAM	18700	100RB#0	22.66	PASS
Band2	20MHz	16QAM	18900	1RB#0	23.60	PASS
Band2	20MHz	16QAM	18900	1RB#49	23.80	PASS
Band2	20MHz	16QAM	18900	1RB#99	23.69	PASS
Band2	20MHz	16QAM	18900	50RB#0	22.62	PASS
Band2	20MHz	16QAM	18900	50RB#25	22.63	PASS
Band2	20MHz	16QAM	18900	50RB#50	22.66	PASS
Band2	20MHz	16QAM	18900	100RB#0	22.63	PASS
Band2	20MHz	16QAM	19100	1RB#0	23.81	PASS
Band2	20MHz	16QAM	19100	1RB#49	23.97	PASS
Band2	20MHz	16QAM	19100	1RB#99	23.72	PASS
Band2	20MHz	16QAM	19100	50RB#0	22.74	PASS
Band2	20MHz	16QAM	19100	50RB#25	22.70	PASS
Band2	20MHz	16QAM	19100	50RB#50	22.70	PASS
Band2	20MHz	16QAM	19100	100RB#0	22.70	PASS





LTE Band4

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	24.33	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	24.33	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	24.34	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	24.40	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	24.38	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	24.36	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	23.49	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	24.00	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	23.93	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	24.01	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	24.04	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	24.08	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	24.08	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	23.14	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	24.01	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	24.01	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	23.96	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	24.03	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	24.02	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	24.01	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	23.13	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	23.39	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	23.43	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	23.39	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	23.26	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	23.23	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	23.23	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	22.50	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	23.12	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	23.14	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	23.16	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	22.96	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	22.98	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	22.93	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	22.02	PASS





Band4	1.4MHz	16QAM	20393	1RB#0	23.02	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	23.05	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	22.98	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	22.91	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	22.90	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	22.89	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	22.15	PASS
Band4	3MHz	QPSK	19965	1RB#0	24.11	PASS
Band4	3MHz	QPSK	19965	1RB#8	24.32	PASS
Band4	3MHz	QPSK	19965	1RB#14	24.19	PASS
Band4	3MHz	QPSK	19965	8RB#0	23.37	PASS
Band4	3MHz	QPSK	19965	8RB#4	23.34	PASS
Band4	3MHz	QPSK	19965	8RB#7	23.46	PASS
Band4	3MHz	QPSK	19965	15RB#0	23.38	PASS
Band4	3MHz	QPSK	20175	1RB#0	23.86	PASS
Band4	3MHz	QPSK	20175	1RB#8	23.96	PASS
Band4	3MHz	QPSK	20175	1RB#14	23.80	PASS
Band4	3MHz	QPSK	20175	8RB#0	23.05	PASS
Band4	3MHz	QPSK	20175	8RB#4	23.02	PASS
Band4	3MHz	QPSK	20175	8RB#7	23.07	PASS
Band4	3MHz	QPSK	20175	15RB#0	23.09	PASS
Band4	3MHz	QPSK	20385	1RB#0	23.75	PASS
Band4	3MHz	QPSK	20385	1RB#8	23.94	PASS
Band4	3MHz	QPSK	20385	1RB#14	23.83	PASS
Band4	3MHz	QPSK	20385	8RB#0	23.02	PASS
Band4	3MHz	QPSK	20385	8RB#4	23.05	PASS
Band4	3MHz	QPSK	20385	8RB#7	23.08	PASS
Band4	3MHz	QPSK	20385	15RB#0	23.01	PASS
Band4	3MHz	16QAM	19965	1RB#0	23.28	PASS
Band4	3MHz	16QAM	19965	1RB#8	23.40	PASS
Band4	3MHz	16QAM	19965	1RB#14	23.32	PASS
Band4	3MHz	16QAM	19965	8RB#0	22.38	PASS
Band4	3MHz	16QAM	19965	8RB#4	22.42	PASS
Band4	3MHz	16QAM	19965	8RB#7	22.43	PASS
Band4	3MHz	16QAM	19965	15RB#0	22.42	PASS
Band4	3MHz	16QAM	20175	1RB#0	23.03	PASS
Band4	3MHz	16QAM	20175	1RB#8	23.16	PASS
Band4	3MHz	16QAM	20175	1RB#14	22.97	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	3MHz	16QAM	20175	8RB#0	22.04	PASS
Band4	3MHz	16QAM	20175	8RB#4	22.03	PASS
Band4	3MHz	16QAM	20175	8RB#7	22.05	PASS
Band4	3MHz	16QAM	20175	15RB#0	22.01	PASS
Band4	3MHz	16QAM	20385	1RB#0	22.87	PASS
Band4	3MHz	16QAM	20385	1RB#8	23.01	PASS
Band4	3MHz	16QAM	20385	1RB#14	22.91	PASS
Band4	3MHz	16QAM	20385	8RB#0	22.08	PASS
Band4	3MHz	16QAM	20385	8RB#4	22.07	PASS
Band4	3MHz	16QAM	20385	8RB#7	22.02	PASS
Band4	3MHz	16QAM	20385	15RB#0	22.01	PASS
Band4	5MHz	QPSK	19975	1RB#0	24.44	PASS
Band4	5MHz	QPSK	19975	1RB#12	24.64	PASS
Band4	5MHz	QPSK	19975	1RB#24	24.41	PASS
Band4	5MHz	QPSK	19975	12RB#0	23.36	PASS
Band4	5MHz	QPSK	19975	12RB#6	23.40	PASS
Band4	5MHz	QPSK	19975	12RB#13	23.49	PASS
Band4	5MHz	QPSK	19975	25RB#0	23.43	PASS
Band4	5MHz	QPSK	20175	1RB#0	24.17	PASS
Band4	5MHz	QPSK	20175	1RB#12	24.32	PASS
Band4	5MHz	QPSK	20175	1RB#24	24.12	PASS
Band4	5MHz	QPSK	20175	12RB#0	23.10	PASS
Band4	5MHz	QPSK	20175	12RB#6	23.14	PASS
Band4	5MHz	QPSK	20175	12RB#13	23.08	PASS
Band4	5MHz	QPSK	20175	25RB#0	23.10	PASS
Band4	5MHz	QPSK	20375	1RB#0	24.08	PASS
Band4	5MHz	QPSK	20375	1RB#12	24.21	PASS
Band4	5MHz	QPSK	20375	1RB#24	24.12	PASS
Band4	5MHz	QPSK	20375	12RB#0	23.10	PASS
Band4	5MHz	QPSK	20375	12RB#6	23.05	PASS
Band4	5MHz	QPSK	20375	12RB#13	23.13	PASS
Band4	5MHz	QPSK	20375	25RB#0	23.10	PASS
Band4	5MHz	16QAM	19975	1RB#0	23.41	PASS
Band4	5MHz	16QAM	19975	1RB#12	23.60	PASS
Band4	5MHz	16QAM	19975	1RB#24	23.41	PASS
Band4	5MHz	16QAM	19975	12RB#0	22.36	PASS
Band4	5MHz	16QAM	19975	12RB#6	22.32	PASS
Band4	5MHz	16QAM	19975	12RB#13	22.44	PASS





Band4	5MHz	16QAM	19975	25RB#0	22.43	PASS
Band4	5MHz	16QAM	20175	1RB#0	23.31	PASS
Band4	5MHz	16QAM	20175	1RB#12	23.44	PASS
Band4	5MHz	16QAM	20175	1RB#24	23.30	PASS
Band4	5MHz	16QAM	20175	12RB#0	22.13	PASS
Band4	5MHz	16QAM	20175	12RB#6	22.17	PASS
Band4	5MHz	16QAM	20175	12RB#13	22.18	PASS
Band4	5MHz	16QAM	20175	25RB#0	22.16	PASS
Band4	5MHz	16QAM	20375	1RB#0	23.03	PASS
Band4	5MHz	16QAM	20375	1RB#12	23.19	PASS
Band4	5MHz	16QAM	20375	1RB#24	23.06	PASS
Band4	5MHz	16QAM	20375	12RB#0	22.03	PASS
Band4	5MHz	16QAM	20375	12RB#6	22.04	PASS
Band4	5MHz	16QAM	20375	12RB#13	22.11	PASS
Band4	5MHz	16QAM	20375	25RB#0	22.16	PASS
Band4	10MHz	QPSK	20000	1RB#0	24.42	PASS
Band4	10MHz	QPSK	20000	1RB#24	24.44	PASS
Band4	10MHz	QPSK	20000	1RB#49	24.36	PASS
Band4	10MHz	QPSK	20000	25RB#0	23.29	PASS
Band4	10MHz	QPSK	20000	25RB#12	23.32	PASS
Band4	10MHz	QPSK	20000	25RB#25	23.39	PASS
Band4	10MHz	QPSK	20000	50RB#0	23.41	PASS
Band4	10MHz	QPSK	20175	1RB#0	24.21	PASS
Band4	10MHz	QPSK	20175	1RB#24	24.21	PASS
Band4	10MHz	QPSK	20175	1RB#49	24.12	PASS
Band4	10MHz	QPSK	20175	25RB#0	23.13	PASS
Band4	10MHz	QPSK	20175	25RB#12	23.13	PASS
Band4	10MHz	QPSK	20175	25RB#25	23.16	PASS
Band4	10MHz	QPSK	20175	50RB#0	23.17	PASS
Band4	10MHz	QPSK	20350	1RB#0	24.07	PASS
Band4	10MHz	QPSK	20350	1RB#24	24.08	PASS
Band4	10MHz	QPSK	20350	1RB#49	24.08	PASS
Band4	10MHz	QPSK	20350	25RB#0	22.96	PASS
Band4	10MHz	QPSK	20350	25RB#12	22.99	PASS
Band4	10MHz	QPSK	20350	25RB#25	23.14	PASS
Band4	10MHz	QPSK	20350	50RB#0	23.10	PASS
Band4	10MHz	16QAM	20000	1RB#0	23.58	PASS
Band4	10MHz	16QAM	20000	1RB#24	23.58	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Band4	10MHz	16QAM	20000	1RB#49	23.54	PASS
Band4	10MHz	16QAM	20000	25RB#0	22.29	PASS
Band4	10MHz	16QAM	20000	25RB#12	22.29	PASS
Band4	10MHz	16QAM	20000	25RB#25	22.42	PASS
Band4	10MHz	16QAM	20000	50RB#0	22.37	PASS
Band4	10MHz	16QAM	20175	1RB#0	23.37	PASS
Band4	10MHz	16QAM	20175	1RB#24	23.34	PASS
Band4	10MHz	16QAM	20175	1RB#49	23.29	PASS
Band4	10MHz	16QAM	20175	25RB#0	22.19	PASS
Band4	10MHz	16QAM	20175	25RB#12	22.21	PASS
Band4	10MHz	16QAM	20175	25RB#25	22.19	PASS
Band4	10MHz	16QAM	20175	50RB#0	22.15	PASS
Band4	10MHz	16QAM	20350	1RB#0	23.20	PASS
Band4	10MHz	16QAM	20350	1RB#24	23.24	PASS
Band4	10MHz	16QAM	20350	1RB#49	23.20	PASS
Band4	10MHz	16QAM	20350	25RB#0	21.99	PASS
Band4	10MHz	16QAM	20350	25RB#12	22.02	PASS
Band4	10MHz	16QAM	20350	25RB#25	22.09	PASS
Band4	10MHz	16QAM	20350	50RB#0	22.06	PASS
Band4	15MHz	QPSK	20025	1RB#0	24.36	PASS
Band4	15MHz	QPSK	20025	1RB#38	24.45	PASS
Band4	15MHz	QPSK	20025	1RB#74	24.34	PASS
Band4	15MHz	QPSK	20025	38RB#0	23.51	PASS
Band4	15MHz	QPSK	20025	38RB#18	23.45	PASS
Band4	15MHz	QPSK	20025	38RB#37	23.47	PASS
Band4	15MHz	QPSK	20025	75RB#0	23.46	PASS
Band4	15MHz	QPSK	20175	1RB#0	24.16	PASS
Band4	15MHz	QPSK	20175	1RB#38	24.21	PASS
Band4	15MHz	QPSK	20175	1RB#74	24.05	PASS
Band4	15MHz	QPSK	20175	38RB#0	23.21	PASS
Band4	15MHz	QPSK	20175	38RB#18	23.18	PASS
Band4	15MHz	QPSK	20175	38RB#37	23.20	PASS
Band4	15MHz	QPSK	20175	75RB#0	23.23	PASS
Band4	15MHz	QPSK	20325	1RB#0	24.01	PASS
Band4	15MHz	QPSK	20325	1RB#38	24.13	PASS
Band4	15MHz	QPSK	20325	1RB#74	24.08	PASS
Band4	15MHz	QPSK	20325	38RB#0	23.16	PASS
Band4	15MHz	QPSK	20325	38RB#18	23.17	PASS





Band4	15MHz	QPSK	20325	38RB#37	23.16	PASS
Band4	15MHz	QPSK	20325	75RB#0	23.17	PASS
Band4	15MHz	16QAM	20025	1RB#0	23.52	PASS
Band4	15MHz	16QAM	20025	1RB#38	23.58	PASS
Band4	15MHz	16QAM	20025	1RB#74	23.52	PASS
Band4	15MHz	16QAM	20025	38RB#0	23.50	PASS
Band4	15MHz	16QAM	20025	38RB#18	23.48	PASS
Band4	15MHz	16QAM	20025	38RB#37	23.43	PASS
Band4	15MHz	16QAM	20025	75RB#0	22.38	PASS
Band4	15MHz	16QAM	20175	1RB#0	23.44	PASS
Band4	15MHz	16QAM	20175	1RB#38	23.51	PASS
Band4	15MHz	16QAM	20175	1RB#74	23.33	PASS
Band4	15MHz	16QAM	20175	38RB#0	23.22	PASS
Band4	15MHz	16QAM	20175	38RB#18	23.23	PASS
Band4	15MHz	16QAM	20175	38RB#37	23.24	PASS
Band4	15MHz	16QAM	20175	75RB#0	22.18	PASS
Band4	15MHz	16QAM	20325	1RB#0	23.15	PASS
Band4	15MHz	16QAM	20325	1RB#38	23.28	PASS
Band4	15MHz	16QAM	20325	1RB#74	23.22	PASS
Band4	15MHz	16QAM	20325	38RB#0	23.16	PASS
Band4	15MHz	16QAM	20325	38RB#18	23.16	PASS
Band4	15MHz	16QAM	20325	38RB#37	23.17	PASS
Band4	15MHz	16QAM	20325	75RB#0	22.07	PASS
Band4	20MHz	QPSK	20050	1RB#0	24.41	PASS
Band4	20MHz	QPSK	20050	1RB#49	24.53	PASS
Band4	20MHz	QPSK	20050	1RB#99	24.26	PASS
Band4	20MHz	QPSK	20050	50RB#0	23.29	PASS
Band4	20MHz	QPSK	20050	50RB#25	23.25	PASS
Band4	20MHz	QPSK	20050	50RB#50	23.31	PASS
Band4	20MHz	QPSK	20050	100RB#0	23.26	PASS
Band4	20MHz	QPSK	20175	1RB#0	24.27	PASS
Band4	20MHz	QPSK	20175	1RB#49	24.26	PASS
Band4	20MHz	QPSK	20175	1RB#99	24.06	PASS
Band4	20MHz	QPSK	20175	50RB#0	23.23	PASS
Band4	20MHz	QPSK	20175	50RB#25	23.23	PASS
Band4	20MHz	QPSK	20175	50RB#50	23.17	PASS
Band4	20MHz	QPSK	20175	100RB#0	23.15	PASS
Band4	20MHz	QPSK	20300	1RB#0	24.10	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	20MHz	QPSK	20300	1RB#49	24.28	PASS
Band4	20MHz	QPSK	20300	1RB#99	24.20	PASS
Band4	20MHz	QPSK	20300	50RB#0	23.00	PASS
Band4	20MHz	QPSK	20300	50RB#25	23.02	PASS
Band4	20MHz	QPSK	20300	50RB#50	23.17	PASS
Band4	20MHz	QPSK	20300	100RB#0	23.09	PASS
Band4	20MHz	16QAM	20050	1RB#0	23.34	PASS
Band4	20MHz	16QAM	20050	1RB#49	23.51	PASS
Band4	20MHz	16QAM	20050	1RB#99	23.24	PASS
Band4	20MHz	16QAM	20050	50RB#0	22.22	PASS
Band4	20MHz	16QAM	20050	50RB#25	22.25	PASS
Band4	20MHz	16QAM	20050	50RB#50	22.27	PASS
Band4	20MHz	16QAM	20050	100RB#0	22.27	PASS
Band4	20MHz	16QAM	20175	1RB#0	23.33	PASS
Band4	20MHz	16QAM	20175	1RB#49	23.41	PASS
Band4	20MHz	16QAM	20175	1RB#99	23.23	PASS
Band4	20MHz	16QAM	20175	50RB#0	22.25	PASS
Band4	20MHz	16QAM	20175	50RB#25	22.27	PASS
Band4	20MHz	16QAM	20175	50RB#50	22.18	PASS
Band4	20MHz	16QAM	20175	100RB#0	22.17	PASS
Band4	20MHz	16QAM	20300	1RB#0	23.05	PASS
Band4	20MHz	16QAM	20300	1RB#49	23.25	PASS
Band4	20MHz	16QAM	20300	1RB#99	23.11	PASS
Band4	20MHz	16QAM	20300	50RB#0	22.00	PASS
Band4	20MHz	16QAM	20300	50RB#25	22.00	PASS
Band4	20MHz	16QAM	20300	50RB#50	22.16	PASS
Band4	20MHz	16QAM	20300	100RB#0	22.10	PASS





LTE Band5

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Limit(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	24.48	38.45	PASS
Band5	1.4MHz	QPSK	20407	1RB#2	24.46	38.45	PASS
Band5	1.4MHz	QPSK	20407	1RB#5	24.36	38.45	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	23.64	38.45	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	24.32	38.45	PASS
Band5	1.4MHz	QPSK	20525	1RB#2	24.24	38.45	PASS
Band5	1.4MHz	QPSK	20525	1RB#5	24.23	38.45	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	23.67	38.45	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	24.22	38.45	PASS
Band5	1.4MHz	QPSK	20643	1RB#2	24.32	38.45	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	24.48	38.45	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	23.55	38.45	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	23.78	38.45	PASS
Band5	1.4MHz	16QAM	20407	1RB#2	23.82	38.45	PASS
Band5	1.4MHz	16QAM	20407	1RB#5	23.97	38.45	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	22.74	38.45	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	23.82	38.45	PASS
Band5	1.4MHz	16QAM	20525	1RB#2	24	38.45	PASS
Band5	1.4MHz	16QAM	20525	1RB#5	23.96	38.45	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	22.74	38.45	PASS
Band5	1.4MHz	16QAM	20643	1RB#0	23.69	38.45	PASS
Band5	1.4MHz	16QAM	20643	1RB#2	23.71	38.45	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	23.83	38.45	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	22.59	38.45	PASS
Band5	3MHz	QPSK	20415	1RB#0	24.44	38.45	PASS
Band5	3MHz	QPSK	20415	1RB#8	24.32	38.45	PASS
Band5	3MHz	QPSK	20415	1RB#14	24.38	38.45	PASS
Band5	3MHz	QPSK	20415	15RB#0	23.79	38.45	PASS
Band5	3MHz	QPSK	20525	1RB#0	24.36	38.45	PASS
Band5	3MHz	QPSK	20525	1RB#8	24.45	38.45	PASS
Band5	3MHz	QPSK	20525	1RB#14	24.25	38.45	PASS
Band5	3MHz	QPSK	20525	15RB#0	23.8	38.45	PASS
Band5	3MHz	QPSK	20635	1RB#0	24.23	38.45	PASS
Band5	3MHz	QPSK	20635	1RB#8	24.12	38.45	PASS
Band5	3MHz	QPSK	20635	1RB#14	24.33	38.45	PASS





Band5	3MHz	QPSK	20635	15RB#0	23.63	38.45	PASS
Band5	3MHz	16QAM	20415	1RB#0	24.28	38.45	PASS
Band5	3MHz	16QAM	20415	1RB#8	23.95	38.45	PASS
Band5	3MHz	16QAM	20415	1RB#14	24.15	38.45	PASS
Band5	3MHz	16QAM	20415	15RB#0	22.82	38.45	PASS
Band5	3MHz	16QAM	20525	1RB#0	24.06	38.45	PASS
Band5	3MHz	16QAM	20525	1RB#8	24.11	38.45	PASS
Band5	3MHz	16QAM	20525	1RB#14	24.15	38.45	PASS
Band5	3MHz	16QAM	20525	15RB#0	22.78	38.45	PASS
Band5	3MHz	16QAM	20635	1RB#0	23.64	38.45	PASS
Band5	3MHz	16QAM	20635	1RB#8	24	38.45	PASS
Band5	3MHz	16QAM	20635	1RB#14	23.86	38.45	PASS
Band5	3MHz	16QAM	20635	15RB#0	22.58	38.45	PASS
Band5	5MHz	QPSK	20425	1RB#0	24.25	38.45	PASS
Band5	5MHz	QPSK	20425	1RB#12	24.36	38.45	PASS
Band5	5MHz	QPSK	20425	1RB#24	24.42	38.45	PASS
Band5	5MHz	QPSK	20425	25RB#0	23.87	38.45	PASS
Band5	5MHz	QPSK	20525	1RB#0	24.33	38.45	PASS
Band5	5MHz	QPSK	20525	1RB#12	24.36	38.45	PASS
Band5	5MHz	QPSK	20525	1RB#24	24.12	38.45	PASS
Band5	5MHz	QPSK	20525	25RB#0	23.71	38.45	PASS
Band5	5MHz	QPSK	20625	1RB#0	24.41	38.45	PASS
Band5	5MHz	QPSK	20625	1RB#12	24.49	38.45	PASS
Band5	5MHz	QPSK	20625	1RB#24	24.33	38.45	PASS
Band5	5MHz	QPSK	20625	25RB#0	23.73	38.45	PASS
Band5	5MHz	16QAM	20425	1RB#0	24.07	38.45	PASS
Band5	5MHz	16QAM	20425	1RB#12	23.88	38.45	PASS
Band5	5MHz	16QAM	20425	1RB#24	24.11	38.45	PASS
Band5	5MHz	16QAM	20425	25RB#0	22.91	38.45	PASS
Band5	5MHz	16QAM	20525	1RB#0	24.13	38.45	PASS
Band5	5MHz	16QAM	20525	1RB#12	24.09	38.45	PASS
Band5	5MHz	16QAM	20525	1RB#24	24.2	38.45	PASS
Band5	5MHz	16QAM	20525	25RB#0	22.82	38.45	PASS
Band5	5MHz	16QAM	20625	1RB#0	24.02	38.45	PASS
Band5	5MHz	16QAM	20625	1RB#12	23.96	38.45	PASS
Band5	5MHz	16QAM	20625	1RB#24	23.87	38.45	PASS
Band5	5MHz	16QAM	20625	25RB#0	22.7	38.45	PASS
Band5	10MHz	QPSK	20450	1RB#0	24.45	38.45	PASS





Band5	10MHz	QPSK	20450	1RB#24	24.23	38.45	PASS
Band5	10MHz	QPSK	20450	1RB#49	24.42	38.45	PASS
Band5	10MHz	QPSK	20450	50RB#0	23.89	38.45	PASS
Band5	10MHz	QPSK	20525	1RB#0	24.23	38.45	PASS
Band5	10MHz	QPSK	20525	1RB#24	24.16	38.45	PASS
Band5	10MHz	QPSK	20525	1RB#49	24.22	38.45	PASS
Band5	10MHz	QPSK	20525	50RB#0	23.84	38.45	PASS
Band5	10MHz	QPSK	20600	1RB#0	24.12	38.45	PASS
Band5	10MHz	QPSK	20600	1RB#24	24.21	38.45	PASS
Band5	10MHz	QPSK	20600	1RB#49	24.21	38.45	PASS
Band5	10MHz	QPSK	20600	50RB#0	23.7	38.45	PASS
Band5	10MHz	16QAM	20450	1RB#0	23.99	38.45	PASS
Band5	10MHz	16QAM	20450	1RB#24	23.98	38.45	PASS
Band5	10MHz	16QAM	20450	1RB#49	24.03	38.45	PASS
Band5	10MHz	16QAM	20450	50RB#0	22.9	38.45	PASS
Band5	10MHz	16QAM	20525	1RB#0	23.96	38.45	PASS
Band5	10MHz	16QAM	20525	1RB#24	24.04	38.45	PASS
Band5	10MHz	16QAM	20525	1RB#49	23.78	38.45	PASS
Band5	10MHz	16QAM	20525	50RB#0	22.74	38.45	PASS
Band5	10MHz	16QAM	20600	1RB#0	23.85	38.45	PASS
Band5	10MHz	16QAM	20600	1RB#24	24.09	38.45	PASS
Band5	10MHz	16QAM	20600	1RB#49	23.72	38.45	PASS
Band5	10MHz	16QAM	20600	50RB#0	22.8	38.45	PASS



**LTE Band 12**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Limit(dBm)	Verdict
Band12	1.4MHz	QPSK	23017	1RB#0	24.23	34.77	PASS
Band12	1.4MHz	QPSK	23017	1RB#2	24.37	34.77	PASS
Band12	1.4MHz	QPSK	23017	1RB#5	24.34	34.77	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	23.33	34.77	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	24.28	34.77	PASS
Band12	1.4MHz	QPSK	23095	1RB#2	24.32	34.77	PASS
Band12	1.4MHz	QPSK	23095	1RB#5	24.29	34.77	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	23.28	34.77	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	24.21	34.77	PASS
Band12	1.4MHz	QPSK	23173	1RB#2	24.26	34.77	PASS
Band12	1.4MHz	QPSK	23173	1RB#5	24.29	34.77	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	23.21	34.77	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	23.51	34.77	PASS
Band12	1.4MHz	16QAM	23017	1RB#2	23.76	34.77	PASS
Band12	1.4MHz	16QAM	23017	1RB#5	23.61	34.77	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	22.41	34.77	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	23.51	34.77	PASS
Band12	1.4MHz	16QAM	23095	1RB#2	23.54	34.77	PASS
Band12	1.4MHz	16QAM	23095	1RB#5	23.52	34.77	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	22.38	34.77	PASS
Band12	1.4MHz	16QAM	23173	1RB#0	23.53	34.77	PASS
Band12	1.4MHz	16QAM	23173	1RB#2	23.5	34.77	PASS
Band12	1.4MHz	16QAM	23173	1RB#5	23.53	34.77	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	22.32	34.77	PASS
Band12	3MHz	QPSK	23025	1RB#0	24.3	34.77	PASS
Band12	3MHz	QPSK	23025	1RB#8	24.34	34.77	PASS
Band12	3MHz	QPSK	23025	1RB#14	24.3	34.77	PASS
Band12	3MHz	QPSK	23025	15RB#0	23.33	34.77	PASS
Band12	3MHz	QPSK	23095	1RB#0	24.33	34.77	PASS
Band12	3MHz	QPSK	23095	1RB#8	24.3	34.77	PASS
Band12	3MHz	QPSK	23095	1RB#14	24.26	34.77	PASS
Band12	3MHz	QPSK	23095	15RB#0	23.26	34.77	PASS
Band12	3MHz	QPSK	23165	1RB#0	24.32	34.77	PASS
Band12	3MHz	QPSK	23165	1RB#8	24.26	34.77	PASS
Band12	3MHz	QPSK	23165	1RB#14	24.31	34.77	PASS
Band12	3MHz	QPSK	23165	15RB#0	23.25	34.77	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band12	3MHz	16QAM	23025	1RB#0	23.55	34.77	PASS
Band12	3MHz	16QAM	23025	1RB#8	23.57	34.77	PASS
Band12	3MHz	16QAM	23025	1RB#14	23.53	34.77	PASS
Band12	3MHz	16QAM	23025	15RB#0	22.34	34.77	PASS
Band12	3MHz	16QAM	23095	1RB#0	23.47	34.77	PASS
Band12	3MHz	16QAM	23095	1RB#8	23.6	34.77	PASS
Band12	3MHz	16QAM	23095	1RB#14	23.57	34.77	PASS
Band12	3MHz	16QAM	23095	15RB#0	22.29	34.77	PASS
Band12	3MHz	16QAM	23165	1RB#0	23.47	34.77	PASS
Band12	3MHz	16QAM	23165	1RB#8	23.54	34.77	PASS
Band12	3MHz	16QAM	23165	1RB#14	23.41	34.77	PASS
Band12	3MHz	16QAM	23165	15RB#0	22.26	34.77	PASS
Band12	5MHz	QPSK	23035	1RB#0	24.34	34.77	PASS
Band12	5MHz	QPSK	23035	1RB#12	24.4	34.77	PASS
Band12	5MHz	QPSK	23035	1RB#24	24.38	34.77	PASS
Band12	5MHz	QPSK	23035	25RB#0	23.31	34.77	PASS
Band12	5MHz	QPSK	23095	1RB#0	24.38	34.77	PASS
Band12	5MHz	QPSK	23095	1RB#12	24.44	34.77	PASS
Band12	5MHz	QPSK	23095	1RB#24	24.34	34.77	PASS
Band12	5MHz	QPSK	23095	25RB#0	23.34	34.77	PASS
Band12	5MHz	QPSK	23155	1RB#0	24.34	34.77	PASS
Band12	5MHz	QPSK	23155	1RB#12	24.34	34.77	PASS
Band12	5MHz	QPSK	23155	1RB#24	24.33	34.77	PASS
Band12	5MHz	QPSK	23155	25RB#0	23.22	34.77	PASS
Band12	5MHz	16QAM	23035	1RB#0	23.63	34.77	PASS
Band12	5MHz	16QAM	23035	1RB#12	23.66	34.77	PASS
Band12	5MHz	16QAM	23035	1RB#24	23.63	34.77	PASS
Band12	5MHz	16QAM	23035	25RB#0	22.31	34.77	PASS
Band12	5MHz	16QAM	23095	1RB#0	23.5	34.77	PASS
Band12	5MHz	16QAM	23095	1RB#12	23.6	34.77	PASS
Band12	5MHz	16QAM	23095	1RB#24	23.62	34.77	PASS
Band12	5MHz	16QAM	23095	25RB#0	22.32	34.77	PASS
Band12	5MHz	16QAM	23155	1RB#0	23.51	34.77	PASS
Band12	5MHz	16QAM	23155	1RB#12	23.55	34.77	PASS
Band12	5MHz	16QAM	23155	1RB#24	23.6	34.77	PASS
Band12	5MHz	16QAM	23155	25RB#0	22.27	34.77	PASS
Band12	10MHz	QPSK	23060	1RB#0	24.34	34.77	PASS
Band12	10MHz	QPSK	23060	1RB#24	24.37	34.77	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band12	10MHz	QPSK	23060	1RB#49	24.27	34.77	PASS
Band12	10MHz	QPSK	23060	50RB#0	23.29	34.77	PASS
Band12	10MHz	QPSK	23095	1RB#0	24.36	34.77	PASS
Band12	10MHz	QPSK	23095	1RB#24	23.88	34.77	PASS
Band12	10MHz	QPSK	23095	1RB#49	23.82	34.77	PASS
Band12	10MHz	QPSK	23095	50RB#0	23.49	34.77	PASS
Band12	10MHz	QPSK	23130	1RB#0	23.99	34.77	PASS
Band12	10MHz	QPSK	23130	1RB#24	23.98	34.77	PASS
Band12	10MHz	QPSK	23130	1RB#49	23.82	34.77	PASS
Band12	10MHz	QPSK	23130	50RB#0	23.35	34.77	PASS
Band12	10MHz	16QAM	23060	1RB#0	23.71	34.77	PASS
Band12	10MHz	16QAM	23060	1RB#24	23.55	34.77	PASS
Band12	10MHz	16QAM	23060	1RB#49	23.55	34.77	PASS
Band12	10MHz	16QAM	23060	50RB#0	22.25	34.77	PASS
Band12	10MHz	16QAM	23095	1RB#0	23.63	34.77	PASS
Band12	10MHz	16QAM	23095	1RB#24	23.23	34.77	PASS
Band12	10MHz	16QAM	23095	1RB#49	23.11	34.77	PASS
Band12	10MHz	16QAM	23095	50RB#0	22.54	34.77	PASS
Band12	10MHz	16QAM	23130	1RB#0	23.21	34.77	PASS
Band12	10MHz	16QAM	23130	1RB#24	23.16	34.77	PASS
Band12	10MHz	16QAM	23130	1RB#49	22.96	34.77	PASS
Band12	10MHz	16QAM	23130	50RB#0	22.32	34.77	PASS



**LTE Band41**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Limit(dBm)	Verdict
Band41	5MHz	QPSK	39675	1RB#0	24.41	33	PASS
Band41	5MHz	QPSK	39675	1RB#12	24.45	33	PASS
Band41	5MHz	QPSK	39675	1RB#24	24.02	33	PASS
Band41	5MHz	QPSK	39675	25RB#0	23.33	33	PASS
Band41	5MHz	QPSK	40620	1RB#0	23.87	33	PASS
Band41	5MHz	QPSK	40620	1RB#12	24.45	33	PASS
Band41	5MHz	QPSK	40620	1RB#24	24.35	33	PASS
Band41	5MHz	QPSK	40620	25RB#0	23.14	33	PASS
Band41	5MHz	QPSK	41565	1RB#0	24.38	33	PASS
Band41	5MHz	QPSK	41565	1RB#12	24.42	33	PASS
Band41	5MHz	QPSK	41565	1RB#24	24.31	33	PASS
Band41	5MHz	QPSK	41565	25RB#0	23.18	33	PASS
Band41	5MHz	16QAM	39675	1RB#0	23.29	33	PASS
Band41	5MHz	16QAM	39675	1RB#12	22.82	33	PASS
Band41	5MHz	16QAM	39675	1RB#24	22.85	33	PASS
Band41	5MHz	16QAM	39675	25RB#0	22.39	33	PASS
Band41	5MHz	16QAM	40620	1RB#0	23.13	33	PASS
Band41	5MHz	16QAM	40620	1RB#12	23.22	33	PASS
Band41	5MHz	16QAM	40620	1RB#24	23.21	33	PASS
Band41	5MHz	16QAM	40620	25RB#0	22.19	33	PASS
Band41	5MHz	16QAM	41565	1RB#0	23.23	33	PASS
Band41	5MHz	16QAM	41565	1RB#12	22.95	33	PASS
Band41	5MHz	16QAM	41565	1RB#24	22.68	33	PASS
Band41	5MHz	16QAM	41565	25RB#0	22.23	33	PASS
Band41	10MHz	QPSK	39700	1RB#0	24.42	33	PASS
Band41	10MHz	QPSK	39700	1RB#24	24.1	33	PASS
Band41	10MHz	QPSK	39700	1RB#49	23.99	33	PASS
Band41	10MHz	QPSK	39700	50RB#0	23.37	33	PASS
Band41	10MHz	QPSK	40620	1RB#0	23.89	33	PASS
Band41	10MHz	QPSK	40620	1RB#24	24.37	33	PASS
Band41	10MHz	QPSK	40620	1RB#49	24.31	33	PASS
Band41	10MHz	QPSK	40620	50RB#0	23.19	33	PASS
Band41	10MHz	QPSK	41540	1RB#0	24.39	33	PASS
Band41	10MHz	QPSK	41540	1RB#24	24.37	33	PASS
Band41	10MHz	QPSK	41540	1RB#49	24	33	PASS
Band41	10MHz	QPSK	41540	50RB#0	23.24	33	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	10MHz	16QAM	39700	1RB#0	23.29	33	PASS
Band41	10MHz	16QAM	39700	1RB#24	22.86	33	PASS
Band41	10MHz	16QAM	39700	1RB#49	22.84	33	PASS
Band41	10MHz	16QAM	39700	50RB#0	22.39	33	PASS
Band41	10MHz	16QAM	40620	1RB#0	22.91	33	PASS
Band41	10MHz	16QAM	40620	1RB#24	23.25	33	PASS
Band41	10MHz	16QAM	40620	1RB#49	23.18	33	PASS
Band41	10MHz	16QAM	40620	50RB#0	22.2	33	PASS
Band41	10MHz	16QAM	41540	1RB#0	23.16	33	PASS
Band41	10MHz	16QAM	41540	1RB#24	22.94	33	PASS
Band41	10MHz	16QAM	41540	1RB#49	22.65	33	PASS
Band41	10MHz	16QAM	41540	50RB#0	22.24	33	PASS
Band41	15MHz	QPSK	39725	1RB#0	24.29	33	PASS
Band41	15MHz	QPSK	39725	1RB#38	23.96	33	PASS
Band41	15MHz	QPSK	39725	1RB#74	23.95	33	PASS
Band41	15MHz	QPSK	39725	75RB#0	23.34	33	PASS
Band41	15MHz	QPSK	40620	1RB#0	23.86	33	PASS
Band41	15MHz	QPSK	40620	1RB#38	24.29	33	PASS
Band41	15MHz	QPSK	40620	1RB#74	24.23	33	PASS
Band41	15MHz	QPSK	40620	75RB#0	23.15	33	PASS
Band41	15MHz	QPSK	41515	1RB#0	24.32	33	PASS
Band41	15MHz	QPSK	41515	1RB#38	24.22	33	PASS
Band41	15MHz	QPSK	41515	1RB#74	23.98	33	PASS
Band41	15MHz	QPSK	41515	75RB#0	23.21	33	PASS
Band41	15MHz	16QAM	39725	1RB#0	23.22	33	PASS
Band41	15MHz	16QAM	39725	1RB#38	22.86	33	PASS
Band41	15MHz	16QAM	39725	1RB#74	22.84	33	PASS
Band41	15MHz	16QAM	39725	75RB#0	22.35	33	PASS
Band41	15MHz	16QAM	40620	1RB#0	22.88	33	PASS
Band41	15MHz	16QAM	40620	1RB#38	23.06	33	PASS
Band41	15MHz	16QAM	40620	1RB#74	23.13	33	PASS
Band41	15MHz	16QAM	40620	75RB#0	22.15	33	PASS
Band41	15MHz	16QAM	41515	1RB#0	23.2	33	PASS
Band41	15MHz	16QAM	41515	1RB#38	23.04	33	PASS
Band41	15MHz	16QAM	41515	1RB#74	22.61	33	PASS
Band41	15MHz	16QAM	41515	75RB#0	22.21	33	PASS
Band41	20MHz	QPSK	39750	1RB#0	24.28	33	PASS
Band41	20MHz	QPSK	39750	1RB#49	24.05	33	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	20MHz	QPSK	39750	1RB#99	23.85	33	PASS
Band41	20MHz	QPSK	39750	100RB#0	23.3	33	PASS
Band41	20MHz	QPSK	40620	1RB#0	24.12	33	PASS
Band41	20MHz	QPSK	40620	1RB#49	24.39	33	PASS
Band41	20MHz	QPSK	40620	1RB#99	24.13	33	PASS
Band41	20MHz	QPSK	40620	100RB#0	23.18	33	PASS
Band41	20MHz	QPSK	41490	1RB#0	24.43	33	PASS
Band41	20MHz	QPSK	41490	1RB#49	24.44	33	PASS
Band41	20MHz	QPSK	41490	1RB#99	24.14	33	PASS
Band41	20MHz	QPSK	41490	100RB#0	23.34	33	PASS
Band41	20MHz	16QAM	39750	1RB#0	23.18	33	PASS
Band41	20MHz	16QAM	39750	1RB#49	22.87	33	PASS
Band41	20MHz	16QAM	39750	1RB#99	22.72	33	PASS
Band41	20MHz	16QAM	39750	100RB#0	22.34	33	PASS
Band41	20MHz	16QAM	40620	1RB#0	22.94	33	PASS
Band41	20MHz	16QAM	40620	1RB#49	23.27	33	PASS
Band41	20MHz	16QAM	40620	1RB#99	23.03	33	PASS
Band41	20MHz	16QAM	40620	100RB#0	22.2	33	PASS
Band41	20MHz	16QAM	41490	1RB#0	23.29	33	PASS
Band41	20MHz	16QAM	41490	1RB#49	23.24	33	PASS
Band41	20MHz	16QAM	41490	1RB#99	22.81	33	PASS
Band41	20MHz	16QAM	41490	100RB#0	22.35	33	PASS





<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)
IEEE 802.11b	1	2412	14.86
	6	2437	15.72
	11	2462	15.75
IEEE 802.11g	1	2412	14.89
	6	2437	15.89
	11	2462	15.82
IEEE 802.11n HT20	1	2412	14.02
	6	2437	14.56
	11	2462	14.82
IEEE 802.11n HT40	3	2422	13.98
	6	2437	14.54
	9	2452	14.71

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<WLAN 5.2G Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Output Power(dBm)	Worst Case Test Rate Data
IEEE 802.11a	36	5180	13.99	MCS0
	40	5200	13.56	MCS0
	48	5240	13.32	MCS0
IEEE 802.11n HT20	36	5180	12.68	MCS0
	40	5200	12.63	MCS0
	48	5240	12.26	MCS0
IEEE 802.11n HT40	38	5190	12.04	MCS0
	46	5230	12.64	MCS0
IEEE 802.11ac VHT20	36	5180	11.72	MCS0
	40	5200	12.26	MCS0
	48	5240	12.74	MCS0
IEEE 802.11ac VHT40	38	5190	11.08	MCS0
	46	5230	12.18	MCS0
IEEE 802.11ac VHT80	42	5210	11.90	MCS0





<WLAN 5.3G Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Output Power(dBm)	Worst Case Test Rate Data
IEEE 802.11a	52	5260	13.51	MCS0
	60	5300	12.40	MCS0
	64	5320	14.81	MCS0
IEEE 802.11n HT20	52	5260	12.03	MCS0
	60	5300	12.41	MCS0
	64	5320	13.19	MCS0
IEEE 802.11n HT40	54	5270	12.31	MCS0
	62	5310	12.83	MCS0
IEEE 802.11ac VHT20	52	5260	11.99	MCS0
	60	5300	12.04	MCS0
	64	5320	13.74	MCS0
IEEE 802.11ac VHT40	54	5270	10.84	MCS0
	62	5310	12.56	MCS0
IEEE 802.11ac VHT80	58	5290	12.76	MCS0

<BT Conducted Power>

Mode	channel	Frequency (MHz)	Conducted AVG output power (dBm)
BLE_1M	0	2402	3.45
	19	2440	5.45
	39	2480	5.08
BLE_2M	0	2402	3.45
	19	2440	5.81
	39	2480	5.11
GFSK	0	2402	0.01
	39	2441	1.86
	78	2480	1.20
$\pi/4$ -DQPSK	0	2402	-0.72
	39	2441	1.14
	78	2480	0.60
8DPSK	0	2402	-0.85
	39	2441	0.73
	78	2480	0.26

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


Bluetooth Tune up Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion Thresholds
6.0	5	2.45	1.3

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is $1.3 < 3.0$, SAR testing is not required.





4.2 Transmit Antennas and SAR Measurement Position

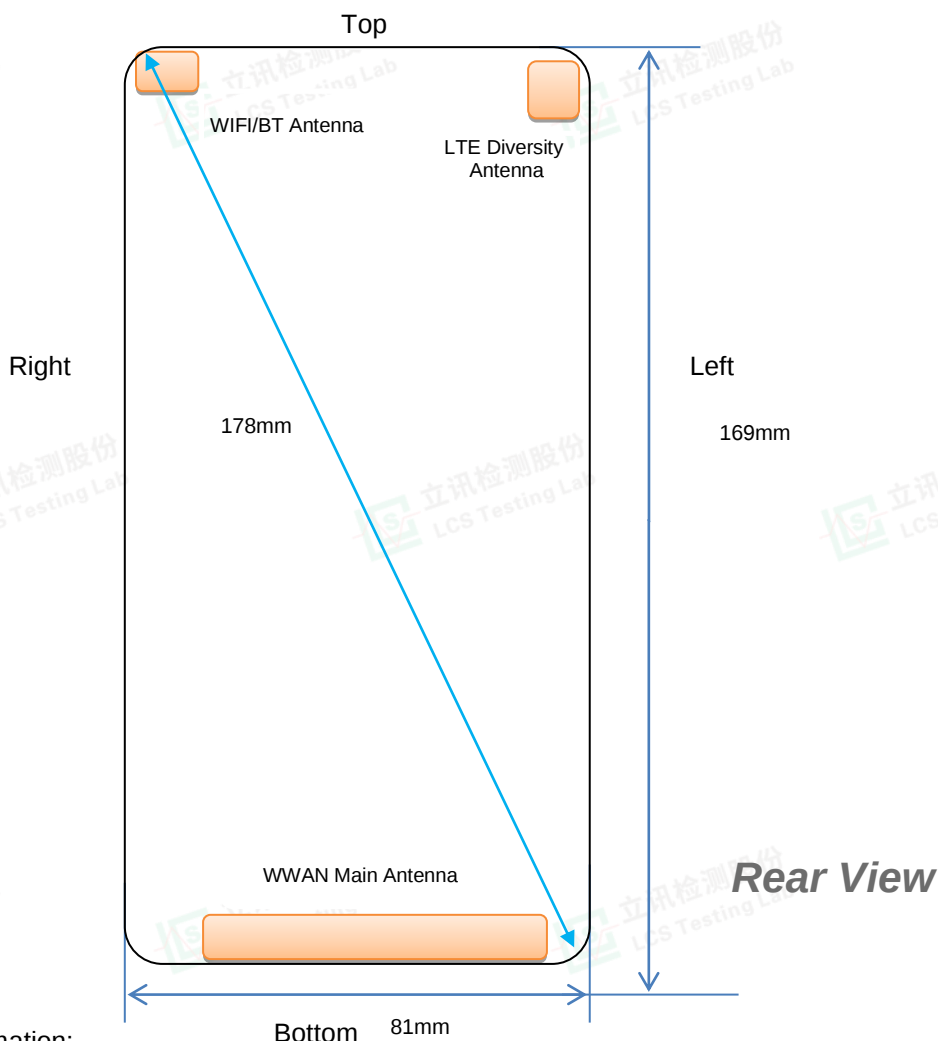

Antenna information:

WWAN Main Antenna	GSM/UMTS/LTE TX/RX
LTE Diversity antenna	Only RX
WLAN/BT Antenna	WLAN/BT TX/RX

Note:

- 1). Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2 W/Kg.
- 2). According to the KDB941225 D06 Hot Spot SAR v02, the edges with less than 25 mm distance to the antennas need to be tested for SAR.

Distance of The Antenna to the EUT surface and edge (mm)

Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	<5	<5	161	<5	<5	<5
BT/WLAN	<5	<5	<5	160	76	<5

Positions for SAR tests; Hotspot mode

Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT/WLAN	Yes	Yes	Yes	No	No	Yes

General Note: Referring to KDB 941225 D06 v02, When the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4.3 SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} * \text{Scaling factor}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

Duty Cycle

Test Mode	Duty Cycle
GPRS850	1:2.67
GPRS1900	1:4
UMTS	1:1
LTE	1:1
WLAN2450	1:1
WLAN5200	1:1
WLAN5300	1:1

4.3.1 SAR Results

SAR Values [GSM 850]

Ch.	Freq. (MHz)	Time slots	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
251	848.8	Voice	Left Cheek	32.49	32.50	0.91	1.002	0.146	0.146	Plot 1
251	848.8	Voice	Left Tilt	32.49	32.50	-3.43	1.002	0.073	0.073	
251	848.8	Voice	Right Cheek	32.49	32.50	0.03	1.002	0.127	0.127	
251	848.8	Voice	Right Tilt	32.49	32.50	-1.20	1.002	0.066	0.066	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
251	848.8	3Txslots	Front	29.24	29.50	-3.20	1.062	0.176	0.187	Plot 2
251	848.8	3Txslots	Rear	29.24	29.50	-0.18	1.062	0.224	0.238	
251	848.8	3Txslots	Left	29.24	29.50	0.21	1.062	0.166	0.176	
251	848.8	3Txslots	Right	29.24	29.50	-1.33	1.062	0.157	0.167	
251	848.8	3Txslots	Bottom	29.24	29.50	0.48	1.062	0.149	0.158	

Remark:

1. The value with blue color is the maximum SAR Value of each test band.

2. The frame average of GPRS (4Tx slots) higher than GSM and sample can support VoIP function, tested at GPRS (4Tx slots) mode for head.

3. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**SAR Values [GSM 1900]**

Ch.	Freq. (MHz)	time slots	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
512	1850.2	Voice	Left Cheek	31.20	31.50	-0.69	1.072	0.108	0.116	Plot 3
512	1850.2	Voice	Left Tilt	31.20	31.50	-2.52	1.072	0.055	0.059	
512	1850.2	Voice	Right Cheek	31.20	31.50	4.09	1.072	0.093	0.100	
512	1850.2	Voice	Right Tilt	31.20	31.50	-1.63	1.072	0.044	0.047	
measured / reported SAR numbers – Body (hotspot open, distance 10mm)										
661	1880.0	4Txslots	Front	30.13	30.50	3.02	1.089	0.176	0.192	Plot 4
661	1880.0	4Txslots	Rear	30.13	30.50	2.25	1.089	0.239	0.260	
661	1880.0	4Txslots	Left	30.13	30.50	-0.63	1.089	0.158	0.172	
661	1880.0	4Txslots	Right	30.13	30.50	-4.75	1.089	0.145	0.158	
661	1880.0	4Txslots	Bottom	30.13	30.50	1.92	1.089	0.130	0.142	

Remark:

1. The value with blue color is the maximum SAR Value of each test band.

2. The frame average of GPRS (4Tx slots) higher than GSM and sample can support VoIP function, tested at GPRS (4Tx slots) mode for head.

3. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

SAR Values [WCDMA Band V]

Ch.	Freq. (MHZ)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
4132	826.4	RMC*	Left Cheek	24.04	24.50	-0.56	1.112	0.083	0.092	Plot 5
4132	826.4	RMC*	Left Tilt	24.04	24.50	-4.53	1.112	0.042	0.047	
4132	826.4	RMC*	Right Cheek	24.04	24.50	3.15	1.112	0.077	0.086	
4132	826.4	RMC*	Right Tilt	24.04	24.50	-0.91	1.112	0.036	0.040	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
4132	826.4	RMC*	Front	24.04	24.50	-4.52	1.112	0.071	0.079	Plot 6
4132	826.4	RMC*	Rear	24.04	24.50	-0.23	1.112	0.116	0.129	
4132	826.4	RMC*	Left	24.04	24.50	4.02	1.112	0.066	0.073	
4132	826.4	RMC*	Right	24.04	24.50	3.52	1.112	0.060	0.067	
4132	826.4	RMC*	Bottom	24.04	24.50	-2.77	1.112	0.054	0.060	

Remark:

1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

3. RMC* - RMC 12.2kbps mode;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**SAR Values [WCDMA Band II]**

Ch.	Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
9539	1907.6	RMC*	Left Cheek	24.04	24.50	3.60	1.112	0.208	0.231	Plot 7
9539	1907.6	RMC*	Left Tilt	24.04	24.50	1.71	1.112	0.102	0.113	
9539	1907.6	RMC*	Right Cheek	24.04	24.50	-4.65	1.112	0.192	0.213	
9539	1907.6	RMC*	Right Tilt	24.04	24.50	-2.23	1.112	0.097	0.108	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
9539	1907.6	RMC*	Front	24.04	24.50	-3.56	1.112	0.398	0.442	Plot 8
9539	1907.6	RMC*	Rear	24.04	24.50	-0.38	1.112	0.492	0.547	
9539	1907.6	RMC*	Left	24.04	24.50	-3.20	1.112	0.377	0.419	
9539	1907.6	RMC*	Right	24.04	24.50	-1.45	1.112	0.367	0.408	
9539	1907.6	RMC*	Bottom	24.04	24.50	-0.39	1.112	0.248	0.276	

Remark:

1. The value with blue color is the maximum SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).
3. RMC* - RMC 12.2kbps mode;

SAR Values [LTE Band 2]

Ch.	Freq. (MHz)	Channel Type (10M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR1-g results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
19100	1900.0	1RB	Left Cheek	24.65	25.00	-3.46	1.084	0.203	0.220	Plot 9
19100	1900.0	1RB	Left Tilt	24.65	25.00	0.96	1.084	0.101	0.109	
19100	1900.0	1RB	Right Cheek	24.65	25.00	1.97	1.084	0.189	0.205	
19100	1900.0	1RB	Right Tilt	24.65	25.00	-2.05	1.084	0.087	0.094	
19100	1900.0	50%RB	Left Cheek	23.81	24.00	4.44	1.045	0.103	0.108	
19100	1900.0	50%RB	Left Tilt	23.81	24.00	-3.58	1.045	0.052	0.054	
19100	1900.0	50%RB	Right Cheek	23.81	24.00	3.03	1.045	0.092	0.096	
19100	1900.0	50%RB	Right Tilt	23.81	24.00	1.98	1.045	0.046	0.048	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
19100	1900.0	1RB	Front	24.65	25.00	-4.00	1.084	0.365	0.396	Plot 10
19100	1900.0	1RB	Rear	24.65	25.00	-0.10	1.084	0.508	0.551	
19100	1900.0	1RB	Left	24.65	25.00	0.96	1.084	0.352	0.382	
19100	1900.0	1RB	Right	24.65	25.00	3.74	1.084	0.348	0.377	
19100	1900.0	1RB	Bottom	24.65	25.00	-3.64	1.084	0.331	0.359	
19100	1900.0	50%RB	Front	23.81	24.00	-0.89	1.045	0.183	0.191	
19100	1900.0	50%RB	Rear	23.81	24.00	1.45	1.045	0.255	0.266	
19100	1900.0	50%RB	Left	23.81	24.00	4.87	1.045	0.173	0.181	
19100	1900.0	50%RB	Right	23.81	24.00	0.03	1.045	0.169	0.177	
19100	1900.0	50%RB	Bottom	23.81	24.00	-4.52	1.045	0.151	0.158	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**SAR Values [LTE Band 4]**

Ch.	Freq. (MHz)	Channel Type (10M)	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR1-g results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
20300	1745.0	1RB	Left Cheek	24.41	24.50	-4.02	1.021	0.333	0.340	Plot 11
20300	1745.0	1RB	Left Tilt	24.41	24.50	0.36	1.021	0.167	0.170	
20300	1745.0	1RB	Right Cheek	24.41	24.50	0.22	1.021	0.318	0.325	
20300	1745.0	1RB	Right Tilt	24.41	24.50	-1.42	1.021	0.155	0.158	
20050	1720.0	50%RB	Left Cheek	23.34	23.50	2.56	1.038	0.169	0.175	
20050	1720.0	50%RB	Left Tilt	23.34	23.50	-0.22	1.038	0.084	0.087	
20050	1720.0	50%RB	Right Cheek	23.34	23.50	-3.96	1.038	0.155	0.161	
20050	1720.0	50%RB	Right Tilt	23.34	23.50	-1.78	1.038	0.072	0.075	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
20300	1745.0	1RB	Front	24.41	24.50	-1.52	1.021	0.796	0.813	
20300	1745.0	1RB	Rear	24.41	24.50	0.34	1.021	1.174	1.199	Plot 12
20050	1720.0	1RB	Rear	24.41	24.50	-4.65	1.021	1.141	1.165	
20175	1732.5	1RB	Rear	24.41	24.50	-0.83	1.021	1.089	1.112	
20300	1745.0	1RB	Left	24.41	24.50	3.02	1.021	0.784	0.800	
20300	1745.0	1RB	Right	24.41	24.50	2.05	1.021	0.775	0.791	
20300	1745.0	1RB	Bottom	24.41	24.50	4.64	1.021	0.766	0.782	
20050	1720.0	50%RB	Front	23.34	23.50	0.87	1.038	0.399	0.414	
20050	1720.0	50%RB	Rear	23.34	23.50	-2.66	1.038	0.555	0.576	
20050	1720.0	50%RB	Left	23.34	23.50	-0.89	1.038	0.383	0.397	
20050	1720.0	50%RB	Right	23.34	23.50	3.55	1.038	0.374	0.388	
20050	1720.0	50%RB	Bottom	23.34	23.50	-4.78	1.038	0.365	0.379	

SAR Values [LTE Band 5]

Ch.	Freq. (MHz)	Channe l Type (10M)	Test Position	Con ducted Powe r (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR1-g results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers - Head										
20450	829.0	1RB	Left Cheek	24.45	24.50	2.30	1.012	0.100	0.101	Plot 13
20450	829.0	1RB	Left Tilt	24.45	24.50	-2.22	1.012	0.048	0.049	
20450	829.0	1RB	Right Cheek	24.45	24.50	-3.06	1.012	0.091	0.092	
20450	829.0	1RB	Right Tilt	24.45	24.50	-1.18	1.012	0.040	0.040	
20450	829.0	50%RB	Left Cheek	23.99	24.00	2.05	1.002	0.051	0.051	
20450	829.0	50%RB	Left Tilt	23.99	24.00	2.45	1.002	0.025	0.025	
20450	829.0	50%RB	Right Cheek	23.99	24.00	-3.96	1.002	0.046	0.046	
20450	829.0	50%RB	Right Tilt	23.99	24.00	4.71	1.002	0.018	0.018	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
20450	829.0	1RB	Front	24.45	24.50	2.37	1.012	0.074	0.075	
20450	829.0	1RB	Rear	24.45	24.50	-0.23	1.012	0.128	0.129	Plot 14
20450	829.0	1RB	Left	24.45	24.50	-4.20	1.012	0.066	0.067	
20450	829.0	1RB	Right	24.45	24.50	-2.36	1.012	0.060	0.061	
20450	829.0	1RB	Bottom	24.45	24.50	3.97	1.012	0.054	0.055	
20450	829.0	50%RB	Front	23.99	24.00	4.70	1.002	0.038	0.038	
20450	829.0	50%RB	Rear	23.99	24.00	-2.88	1.002	0.065	0.065	
20450	829.0	50%RB	Left	23.99	24.00	0.96	1.002	0.034	0.034	
20450	829.0	50%RB	Right	23.99	24.00	-3.56	1.002	0.029	0.029	
20450	829.0	50%RB	Bottom	23.99	24.00	3.52	1.002	0.022	0.022	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**SAR Values [LTE Band 12]**

Ch.	Freq. (MHz)	Channe l Type (20M)	Test Position	Condu cted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
23060	704.0	1RB	Left Cheek	24.34	24.50	-0.57	1.038	0.087	0.090	Plot 15
23060	704.0	1RB	Left Tilt	24.34	24.50	-2.05	1.038	0.043	0.045	
23060	704.0	1RB	Right Cheek	24.34	24.50	3.64	1.038	0.075	0.078	
23060	704.0	1RB	Right Tilt	24.34	24.50	-4.58	1.038	0.037	0.038	
23060	704.0	50%RB	Left Cheek	23.71	24.00	2.09	1.069	0.045	0.048	
23060	704.0	50%RB	Left Tilt	23.71	24.00	-4.52	1.069	0.022	0.024	
23060	704.0	50%RB	Right Cheek	23.71	24.00	3.33	1.069	0.040	0.043	
23060	704.0	50%RB	Right Tilt	23.71	24.00	-2.29	1.069	0.017	0.018	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
23060	704.0	1RB	Front	24.34	24.50	-4.52	1.038	0.198	0.205	
23060	704.0	1RB	Rear	24.34	24.50	-0.28	1.038	0.285	0.296	Plot 16
23060	704.0	1RB	Left	24.34	24.50	-4.52	1.038	0.186	0.193	
23060	704.0	1RB	Right	24.34	24.50	-2.75	1.038	0.179	0.186	
23060	704.0	1RB	Bottom	24.34	24.50	4.63	1.038	0.155	0.161	
23060	704.0	50%RB	Front	23.71	24.00	0.98	1.069	0.100	0.107	
23060	704.0	50%RB	Rear	23.71	24.00	-2.56	1.069	0.143	0.153	
23060	704.0	50%RB	Left	23.71	24.00	2.30	1.069	0.093	0.099	
23060	704.0	50%RB	Right	23.71	24.00	-3.33	1.069	0.088	0.094	
23060	704.0	50%RB	Bottom	23.71	24.00	0.56	1.069	0.076	0.081	

SAR Values [LTE Band 41]

Ch.	Freq. (MHz)	Channe l Type (20M)	Test Position	Condu cted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
40620	2593.0	1RB	Left Cheek	24.43	24.50	-0.01	1.016	0.125	0.127	Plot 17
40620	2593.0	1RB	Left Tilt	24.43	24.50	-4.52	1.016	0.061	0.062	
40620	2593.0	1RB	Right Cheek	24.43	24.50	-3.02	1.016	0.114	0.116	
40620	2593.0	1RB	Right Tilt	24.43	24.50	-4.74	1.016	0.056	0.057	
41490	2680.0	50%RB	Left Cheek	23.29	23.50	2.06	1.050	0.063	0.066	
41490	2680.0	50%RB	Left Tilt	23.29	23.50	-1.18	1.050	0.031	0.033	
41490	2680.0	50%RB	Right Cheek	23.29	23.50	3.96	1.050	0.056	0.059	
41490	2680.0	50%RB	Right Tilt	23.29	23.50	2.05	1.050	0.025	0.026	
measured / reported SAR numbers - Body (hotspot open, distance 10mm)										
40620	2593.0	1RB	Front	24.43	24.50	-4.52	1.016	0.081	0.082	Plot 18
40620	2593.0	1RB	Rear	24.43	24.50	-0.01	1.016	0.152	0.154	
40620	2593.0	1RB	Left	24.43	24.50	-4.78	1.016	0.075	0.076	
40620	2593.0	1RB	Right	24.43	24.50	-3.65	1.016	0.066	0.067	
40620	2593.0	1RB	Bottom	24.43	24.50	1.52	1.016	0.057	0.058	
41490	2680.0	50%RB	Front	23.29	23.50	0.98	1.050	0.042	0.044	
41490	2680.0	50%RB	Rear	23.29	23.50	2.25	1.050	0.078	0.082	
41490	2680.0	50%RB	Left	23.29	23.50	1.15	1.050	0.035	0.037	
41490	2680.0	50%RB	Right	23.29	23.50	-0.09	1.050	0.029	0.030	
41490	2680.0	50%RB	Bottom	23.29	23.50	4.77	1.050	0.022	0.023	



**SAR Values [WIFI2.4G]**

Ch.	Freq. (MHz)	Service	Test Position	Conducte d Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
11	2462	802.11b	Left Cheek	15.75	16.00	-3.65	1.059	0.244	0.258	
11	2462	802.11b	Left Tilt	15.75	16.00	0.85	1.059	0.121	0.128	
11	2462	802.11b	Right Cheek	15.75	16.00	-4.71	1.059	0.226	0.239	
11	2462	802.11b	Right Tilt	15.75	16.00	1.63	1.059	0.195	0.207	
6	2437	802.11g	Left Cheek	15.89	16.00	-1.13	1.026	0.263	0.270	Plot 19
6	2437	802.11g	Left Tilt	15.89	16.00	-4.13	1.026	0.132	0.135	
6	2437	802.11g	Right Cheek	15.89	16.00	3.57	1.026	0.249	0.255	
6	2437	802.11g	Right Tilt	15.89	16.00	0.20	1.026	0.124	0.127	
measured / reported SAR numbers - Body (hotspot open, distance 10mm) <SIM1>										
11	2462	802.11b	Front	15.75	16.00	-3.05	1.059	0.042	0.044	
11	2462	802.11b	Rear	15.75	16.00	2.20	1.059	0.079	0.084	
11	2462	802.11b	Right	15.75	16.00	-4.17	1.059	0.033	0.035	
11	2462	802.11b	Top	15.75	16.00	3.09	1.059	0.021	0.022	
6	2437	802.11g	Front	15.89	16.00	-2.35	1.026	0.053	0.054	
6	2437	802.11g	Rear	15.89	16.00	-0.59	1.026	0.093	0.095	Plot 20
6	2437	802.11g	Right	15.89	16.00	-4.65	1.026	0.045	0.046	
6	2437	802.11g	Top	15.89	16.00	-1.13	1.026	0.038	0.039	

SAR Values [WIFI5.2G]

Ch.	Freq. (MHz)	Service	Test Position	Conducte d Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reported	
measured / reported SAR numbers – Head										
36	5180	802.11a	Left Cheek	13.99	14.00	2.89	1.002	0.191	0.191	Plot 21
36	5180	802.11a	Left Tilt	13.99	14.00	-1.74	1.002	0.095	0.095	
36	5180	802.11a	Right Cheek	13.99	14.00	0.96	1.002	0.184	0.184	
36	5180	802.11a	Right Tilt	13.99	14.00	3.32	1.002	0.087	0.087	
measured / reported SAR numbers - Body (hotspot open, distance 10mm) <SIM1>										
36	5180	802.11a	Front	13.99	14.00	-1.05	1.002	0.074	0.074	
36	5180	802.11a	Rear	13.99	14.00	-2.05	1.002	0.132	0.132	Plot 22
36	5180	802.11a	Right	13.99	14.00	4.33	1.002	0.065	0.065	
36	5180	802.11a	Top	13.99	14.00	2.96	1.002	0.057	0.057	

SAR Values [WIFI5.3G]

Ch.	Freq. (MHz)	Service	Test Position	Conducte d Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR _{1-g} results(W/kg)		Graph Results
								Measured	Reporte d	
measured / reported SAR numbers – Head										
64	5320	802.11a	Left Cheek	14.81	15.00	-1.25	1.045	0.154	0.161	Plot 23
64	5320	802.11a	Left Tilt	14.81	15.00	3.98	1.045	0.080	0.084	
64	5320	802.11a	Right Cheek	14.81	15.00	1.45	1.045	0.144	0.150	
64	5320	802.11a	Right Tilt	14.81	15.00	0.02	1.045	0.069	0.072	
measured / reported SAR numbers - Body (hotspot open, distance 10mm) <SIM1>										
64	5320	802.11a	Front	14.81	15.00	-4.78	1.045	0.089	0.093	
64	5320	802.11a	Rear	14.81	15.00	-3.93	1.045	0.122	0.127	Plot 24
64	5320	802.11a	Right	14.81	15.00	3.96	1.045	0.077	0.080	
64	5320	802.11a	Top	14.81	15.00	1.52	1.045	0.068	0.071	

Remark:

1. The value with blue color is the maximum SAR Value of each test band.





2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

4.3.2 Standalone SAR Test Exclusion Considerations and Estimated SAR

Per KDB447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion;

• $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$ W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

• 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

Estimated stand alone SAR					
Communication system	Frequency (MHz)	Configuration	Maximum Power (dBm)	Separation Distance (mm)	Estimated SAR _{1-g} (W/kg)
Bluetooth*	2450	Head	6.0	5	0.167
Bluetooth*	2450	Hotspot	6.0	10	0.083
Bluetooth*	2450	Body-worn	6.0	10	0.083

Remark:

1. Bluetooth*- Including Lower power Bluetooth
2. Maximum average power including tune-up tolerance;
3. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
4. Body as body use distance is 10mm from manufacturer declaration of user manual





4.4 Simultaneous TX SAR Considerations

4.4.1 Introduction

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 4 antennas, WWAN main antenna, WWAN diversity antenna(RX only), and WiFi/BT antenna supports 2.4Wi-Fi and BT. The 2 TX antennas can always transmit simultaneously. The work mode combination is showed as below table.;

Application Simultaneous Transmission information:

Combination No.	Mode
1	WWAN+WIFI
2	WWAN+BT

4.4.2 Evaluation of Simultaneous SAR

Head Exposure Conditions

Simultaneous transmission SAR for WiFi and GSM

Test Position	GSM850 Reported SAR1-g (W/kg)	GSM1900 Reported SAR1-g (W/kg)	WiFi2.4G Reported SAR1-g (W/kg)	WiFi5.2G Reported SAR1-g (W/kg)	WiFi5.3G Reported SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.146	0.116	0.270	0.191	0.161	0.416	1.6	no	no
Left Tilt	0.073	0.059	0.135	0.095	0.084	0.208	1.6	no	no
Right Cheek	0.127	0.100	0.255	0.184	0.150	0.382	1.6	no	no
Right Tilt	0.066	0.047	0.127	0.087	0.072	0.193	1.6	no	no

Simultaneous transmission SAR for WiFi and UMTS

Test Position	UMTS Band V Reported SAR1-g (W/kg)	UMTS Band II Reported SAR1-g (W/kg)	WiFi2.4G Reported SAR1-g (W/kg)	WiFi5.2G Reported SAR1-g (W/kg)	WiFi5.3G Reported SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.092	0.231	0.270	0.191	0.161	0.501	1.6	no	no
Left Tilt	0.047	0.113	0.135	0.095	0.084	0.248	1.6	no	no
Right Cheek	0.086	0.213	0.255	0.184	0.150	0.468	1.6	no	no
Right Tilt	0.040	0.108	0.127	0.087	0.072	0.235	1.6	no	no

Simultaneous transmission SAR for WiFi and LTE

Reported SAR1-g(W/kg)	Test Position			
	Left Cheek	Left Tilt	Right Cheek	Right Tilt
LTE Band2	0.220	0.109	0.205	0.094
LTE Band4	0.340	0.170	0.325	0.158
LTE Band5	0.101	0.049	0.092	0.040
LTE Band12	0.090	0.045	0.078	0.038
LTE Band41	0.127	0.062	0.116	0.057
WiFi2.4G	0.270	0.135	0.255	0.127
WiFi5.2G	0.191	0.095	0.184	0.087
WiFi5.3G	0.161	0.084	0.150	0.072
MAX. Σ SAR1-g (W/kg)	0.610	0.305	0.580	0.285
SAR1-g Limit (W/kg)	1.6	1.6	1.6	1.6
Peak location separation ratio	no	no	no	no
Simut Meas. Required	no	no	no	no



**Simultaneous transmission SAR for BT and GSM**

Test Position	GSM850 Reported SAR1-g (W/kg)	GSM1900 Reported SAR1-g (W/kg)	BT Estimated SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.146	0.116	0.167	0.313	1.6	no	no
LeftTilt	0.073	0.059	0.167	0.240	1.6	no	no
Right Cheek	0.127	0.100	0.167	0.294	1.6	no	no
Right Tilt	0.066	0.047	0.167	0.233	1.6	no	no

Simultaneous transmission SAR for BT and UMTS

Test Position	UMTS Band V Reported SAR1-g (W/kg)	UMTS Band II Reported SAR1-g (W/kg)	BT Estimated SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Left Cheek	0.092	0.231	0.167	0.398	1.6	no	no
LeftTilt	0.047	0.113	0.167	0.280	1.6	no	no
RightChek	0.086	0.213	0.167	0.380	1.6	no	no
Right Tilt	0.040	0.108	0.167	0.275	1.6	no	no

Simultaneous transmission SAR for BT and LTE

Reported SAR1-g(W/kg)	Test Position			
	Left Cheek	Left Tilt	Right Cheek	Right Tilt
LTE Band2	0.220	0.109	0.205	0.094
LTE Band4	0.340	0.170	0.325	0.158
LTE Band5	0.101	0.049	0.092	0.040
LTE Band12	0.090	0.045	0.078	0.038
LTE Band41	0.127	0.062	0.116	0.057
BT Estimated SAR1-g (W/kg)	0.167	0.167	0.167	0.167
MAX. Σ SAR1-g (W/kg)	0.507	0.337	0.492	0.325
SAR1-g Limit (W/kg)	1.6	1.6	1.6	1.6
Peak location separation ratio	no	no	no	no
Simut Meas. Required	no	no	no	no

Body Hotspot Exposure Conditions**Simultaneous transmission SAR for WiFi and GSM**

Test Position	GSM850 Reported SAR1-g (W/kg)	GSM1900 Reported SAR1-g (W/kg)	WiFi2.4G Reported SAR1-g (W/kg)	WiFi5.2G Reported SAR1-g (W/kg)	WiFi5.3G Reported SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Front	0.187	0.192	0.054	0.074	0.093	0.285	1.6	no	no
Rear	0.238	0.260	0.095	0.132	0.127	0.392	1.6	no	no
Left	0.176	0.172	/	/	/	0.176	1.6	no	no
Right	0.167	0.158	0.046	0.065	0.080	0.247	1.6	no	no
Bottom	0.158	0.142	/	/	/	0.158	1.6	no	no
Top	/	/	0.039	0.057	0.071	0.071	1.6	no	no

Simultaneous transmission SAR for WiFi and UMTS

Test Position	UMTS Band V Reported SAR1-g (W/kg)	UMTS Band II Reported SAR1-g (W/kg)	WiFi2.4G Reported SAR1-g (W/kg)	WiFi5.2G Reported SAR1-g (W/kg)	WiFi5.3G Reported SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Front	0.079	0.442	0.054	0.074	0.093	0.535	1.6	no	no
Rear	0.129	0.547	0.095	0.132	0.127	0.679	1.6	no	no
Left	0.073	0.419	/	/	/	0.419	1.6	no	no
Right	0.067	0.408	0.046	0.065	0.080	0.488	1.6	no	no
Bottom	0.060	0.276	/	/	/	0.276	1.6	no	no
Top	/	/	0.039	0.057	0.071	0.071	1.6	no	no



**SAR for WiFi and LTE**

Reported SAR1-g(W/kg)	Test Position					
	Front	Rear	Left	Right	Bottom	Top
LTE Band2	0.396	0.551	0.382	0.377	0.359	/
LTE Band4	0.813	1.199	0.800	0.791	0.782	/
LTE Band5	0.075	0.129	0.067	0.061	0.055	/
LTE Band12	0.205	0.296	0.193	0.186	0.161	/
LTE Band41	0.082	0.154	0.076	0.067	0.058	/
WiFi2.4G	0.054	0.095	/	0.046	/	0.039
WiFi5.2G	0.074	0.132	/	0.065	/	0.057
WiFi5.3G	0.093	0.127	/	0.080	/	0.071
MAX. Σ SAR1-g (W/kg)	0.906	1.331	0.800	0.871	0.782	0.071
SAR1-g Limit (W/kg)	1.6	1.6	1.6	1.6	1.6	1.6
Peak location separation ratio	no	no	no	no	no	no
Simut Meas. Required	no	no	no	no	no	no

Simultaneous transmission SAR for BT and GSM

Test Position	GSM850 Reported SAR1-g (W/kg)	GSM1900 Reported SAR1-g (W/kg)	BT Estimated SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Front	0.187	0.192	0.083	0.275	1.6	no	no
Rear	0.238	0.260	0.083	0.343	1.6	no	no
Left	0.176	0.172	/	0.176	1.6	no	no
Right	0.167	0.158	0.083	0.250	1.6	no	no
Bottom	0.158	0.142	/	0.158	1.6	no	no
Top	/	/	0.083	0.083	1.6	no	no

Simultaneous transmission SAR for BT and UMTS

Test Position	UMTS Band V Reported SAR1-g (W/kg)	UMTS Band II Reported SAR1-g (W/kg)	BT Estimated SAR1-g (W/kg)	MAX. Σ SAR1-g (W/kg)	SAR1-g Limit (W/kg)	Peak location separation ratio	Simut Meas. Required
Front	0.079	0.442	0.083	0.525	1.6	no	no
Rear	0.129	0.547	0.083	0.630	1.6	no	no
Left	0.073	0.419	/	0.419	1.6	no	no
Right	0.067	0.408	0.083	0.491	1.6	no	no
Bottom	0.060	0.276	/	0.276	1.6	no	no
Top	/	/	0.083	0.083	1.6	no	no

Simultaneous transmission SAR for BT and LTE

Reported SAR1-g(W/kg)	Test Position					
	Front	Rear	Left	Right	Bottom	Top
LTE Band2	0.396	0.551	0.382	0.377	0.359	/
LTE Band4	0.813	1.199	0.800	0.791	0.782	/
LTE Band5	0.075	0.129	0.067	0.061	0.055	/
LTE Band12	0.205	0.296	0.193	0.186	0.161	/
LTE Band41	0.082	0.154	0.076	0.067	0.058	/
BT Estimated SAR1-g (W/kg)	0.083	0.083	/	0.083	/	0.083
MAX. Σ SAR1-g (W/kg)	0.896	1.282	0.800	0.874	0.782	0.083
SAR1-g Limit (W/kg)	1.6	1.6	1.6	1.6	1.6	1.6
Peak location separation ratio	no	no	no	no	no	no
Simut Meas. Required	no	no	no	no	no	no

Note:

1. The WiFi and BT share same antenna, so cannot transmit at same time.
2. The value with block color is the maximum values of standalone
3. The value with blue color is the maximum values of Σ SAR1-g





4.5 SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 3) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 4) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 5) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 6) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Configuration	Test Position	Repeated SAR (yes/no)	Highest Measured SAR _{1-g} (W/kg)	First Repeated	
						Measured SAR _{1-g} (W/kg)	Largest to Smallest SAR Ratio
750	LTE Band 12	Standalone	Body-Rear	no	0.285	n/a	n/a
835	GSM850	Standalone	Body-Rear	no	0.224	n/a	n/a
	WCDMA Band V	Standalone	Body-Rear	no	0.116	n/a	n/a
	LTE Band 5	Standalone	Body-Rear	no	0.128	n/a	n/a
1800	LTE Band 4	Standalone	Body-Rear	no	1.174	1.152	1.019
1900	GSM1900	Standalone	Body-Rear	no	0.239	n/a	n/a
	WCDMA Band II	Standalone	Body-Rear	no	0.492	n/a	n/a
	LTE Band 2	Standalone	Body-Rear	no	0.508	n/a	n/a
2450	2.4GWLAN	Standalone	Cheek- Left	no	0.263	n/a	n/a
2600	LTE Band 41	Standalone	Body-Rear	no	0.152	n/a	n/a
5200	5.2GWLAN	Standalone	Cheek- Left	no	0.191	n/a	n/a
5400	5.3GWLAN	Standalone	Cheek- Left	no	0.154	n/a	n/a

Remark:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 or 3 (1-g or 10-g respectively)





4.6 General description of test procedures

1. The DUT is tested using CMU 200 communications testers as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.
2. Test positions as described in the tables above are in accordance with the specified test standard.
3. Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
4. Tests in head position with GSM were performed in voice mode with 1 timeslot unless GPRS/EGPRS/DTM function allows parallel voice and data traffic on 2 or more timeslots.
5. UMTS was tested in RMC mode with 12.2 kbit/s and TPC bits set to 'all 1'.
6. WiFi was tested in 802.11b/g/n mode with 1 Mbit/s and 6 Mbit/s. According to KDB 248227 the SAR testing for 802.11g/n is not required since When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
7. Required WiFi test channels were selected according to KDB 248227
8. According to FCC KDB pub 248227 D01, When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement and when there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.
9. According to FCC KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WiFi hot spot mode.
10. Per FCC KDB pub 941225 D06 the edges with antennas within 2.5 cm are required to be evaluated for SAR to cover WiFi hot spot function.
11. According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
12. According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
13. IEEE 1528-2003 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band.
14. Per KDB648474 D04 require when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is < 1.2 W/kg.
15. Per KDB648474 D04 require when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface)
16. 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.
17. Per KDB648474 D04 require for phablet SAR test considerations. For SMARTPHONES with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
18. 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.

4.7 Measurement Uncertainty (450MHz-6GHz)

Not required as SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR according to KDB865664D01.





4.8 System Check Results




Test mode:750MHz(Head)

Product Description:Validation

Model:Dipole SID750

E-Field Probe: SSE2(SN 25/22 EPGO376)

Test Date: July 26, 2023

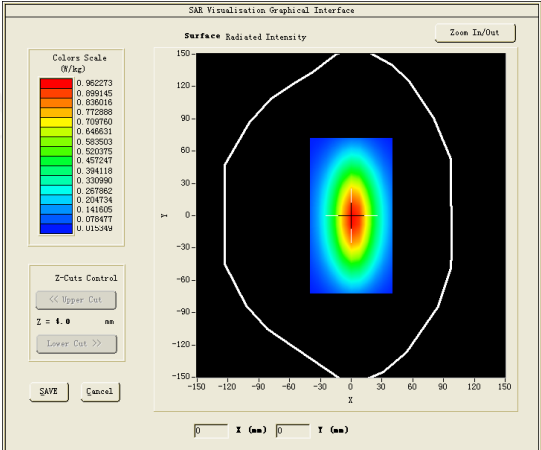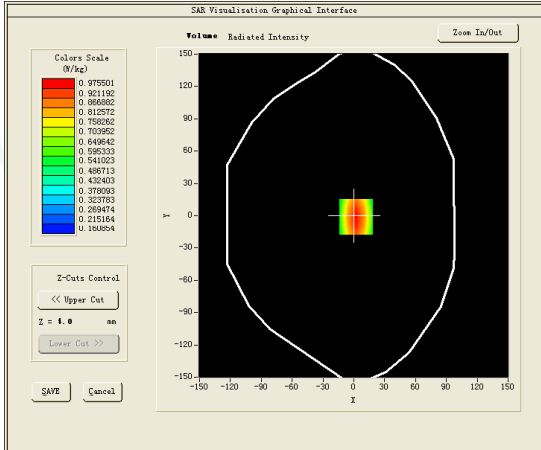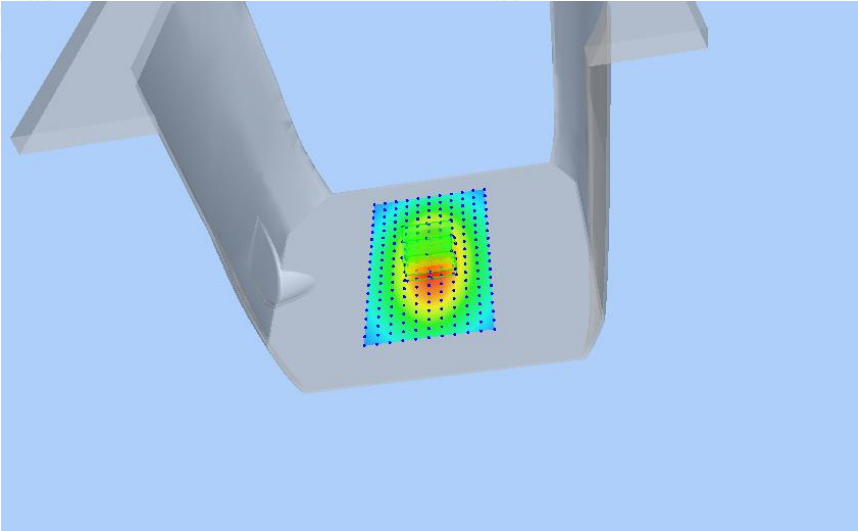Medium(liquid type)	HSL_750
Frequency (MHz)	750.0000
Relative permittivity (real part)	43.62
Conductivity (S/m)	0.86
Input power	100mW
Crest Factor	1.0
Conversion Factor	1.69
Variation (%)	3.980000
SAR 10g (W/Kg)	0.562122
SAR 1g (W/Kg)	0.851352
SURFACE SAR	VOLUME SAR
	
	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test mode:835MHz(Head)




Product Description:Validation

Model:Dipole SID835

E-Field Probe:SSE2(SN 25/22 EPGO376)

Test Date: July 27, 2023

Medium(liquid type)	HSL_850
Frequency (MHz)	835.0000
Relative permittivity (real part)	42.64
Conductivity (S/m)	0.87
Input power	100mW
Crest Factor	1.0
Conversion Factor	1.75
Variation (%)	-0.060000
SAR 10g (W/Kg)	0.641431
SAR 1g (W/Kg)	0.947150
SURFACE SAR	VOLUME SAR

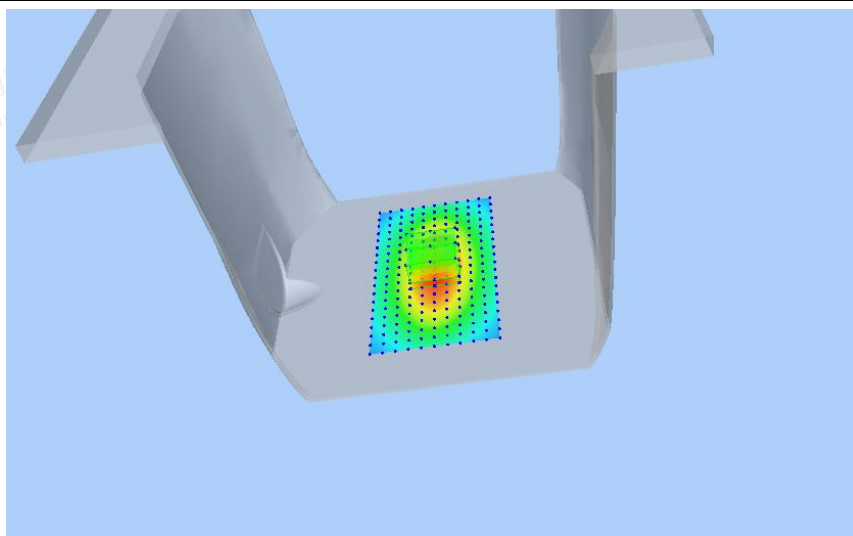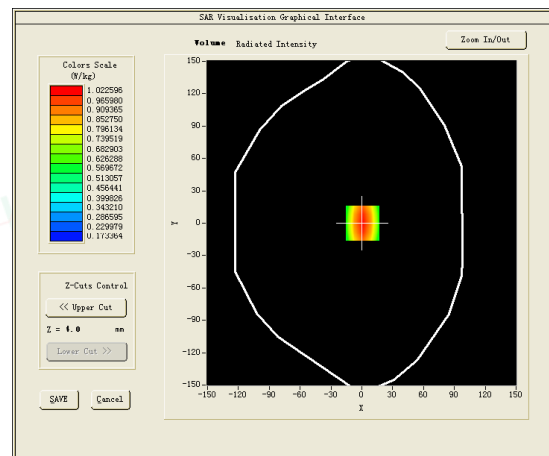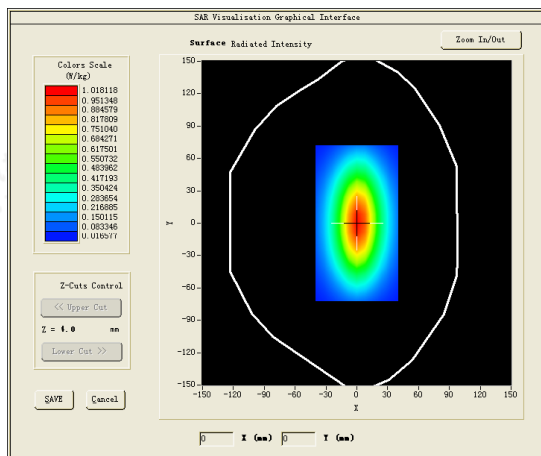

Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test mode:1800MHz(Head)
Product Description:Validation
Model :Dipole SID1800
E-Field Probe:SSE2(SN 25/22 EPGO376)
Test Date: July 28, 2023


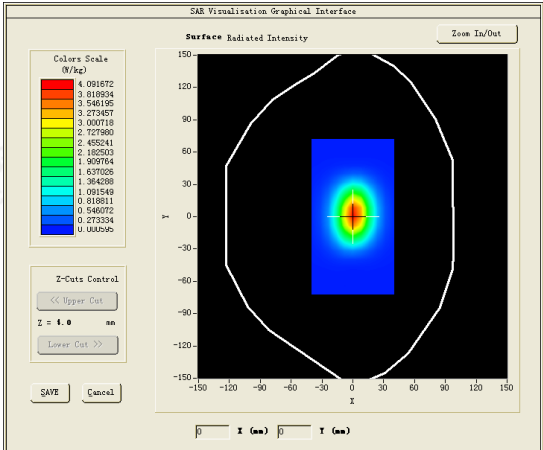
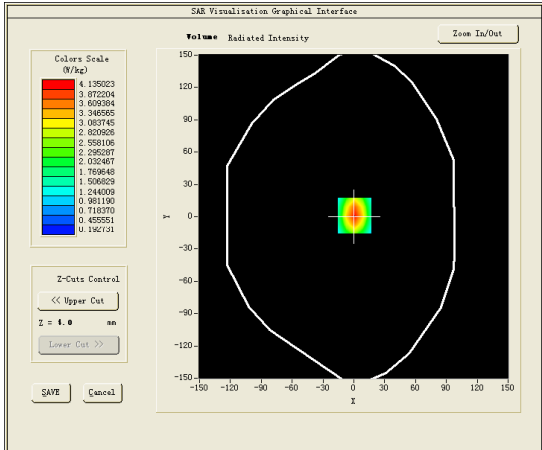
Medium(liquid type)	HSL_1800
Frequency (MHz)	1800.0000
Relative permittivity (real part)	41.33
Conductivity (S/m)	1.37
Input power	100mW
Crest Factor	1.0
Conversion Factor	2.09
Variation (%)	-4.850000
SAR 10g (W/Kg)	2.038284
SAR 1g (W/Kg)	3.833582
SURFACE SAR	VOLUME SAR
	

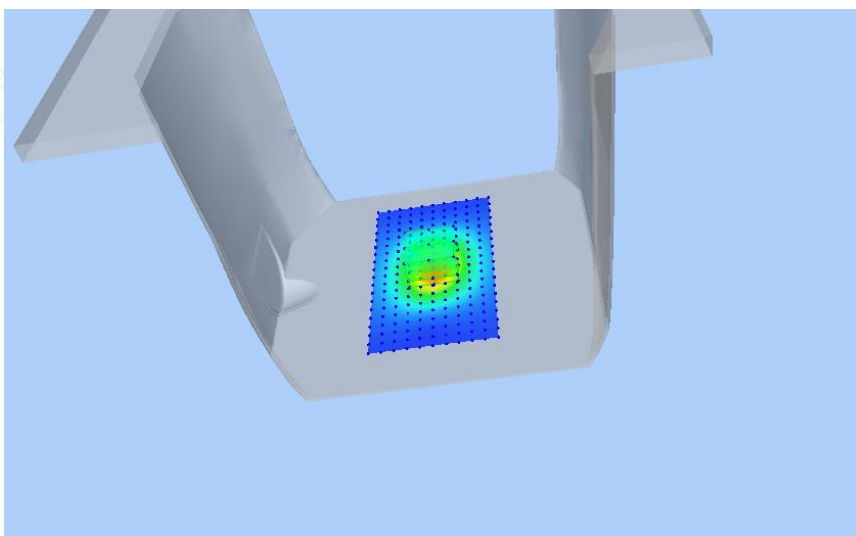



Test mode:1900MHz(Head)
Product Description:Validation
Model :Dipole SID1900
E-Field Probe: SSE2(SN 25/22 EPGO376)
Test Date: July 28, 2023

Medium(liquid type)	HSL_1900
Frequency (MHz)	1900.0000
Relative permittivity (real part)	38.62
Conductivity (S/m)	1.42
Input power	100mW
Crest Factor	1.0
Conversion Factor	2.14
Variation (%)	-2.300000
SAR 10g (W/Kg)	2.085152
SAR 1g (W/Kg)	3.975080
SURFACE SAR	VOLUME SAR

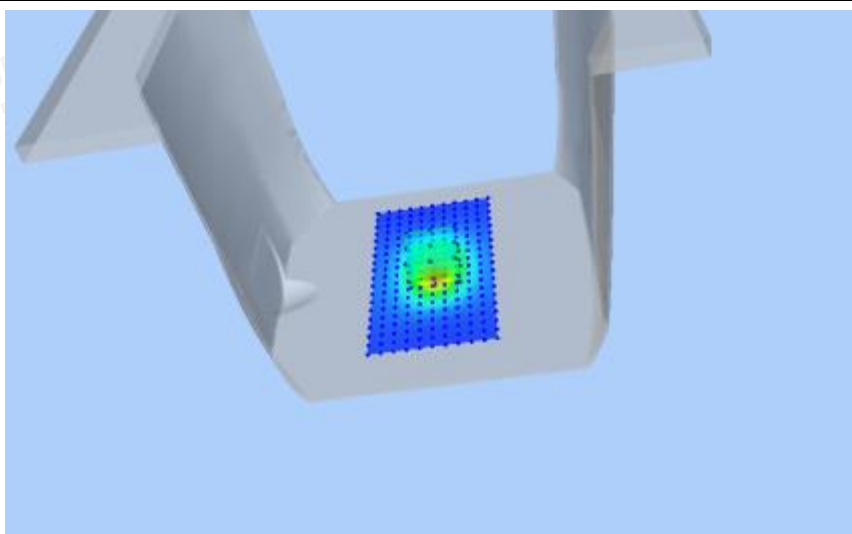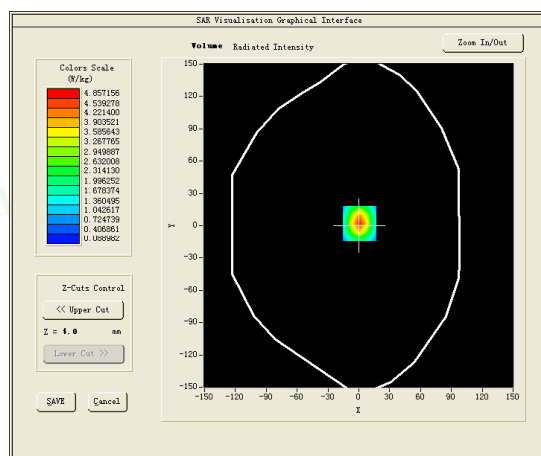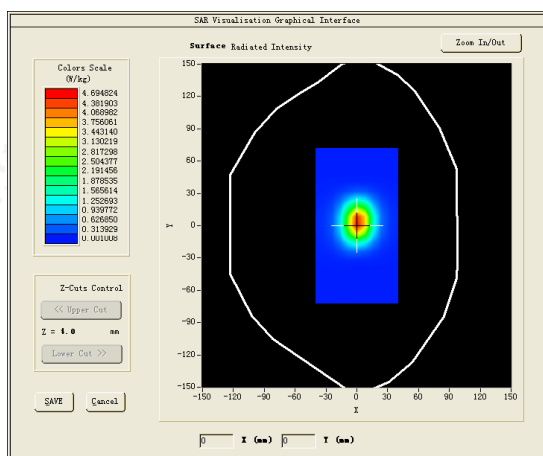





Test mode:2450MHz(Head)


Product Description:Validation

Model:Dipole SID2450

E-Field Probe:SSE2(SN 25/22 EPGO376)

Test Date: July 29, 2023

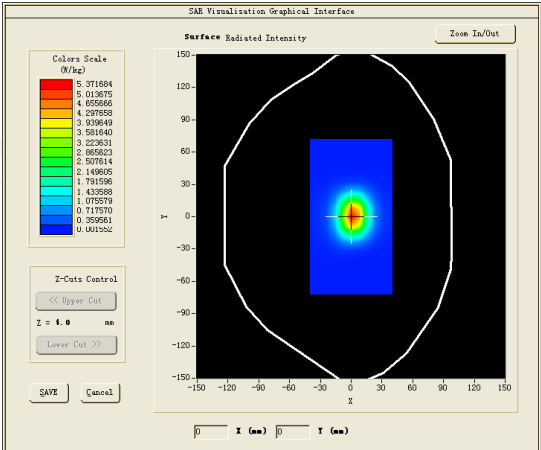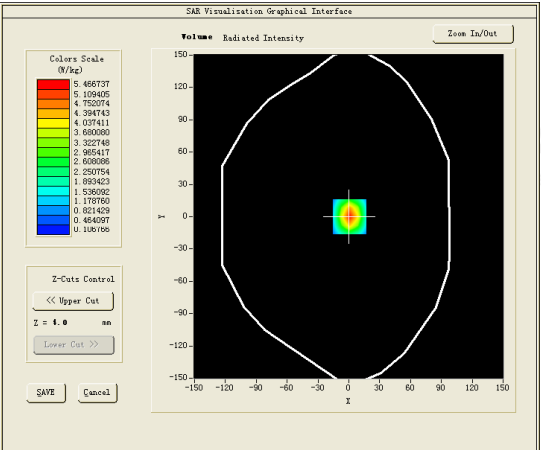Medium(liquid type)	HSL_2450
Frequency (MHz)	2450.0000
Relative permittivity (real part)	39.48
Conductivity (S/m)	1.78
Input power	100mW
Crest Factor	1.0
Conversion Factor	2.60
Variation (%)	-3.960000
SAR 10g (W/Kg)	2.502150
SAR 1g (W/Kg)	5.410144
SURFACE SAR	VOLUME SAR
	

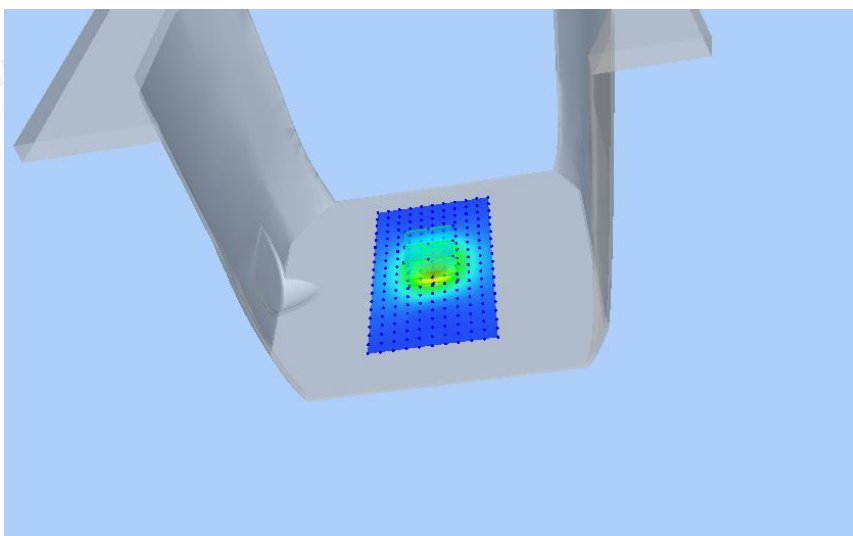

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test mode:2600MHz




Product Description:Validation

Model:Dipole SID2600

E-Field Probe: SSE2(SN 25/22 EPGO376)

Test Date: July 31, 2023

Medium(liquid type)	HSL_2600
Frequency (MHz)	2600.0000
Relative permittivity (real part)	38.66
Conductivity (S/m)	1.98
Input power	100mW
Crest Factor	1.0
Conversion Factor	2.39
Variation (%)	0.010000
SAR 10g (W/Kg)	2.362235
SAR 1g (W/Kg)	5.721023

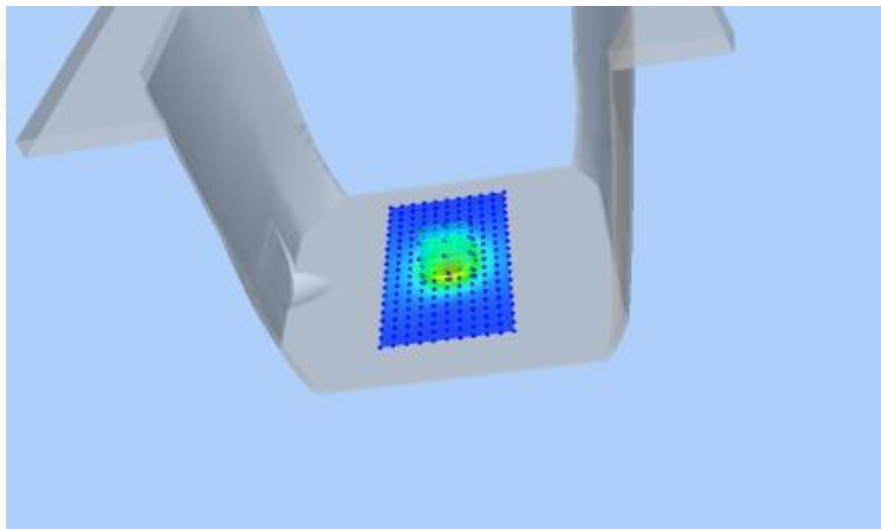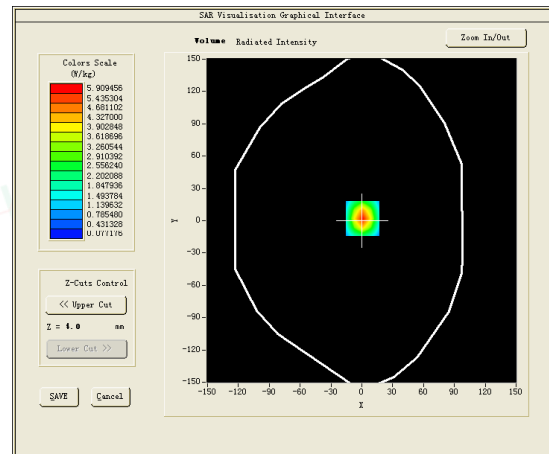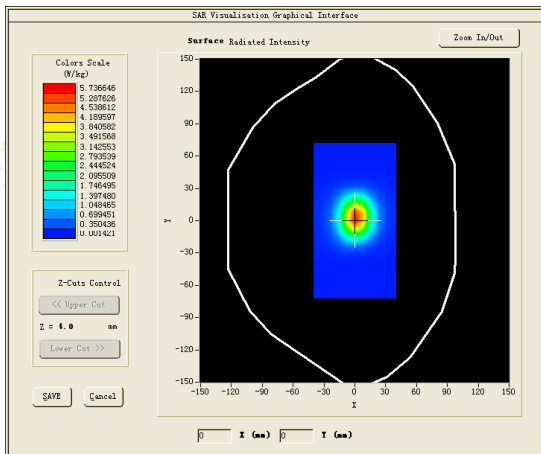SURFACE SAR**VOLUME SAR**

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China




Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test mode:5200MHz(Head)
Product Description:Validation
Model:Dipole SID5000
E-Field Probe: SSE2(SN 25/22 EPGO376)
Test Date: August 01, 2023

Medium(liquid type)	HSL _5000
Frequency (MHz)	5200.0000
Relative permittivity (real part)	36.24
Conductivity (S/m)	4.64
Input power	100mW
Crest Factor	1.0
Conversion Factor	1.85
Variation (%)	3.960000
SAR 10g (W/Kg)	5.966210
SAR 1g (W/Kg)	17.302034
SURFACE SAR	VOLUME SAR

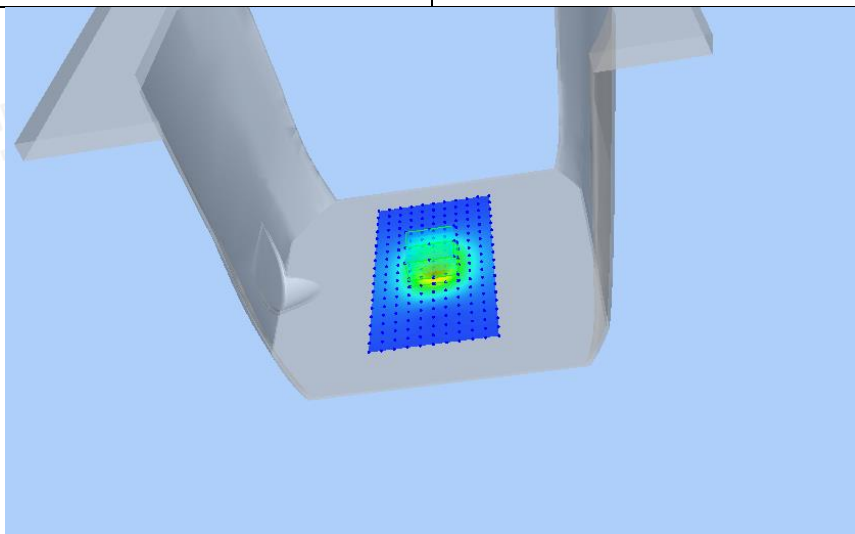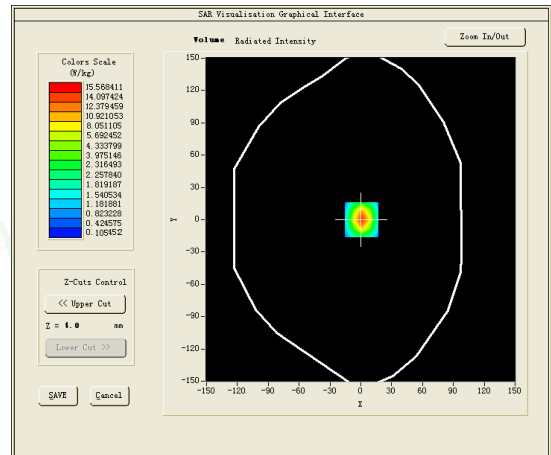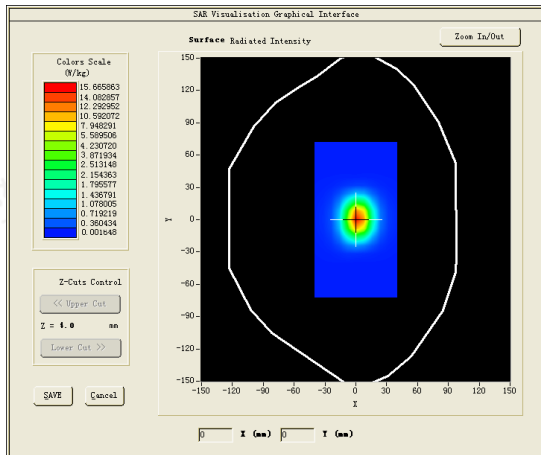




Test mode:5400MHz(Head)

Product Description:Validation

Model:Dipole SID5000

E-Field Probe: SSE2(SN 25/22 EPGO376)

Test Date: August 01, 2023

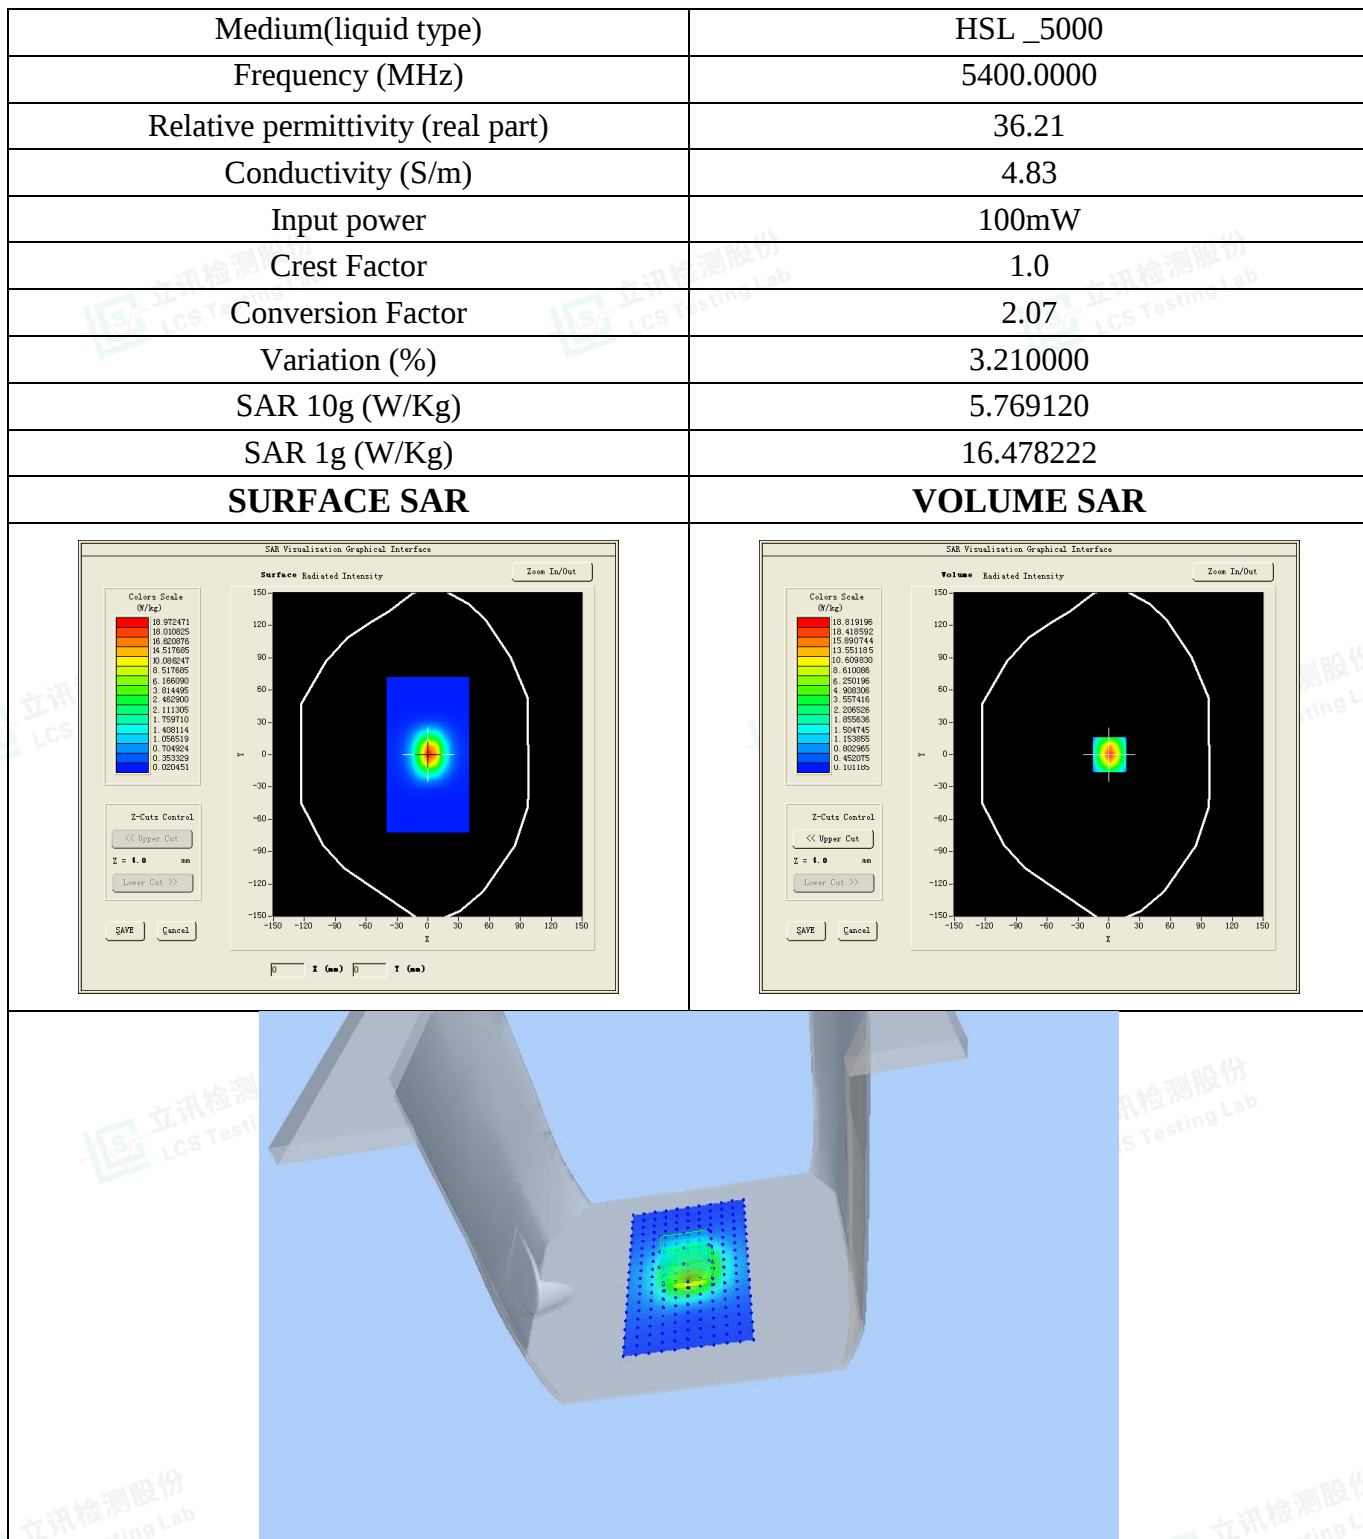

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4.9 SAR Test Graph Results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02;

#1





Test Mode: GSM 850MHz, High channel (Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 27, 2023

Medium (liquid type)	HSL_835
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.93
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	8.0
Conversion Factor	1.75
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.910000
SAR 10g (W/Kg)	0.112592
SAR 1g (W/Kg)	0.145505
SURFACE SAR	VOLUME SAR

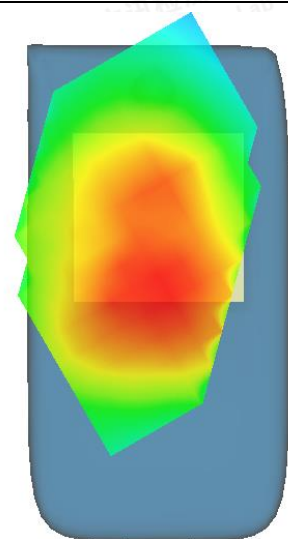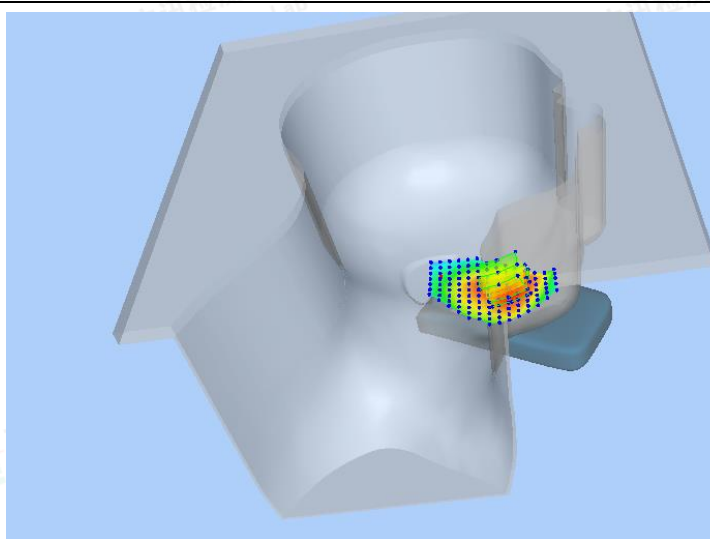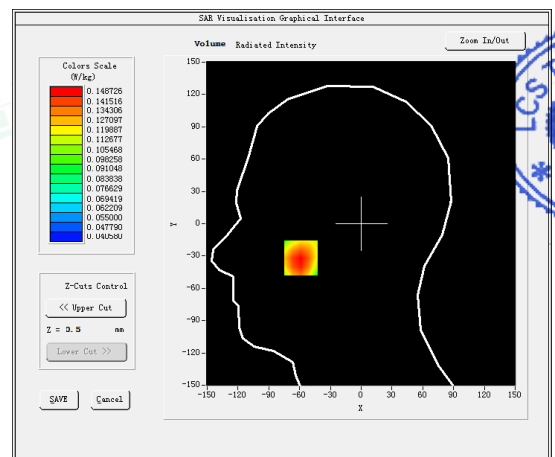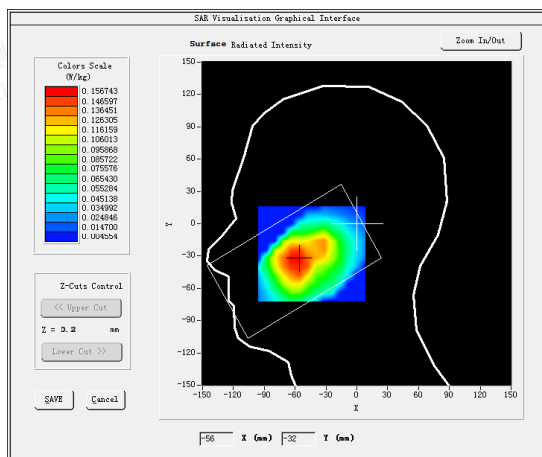

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#2





Test Mode: GSM850MHz, High channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 27, 2023

Medium(liquid type)	HSL_835
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.93
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	2.0
Conversion Factor	1.75
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.180000
SAR 10g (W/Kg)	0.169092
SAR 1g (W/Kg)	0.223841
SURFACE SAR	VOLUME SAR

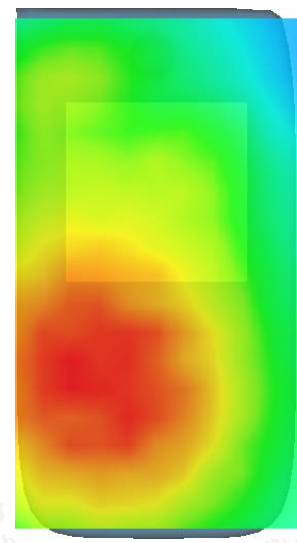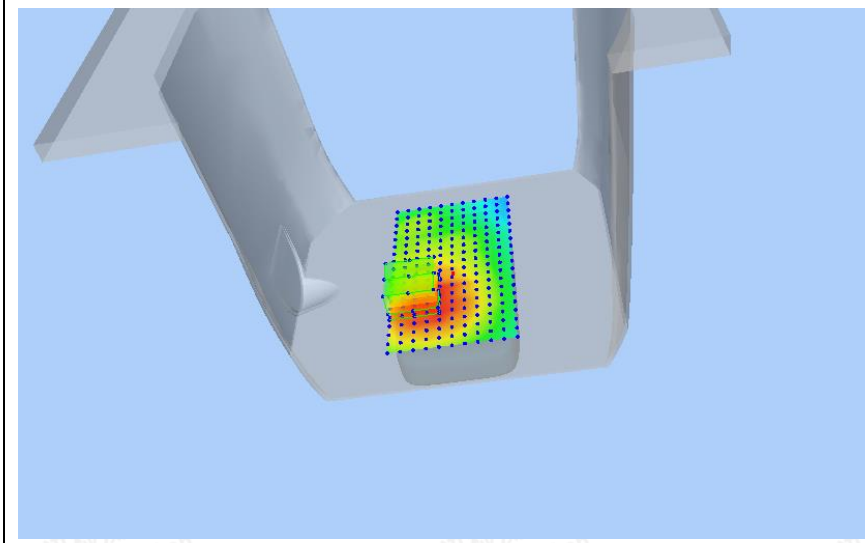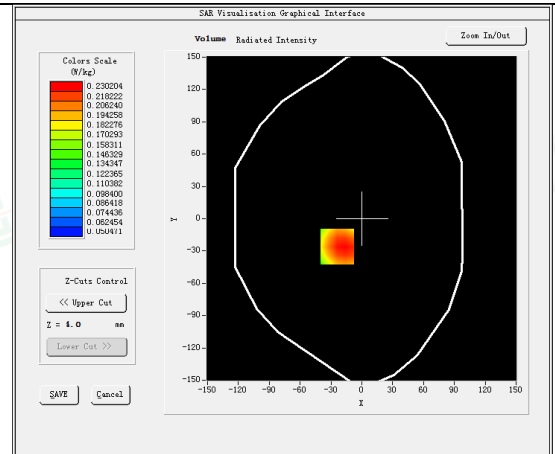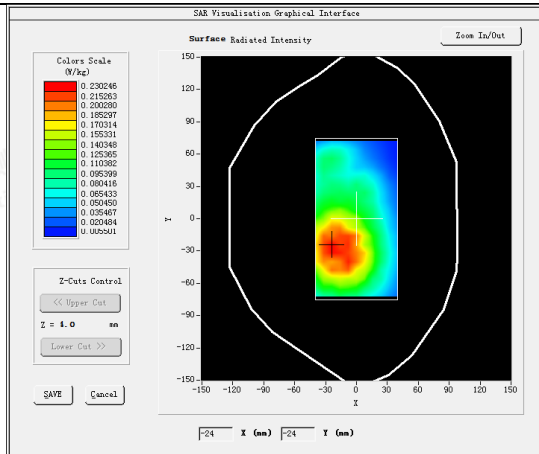

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




#3

Test Mode: GSM 1900MHz, Low channel(Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

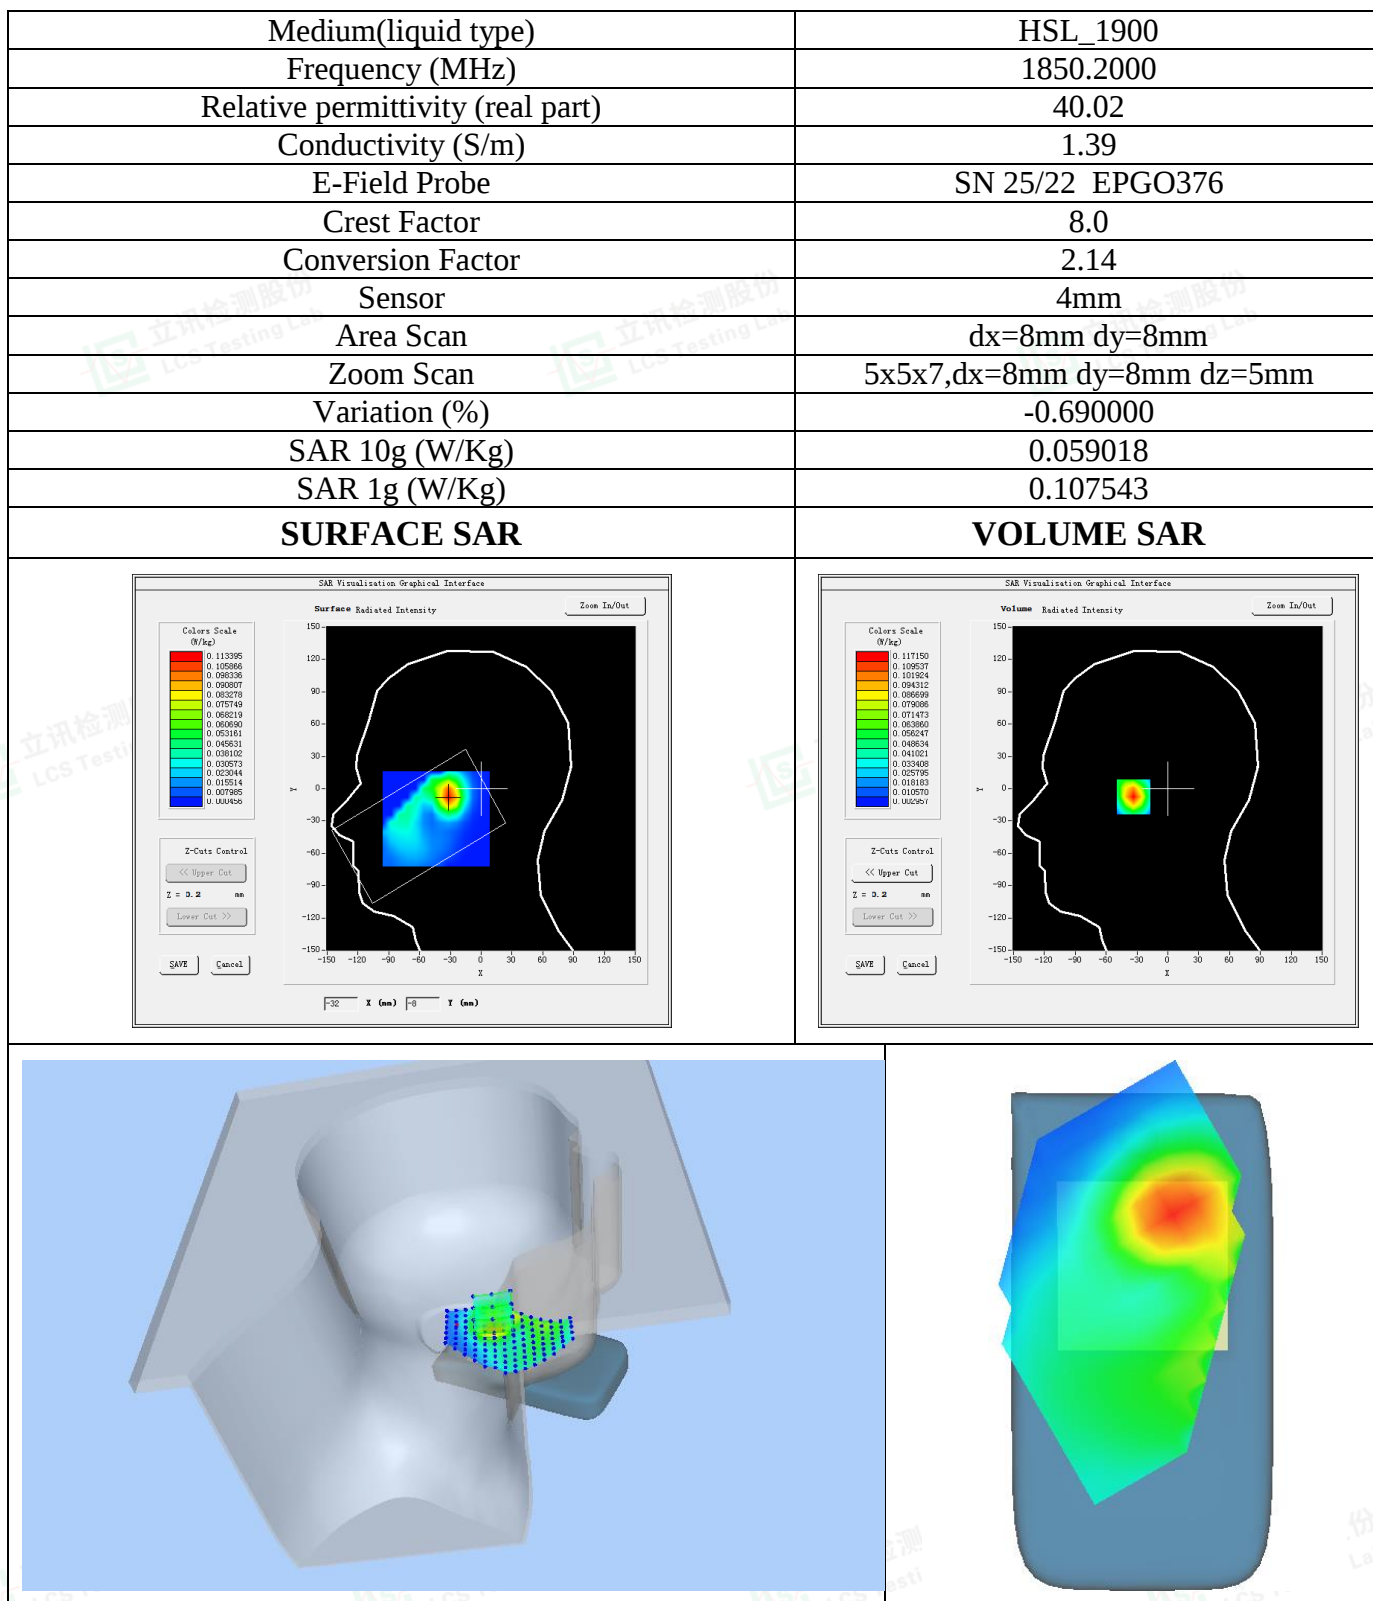

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#4





Test Mode: GPRS1900MHz, Low channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium(liquid type)	HSL_1900
Frequency (MHz)	1850.2000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.39
E-Field Probe	SN 25/22 EPGO376
Crest Factor	2.0
Conversion Factor	2.14
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.250000
SAR 10g (W/Kg)	0.145738
SAR 1g (W/Kg)	0.238740
SURFACE SAR	VOLUME SAR

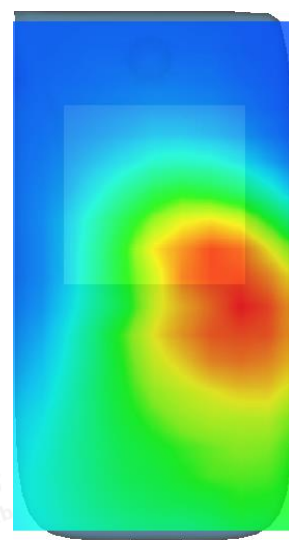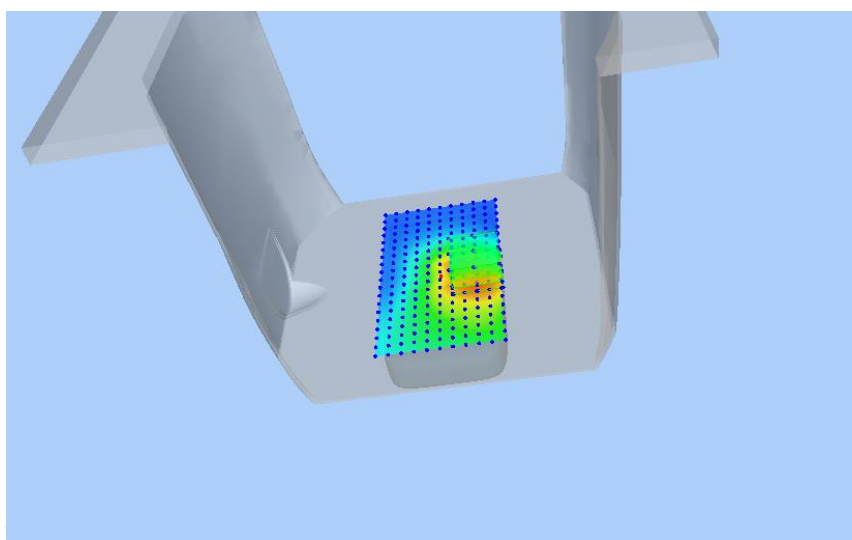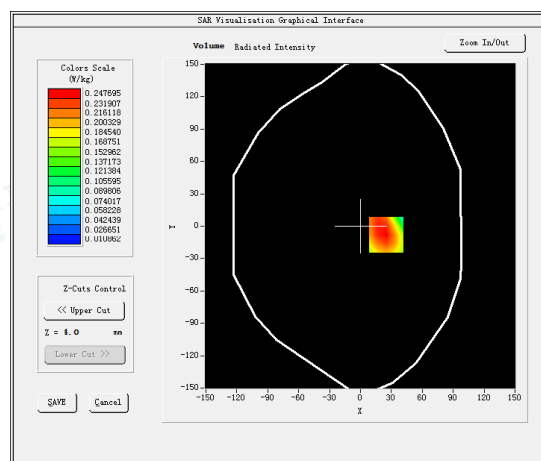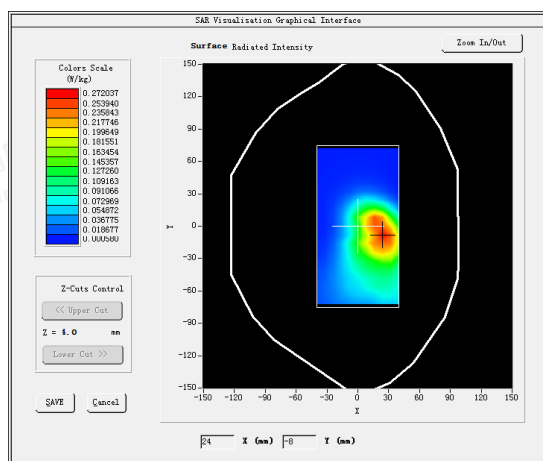

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity







#5

Test Mode:WCDMA Band V, Low channel(Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 27, 2023

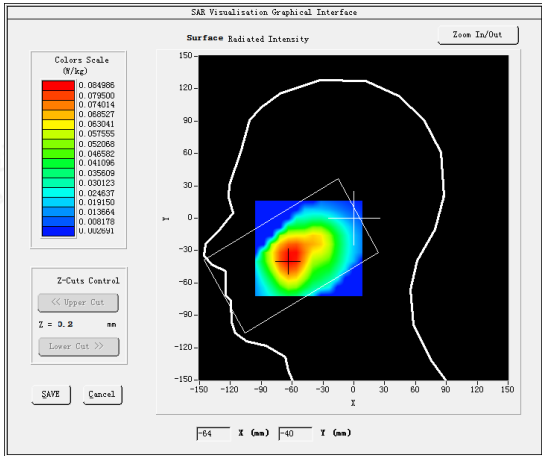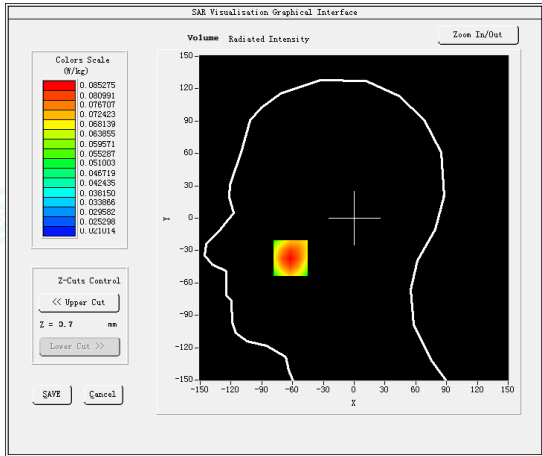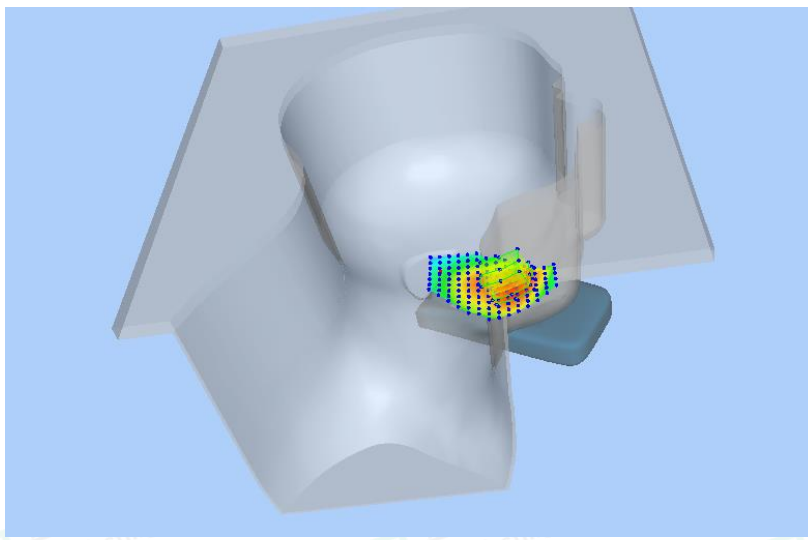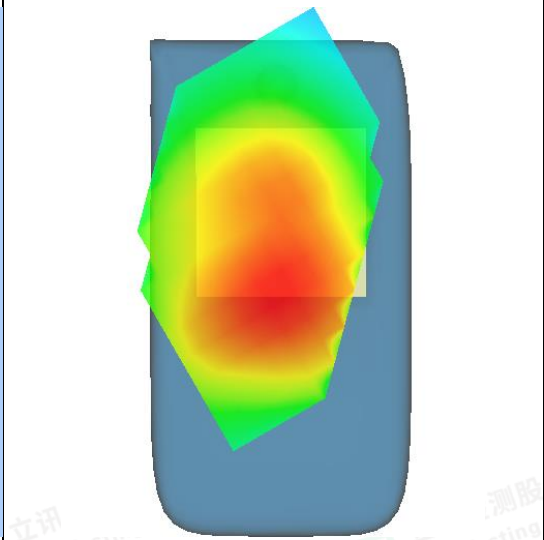Medium(liquid type)	HSL_835
Frequency (MHz)	826.4000
Relative permittivity (real part)	42.93
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	1.0
Conversion Factor	1.75
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.560000
SAR 10g (W/Kg)	0.063627
SAR 1g (W/Kg)	0.082743
SURFACE SAR	VOLUME SAR
	
	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




#6

Test Mode: WCDMA Band V, Low channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 27, 2023

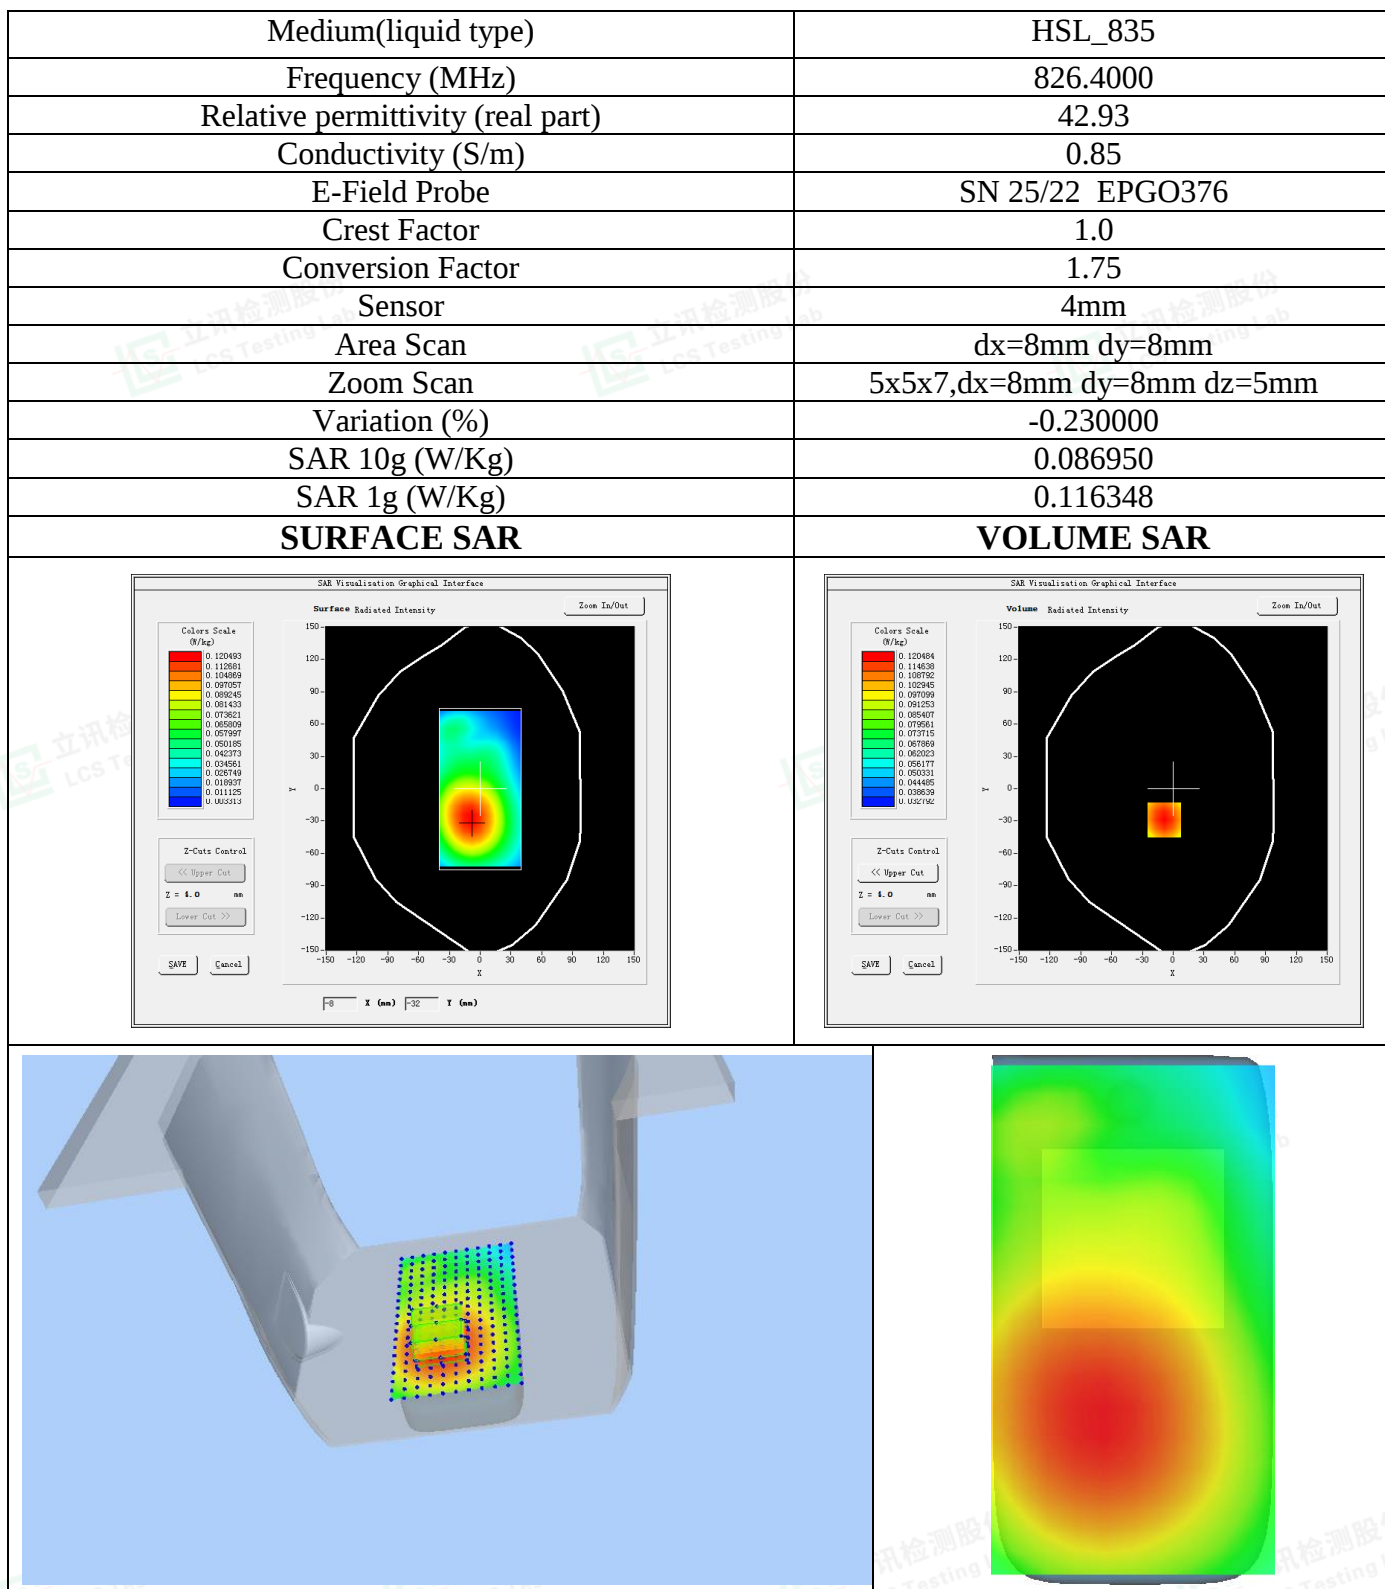

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#7





Test Mode:WCDMA Band II,High channel(Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium(liquid type)	HSL_1900
Frequency (MHz)	1907.6000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.39
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.14
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.600000
SAR 10g (W/Kg)	0.120441
SAR 1g (W/Kg)	0.207883
SURFACE SAR	VOLUME SAR

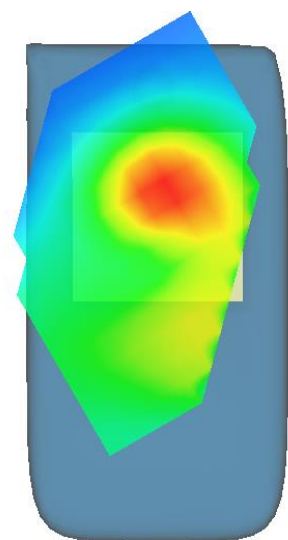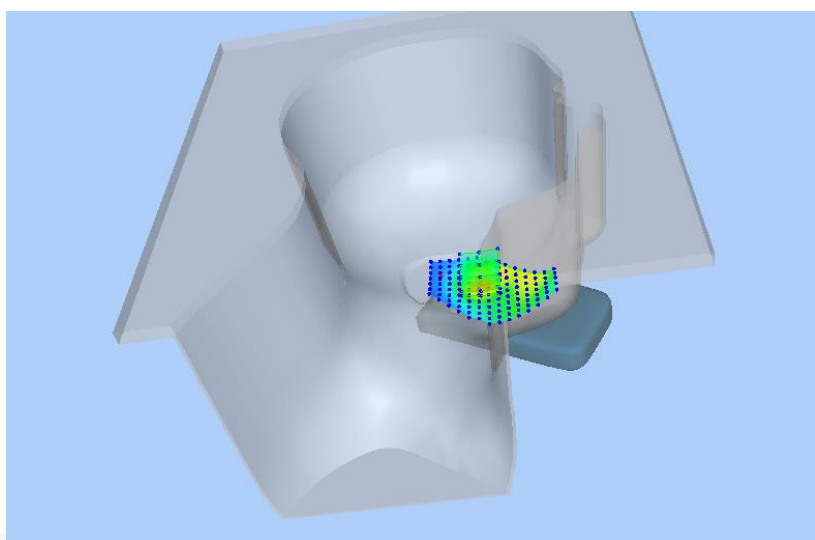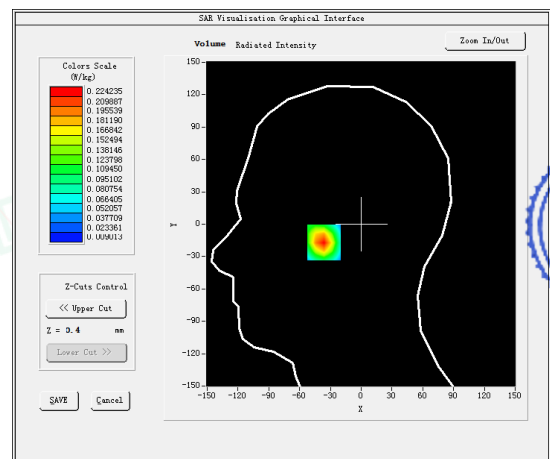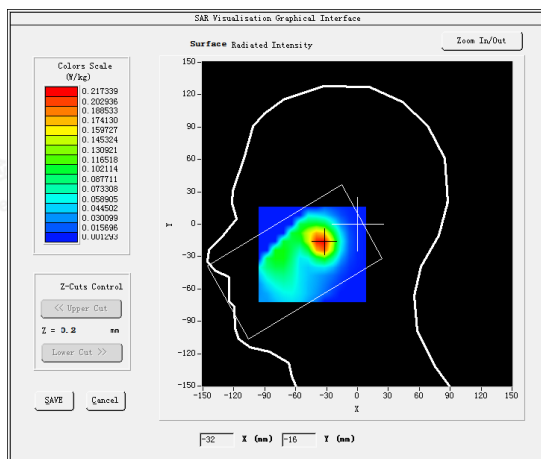

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#8





Test Mode: WCDMA Band II, High channel (Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium (liquid type)	HSL_1900
Frequency (MHz)	1907.6000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.39
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.14
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.380000
SAR 10g (W/Kg)	0.275341
SAR 1g (W/Kg)	0.492477
SURFACE SAR	VOLUME SAR

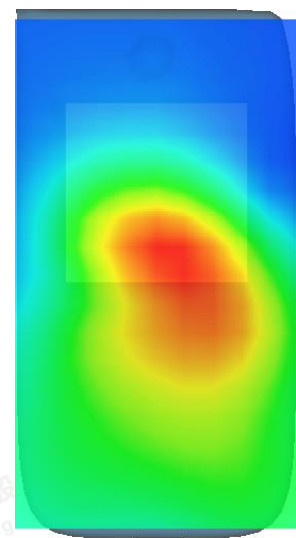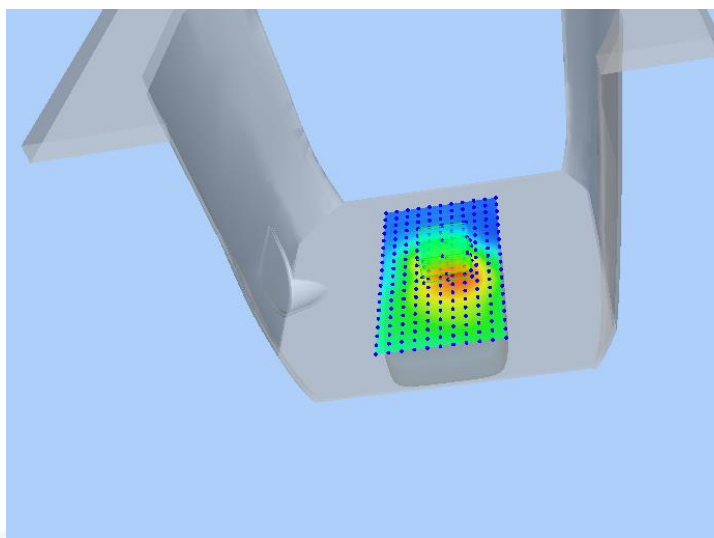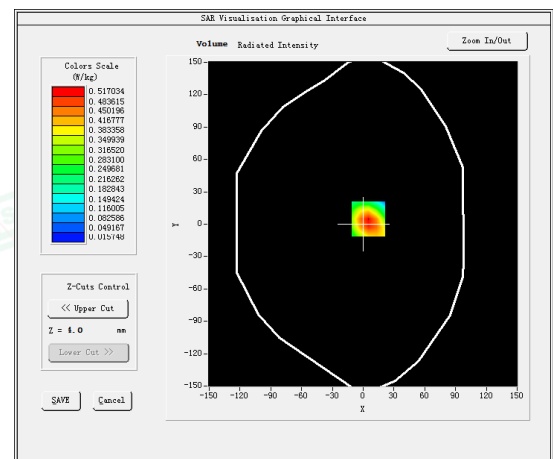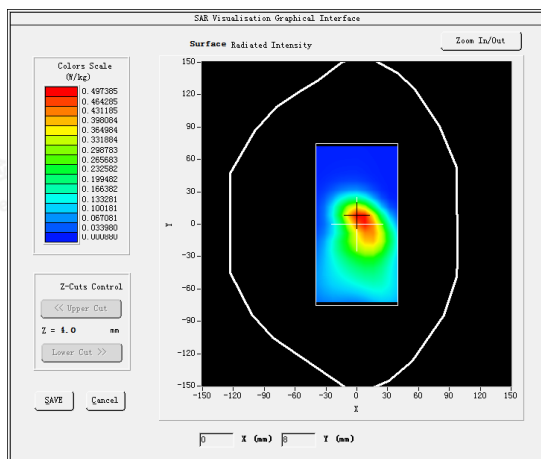

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity







#9

Test Mode: LTE Band 2, 1RB, High channel (Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

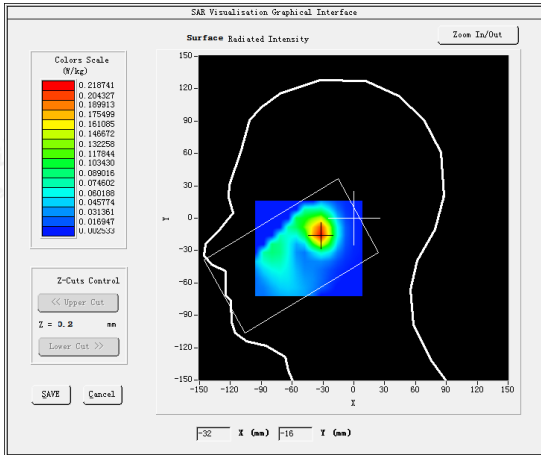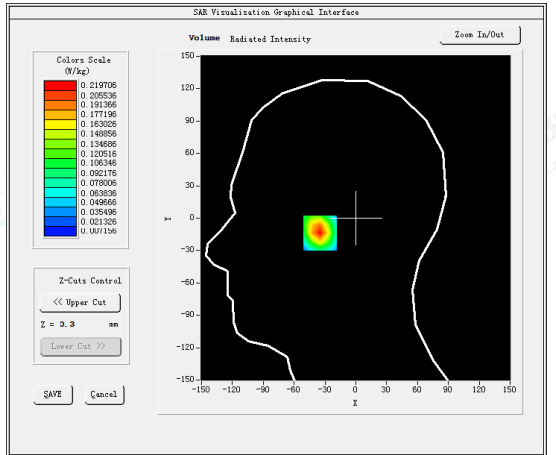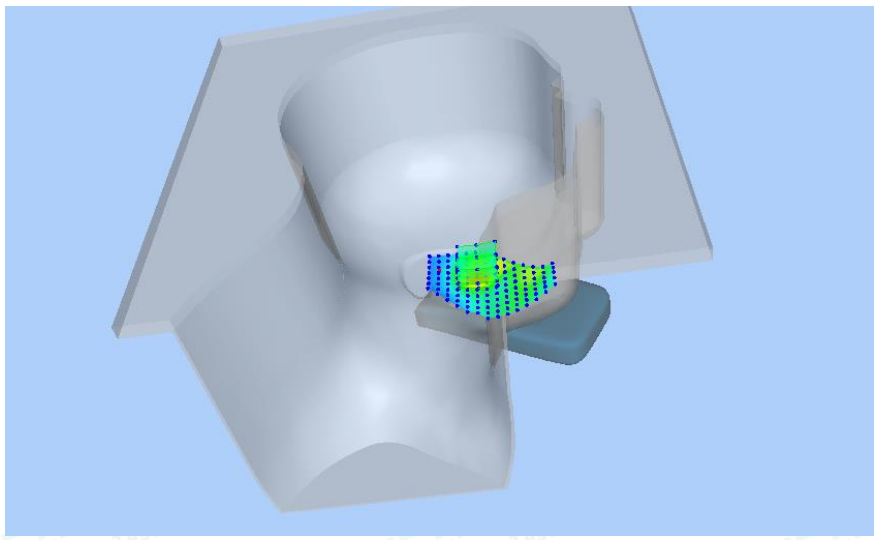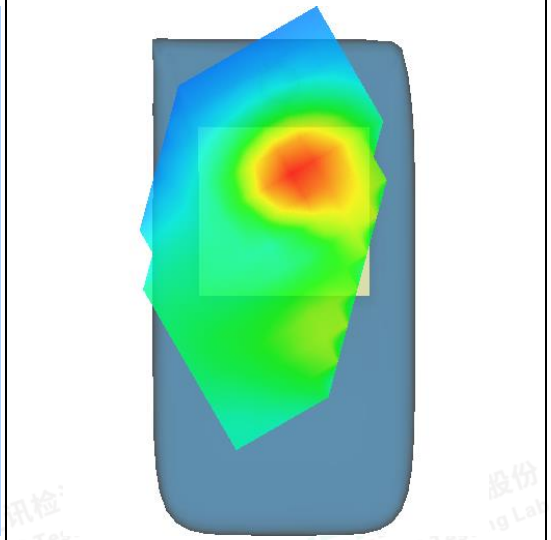Medium (liquid type)	HSL_1900
Frequency (MHz)	1900.0000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.39
E-Field Probe	SN 25/22 EPG0376
Crest Factor	1.0
Conversion Factor	2.14
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-3.460000
SAR 10g (W/Kg)	0.112975
SAR 1g (W/Kg)	0.203264
SURFACE SAR	VOLUME SAR
	
	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#10





Test Mode: LTE Band 2, 1RB, High channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium(liquid type)	HSL_1900
Frequency (MHz)	1900.0000
Relative permittivity (real part)	40.02
Conductivity (S/m)	1.39
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.14
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.100000
SAR 10g (W/Kg)	0.295859
SAR 1g (W/Kg)	0.507993
SURFACE SAR	VOLUME SAR

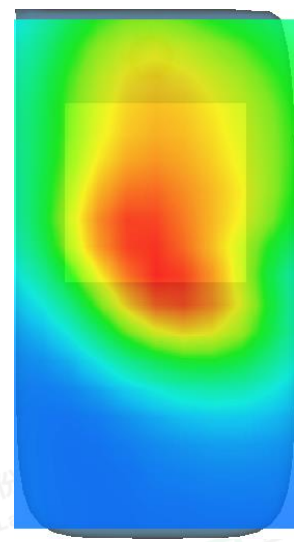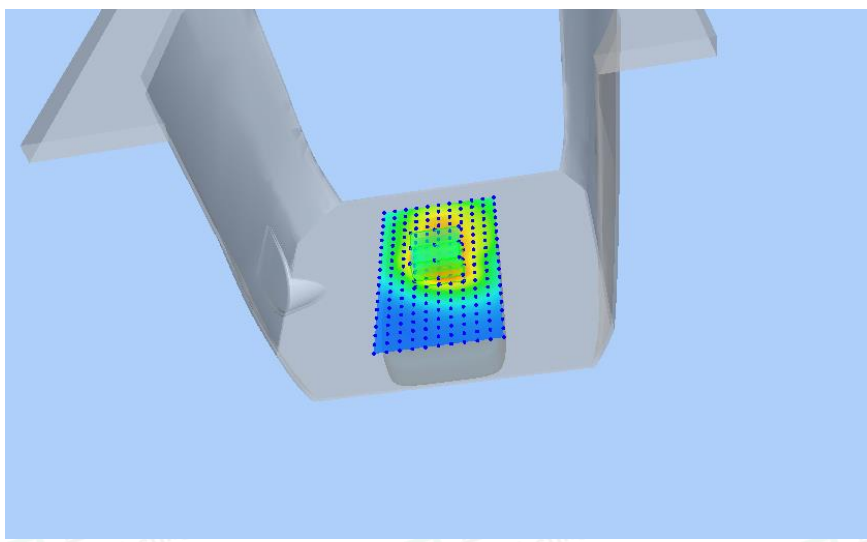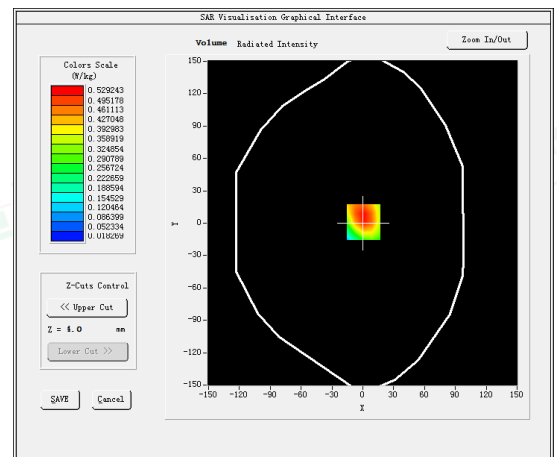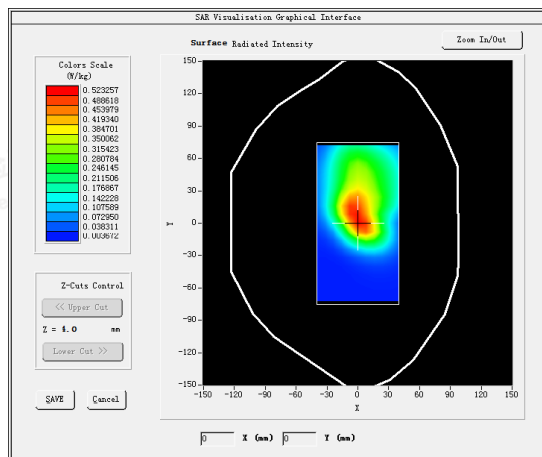

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#11





Test Mode: LTE Band 4, 1RB, High channel (Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium (liquid type)	HSL_1800
Frequency (MHz)	1745.0000
Relative permittivity (real part)	43.65
Conductivity (S/m)	1.36
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.09
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-4.020000
SAR 10g (W/Kg)	0.189137
SAR 1g (W/Kg)	0.333132
SURFACE SAR	VOLUME SAR

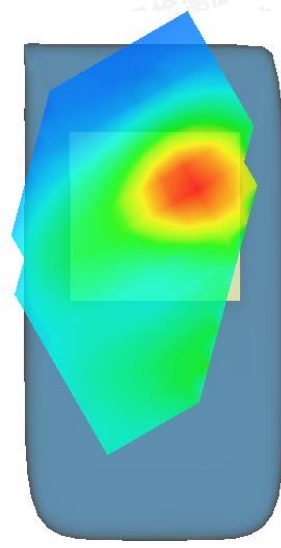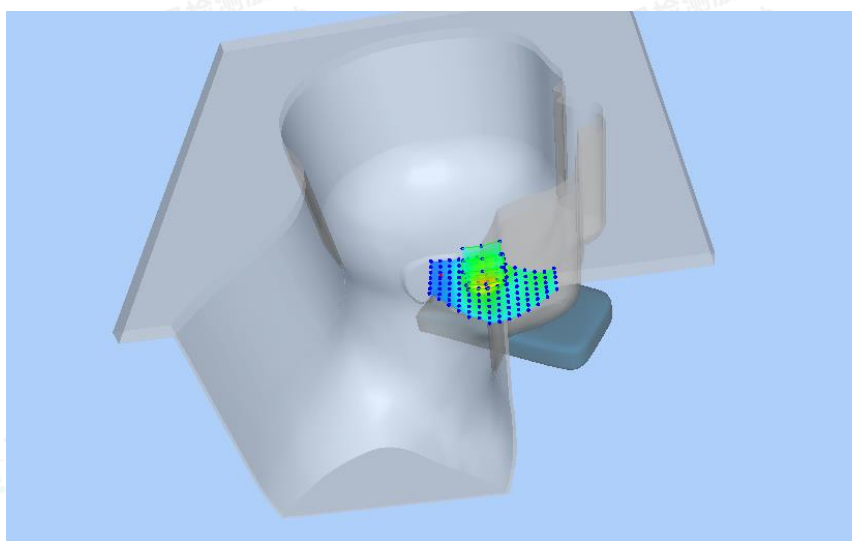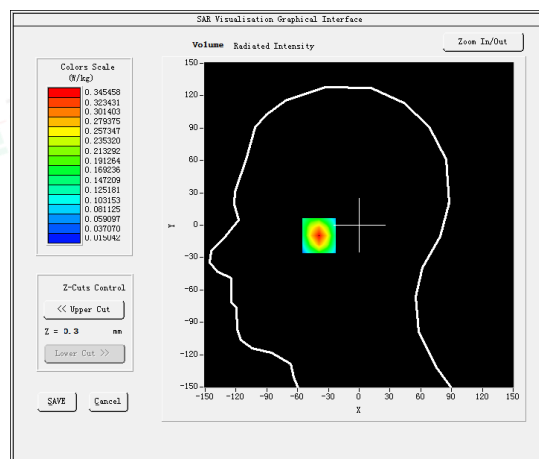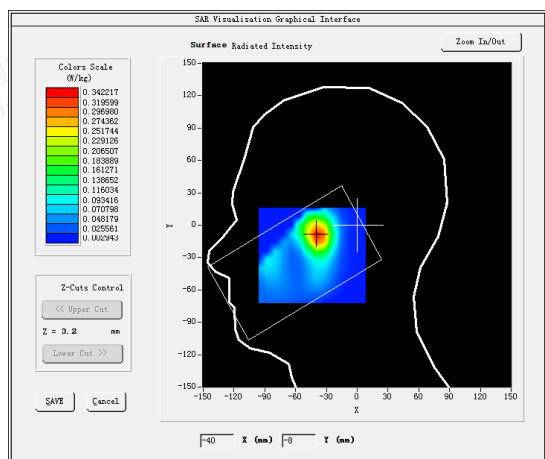

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#12





Test Mode: LTE Band 4, 1RB, High channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 28, 2023

Medium(liquid type)	HSL_1800
Frequency (MHz)	1745.0000
Relative permittivity (real part)	43.65
Conductivity (S/m)	1.36
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.09
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.340000
SAR 10g (W/Kg)	0.608590
SAR 1g (W/Kg)	1.173640
SURFACE SAR	VOLUME SAR

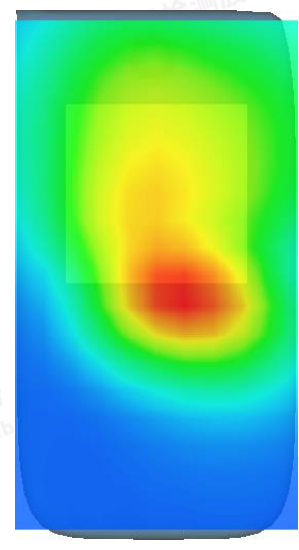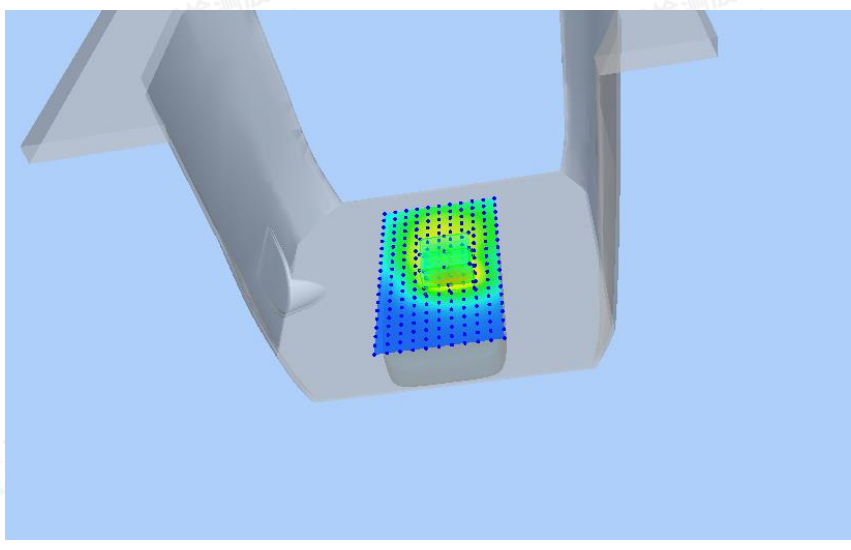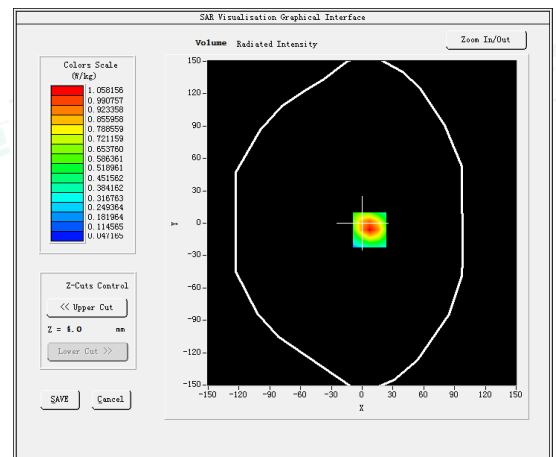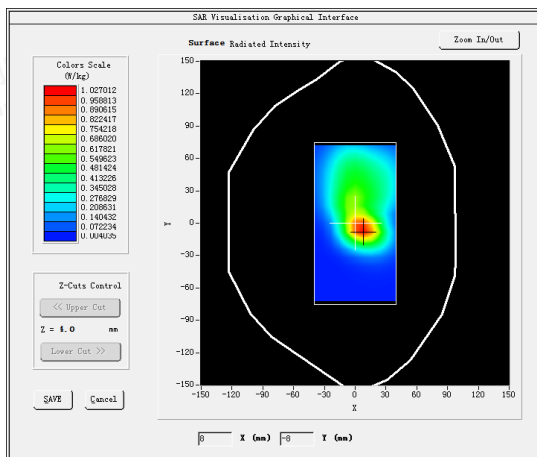

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#13

Test Mode: LTE Band 5, 1RB, Low channel(Head Left Cheek)


Product Description: SMARTPHONE

Model: SP-7300




Test Date: July 27, 2023

Medium(liquid type)	HSL_835
Frequency (MHz)	829.0000
Relative permittivity (real part)	42.93
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	1.0
Conversion Factor	1.75
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.300000
SAR 10g (W/Kg)	0.076967
SAR 1g (W/Kg)	0.100321

SURFACE SAR

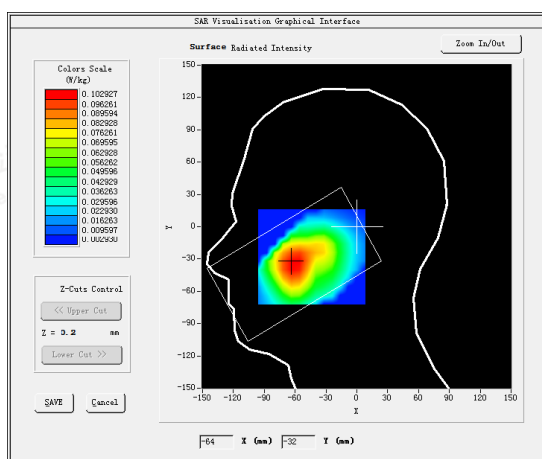

VOLUME SAR

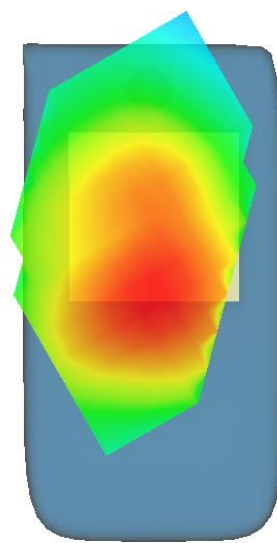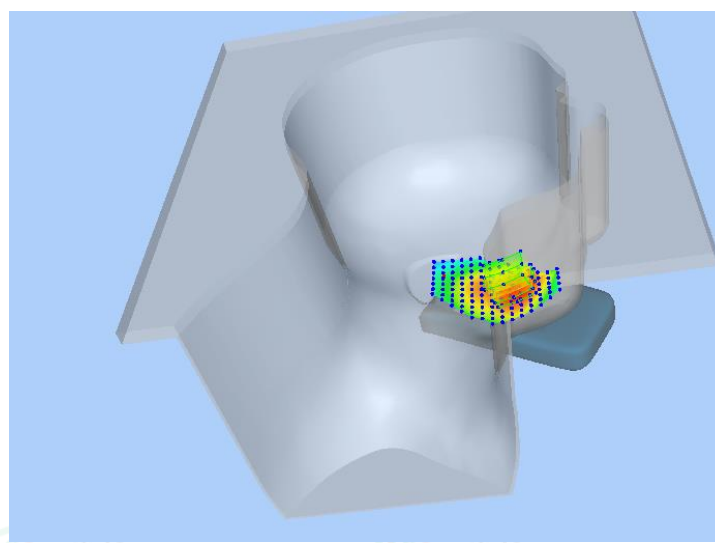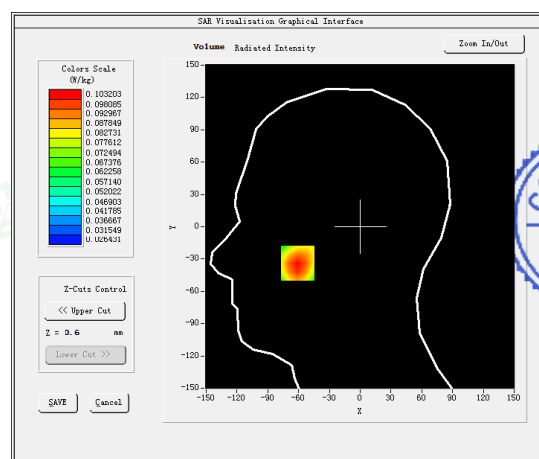

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#14





Test Mode: LTE Band 5, 1RB, Low channel (Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 27, 2023

Medium (liquid type)	HSL_835
Frequency (MHz)	829.0000
Relative permittivity (real part)	42.93
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	1.0
Conversion Factor	1.75
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.230000
SAR 10g (W/Kg)	0.095549
SAR 1g (W/Kg)	0.128337
SURFACE SAR	VOLUME SAR

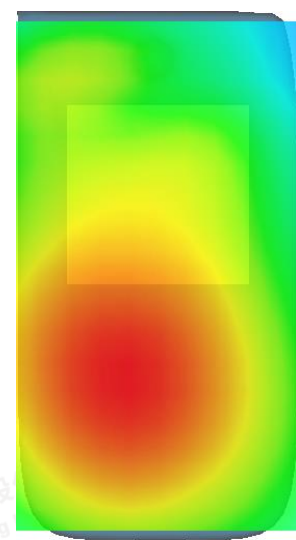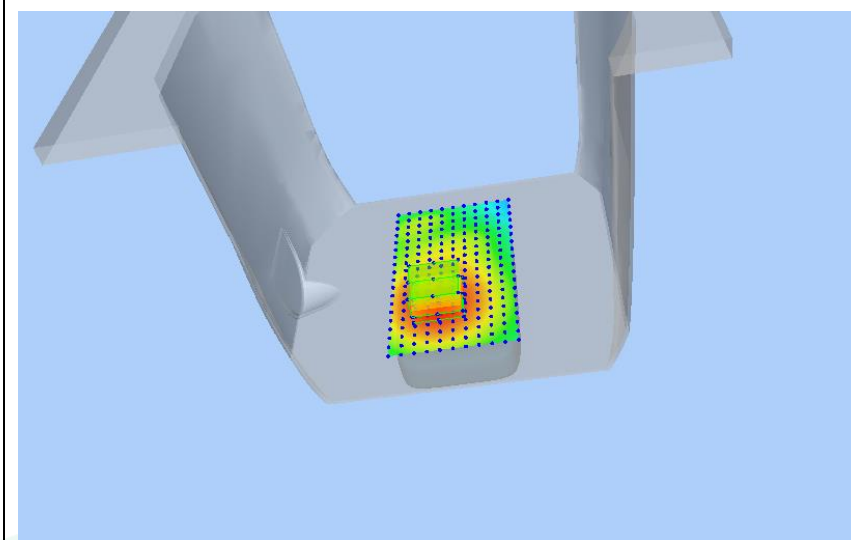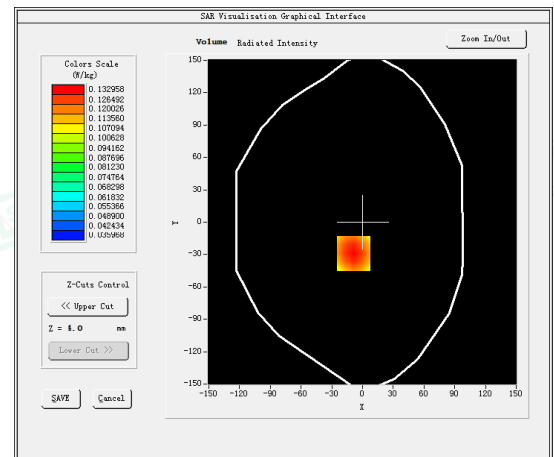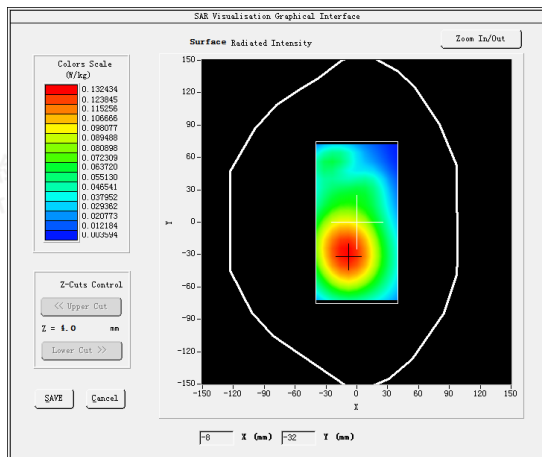

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#15





Test Mode: LTE Band 12, 1RB, Low channel(Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 26, 2023

Medium(liquid type)	HSL_750
Frequency (MHz)	704.0000
Relative permittivity (real part)	43.81
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPG0376
Crest Factor	1.0
Conversion Factor	1.69
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.570000
SAR 10g (W/Kg)	0.068107
SAR 1g (W/Kg)	0.087229
SURFACE SAR	VOLUME SAR

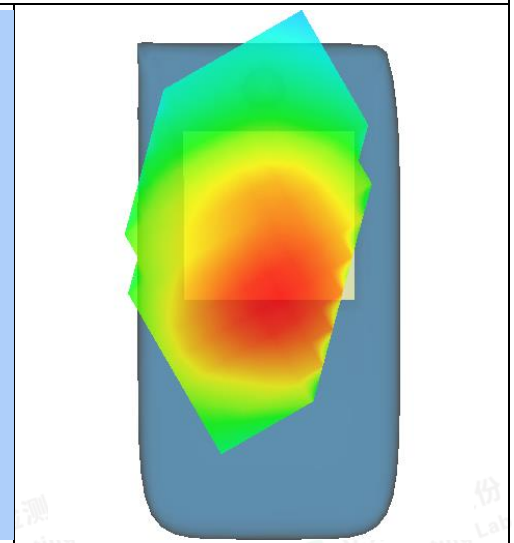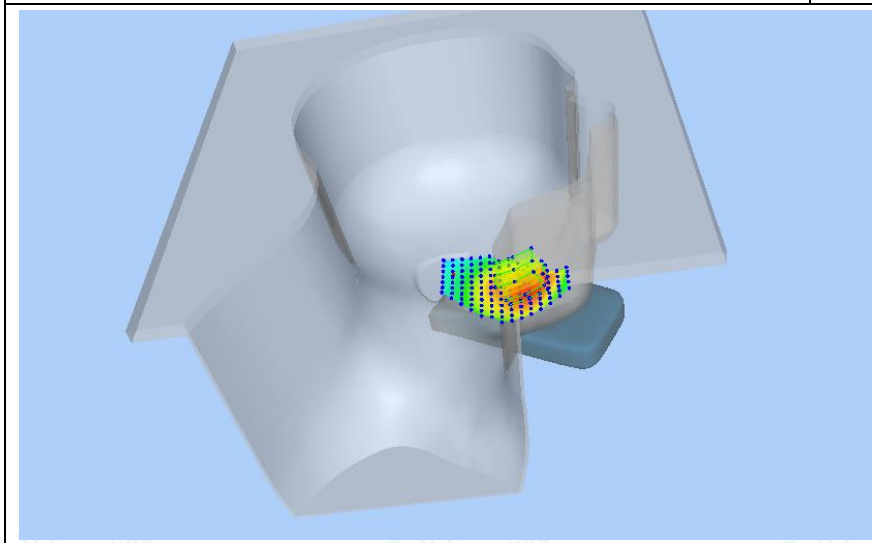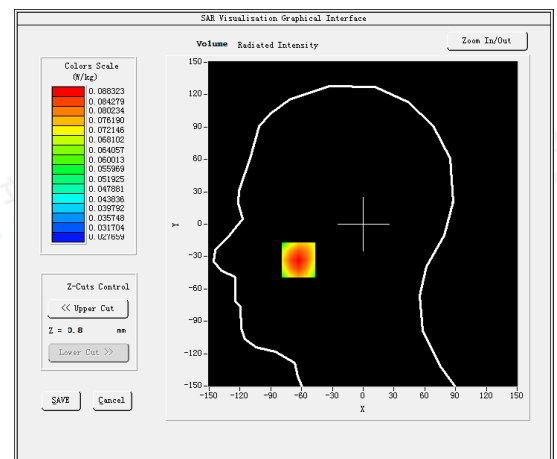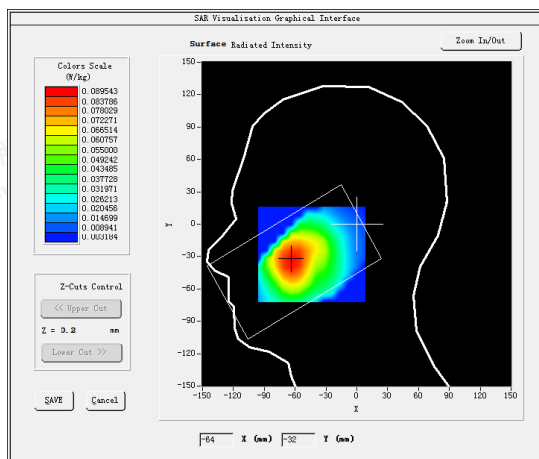

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#16





Test Mode: LTE Band 12, 1RB, Low channel (Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 26, 2023

Medium(liquid type)	HSL _750
Frequency (MHz)	704.0000
Relative permittivity (real part)	43.81
Conductivity (S/m)	0.85
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	1.69
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.280000
SAR 10g (W/Kg)	0.217464
SAR 1g (W/Kg)	0.285294
SURFACE SAR	VOLUME SAR

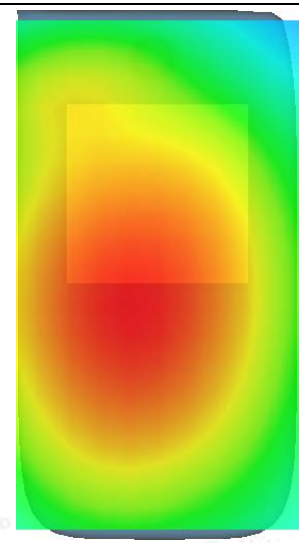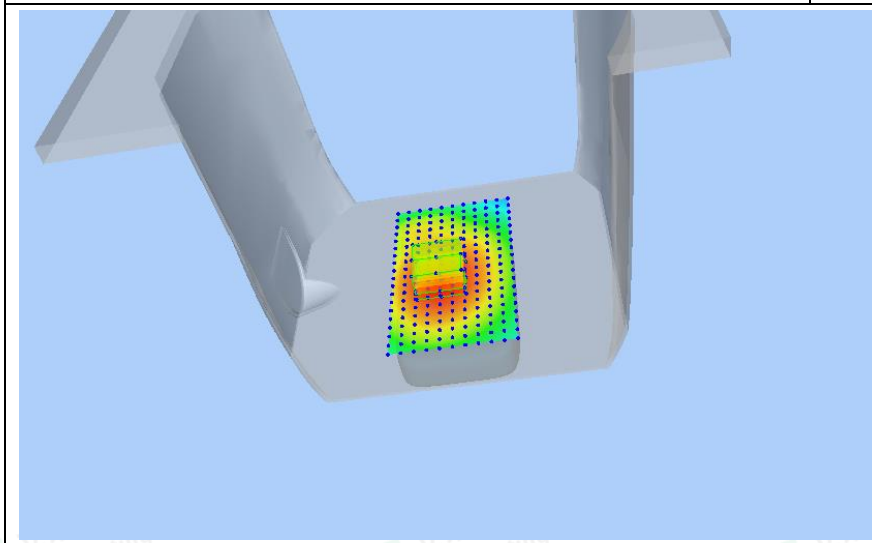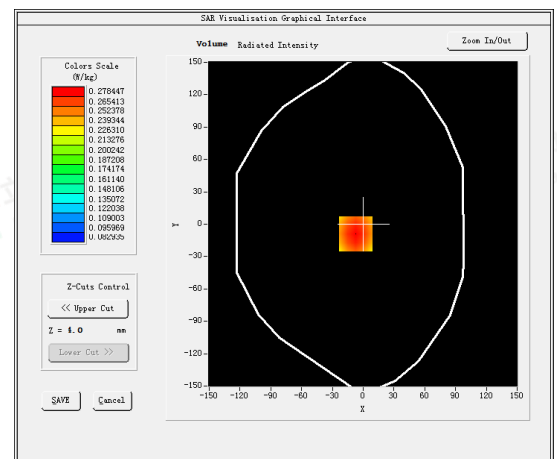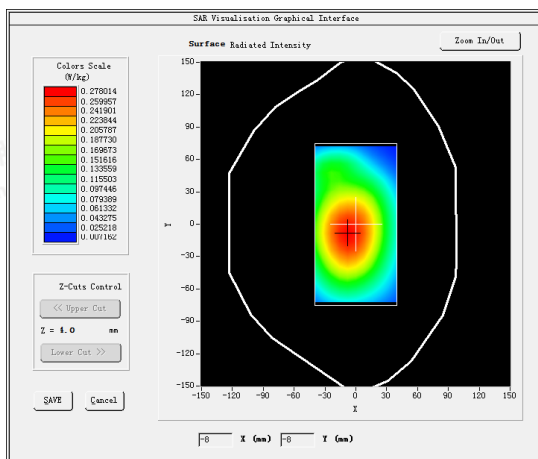

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#17

Test Mode: LTE Band 41, 1RB, Middle channel(Head Left Cheek)


Product Description: SMARTPHONE

Model: SP-7300




Test Date: July 31, 2023

Medium(liquid type)	HSL_2600
Frequency (MHz)	2593.0000
Relative permittivity (real part)	39.45
Conductivity (S/m)	1.96
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.39
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.010000
SAR 10g (W/Kg)	0.064130
SAR 1g (W/Kg)	0.125452

SURFACE SAR

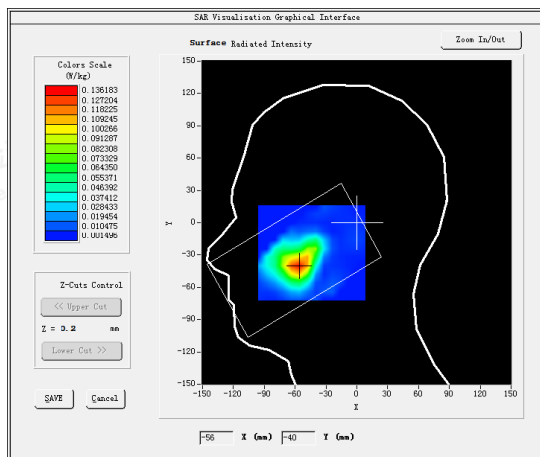

VOLUME SAR

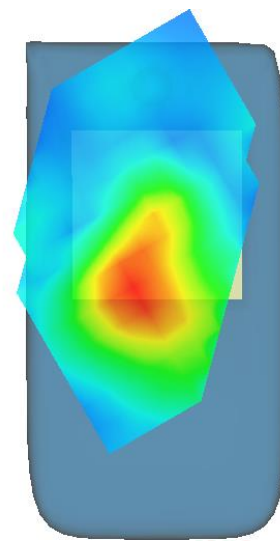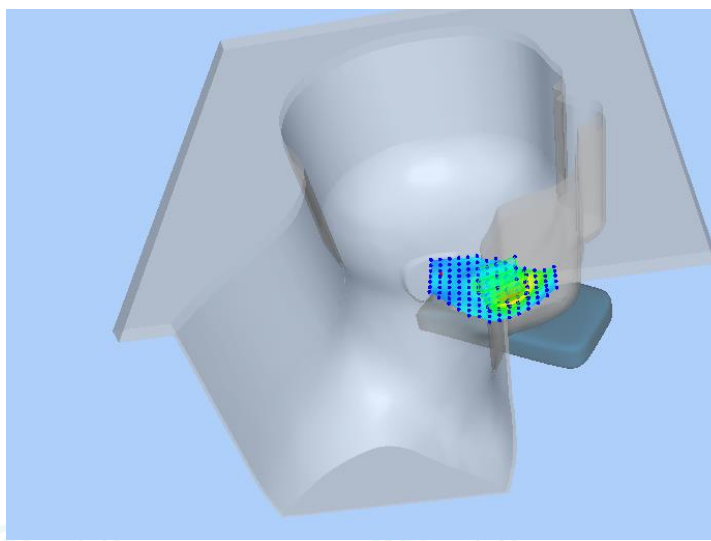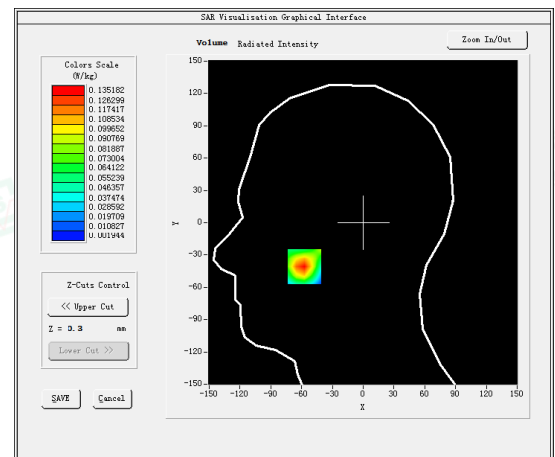

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#18





Test Mode: LTE Band 41, 1RB, Middle channel(Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 31, 2023

Medium(liquid type)	HSL_2600
Frequency (MHz)	2593.0000
Relative permittivity (real part)	39.45
Conductivity (S/m)	1.96
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.39
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.010000
SAR 10g (W/Kg)	0.075205
SAR 1g (W/Kg)	0.152091
SURFACE SAR	VOLUME SAR

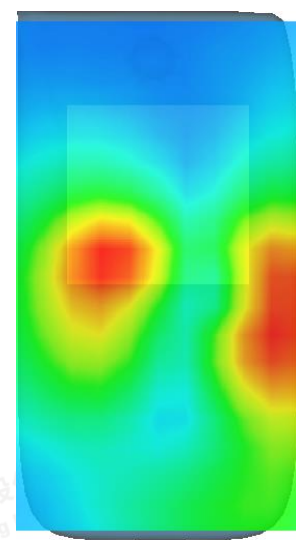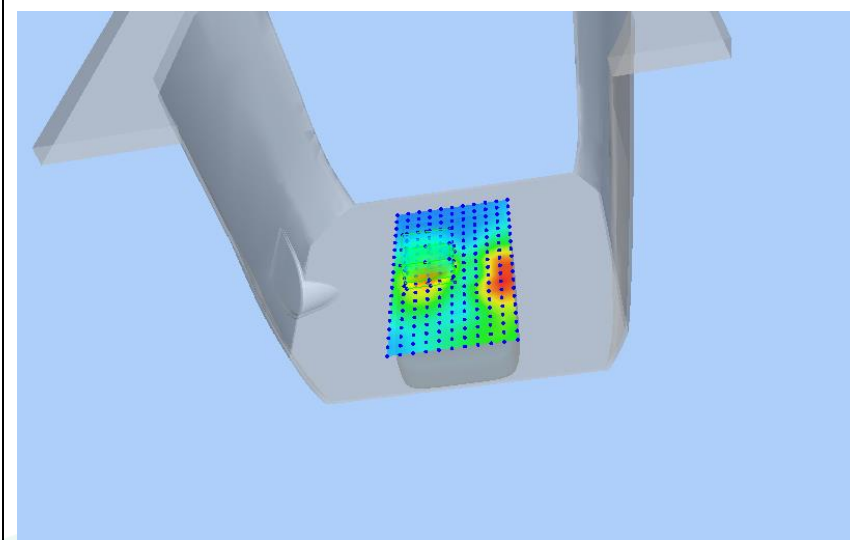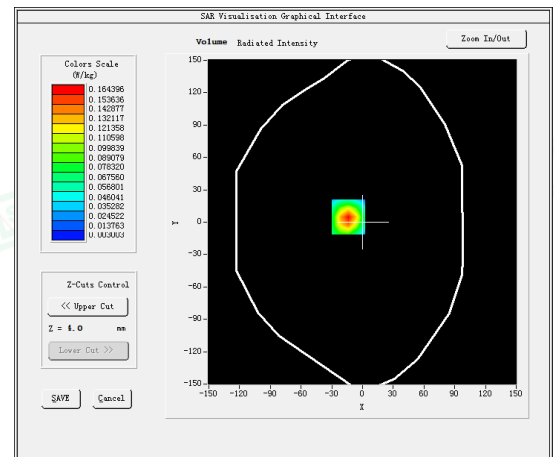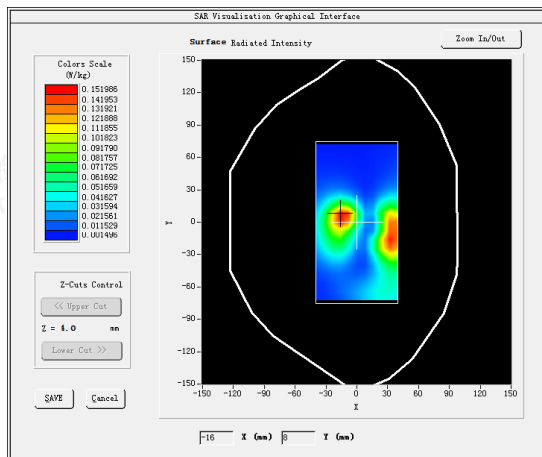

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#19





Test Mode: 802.11g (WiFi2.4G), Middle channel (Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 29, 2023

Medium(liquid type)	HSL_2450
Frequency (MHz)	2437.0000
Relative permittivity (real part)	38.77
Conductivity (S/m)	1.79
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.60
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.130000
SAR 10g (W/Kg)	0.131654
SAR 1g (W/Kg)	0.262904
SURFACE SAR	VOLUME SAR

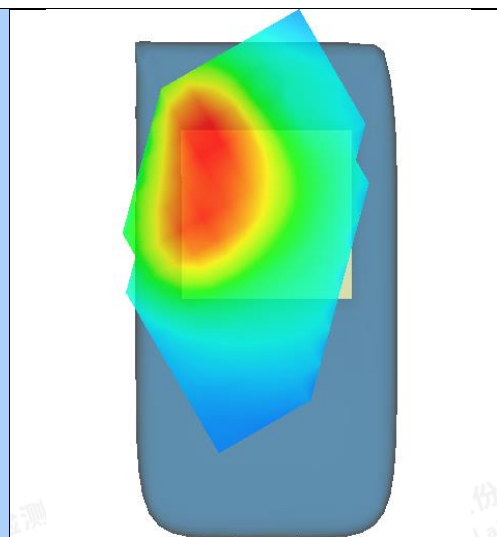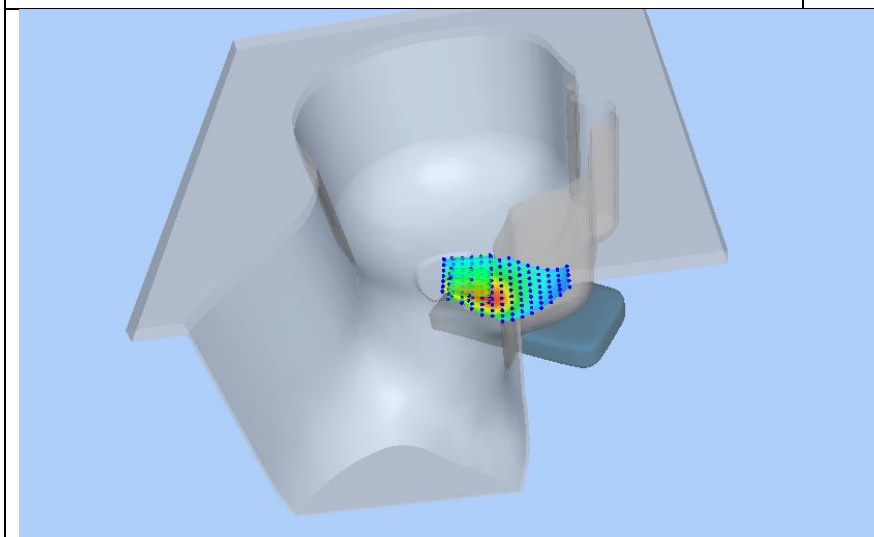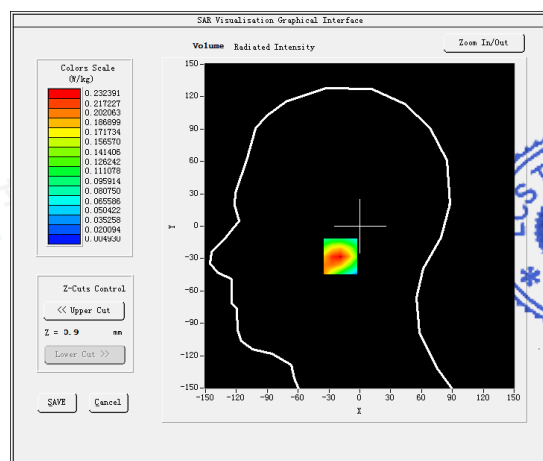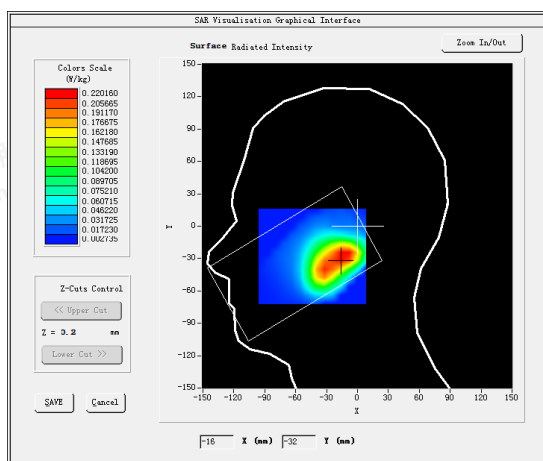

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#20





Test Mode: 802.11g (WiFi2.4G), Middle channel (Body Rear Side)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: July 29, 2023

Medium(liquid type)	HSL _2450
Frequency (MHz)	2437.0000
Relative permittivity (real part)	38.77
Conductivity (S/m)	1.79
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	2.60
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.590000
SAR 10g (W/Kg)	0.046374
SAR 1g (W/Kg)	0.092549
SURFACE SAR	VOLUME SAR

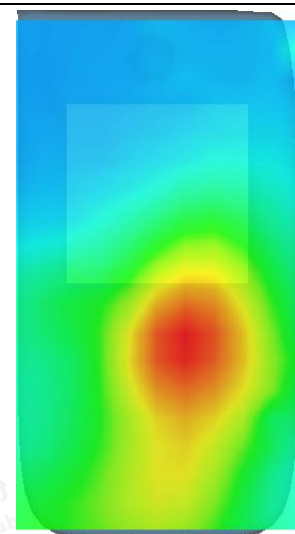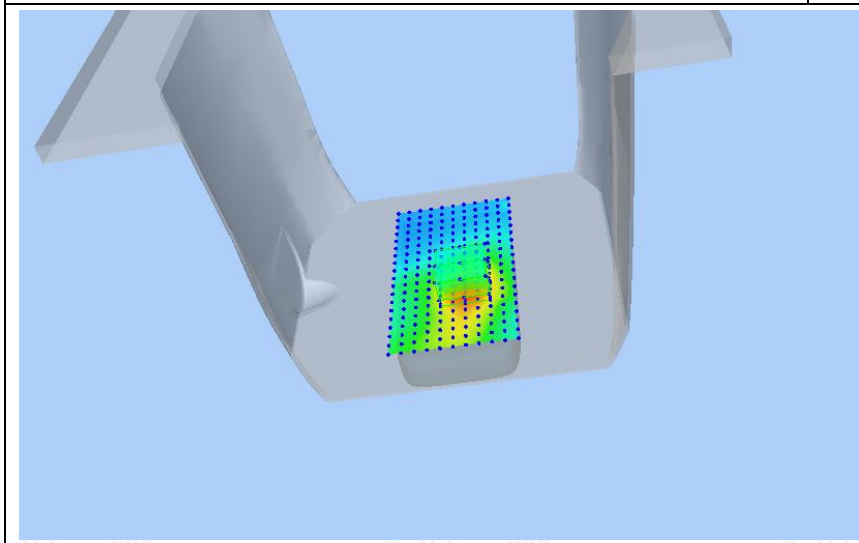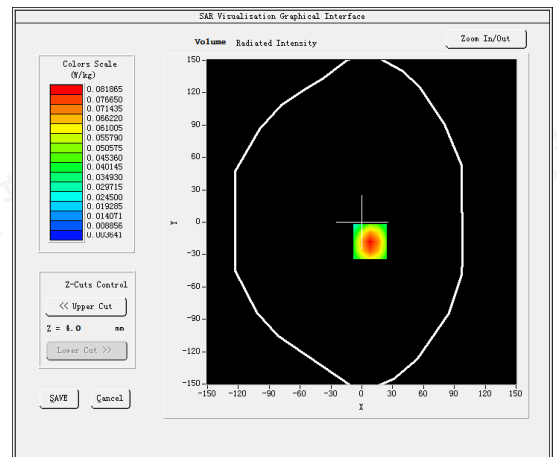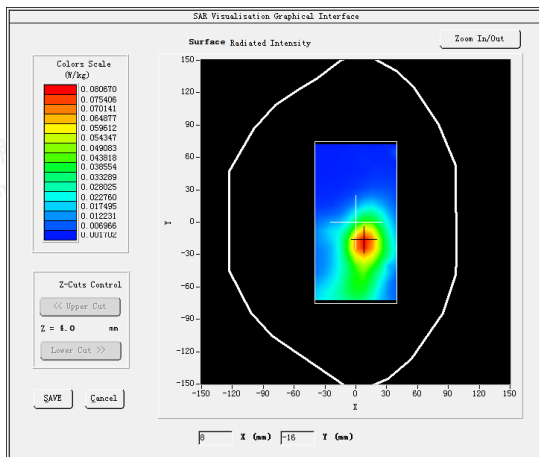

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#21





Test Mode: 802.11a (WiF5.2G), Low channel (Head Left Cheek)

Product Description: SMARTPHONE

Model: SP-7300

Test Date: August 01, 2023

Medium(liquid type)	HSL_5200
Frequency (MHz)	5180.0000
Relative permittivity (real part)	36.44
Conductivity (S/m)	4.62
E-Field Probe	SN 25/22 EPGO376
Crest Factor	1.0
Conversion Factor	1.85
Sensor	4mm
Area Scan	dx=10mm dy=10mm
Zoom Scan	7x7x7,dx=4mm dy=4mm dz=1.4mm
Variation (%)	2.890000
SAR 10g (W/Kg)	0.069060
SAR 1g (W/Kg)	0.190830
SURFACE SAR	VOLUME SAR

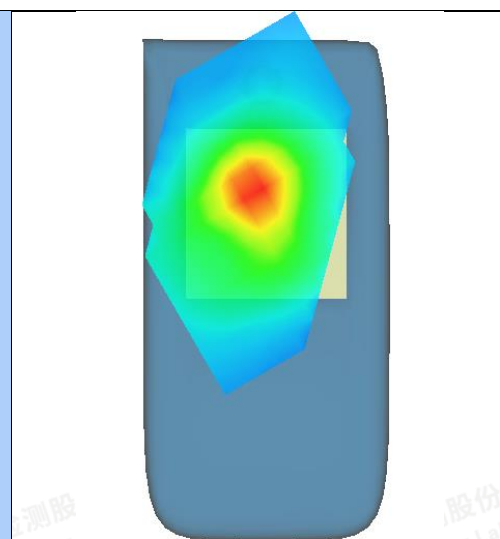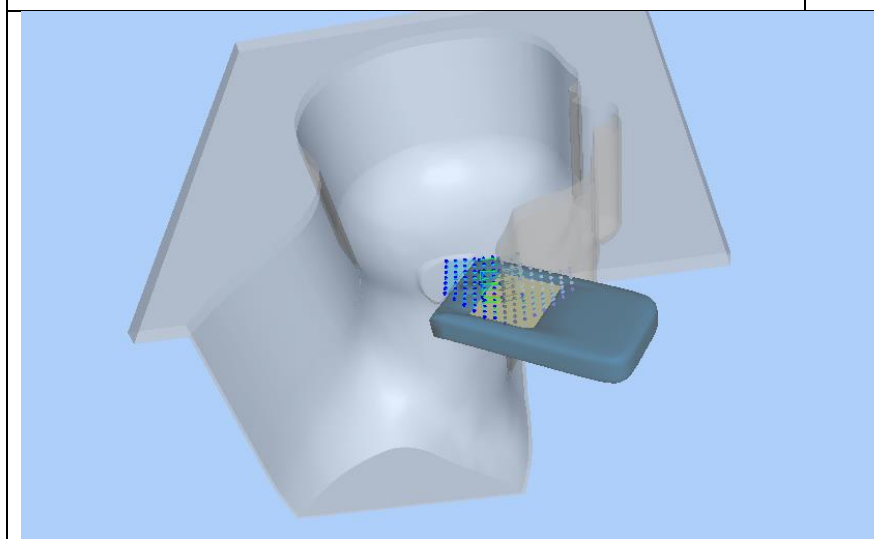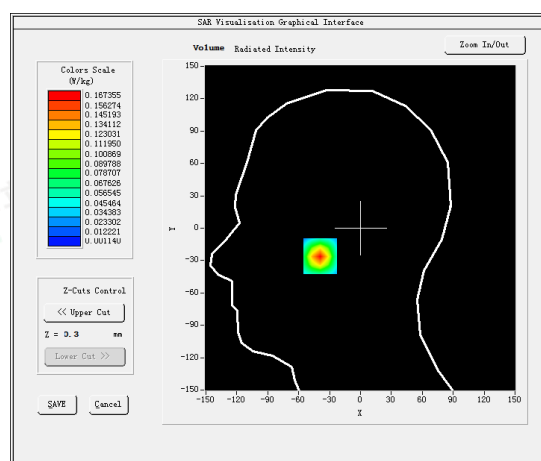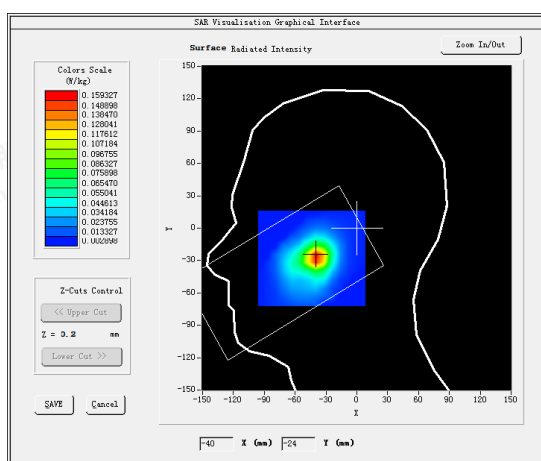

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity