

# TEST REPORT

**Applicant:** Shenzhen LOKMAT Technology Co., Ltd.

**Address of Applicant:** 9B, Block A, Building B5-1, Junfeng Industrial Park, Baoan District, Shenzhen, Guangdong

**Manufacturer:** Shenzhen LOKMAT Technology Co., Ltd.

**Address of Manufacturer:** 9B, Block A, Building B5-1, Junfeng Industrial Park, Baoan District, Shenzhen, Guangdong

**Equipment Under Test (EUT)**

**Product Name:** Smart Watch

**Model No.:** See model list

**Trade Mark:** LOKMAT

**FCC ID:** 2BC9M-ATTACKPRO

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013

**Date of sample receipt:** October 11, 2023

**Date of Test:** October 12~16, 2023

**Date of report issued:** October 19, 2023

**Test Result:** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A red circular stamp with a star in the center. The text around the star reads "Global United Technology Services Co., Ltd." and "检验检测专用章" (Inspection and Testing Services Special Seal). The text "Inspection/Testing Services" is at the bottom.

**Robinson Luo**

**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## Model List:

APLLP, APLLP 2, APLLP 3, APLLP 4, APLLP 5, APLLP 6, APLLP 7, APLLP 8, APLLP 9,  
APLLP PRO, APLLP 2 PRO, APLLP 3 PRO, APLLP 4 PRO, APLLP 5 PRO, APLLP 6 PRO, APLLP 7 PRO, APLLP 8 PRO, APLLP 9 PRO,  
APLLP MAX, APLLP 2 MAX, APLLP 3 MAX, APLLP 4 MAX, APLLP 5 MAX, APLLP 6 MAX, APLLP 7 MAX, APLLP 8 MAX, APLLP 9 MAX,  
APLLP GT, APLLP 2 GT, APLLP 3 GT, APLLP 4 GT, APLLP 5 GT, APLLP 6 GT, APLLP 7 GT, APLLP 8 GT, APLLP 9 GT,  
APLLP PLUS, APLLP 2 PLUS, APLLP 3 PLUS, APLLP 4 PLUS, APLLP 5 PLUS, APLLP 6 PLUS, APLLP 7 PLUS, APLLP 8 PLUS, APLLP 9 PLUS,  
SKY, SKY 2, SKY 3, SKY 4, SKY 5, SKY 6, SKY 7, SKY 8, SKY 9, SKY PRO, SKY 2 PRO, SKY 3 PRO, SKY 4 PRO, SKY 5 PRO, SKY 6 PRO, SKY 7 PRO, SKY 8 PRO, SKY 9 PRO,  
SKY MAX, SKY 2 MAX, SKY 3 MAX, SKY 4 MAX, SKY 5 MAX, SKY 6 MAX, SKY 7 MAX, SKY 8 MAX, SKY 9 MAX,  
SKY GT, SKY 2 GT, SKY 3 GT, SKY 4 GT, SKY 5 GT, SKY 6 GT, SKY 7 GT, SKY 8 GT, SKY 9 GT,  
SKY PLUS, SKY 2 PLUS, SKY 3 PLUS, SKY 4 PLUS, SKY 5 PLUS, SKY 6 PLUS, SKY 7 PLUS, SKY 8 PLUS, SKY 9 PLUS,  
ATTACK, ATTACK 2, ATTACK 3, ATTACK 4, ATTACK 5, ATTACK PRO, ATTACK 2 PRO, ATTACK 3 PRO, ATTACK 4 PRO, ATTACK 5 PRO, ATTACK 6 PRO, ATTACK 7 PRO, ATTACK 8 PRO, ATTACK 9 PRO, ATTACK MAX, ATTACK 2 MAX, ATTACK 3 MAX, ATTACK 4 MAX, ATTACK 5 MAX, ATTACK 6 MAX, ATTACK 7 MAX, ATTACK 8 MAX, ATTACK 9 MAX,  
ATTACK GT, ATTACK 2 GT, ATTACK 3 GT, ATTACK 4 GT, ATTACK 5 GT, ATTACK 6 GT, ATTACK 7 GT, ATTACK 8 GT, ATTACK 9 GT,  
ATTACK PLUS, ATTACK 2 PLUS, ATTACK 3 PLUS, ATTACK 4 PLUS, ATTACK 5 PLUS, ATTACK 6 PLUS, ATTACK 7 PLUS, ATTACK 8 PLUS, ATTACK 9 PLUS,  
COMET, COMET 2, COMET PRO, COMET 2 PRO, COMET 3 PRO, COMET 4 PRO, COMET 5 PRO, COMET 6 PRO, COMET 7 PRO, COMET 8 PRO, COMET 9 PRO,




COMET MAX, COMET 2 MAX, COMET 3 MAX, COMET 4 MAX,  
COMET 5 MAX, COMET 6 MAX, COMET 7 MAX, COMET 8 MAX,  
COMET 9 MAX,  
COMET GT, COMET 2 GT, COMET 3 GT, COMET 4 GT, COMET 5 GT,  
COMET 6 GT, COMET 7 GT, COMET 8 GT, COMET 9 GT,  
COMET PLUS, COMET 2 PLUS, COMET 3 PLUS, COMET 4 PLUS,  
COMET 5 PLUS, COMET 6 PLUS, COMET 7 PLUS, COMET 8 PLUS,  
COMET 9 PLUS,  
OCEAN, OCEAN 2,  
OCEAN 2 PRO, OCEAN 3 PRO, OCEAN 4 PRO, OCEAN 5 PRO,  
OCEAN 6 PRO, OCEAN 7 PRO, OCEAN 8 PRO, OCEAN 9 PRO,  
OCEAN MAX, OCEAN 2 MAX, OCEAN 3 MAX, OCEAN 4 MAX,  
OCEAN 5 MAX, OCEAN 6 MAX, OCEAN 7 MAX, OCEAN 8 MAX,  
OCEAN 9 MAX,  
OCEAN GT, OCEAN 2 GT, OCEAN 3 GT, OCEAN 4 GT, OCEAN 5 GT,  
OCEAN 6 GT, OCEAN 7 GT, OCEAN 8 GT, OCEAN 9 GT,  
OCEAN PLUS, OCEAN 2 PLUS, OCEAN 3 PLUS, OCEAN 4 PLUS,  
OCEAN 5 PLUS, OCEAN 6 PLUS, OCEAN 7 PLUS, OCEAN 8 PLUS,  
OCEAN 9 PLUS,  
QUEEN, QUEEN 2,  
QUEEN PRO, QUEEN 2 PRO, QUEEN 3 PRO, QUEEN 4 PRO,  
QUEEN 5 PRO, QUEEN 6 PRO, QUEEN 7 PRO, QUEEN 8 PRO,  
QUEEN 9 PRO,  
QUEEN MAX, QUEEN 2 MAX, QUEEN 3 MAX, QUEEN 4 MAX,  
QUEEN 5 MAX, QUEEN 6 MAX, QUEEN 7 MAX, QUEEN 8 MAX,  
QUEEN 9 MAX,  
QUEEN GT, QUEEN 2 GT, QUEEN 3 GT, QUEEN 4 GT, QUEEN 5 GT,  
QUEEN 6 GT, QUEEN 7 GT, QUEEN 8 GT, QUEEN 9 GT,  
SEA, SEA 2,  
SEA PRO, SEA 2 PRO, SEA 3 PRO, SEA 4 PRO, SEA 5 PRO, SEA 6 PRO,  
SEA 7 PRO, SEA 8 PRO, SEA 9 PRO,  
SEA MAX, SEA 2 MAX, SEA 3 MAX, SEA 4 MAX, SEA 5 MAX, SEA 6 MAX,  
SEA 7 MAX, SEA 8 MAX, SEA 9 MAX,  
SEA GT, SEA 2 GT, SEA 3 GT, SEA 4 GT, SEA 5 GT, SEA 6 GT, SEA 7 GT,  
SEA 8 GT, SEA 9 GT,  
TIME, TIME 2,  
TIME PRO, TIME 2 PRO, TIME 3 PRO, TIME 4 PRO, TIME 5 PRO,  
TIME 6 PRO, TIME 7 PRO, TIME 8 PRO, TIME 9 PRO,  
TIME MAX, TIME 2 MAX, TIME 3 MAX, TIME 4 MAX, TIME 5 MAX,  
TIME 6 MAX, TIME 7 MAX, TIME 8 MAX, TIME 9 MAX,

TIME GT, TIME 2 GT, TIME 3 GT, TIME 4 GT, TIME 5 GT, TIME 6 GT,  
TIME 7 GT, TIME 8 GT, TIME 9 GT,  
ZEUS, ZEUS 2, ZEUS 3, ZEUS 4, ZEUS 5, ZEUS 6, ZEUS 7, ZEUS 8,  
ZEUS 9,  
ZEUS PRO, ZEUS 2 PRO, ZEUS 3 PRO, ZEUS 4 PRO, ZEUS 5 PRO,  
ZEUS 6 PRO, ZEUS 7 PRO, ZEUS 8 PRO, ZEUS 9 PRO,  
ZEUS MAX, ZEUS 2 MAX, ZEUS 3 MAX, ZEUS 4 MAX, ZEUS 5 MAX,  
ZEUS 6 MAX, ZEUS 7 MAX, ZEUS 8 MAX, ZEUS 9 MAX,  
ZEUS GT, ZEUS 2 GT, ZEUS 3 GT, ZEUS 4 GT, ZEUS 5 GT, ZEUS 6 GT,  
ZEUS 7 GT, ZEUS 8 GT, ZEUS 9 GT.

## 2 Version

| Version No. | Date             | Description |
|-------------|------------------|-------------|
| 00          | October 19, 2023 | Original    |
|             |                  |             |
|             |                  |             |
|             |                  |             |
|             |                  |             |

Prepared By:



Project Engineer

Date:

October 19, 2023

Check By:



Reviewer

Date:

October 19, 2023



## 3 Contents

|                                                                  | Page |
|------------------------------------------------------------------|------|
| 1 COVER PAGE .....                                               | 1    |
| 2 VERSION .....                                                  | 5    |
| 3 CONTENTS .....                                                 | 6    |
| 4 TEST SUMMARY .....                                             | 7    |
| 5 GENERAL INFORMATION .....                                      | 8    |
| 5.1 GENERAL DESCRIPTION OF EUT .....                             | 8    |
| 5.2 DESCRIPTION OF SUPPORT UNITS .....                           | 10   |
| 5.3 DEVIATION FROM STANDARDS .....                               | 10   |
| 5.4 ABNORMALITIES FROM STANDARD CONDITIONS .....                 | 10   |
| 5.5 TEST FACILITY .....                                          | 10   |
| 5.6 TEST LOCATION .....                                          | 10   |
| 6 TEST INSTRUMENTS LIST .....                                    | 11   |
| 7 TEST RESULTS AND MEASUREMENT DATA .....                        | 13   |
| 7.1 ANTENNA REQUIREMENT .....                                    | 13   |
| 7.2 CONDUCTED EMISSIONS .....                                    | 14   |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....                            | 17   |
| 7.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH .....               | 19   |
| 7.5 POWER SPECTRAL DENSITY .....                                 | 21   |
| 7.6 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS ..... | 23   |
| 7.6.1 Conducted Emission Method .....                            | 23   |
| 7.6.2 Radiated Emission Method .....                             | 26   |
| 8 TEST SETUP PHOTO .....                                         | 33   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                               | 33   |

## 4 Test Summary

| Test Item                        | Section in CFR 47    | Result |
|----------------------------------|----------------------|--------|
| Antenna requirement              | 15.203/15.247 (b)(4) | Pass   |
| AC Power Line Conducted Emission | 15.207               | Pass   |
| Conducted Peak Output Power      | 15.247 (b)(3)        | Pass   |
| Channel Bandwidth                | 15.247 (a)(2)        | Pass   |
| Power Spectral Density           | 15.247 (e)           | Pass   |
| Band Edge                        | 15.247(d)            | Pass   |
| Spurious Emission                | 15.205/15.209        | Pass   |

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

### Measurement Uncertainty

| No. | Item                             | Measurement Uncertainty  |
|-----|----------------------------------|--------------------------|
| 1   | Radio Frequency                  | $1 \times 10^{-7}$       |
| 2   | Duty cycle                       | 0.37%                    |
| 3   | Occupied Bandwidth               | 3%                       |
| 4   | RF conducted power               | 0.75dB                   |
| 5   | RF power density                 | 3dB                      |
| 6   | Conducted Spurious emissions     | 2.58dB                   |
| 7   | AC Power Line Conducted Emission | 3.44dB (0.15MHz ~ 30MHz) |
| 8   | Radiated Spurious emission test  | 3.1dB (9kHz-30MHz)       |
|     |                                  | 3.8039dB (30MHz-200MHz)  |
|     |                                  | 3.9679dB (200MHz-1GHz)   |
|     |                                  | 4.29dB (1GHz-18GHz)      |
|     |                                  | 3.30dB (18GHz-40GHz)     |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

|                      |                                                           |
|----------------------|-----------------------------------------------------------|
| Product Name:        | Smart Watch                                               |
| Model No.:           | See model list                                            |
| Test Model No.:      | ATTACK PRO                                                |
| Test sample(s) ID:   | GTSL2023100079-1                                          |
| Sample(s) Status:    | Engineer sample                                           |
| Serial No.:          | N/A                                                       |
| Hardware Version:    | V1.0                                                      |
| Software Version:    | V1.0                                                      |
| Operation Frequency: | 2402MHz~2480MHz                                           |
| Channel Numbers:     | 40                                                        |
| Channel Separation:  | 2MHz                                                      |
| Modulation Type:     | GFSK                                                      |
| Antenna Type:        | Internal antenna                                          |
| Antenna Gain:        | 0.17dBi                                                   |
| Power Supply:        | DC 5V (Powered by adapter)<br>DC 3.7V(Powered by battery) |

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.



| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402 MHz  | 11      | 2422 MHz  | 21      | 2442 MHz  | 31      | 2462 MHz  |
| 2                                   | 2404 MHz  | 12      | 2424 MHz  | 22      | 2444 MHz  | 32      | 2464 MHz  |
| 3                                   | 2406 MHz  | 13      | 2426 MHz  | 23      | 2446 MHz  | 33      | 2466 MHz  |
| 4                                   | 2408 MHz  | 14      | 2428 MHz  | 24      | 2448 MHz  | 34      | 2468 MHz  |
| 5                                   | 2410 MHz  | 15      | 2430 MHz  | 25      | 2450 MHz  | 35      | 2470 MHz  |
| 6                                   | 2412 MHz  | 16      | 2432 MHz  | 26      | 2452 MHz  | 36      | 2472 MHz  |
| 7                                   | 2414 MHz  | 17      | 2434 MHz  | 27      | 2454 MHz  | 37      | 2474 MHz  |
| 8                                   | 2416 MHz  | 18      | 2436 MHz  | 28      | 2456 MHz  | 38      | 2476 MHz  |
| 9                                   | 2418 MHz  | 19      | 2438 MHz  | 29      | 2458 MHz  | 39      | 2478 MHz  |
| 10                                  | 2420 MHz  | 20      | 2440 MHz  | 30      | 2460 MHz  | 40      | 2480 MHz  |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2440MHz   |
| The Highest channel | 2480MHz   |

| Test Item                                 | Software | Description                                     |
|-------------------------------------------|----------|-------------------------------------------------|
| Conducted RF Testing and Radiated testing | RTLBTAPP | Set the EUT to different modulation and channel |

Output power setting table:

| Test Mode | Set Tx Output Power | Data Rate |
|-----------|---------------------|-----------|
| BLE       | 0x44                | 1Mbps     |

## Test mode

|                                                                                                                                                                                                                                              |                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                            | Keep the EUT in continuously transmitting mode |
| <i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> |                                                |

## 5.2 Description of Support Units

|                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------|
| Adapter: Input: AC 100-240V~, 50/60Hz<br>Output: 5V  , 1A |
|--------------------------------------------------------------------------------------------------------------------------------------------|

## 5.3 Deviation from Standards

|       |
|-------|
| None. |
|-------|

## 5.4 Abnormalities from Standard Conditions

|       |
|-------|
| None. |
|-------|

## 5.5 Test Facility

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The test facility is recognized, certified, or accredited by the following organizations:<br>• <b>FCC—Registration No.: 381383</b><br>Designation Number: CN5029<br>Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.<br>• <b>ISED—Registration No.: 9079A</b><br>CAB identifier: CN0091<br>The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing<br>• <b>NVLAP (LAB CODE:600179-0)</b><br>Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5.6 Test Location

|                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All tests were performed at:                                                                                                                                                                                                                        |
| Global United Technology Services Co., Ltd.<br>Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102<br>Tel: 0755-27798480<br>Fax: 0755-27798960 |

## 6 Test Instruments list

| Radiated Emission: |                                     |                                |                       |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.             | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H) | GTS250        | June 23, 2021       | June 22, 2024           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H) | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                 | GTS203        | April 14, 2023      | April 13, 2024          |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9168              | GTS640        | March 19, 2023      | March 18, 2025          |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D           | GTS208        | April 17, 2023      | April 16, 2025          |
| 6                  | EMI Test Software                   | AUDIX                          | E3                    | N/A           | N/A                 | N/A                     |
| 7                  | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                | GTS575        | April 14, 2023      | April 13, 2024          |
| 8                  | Loop Antenna                        | ZHINAN                         | ZN30900A              | GTS534        | Nov. 29, 2022       | Nov. 28, 2023           |
| 9                  | Broadband Preamplifier              | SCHWARZBECK                    | BBV9718               | GTS535        | April 14, 2023      | April 13, 2024          |
| 10                 | Amplifier(1GHz-26.5GHz)             | HP                             | 8449B                 | GTS601        | April 14, 2023      | April 13, 2024          |
| 11                 | Horn Antenna (18-26.5GHz)           | /                              | UG-598A/U             | GTS664        | Oct. 30, 2022       | Oct. 29, 2023           |
| 12                 | Horn Antenna (26.5-40GHz)           | A.H Systems                    | SAS-573               | GTS665        | Oct. 30, 2022       | Oct. 29, 2023           |
| 13                 | FSV·Signal Analyzer (10Hz-40GHz)    | Keysight                       | FSV-40-N              | GTS666        | March 13, 2023      | March 12, 2024          |
| 14                 | Amplifier                           | /                              | LNA-1000-30S          | GTS650        | April 14, 2023      | April 13, 2024          |
| 15                 | CDNE M2+M3-16A                      | HCT                            | 30MHz-300MHz          | GTS668        | Dec. 20, 2022       | Dec.19, 2023            |
| 16                 | Wideband Amplifier                  | /                              | WDA-01004000-15P35    | GTS602        | April 14, 2023      | April 13, 2024          |
| 17                 | Thermo meter                        | JINCHUANG                      | GSP-8A                | GTS643        | April 19, 2023      | April 18, 2024          |
| 18                 | RE cable 1                          | GTS                            | N/A                   | GTS675        | July 31. 2023       | July 30. 2024           |
| 19                 | RE cable 2                          | GTS                            | N/A                   | GTS676        | July 31. 2023       | July 30. 2024           |
| 20                 | RE cable 3                          | GTS                            | N/A                   | GTS677        | July 31. 2023       | July 30. 2024           |
| 21                 | RE cable 4                          | GTS                            | N/A                   | GTS678        | July 31. 2023       | July 30. 2024           |
| 22                 | RE cable 5                          | GTS                            | N/A                   | GTS679        | July 31. 2023       | July 30. 2024           |
| 23                 | RE cable 6                          | GTS                            | N/A                   | GTS680        | July 31. 2023       | July 30. 2024           |
| 24                 | RE cable 7                          | GTS                            | N/A                   | GTS681        | July 31. 2023       | July 30. 2024           |
| 25                 | RE cable 8                          | GTS                            | N/A                   | GTS682        | July 31. 2023       | July 30. 2024           |



| Conducted Emission |                      |                         |                      |               |                     |                         |
|--------------------|----------------------|-------------------------|----------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment       | Manufacturer            | Model No.            | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | Shielding Room       | ZhongYu Electron        | 7.3(L)x3.1(W)x2.9(H) | GTS252        | July 12, 2022       | July 11, 2027           |
| 2                  | EMI Test Receiver    | R&S                     | ESCI 7               | GTS552        | April 14, 2023      | April 13, 2024          |
| 3                  | LISN                 | ROHDE & SCHWARZ         | ENV216               | GTS226        | April 14, 2023      | April 13, 2024          |
| 4                  | Coaxial Cable        | GTS                     | N/A                  | GTS227        | N/A                 | N/A                     |
| 5                  | EMI Test Software    | AUDIX                   | E3                   | N/A           | N/A                 | N/A                     |
| 6                  | Thermo meter         | JINCHUANG               | GSP-8A               | GTS642        | April 19, 2023      | April 18, 2024          |
| 7                  | Absorbing clamp      | Elektronik-Feinmechanik | MDS21                | GTS229        | April 14, 2023      | April 13, 2024          |
| 8                  | ISN                  | SCHWARZBECK             | NTFM 8158            | GTS565        | April 14, 2023      | April 13, 2024          |
| 9                  | High voltage probe   | SCHWARZBECK             | TK9420               | GTS537        | April 14, 2023      | April 13, 2024          |
| 10                 | Antenna end assembly | Weinschel               | 1870A                | GTS560        | April 14, 2023      | April 13, 2024          |

| RF Conducted Test: |                                                |              |                  |            |                     |                         |
|--------------------|------------------------------------------------|--------------|------------------|------------|---------------------|-------------------------|
| Item               | Test Equipment                                 | Manufacturer | Model No.        | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | MXA Signal Analyzer                            | Agilent      | N9020A           | GTS566     | April 14, 2023      | April 13, 2024          |
| 2                  | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | April 14, 2023      | April 13, 2024          |
| 3                  | PSA Series Spectrum Analyzer                   | Agilent      | E4440A           | GTS536     | April 14, 2023      | April 13, 2024          |
| 4                  | MXG vector Signal Generator                    | Agilent      | N5182A           | GTS567     | April 14, 2023      | April 13, 2024          |
| 5                  | ESG Analog Signal Generator                    | Agilent      | E4428C           | GTS568     | April 14, 2023      | April 13, 2024          |
| 6                  | USB RF Power Sensor                            | DARE         | RPR3006W         | GTS569     | April 14, 2023      | April 13, 2024          |
| 7                  | RF Switch Box                                  | Shongyi      | RFSW3003328      | GTS571     | April 14, 2023      | April 13, 2024          |
| 8                  | Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | GTS572     | April 14, 2023      | April 13, 2024          |
| 9                  | Thermo meter                                   | JINCHUANG    | GSP-8A           | GTS641     | April 19, 2023      | April 18, 2024          |


| General used equipment: |                |              |           |               |                     |                         |
|-------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                       | Barometer      | KUMAO        | SF132     | GTS647        | April 19, 2023      | April 18, 2024          |

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | FCC Part15 C Section 15.203 /247(b)(4) |
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.                                                                                                         |                                        |
| <b>15.247(b)(4) requirement:</b><br>(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |                                        |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                        |
| <i>The antenna is Internal antenna, the best case gain of the is 0.17dBi, reference to the appendix II for details</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                        |


## 7.2 Conducted Emissions
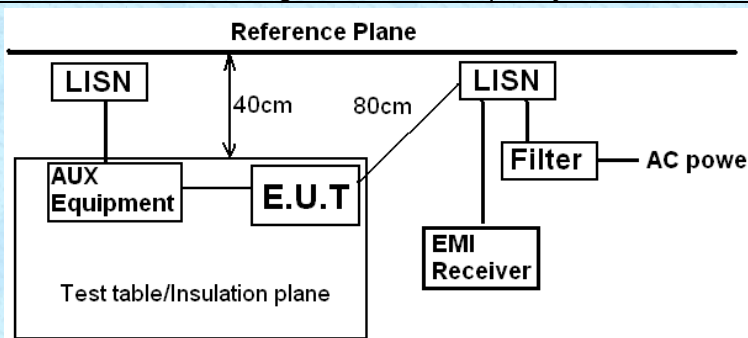
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------|-----|-----------|----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |              |     |           |          |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |       |              |     |           |          |
| Receiver setup:                                  | RBW=9kHz, VBW=30kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |              |     |           |          |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       | Limit (dBuV) |     |           |          |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       | Quasi-peak   |     | Average   |          |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       | 66 to 56*    |     | 56 to 46* |          |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       | 56           |     | 46        |          |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       | 60           |     | 50        |          |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |
| Test setup:                                      | <div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.1m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |
| Test procedure:                                  | <div><ol style="list-style-type: none"><li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2009 on conducted measurement.</li></ol></div> |       |              |     |           |          |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |
| Test mode:                                       | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |
| Test environment:                                | Temp.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 25 °C | Humid.:      | 52% | Press.:   | 1012mbar |
| Test voltage:                                    | AC 120V, 60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |              |     |           |          |
| Test results:                                    | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |              |     |           |          |




Pre-scan all test modes, found worst case at GFSK 1M 2402MHz, and so only show the test result of GFSK 1M 2402MHz

Line:

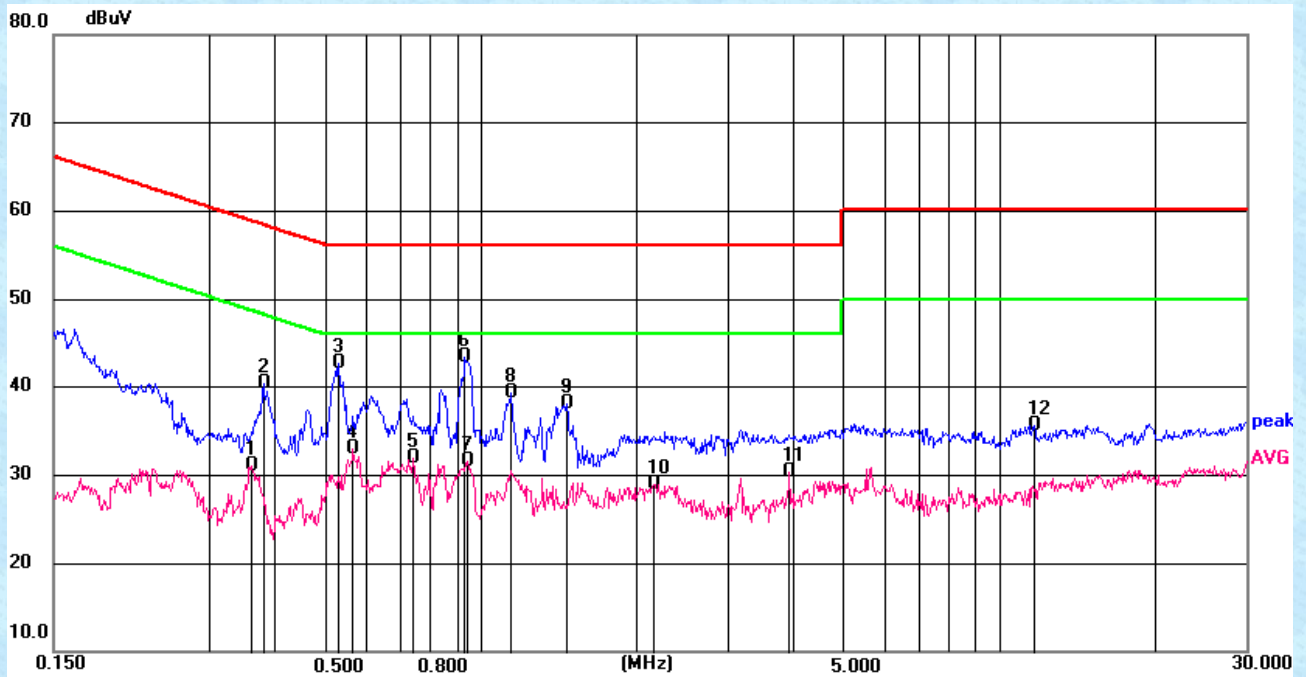

| Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----------------|----------------|-------------|--------------|--------------|-------------|--------|
| 0.3613          | 21.04          | 10.01       | 31.05        | 48.7         | 17.65       | AVG    |
| 0.381           | 30.42          | 10.01       | 40.43        | 58.26        | 17.83       | QP     |
| 0.5321          | 32.63          | 10.02       | 42.65        | 56           | 13.35       | QP     |
| 0.5664          | 22.95          | 10.02       | 32.97        | 46           | 13.03       | AVG    |
| 0.7429          | 21.87          | 10.02       | 31.89        | 46           | 14.11       | AVG    |
| 0.9331          | 33.41          | 10.03       | 43.44        | 56           | 12.56       | QP     |
| 0.9425          | 21.61          | 10.03       | 31.64        | 46           | 14.36       | AVG    |
| 1.1471          | 29.41          | 10.03       | 39.44        | 56           | 16.56       | QP     |
| 1.4637          | 28.07          | 10.04       | 38.11        | 56           | 17.89       | QP     |
| 2.1551          | 18.91          | 10.06       | 28.97        | 46           | 17.03       | AVG    |
| 3.9428          | 20.3           | 10.12       | 30.42        | 46           | 15.58       | AVG    |
| 11.6821         | 25.29          | 10.33       | 35.62        | 60           | 24.38       | QP     |

## Neutral:

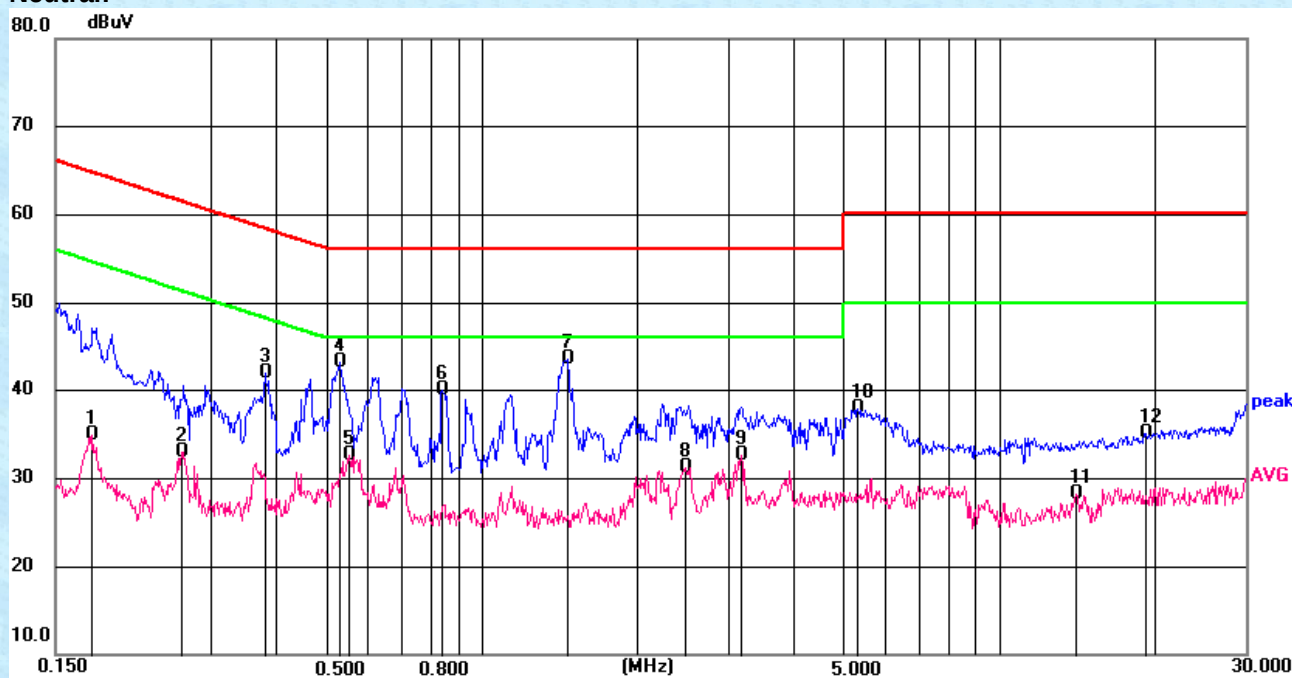


| Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----------------|----------------|-------------|--------------|--------------|-------------|--------|
| 0.1766          | 24.87          | 10.01       | 34.88        | 54.64        | 19.76       | AVG    |
| 0.263           | 23.08          | 10.01       | 33.09        | 51.34        | 18.25       | AVG    |
| 0.381           | 31.92          | 10.01       | 41.93        | 58.26        | 16.33       | QP     |
| 0.5321          | 33.13          | 10.02       | 43.15        | 56           | 12.85       | QP     |
| 0.5551          | 22.7           | 10.02       | 32.72        | 46           | 13.28       | AVG    |
| 0.8393          | 30.11          | 10.02       | 40.13        | 56           | 15.87       | QP     |
| 1.4637          | 33.57          | 10.04       | 43.61        | 56           | 12.39       | QP     |
| 2.4735          | 21.23          | 10.07       | 31.3         | 46           | 14.7        | AVG    |
| 3.173           | 22.54          | 10.09       | 32.63        | 46           | 13.37       | AVG    |
| 5.333           | 27.82          | 10.16       | 37.98        | 60           | 22.02       | QP     |
| 14.0625         | 17.85          | 10.37       | 28.22        | 50           | 21.78       | AVG    |
| 19.2236         | 24.64          | 10.46       | 35.1         | 60           | 24.9        | QP     |

### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
  2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
  3. Final Level = Receiver Read level + LISN Factor + Cable Loss
- If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

## 7.3 Conducted Peak Output Power
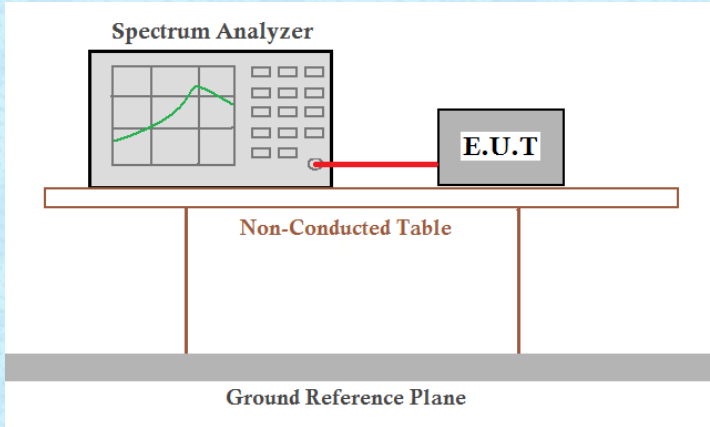
|                   |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3)                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                             |
| Limit:            | 30dBm                                                                                                                                                                                                                                                                                                                                                      |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                       |


### Measurement Data

| Modulation mode | Test channel | Peak Output Power (dBm) | Output Power Limit(dBm) | Result |
|-----------------|--------------|-------------------------|-------------------------|--------|
| GFSK (1M)       | Lowest       | 4.46                    | 30.00                   | Pass   |
|                 | Middle       | 3.81                    | 30.00                   | Pass   |
|                 | Highest      | 3.46                    | 30.00                   | Pass   |




Test plot as follows:


## GFSK (1M)

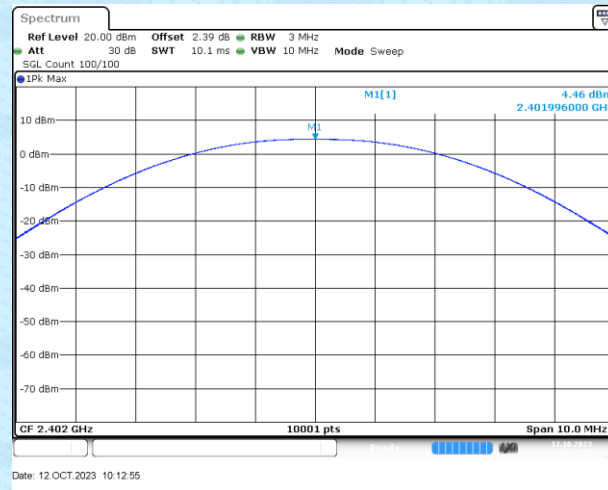

Lowest channel

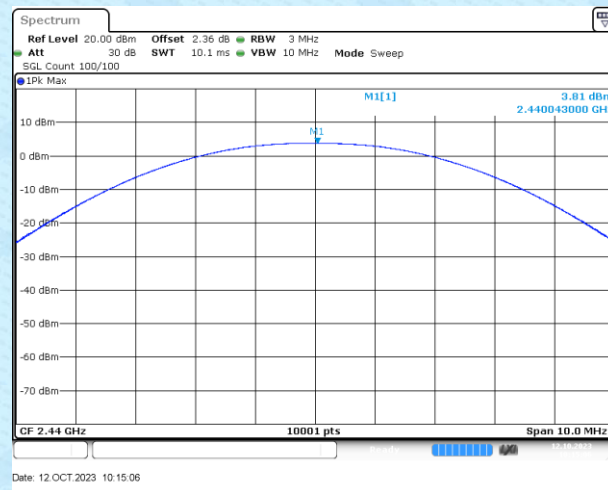


Middle channel

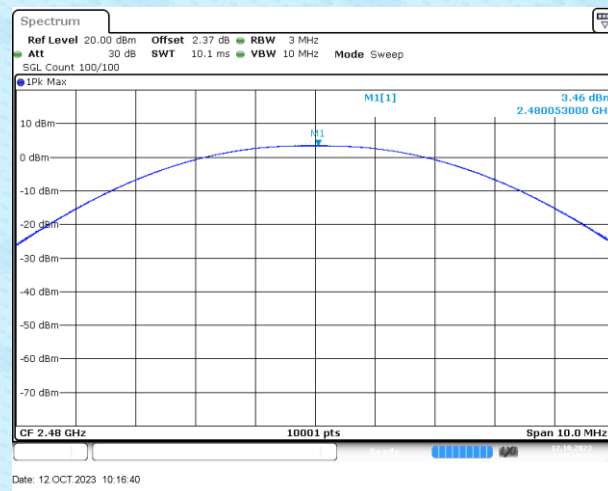

Highest channel

## 7.4 Channel Bandwidth & 99% Occupancy Bandwidth

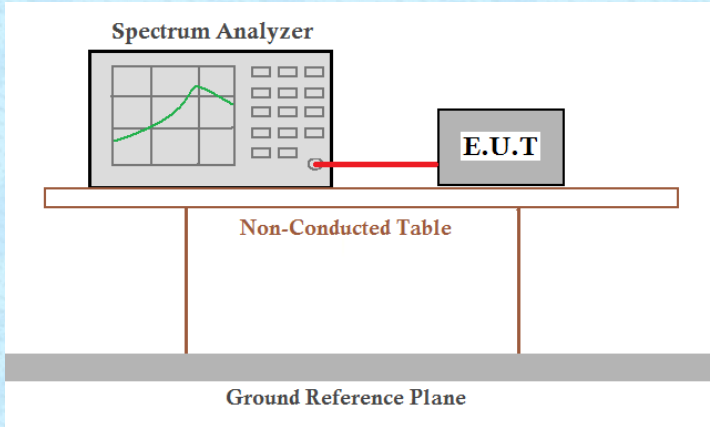
|                   |                                                                                                                                                                                                                                                                                                                |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(2)                                                                                                                                                                                                                                                                             |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                 |
| Limit:            | >500KHz                                                                                                                                                                                                                                                                                                        |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                               |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                               |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                           |

### Measurement Data

| Modulation mode | Test channel | Channel Bandwidth (MHz) | Limit(KHz) | Result |
|-----------------|--------------|-------------------------|------------|--------|
| GFSK (1M)       | Lowest       | 0.654                   | >500       | Pass   |
|                 | Middle       | 0.656                   |            |        |
|                 | Highest      | 0.661                   |            |        |


| Modulation mode | Test channel | 99% Bandwidth (MHz) | Result |
|-----------------|--------------|---------------------|--------|
| GFSK (1M)       | Lowest       | 1.037               | Pass   |
|                 | Middle       | 1.026               |        |
|                 | Highest      | 1.022               |        |

Test plot as follows:

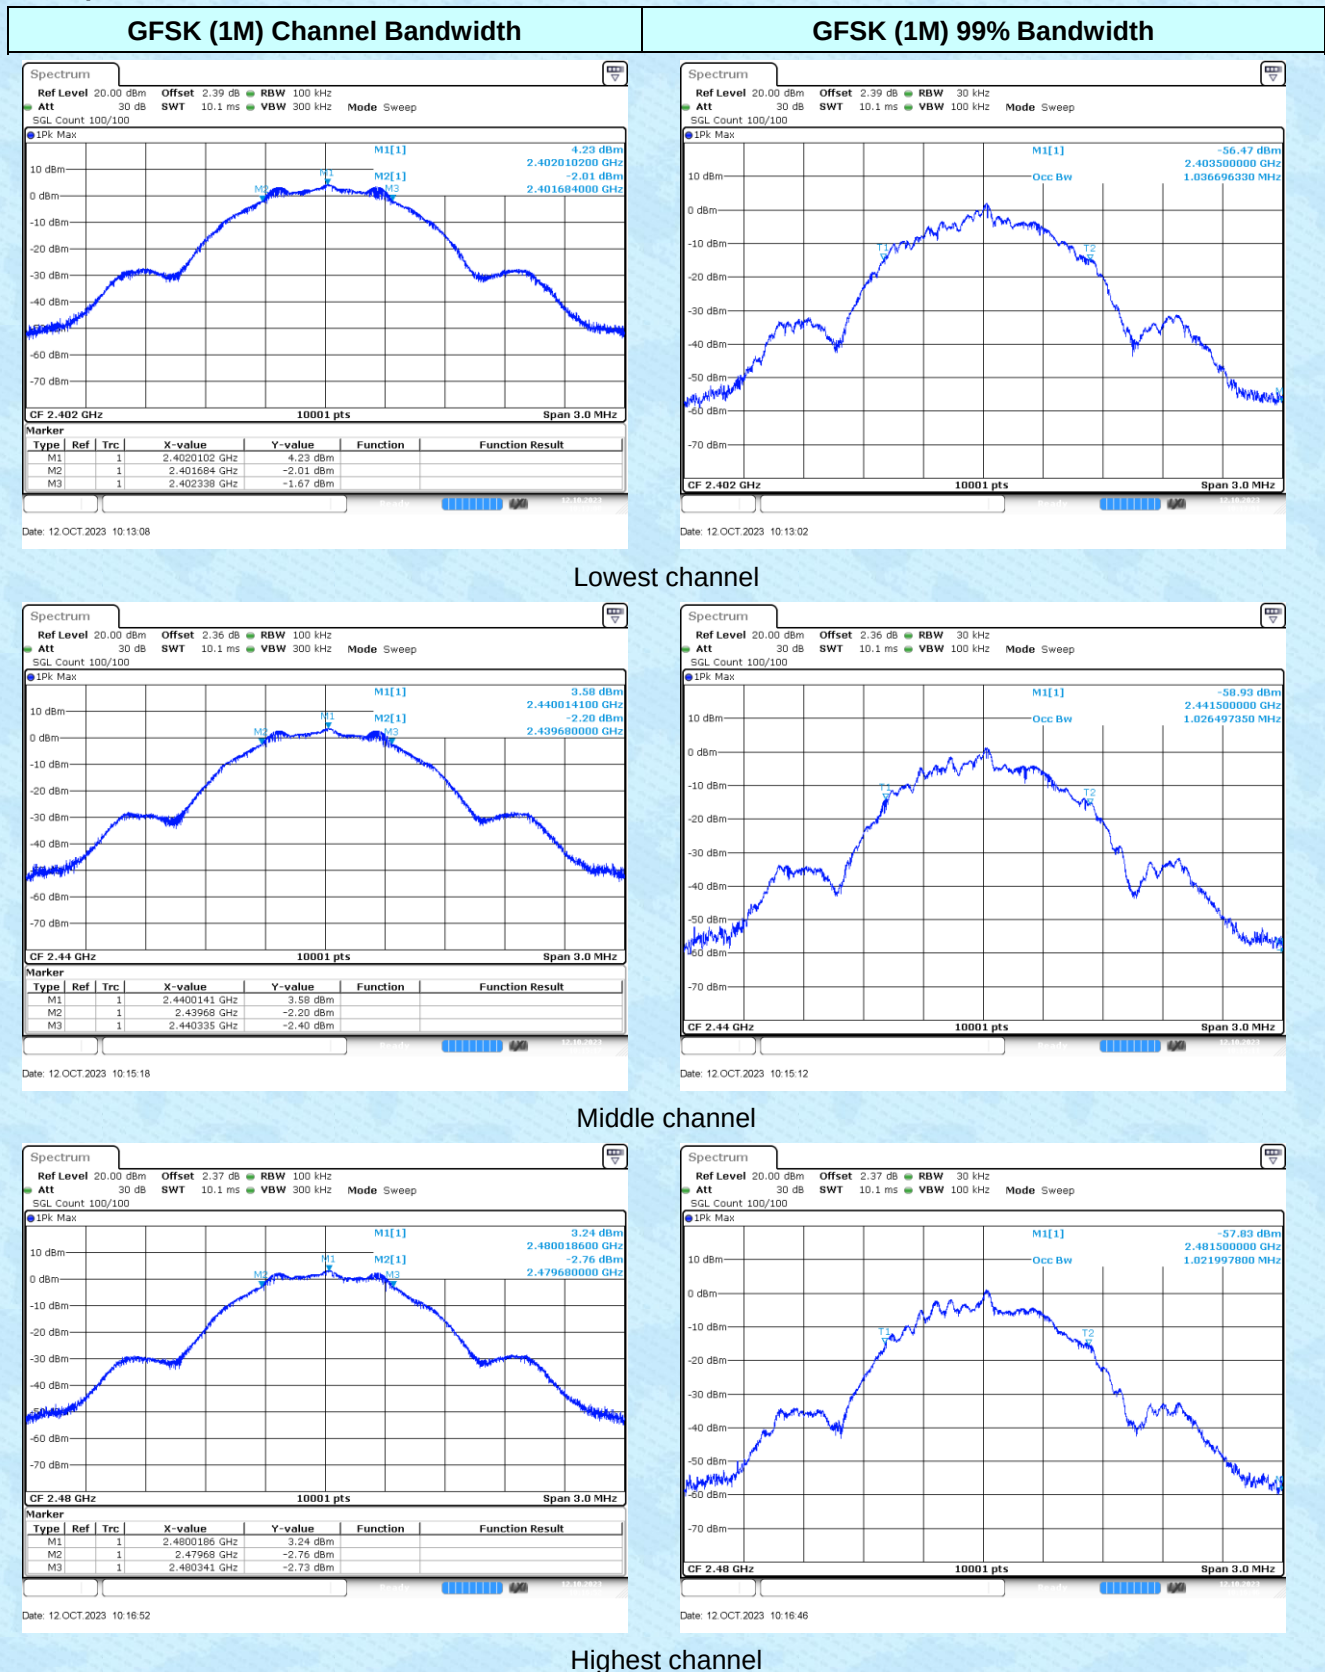



## 7.5 Power Spectral Density

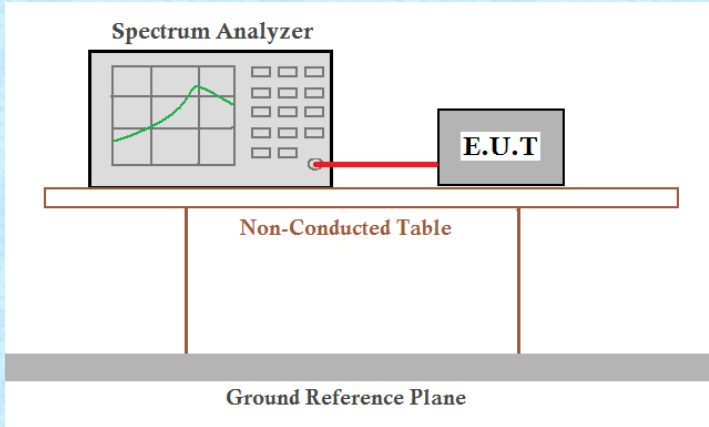
|                   |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                             |
| Limit:            | 8dBm/3kHz                                                                                                                                                                                                                                                                                                                                                  |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                       |

### Measurement Data


| Modulation mode | Test channel | Power Spectral Density (dBm/3kHz) | Limit(dBm/3kHz) | Result |
|-----------------|--------------|-----------------------------------|-----------------|--------|
| GFSK(1M)        | Lowest       | -9.63                             | 8.00            | Pass   |
|                 | Middle       | -12.81                            |                 |        |
|                 | Highest      | -12.41                            |                 |        |

Test plot as follows:


## GFSK (1M)

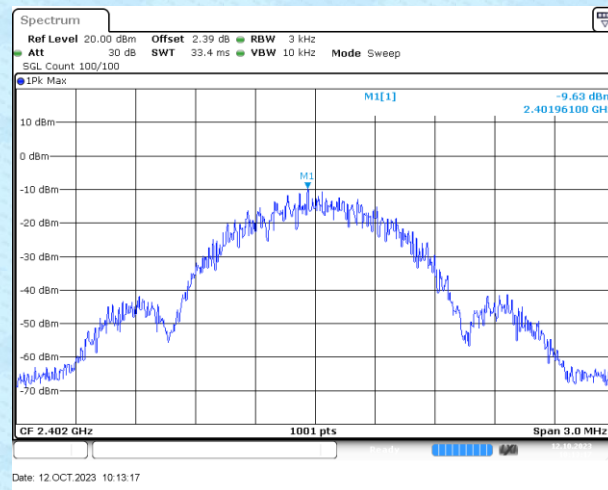

Lowest channel

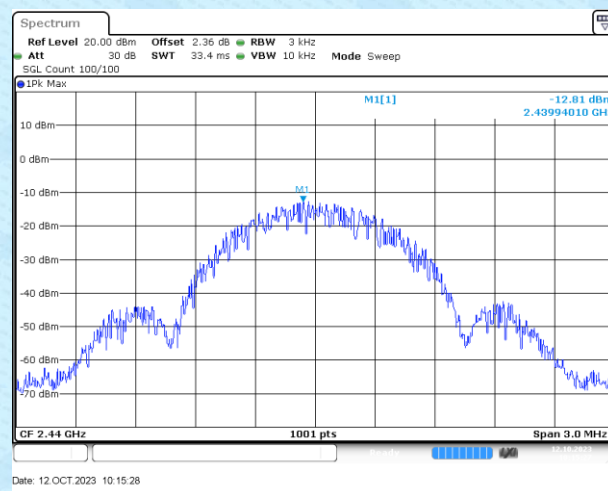


Middle channel

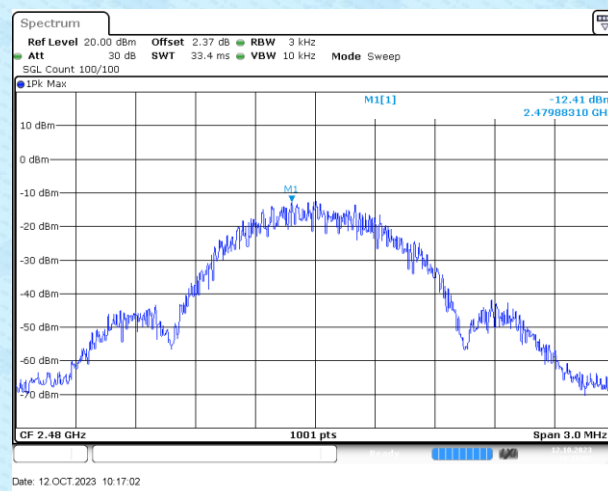

Highest channel

## 7.6 Spurious Emission in Non-restricted & restricted Bands


### 7.6.1 Conducted Emission Method
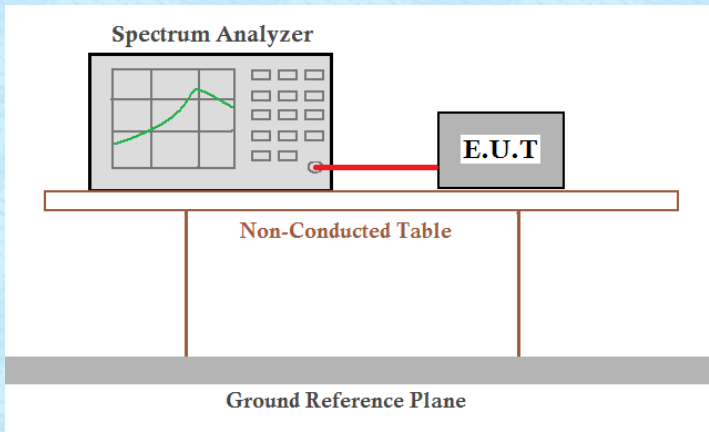
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                     |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.                                            |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                               |




Test plot as follows:


## GFSK (1M)

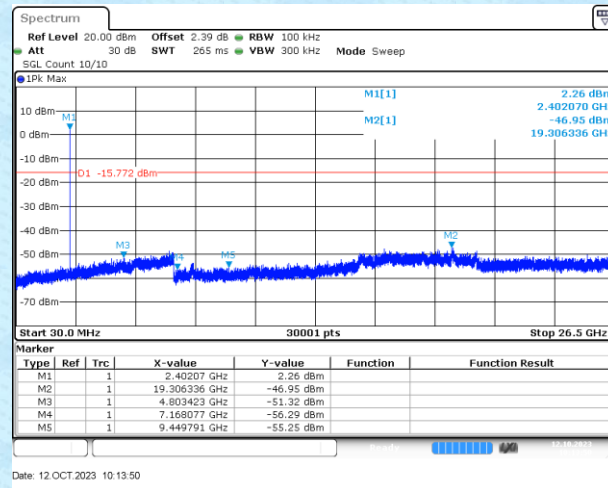

## Lowest channel

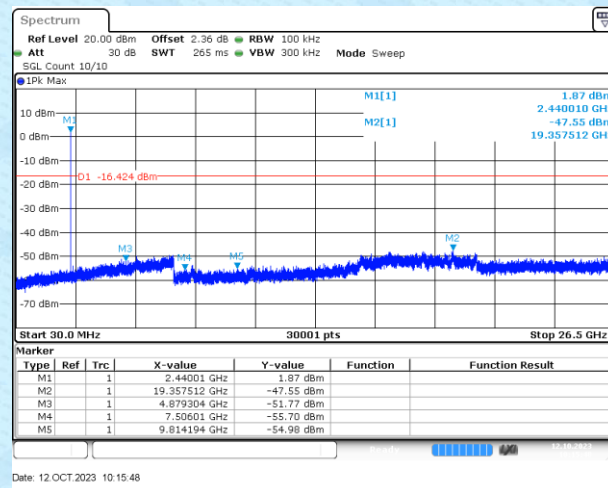


## Middle channel

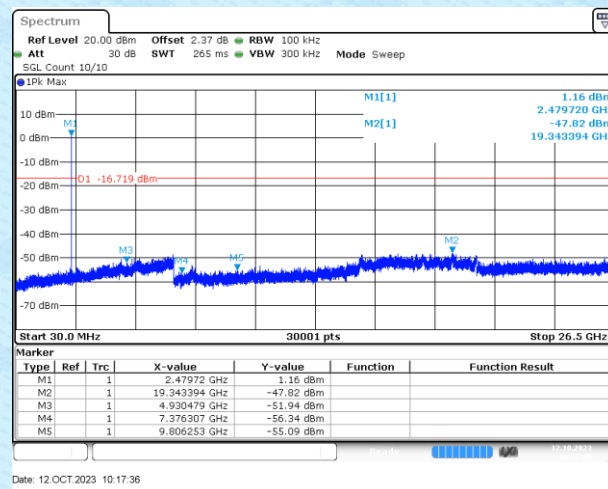


## Highest channel

## GFSK (1M)

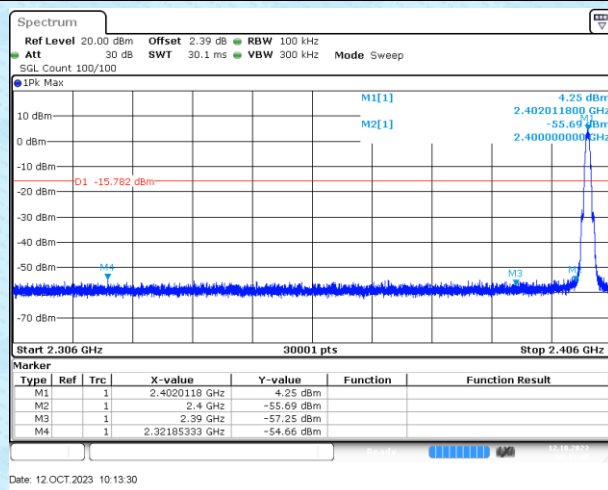


### Lowest channel


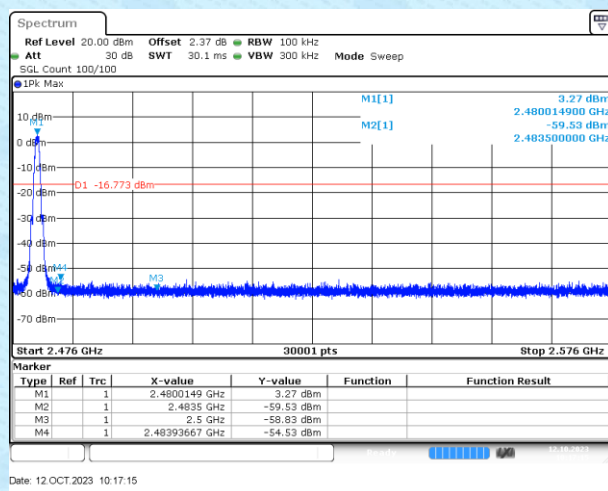


### Highest channel

## 7.6.2 Radiated Emission Method
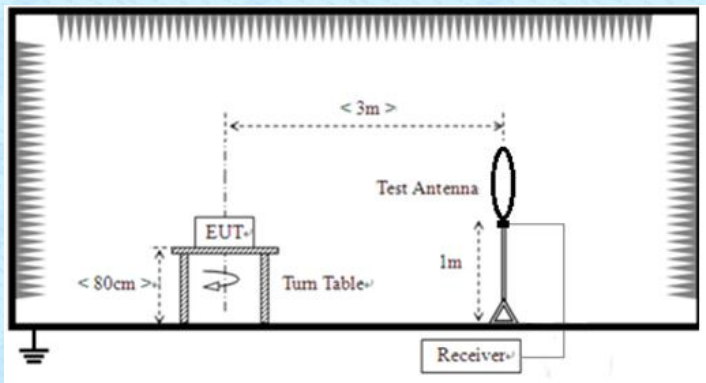
|                       |                                                                                      |              |        |         |                      |
|-----------------------|--------------------------------------------------------------------------------------|--------------|--------|---------|----------------------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                               |              |        |         |                      |
| Test Method:          | ANSI C63.10:2013 & RSS-Gen                                                           |              |        |         |                      |
| Test Frequency Range: | 9kHz to 26.5GHz                                                                      |              |        |         |                      |
| Test site:            | Measurement Distance: 3m                                                             |              |        |         |                      |
| Receiver setup:       | Frequency                                                                            | Detector     | RBW    | VBW     | Value                |
|                       | 9KHz-150KHz                                                                          | Quasi-peak   | 200Hz  | 600Hz   | Quasi-peak           |
|                       | 150KHz-30MHz                                                                         | Quasi-peak   | 9KHz   | 30KHz   | Quasi-peak           |
|                       | 30MHz-1GHz                                                                           | Quasi-peak   | 120KHz | 300KHz  | Quasi-peak           |
|                       | Above 1GHz                                                                           | Peak         | 1MHz   | 3MHz    | Peak                 |
|                       |                                                                                      | Peak         | 1MHz   | 10Hz    | Average              |
| Limit:                | Frequency                                                                            | Limit (uV/m) |        | Value   | Measurement Distance |
|                       | 0.009MHz-0.490MHz                                                                    | 2400/F(KHz)  |        | QP      | 300m                 |
|                       | 0.490MHz-1.705MHz                                                                    | 24000/F(KHz) |        | QP      | 30m                  |
|                       | 1.705MHz-30MHz                                                                       | 30           |        | QP      | 30m                  |
|                       | 30MHz-88MHz                                                                          | 100          |        | QP      | 3m                   |
|                       | 88MHz-216MHz                                                                         | 150          |        | QP      |                      |
|                       | 216MHz-960MHz                                                                        | 200          |        | QP      |                      |
|                       | 960MHz-1GHz                                                                          | 500          |        | QP      |                      |
|                       | Above 1GHz                                                                           | 500          |        | Average |                      |
|                       |                                                                                      | 5000         |        | Peak    |                      |
| Test setup:           | For radiated emissions from 9kHz to 30MHz                                            |              |        |         |                      |
|                       |  |              |        |         |                      |

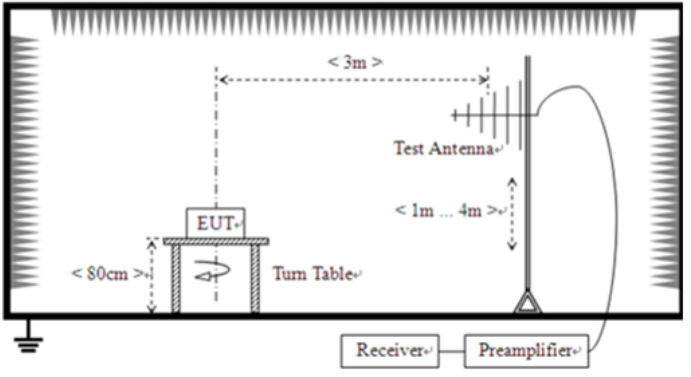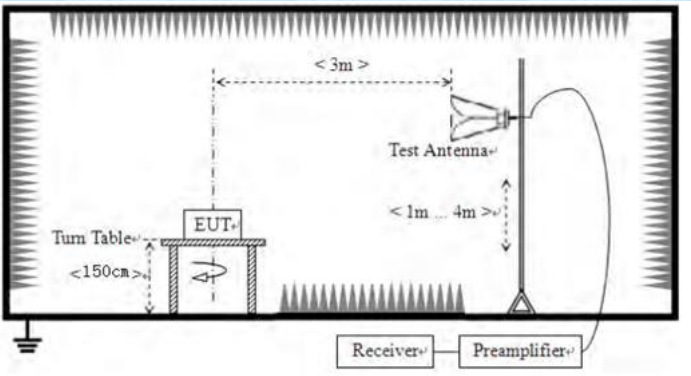

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <p>Test Procedure:</p>   | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.1m) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <p>Test mode:</p>        | <p>Refer to section 5.2 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                   |         |       |         |     |         |          |
|-------------------|---------|-------|---------|-----|---------|----------|
| Test environment: | Temp.:  | 26 °C | Humid.: | 54% | Press.: | 1012mbar |
| Test voltage:     | DC 3.7V |       |         |     |         |          |
| Test results:     | Pass    |       |         |     |         |          |

**Measurement data:***Remark:*

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


**■ 9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## ■ Below 1GHz

Pre-scan all test modes, found worst case at GFSK(1M) 2402MHz, and so only show the test result of GFSK(1M) 2402MHz


### Horizontal:

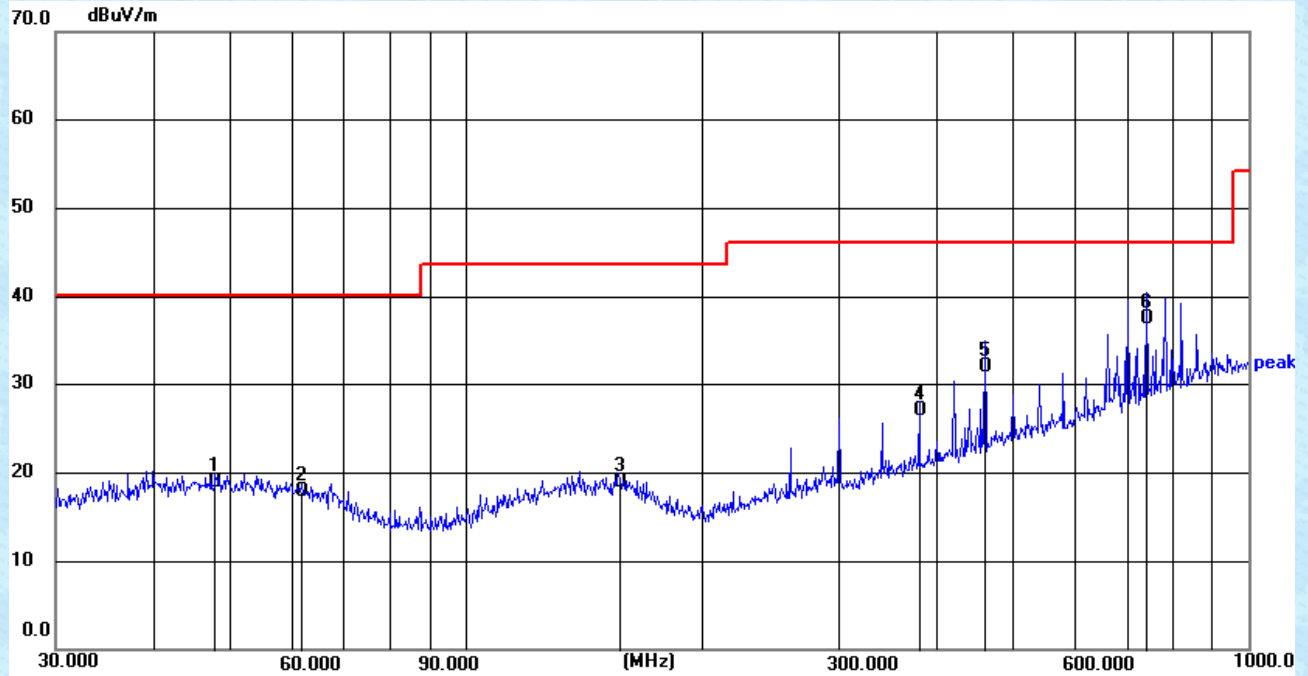

| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|---------------|----------------|----------------|-------------|--------|
| 47.9940         | 4.28           | 14.67         | 18.95          | 40.00          | 21.05       | QP     |
| 61.7781         | 4.21           | 13.62         | 17.83          | 40.00          | 22.17       | QP     |
| 157.0074        | 4.33           | 14.68         | 19.01          | 43.50          | 24.49       | QP     |
| 379.9141        | 9.92           | 17.16         | 27.08          | 46.00          | 18.92       | QP     |
| 460.7271        | 12.75          | 19.17         | 31.92          | 46.00          | 14.08       | QP     |
| 742.2587        | 13.85          | 23.61         | 37.46          | 46.00          | 8.54        | QP     |



**Vertical:**

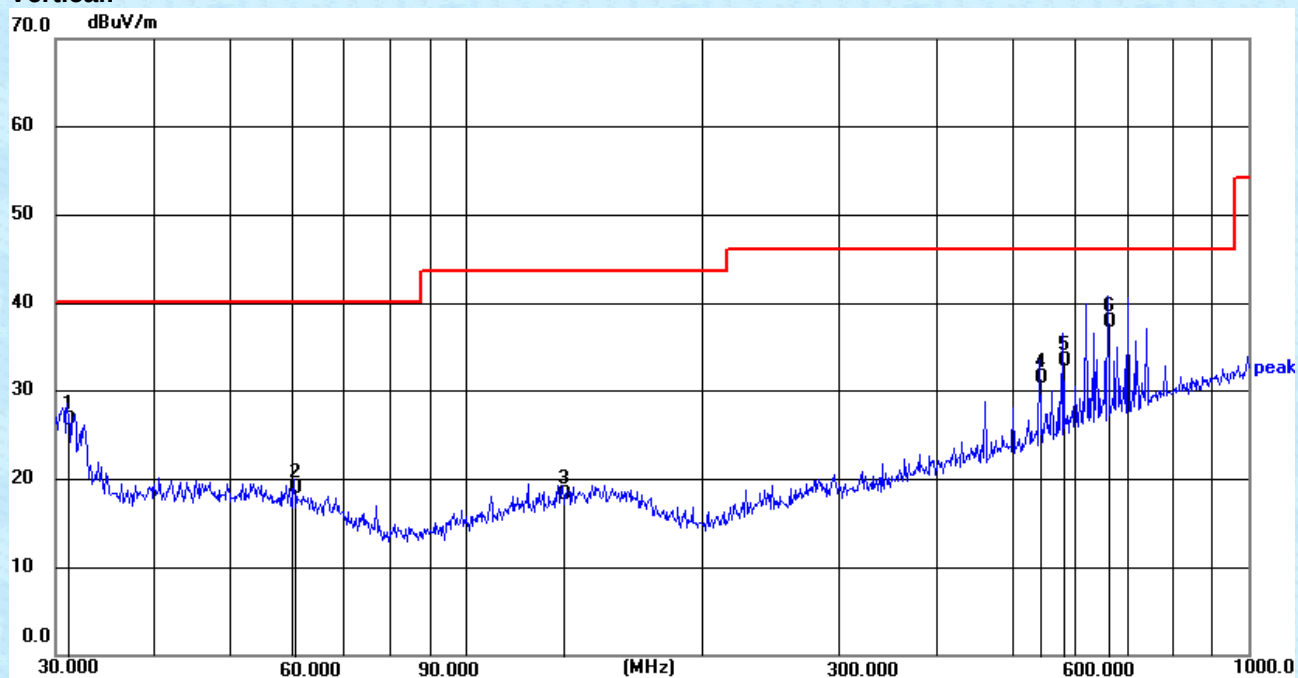

| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|---------------|----------------|----------------|-------------|--------|
| 31.0706         | 14.04          | 12.65         | 26.69          | 40.00          | 13.31       | QP     |
| 60.4918         | 5.50           | 13.51         | 19.01          | 40.00          | 20.99       | QP     |
| 133.1511        | 4.40           | 13.90         | 18.30          | 43.50          | 25.20       | QP     |
| 541.3725        | 11.23          | 20.28         | 31.51          | 46.00          | 14.49       | QP     |
| 580.7026        | 12.52          | 20.98         | 33.50          | 46.00          | 12.50       | QP     |
| 661.1505        | 15.54          | 22.22         | 37.76          | 46.00          | 8.24        | QP     |

**Remark:**

1. An initial pre-scan was performed on the Horizontal and Vertical with peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Level = Reading + Factor
4. Factor = Antenna Gain + Cable Loss – Amplifier Gain

## ■ Unwanted Emissions in non-restricted Frequency Bands

### Above 1GHz

|            |        |               |        |
|------------|--------|---------------|--------|
| Test mode: | BLE 1M | Test channel: | Lowest |
|------------|--------|---------------|--------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804            | 38.55             | 31.62                 | 8.58            | 32.11              | 46.64          | 74                  | -27.36          | Vertical     |
| 4804            | 36.83             | 31.62                 | 8.58            | 32.11              | 44.92          | 74                  | -29.08          | Horizontal   |

|            |        |               |        |
|------------|--------|---------------|--------|
| Test mode: | BLE 1M | Test channel: | Middle |
|------------|--------|---------------|--------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4880            | 37.54             | 31.92                 | 8.71            | 32.11              | 46.06          | 74                  | -27.94          | Vertical     |
| 4880            | 35.63             | 31.92                 | 8.71            | 32.11              | 44.15          | 74                  | -29.85          | Horizontal   |

|            |        |               |         |
|------------|--------|---------------|---------|
| Test mode: | BLE 1M | Test channel: | Highest |
|------------|--------|---------------|---------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960            | 36.34             | 31.96                 | 8.75            | 32.3               | 44.75          | 74                  | -29.25          | Vertical     |
| 4960            | 37.27             | 31.96                 | 8.75            | 32.3               | 45.68          | 74                  | -28.32          | Horizontal   |

|            |        |               |        |
|------------|--------|---------------|--------|
| Test mode: | BLE 1M | Test channel: | Lowest |
|------------|--------|---------------|--------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310            | 48.26             | 27.14                 | 6.19            | 42.04              | 39.55          | 74                  | -34.45          | Horizontal   |
| 2390            | 48.91             | 27.37                 | 6.31            | 42.11              | 40.48          | 74                  | -33.52          | Horizontal   |
| 2310            | 48.09             | 27.14                 | 6.19            | 42.04              | 39.38          | 74                  | -34.62          | Vertical     |
| 2390            | 47.57             | 27.37                 | 6.31            | 42.11              | 39.14          | 74                  | -34.86          | Vertical     |

|            |        |               |         |
|------------|--------|---------------|---------|
| Test mode: | BLE 1M | Test channel: | Highest |
|------------|--------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.5          | 51.16             | 27.66                 | 6.45            | 42.01              | 43.26          | 74                  | -30.74          | Horizontal   |
| 2500            | 46.87             | 27.7                  | 6.47            | 42                 | 39.04          | 74                  | -34.96          | Horizontal   |
| 2483.5          | 49.71             | 27.66                 | 6.45            | 42.01              | 41.81          | 74                  | -32.19          | Vertical     |
| 2500            | 47.07             | 27.7                  | 6.47            | 42                 | 39.24          | 74                  | -34.76          | Vertical     |

**Remark.**

1.  $Level = Reading\ Level + Antenna\ factor + Cable\ Loss - Amplifier\ factor$
2. other emissions are attenuated 20dB below the limits, so it does not reported.



## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----