


## Part 1: 1GHz~6.5GHz

### HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

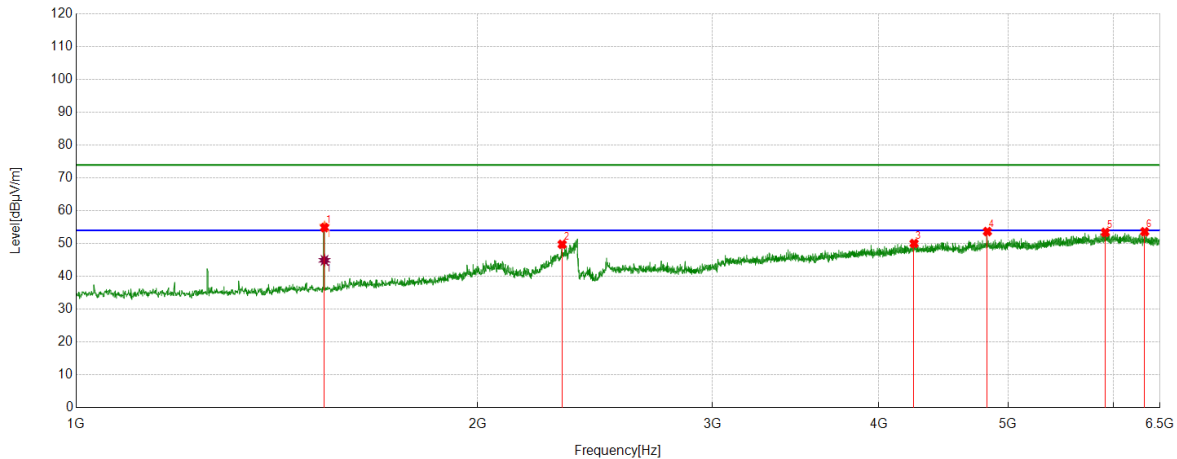

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	55.48	-0.62	54.86	74.00	-19.14	Horizontal
2	2314.6643	45.23	4.53	49.76	74.00	-24.24	Horizontal
3	4250.2188	36.06	13.96	50.02	74.00	-23.98	Horizontal
4	4824.3530	37.99	15.67	53.66	74.00	-20.34	Horizontal
5	5914.1768	35.01	18.39	53.40	74.00	-20.60	Horizontal
6	6330.1663	34.49	19.11	53.60	74.00	-20.40	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	45.51	-0.62	44.89	54.00	-9.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

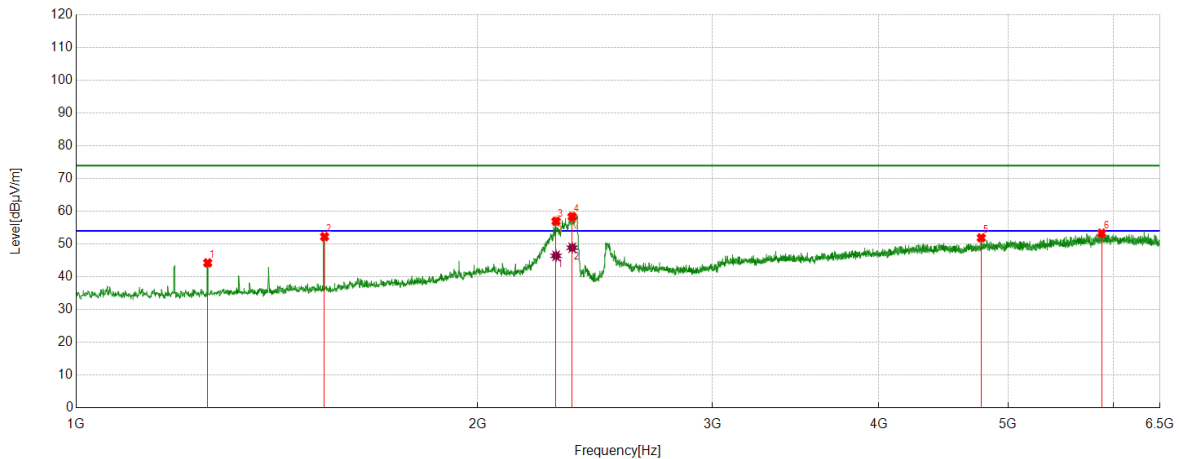

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.82	-1.57	44.25	74.00	-29.75	Vertical
2	1535.6295	52.87	-0.62	52.25	74.00	-21.75	Vertical
3	2290.5988	52.58	4.39	56.97	74.00	-17.03	Vertical
4	2355.2319	53.61	4.78	58.39	74.00	-15.61	Vertical
5	4773.4717	37.24	14.67	51.91	74.00	-22.09	Vertical
6	5876.3595	35.56	17.76	53.32	74.00	-20.68	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2290.5988	42.01	4.39	46.40	54.00	-7.60	Vertical
2	2355.2319	44.11	4.78	48.89	54.00	-5.11	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

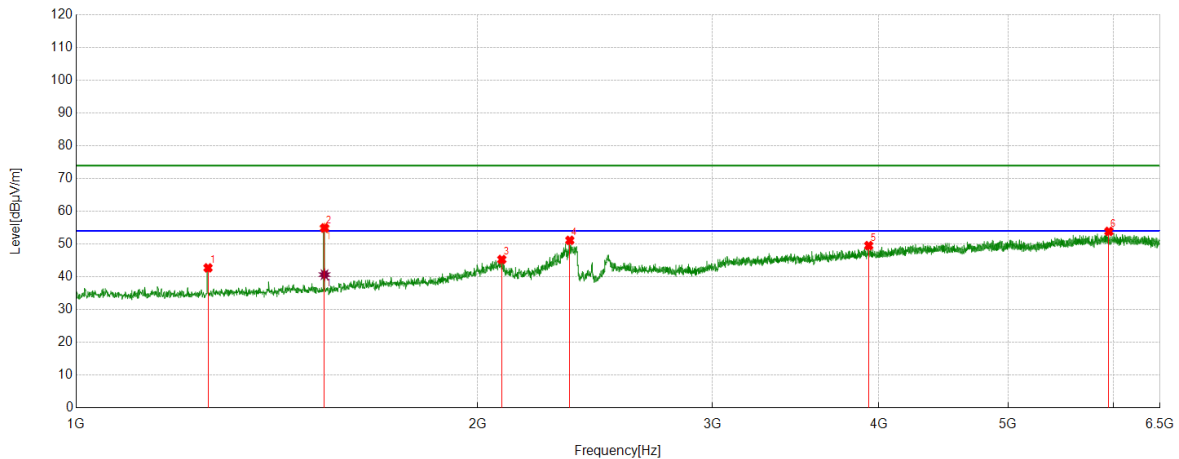

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.29	-1.57	42.72	74.00	-31.28	Horizontal
2	1535.6295	55.54	-0.62	54.92	74.00	-19.08	Horizontal
3	2085.6982	41.58	3.70	45.28	74.00	-28.72	Horizontal
4	2345.6057	46.27	4.87	51.14	74.00	-22.86	Horizontal
5	3930.4913	37.00	12.52	49.52	74.00	-24.48	Horizontal
6	5950.6188	35.40	18.47	53.87	74.00	-20.13	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.27	-0.62	40.65	54.00	-13.35	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

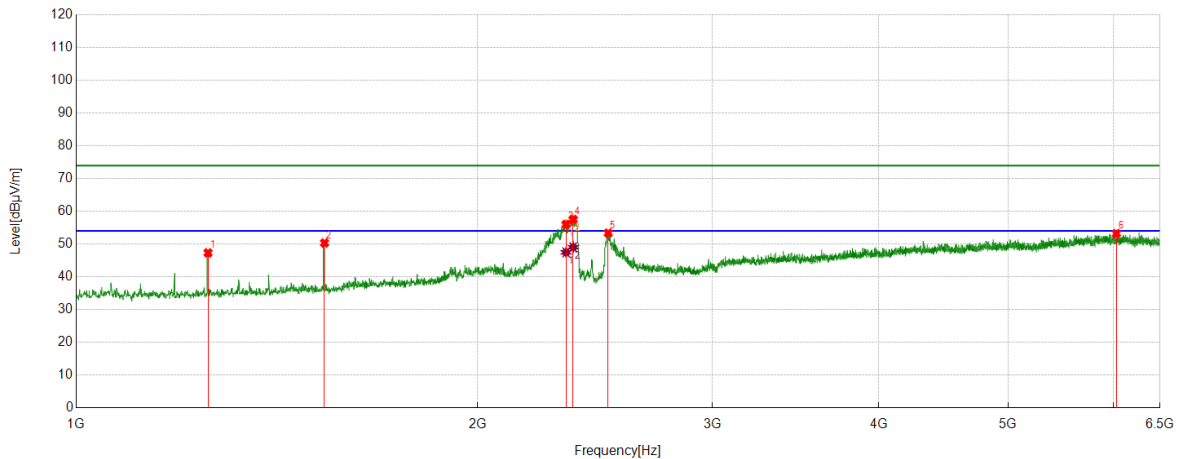

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	48.88	-1.57	47.31	74.00	-26.69	Vertical
2	1535.6295	50.95	-0.62	50.33	74.00	-23.67	Vertical
3	2330.4788	50.97	5.04	56.01	74.00	-17.99	Vertical
4	2359.3574	52.75	4.78	57.53	74.00	-16.47	Vertical
5	2506.5008	47.46	5.90	53.36	74.00	-20.64	Vertical
6	6029.0036	35.28	17.94	53.22	74.00	-20.78	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2330.4788	42.42	5.04	47.46	54.00	-6.54	Vertical
2	2359.3574	44.26	4.78	49.04	54.00	-4.96	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

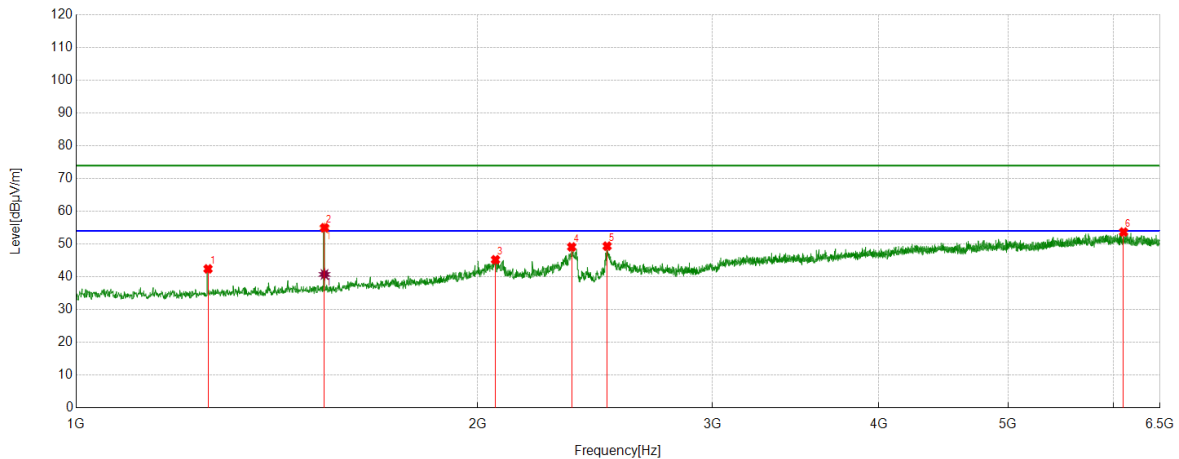

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	43.98	-1.57	42.41	74.00	-31.59	Horizontal
2	1535.6295	55.60	-0.62	54.98	74.00	-19.02	Horizontal
3	2063.0079	41.45	3.77	45.22	74.00	-28.78	Horizontal
4	2353.1691	44.35	4.77	49.12	74.00	-24.88	Horizontal
5	2501.6877	43.49	5.88	49.37	74.00	-24.63	Horizontal
6	6103.2629	35.44	18.24	53.68	74.00	-20.32	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.35	-0.62	40.73	54.00	-13.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

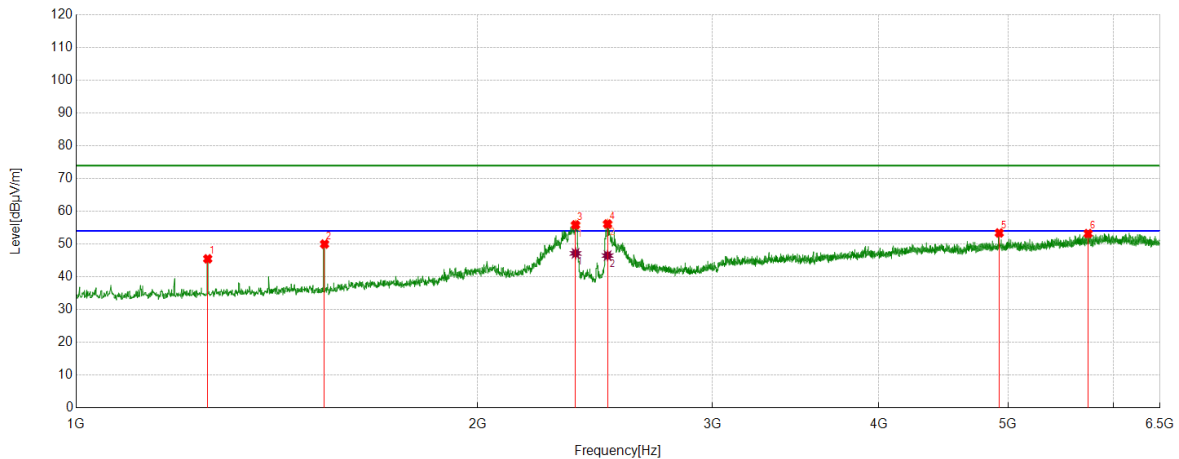

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.06	-1.57	45.49	74.00	-28.51	Vertical
2	1535.6295	50.62	-0.62	50.00	74.00	-24.00	Vertical
3	2368.9836	51.05	4.80	55.85	74.00	-18.15	Vertical
4	2503.7505	50.25	5.89	56.14	74.00	-17.86	Vertical
5	4924.0530	38.04	15.34	53.38	74.00	-20.62	Vertical
6	5740.9051	35.37	17.83	53.20	74.00	-20.80	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2368.9836	42.35	4.80	47.15	54.00	-6.85	Vertical
2	2503.7505	40.58	5.89	46.47	54.00	-7.53	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

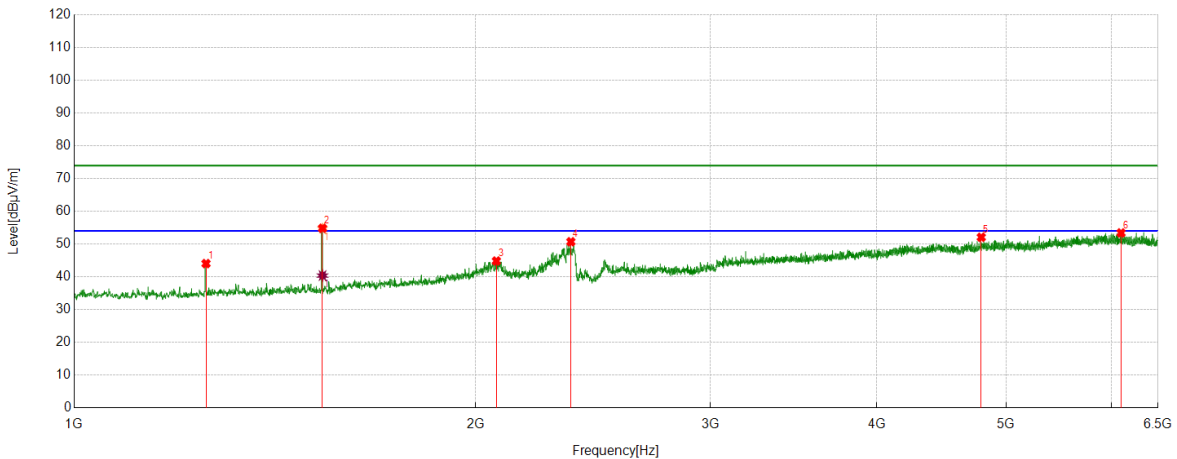

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	45.60	-1.57	44.03	74.00	-29.97	Horizontal
2	1535.6295	55.44	-0.62	54.82	74.00	-19.18	Horizontal
3	2073.3217	40.94	3.88	44.82	74.00	-29.18	Horizontal
4	2357.9822	45.93	4.77	50.70	74.00	-23.30	Horizontal
5	4789.9737	37.19	14.89	52.08	74.00	-21.92	Horizontal
6	6097.7622	35.08	18.33	53.41	74.00	-20.59	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.99	-0.62	40.37	54.00	-13.63	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

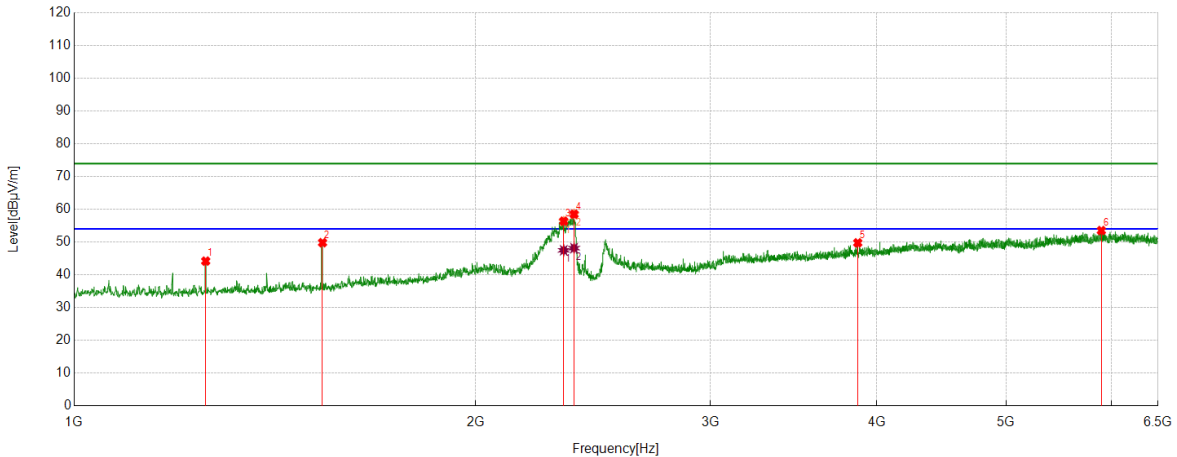

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.75	-1.57	44.18	74.00	-29.82	Vertical
2	1535.6295	50.43	-0.62	49.81	74.00	-24.19	Vertical
3	2329.1036	51.36	5.02	56.38	74.00	-17.62	Vertical
4	2371.0464	53.70	4.82	58.52	74.00	-15.48	Vertical
5	3869.9837	37.57	12.19	49.76	74.00	-24.24	Vertical
6	5893.5492	35.56	17.96	53.52	74.00	-20.48	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2329.1036	42.46	5.02	47.48	54.00	-6.52	Vertical
2	2371.0464	43.32	4.82	48.14	54.00	-5.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

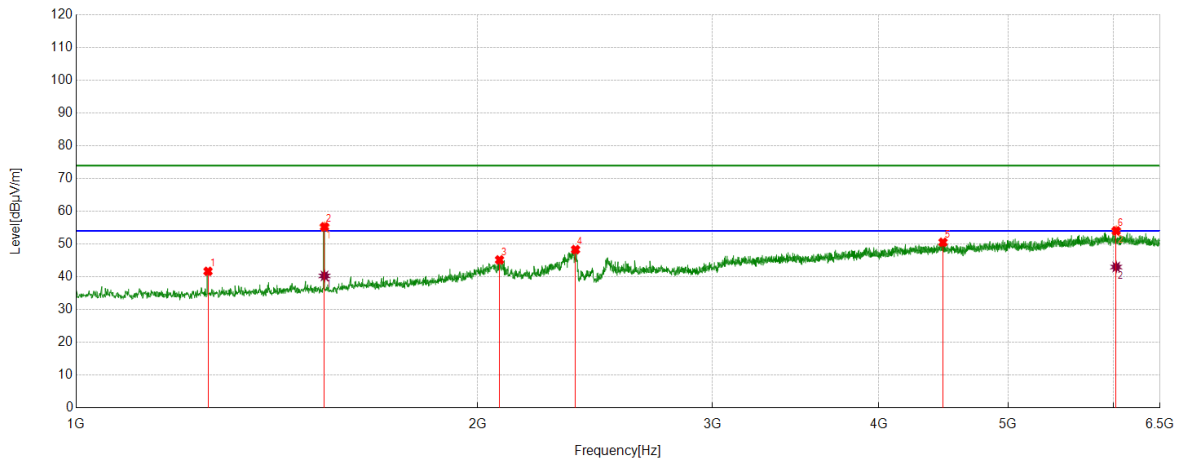

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	43.24	-1.57	41.67	74.00	-32.33	Horizontal
2	1535.6295	55.88	-0.62	55.26	74.00	-18.74	Horizontal
3	2077.4472	41.45	3.71	45.16	74.00	-28.84	Horizontal
4	2368.9836	43.50	4.80	48.30	74.00	-25.70	Horizontal
5	4468.1835	35.96	14.58	50.54	74.00	-23.46	Horizontal
6	6026.2533	36.08	17.95	54.03	74.00	-19.97	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.89	-0.62	40.27	54.00	-13.73	Horizontal
2	6026.2533	25.04	17.95	42.99	54.00	-11.01	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

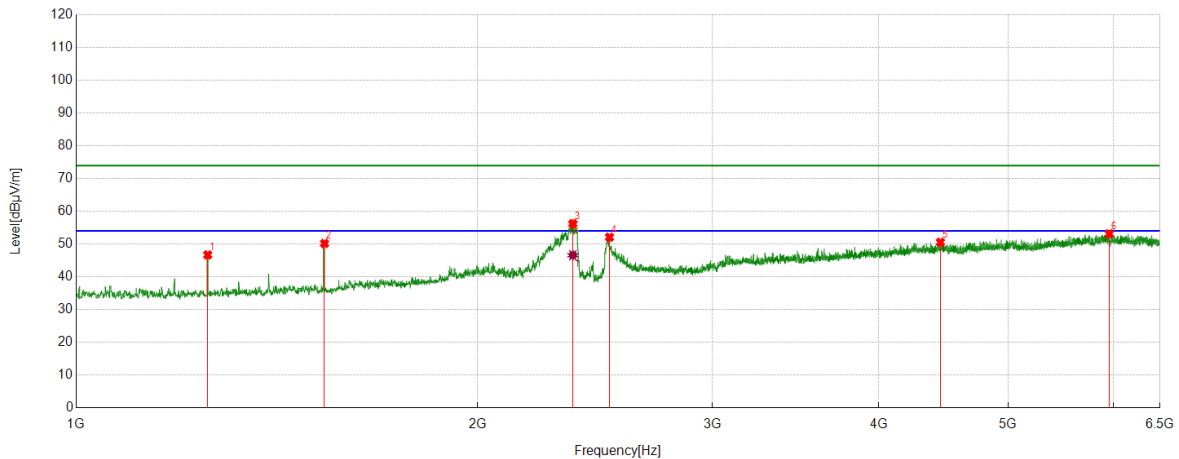

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	48.26	-1.57	46.69	74.00	-27.31	Vertical
2	1535.6295	50.80	-0.62	50.18	74.00	-23.82	Vertical
3	2357.9822	51.46	4.77	56.23	74.00	-17.77	Vertical
4	2512.0015	46.23	5.86	52.09	74.00	-21.91	Vertical
5	4448.2435	36.22	14.33	50.55	74.00	-23.45	Vertical
6	5954.0568	34.62	18.51	53.13	74.00	-20.87	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2357.9822	41.82	4.77	46.59	54.00	-7.41	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

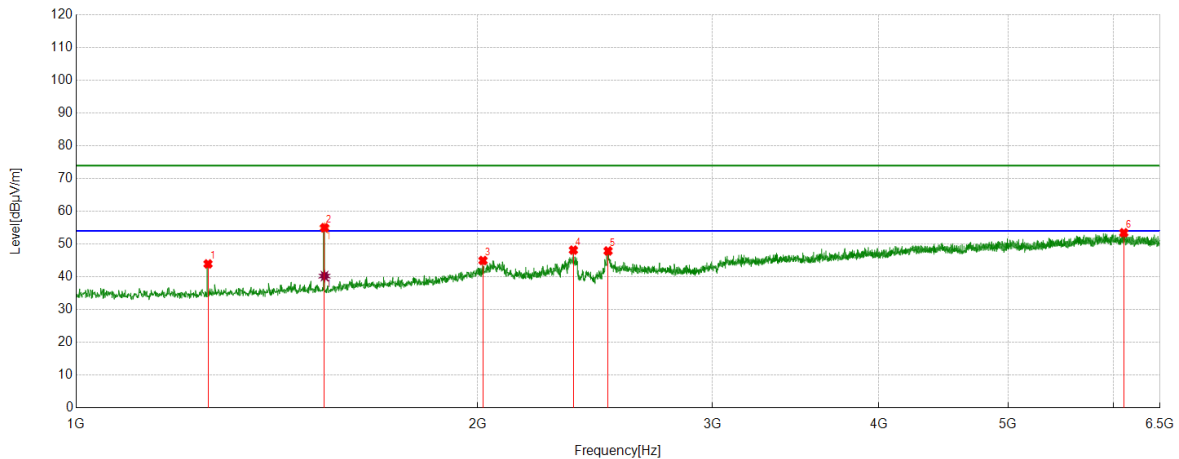

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	45.50	-1.57	43.93	74.00	-30.07	Horizontal
2	1535.6295	55.61	-0.62	54.99	74.00	-19.01	Horizontal
3	2019.0024	41.15	3.81	44.96	74.00	-29.04	Horizontal
4	2360.0450	43.37	4.78	48.15	74.00	-25.85	Horizontal
5	2505.8132	41.99	5.90	47.89	74.00	-26.11	Horizontal
6	6106.0133	35.33	18.12	53.45	74.00	-20.55	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.84	-0.62	40.22	54.00	-13.78	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

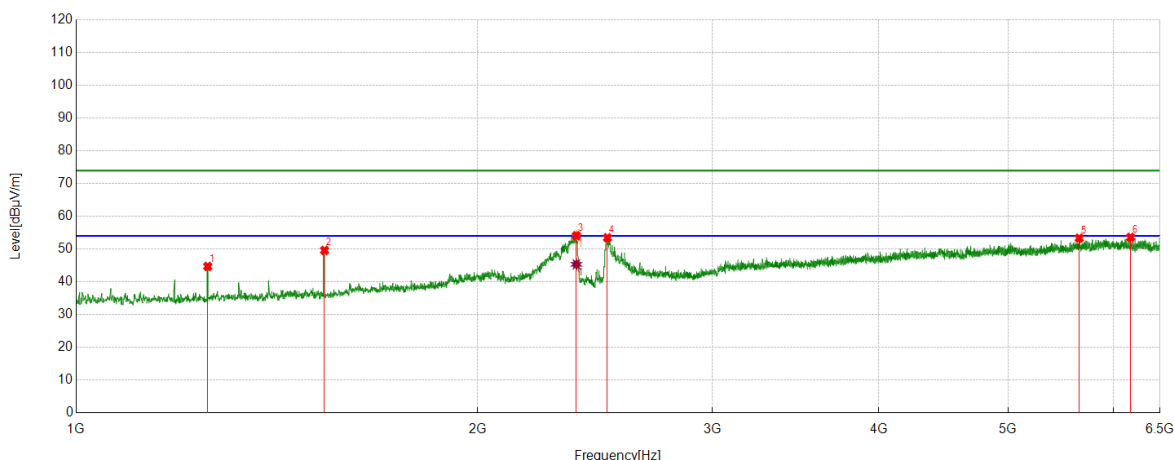

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.26	-1.57	44.69	74.00	-29.31	Vertical
2	1535.6295	50.21	-0.62	49.59	74.00	-24.41	Vertical
3	2372.4216	49.25	4.82	54.07	74.00	-19.93	Vertical
4	2503.0629	47.56	5.89	53.45	74.00	-20.55	Vertical
5	5653.5817	35.86	17.48	53.34	74.00	-20.66	Vertical
6	6177.5222	34.71	18.87	53.58	74.00	-20.42	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2372.4216	40.51	4.82	45.33	54.00	-8.67	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

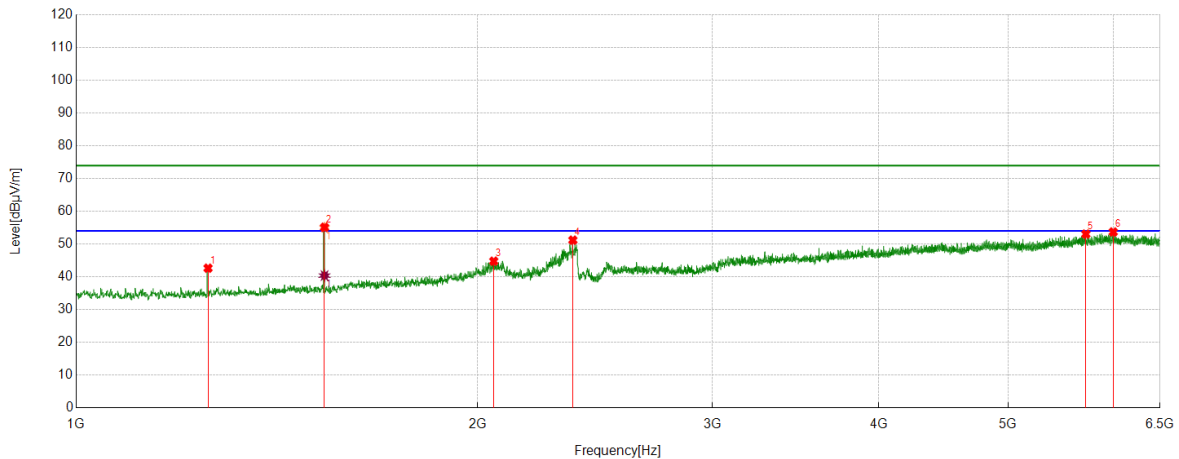

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.20	-1.57	42.63	74.00	-31.37	Horizontal
2	1535.6295	55.73	-0.62	55.11	74.00	-18.89	Horizontal
3	2056.8196	40.91	3.86	44.77	74.00	-29.23	Horizontal
4	2357.9822	46.42	4.77	51.19	74.00	-22.81	Horizontal
5	5718.9024	35.40	17.65	53.05	74.00	-20.95	Horizontal
6	5995.3119	35.41	18.28	53.69	74.00	-20.31	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.98	-0.62	40.36	54.00	-13.64	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

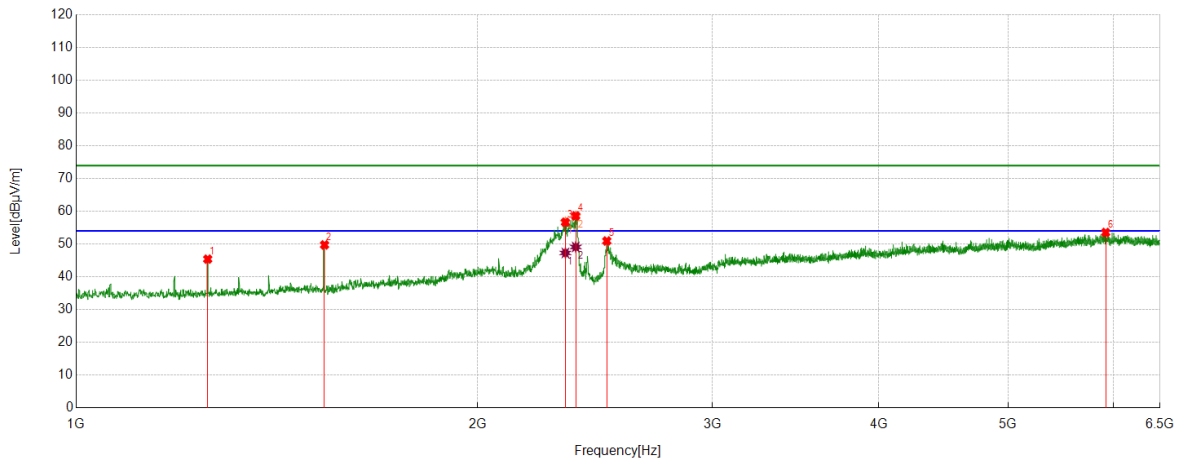

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.97	-1.57	45.40	74.00	-28.60	Vertical
2	1535.6295	50.36	-0.62	49.74	74.00	-24.26	Vertical
3	2327.7285	51.69	4.99	56.68	74.00	-17.32	Vertical
4	2369.6712	53.80	4.81	58.61	74.00	-15.39	Vertical
5	2500.3125	45.06	5.88	50.94	74.00	-23.06	Vertical
6	5917.6147	34.98	18.57	53.55	74.00	-20.45	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2327.7285	42.29	4.99	47.28	54.00	-6.72	Vertical
2	2369.6712	44.30	4.81	49.11	54.00	-4.89	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

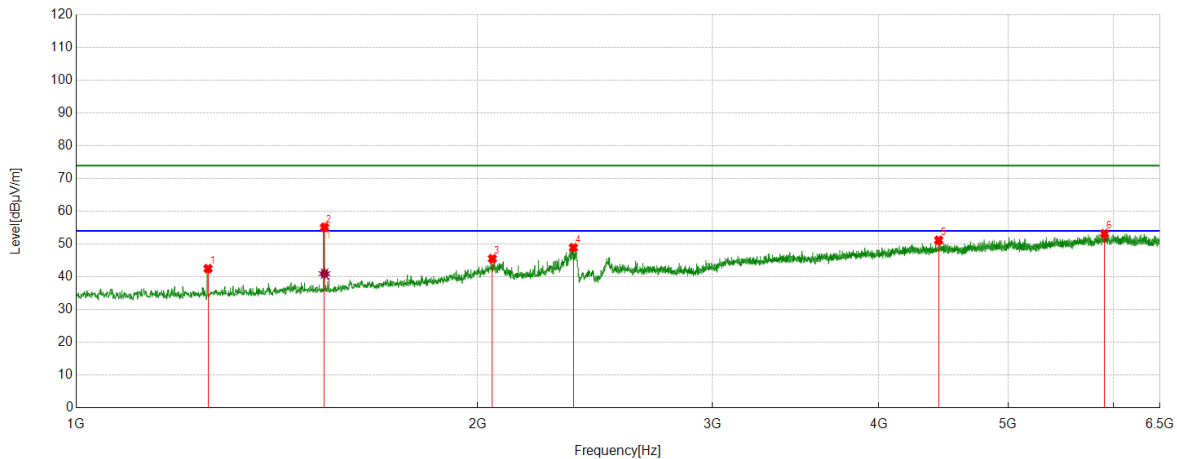

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	44.06	-1.57	42.49	74.00	-31.51	Horizontal
2	1535.6295	55.74	-0.62	55.12	74.00	-18.88	Horizontal
3	2052.0065	41.37	4.16	45.53	74.00	-28.47	Horizontal
4	2360.0450	44.12	4.78	48.90	74.00	-25.10	Horizontal
5	4435.1794	36.85	14.32	51.17	74.00	-22.83	Horizontal
6	5905.9257	35.12	18.08	53.20	74.00	-20.80	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.58	-0.62	40.96	54.00	-13.04	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

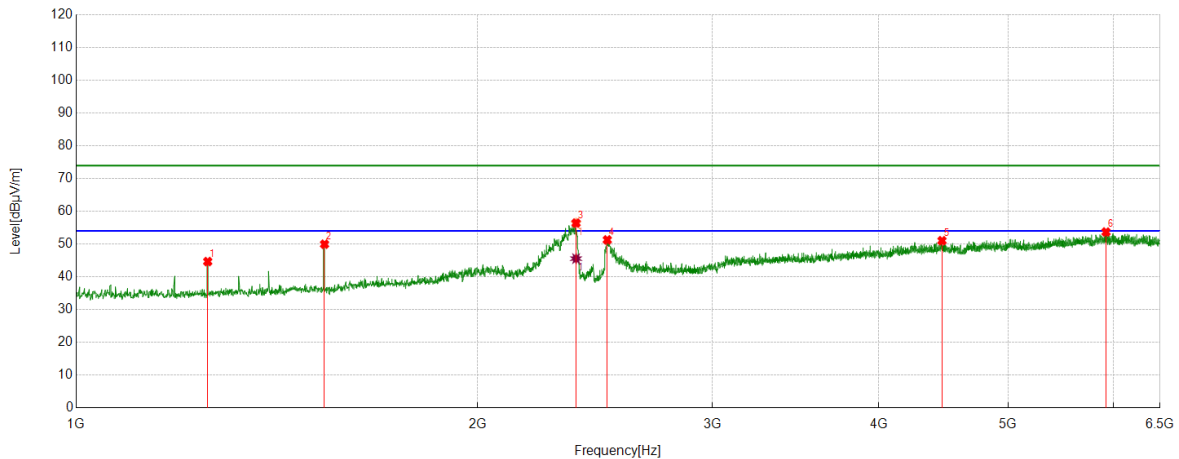

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.23	-1.57	44.66	74.00	-29.34	Vertical
2	1535.6295	50.58	-0.62	49.96	74.00	-24.04	Vertical
3	2371.0464	51.59	4.82	56.41	74.00	-17.59	Vertical
4	2502.3753	45.40	5.88	51.28	74.00	-22.72	Vertical
5	4460.6201	36.11	14.91	51.02	74.00	-22.98	Vertical
6	5921.0526	34.98	18.71	53.69	74.00	-20.31	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2371.0464	40.73	4.82	45.55	54.00	-8.45	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

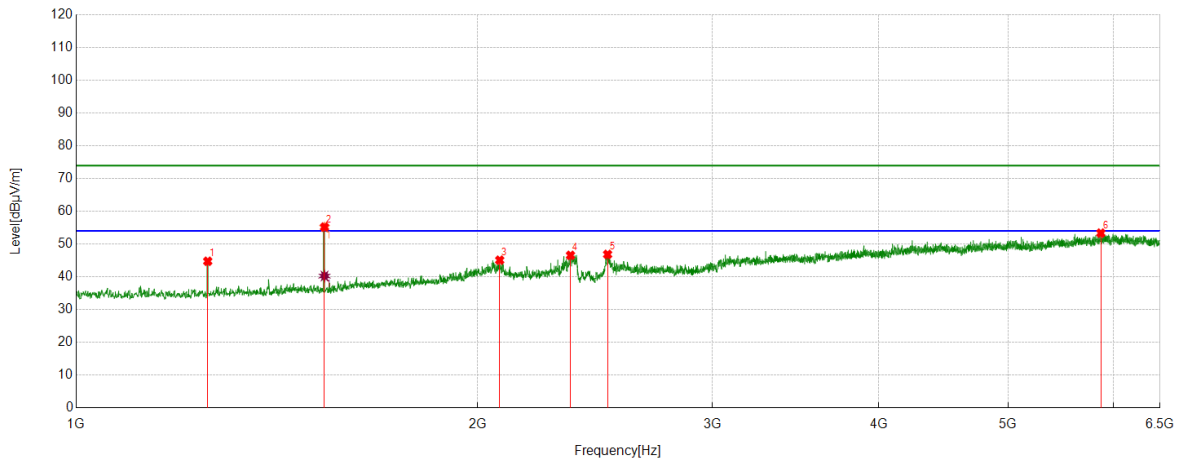

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.31	-1.57	44.74	74.00	-29.26	Horizontal
2	1535.6295	55.80	-0.62	55.18	74.00	-18.82	Horizontal
3	2078.1348	41.40	3.68	45.08	74.00	-28.92	Horizontal
4	2348.3560	41.74	4.81	46.55	74.00	-27.45	Horizontal
5	2503.7505	40.95	5.89	46.84	74.00	-27.16	Horizontal
6	5868.1085	35.45	17.90	53.35	74.00	-20.65	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.85	-0.62	40.23	54.00	-13.77	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

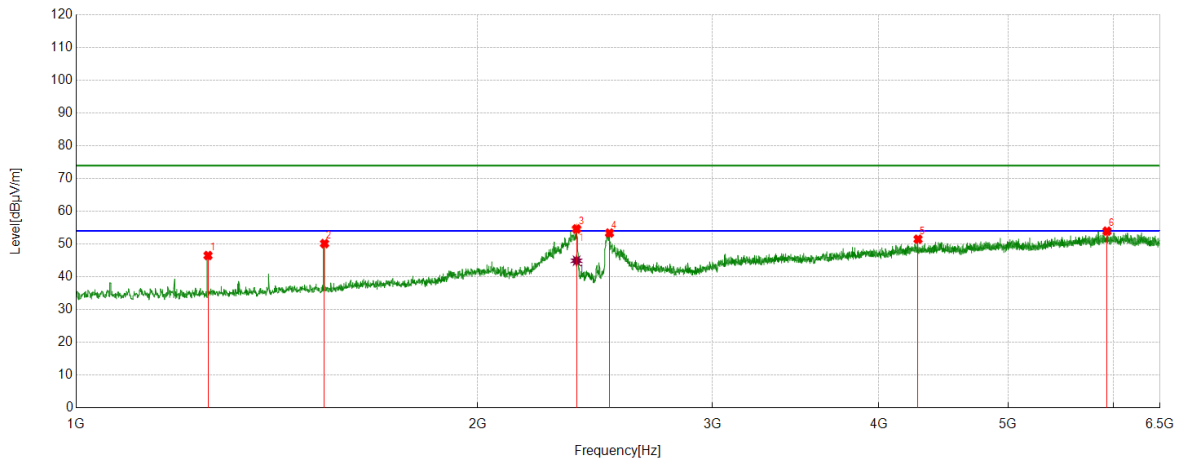

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	48.06	-1.57	46.49	74.00	-27.51	Vertical
2	1535.6295	50.76	-0.62	50.14	74.00	-23.86	Vertical
3	2373.1091	49.80	4.82	54.62	74.00	-19.38	Vertical
4	2512.0015	47.50	5.86	53.36	74.00	-20.64	Vertical
5	4279.7850	37.72	13.76	51.48	74.00	-22.52	Vertical
6	5931.3664	35.09	18.85	53.94	74.00	-20.06	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2373.1091	40.09	4.82	44.91	54.00	-9.09	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

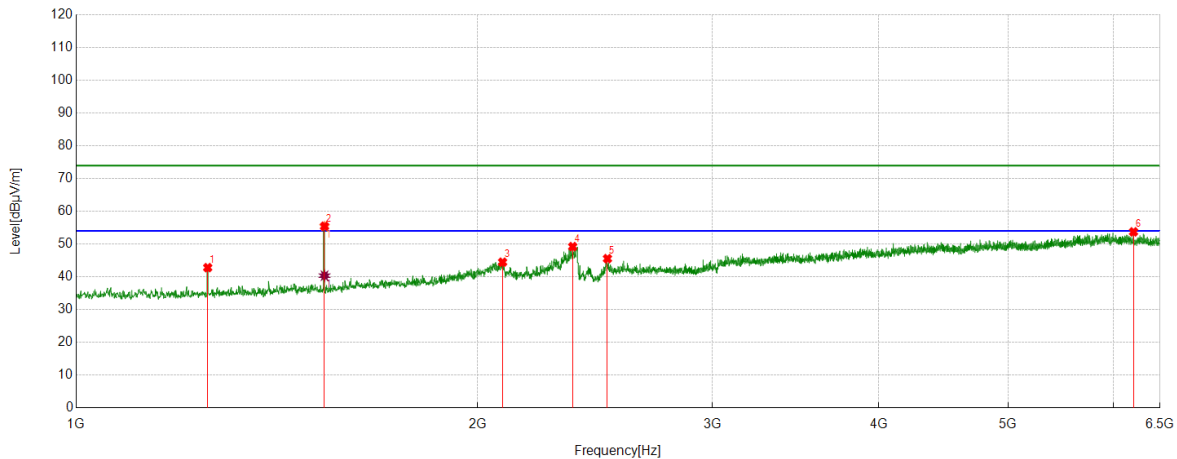

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.37	-1.57	42.80	74.00	-31.20	Horizontal
2	1535.6295	56.05	-0.62	55.43	74.00	-18.57	Horizontal
3	2088.4486	40.71	3.75	44.46	74.00	-29.54	Horizontal
4	2357.2947	44.44	4.78	49.22	74.00	-24.78	Horizontal
5	2503.0629	39.66	5.89	45.55	74.00	-28.45	Horizontal
6	6209.1511	35.14	18.59	53.73	74.00	-20.27	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.95	-0.62	40.33	54.00	-13.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

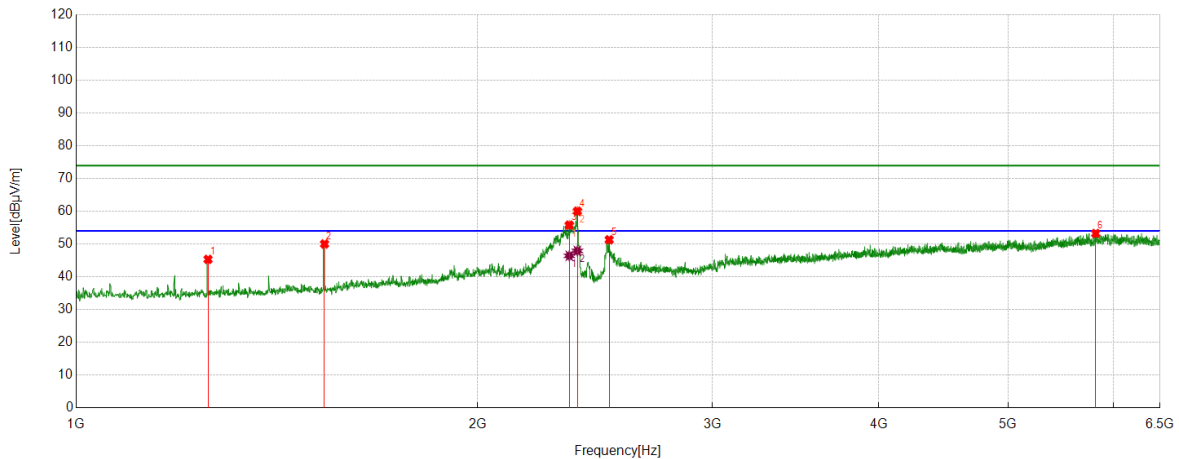

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	46.89	-1.57	45.32	74.00	-28.68	Vertical
2	1535.6295	50.65	-0.62	50.03	74.00	-23.97	Vertical
3	2343.5429	50.88	4.91	55.79	74.00	-18.21	Vertical
4	2376.5471	55.20	4.83	60.03	74.00	-13.97	Vertical
5	2510.6263	45.40	5.90	51.30	74.00	-22.70	Vertical
6	5816.5396	34.77	18.46	53.23	74.00	-20.77	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2343.5429	41.49	4.91	46.40	54.00	-7.60	Vertical
2	2376.5471	43.07	4.83	47.90	54.00	-6.10	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

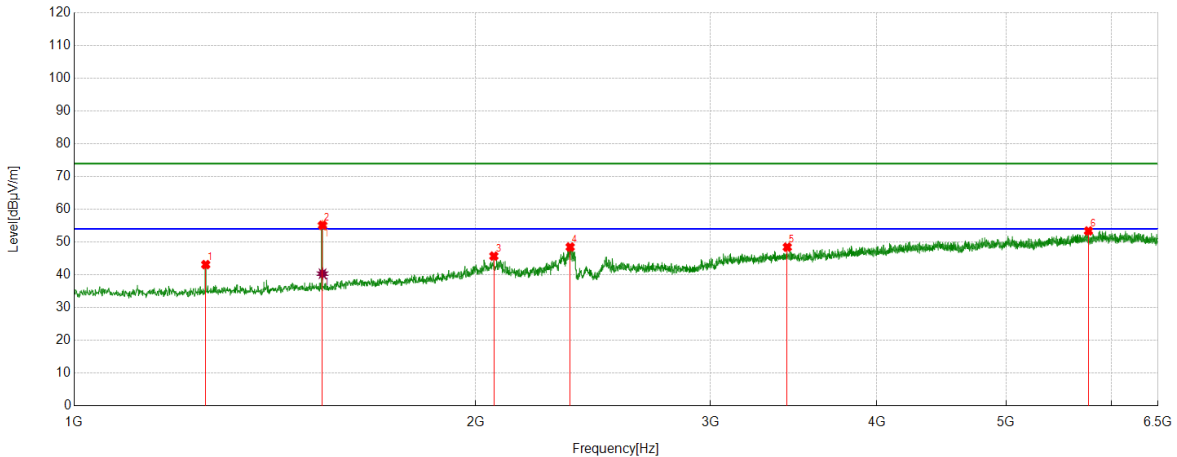

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.68	-1.57	43.11	74.00	-30.89	Horizontal
2	1535.6295	55.76	-0.62	55.14	74.00	-18.86	Horizontal
3	2064.3830	41.89	3.82	45.71	74.00	-28.29	Horizontal
4	2355.2319	43.71	4.78	48.49	74.00	-25.51	Horizontal
5	3426.4908	38.06	10.38	48.44	74.00	-25.56	Horizontal
6	5764.2830	35.72	17.68	53.40	74.00	-20.60	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.95	-0.62	40.33	54.00	-13.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

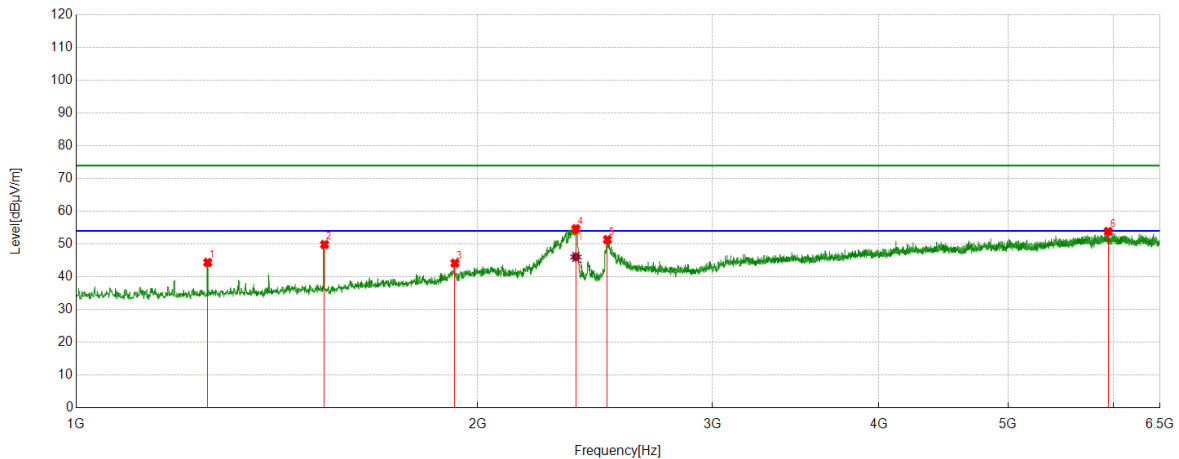

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.94	-1.57	44.37	74.00	-29.63	Vertical
2	1535.6295	50.48	-0.62	49.86	74.00	-24.14	Vertical
3	1923.4279	41.12	3.04	44.16	74.00	-29.84	Vertical
4	2370.3588	49.85	4.81	54.66	74.00	-19.34	Vertical
5	2503.0629	45.47	5.89	51.36	74.00	-22.64	Vertical
6	5943.0554	35.40	18.45	53.85	74.00	-20.15	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2370.3588	41.24	4.81	46.05	54.00	-7.95	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

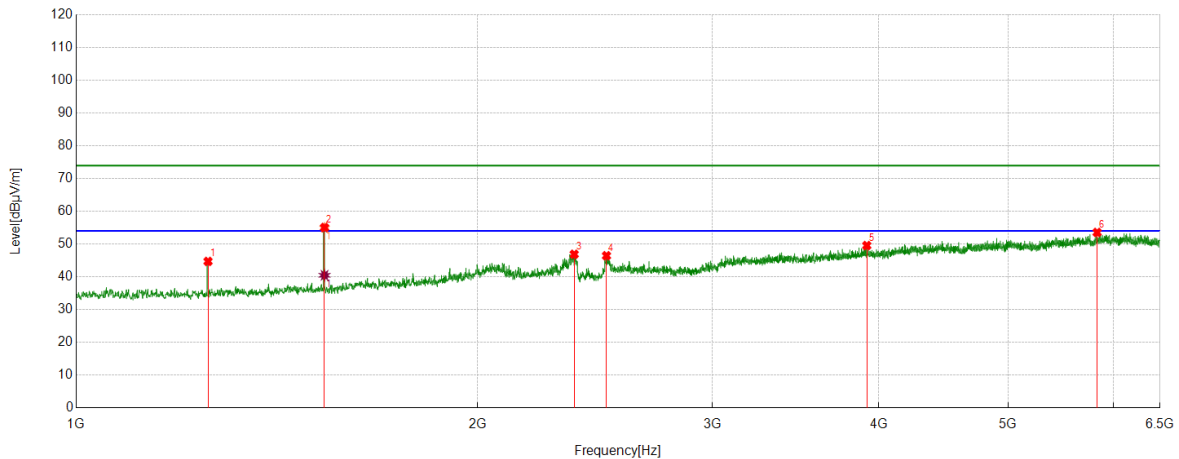

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	46.27	-1.57	44.70	74.00	-29.30	Horizontal
2	1535.6295	55.67	-0.62	55.05	74.00	-18.95	Horizontal
3	2363.4829	42.09	4.79	46.88	74.00	-27.12	Horizontal
4	2498.9374	40.56	5.87	46.43	74.00	-27.57	Horizontal
5	3917.4272	37.13	12.41	49.54	74.00	-24.46	Horizontal
6	5830.9789	34.92	18.63	53.55	74.00	-20.45	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.07	-0.62	40.45	54.00	-13.55	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

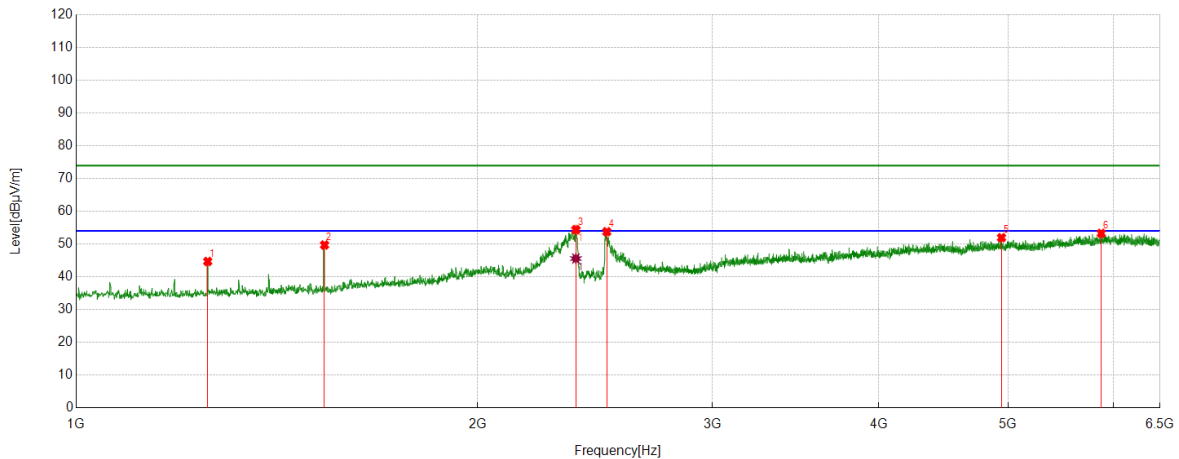

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.26	-1.57	44.69	74.00	-29.31	Vertical
2	1535.6295	50.33	-0.62	49.71	74.00	-24.29	Vertical
3	2370.3588	49.58	4.81	54.39	74.00	-19.61	Vertical
4	2500.3125	47.89	5.88	53.77	74.00	-20.23	Vertical
5	4943.3054	36.57	15.38	51.95	74.00	-22.05	Vertical
6	5872.2340	35.41	17.86	53.27	74.00	-20.73	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2370.3588	40.76	4.81	45.57	54.00	-8.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

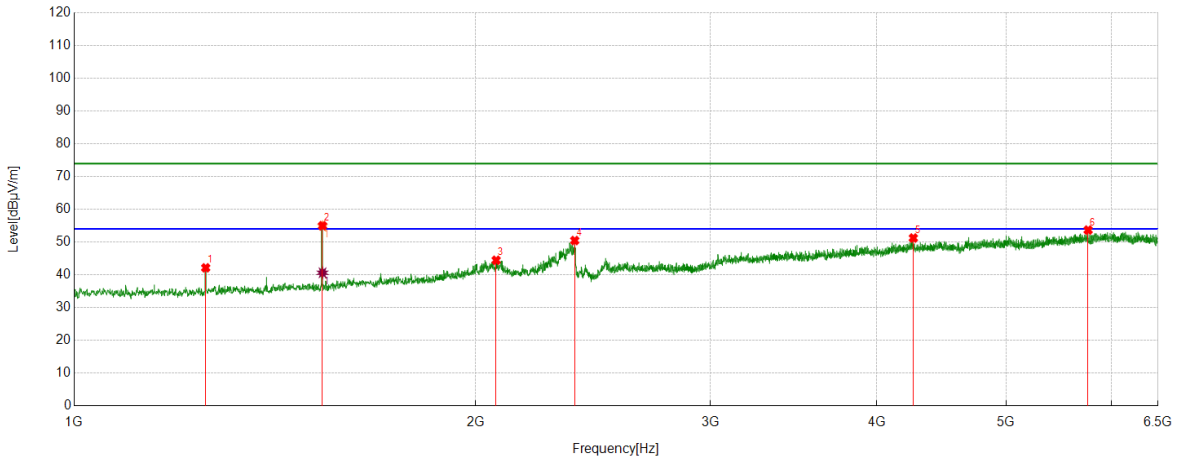

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	43.70	-1.57	42.13	74.00	-31.87	Horizontal
2	1535.6295	55.61	-0.62	54.99	74.00	-19.01	Horizontal
3	2072.6341	40.53	3.91	44.44	74.00	-29.56	Horizontal
4	2373.7967	45.65	4.82	50.47	74.00	-23.53	Horizontal
5	4259.8450	37.20	14.03	51.23	74.00	-22.77	Horizontal
6	5760.8451	35.71	17.96	53.67	74.00	-20.33	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.23	-0.62	40.61	54.00	-13.39	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

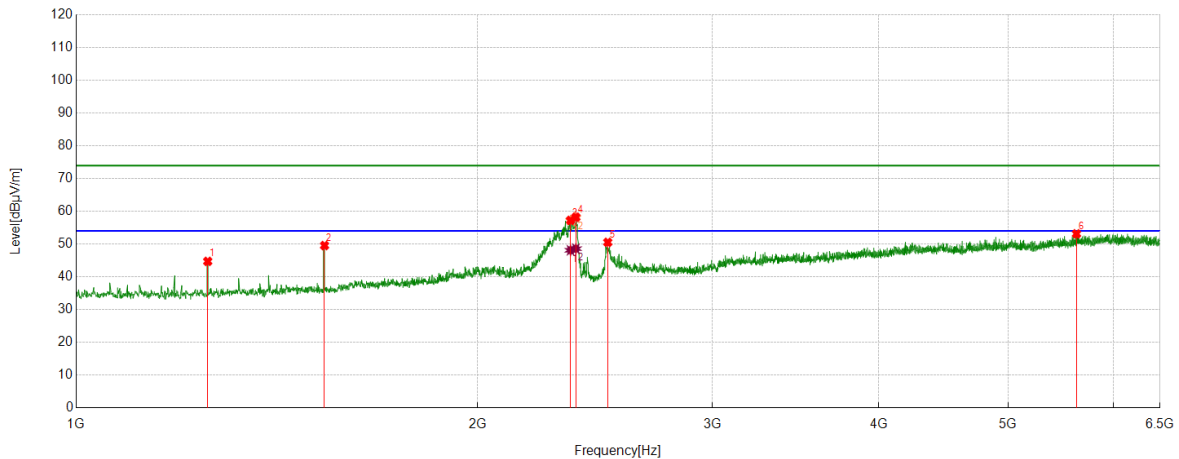

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.28	-1.57	44.71	74.00	-29.29	Vertical
2	1535.6295	50.16	-0.62	49.54	74.00	-24.46	Vertical
3	2348.3560	52.42	4.81	57.23	74.00	-16.77	Vertical
4	2370.3588	53.38	4.81	58.19	74.00	-15.81	Vertical
5	2504.4381	44.64	5.89	50.53	74.00	-23.47	Vertical
6	5626.7658	35.58	17.55	53.13	74.00	-20.87	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2348.3560	43.29	4.81	48.10	54.00	-5.90	Vertical
2	2370.3588	43.78	4.81	48.59	54.00	-5.41	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

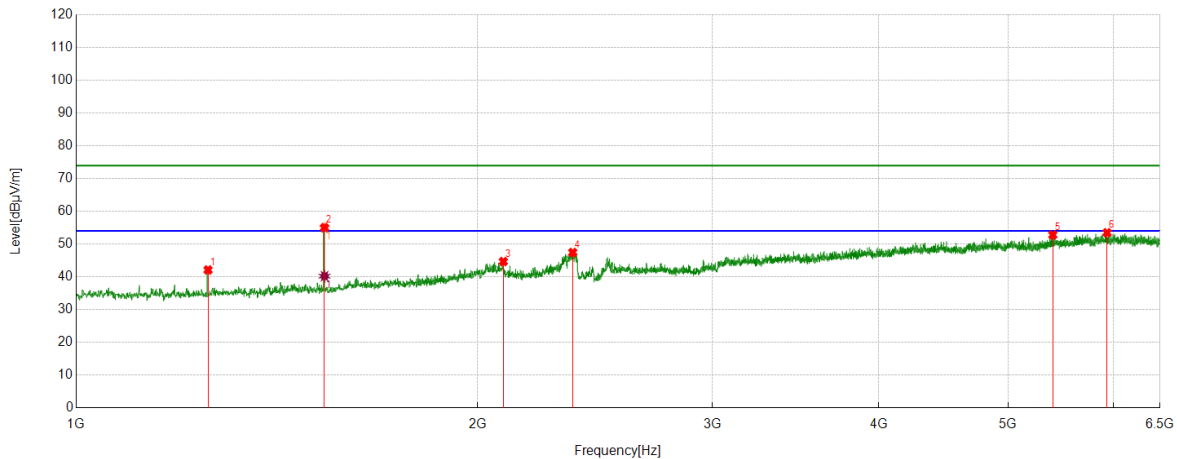

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	43.66	-1.57	42.09	74.00	-31.91	Horizontal
2	1535.6295	55.64	-0.62	55.02	74.00	-18.98	Horizontal
3	2091.1989	40.92	3.74	44.66	74.00	-29.34	Horizontal
4	2357.2947	42.65	4.78	47.43	74.00	-26.57	Horizontal
5	5401.2377	35.88	16.91	52.79	74.00	-21.21	Horizontal
6	5932.0540	34.65	18.82	53.47	74.00	-20.53	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	40.80	-0.62	40.18	54.00	-13.82	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

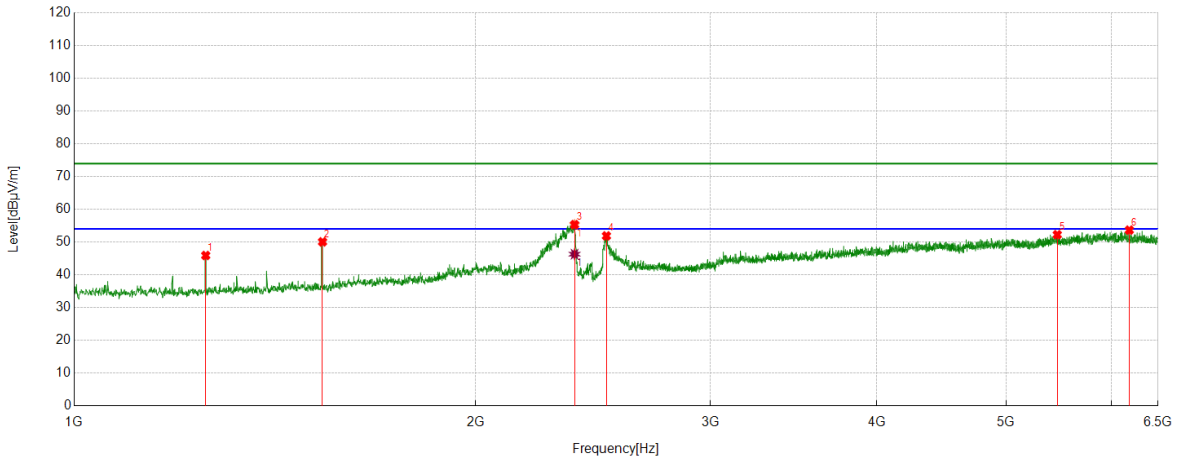

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.47	-1.57	45.90	74.00	-28.10	Vertical
2	1535.6295	50.68	-0.62	50.06	74.00	-23.94	Vertical
3	2373.1091	50.50	4.82	55.32	74.00	-18.68	Vertical
4	2507.1884	45.98	5.90	51.88	74.00	-22.12	Vertical
5	5461.7452	35.16	17.09	52.25	74.00	-21.75	Vertical
6	6185.7732	34.83	18.82	53.65	74.00	-20.35	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2373.1091	41.48	4.82	46.30	54.00	-7.70	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

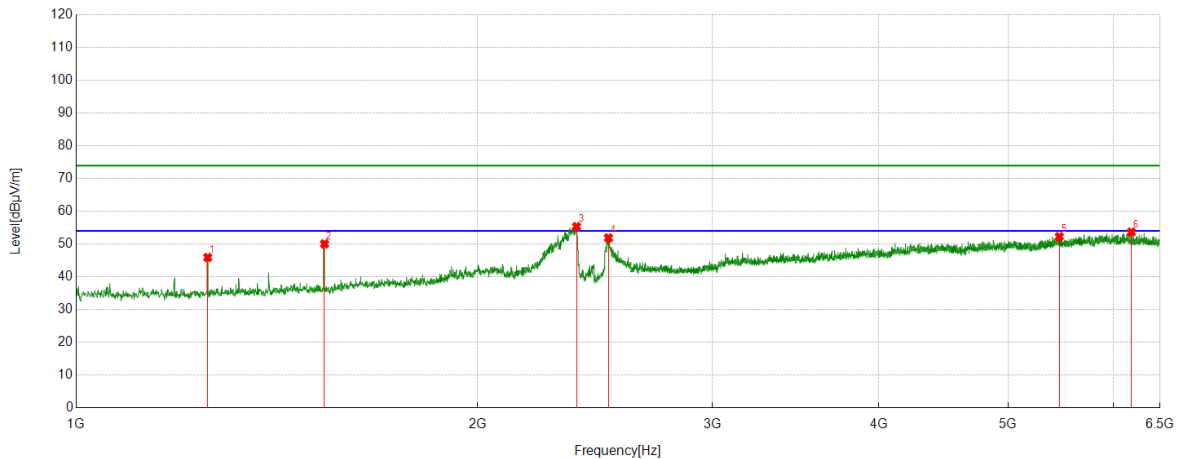

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.09	-1.57	42.52	74.00	-31.48	Horizontal
2	1535.6295	55.81	-0.62	55.19	74.00	-18.81	Horizontal
3	2091.1989	41.07	3.74	44.81	74.00	-29.19	Horizontal
4	2355.2319	42.26	4.78	47.04	74.00	-26.96	Horizontal
5	2501.6877	41.54	5.88	47.42	74.00	-26.58	Horizontal
6	5723.0279	36.21	17.56	53.77	74.00	-20.23	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.36	-0.62	40.74	54.00	-13.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

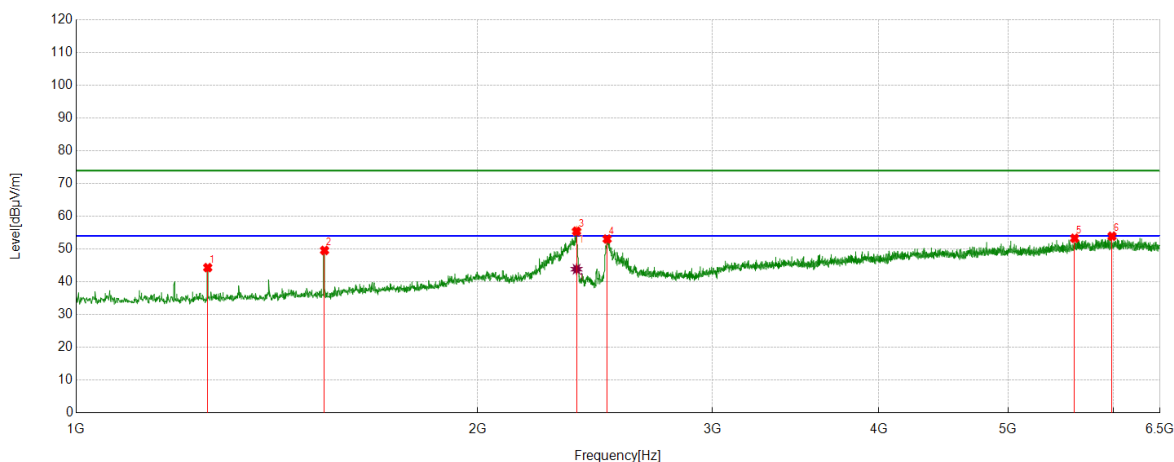

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.90	-1.57	44.33	74.00	-29.67	Vertical
2	1535.6295	50.20	-0.62	49.58	74.00	-24.42	Vertical
3	2373.1091	50.62	4.82	55.44	74.00	-18.56	Vertical
4	2501.6877	47.19	5.88	53.07	74.00	-20.93	Vertical
5	5608.2010	35.81	17.49	53.30	74.00	-20.70	Vertical
6	5982.9354	35.49	18.44	53.93	74.00	-20.07	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2373.1091	39.03	4.82	43.85	54.00	-10.15	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS

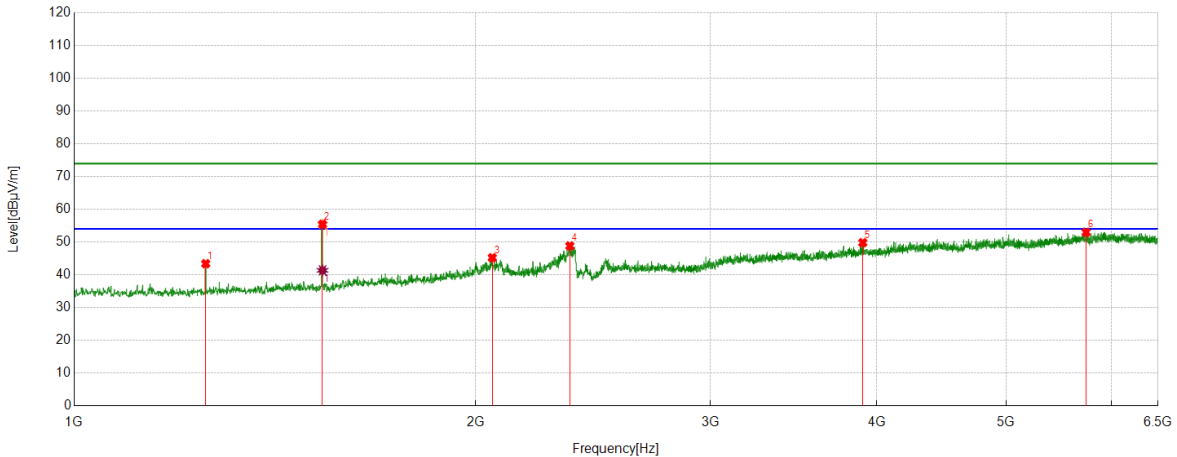

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.96	-1.57	43.39	74.00	-30.61	Horizontal
2	1535.6295	56.06	-0.62	55.44	74.00	-18.56	Horizontal
3	2058.8824	41.47	3.73	45.20	74.00	-28.80	Horizontal
4	2353.8567	44.04	4.77	48.81	74.00	-25.19	Horizontal
5	3903.6755	37.29	12.52	49.81	74.00	-24.19	Horizontal
6	5740.9051	35.17	17.83	53.00	74.00	-21.00	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.97	-0.62	41.35	54.00	-12.65	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

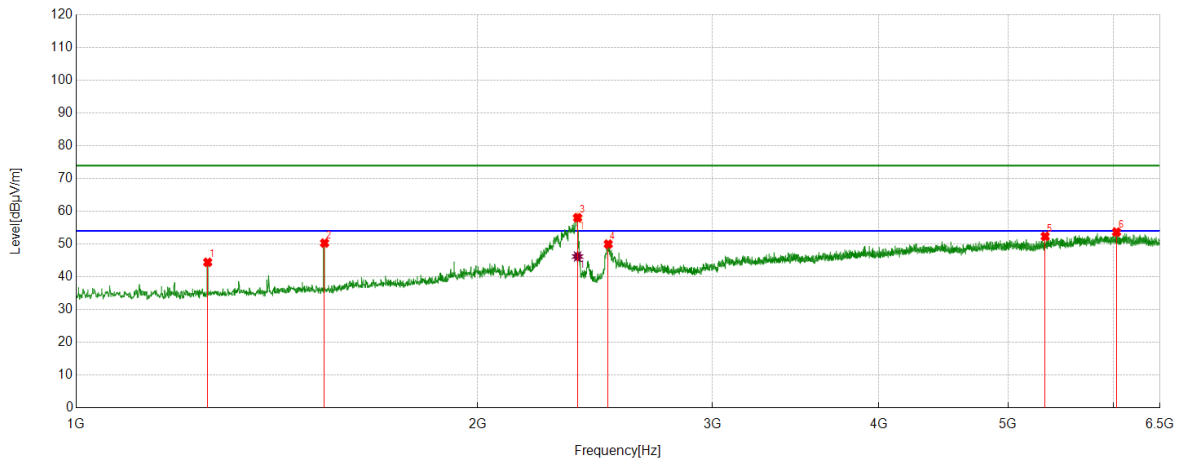

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.01	-1.57	44.44	74.00	-29.56	Vertical
2	1535.6295	50.92	-0.62	50.30	74.00	-23.70	Vertical
3	2377.2347	53.21	4.84	58.05	74.00	-15.95	Vertical
4	2506.5008	44.10	5.90	50.00	74.00	-24.00	Vertical
5	5330.4163	36.49	15.85	52.34	74.00	-21.66	Vertical
6	6029.6912	35.73	17.94	53.67	74.00	-20.33	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2377.2347	41.35	4.84	46.19	54.00	-7.81	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Horizontal	PASS

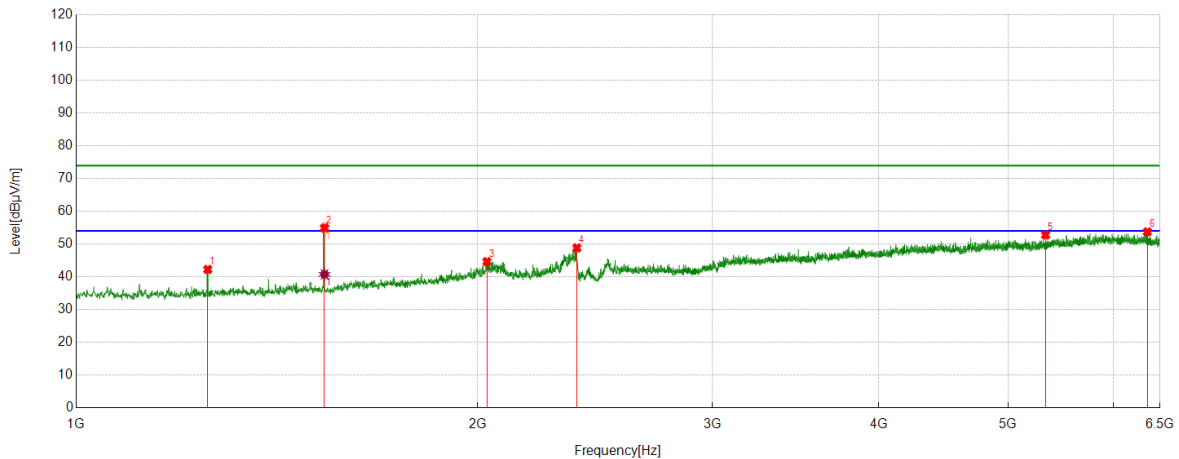

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	43.81	-1.57	42.24	74.00	-31.76	Horizontal
2	1535.6295	55.56	-0.62	54.94	74.00	-19.06	Horizontal
3	2032.7541	40.44	4.19	44.63	74.00	-29.37	Horizontal
4	2374.4843	44.00	4.82	48.82	74.00	-25.18	Horizontal
5	5334.5418	36.84	15.93	52.77	74.00	-21.23	Horizontal
6	6359.0449	34.72	19.00	53.72	74.00	-20.28	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.36	-0.62	40.74	54.00	-13.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Vertical	PASS

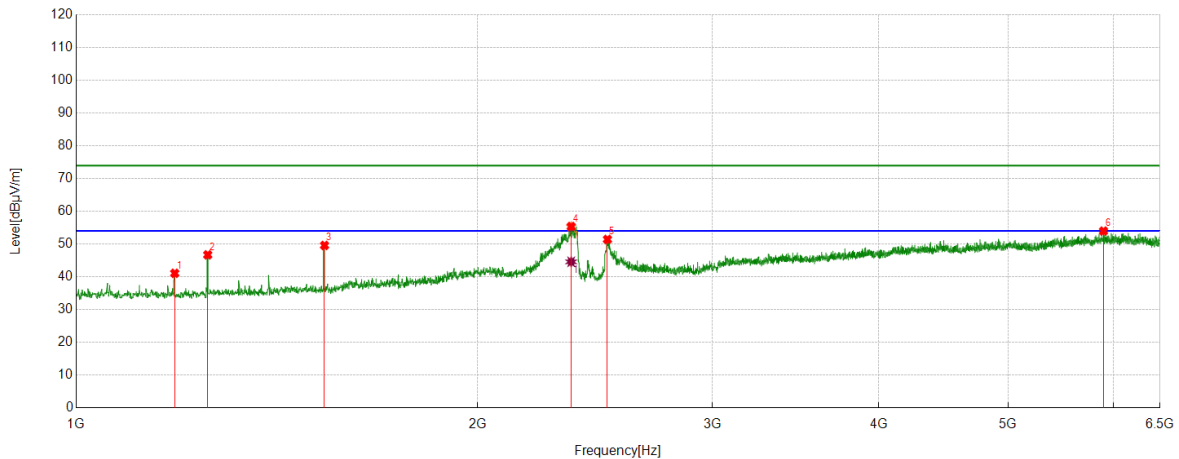

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.07	-2.00	41.07	74.00	-32.93	Vertical
2	1255.0944	48.27	-1.57	46.70	74.00	-27.30	Vertical
3	1535.6295	50.19	-0.62	49.57	74.00	-24.43	Vertical
4	2351.1064	50.59	4.77	55.36	74.00	-18.64	Vertical
5	2503.0629	45.53	5.89	51.42	74.00	-22.58	Vertical
6	5895.6120	36.03	17.95	53.98	74.00	-20.02	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2351.1064	39.80	4.77	44.57	54.00	-9.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

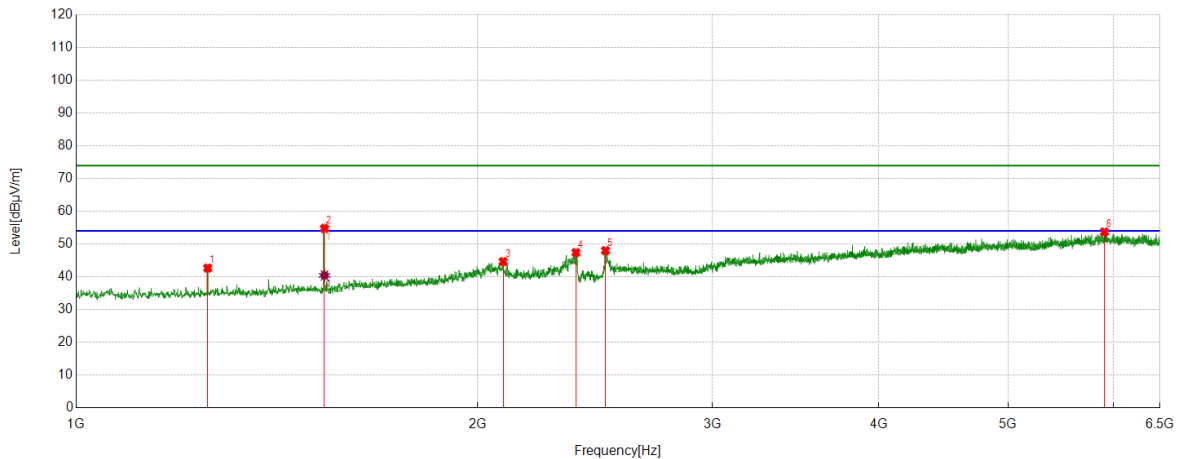

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.22	-1.57	42.65	74.00	-31.35	Horizontal
2	1535.6295	55.42	-0.62	54.80	74.00	-19.20	Horizontal
3	2090.5113	40.89	3.76	44.65	74.00	-29.35	Horizontal
4	2370.3588	42.60	4.81	47.41	74.00	-26.59	Horizontal
5	2494.8119	42.15	5.84	47.99	74.00	-26.01	Horizontal
6	5905.2382	35.64	18.06	53.70	74.00	-20.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.6295	41.04	-0.62	40.42	54.00	-13.58	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS

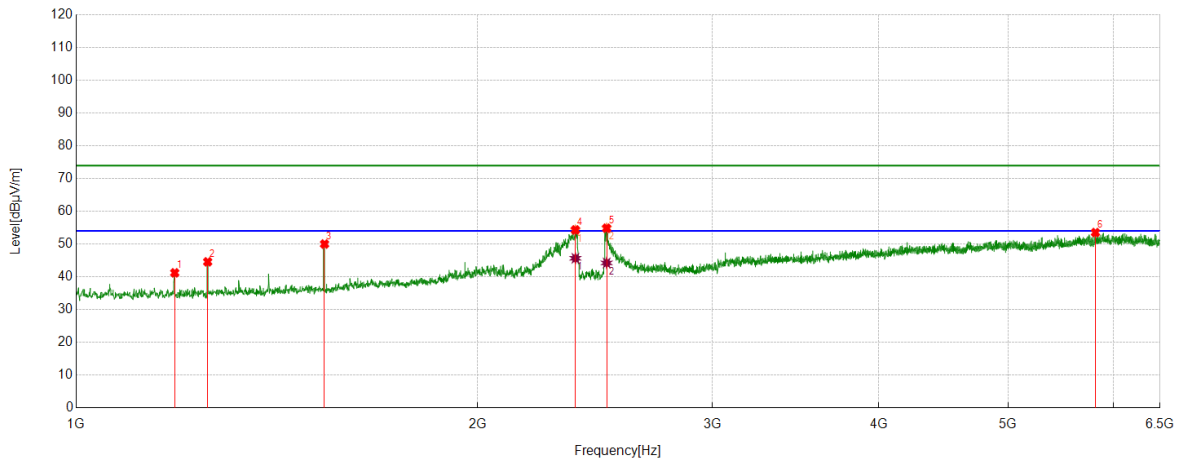

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.21	-2.00	41.21	74.00	-32.79	Vertical
2	1255.0944	46.14	-1.57	44.57	74.00	-29.43	Vertical
3	1535.6295	50.63	-0.62	50.01	74.00	-23.99	Vertical
4	2368.2960	49.51	4.80	54.31	74.00	-19.69	Vertical
5	2499.6250	48.97	5.88	54.85	74.00	-19.15	Vertical
6	5813.7892	35.22	18.30	53.52	74.00	-20.48	Vertical

#### AV Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2368.2960	40.85	4.80	45.65	54.00	-8.35	Vertical
2	2499.6250	38.35	5.88	44.23	54.00	-9.77	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## Part 2: 6.5GHz~18GHz

### HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

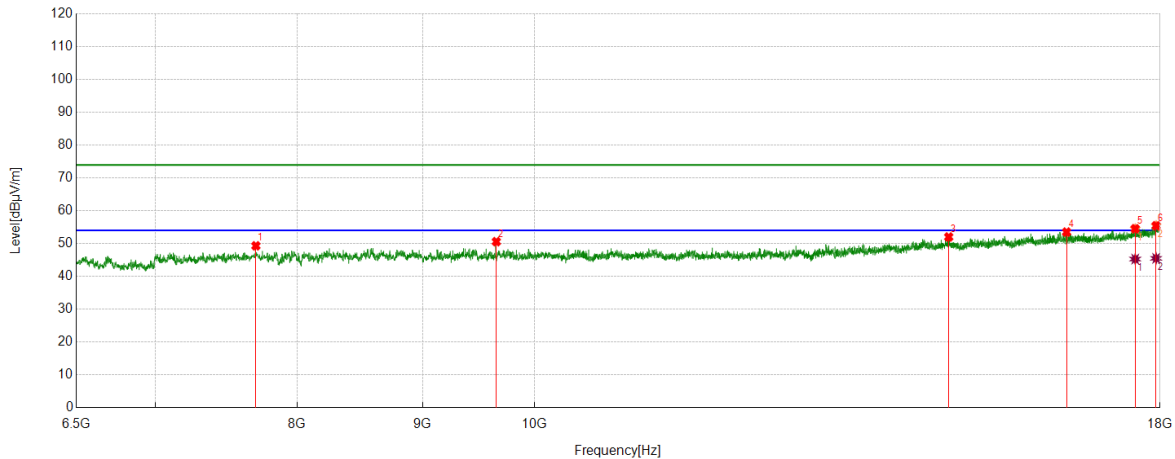

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7696.1495	43.88	5.43	49.31	74.00	-24.69	Horizontal
2	9647.0809	44.19	6.39	50.58	74.00	-23.42	Horizontal
3	14758.0323	39.06	12.94	52.00	74.00	-22.00	Horizontal
4	16486.1233	37.60	15.90	53.50	74.00	-20.50	Horizontal
5	17584.5106	36.53	17.99	54.52	74.00	-19.48	Horizontal
6	17933.8667	36.03	19.40	55.43	74.00	-18.57	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17584.5106	27.27	17.99	45.26	54.00	-8.74	Horizontal
2	17933.8667	26.09	19.40	45.49	54.00	-8.51	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

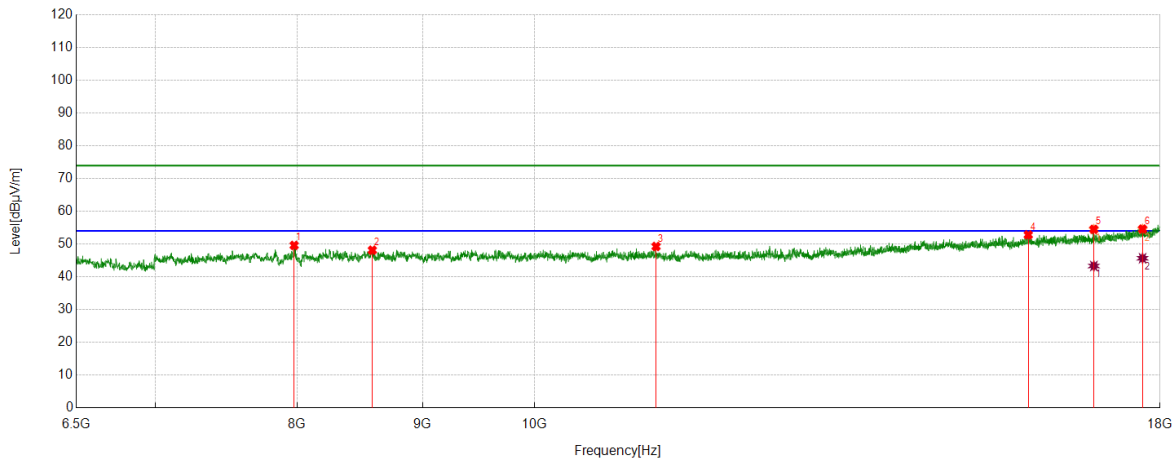

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7977.9347	44.22	5.37	49.59	74.00	-24.41	Vertical
2	8586.0733	42.00	6.12	48.12	74.00	-25.88	Vertical
3	11209.8387	41.87	7.39	49.26	74.00	-24.74	Vertical
4	15903.8630	38.18	14.62	52.80	74.00	-21.20	Vertical
5	16914.5518	38.47	16.03	54.50	74.00	-19.50	Vertical
6	17706.7133	36.26	18.33	54.59	74.00	-19.41	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16914.5518	27.27	16.03	43.30	54.00	-10.70	Vertical
2	17706.7133	27.34	18.33	45.67	54.00	-8.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

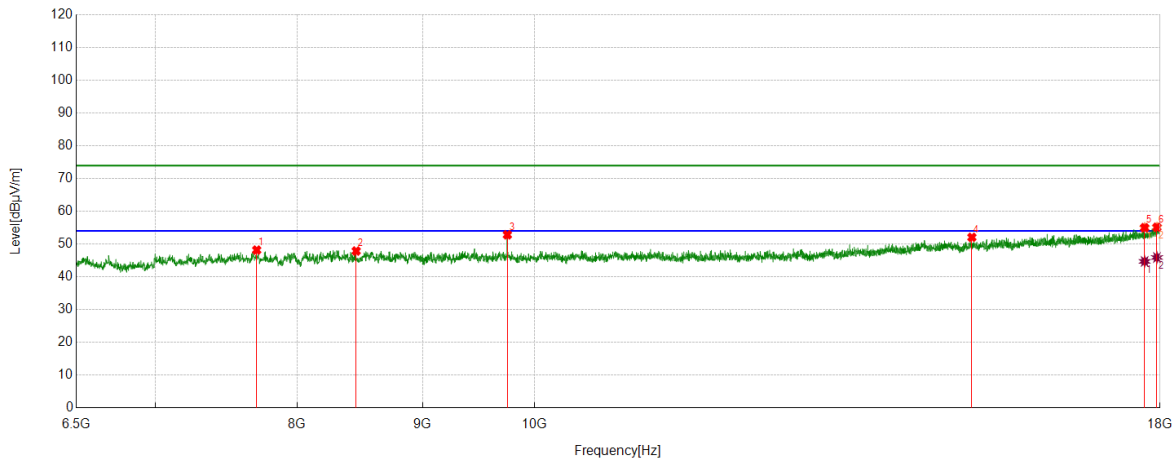

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.62	5.54	48.16	74.00	-25.84	Horizontal
2	8456.6821	42.04	5.83	47.87	74.00	-26.13	Horizontal
3	9747.7185	46.35	6.48	52.83	74.00	-21.17	Horizontal
4	15082.9479	38.92	13.14	52.06	74.00	-21.94	Horizontal
5	17741.2177	36.45	18.55	55.00	74.00	-19.00	Horizontal
6	17948.2435	35.66	19.48	55.14	74.00	-18.86	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17741.2177	26.14	18.55	44.69	54.00	-9.31	Horizontal
2	17948.2435	26.42	19.48	45.90	54.00	-8.10	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

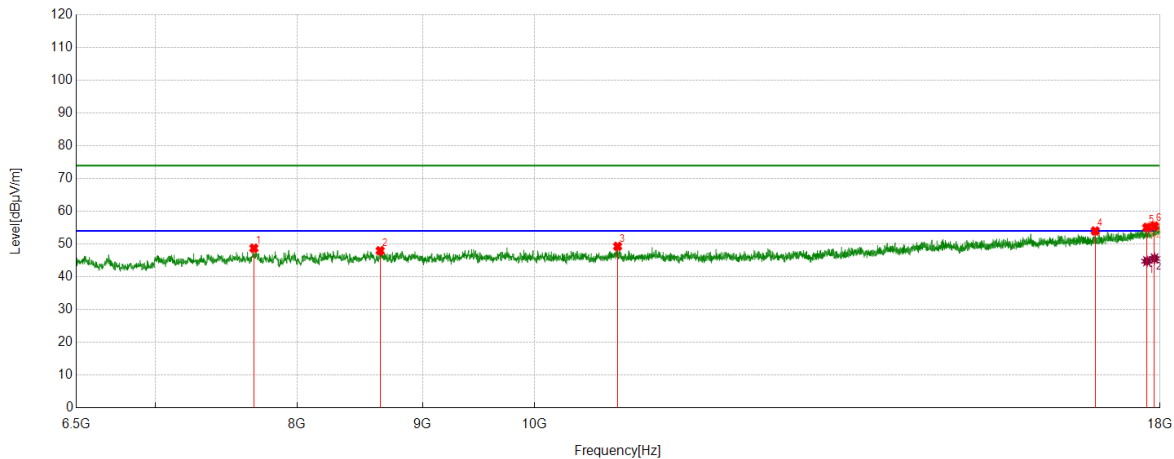

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7681.7727	43.43	5.30	48.73	74.00	-25.27	Vertical
2	8649.3312	41.87	6.09	47.96	74.00	-26.04	Vertical
3	10811.6014	42.41	6.89	49.30	74.00	-24.70	Vertical
4	16937.5547	37.94	16.06	54.00	74.00	-20.00	Vertical
5	17780.0350	36.29	18.79	55.08	74.00	-18.92	Vertical
6	17906.5508	36.25	19.23	55.48	74.00	-18.52	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17780.0350	25.96	18.79	44.75	54.00	-9.25	Vertical
2	17906.5508	26.37	19.23	45.60	54.00	-8.40	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

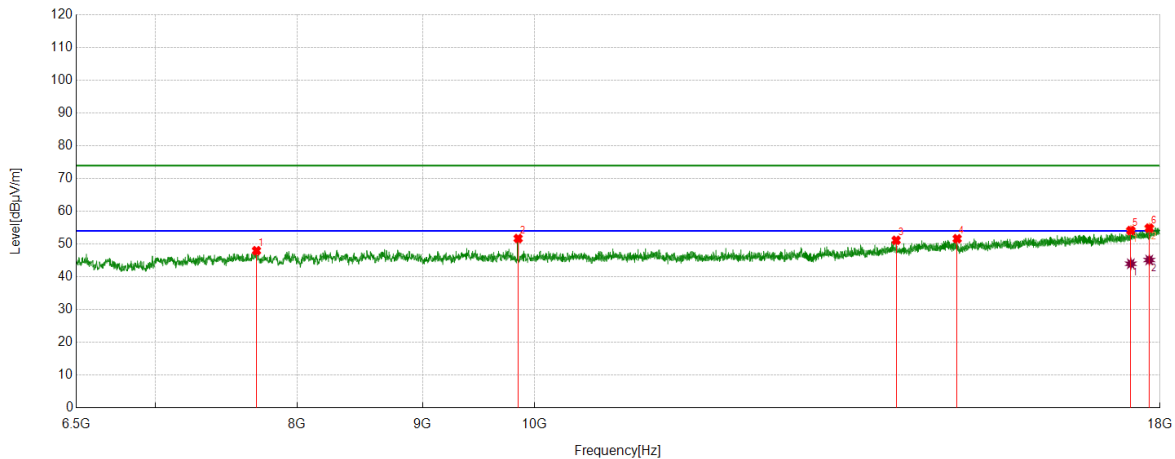

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7700.4626	42.36	5.60	47.96	74.00	-26.04	Horizontal
2	9846.9184	45.22	6.48	51.70	74.00	-22.30	Horizontal
3	14046.3808	39.25	11.89	51.14	74.00	-22.86	Horizontal
4	14875.9220	38.81	12.82	51.63	74.00	-22.37	Horizontal
5	17512.6266	36.51	17.62	54.13	74.00	-19.87	Horizontal
6	17818.8524	35.94	18.93	54.87	74.00	-19.13	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17512.6266	26.36	17.62	43.98	54.00	-10.02	Horizontal
2	17818.8524	26.20	18.93	45.13	54.00	-8.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

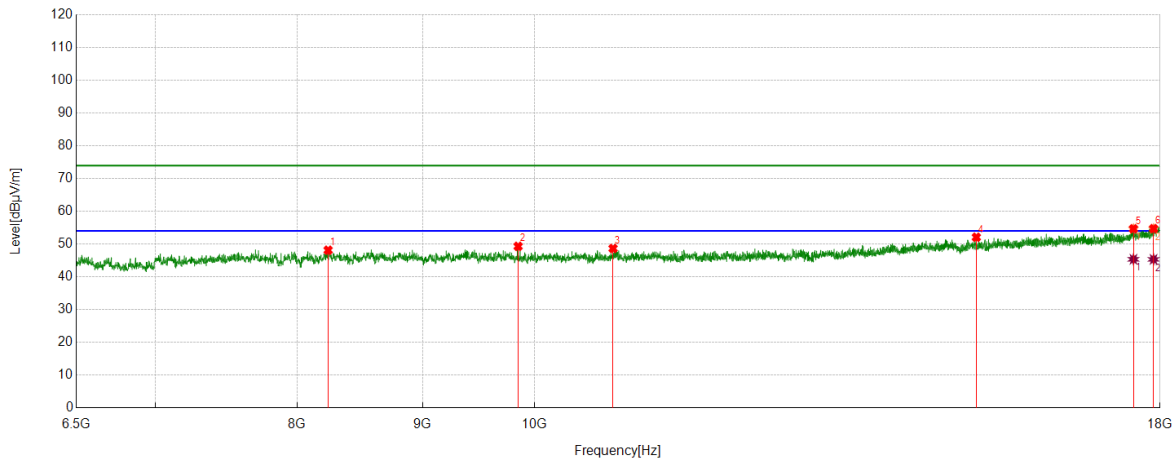

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8236.7171	42.19	5.93	48.12	74.00	-25.88	Vertical
2	9846.9184	42.83	6.48	49.31	74.00	-24.69	Vertical
3	10765.5957	41.63	7.02	48.65	74.00	-25.35	Vertical
4	15146.2058	38.83	13.25	52.08	74.00	-21.92	Vertical
5	17555.7570	36.90	17.77	54.67	74.00	-19.33	Vertical
6	17890.7363	35.41	19.30	54.71	74.00	-19.29	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17555.7570	27.57	17.77	45.34	54.00	-8.66	Vertical
2	17890.7363	26.02	19.30	45.32	54.00	-8.68	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

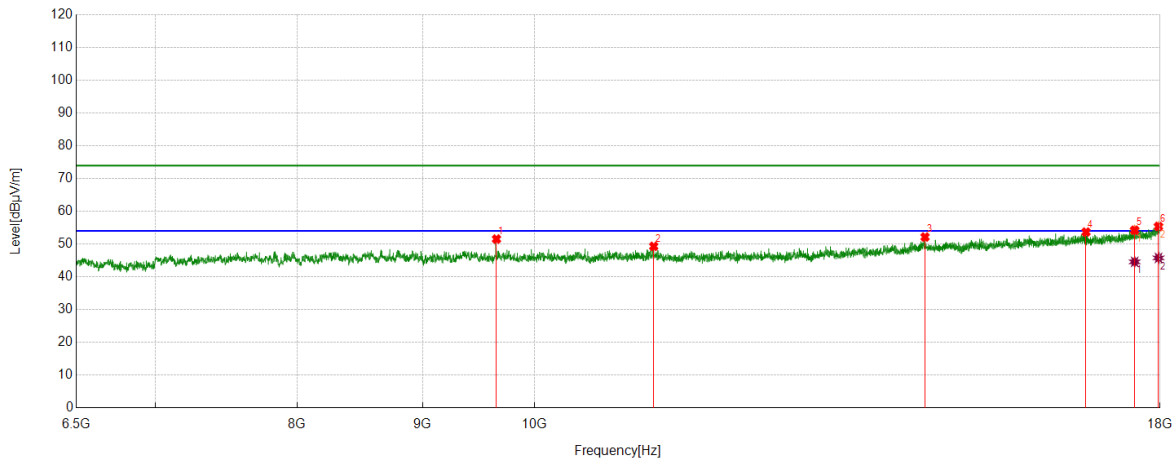

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9648.5186	45.12	6.41	51.53	74.00	-22.47	Horizontal
2	11185.3982	42.00	7.30	49.30	74.00	-24.70	Horizontal
3	14433.1166	39.28	12.87	52.15	74.00	-21.85	Horizontal
4	16790.9114	37.63	16.04	53.67	74.00	-20.33	Horizontal
5	17575.8845	36.30	17.93	54.23	74.00	-19.77	Horizontal
6	17974.1218	35.69	19.70	55.39	74.00	-18.61	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17575.8845	26.63	17.93	44.56	54.00	-9.44	Horizontal
2	17974.1218	26.07	19.70	45.77	54.00	-8.23	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

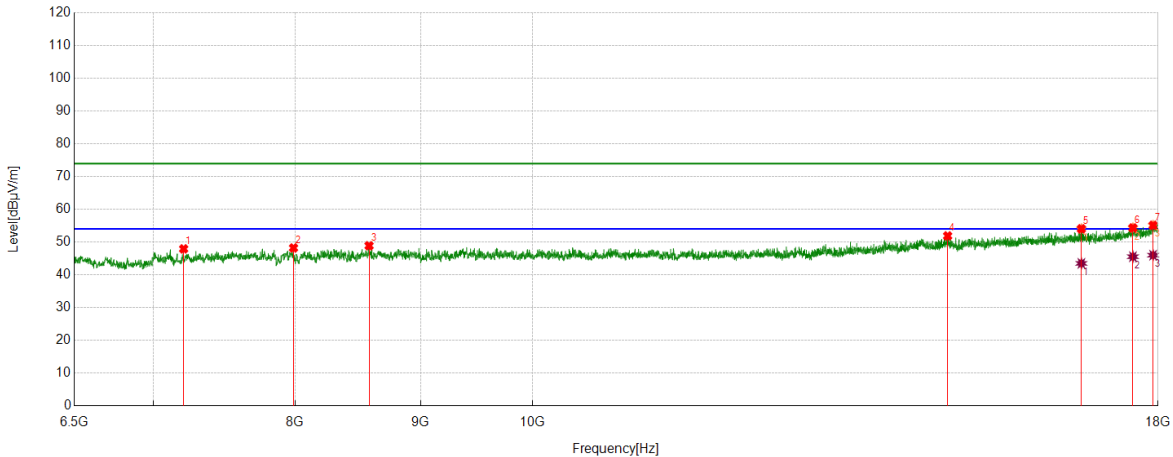

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7204.4631	44.17	3.74	47.91	74.00	-26.09	Vertical
2	7987.9985	42.64	5.56	48.20	74.00	-25.80	Vertical
3	8576.0095	42.52	6.35	48.87	74.00	-25.13	Vertical
4	14770.9714	38.96	12.92	51.88	74.00	-22.12	Vertical
5	16749.2187	37.71	16.34	54.05	74.00	-19.95	Vertical
6	17580.1975	36.36	17.95	54.31	74.00	-19.69	Vertical
7	17916.6146	35.80	19.32	55.12	74.00	-18.88	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	16749.2187	27.15	16.34	43.49	54.00	-10.51	Vertical
2	17580.1975	27.58	17.95	45.53	54.00	-8.47	Vertical
3	17916.6146	26.67	19.32	45.99	54.00	-8.01	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

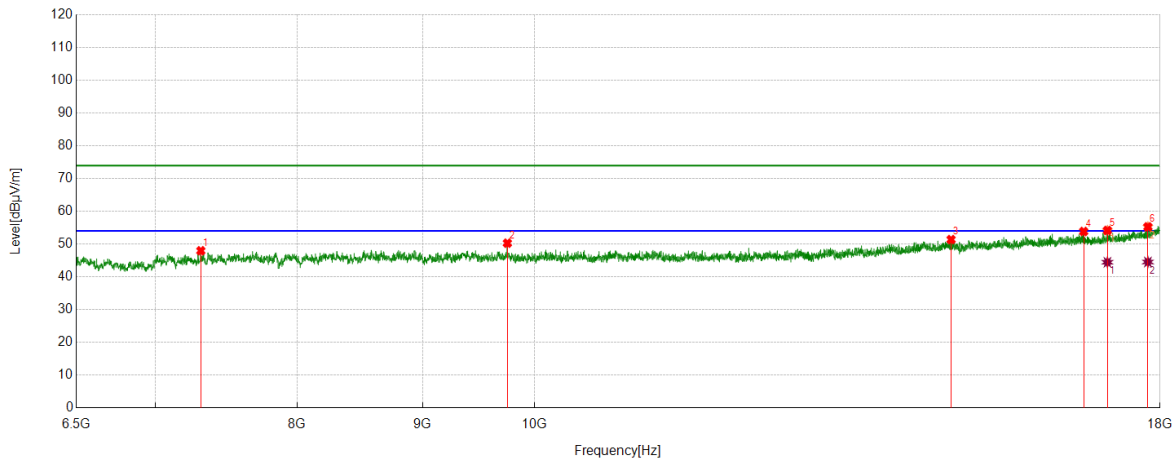

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7307.9760	44.13	3.82	47.95	74.00	-26.05	Horizontal
2	9747.7185	43.79	6.48	50.27	74.00	-23.73	Horizontal
3	14791.0989	38.50	12.87	51.37	74.00	-22.63	Horizontal
4	16753.5317	37.58	16.27	53.85	74.00	-20.15	Horizontal
5	17131.6415	37.57	16.59	54.16	74.00	-19.84	Horizontal
6	17795.8495	36.48	18.78	55.26	74.00	-18.74	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17131.6415	27.84	16.59	44.43	54.00	-9.57	Horizontal
2	17795.8495	25.74	18.78	44.52	54.00	-9.48	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

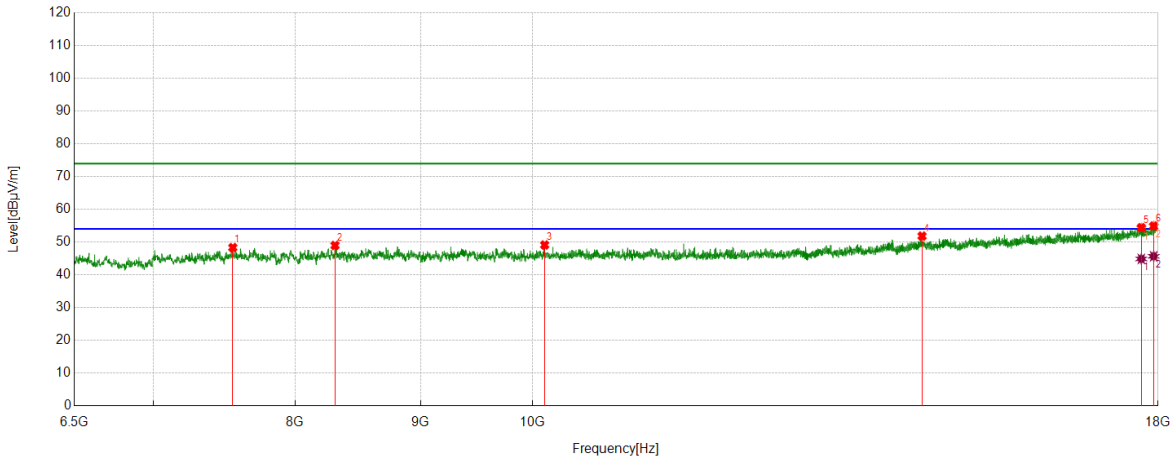

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7545.1931	43.78	4.53	48.31	74.00	-25.69	Vertical
2	8305.7257	42.64	6.32	48.96	74.00	-25.04	Vertical
3	10114.3268	42.50	6.61	49.11	74.00	-24.89	Vertical
4	14420.1775	38.91	12.92	51.83	74.00	-22.17	Vertical
5	17719.6525	35.90	18.48	54.38	74.00	-19.62	Vertical
6	17926.6783	35.53	19.37	54.90	74.00	-19.10	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17719.6525	26.37	18.48	44.85	54.00	-9.15	Vertical
2	17926.6783	26.28	19.37	45.65	54.00	-8.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

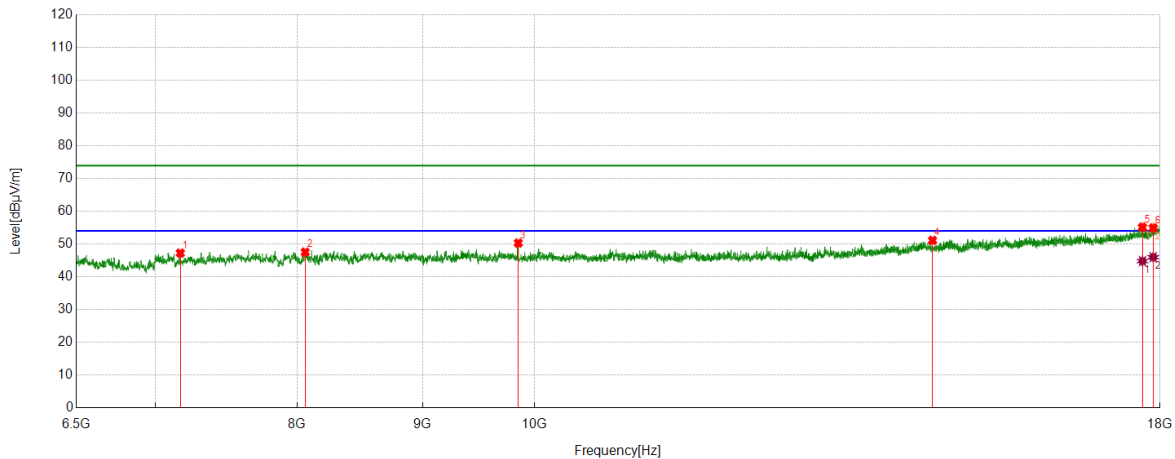

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7168.5211	43.30	3.94	47.24	74.00	-26.76	Horizontal
2	8061.3202	42.13	5.40	47.53	74.00	-26.47	Horizontal
3	9848.3560	43.79	6.51	50.30	74.00	-23.70	Horizontal
4	14535.1919	38.41	12.71	51.12	74.00	-22.88	Horizontal
5	17705.2757	36.85	18.32	55.17	74.00	-18.83	Horizontal
6	17884.9856	35.70	19.24	54.94	74.00	-19.06	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17705.2757	26.47	18.32	44.79	54.00	-9.21	Horizontal
2	17884.9856	26.73	19.24	45.97	54.00	-8.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

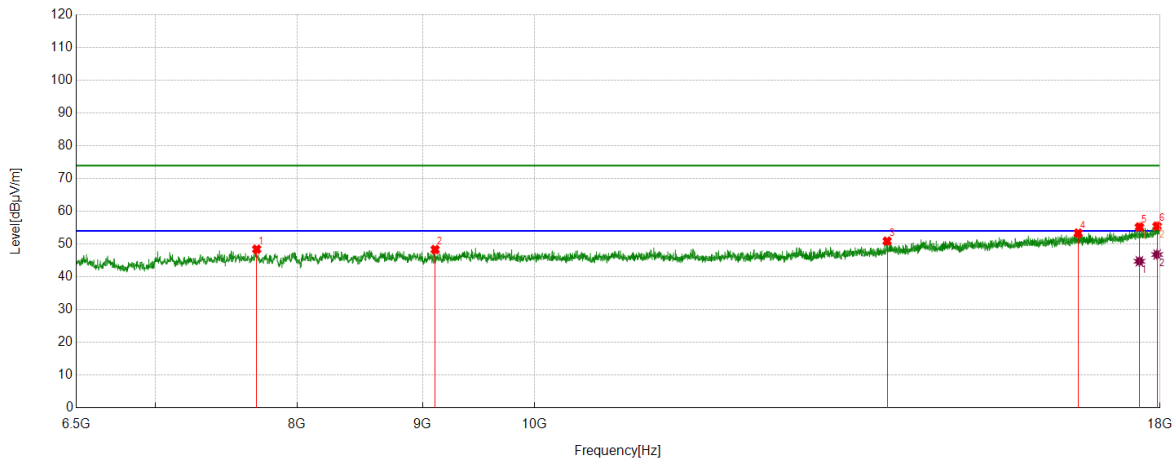

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.87	5.54	48.41	74.00	-25.59	Vertical
2	9107.9510	42.29	6.03	48.32	74.00	-25.68	Vertical
3	13928.4911	39.51	11.39	50.90	74.00	-23.10	Vertical
4	16667.2709	37.58	15.75	53.33	74.00	-20.67	Vertical
5	17654.9569	37.17	18.04	55.21	74.00	-18.79	Vertical
6	17951.1189	35.97	19.50	55.47	74.00	-18.53	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17654.9569	26.70	18.04	44.74	54.00	-9.26	Vertical
2	17951.1189	27.29	19.50	46.79	54.00	-7.21	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

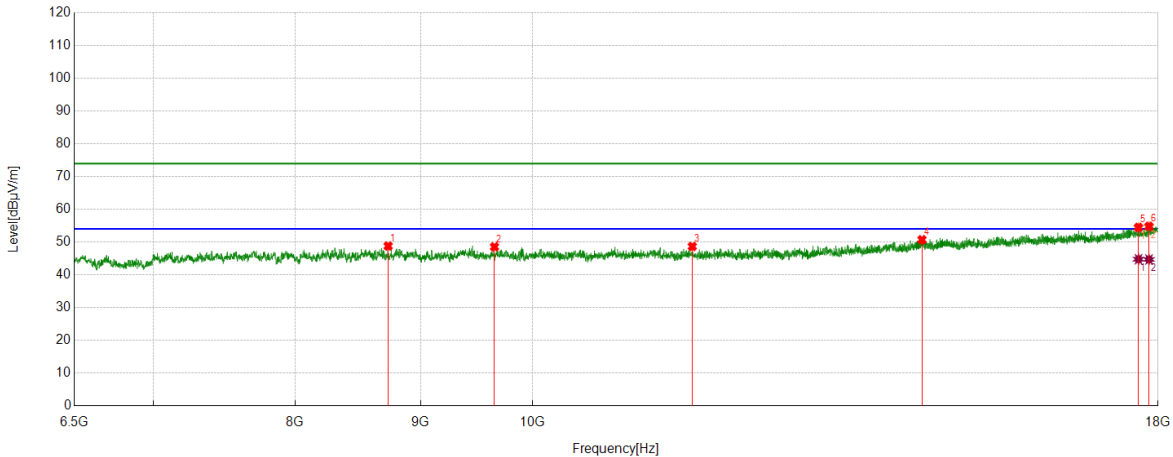

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8731.2789	42.61	6.17	48.78	74.00	-25.22	Horizontal
2	9648.5186	42.12	6.41	48.53	74.00	-25.47	Horizontal
3	11619.5774	41.06	7.59	48.65	74.00	-25.35	Horizontal
4	14418.7398	37.79	12.92	50.71	74.00	-23.29	Horizontal
5	17672.2090	36.40	18.08	54.48	74.00	-19.52	Horizontal
6	17847.6060	35.67	19.12	54.79	74.00	-19.21	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17672.2090	26.68	18.08	44.76	54.00	-9.24	Horizontal
2	17847.6060	25.56	19.12	44.68	54.00	-9.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

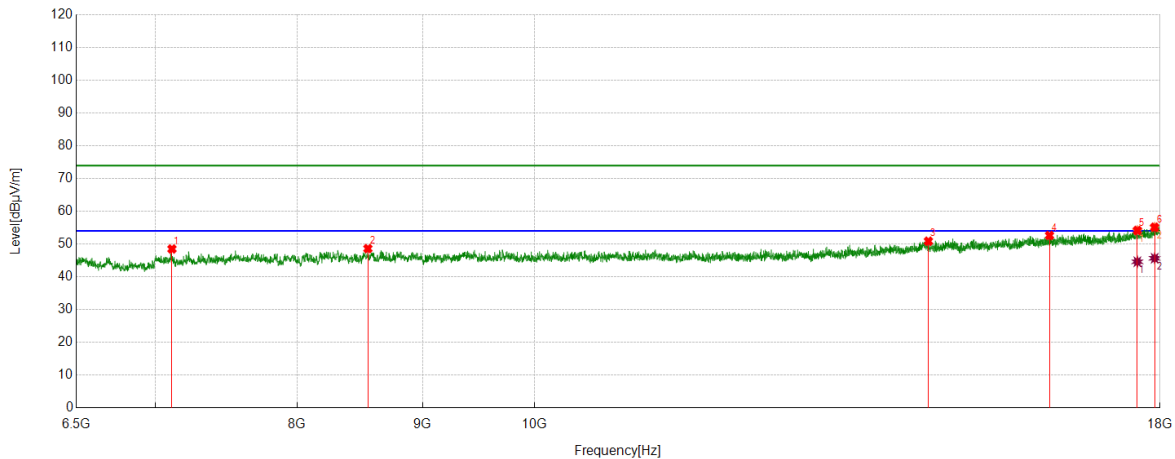

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7112.4516	44.59	3.91	48.50	74.00	-25.50	Vertical
2	8550.1313	42.10	6.51	48.61	74.00	-25.39	Vertical
3	14479.1224	38.01	12.86	50.87	74.00	-23.13	Vertical
4	16224.4656	37.22	15.40	52.62	74.00	-21.38	Vertical
5	17620.4526	36.09	18.07	54.16	74.00	-19.84	Vertical
6	17909.4262	35.88	19.25	55.13	74.00	-18.87	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17620.4526	26.52	18.07	44.59	54.00	-9.41	Vertical
2	17909.4262	26.42	19.25	45.67	54.00	-8.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

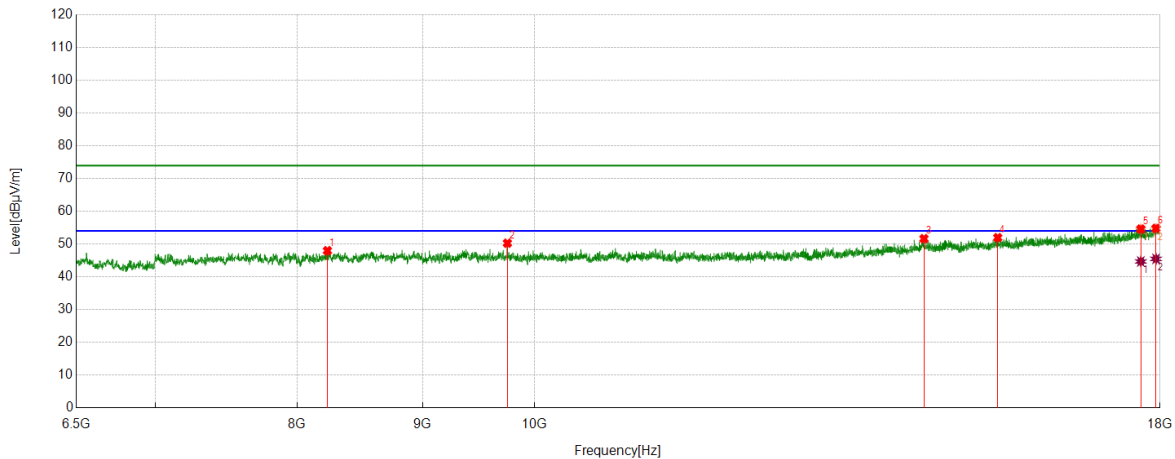

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8230.9664	41.91	6.06	47.97	74.00	-26.03	Horizontal
2	9747.7185	43.78	6.48	50.26	74.00	-23.74	Horizontal
3	14418.7398	38.72	12.92	51.64	74.00	-22.36	Horizontal
4	15453.8692	38.08	13.88	51.96	74.00	-22.04	Horizontal
5	17677.9597	36.48	18.10	54.58	74.00	-19.42	Horizontal
6	17932.4291	35.40	19.39	54.79	74.00	-19.21	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17677.9597	26.58	18.10	44.68	54.00	-9.32	Horizontal
2	17932.4291	26.08	19.39	45.47	54.00	-8.53	Horizontal
3	17920.9276	26.53	19.36	45.89	54.00	-8.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

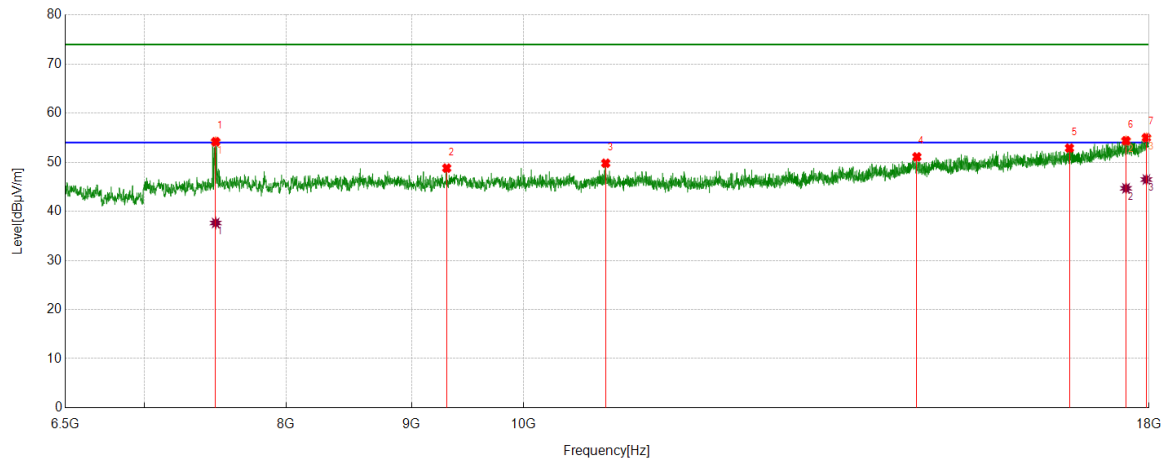

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7000.3125	44.11	3.46	47.57	74.00	-26.43	Vertical
2	8518.5023	42.66	6.44	49.10	74.00	-24.90	Vertical
3	13968.7461	38.98	11.50	50.48	74.00	-23.52	Vertical
4	16237.4047	38.26	15.21	53.47	74.00	-20.53	Vertical
5	17606.0758	36.15	18.05	54.20	74.00	-19.80	Vertical
6	17935.3044	35.55	19.42	54.97	74.00	-19.03	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17606.0758	26.70	18.05	44.75	54.00	-9.25	Vertical
2	17935.3044	26.53	19.42	45.95	54.00	-8.05	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

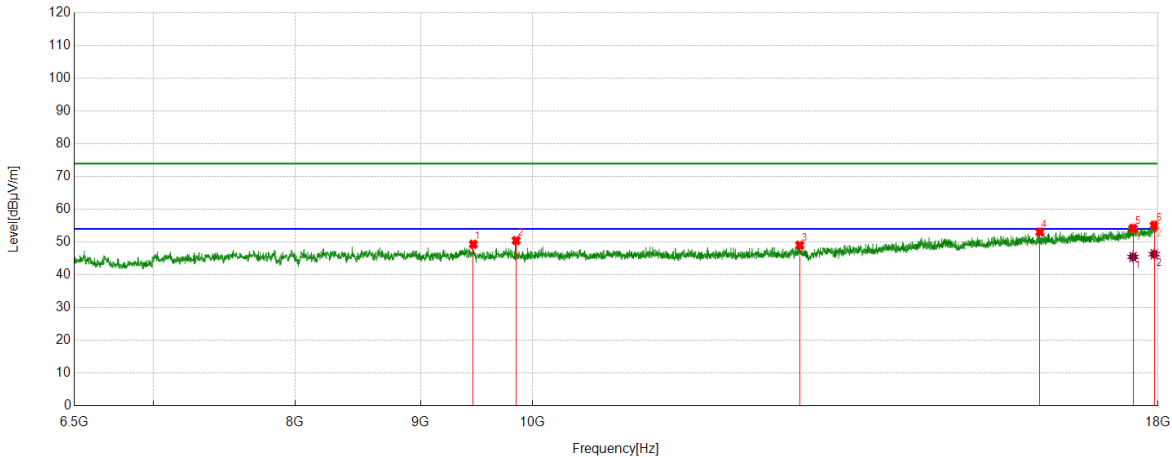

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9458.7448	42.77	6.56	49.33	74.00	-24.67	Horizontal
2	9846.9184	43.99	6.48	50.47	74.00	-23.53	Horizontal
3	12854.5443	39.79	9.26	49.05	74.00	-24.95	Horizontal
4	16108.0135	38.24	14.84	53.08	74.00	-20.92	Horizontal
5	17581.6352	36.22	17.96	54.18	74.00	-19.82	Horizontal
6	17936.7421	35.70	19.42	55.12	74.00	-18.88	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17581.6352	27.48	17.96	45.44	54.00	-8.56	Horizontal
2	17936.7421	26.88	19.42	46.30	54.00	-7.70	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

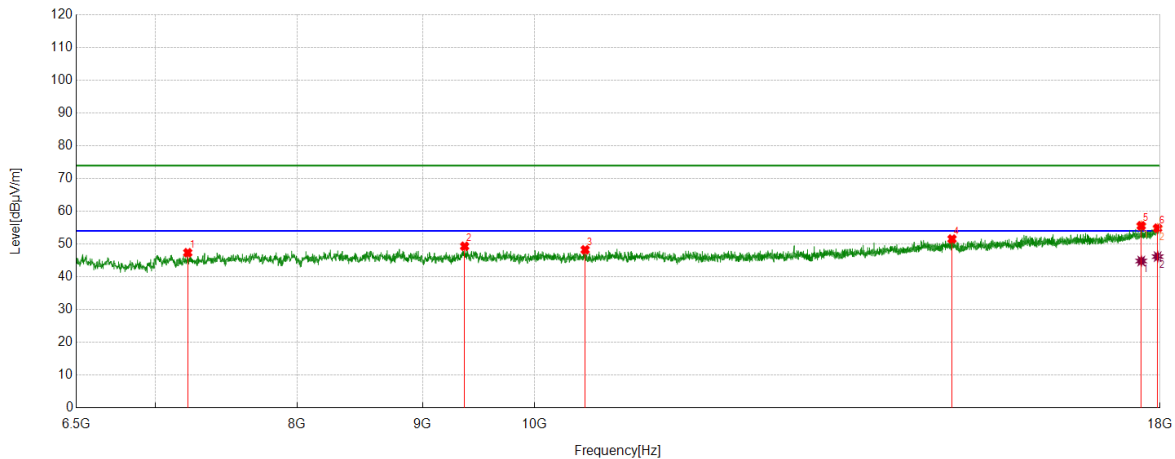

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7218.8399	43.63	3.72	47.35	74.00	-26.65	Vertical
2	9363.8580	42.85	6.47	49.32	74.00	-24.68	Vertical
3	10486.6858	41.35	6.89	48.24	74.00	-25.76	Vertical
4	14804.0380	38.72	12.83	51.55	74.00	-22.45	Vertical
5	17685.1481	37.43	18.15	55.58	74.00	-18.42	Vertical
6	17959.7450	35.23	19.63	54.86	74.00	-19.14	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17685.1481	26.67	18.15	44.82	54.00	-9.18	Vertical
2	17959.7450	26.53	19.63	46.16	54.00	-7.84	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

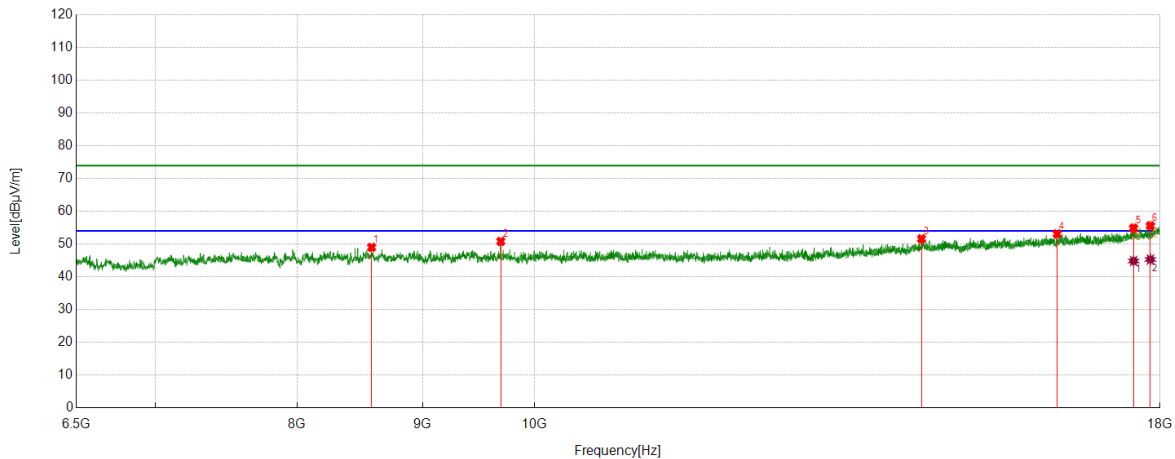

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8580.3225	42.57	6.43	49.00	74.00	-25.00	Horizontal
2	9687.3359	44.30	6.51	50.81	74.00	-23.19	Horizontal
3	14385.6732	38.84	12.76	51.60	74.00	-22.40	Horizontal
4	16340.9176	38.09	15.02	53.11	74.00	-20.89	Horizontal
5	17558.6323	37.09	17.78	54.87	74.00	-19.13	Horizontal
6	17837.5422	36.50	19.09	55.59	74.00	-18.41	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17558.6323	27.04	17.78	44.82	54.00	-9.18	Horizontal
2	17837.5422	26.20	19.09	45.29	54.00	-8.71	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

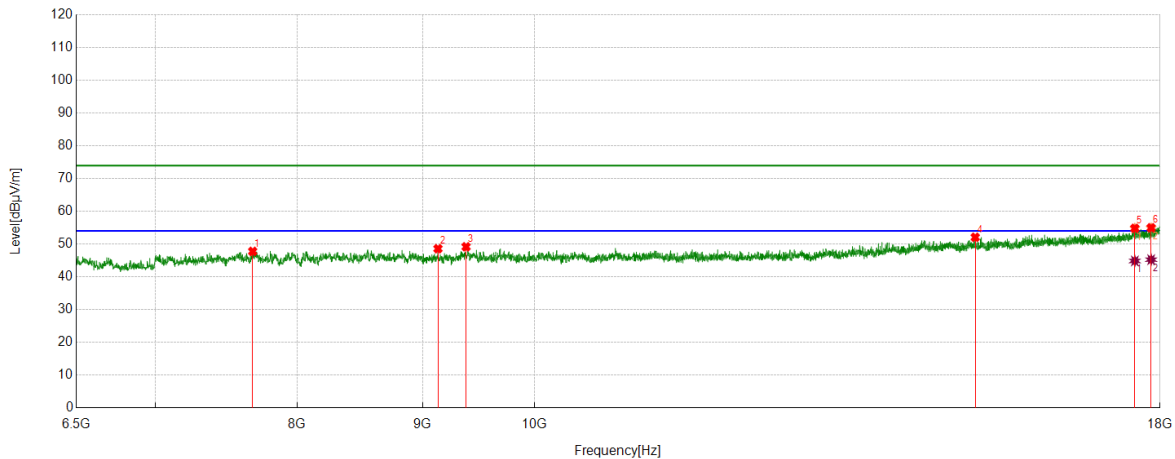

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7673.1466	42.51	5.25	47.76	74.00	-26.24	Vertical
2	9132.3915	42.67	5.91	48.58	74.00	-25.42	Vertical
3	9376.7971	42.69	6.47	49.16	74.00	-24.84	Vertical
4	15130.3913	38.86	13.21	52.07	74.00	-21.93	Vertical
5	17578.7598	36.85	17.95	54.80	74.00	-19.20	Vertical
6	17850.4813	35.83	19.14	54.97	74.00	-19.03	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17578.7598	26.89	17.95	44.84	54.00	-9.16	Vertical
2	17850.4813	26.09	19.14	45.23	54.00	-8.77	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

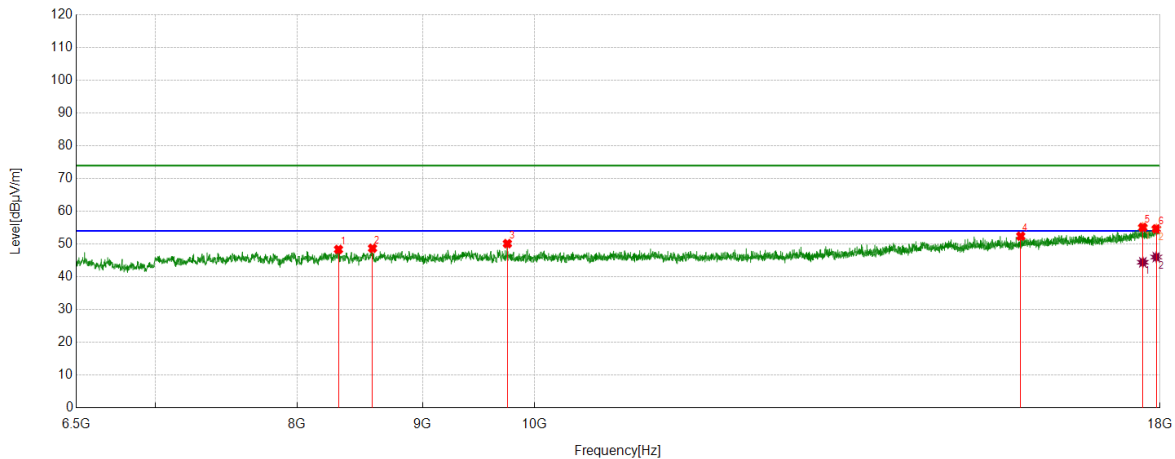

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8317.2272	42.34	6.01	48.35	74.00	-25.65	Horizontal
2	8587.5109	42.67	6.04	48.71	74.00	-25.29	Horizontal
3	9747.7185	43.65	6.48	50.13	74.00	-23.87	Horizontal
4	15791.7240	38.06	14.35	52.41	74.00	-21.59	Horizontal
5	17711.0264	36.73	18.37	55.10	74.00	-18.90	Horizontal
6	17936.7421	35.22	19.42	54.64	74.00	-19.36	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17711.0264	26.06	18.37	44.43	54.00	-9.57	Horizontal
2	17936.7421	26.60	19.42	46.02	54.00	-7.98	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

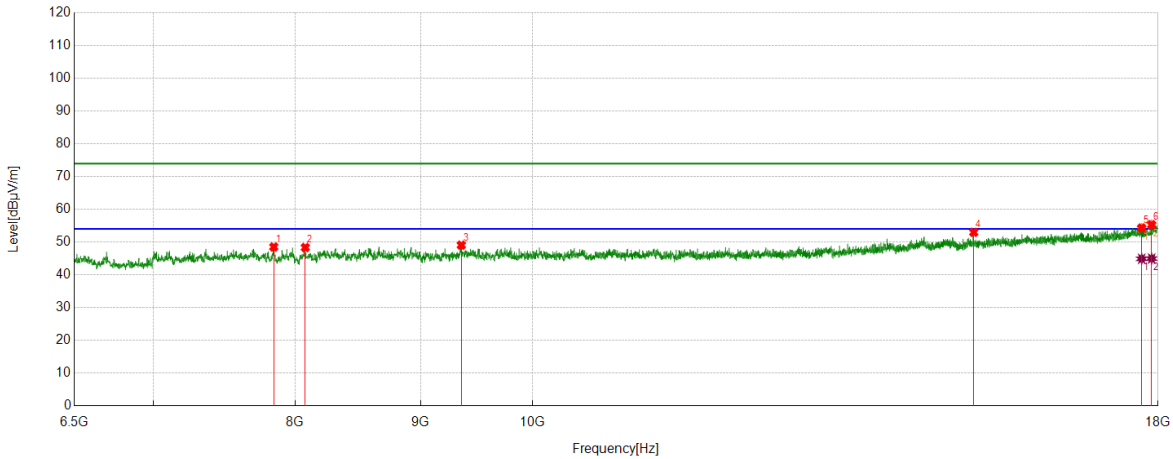

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7841.3552	43.15	5.36	48.51	74.00	-25.49	Vertical
2	8077.1346	42.78	5.55	48.33	74.00	-25.67	Vertical
3	9352.3565	42.60	6.45	49.05	74.00	-24.95	Vertical
4	15137.5797	39.73	13.24	52.97	74.00	-21.03	Vertical
5	17725.4032	35.79	18.51	54.30	74.00	-19.70	Vertical
6	17892.1740	36.01	19.29	55.30	74.00	-18.70	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17725.4032	26.37	18.51	44.88	54.00	-9.12	Vertical
2	17892.1740	25.67	19.29	44.96	54.00	-9.04	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

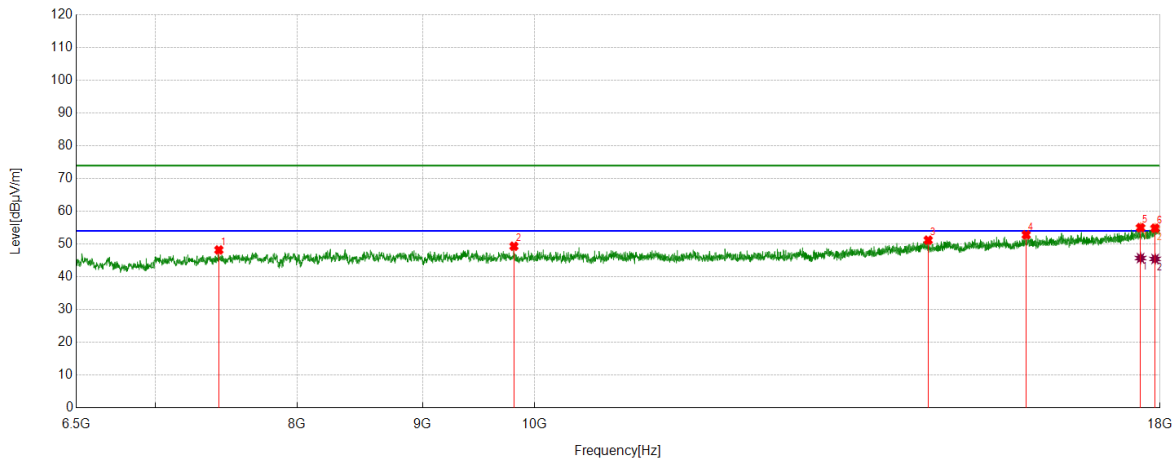

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7433.0541	43.95	4.24	48.19	74.00	-25.81	Horizontal
2	9808.1010	42.96	6.37	49.33	74.00	-24.67	Horizontal
3	14476.2470	38.33	12.86	51.19	74.00	-22.81	Horizontal
4	15872.2340	38.12	14.69	52.81	74.00	-21.19	Horizontal
5	17673.6467	36.94	18.08	55.02	74.00	-18.98	Horizontal
6	17916.6146	35.52	19.32	54.84	74.00	-19.16	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17673.6467	27.63	18.08	45.71	54.00	-8.29	Horizontal
2	17916.6146	26.12	19.32	45.44	54.00	-8.56	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

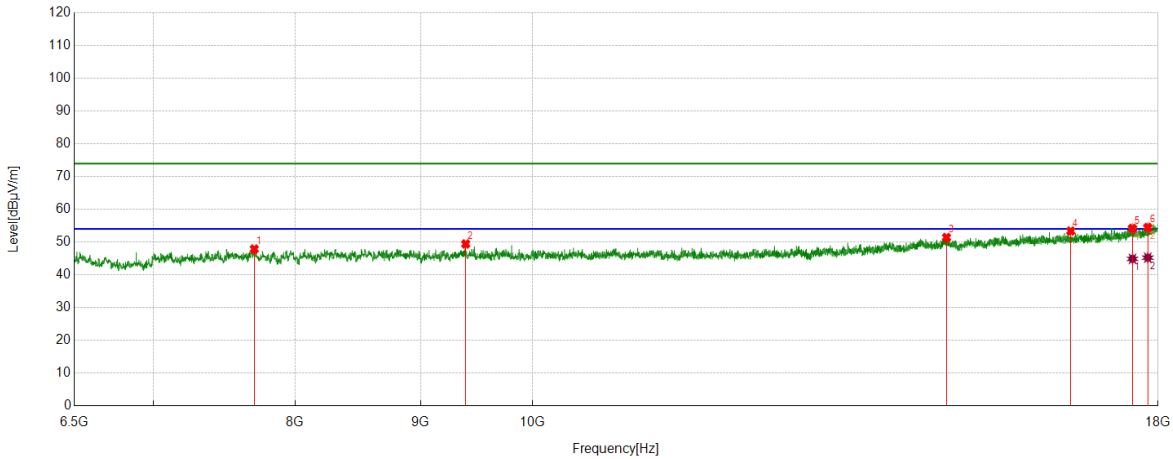

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7699.0249	42.30	5.57	47.87	74.00	-26.13	Vertical
2	9391.1739	42.87	6.55	49.42	74.00	-24.58	Vertical
3	14755.1569	38.49	12.91	51.40	74.00	-22.60	Vertical
4	16582.4478	37.52	15.85	53.37	74.00	-20.63	Vertical
5	17573.0091	36.25	17.92	54.17	74.00	-19.83	Vertical
6	17827.4784	35.39	19.07	54.46	74.00	-19.54	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17573.0091	26.94	17.92	44.86	54.00	-9.14	Vertical
2	17827.4784	26.16	19.07	45.23	54.00	-8.77	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

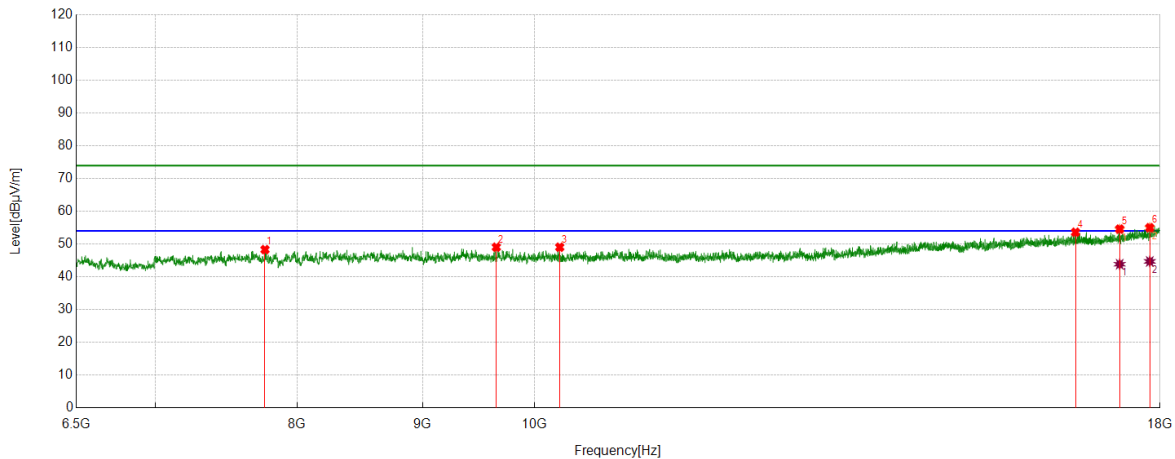

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7762.2828	43.10	5.20	48.30	74.00	-25.70	Horizontal
2	9647.0809	42.65	6.39	49.04	74.00	-24.96	Horizontal
3	10239.4049	42.36	6.68	49.04	74.00	-24.96	Horizontal
4	16625.5782	37.76	15.85	53.61	74.00	-20.39	Horizontal
5	17330.0413	37.47	17.10	54.57	74.00	-19.43	Horizontal
6	17827.4784	35.92	19.07	54.99	74.00	-19.01	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17330.0413	26.74	17.10	43.84	54.00	-10.16	Horizontal
2	17827.4784	25.62	19.07	44.69	54.00	-9.31	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

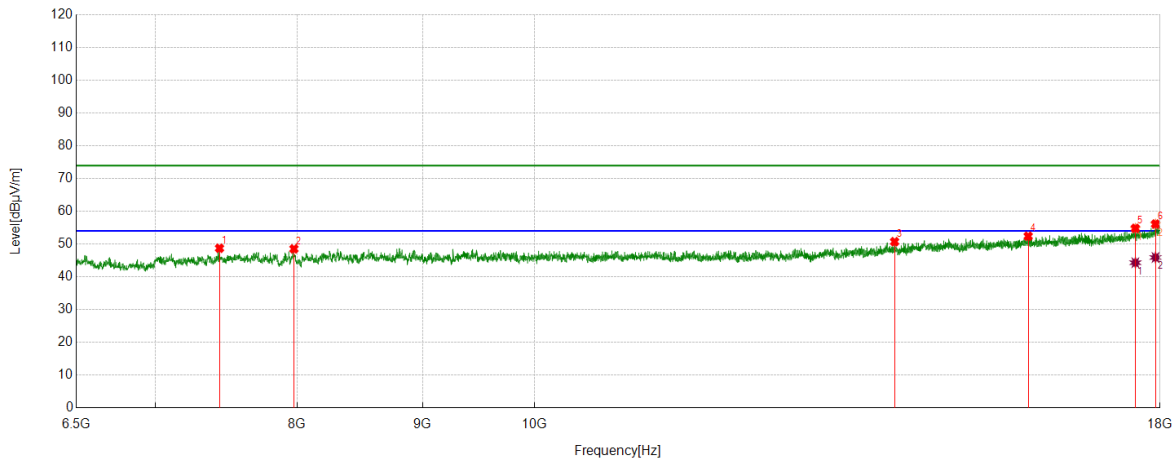

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7437.3672	44.51	4.21	48.72	74.00	-25.28	Vertical
2	7976.4971	43.16	5.37	48.53	74.00	-25.47	Vertical
3	14026.2533	38.81	11.91	50.72	74.00	-23.28	Vertical
4	15902.4253	37.77	14.63	52.40	74.00	-21.60	Vertical
5	17587.3859	36.79	18.01	54.80	74.00	-19.20	Vertical
6	17923.8030	36.75	19.36	56.11	74.00	-17.89	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17587.3859	26.29	18.01	44.30	54.00	-9.70	Vertical
2	17923.8030	26.54	19.36	45.90	54.00	-8.10	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

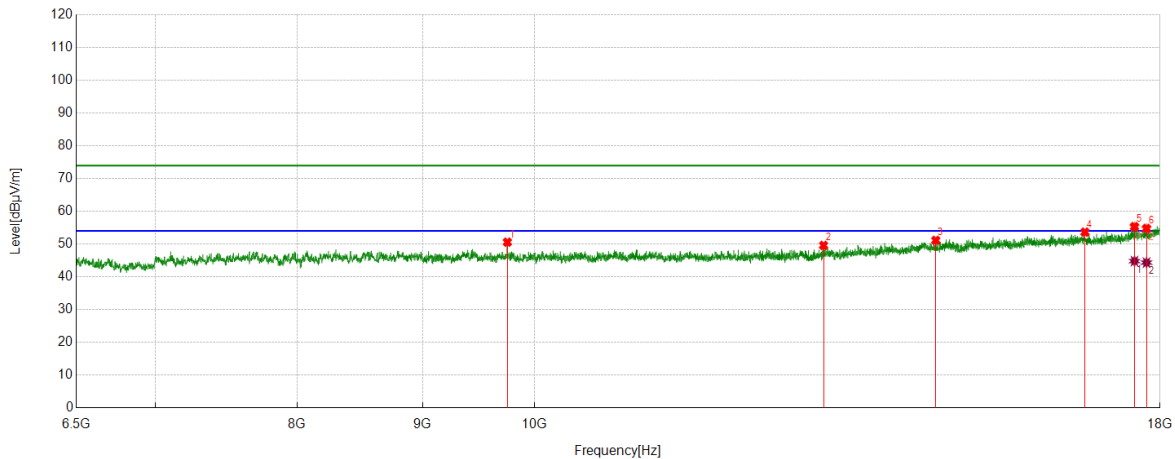

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9747.7185	44.10	6.48	50.58	74.00	-23.42	Horizontal
2	13120.5151	39.98	9.60	49.58	74.00	-24.42	Horizontal
3	14579.7600	38.41	12.71	51.12	74.00	-22.88	Horizontal
4	16773.6592	37.53	16.11	53.64	74.00	-20.36	Horizontal
5	17573.0091	37.40	17.92	55.32	74.00	-18.68	Horizontal
6	17772.8466	36.07	18.69	54.76	74.00	-19.24	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17573.0091	26.87	17.92	44.79	54.00	-9.21	Horizontal
2	17772.8466	25.65	18.69	44.34	54.00	-9.66	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

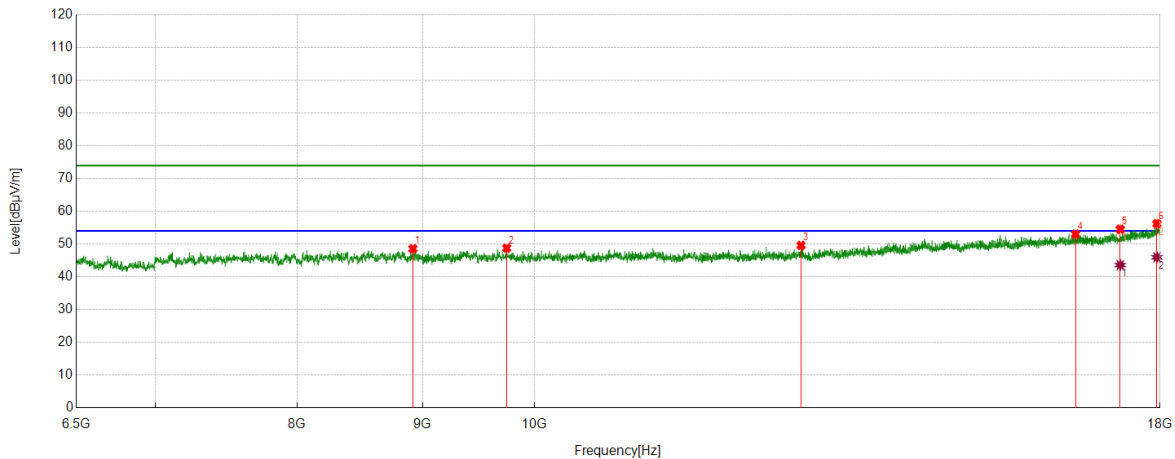

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8919.6150	42.33	6.25	48.58	74.00	-25.42	Vertical
2	9741.9677	42.25	6.52	48.77	74.00	-25.23	Vertical
3	12845.9182	40.32	9.27	49.59	74.00	-24.41	Vertical
4	16627.0159	37.22	15.83	53.05	74.00	-20.95	Vertical
5	17340.1050	37.33	17.20	54.53	74.00	-19.47	Vertical
6	17948.2435	36.75	19.48	56.23	74.00	-17.77	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17340.1050	26.38	17.20	43.58	54.00	-10.42	Vertical
2	17948.2435	26.48	19.48	45.96	54.00	-8.04	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

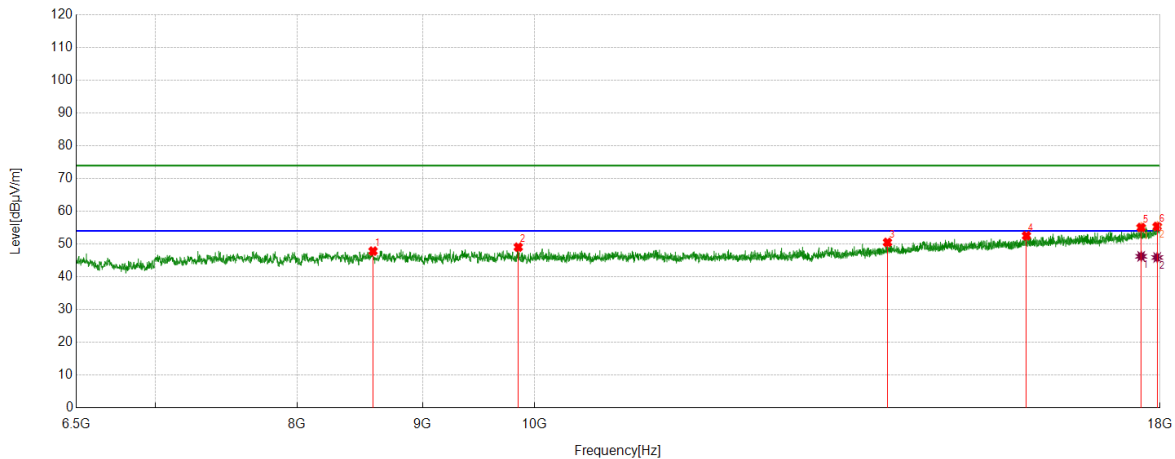

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8591.8240	41.86	5.99	47.85	74.00	-26.15	Horizontal
2	9848.3560	42.55	6.51	49.06	74.00	-24.94	Horizontal
3	13932.8041	39.13	11.38	50.51	74.00	-23.49	Horizontal
4	15876.5471	37.82	14.71	52.53	74.00	-21.47	Horizontal
5	17683.7105	36.93	18.13	55.06	74.00	-18.94	Horizontal
6	17952.5566	35.85	19.53	55.38	74.00	-18.62	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17683.7105	28.12	18.13	46.25	54.00	-7.75	Horizontal
2	17952.5566	26.37	19.53	45.90	54.00	-8.10	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

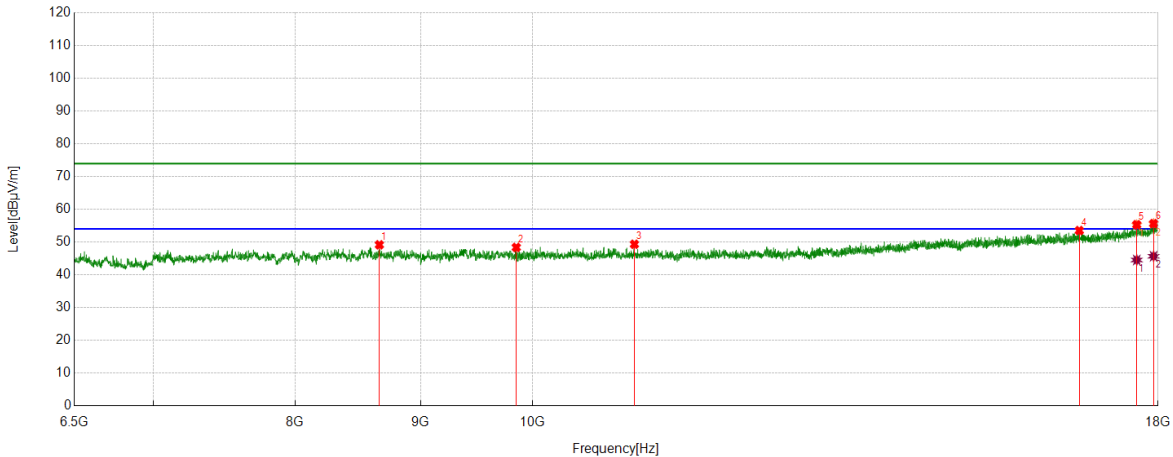

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8659.3949	42.71	6.45	49.16	74.00	-24.84	Vertical
2	9848.3560	41.85	6.51	48.36	74.00	-25.64	Vertical
3	11004.2505	42.05	7.28	49.33	74.00	-24.67	Vertical
4	16716.1520	37.41	16.10	53.51	74.00	-20.49	Vertical
5	17643.4554	37.30	18.01	55.31	74.00	-18.69	Vertical
6	17925.2407	36.27	19.37	55.64	74.00	-18.36	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17643.4554	26.51	18.01	44.52	54.00	-9.48	Vertical
2	17925.2407	26.30	19.37	45.67	54.00	-8.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.