


Test Mode	Channel	Polarization	Verdict
11a	5785	Vertical	PASS

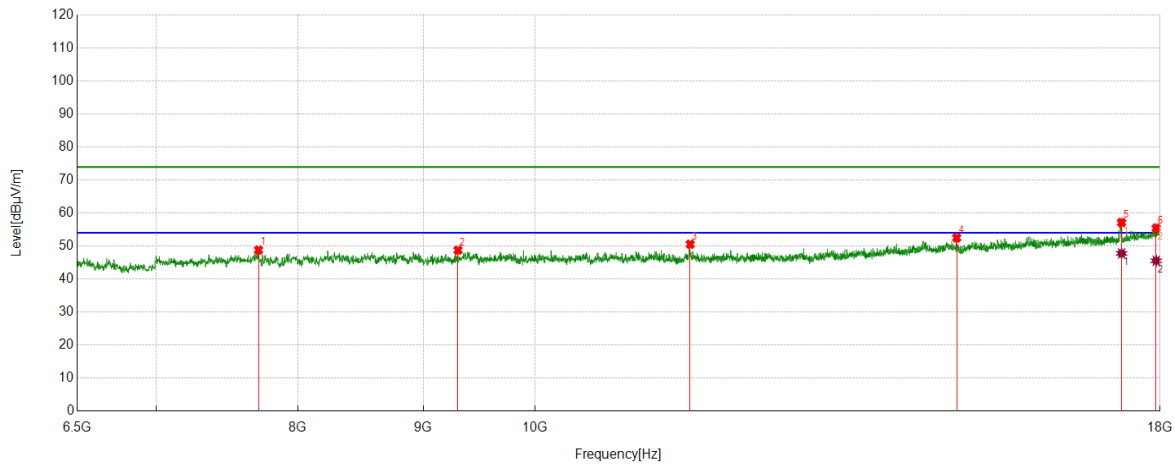

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7709.6183	43.61	5.19	48.80	74.00	-25.20	Vertical
2	9300.7168	42.59	6.16	48.75	74.00	-25.25	Vertical
3	11570.4284	42.83	7.72	50.55	74.00	-23.45	Vertical
4	14865.7276	39.66	12.84	52.50	74.00	-21.50	Vertical
5	17359.7266	39.86	17.28	57.14	74.00	-16.86	Vertical
6	17934.8225	36.04	19.40	55.44	74.00	-18.56	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17359.7266	30.49	17.28	47.77	54.00	-6.23	Vertical
2	17934.8225	26.14	19.40	45.54	54.00	-8.46	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Horizontal	PASS

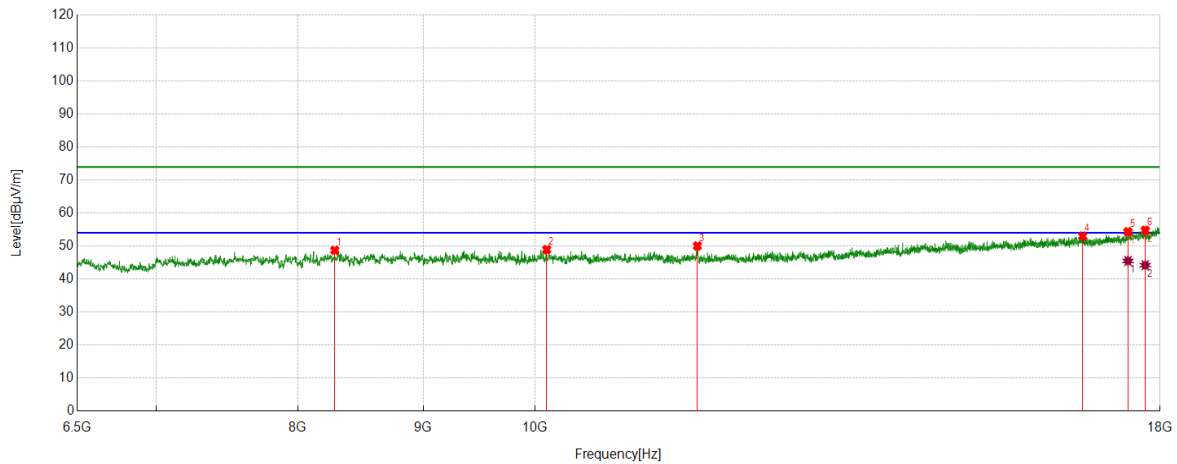

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8282.7971	42.38	6.33	48.71	74.00	-25.29	Horizontal
2	10109.6849	42.24	6.67	48.91	74.00	-25.09	Horizontal
3	11649.0248	42.29	7.74	50.03	74.00	-23.97	Horizontal
4	16736.7061	37.03	15.99	53.02	74.00	-20.98	Horizontal
5	17465.1609	36.69	17.63	54.32	74.00	-19.68	Horizontal
6	17750.7918	36.18	18.60	54.78	74.00	-19.22	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17465.1609	27.85	17.63	45.48	54.00	-8.52	Horizontal
2	17750.7918	25.61	18.60	44.21	54.00	-9.79	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Vertical	PASS

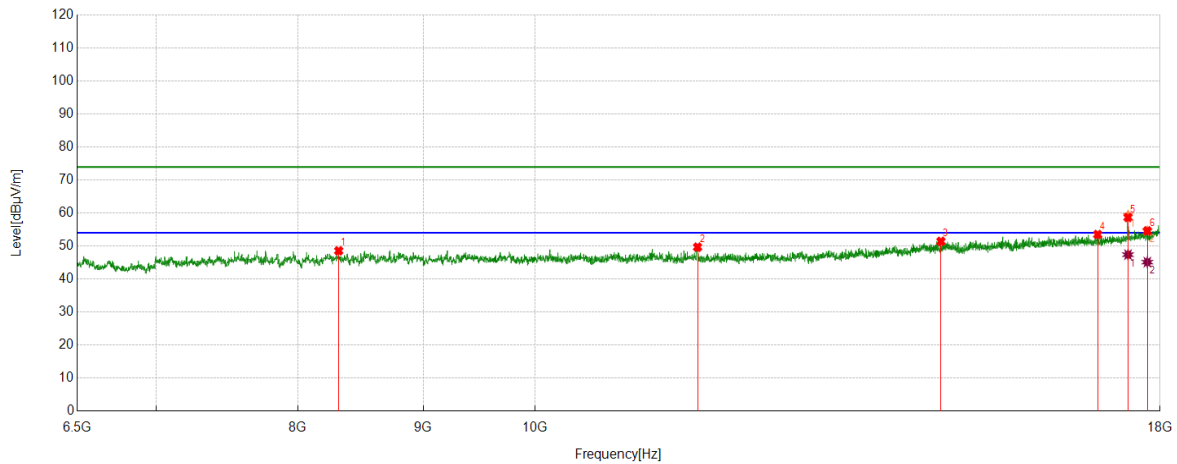

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8313.4689	42.37	6.19	48.56	74.00	-25.44	Vertical
2	11650.9418	41.92	7.74	49.66	74.00	-24.34	Vertical
3	14647.1912	38.66	12.76	51.42	74.00	-22.58	Vertical
4	16974.4124	37.41	16.09	53.50	74.00	-20.50	Vertical
5	17465.1609	41.04	17.63	58.67	74.00	-15.33	Vertical
6	17785.2976	35.85	18.74	54.59	74.00	-19.41	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17465.2108	29.75	17.63	47.38	54.00	-6.62	Vertical
2	17785.2976	26.38	18.74	45.12	54.00	-8.88	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Horizontal	PASS

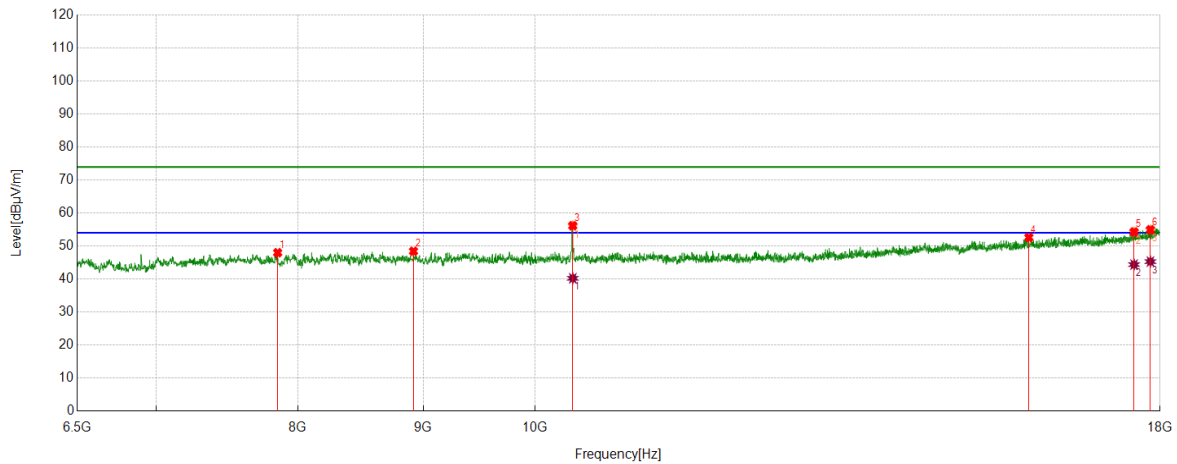

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7849.5583	42.55	5.43	47.98	74.00	-26.02	Horizontal
2	8919.2365	42.19	6.24	48.43	74.00	-25.57	Horizontal
3	10360.8101	49.48	6.70	56.18	74.00	-17.82	Horizontal
4	15910.4851	37.98	14.61	52.59	74.00	-21.41	Horizontal
5	17564.8441	36.46	17.83	54.29	74.00	-19.71	Horizontal
6	17837.0562	35.86	19.09	54.95	74.00	-19.05	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10360.7602	33.51	6.70	40.21	54.00	-13.79	Horizontal
2	17564.8441	26.54	17.83	44.37	54.00	-9.63	Horizontal
3	17837.0562	26.19	19.09	45.28	54.00	-8.72	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Vertical	PASS

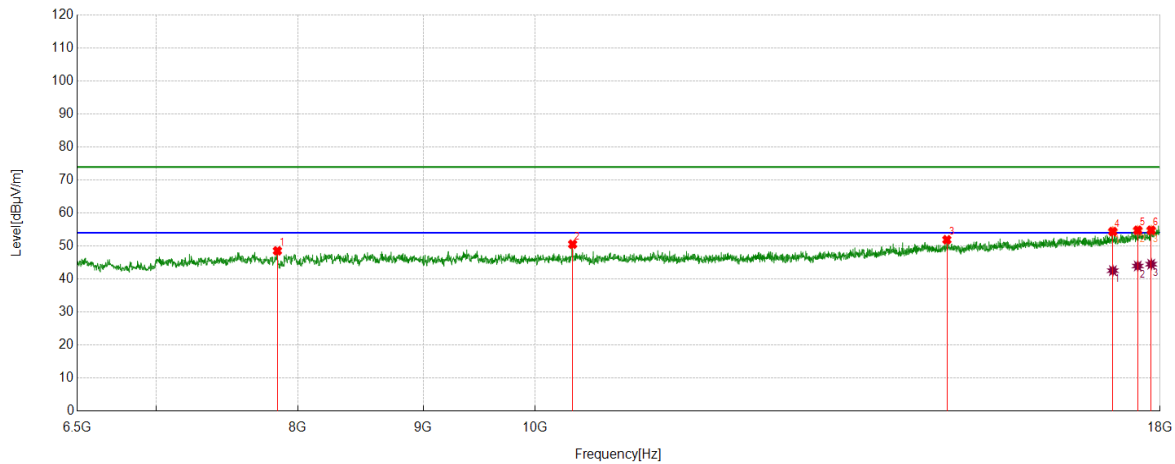

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7847.6413	43.14	5.41	48.55	74.00	-25.45	Vertical
2	10358.8931	43.85	6.70	50.55	74.00	-23.45	Vertical
3	14729.6216	39.12	12.79	51.91	74.00	-22.09	Vertical
4	17217.8696	37.69	16.71	54.40	74.00	-19.60	Vertical
5	17626.1877	36.73	18.06	54.79	74.00	-19.21	Vertical
6	17850.4751	35.66	19.14	54.80	74.00	-19.20	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17217.8696	25.83	16.71	42.54	54.00	-11.46	Vertical
2	17626.1877	25.89	18.06	43.95	54.00	-10.05	Vertical
3	17850.4751	25.36	19.14	44.50	54.00	-9.50	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Horizontal	PASS

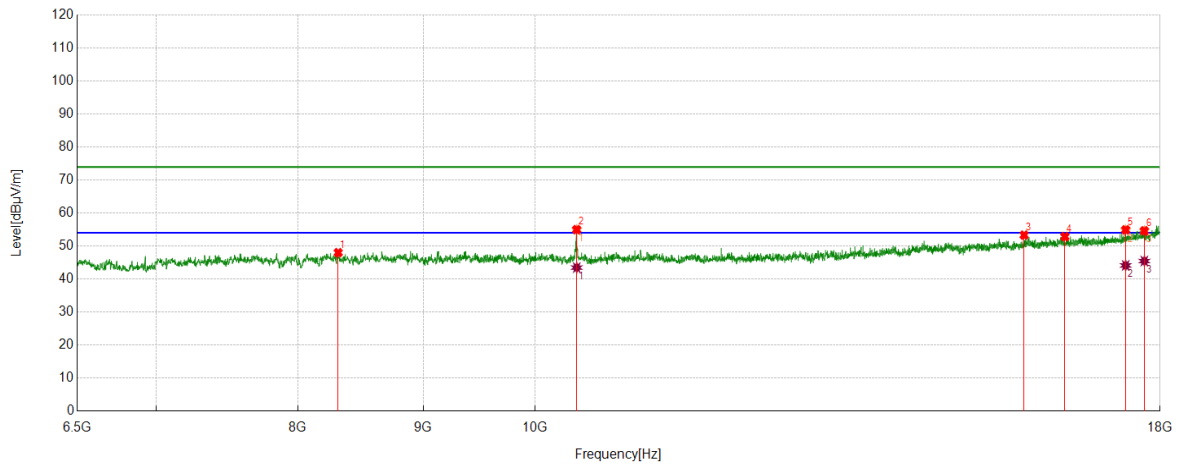

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8309.6349	41.65	6.34	47.99	74.00	-26.01	Horizontal
2	10399.1499	48.26	6.72	54.98	74.00	-19.02	Horizontal
3	15839.5566	38.80	14.52	53.32	74.00	-20.68	Horizontal
4	16458.7431	37.05	15.80	52.85	74.00	-21.15	Horizontal
5	17426.8211	37.40	17.51	54.91	74.00	-19.09	Horizontal
6	17735.4559	36.08	18.53	54.61	74.00	-19.39	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10399.1499	36.74	6.72	43.46	54.00	-10.54	Horizontal
2	17426.8211	26.61	17.51	44.12	54.00	-9.88	Horizontal
3	17735.4559	26.92	18.53	45.45	54.00	-8.55	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Vertical	PASS

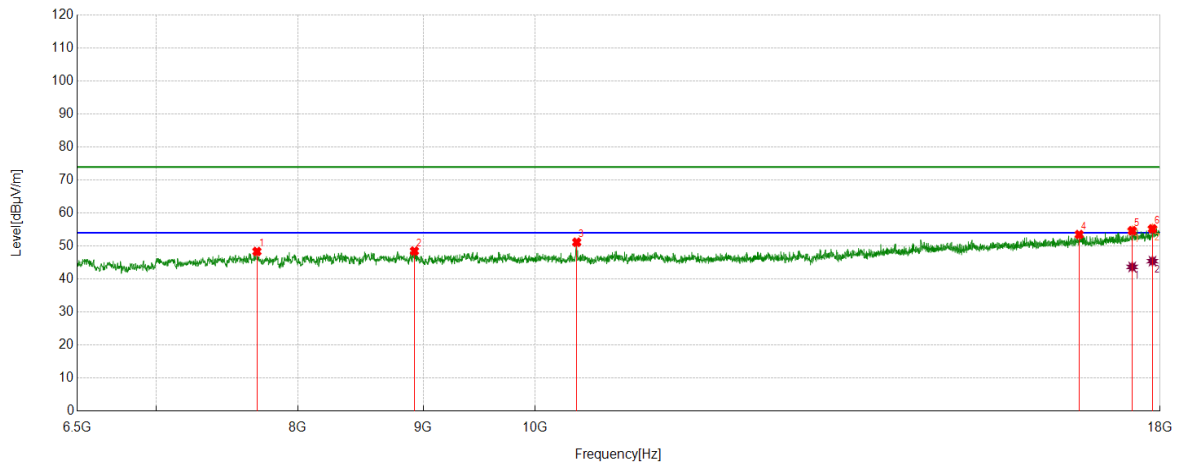

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7698.1164	42.82	5.53	48.35	74.00	-25.65	Vertical
2	8926.9045	42.34	6.14	48.48	74.00	-25.52	Vertical
3	10399.1499	44.43	6.72	51.15	74.00	-22.85	Vertical
4	16681.1135	37.83	15.66	53.49	74.00	-20.51	Vertical
5	17534.1724	37.02	17.62	54.64	74.00	-19.36	Vertical
6	17871.5619	36.03	19.19	55.22	74.00	-18.78	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17534.1724	26.04	17.62	43.66	54.00	-10.34	Vertical
2	17871.5619	26.24	19.19	45.43	54.00	-8.57	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Horizontal	PASS

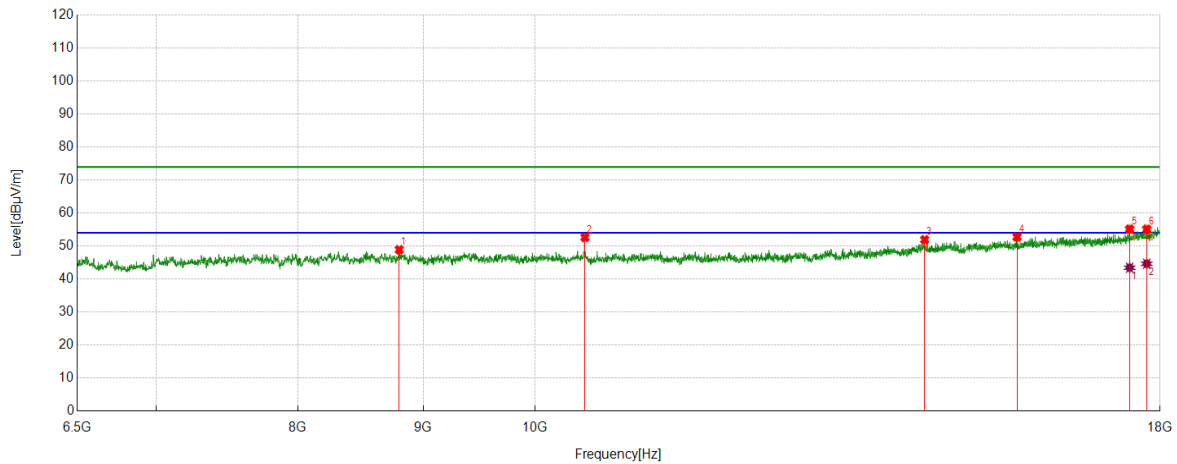

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8800.3834	42.70	6.20	48.90	74.00	-25.10	Horizontal
2	10479.6633	45.83	6.78	52.61	74.00	-21.39	Horizontal
3	14424.8208	39.04	12.89	51.93	74.00	-22.07	Horizontal
4	15734.1224	38.57	14.17	52.74	74.00	-21.26	Horizontal
5	17491.9987	37.51	17.64	55.15	74.00	-18.85	Horizontal
6	17775.7126	36.37	18.73	55.10	74.00	-18.90	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17491.9987	25.79	17.64	43.43	54.00	-10.57	Horizontal
2	17775.7126	25.90	18.73	44.63	54.00	-9.37	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Vertical	PASS

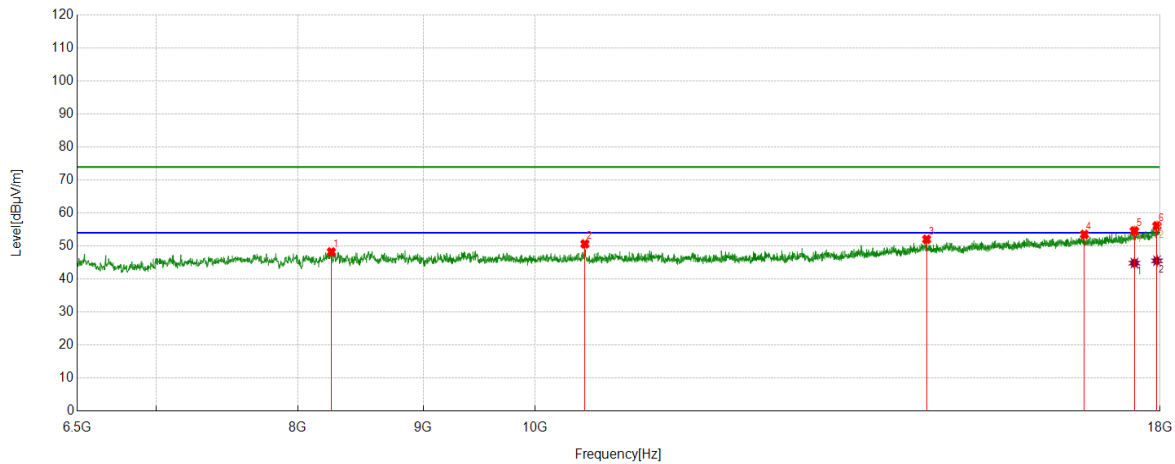

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8255.9593	42.02	6.19	48.21	74.00	-25.79	Vertical
2	10479.6633	43.86	6.78	50.64	74.00	-23.36	Vertical
3	14451.6586	39.13	12.91	52.04	74.00	-21.96	Vertical
4	16763.5439	37.48	16.04	53.52	74.00	-20.48	Vertical
5	17570.5951	36.71	17.90	54.61	74.00	-19.39	Vertical
6	17948.2414	36.64	19.48	56.12	74.00	-17.88	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17570.5951	26.93	17.90	44.83	54.00	-9.17	Vertical
2	17948.2414	26.06	19.48	45.54	54.00	-8.46	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Horizontal	PASS

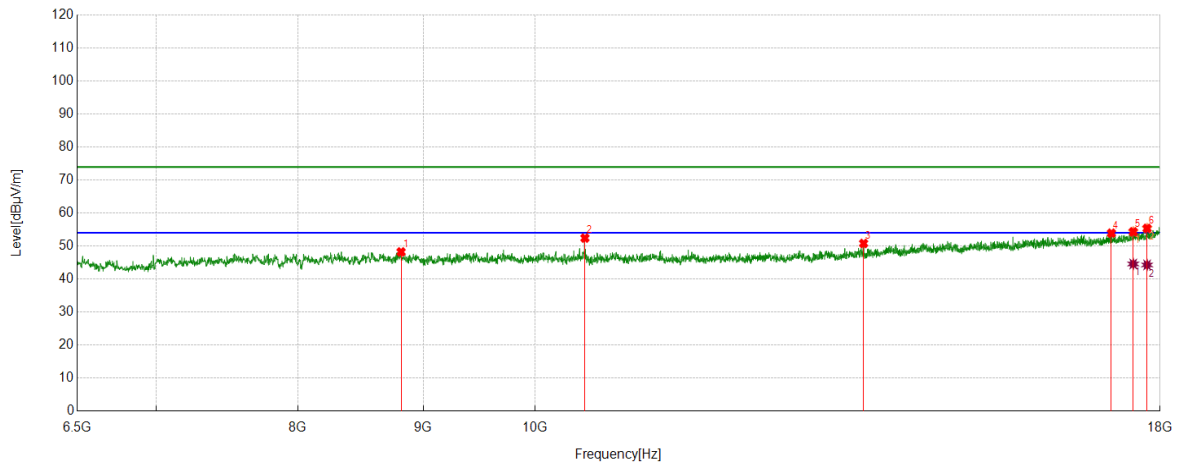

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8815.7193	41.95	6.27	48.22	74.00	-25.78	Horizontal
2	10479.6633	45.63	6.78	52.41	74.00	-21.59	Horizontal
3	13619.6866	40.13	10.66	50.79	74.00	-23.21	Horizontal
4	17194.8658	37.30	16.60	53.90	74.00	-20.10	Horizontal
5	17551.4252	36.58	17.74	54.32	74.00	-19.68	Horizontal
6	17781.4636	36.59	18.77	55.36	74.00	-18.64	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17551.4252	26.82	17.74	44.56	54.00	-9.44	Horizontal
2	17781.4636	25.50	18.77	44.27	54.00	-9.73	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Vertical	PASS

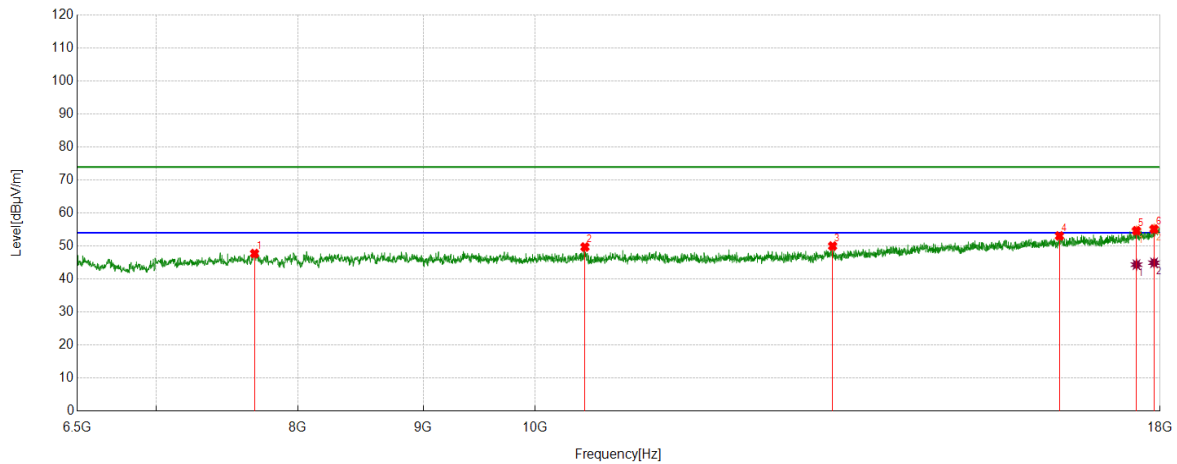

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7680.8635	42.40	5.32	47.72	74.00	-26.28	Vertical
2	10479.6633	42.93	6.78	49.71	74.00	-24.29	Vertical
3	13228.6214	39.94	10.06	50.00	74.00	-24.00	Vertical
4	16374.3957	38.02	15.05	53.07	74.00	-20.93	Vertical
5	17605.1008	36.58	18.05	54.63	74.00	-19.37	Vertical
6	17898.3997	35.93	19.21	55.14	74.00	-18.86	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17605.1008	26.31	18.05	44.36	54.00	-9.64	Vertical
2	17898.3997	25.72	19.21	44.93	54.00	-9.07	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Horizontal	PASS

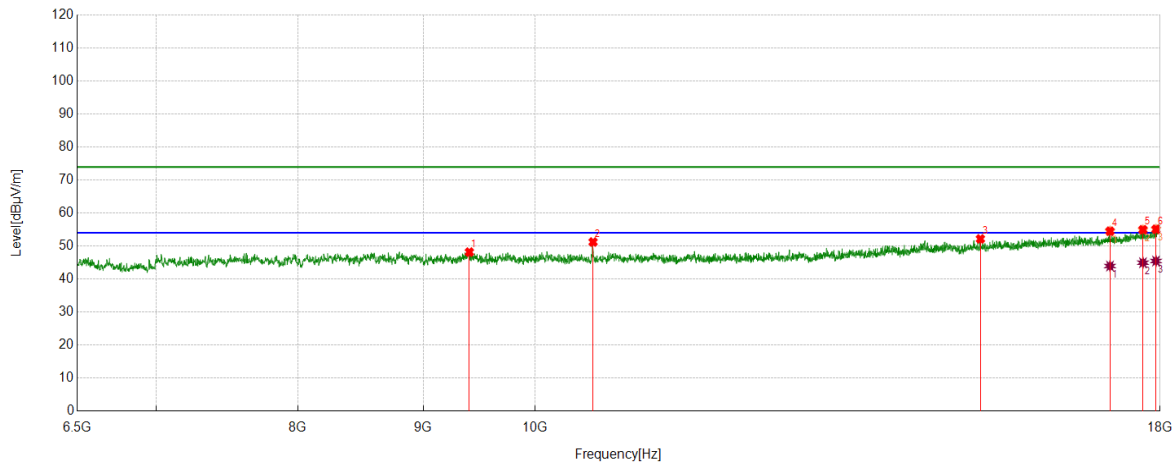

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9400.4001	41.55	6.61	48.16	74.00	-25.84	Horizontal
2	10560.1767	44.42	6.80	51.22	74.00	-22.78	Horizontal
3	15201.2002	38.74	13.42	52.16	74.00	-21.84	Horizontal
4	17171.8620	38.02	16.48	54.50	74.00	-19.50	Horizontal
5	17712.4521	36.58	18.38	54.96	74.00	-19.04	Horizontal
6	17930.9885	35.73	19.37	55.10	74.00	-18.90	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.8620	27.46	16.48	43.94	54.00	-10.06	Horizontal
2	17712.4521	26.56	18.38	44.94	54.00	-9.06	Horizontal
3	17930.9885	26.09	19.37	45.46	54.00	-8.54	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Vertical	PASS

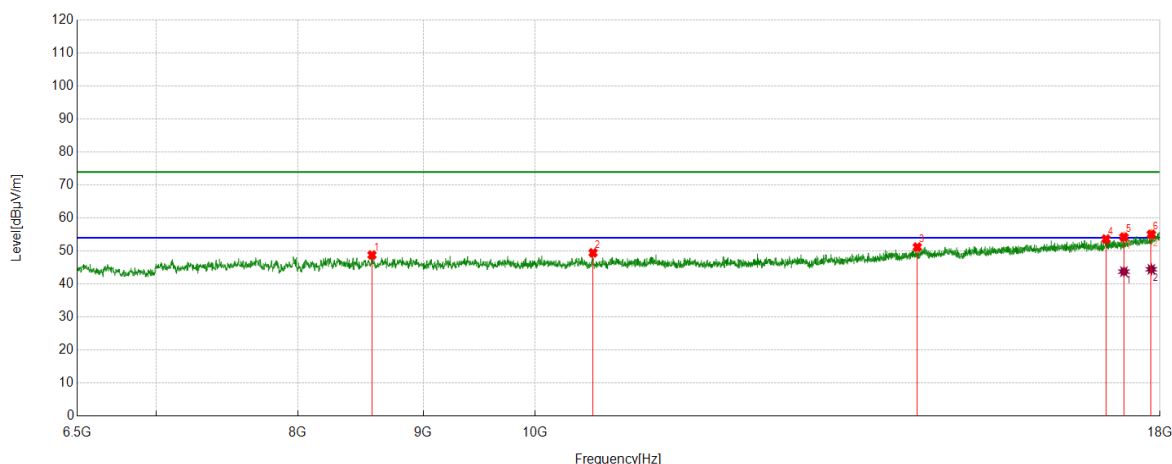

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8578.0130	42.39	6.40	48.79	74.00	-25.21	Vertical
2	10560.1767	42.65	6.80	49.45	74.00	-24.55	Vertical
3	14325.1375	38.84	12.36	51.20	74.00	-22.80	Vertical
4	17106.6844	37.26	16.39	53.65	74.00	-20.35	Vertical
5	17398.0663	36.87	17.35	54.22	74.00	-19.78	Vertical
6	17852.3921	35.91	19.17	55.08	74.00	-18.92	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17398.0663	26.41	17.35	43.76	54.00	-10.24	Vertical
2	17852.3921	25.30	19.17	44.47	54.00	-9.53	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Horizontal	PASS

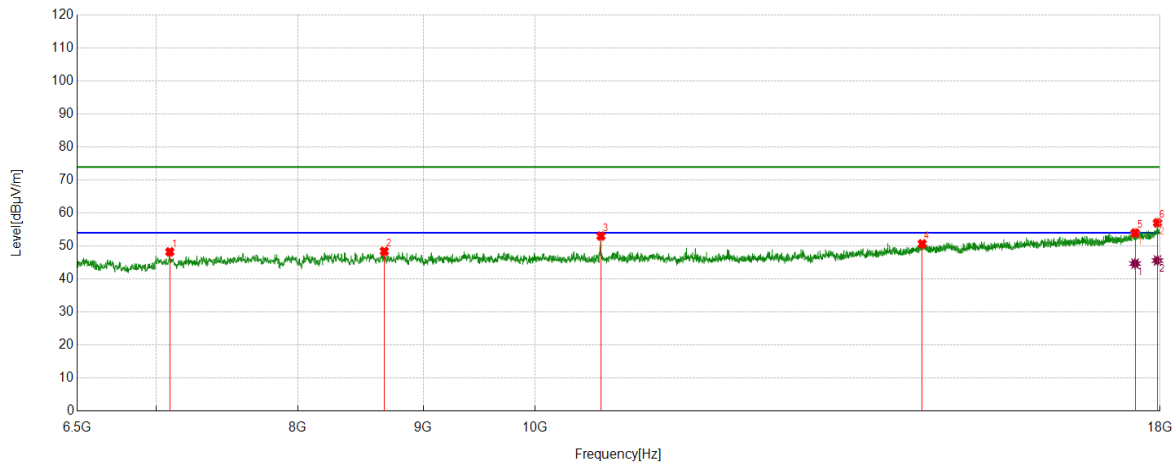

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7092.3487	44.39	3.85	48.24	74.00	-25.76	Horizontal
2	8677.6963	42.32	6.10	48.42	74.00	-25.58	Horizontal
3	10638.7731	46.16	6.87	53.03	74.00	-20.97	Horizontal
4	14392.2320	37.90	12.78	50.68	74.00	-23.32	Horizontal
5	17582.0970	35.98	17.97	53.95	74.00	-20.05	Horizontal
6	17955.9093	37.47	19.58	57.05	74.00	-16.95	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17582.0970	26.71	17.97	44.68	54.00	-9.32	Horizontal
2	17955.9093	26.03	19.58	45.61	54.00	-8.39	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Vertical	PASS

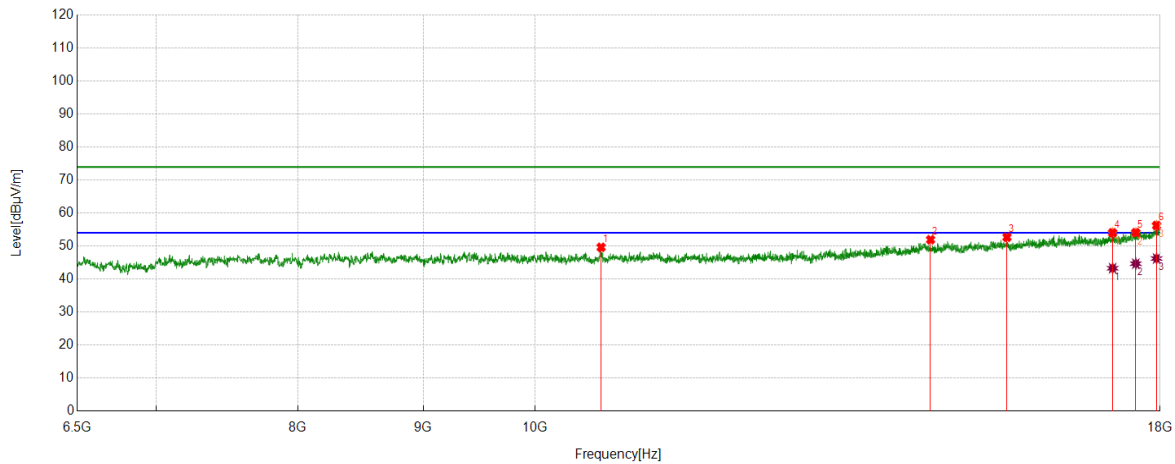

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10640.6901	42.76	6.85	49.61	74.00	-24.39	Vertical
2	14505.3342	39.15	12.77	51.92	74.00	-22.08	Vertical
3	15586.5144	39.00	13.66	52.66	74.00	-21.34	Vertical
4	17214.0357	37.28	16.75	54.03	74.00	-19.97	Vertical
5	17593.5989	36.03	18.04	54.07	74.00	-19.93	Vertical
6	17940.5734	36.79	19.45	56.24	74.00	-17.76	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17214.0357	26.52	16.75	43.27	54.00	-10.73	Vertical
2	17593.5989	26.62	18.04	44.66	54.00	-9.34	Vertical
3	17940.5734	26.77	19.45	46.22	54.00	-7.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Horizontal	PASS

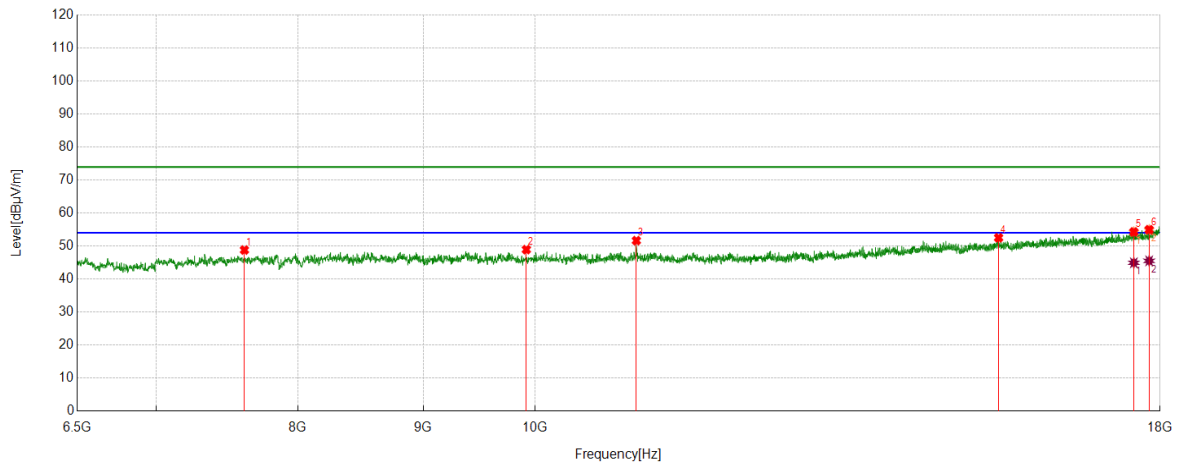

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7608.0180	43.89	4.90	48.79	74.00	-25.21	Horizontal
2	9917.9863	42.33	6.59	48.92	74.00	-25.08	Horizontal
3	10999.1665	44.36	7.28	51.64	74.00	-22.36	Horizontal
4	15463.8273	38.53	13.98	52.51	74.00	-21.49	Horizontal
5	17561.0102	36.50	17.79	54.29	74.00	-19.71	Horizontal
6	17815.9693	36.02	18.93	54.95	74.00	-19.05	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17561.0102	27.13	17.79	44.92	54.00	-9.08	Horizontal
2	17815.9693	26.58	18.93	45.51	54.00	-8.49	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Vertical	PASS

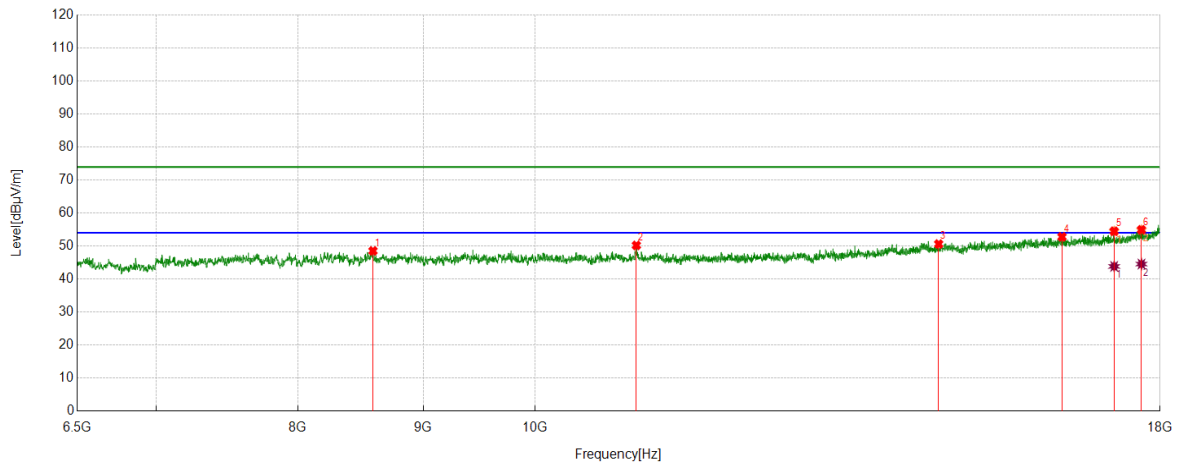

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8585.6809	42.39	6.14	48.53	74.00	-25.47	Vertical
2	10999.1665	42.92	7.28	50.20	74.00	-23.80	Vertical
3	14616.5194	37.81	12.80	50.61	74.00	-23.39	Vertical
4	16414.6524	37.68	15.11	52.79	74.00	-21.21	Vertical
5	17238.9565	37.71	16.78	54.49	74.00	-19.51	Vertical
6	17687.5313	36.76	18.17	54.93	74.00	-19.07	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17238.9565	27.04	16.78	43.82	54.00	-10.18	Vertical
2	17687.5313	26.37	18.17	44.54	54.00	-9.46	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Horizontal	PASS

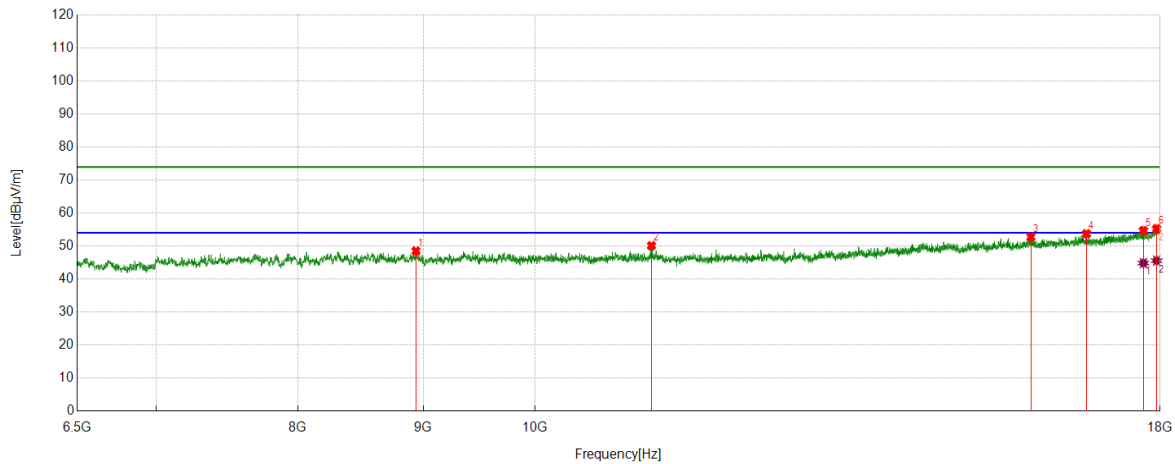

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8940.3234	42.46	6.04	48.50	74.00	-25.50	Horizontal
2	11156.3594	42.83	7.27	50.10	74.00	-23.90	Horizontal
3	15941.1569	38.25	14.51	52.76	74.00	-21.24	Horizontal
4	16796.1327	37.67	16.07	53.74	74.00	-20.26	Horizontal
5	17720.1200	36.19	18.48	54.67	74.00	-19.33	Horizontal
6	17942.4904	35.81	19.46	55.27	74.00	-18.73	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17720.1200	26.35	18.48	44.83	54.00	-9.17	Horizontal
2	17942.4904	26.11	19.46	45.57	54.00	-8.43	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Vertical	PASS

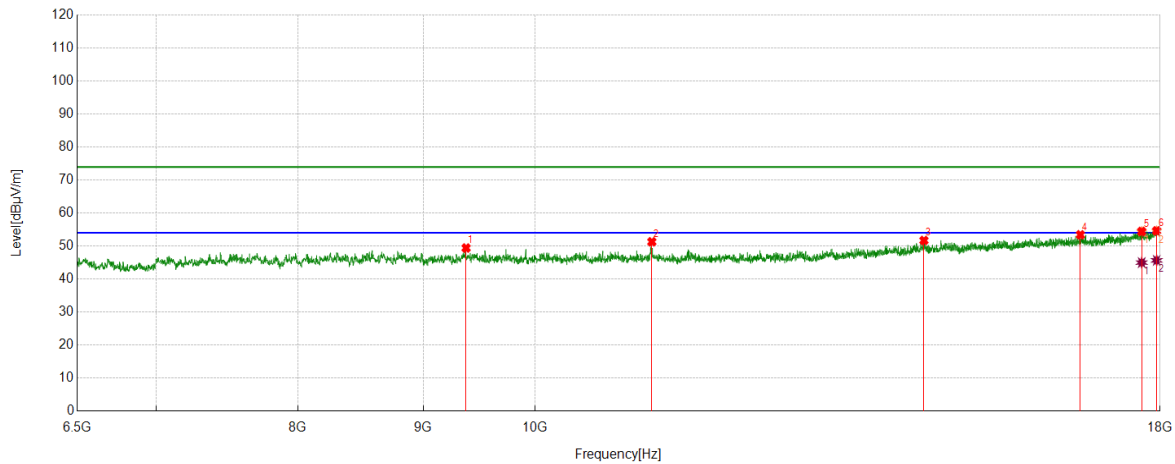

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9371.6453	42.91	6.49	49.40	74.00	-24.60	Vertical
2	11160.1934	44.08	7.21	51.29	74.00	-22.71	Vertical
3	14415.2359	38.78	12.91	51.69	74.00	-22.31	Vertical
4	16700.2834	37.35	16.06	53.41	74.00	-20.59	Vertical
5	17691.3652	36.23	18.19	54.42	74.00	-19.58	Vertical
6	17942.4904	35.16	19.46	54.62	74.00	-19.38	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17691.3652	26.79	18.19	44.98	54.00	-9.02	Vertical
2	17942.4904	26.19	19.46	45.65	54.00	-8.35	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Horizontal	PASS

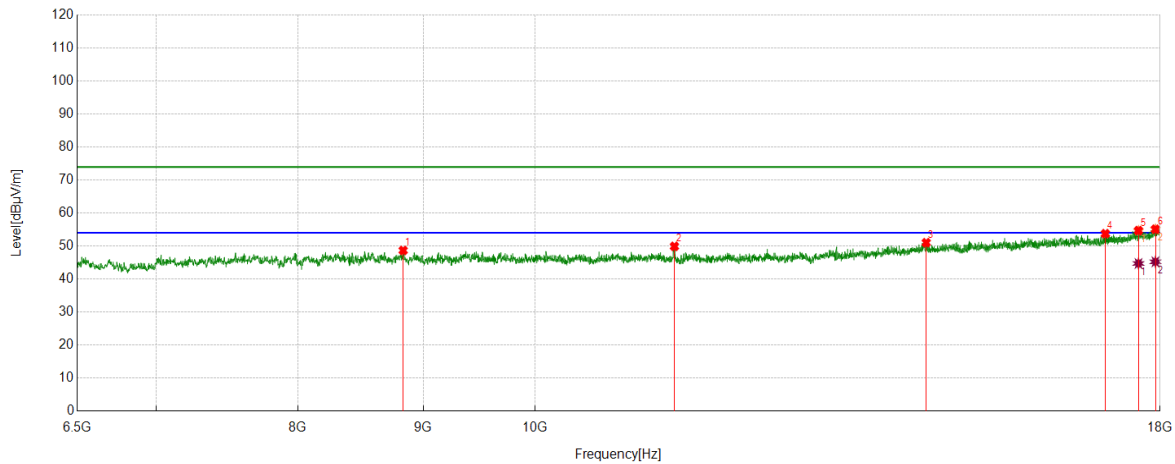

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8832.9722	42.37	6.30	48.67	74.00	-25.33	Horizontal
2	11399.8166	42.50	7.41	49.91	74.00	-24.09	Horizontal
3	14445.9077	38.11	12.91	51.02	74.00	-22.98	Horizontal
4	17097.0995	37.26	16.49	53.75	74.00	-20.25	Horizontal
5	17637.6896	36.68	18.01	54.69	74.00	-19.31	Horizontal
6	17921.4036	35.74	19.36	55.10	74.00	-18.90	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17637.6896	26.70	18.01	44.71	54.00	-9.29	Horizontal
2	17921.4036	25.86	19.36	45.22	54.00	-8.78	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Vertical	PASS

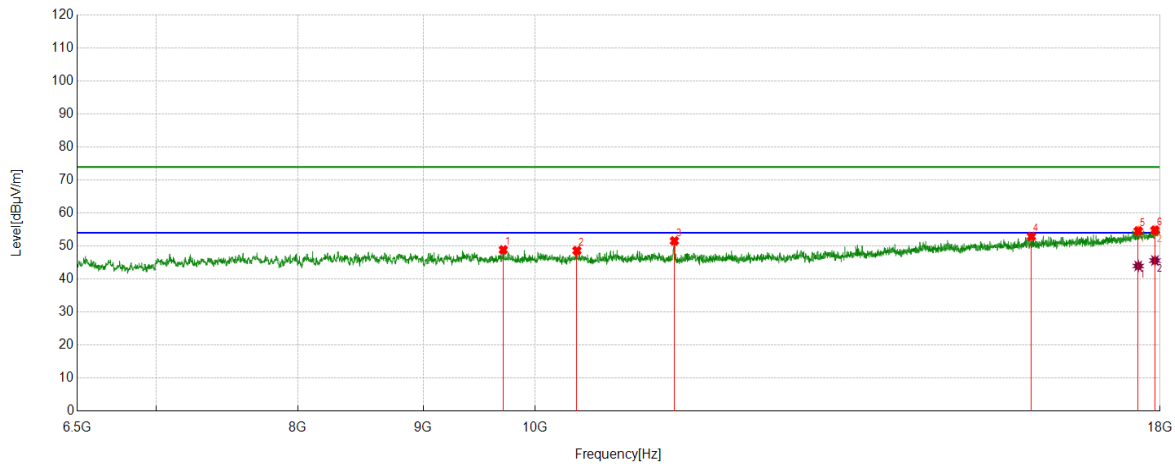

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9705.2009	42.25	6.59	48.84	74.00	-25.16	Vertical
2	10401.0668	41.89	6.72	48.61	74.00	-25.39	Vertical
3	11399.8166	44.15	7.41	51.56	74.00	-22.44	Vertical
4	15948.8248	38.46	14.45	52.91	74.00	-21.09	Vertical
5	17633.8556	36.55	18.03	54.58	74.00	-19.42	Vertical
6	17913.7356	35.53	19.29	54.82	74.00	-19.18	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17633.8556	25.93	18.03	43.96	54.00	-10.04	Vertical
2	17913.7356	26.32	19.29	45.61	54.00	-8.39	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Horizontal	PASS

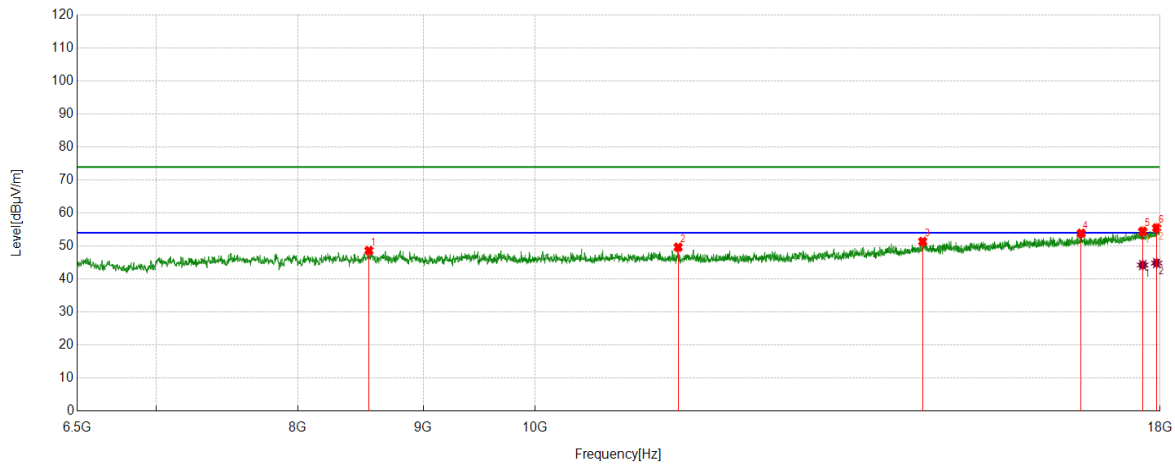

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8553.0922	42.30	6.33	48.63	74.00	-25.37	Horizontal
2	11440.0733	42.27	7.37	49.64	74.00	-24.36	Horizontal
3	14397.9830	38.64	12.74	51.38	74.00	-22.62	Horizontal
4	16713.7023	37.93	15.95	53.88	74.00	-20.12	Horizontal
5	17708.6181	36.12	18.35	54.47	74.00	-19.53	Horizontal
6	17942.4904	36.05	19.46	55.51	74.00	-18.49	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17708.6181	25.89	18.35	44.24	54.00	-9.76	Horizontal
2	17942.4904	25.38	19.46	44.84	54.00	-9.16	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Vertical	PASS

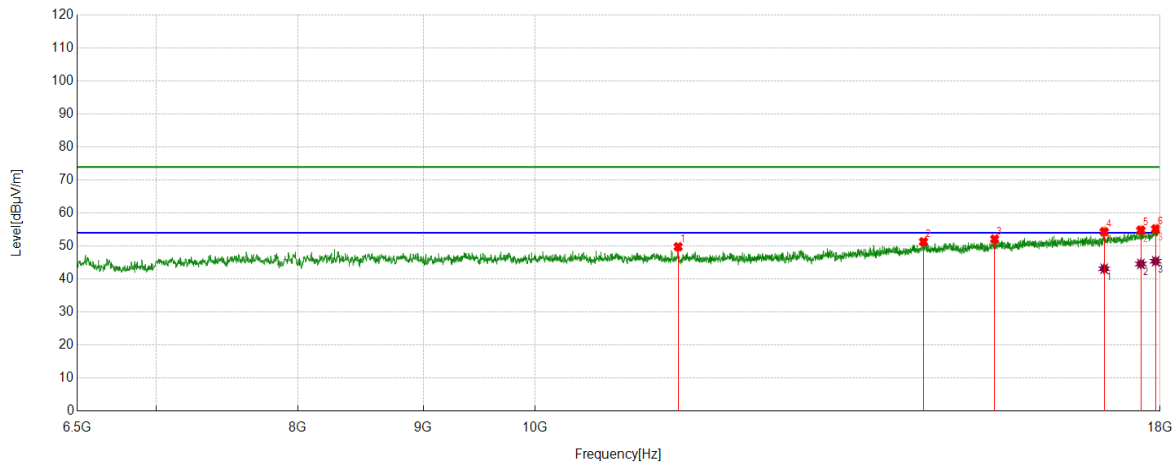

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	11440.0733	42.41	7.37	49.78	74.00	-24.22	Vertical
2	14409.4849	38.42	12.88	51.30	74.00	-22.70	Vertical
3	15406.3177	38.43	13.68	52.11	74.00	-21.89	Vertical
4	17077.9297	38.00	16.35	54.35	74.00	-19.65	Vertical
5	17677.9463	36.72	18.10	54.82	74.00	-19.18	Vertical
6	17925.2375	35.83	19.37	55.20	74.00	-18.80	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17077.9297	26.77	16.35	43.12	54.00	-10.88	Vertical
2	17677.9463	26.47	18.10	44.57	54.00	-9.43	Vertical
3	17925.2375	26.03	19.37	45.40	54.00	-8.60	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Horizontal	PASS

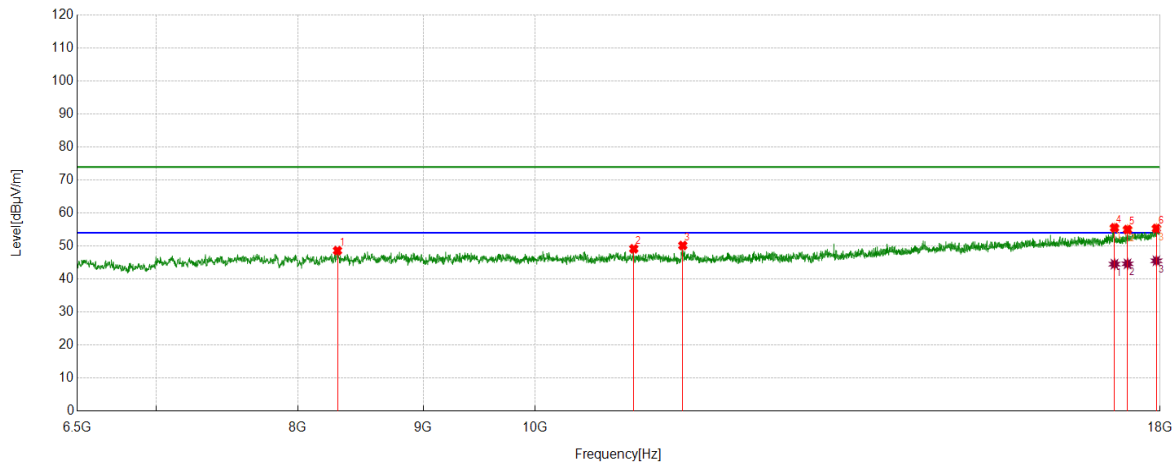

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8303.8840	42.31	6.30	48.61	74.00	-25.39	Horizontal
2	10972.3287	41.82	7.34	49.16	74.00	-24.84	Horizontal
3	11489.9150	42.63	7.53	50.16	74.00	-23.84	Horizontal
4	17244.7075	38.76	16.77	55.53	74.00	-18.47	Horizontal
5	17457.4929	37.38	17.62	55.00	74.00	-19.00	Horizontal
6	17938.6564	35.89	19.44	55.33	74.00	-18.67	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17244.7075	27.74	16.77	44.51	54.00	-9.49	Horizontal
2	17457.4929	26.99	17.62	44.61	54.00	-9.39	Horizontal
3	17938.6564	26.09	19.44	45.53	54.00	-8.47	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Vertical	PASS

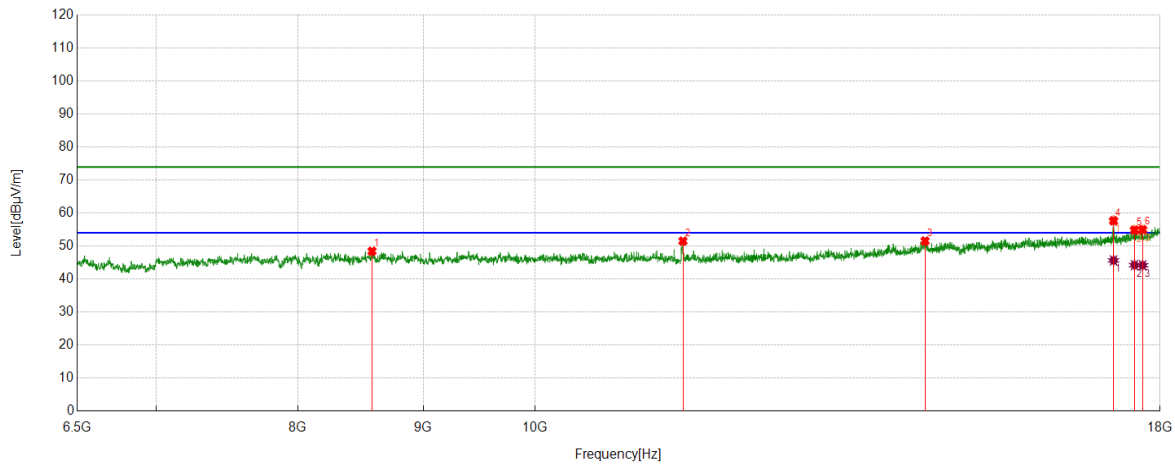

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8578.0130	42.03	6.40	48.43	74.00	-25.57	Vertical
2	11491.8320	43.98	7.52	51.50	74.00	-22.50	Vertical
3	14430.5718	38.65	12.87	51.52	74.00	-22.48	Vertical
4	17229.3716	40.96	16.72	57.68	74.00	-16.32	Vertical
5	17572.5121	36.92	17.92	54.84	74.00	-19.16	Vertical
6	17706.7011	36.66	18.33	54.99	74.00	-19.01	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17229.3716	28.91	16.72	45.63	54.00	-8.37	Vertical
2	17572.5121	26.30	17.92	44.22	54.00	-9.78	Vertical
3	17706.7011	25.83	18.33	44.16	54.00	-9.84	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Horizontal	PASS

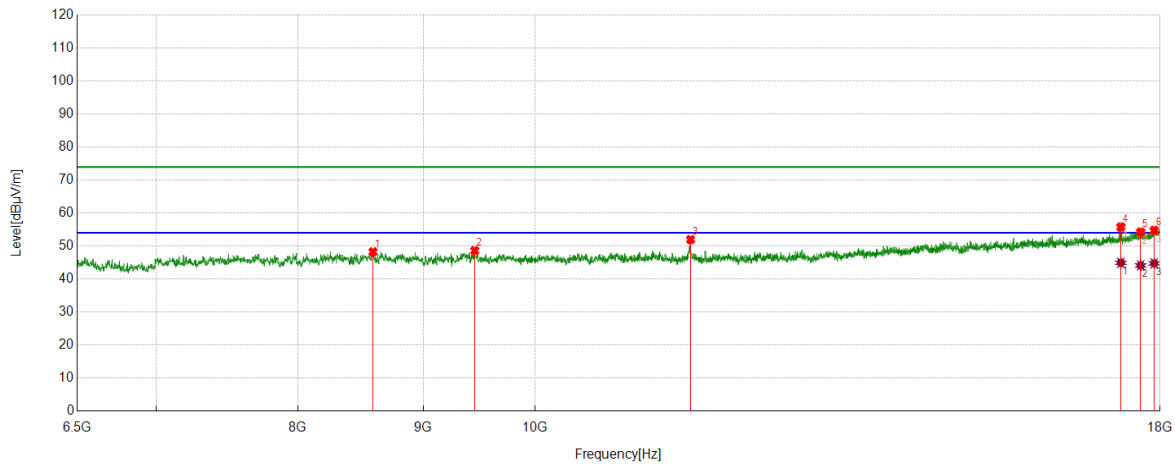

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8585.6809	42.10	6.14	48.24	74.00	-25.76	Horizontal
2	9448.3247	42.04	6.60	48.64	74.00	-25.36	Horizontal
3	11574.2624	44.30	7.67	51.97	74.00	-22.03	Horizontal
4	17348.2247	38.63	17.15	55.78	74.00	-18.22	Horizontal
5	17674.1124	36.15	18.08	54.23	74.00	-19.77	Horizontal
6	17900.3167	35.54	19.18	54.72	74.00	-19.28	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17348.2247	27.77	17.15	44.92	54.00	-9.08	Horizontal
2	17674.1124	26.03	18.08	44.11	54.00	-9.89	Horizontal
3	17900.3167	25.56	19.18	44.74	54.00	-9.26	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Vertical	PASS

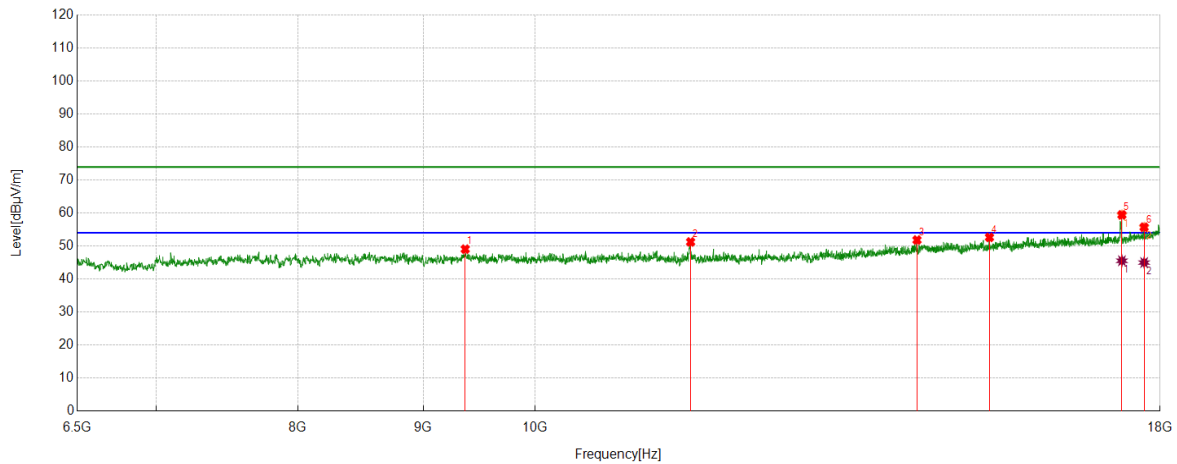

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9363.9773	42.59	6.47	49.06	74.00	-24.94	Vertical
2	11574.2624	43.57	7.67	51.24	74.00	-22.76	Vertical
3	14321.3036	39.49	12.34	51.83	74.00	-22.17	Vertical
4	15331.5553	39.02	13.61	52.63	74.00	-21.37	Vertical
5	17365.4776	42.15	17.31	59.46	74.00	-14.54	Vertical
6	17731.6219	37.19	18.53	55.72	74.00	-18.28	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17365.4776	28.23	17.31	45.54	54.00	-8.46	Vertical
2	17731.6219	26.46	18.53	44.99	54.00	-9.01	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Horizontal	PASS

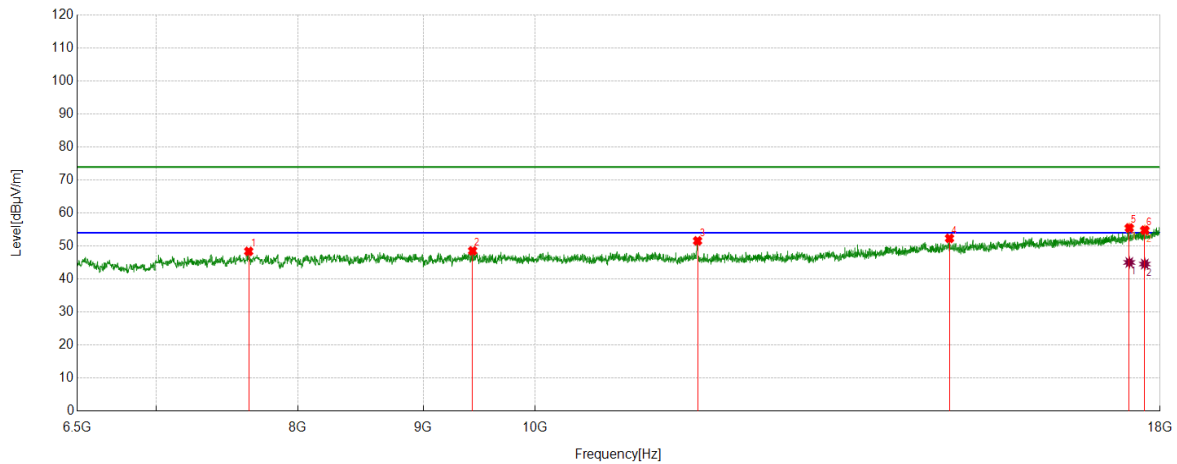

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7638.6898	43.22	5.17	48.39	74.00	-25.61	Horizontal
2	9429.1549	41.95	6.60	48.55	74.00	-25.45	Horizontal
3	11650.9418	43.83	7.74	51.57	74.00	-22.43	Horizontal
4	14766.0443	39.40	12.94	52.34	74.00	-21.66	Horizontal
5	17486.2477	37.84	17.65	55.49	74.00	-18.51	Horizontal
6	17743.1239	36.25	18.57	54.82	74.00	-19.18	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17486.2477	27.38	17.65	45.03	54.00	-8.97	Horizontal
2	17743.1239	25.97	18.57	44.54	54.00	-9.46	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Vertical	PASS

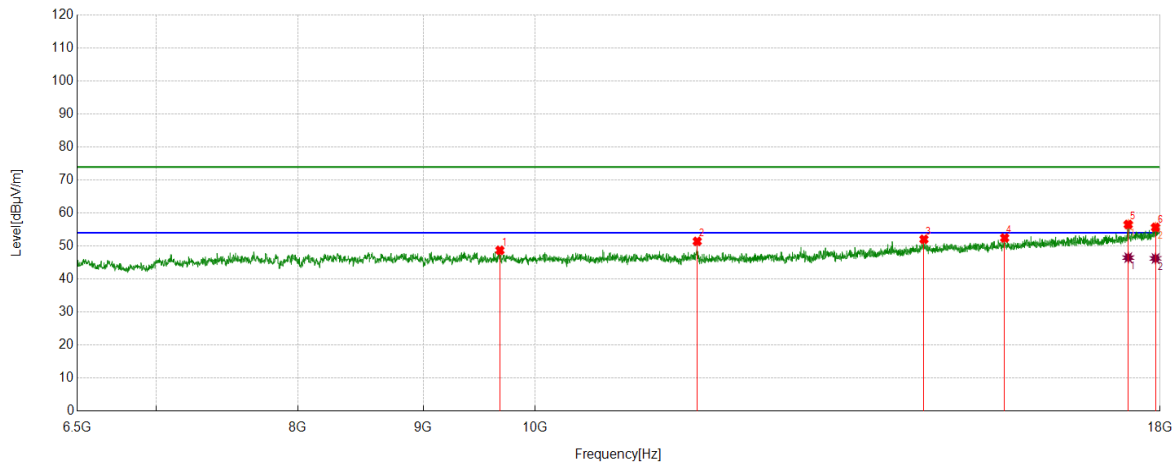

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9674.5291	42.21	6.49	48.70	74.00	-25.30	Vertical
2	11647.1079	43.71	7.71	51.42	74.00	-22.58	Vertical
3	14415.2359	39.13	12.91	52.04	74.00	-21.96	Vertical
4	15552.0087	38.73	13.73	52.46	74.00	-21.54	Vertical
5	17468.9948	38.91	17.63	56.54	74.00	-17.46	Vertical
6	17923.3206	36.32	19.36	55.68	74.00	-18.32	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17468.9948	28.85	17.63	46.48	54.00	-7.52	Vertical
2	17923.3206	26.87	19.36	46.23	54.00	-7.77	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Horizontal	PASS

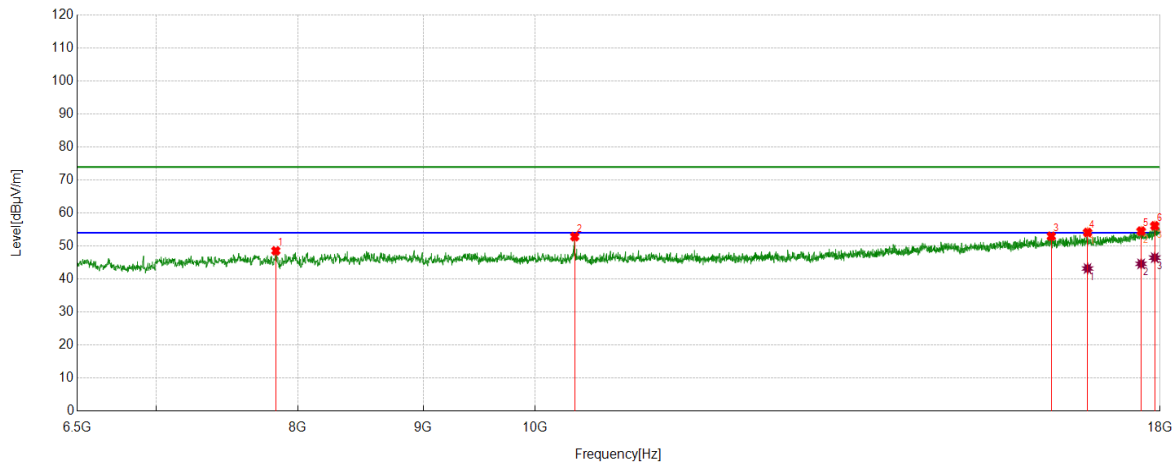

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7836.1394	43.29	5.26	48.55	74.00	-25.45	Horizontal
2	10379.9800	46.26	6.59	52.85	74.00	-21.15	Horizontal
3	16249.7916	37.55	15.43	52.98	74.00	-21.02	Horizontal
4	16813.3856	37.85	16.26	54.11	74.00	-19.89	Horizontal
5	17681.7803	36.41	18.12	54.53	74.00	-19.47	Horizontal
6	17909.9016	36.88	19.25	56.13	74.00	-17.87	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	16813.3856	26.93	16.26	43.19	54.00	-10.81	Horizontal
2	17681.7803	26.48	18.12	44.60	54.00	-9.40	Horizontal
3	17909.9016	27.23	19.25	46.48	54.00	-7.52	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Vertical	PASS

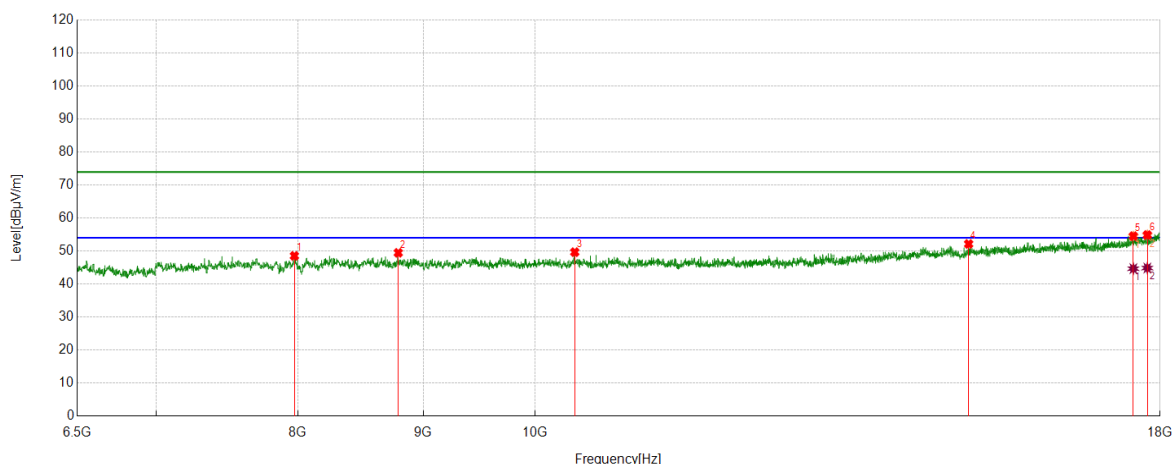

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7974.1624	43.16	5.38	48.54	74.00	-25.46	Vertical
2	8792.7155	43.23	6.23	49.46	74.00	-24.54	Vertical
3	10379.9800	43.08	6.59	49.67	74.00	-24.33	Vertical
4	15034.4224	39.15	13.00	52.15	74.00	-21.85	Vertical
5	17553.3422	36.78	17.75	54.53	74.00	-19.47	Vertical
6	17785.2976	36.13	18.74	54.87	74.00	-19.13	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17553.3422	26.91	17.75	44.66	54.00	-9.34	Vertical
2	17785.2976	26.11	18.74	44.85	54.00	-9.15	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Horizontal	PASS

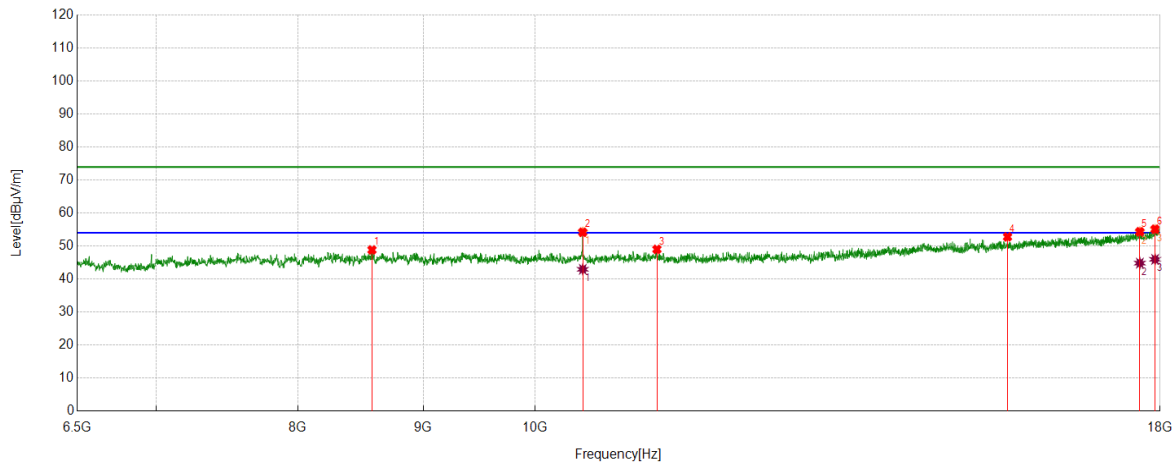

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8578.0130	42.42	6.40	48.82	74.00	-25.18	Horizontal
2	10458.5764	47.48	6.71	54.19	74.00	-19.81	Horizontal
3	11213.8690	41.68	7.32	49.00	74.00	-25.00	Horizontal
4	15594.1824	39.12	13.65	52.77	74.00	-21.23	Horizontal
5	17660.6934	36.27	18.07	54.34	74.00	-19.66	Horizontal
6	17915.6526	35.79	19.32	55.11	74.00	-18.89	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10458.5764	36.23	6.71	42.94	54.00	-11.06	Horizontal
2	17660.6934	26.74	18.07	44.81	54.00	-9.19	Horizontal
3	17915.6526	26.64	19.32	45.96	54.00	-8.04	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Vertical	PASS

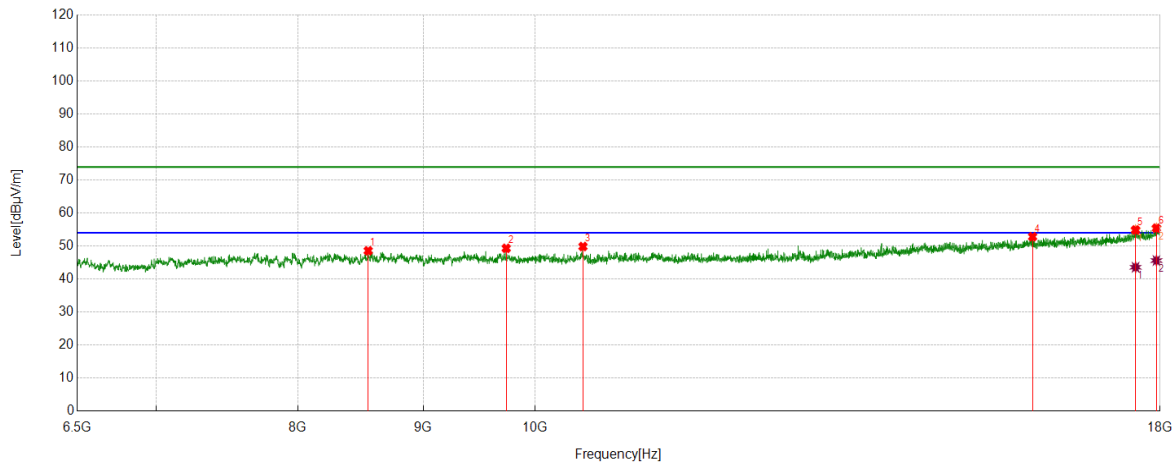

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8547.3412	42.17	6.40	48.57	74.00	-25.43	Vertical
2	9732.0387	42.75	6.56	49.31	74.00	-24.69	Vertical
3	10460.4934	43.13	6.72	49.85	74.00	-24.15	Vertical
4	15966.0777	38.33	14.50	52.83	74.00	-21.17	Vertical
5	17589.7650	36.83	18.04	54.87	74.00	-19.13	Vertical
6	17938.6564	35.98	19.44	55.42	74.00	-18.58	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17589.7650	25.53	18.04	43.57	54.00	-10.43	Vertical
2	17938.6564	26.17	19.44	45.61	54.00	-8.39	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Horizontal	PASS

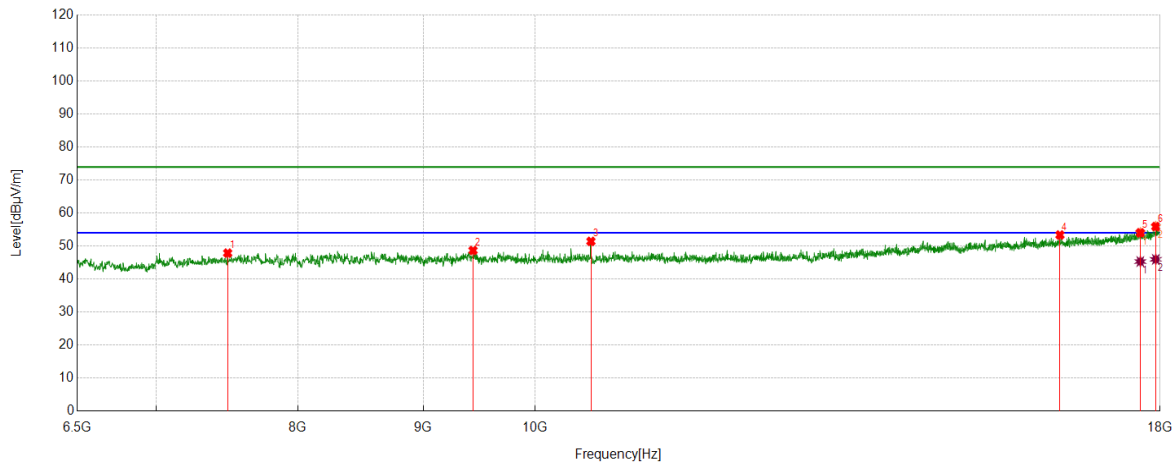

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7489.1649	43.31	4.55	47.86	74.00	-26.14	Horizontal
2	9432.9888	42.06	6.60	48.66	74.00	-25.34	Horizontal
3	10539.0898	44.59	6.83	51.42	74.00	-22.58	Horizontal
4	16382.0637	38.28	15.07	53.35	74.00	-20.65	Horizontal
5	17668.3614	35.95	18.07	54.02	74.00	-19.98	Horizontal
6	17927.1545	36.54	19.37	55.91	74.00	-18.09	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17668.3614	27.23	18.07	45.30	54.00	-8.70	Horizontal
2	17927.1545	26.59	19.37	45.96	54.00	-8.04	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Vertical	PASS

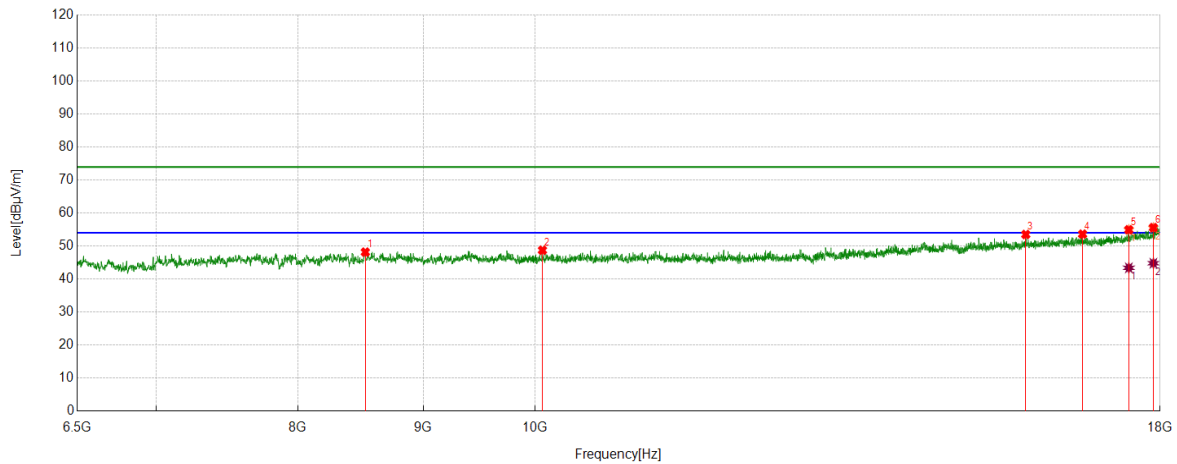

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8524.3374	41.84	6.32	48.16	74.00	-25.84	Vertical
2	10069.4282	42.16	6.57	48.73	74.00	-25.27	Vertical
3	15864.4774	38.84	14.66	53.50	74.00	-20.50	Vertical
4	16734.7891	37.57	16.04	53.61	74.00	-20.39	Vertical
5	17478.5798	37.28	17.65	54.93	74.00	-19.07	Vertical
6	17886.8978	36.31	19.27	55.58	74.00	-18.42	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17478.5798	25.74	17.65	43.39	54.00	-10.61	Vertical
2	17886.8978	25.52	19.27	44.79	54.00	-9.21	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Horizontal	PASS

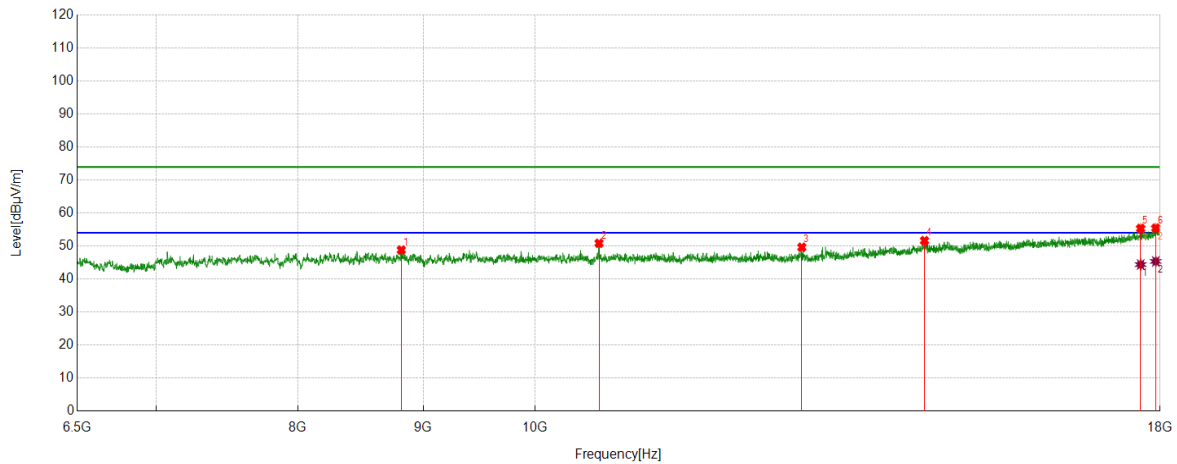

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8817.6363	42.52	6.26	48.78	74.00	-25.22	Horizontal
2	10619.6033	43.99	6.85	50.84	74.00	-23.16	Horizontal
3	12850.9752	40.27	9.35	49.62	74.00	-24.38	Horizontal
4	14422.9038	38.73	12.90	51.63	74.00	-22.37	Horizontal
5	17674.1124	37.27	18.08	55.35	74.00	-18.65	Horizontal
6	17927.1545	36.06	19.37	55.43	74.00	-18.57	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17674.1124	26.30	18.08	44.38	54.00	-9.62	Horizontal
2	17927.1545	25.96	19.37	45.33	54.00	-8.67	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Vertical	PASS

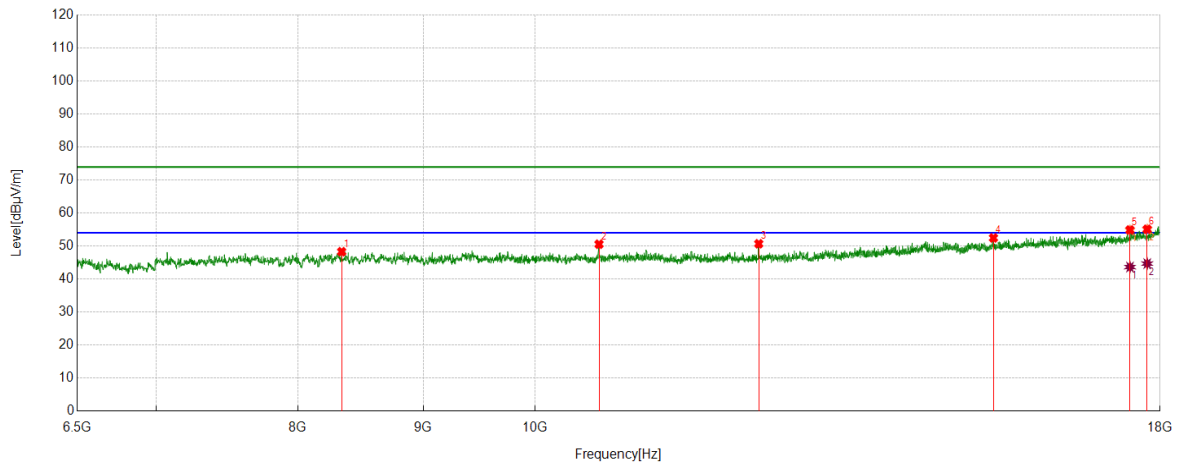

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8336.4727	42.33	5.95	48.28	74.00	-25.72	Vertical
2	10619.6033	43.71	6.85	50.56	74.00	-23.44	Vertical
3	12341.0568	42.09	8.60	50.69	74.00	-23.31	Vertical
4	15389.0648	38.86	13.60	52.46	74.00	-21.54	Vertical
5	17497.7496	37.25	17.63	54.88	74.00	-19.12	Vertical
6	17783.3806	36.34	18.76	55.10	74.00	-18.90	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17497.7496	26.00	17.63	43.63	54.00	-10.37	Vertical
2	17783.3806	25.91	18.76	44.67	54.00	-9.33	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Horizontal	PASS

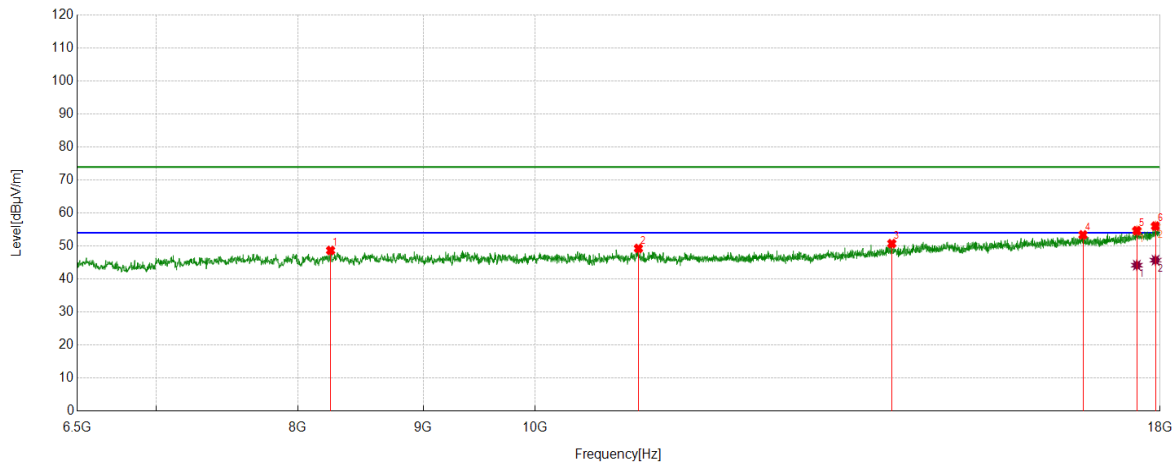

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8250.2084	42.34	6.32	48.66	74.00	-25.34	Horizontal
2	11020.2534	42.10	7.18	49.28	74.00	-24.72	Horizontal
3	13985.8310	39.12	11.62	50.74	74.00	-23.26	Horizontal
4	16740.5401	37.45	15.94	53.39	74.00	-20.61	Horizontal
5	17610.8518	36.60	18.06	54.66	74.00	-19.34	Horizontal
6	17923.3206	36.70	19.36	56.06	74.00	-17.94	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17610.8518	26.13	18.06	44.19	54.00	-9.81	Horizontal
2	17923.3206	26.35	19.36	45.71	54.00	-8.29	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Vertical	PASS

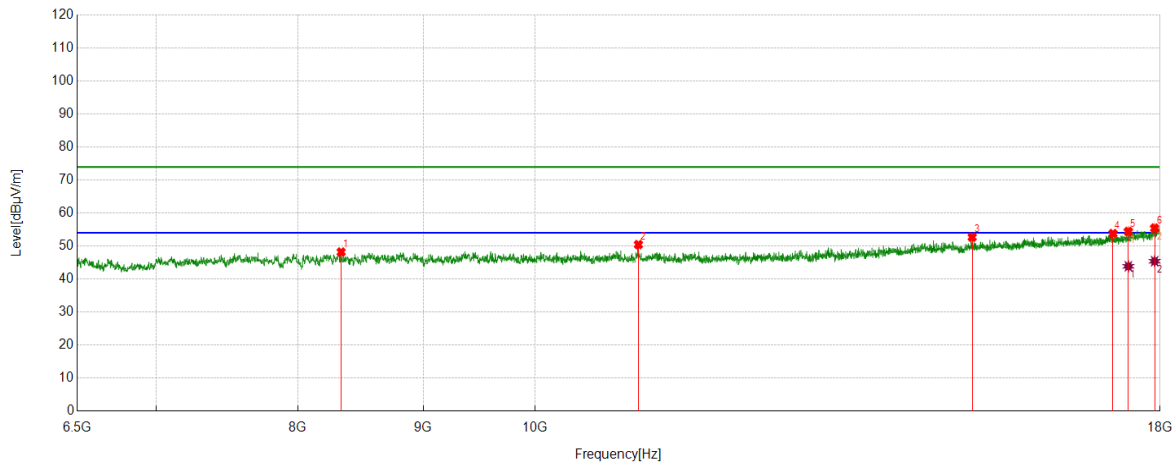

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8332.6388	42.16	6.02	48.18	74.00	-25.82	Vertical
2	11020.2534	43.26	7.18	50.44	74.00	-23.56	Vertical
3	15084.2640	39.51	13.16	52.67	74.00	-21.33	Vertical
4	17219.7866	37.08	16.70	53.78	74.00	-20.22	Vertical
5	17470.9118	36.77	17.63	54.40	74.00	-19.60	Vertical
6	17907.9847	36.20	19.23	55.43	74.00	-18.57	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17470.9118	26.22	17.63	43.85	54.00	-10.15	Vertical
2	17907.9847	26.16	19.23	45.39	54.00	-8.61	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Horizontal	PASS

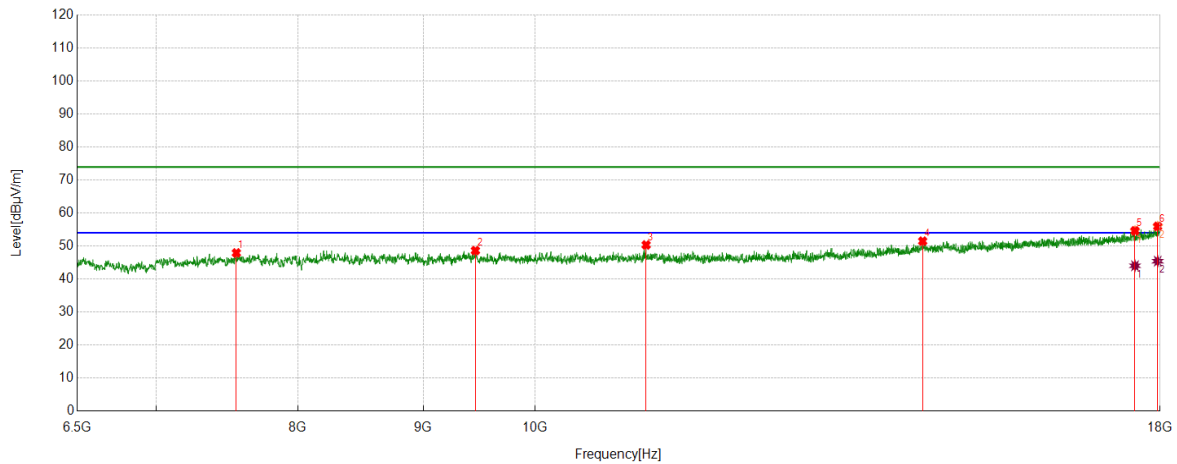

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7550.5084	43.42	4.49	47.91	74.00	-26.09	Horizontal
2	9454.0757	42.04	6.58	48.62	74.00	-25.38	Horizontal
3	11100.7668	42.98	7.35	50.33	74.00	-23.67	Horizontal
4	14397.9830	38.74	12.74	51.48	74.00	-22.52	Horizontal
5	17580.1800	36.67	17.95	54.62	74.00	-19.38	Horizontal
6	17959.7433	36.34	19.63	55.97	74.00	-18.03	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1800	26.07	17.95	44.02	54.00	-9.98	Horizontal
2	17959.7433	25.78	19.63	45.41	54.00	-8.59	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Vertical	PASS

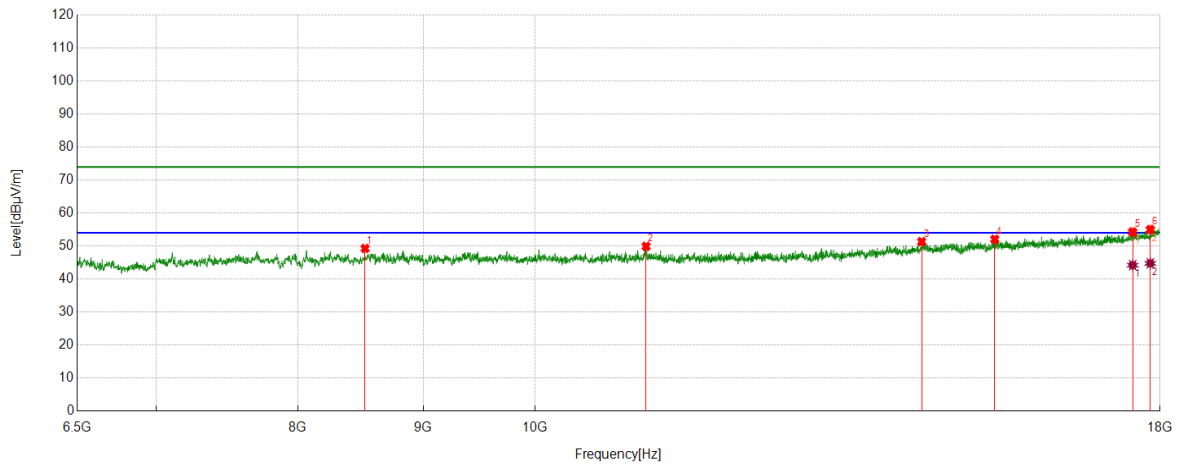

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8522.4204	42.86	6.41	49.27	74.00	-24.73	Vertical
2	11100.7668	42.56	7.35	49.91	74.00	-24.09	Vertical
3	14384.5641	38.59	12.75	51.34	74.00	-22.66	Vertical
4	15408.2347	38.37	13.69	52.06	74.00	-21.94	Vertical
5	17541.8403	36.54	17.71	54.25	74.00	-19.75	Vertical
6	17835.1392	35.91	19.10	55.01	74.00	-18.99	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17541.8403	26.49	17.71	44.20	54.00	-9.80	Vertical
2	17835.1392	25.66	19.10	44.76	54.00	-9.24	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Horizontal	PASS

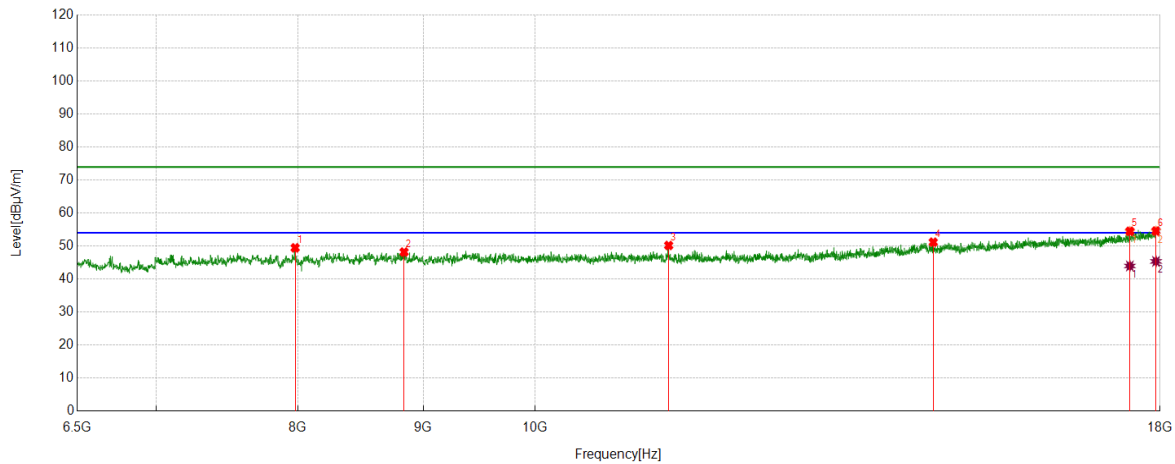

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7979.9133	44.09	5.36	49.45	74.00	-24.55	Horizontal
2	8840.6401	41.81	6.37	48.18	74.00	-25.82	Horizontal
3	11338.4731	42.86	7.32	50.18	74.00	-23.82	Horizontal
4	14541.7570	38.48	12.69	51.17	74.00	-22.83	Horizontal
5	17495.8326	36.84	17.64	54.48	74.00	-19.52	Horizontal
6	17930.9885	35.19	19.37	54.56	74.00	-19.44	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17495.8326	26.32	17.64	43.96	54.00	-10.04	Horizontal
2	17930.9885	25.98	19.37	45.35	54.00	-8.65	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Vertical	PASS

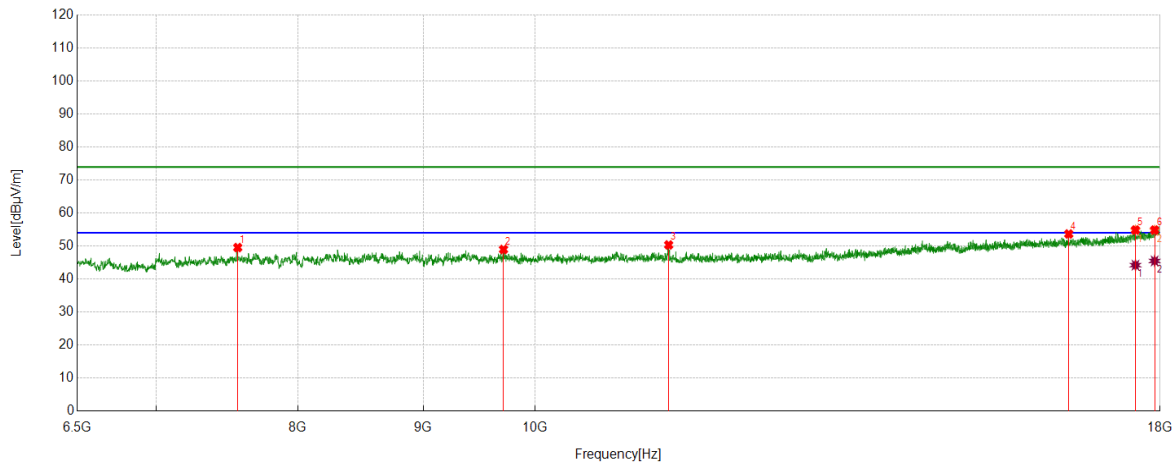

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7560.0933	45.03	4.51	49.54	74.00	-24.46	Vertical
2	9707.1179	42.38	6.58	48.96	74.00	-25.04	Vertical
3	11338.4731	43.02	7.32	50.34	74.00	-23.66	Vertical
4	16518.1697	37.75	15.91	53.66	74.00	-20.34	Vertical
5	17587.8480	36.84	18.02	54.86	74.00	-19.14	Vertical
6	17907.9847	35.62	19.23	54.85	74.00	-19.15	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17587.8480	26.19	18.02	44.21	54.00	-9.79	Vertical
2	17907.9847	26.25	19.23	45.48	54.00	-8.52	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Horizontal	PASS

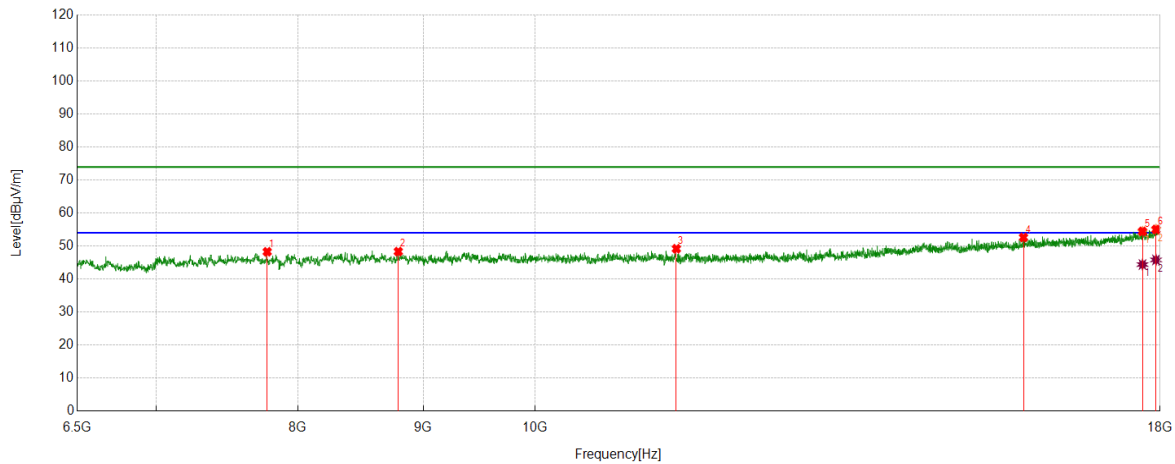

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7772.8788	43.32	4.94	48.26	74.00	-25.74	Horizontal
2	8792.7155	42.10	6.23	48.33	74.00	-25.67	Horizontal
3	11420.9035	41.80	7.38	49.18	74.00	-24.82	Horizontal
4	15829.9717	38.16	14.45	52.61	74.00	-21.39	Horizontal
5	17704.7841	36.13	18.31	54.44	74.00	-19.56	Horizontal
6	17930.9885	35.67	19.37	55.04	74.00	-18.96	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17704.7841	26.08	18.31	44.39	54.00	-9.61	Horizontal
2	17930.9885	26.43	19.37	45.80	54.00	-8.20	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Vertical	PASS

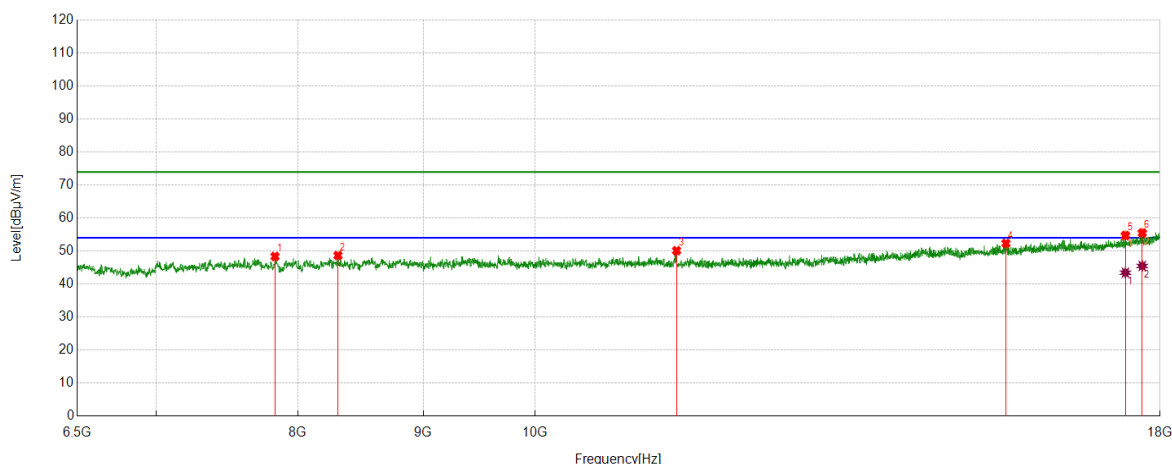

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7830.3884	43.22	5.14	48.36	74.00	-25.64	Vertical
2	8307.7180	42.32	6.33	48.65	74.00	-25.35	Vertical
3	11422.8205	42.71	7.41	50.12	74.00	-23.88	Vertical
4	15571.1785	38.70	13.63	52.33	74.00	-21.67	Vertical
5	17422.9872	37.31	17.42	54.73	74.00	-19.27	Vertical
6	17700.9502	37.20	18.28	55.48	74.00	-18.52	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17422.9872	26.01	17.42	43.43	54.00	-10.57	Vertical
2	17700.9502	27.20	18.28	45.48	54.00	-8.52	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Horizontal	PASS

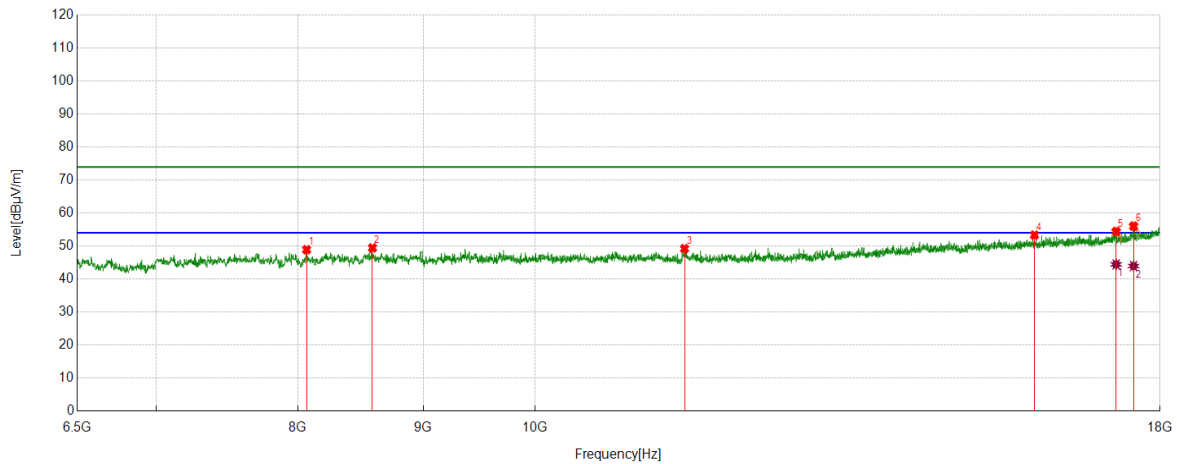

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8066.1777	43.31	5.57	48.88	74.00	-25.12	Horizontal
2	8581.8470	43.08	6.35	49.43	74.00	-24.57	Horizontal
3	11509.0848	41.62	7.59	49.21	74.00	-24.79	Horizontal
4	15994.8325	38.82	14.51	53.33	74.00	-20.67	Horizontal
5	17271.5453	37.52	16.89	54.41	74.00	-19.59	Horizontal
6	17557.1762	38.26	17.77	56.03	74.00	-17.97	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17271.5453	27.55	16.89	44.44	54.00	-9.56	Horizontal
2	17557.1762	26.18	17.77	43.95	54.00	-10.05	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Vertical	PASS

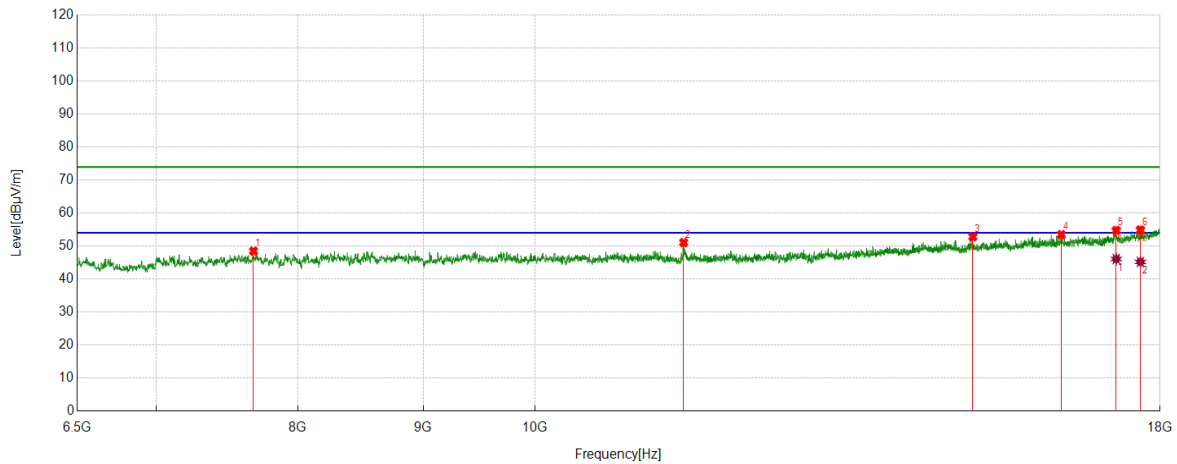

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7673.1955	43.23	5.25	48.48	74.00	-25.52	Vertical
2	11499.4999	43.57	7.49	51.06	74.00	-22.94	Vertical
3	15093.8490	39.61	13.20	52.81	74.00	-21.19	Vertical
4	16403.1505	38.42	15.04	53.46	74.00	-20.54	Vertical
5	17273.4622	37.81	16.89	54.70	74.00	-19.30	Vertical
6	17670.2784	36.80	18.07	54.87	74.00	-19.13	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17273.4622	29.19	16.89	46.08	54.00	-7.92	Vertical
2	17670.2784	27.12	18.07	45.19	54.00	-8.81	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Horizontal	PASS

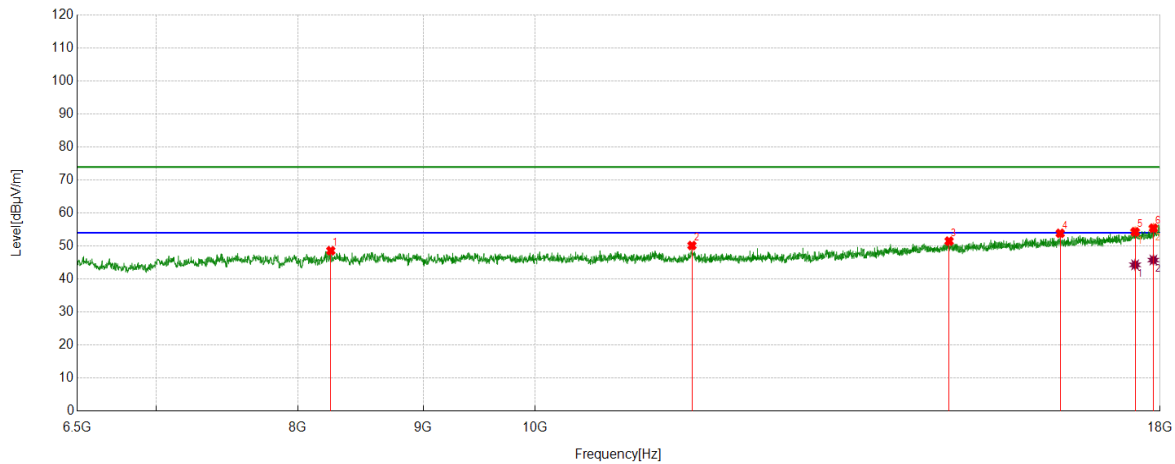

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8252.1254	42.31	6.27	48.58	74.00	-25.42	Horizontal
2	11589.5983	42.40	7.75	50.15	74.00	-23.85	Horizontal
3	14760.2934	38.53	12.96	51.49	74.00	-22.51	Horizontal
4	16385.8976	38.84	15.02	53.86	74.00	-20.14	Horizontal
5	17582.0970	36.36	17.97	54.33	74.00	-19.67	Horizontal
6	17886.8978	36.15	19.27	55.42	74.00	-18.58	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17582.0970	26.33	17.97	44.30	54.00	-9.70	Horizontal
2	17886.8978	26.49	19.27	45.76	54.00	-8.24	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS

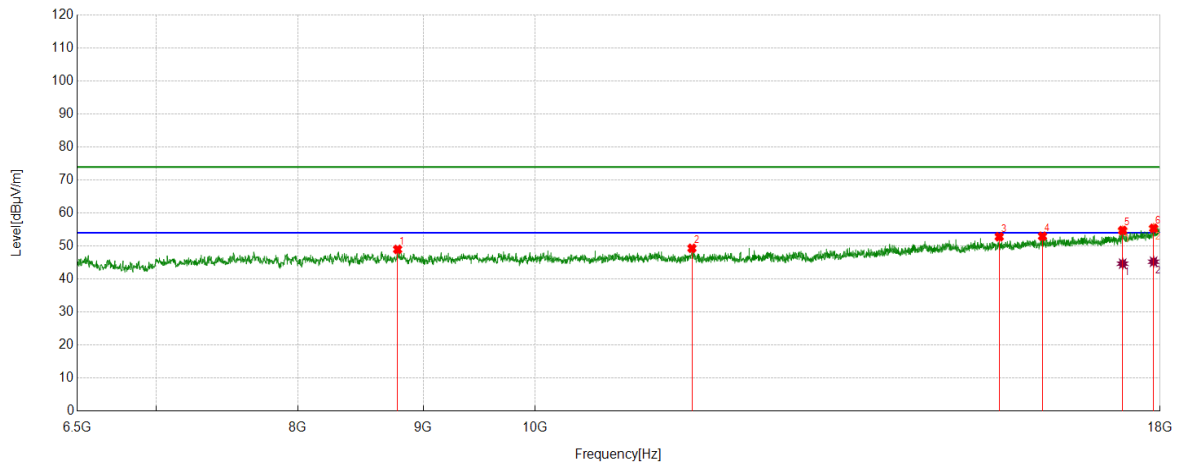

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8786.9645	42.77	6.21	48.98	74.00	-25.02	Vertical
2	11589.5983	41.57	7.75	49.32	74.00	-24.68	Vertical
3	15473.4122	38.84	13.98	52.82	74.00	-21.18	Vertical
4	16115.6026	38.10	14.88	52.98	74.00	-21.02	Vertical
5	17376.9795	37.39	17.34	54.73	74.00	-19.27	Vertical
6	17890.7318	36.08	19.30	55.38	74.00	-18.62	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17376.9795	27.31	17.34	44.65	54.00	-9.35	Vertical
2	17890.7318	25.94	19.30	45.24	54.00	-8.76	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS

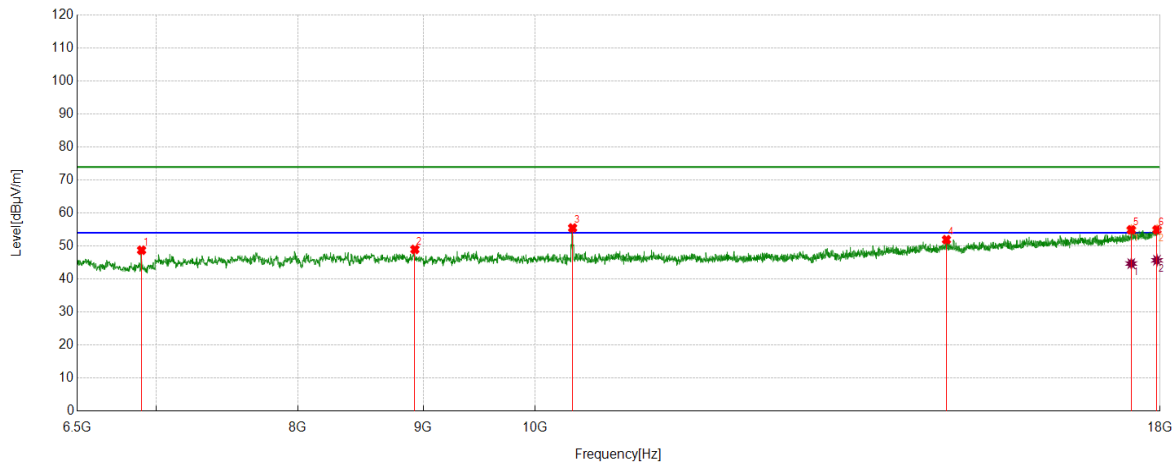

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6906.4011	45.20	3.54	48.74	74.00	-25.26	Horizontal
2	8930.7385	42.89	6.08	48.97	74.00	-25.03	Horizontal
3	10358.8931	48.78	6.70	55.48	74.00	-18.52	Horizontal
4	14723.8706	39.12	12.81	51.93	74.00	-22.07	Horizontal
5	17518.8365	37.30	17.62	54.92	74.00	-19.08	Horizontal
6	17948.2414	35.47	19.48	54.95	74.00	-19.05	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17518.8365	27.06	17.62	44.68	54.00	-9.32	Horizontal
2	17948.2414	26.20	19.48	45.68	54.00	-8.32	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS

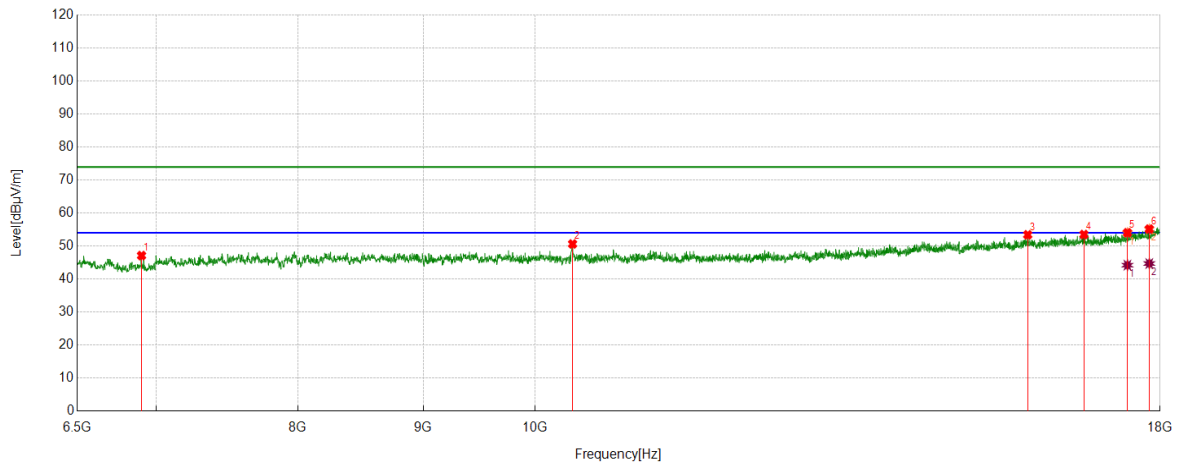

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6906.4011	43.57	3.54	47.11	74.00	-26.89	Vertical
2	10358.8931	43.93	6.70	50.63	74.00	-23.37	Vertical
3	15893.2322	38.83	14.58	53.41	74.00	-20.59	Vertical
4	16755.8760	37.30	16.20	53.50	74.00	-20.50	Vertical
5	17455.5759	36.41	17.62	54.03	74.00	-19.97	Vertical
6	17817.8863	36.22	18.92	55.14	74.00	-18.86	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17455.5759	26.58	17.62	44.20	54.00	-9.80	Vertical
2	17817.8863	25.77	18.92	44.69	54.00	-9.31	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS

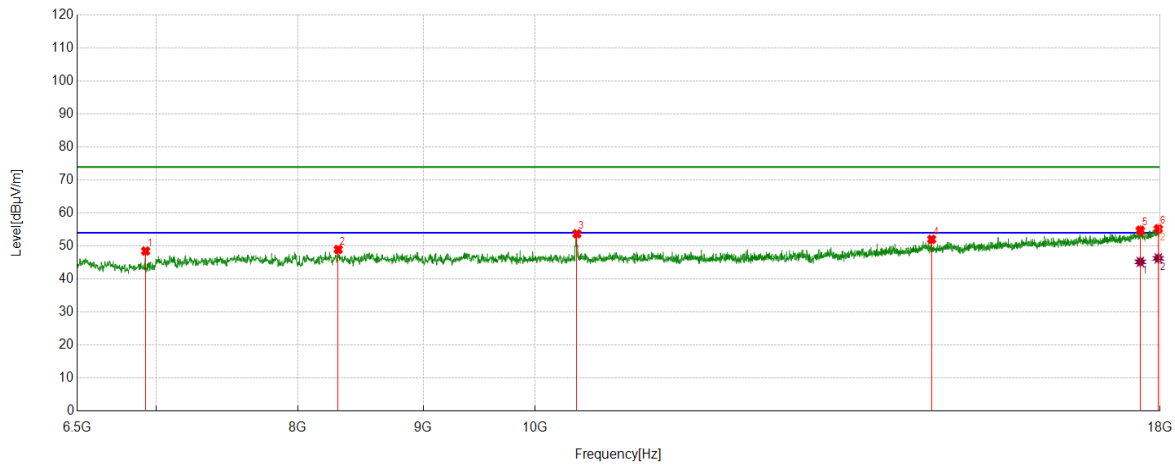

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6933.2389	44.94	3.54	48.48	74.00	-25.52	Horizontal
2	8309.6349	42.63	6.34	48.97	74.00	-25.03	Horizontal
3	10401.0668	46.99	6.72	53.71	74.00	-20.29	Horizontal
4	14520.6701	39.36	12.67	52.03	74.00	-21.97	Horizontal
5	17668.3614	36.72	18.07	54.79	74.00	-19.21	Horizontal
6	17969.3282	35.60	19.63	55.23	74.00	-18.77	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17668.3614	27.13	18.07	45.20	54.00	-8.80	Horizontal
2	17969.3282	26.63	19.63	46.26	54.00	-7.74	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS

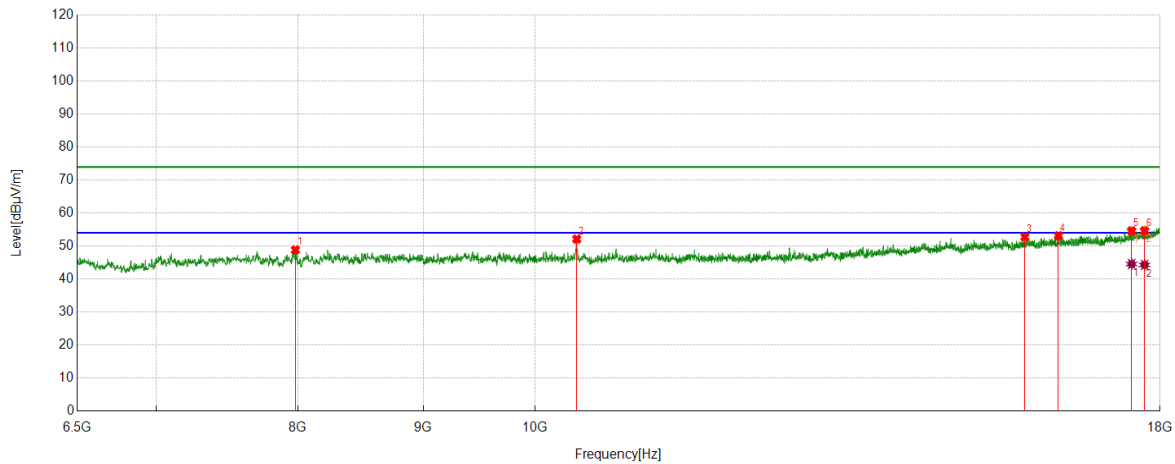

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7981.8303	43.41	5.41	48.82	74.00	-25.18	Vertical
2	10399.1499	45.39	6.72	52.11	74.00	-21.89	Vertical
3	15851.0585	37.89	14.83	52.72	74.00	-21.28	Vertical
4	16359.0598	38.11	15.02	53.13	74.00	-20.87	Vertical
5	17524.5874	36.99	17.59	54.58	74.00	-19.42	Vertical
6	17739.2899	36.08	18.54	54.62	74.00	-19.38	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17524.5874	26.96	17.59	44.55	54.00	-9.45	Vertical
2	17739.2899	25.73	18.54	44.27	54.00	-9.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS

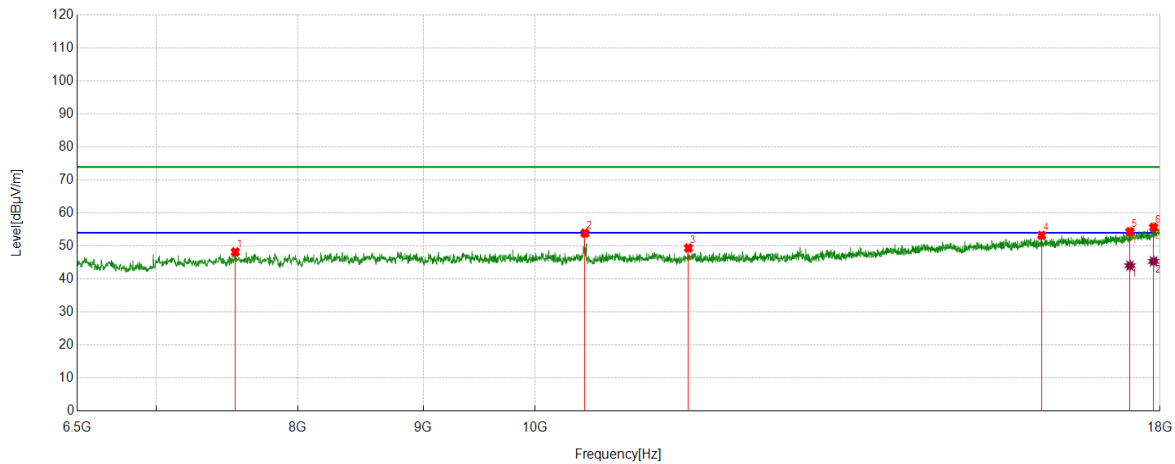

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7542.8405	43.63	4.56	48.19	74.00	-25.81	Horizontal
2	10479.6633	47.12	6.78	53.90	74.00	-20.10	Horizontal
3	11551.2585	41.86	7.54	49.40	74.00	-24.60	Horizontal
4	16102.1837	38.56	14.70	53.26	74.00	-20.74	Horizontal
5	17497.7496	36.70	17.63	54.33	74.00	-19.67	Horizontal
6	17890.7318	36.39	19.30	55.69	74.00	-18.31	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17497.7496	26.42	17.63	44.05	54.00	-9.95	Horizontal
2	17890.7318	26.05	19.30	45.35	54.00	-8.65	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS

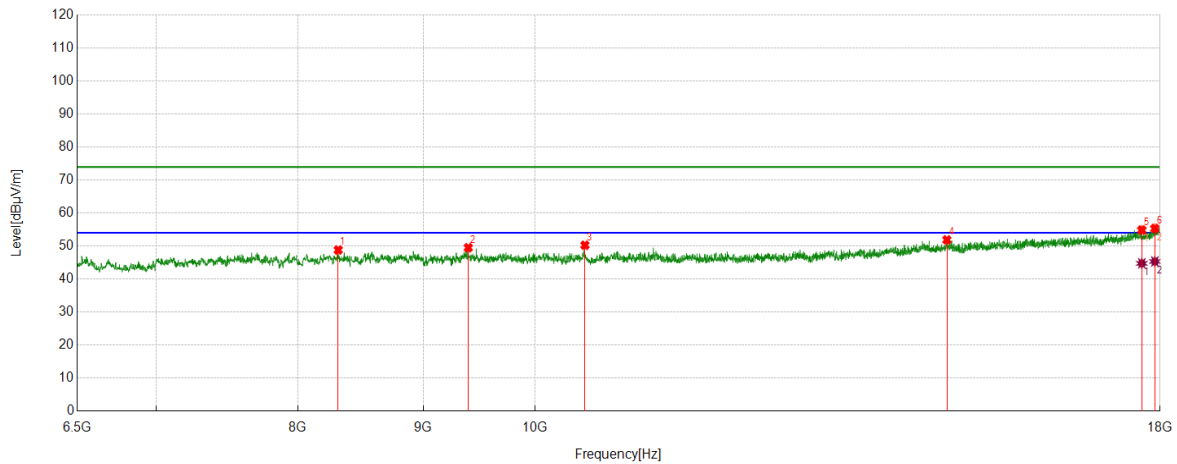

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8309.6349	42.46	6.34	48.80	74.00	-25.20	Vertical
2	9390.8151	42.95	6.55	49.50	74.00	-24.50	Vertical
3	10479.6633	43.47	6.78	50.25	74.00	-23.75	Vertical
4	14729.6216	39.09	12.79	51.88	74.00	-22.12	Vertical
5	17693.2822	36.66	18.21	54.87	74.00	-19.13	Vertical
6	17911.8186	36.07	19.27	55.34	74.00	-18.66	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17693.2822	26.54	18.21	44.75	54.00	-9.25	Vertical
2	17911.8186	26.04	19.27	45.31	54.00	-8.69	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS

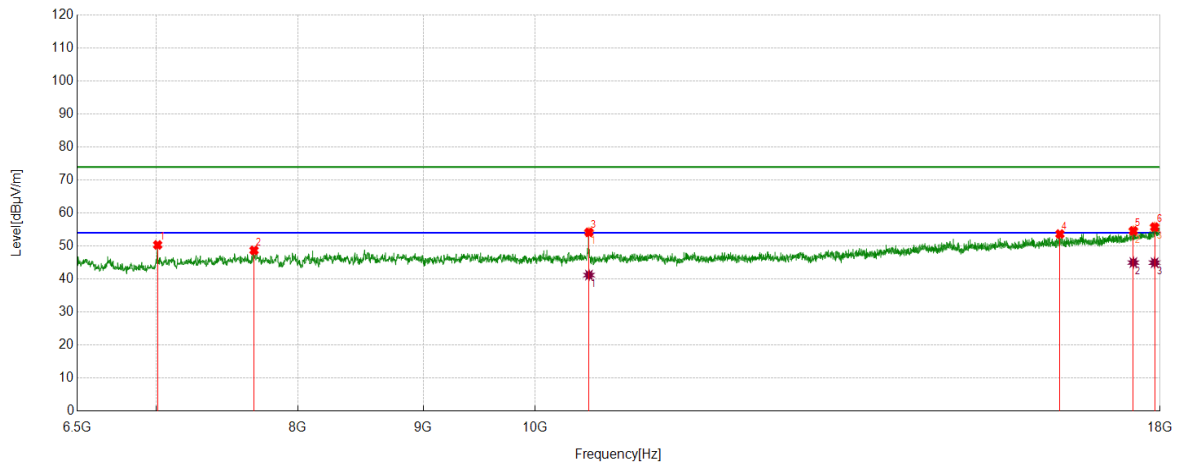

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	46.77	3.57	50.34	74.00	-23.66	Horizontal
2	7677.0295	43.39	5.30	48.69	74.00	-25.31	Horizontal
3	10519.9200	47.22	6.94	54.16	74.00	-19.84	Horizontal
4	16382.0637	38.58	15.07	53.65	74.00	-20.35	Horizontal
5	17553.3422	36.86	17.75	54.61	74.00	-19.39	Horizontal
6	17907.9847	36.53	19.23	55.76	74.00	-18.24	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10519.9200	34.25	6.94	41.19	54.00	-12.81	Horizontal
2	17553.3422	27.24	17.75	44.99	54.00	-9.01	Horizontal
3	17907.9847	25.72	19.23	44.95	54.00	-9.05	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS

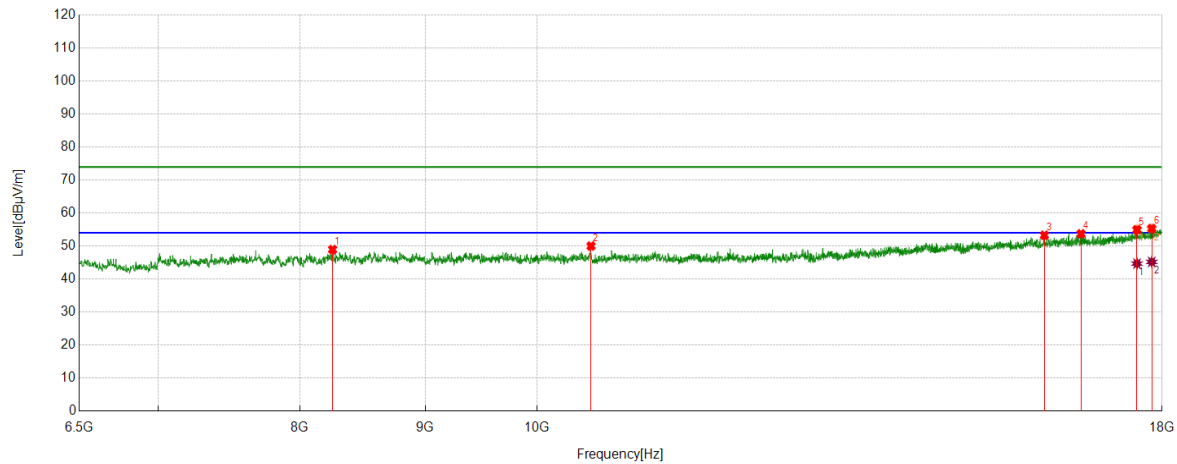

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8250.2084	42.62	6.32	48.94	74.00	-25.06	Vertical
2	10519.9200	43.06	6.94	50.00	74.00	-24.00	Vertical
3	16113.6856	38.39	14.88	53.27	74.00	-20.73	Vertical
4	16679.1965	38.05	15.66	53.71	74.00	-20.29	Vertical
5	17580.1800	37.00	17.95	54.95	74.00	-19.05	Vertical
6	17825.5543	36.30	19.03	55.33	74.00	-18.67	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1800	26.72	17.95	44.67	54.00	-9.33	Vertical
2	17825.5543	26.16	19.03	45.19	54.00	-8.81	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS

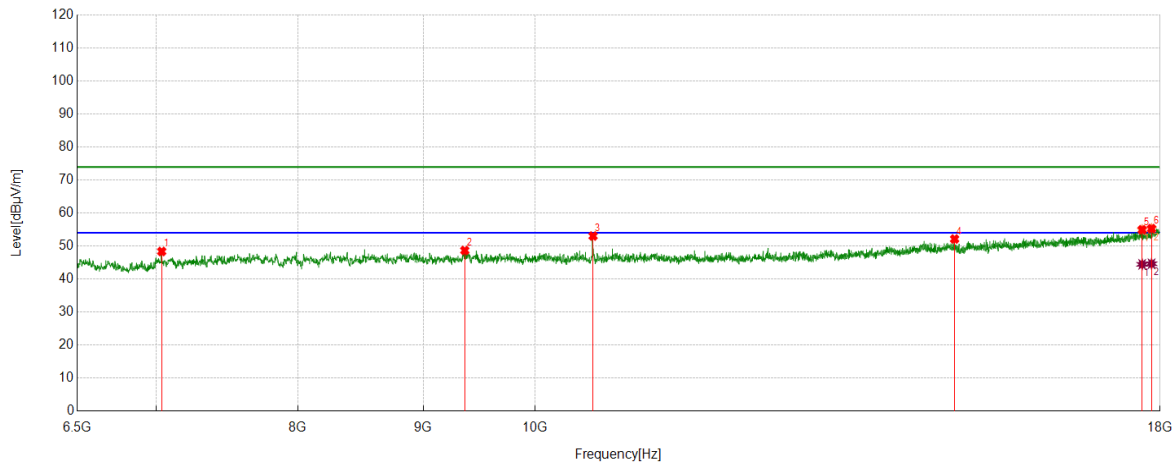

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7038.6731	44.56	3.80	48.36	74.00	-25.64	Horizontal
2	9360.1434	42.22	6.44	48.66	74.00	-25.34	Horizontal
3	10560.1767	46.24	6.80	53.04	74.00	-20.96	Horizontal
4	14836.9728	39.27	12.86	52.13	74.00	-21.87	Horizontal
5	17699.0332	36.68	18.26	54.94	74.00	-19.06	Horizontal
6	17856.2260	36.06	19.22	55.28	74.00	-18.72	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17699.0332	26.19	18.26	44.45	54.00	-9.55	Horizontal
2	17856.2260	25.41	19.22	44.63	54.00	-9.37	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS

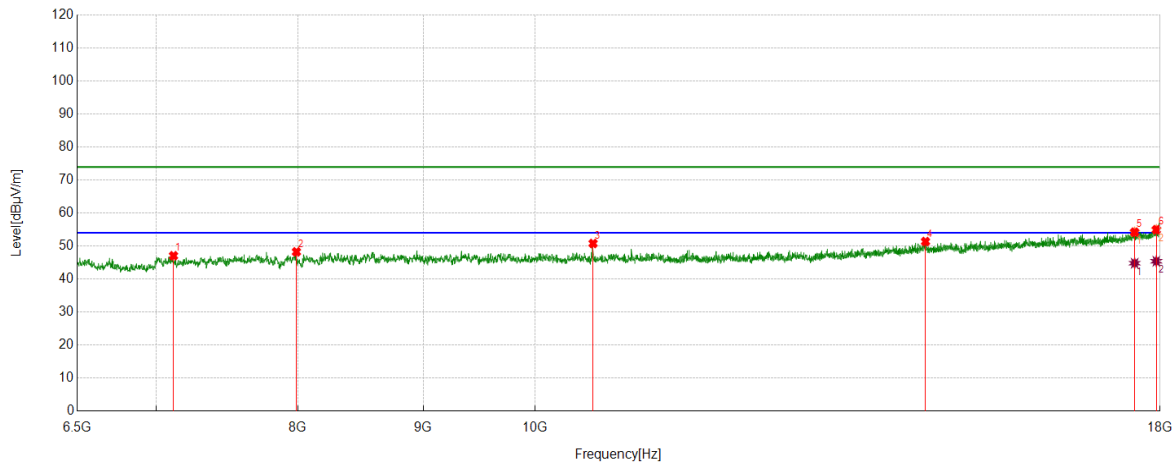

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7117.2695	43.09	3.96	47.05	74.00	-26.95	Vertical
2	7989.4982	42.64	5.60	48.24	74.00	-25.76	Vertical
3	10560.1767	43.98	6.80	50.78	74.00	-23.22	Vertical
4	14436.3227	38.49	12.87	51.36	74.00	-22.64	Vertical
5	17574.4291	36.29	17.92	54.21	74.00	-19.79	Vertical
6	17936.7395	35.54	19.42	54.96	74.00	-19.04	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17574.4291	26.87	17.92	44.79	54.00	-9.21	Vertical
2	17936.7395	25.97	19.42	45.39	54.00	-8.61	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS

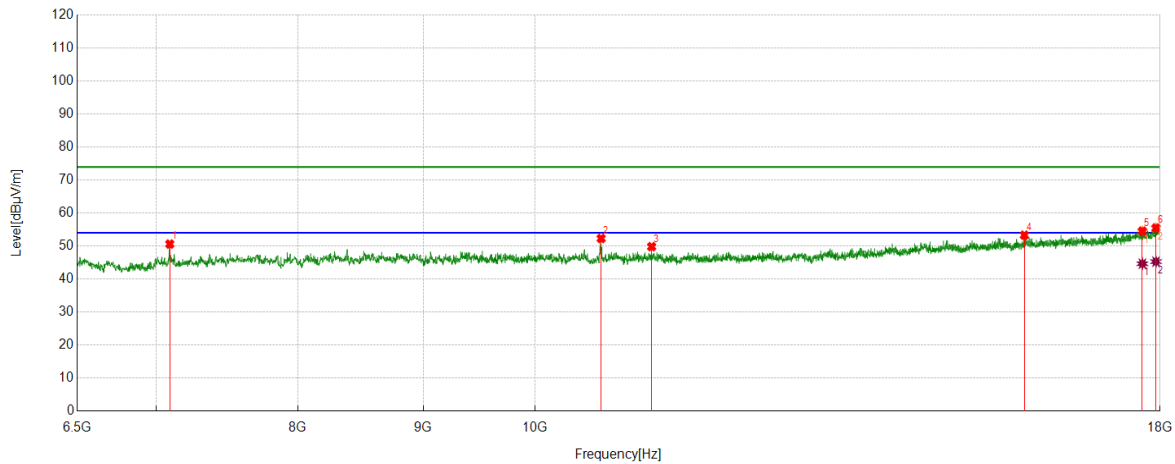

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7092.3487	46.76	3.85	50.61	74.00	-23.39	Horizontal
2	10640.6901	45.45	6.85	52.30	74.00	-21.70	Horizontal
3	11158.2764	42.57	7.24	49.81	74.00	-24.19	Horizontal
4	15843.3906	38.66	14.64	53.30	74.00	-20.70	Horizontal
5	17702.8671	36.22	18.30	54.52	74.00	-19.48	Horizontal
6	17930.9885	36.11	19.37	55.48	74.00	-18.52	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17702.8671	26.34	18.30	44.64	54.00	-9.36	Horizontal
2	17930.9885	25.90	19.37	45.27	54.00	-8.73	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS

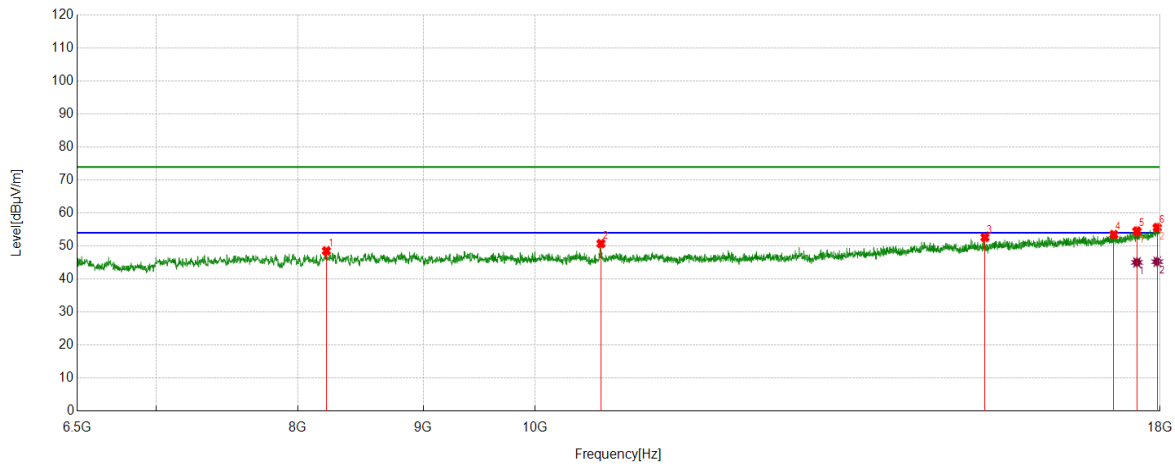

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8217.6196	42.45	6.08	48.53	74.00	-25.47	Vertical
2	10638.7731	43.89	6.87	50.76	74.00	-23.24	Vertical
3	15266.3777	39.17	13.44	52.61	74.00	-21.39	Vertical
4	17233.2055	36.74	16.74	53.48	74.00	-20.52	Vertical
5	17612.7688	36.46	18.06	54.52	74.00	-19.48	Vertical
6	17952.0753	36.09	19.52	55.61	74.00	-18.39	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17612.7688	26.98	18.06	45.04	54.00	-8.96	Vertical
2	17952.0753	25.73	19.52	45.25	54.00	-8.75	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS

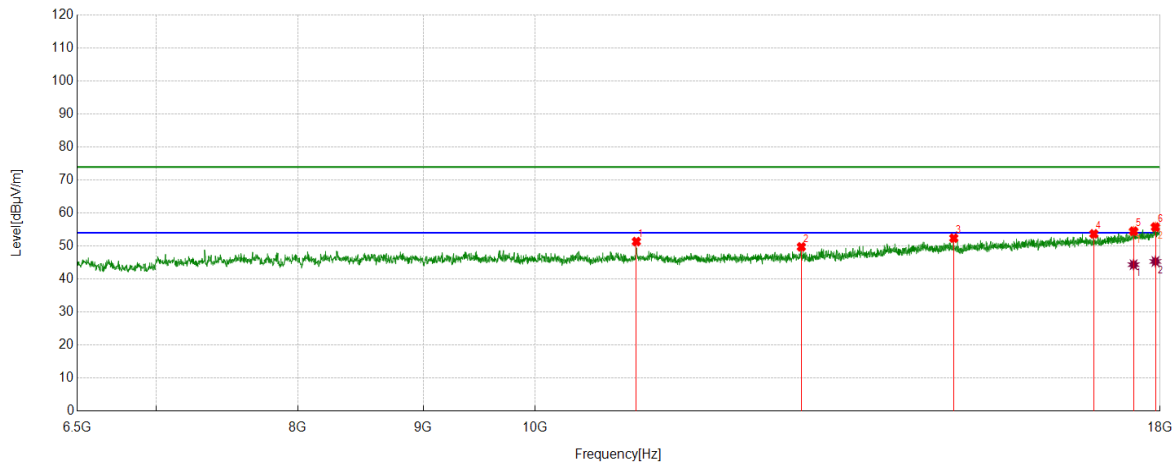

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10999.1665	44.07	7.28	51.35	74.00	-22.65	Horizontal
2	12845.2242	40.49	9.26	49.75	74.00	-24.25	Horizontal
3	14825.4709	39.49	12.90	52.39	74.00	-21.61	Horizontal
4	16913.0688	37.68	16.01	53.69	74.00	-20.31	Horizontal
5	17557.1762	36.73	17.77	54.50	74.00	-19.50	Horizontal
6	17921.4036	36.41	19.36	55.77	74.00	-18.23	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17557.1762	26.58	17.77	44.35	54.00	-9.65	Horizontal
2	17921.4036	25.96	19.36	45.32	54.00	-8.68	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS

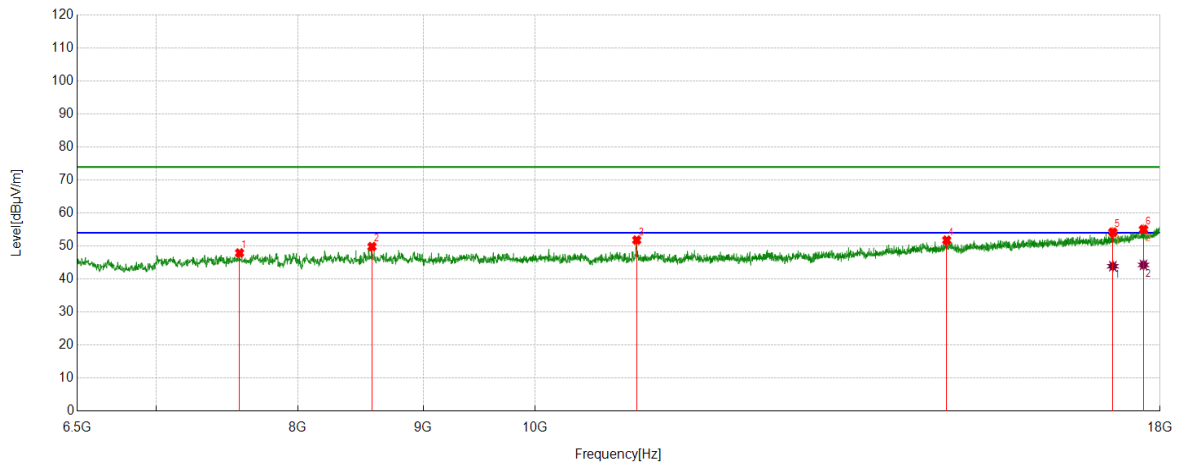

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7573.5123	43.07	4.83	47.90	74.00	-26.10	Vertical
2	8578.0130	43.44	6.40	49.84	74.00	-24.16	Vertical
3	11003.0005	44.53	7.28	51.81	74.00	-22.19	Vertical
4	14727.7046	38.99	12.80	51.79	74.00	-22.21	Vertical
5	17217.8696	37.50	16.71	54.21	74.00	-19.79	Vertical
6	17722.0370	36.57	18.49	55.06	74.00	-18.94	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17217.8696	27.18	16.71	43.89	54.00	-10.11	Vertical
2	17722.0370	25.79	18.49	44.28	54.00	-9.72	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS

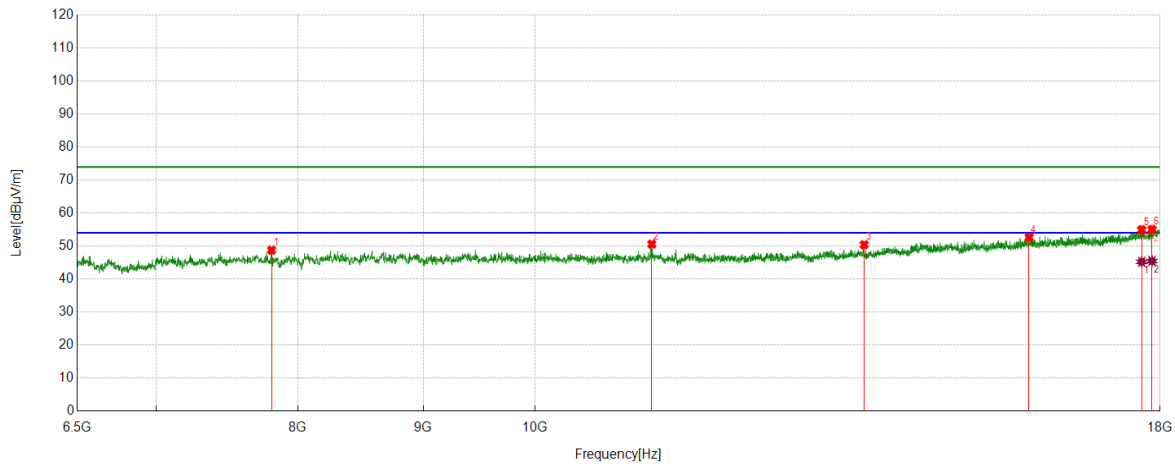

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7805.4676	43.43	5.34	48.77	74.00	-25.23	Horizontal
2	11160.1934	43.38	7.21	50.59	74.00	-23.41	Horizontal
3	13627.3546	39.82	10.57	50.39	74.00	-23.61	Horizontal
4	15914.3191	38.09	14.54	52.63	74.00	-21.37	Horizontal
5	17691.3652	36.75	18.19	54.94	74.00	-19.06	Horizontal
6	17863.8940	35.80	19.24	55.04	74.00	-18.96	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17691.3652	27.02	18.19	45.21	54.00	-8.79	Horizontal
2	17863.8940	26.23	19.24	45.47	54.00	-8.53	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS

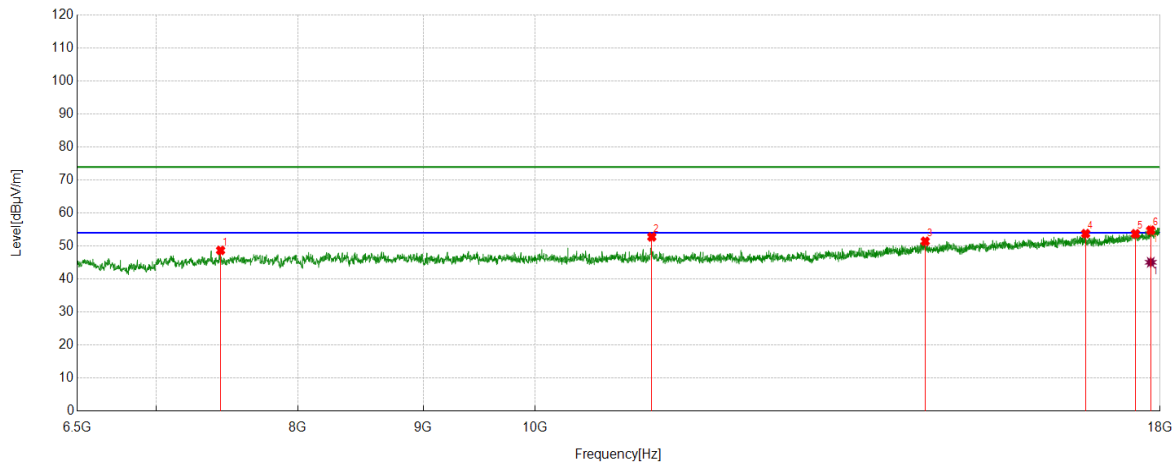

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7439.3232	44.48	4.20	48.68	74.00	-25.32	Vertical
2	11160.1934	45.56	7.21	52.77	74.00	-21.23	Vertical
3	14432.4887	38.57	12.87	51.44	74.00	-22.56	Vertical
4	16782.7138	37.52	16.24	53.76	74.00	-20.24	Vertical
5	17587.8480	35.71	18.02	53.73	74.00	-20.27	Vertical
6	17842.8071	35.70	19.10	54.80	74.00	-19.20	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17842.8071	25.97	19.10	45.07	54.00	-8.93	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS

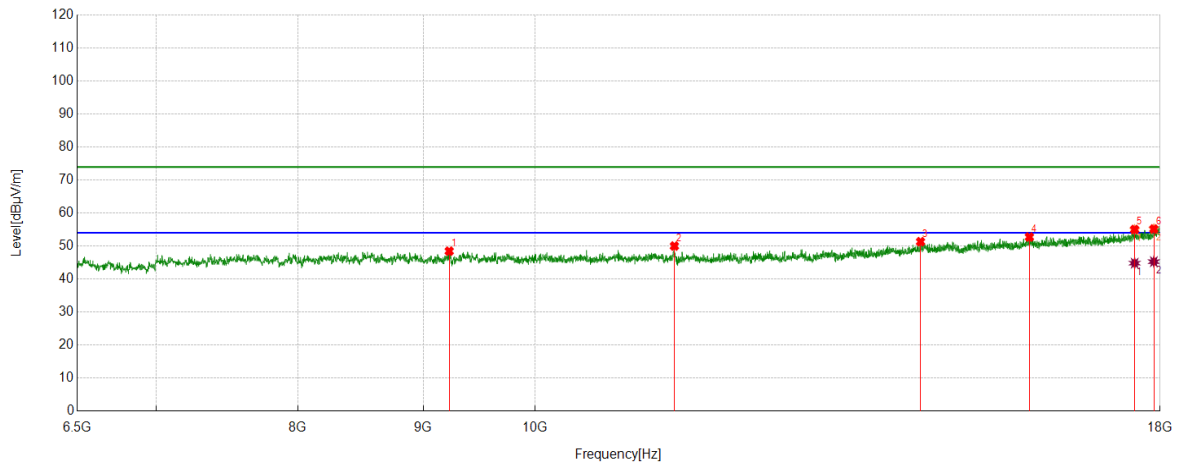

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9224.0373	42.46	6.00	48.46	74.00	-25.54	Horizontal
2	11399.8166	42.59	7.41	50.00	74.00	-24.00	Horizontal
3	14369.2282	38.66	12.65	51.31	74.00	-22.69	Horizontal
4	15918.1530	38.26	14.48	52.74	74.00	-21.26	Horizontal
5	17574.4291	37.10	17.92	55.02	74.00	-18.98	Horizontal
6	17894.5658	35.92	19.25	55.17	74.00	-18.83	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17574.4291	26.88	17.92	44.80	54.00	-9.20	Horizontal
2	17894.5658	26.01	19.25	45.26	54.00	-8.74	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS

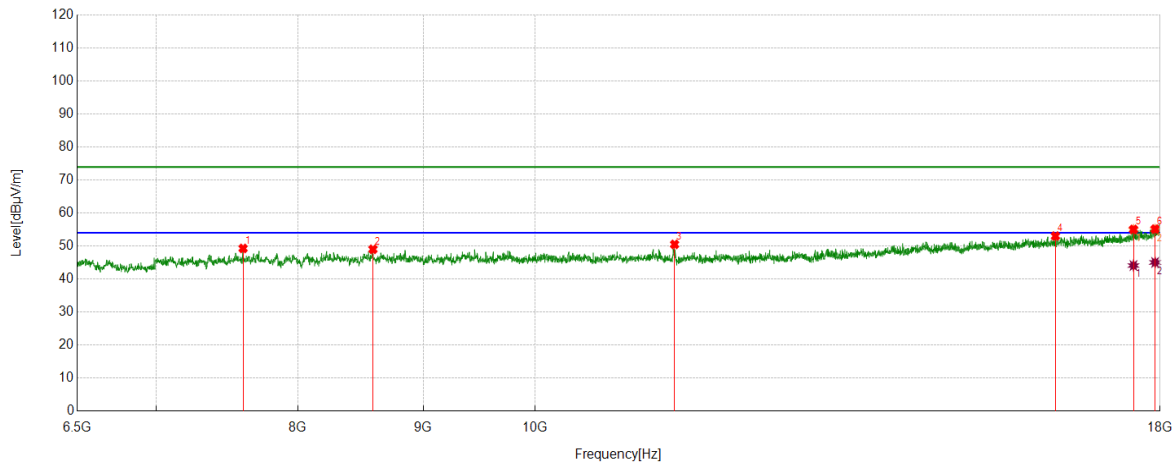

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7598.4331	44.32	4.96	49.28	74.00	-24.72	Vertical
2	8585.6809	42.88	6.14	49.02	74.00	-24.98	Vertical
3	11401.7336	43.09	7.42	50.51	74.00	-23.49	Vertical
4	16313.0522	37.99	15.04	53.03	74.00	-20.97	Vertical
5	17555.2592	37.27	17.77	55.04	74.00	-18.96	Vertical
6	17915.6526	35.83	19.32	55.15	74.00	-18.85	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17555.2592	26.32	17.77	44.09	54.00	-9.91	Vertical
2	17915.6526	25.71	19.32	45.03	54.00	-8.97	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS

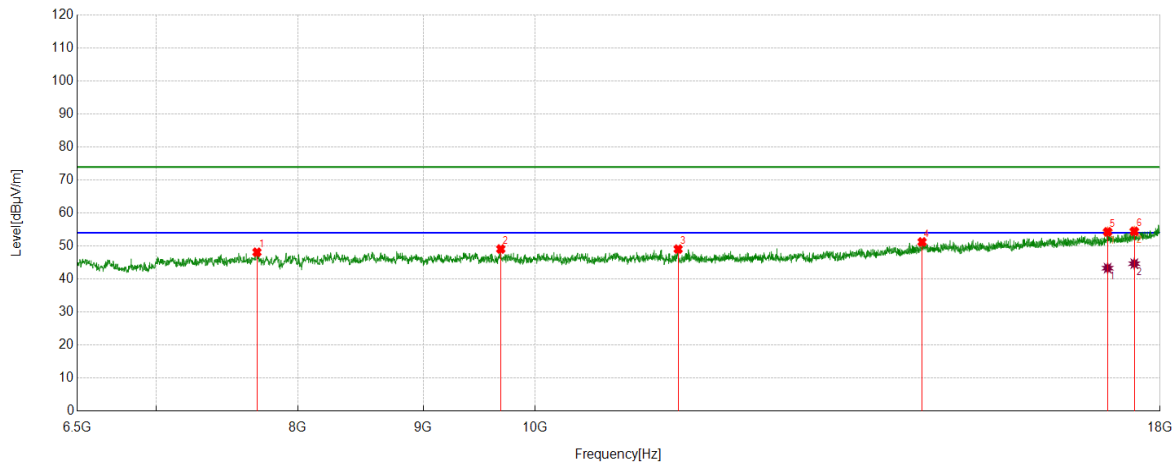

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7698.1164	42.60	5.53	48.13	74.00	-25.87	Horizontal
2	9682.1970	42.61	6.49	49.10	74.00	-24.90	Horizontal
3	11440.0733	41.70	7.37	49.07	74.00	-24.93	Horizontal
4	14390.3151	38.44	12.79	51.23	74.00	-22.77	Horizontal
5	17133.5223	37.77	16.54	54.31	74.00	-19.69	Horizontal
6	17568.6781	36.59	17.89	54.48	74.00	-19.52	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17133.5223	26.75	16.54	43.29	54.00	-10.71	Horizontal
2	17568.6781	26.77	17.89	44.66	54.00	-9.34	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS

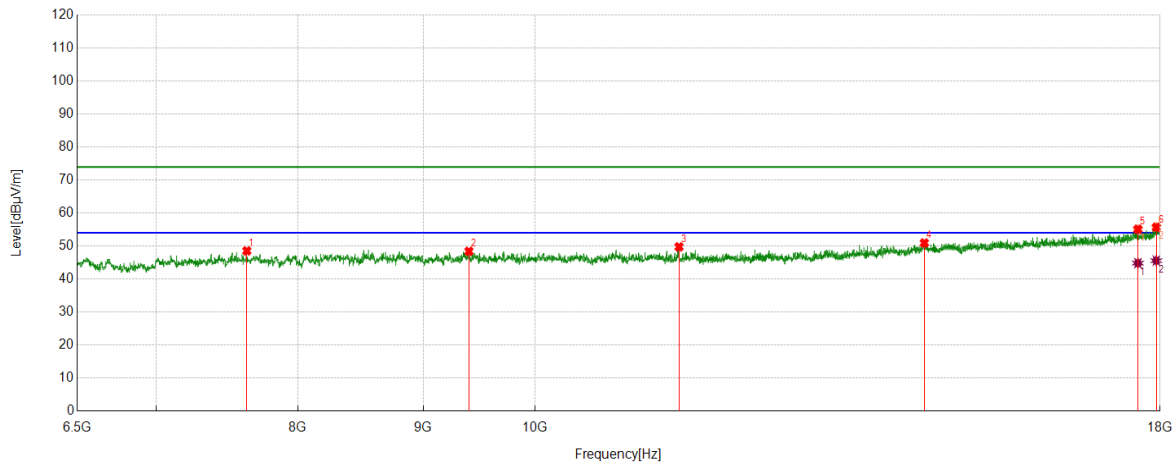

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7625.2709	43.35	5.18	48.53	74.00	-25.47	Vertical
2	9396.5661	41.81	6.59	48.40	74.00	-25.60	Vertical
3	11449.6583	42.28	7.47	49.75	74.00	-24.25	Vertical
4	14420.9868	38.03	12.91	50.94	74.00	-23.06	Vertical
5	17628.1047	37.05	18.06	55.11	74.00	-18.89	Vertical
6	17936.7395	36.28	19.42	55.70	74.00	-18.30	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17628.1047	26.75	18.06	44.81	54.00	-9.19	Vertical
2	17936.7395	26.15	19.42	45.57	54.00	-8.43	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS

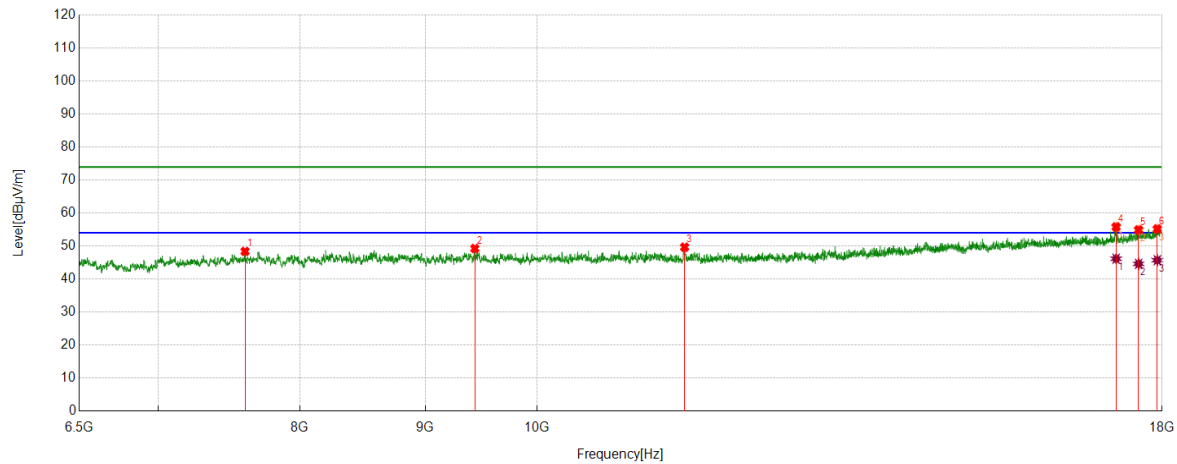

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7598.4331	43.41	4.96	48.37	74.00	-25.63	Horizontal
2	9431.0718	42.66	6.59	49.25	74.00	-24.75	Horizontal
3	11487.9980	42.10	7.55	49.65	74.00	-24.35	Horizontal
4	17238.9565	39.04	16.78	55.82	74.00	-18.18	Horizontal
5	17607.0178	36.85	18.05	54.90	74.00	-19.10	Horizontal
6	17919.4866	35.83	19.36	55.19	74.00	-18.81	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17238.9565	29.37	16.78	46.15	54.00	-7.85	Horizontal
2	17607.0178	26.55	18.05	44.60	54.00	-9.40	Horizontal
3	17919.4866	26.34	19.36	45.70	54.00	-8.30	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.