


TEST REPORT

FCC ID. :	2BGZ8-EB621	
Test Report No..... :	TCT240607E022	
Date of issue..... :	Jun. 21, 2024	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shenzhen Echarger technology Co., LTD.	
Address..... :	No. 12, Yuling West Road, Longcheng Street, Longgang District, Shenzhen, Guangdong Province, China	
Manufacturer's name ... :	Shenzhen Echarger technology Co., LTD.	
Address..... :	No. 12, Yuling West Road, Longcheng Street, Longgang District, Shenzhen, Guangdong Province, China	
Standard(s)	FCC CFR Title 47 Part 15 Subpart C	
Product Name..... :	Magnetic Wireless Power Bank	
Trade Mark	N/A	
Model/Type reference..... :	EB621	
Rating(s)..... :	Rechargeable Li-ion Battery DC 3.85V	
Date of receipt of test item	Jun. 07, 2024	
Date (s) of performance of test..... :	Jun. 07, 2024 ~ Jun. 21, 2024	
Tested by (+signature) ... :	Onnado YE	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Test Result Summary	4
3. General Information.....	5
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	5
4. Facilities and Accreditations	6
4.1. Facilities	6
4.2. Location	6
4.3. Measurement Uncertainty.....	6
5. Test Results and Measurement Data	7
5.1. Antenna requirement	7
5.2. Conducted Emission.....	8
5.3. Radiated Spurious Emission Measurement.....	12
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name.....:	Magnetic Wireless Power Bank
Model/Type reference.....:	EB621
Sample Number.....:	TCT240607E022-0101
Operation Frequency	115.38kHz ~ 135.90kHz
Output power	15W
Modulation Technology	Load modulation
Antenna Type.....:	Inductive loop coil Antenna
Rating(s).....:	Rechargeable Li-ion Battery DC 3.85V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

None.

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	22.8 °C	24.6 °C
Humidity:	49 % RH	49 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
	Mode 1	AC/DC adapter(DC 9V) + EUT + Mobile Phone (battery status>95%)
	Mode 2	AC/DC adapter(DC 9V) + EUT + Mobile Phone (battery status<50%)
	Mode 3	AC/DC adapter(DC 9V) + EUT + Mobile Phone (battery status<1%)
Remark	All modes have been tested. The worst mode (Mode 1) reported for Conducted emission test and The worst mode (Mode 1) reported for Radiated emission test	
The sample was placed 0.8m for the measurement below above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.		

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	EP-TA200	R37M4PR7QD4SE3	/	SAMSUNG
Load	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Antenna requirement

Standard requirement:


FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The antenna is inductive loop coil antenna which permanently attached.

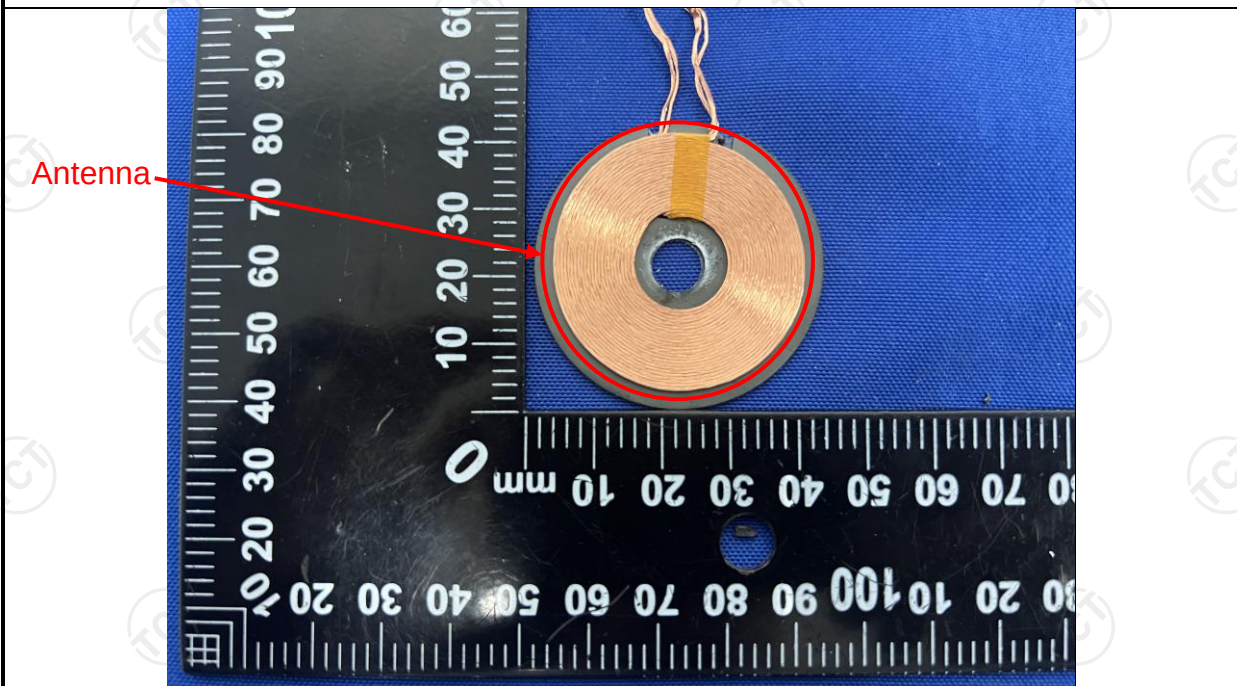

5.2. Conducted Emission

5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm E.U.T AC power Test table/Insulation plane 80cm LISN Filter EMI Receiver AC power Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Refer to item 3.1														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														


5.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jun. 29, 2024
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Jan. 31, 2025
Line-5	TCT	CE-05	/	Jul. 03, 2024
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

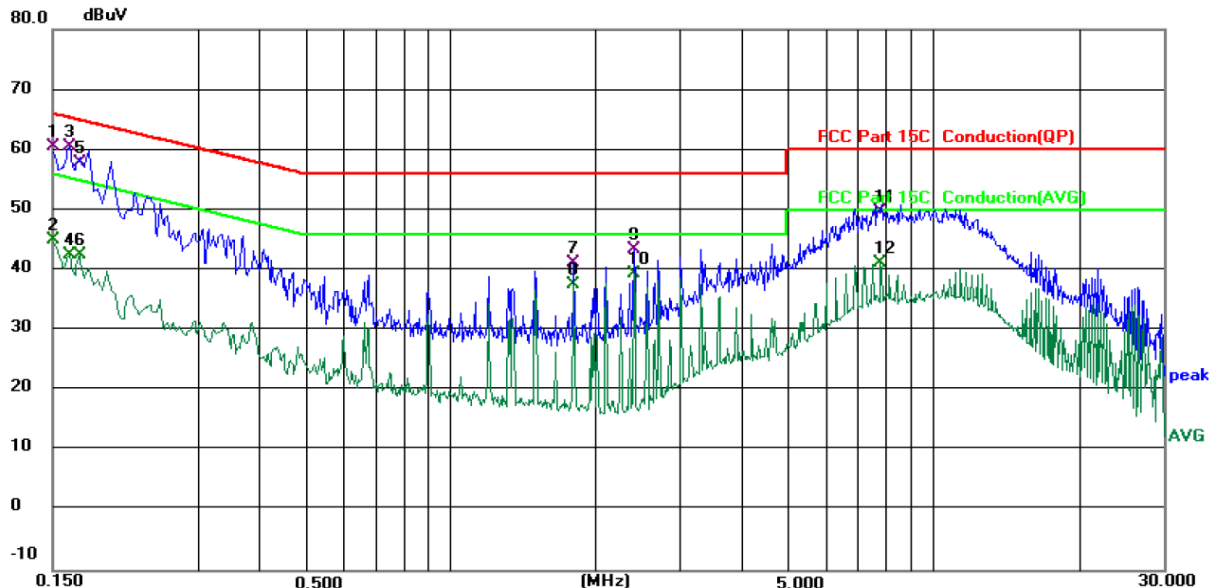

Site 844 Shielding Room

Phase: L1

Temperature: 22.8 (°C)

Humidity: 49 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 9V(Adapter Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.1500	50.46	10.02	60.48	66.00	-5.52	QP	
2		0.1500	35.09	10.02	45.11	56.00	-10.89	AVG	
3	*	0.1620	50.56	10.03	60.59	65.36	-4.77	QP	
4		0.1620	32.60	10.03	42.63	55.36	-12.73	AVG	
5		0.1700	47.92	10.02	57.94	64.96	-7.02	QP	
6		0.1700	32.53	10.02	42.55	54.96	-12.41	AVG	
7		1.8020	31.07	10.01	41.08	56.00	-14.92	QP	
8		1.8020	27.60	10.01	37.61	46.00	-8.39	AVG	
9		2.4060	33.29	10.09	43.38	56.00	-12.62	QP	
10		2.4060	29.22	10.09	39.31	46.00	-6.69	AVG	
11		7.8100	39.13	10.54	49.67	60.00	-10.33	QP	
12		7.8100	30.73	10.54	41.27	50.00	-8.73	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

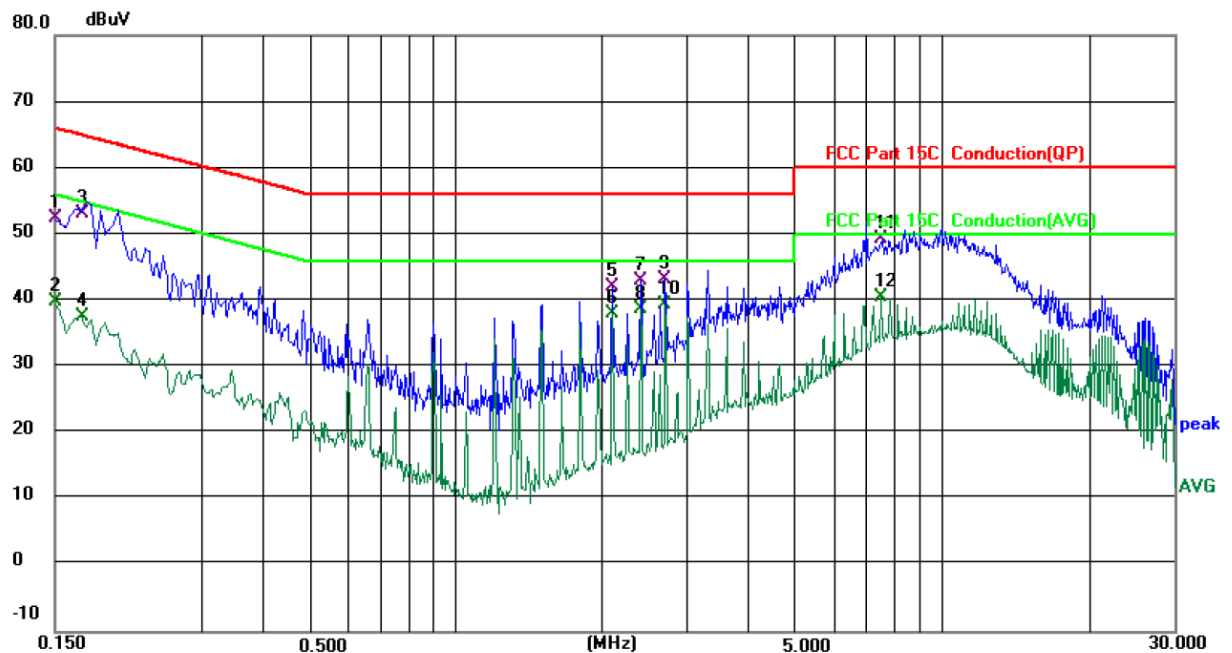

Site 844 Shielding Room

Phase: **N**

Temperature: 22.8 (°C)

Humidity: 49 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 9V(Adapter Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	42.38	10.00	52.38	66.00	-13.62	QP	
2		0.1500	29.81	10.00	39.81	56.00	-16.19	AVG	
3		0.1700	43.14	10.00	53.14	64.96	-11.82	QP	
4		0.1700	27.56	10.00	37.56	54.96	-17.40	AVG	
5		2.1059	32.20	9.99	42.19	56.00	-13.81	QP	
6		2.1059	27.95	9.99	37.94	46.00	-8.06	AVG	
7		2.4060	33.05	10.04	43.09	56.00	-12.91	QP	
8		2.4060	28.70	10.04	38.74	46.00	-7.26	AVG	
9		2.7058	33.13	10.06	43.19	56.00	-12.81	QP	
10	*	2.7058	29.35	10.06	39.41	46.00	-6.59	AVG	
11		7.5179	38.84	10.50	49.34	60.00	-10.66	QP	
12		7.5179	29.97	10.50	40.47	50.00	-9.53	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)


Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

5.3. Radiated Spurious Emission Measurement

5.3.1. Test Specification

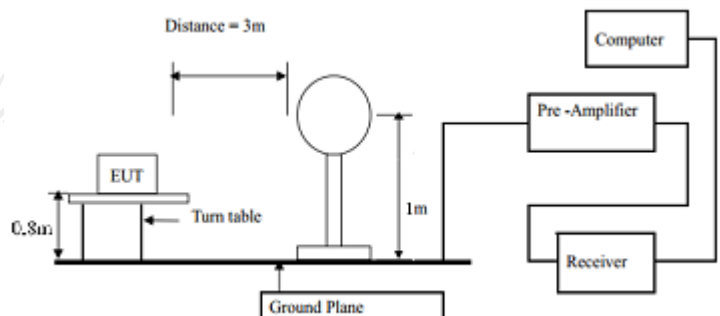Test Requirement:	FCC Part15 C Section 15.209																											
Test Method:	ANSI C63.10: 2013																											
Frequency Range:	9 kHz to 25 GHz																											
Measurement Distance:	3 m																											
Antenna Polarization:	Horizontal & Vertical																											
Operation mode:	Refer to item 3.1																											
Receiver Setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr><tr><td>150kHz- 30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value			
	Frequency	Detector	RBW	VBW	Remark																							
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																							
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																							
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
Limit:	<table><tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr><tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr><tr><td>1.705-30</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>				Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																									
	0.009-0.490	2400/F(KHz)	300																									
	0.490-1.705	24000/F(KHz)	30																									
	1.705-30	30	30																									
	30-88	100	3																									
	88-216	150	3																									
	216-960	200	3																									
Above 960	500	3																										
Test setup:	For radiated emissions below 30MHz																											
																												
	30MHz to 1GHz																											

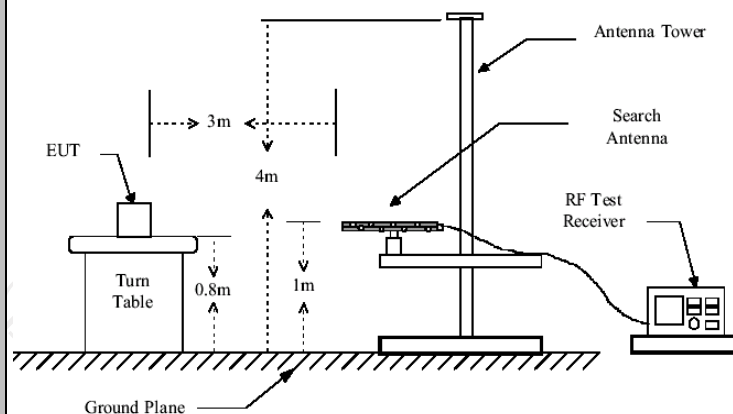

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=120 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Test mode:

Refer to section 3.1 for details

Test results:

PASS

5.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jun. 29, 2024
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 29, 2024
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 31, 2025
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Jan. 31, 2025
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jul. 02, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 01, 2024
Antenna Mast	Keleto	RE-AM	/	/
Coaxial cable	SKET	RC-18G-N-M	/	Jan. 31, 2025
Coaxial cable	SKET	RC_40G-K-M	/	Jan. 31, 2025
EMI Test Software	Shurple Technology	EZ-EMC	/	/


5.3.3. Test Data

Please refer to following diagram for individual

9KHz-30MHz

9KHz-150KHz:

Coaxial:

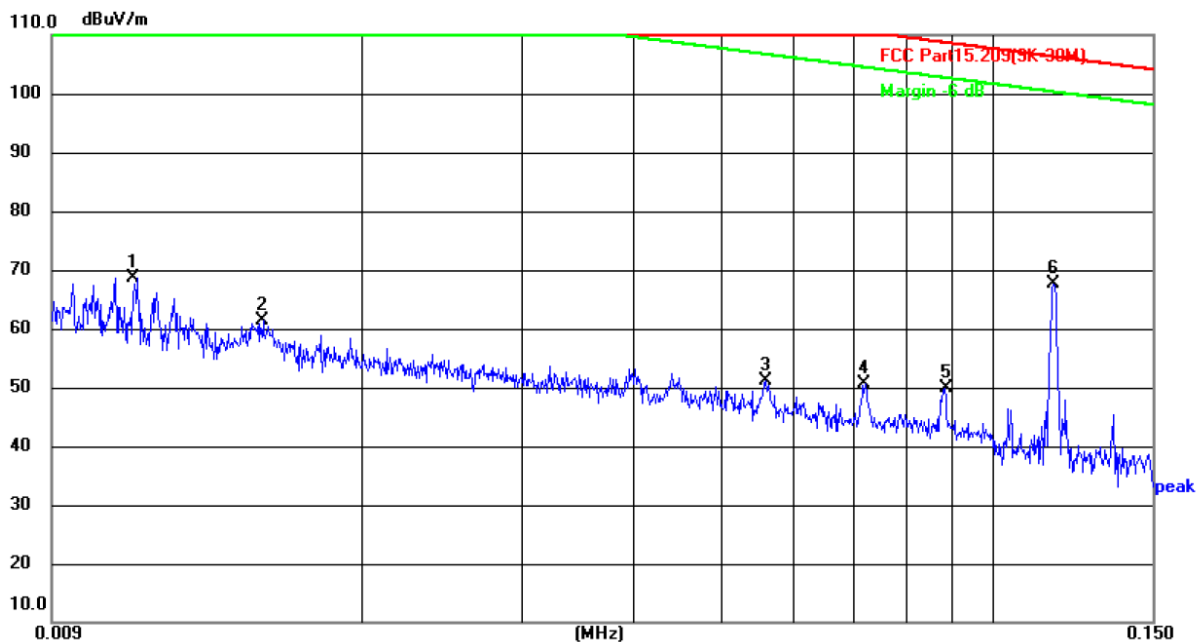

Site: 3m Anechoic Chamber

Polarization: **Coaxial**

Temperature: 22.9(°C)


Humidity: 53 %

Limit: FCC Part15.209(9K-30M)

Power:Supply power by internal battery

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0111	48.37	20.32	68.69	126.70	-58.01	peak	P	
2	0.0154	41.05	20.32	61.37	123.85	-62.48	peak	P	
3	0.0558	30.91	20.30	51.21	112.67	-61.46	peak	P	
4	0.0719	30.45	20.25	50.70	110.47	-59.77	peak	P	
5	0.0880	29.63	20.30	49.93	108.71	-58.78	peak	P	
6 *	0.1165	47.16	20.56	67.72	106.28	-38.56	peak	P	

Coplanar:

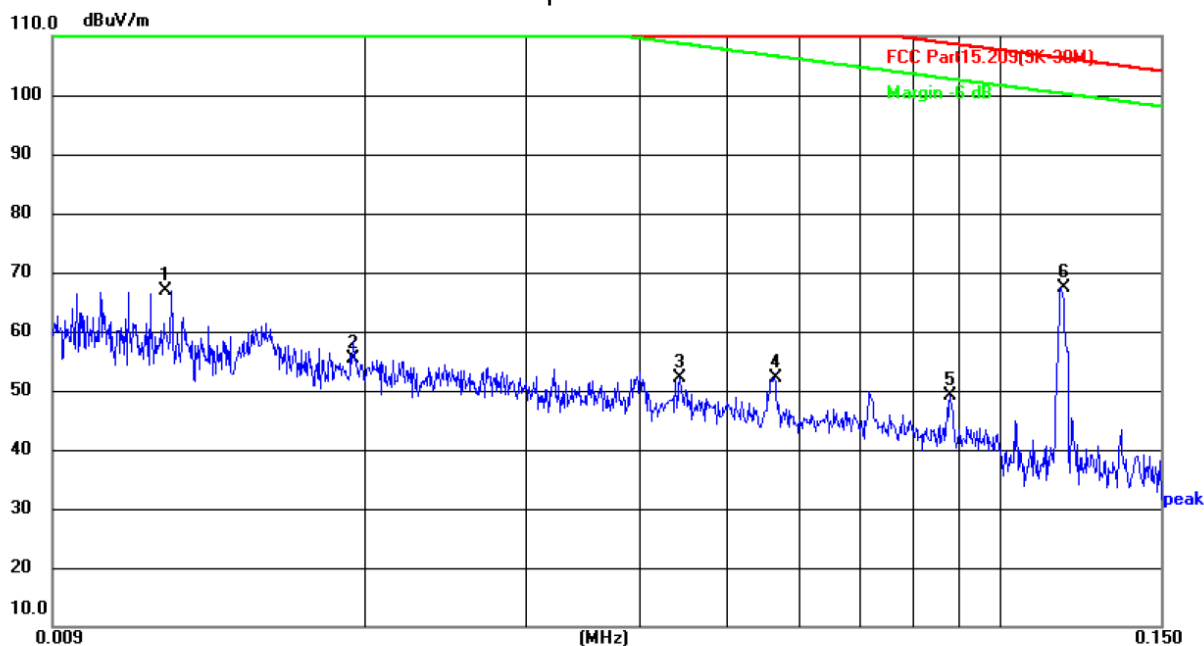

Site: 3m Anechoic Chamber

Polarization: **Coplanar**

Temperature: 22.9(°C)

Humidity: 53 %


Limit: FCC Part 15.209(9K-30M)

Power: Supply power by internal battery

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0120	46.60	20.32	66.92	126.02	-59.10	peak	P	
2	0.0193	35.14	20.30	55.44	121.89	-66.45	peak	P	
3	0.0442	31.94	20.29	52.23	114.70	-62.47	peak	P	
4	0.0561	31.92	20.30	52.22	112.63	-60.41	peak	P	
5	0.0879	28.82	20.30	49.12	108.72	-59.60	peak	P	
6 *	0.1166	46.78	20.56	67.34	106.27	-38.93	peak	P	

150KHz-30MHz:

Coaxial:

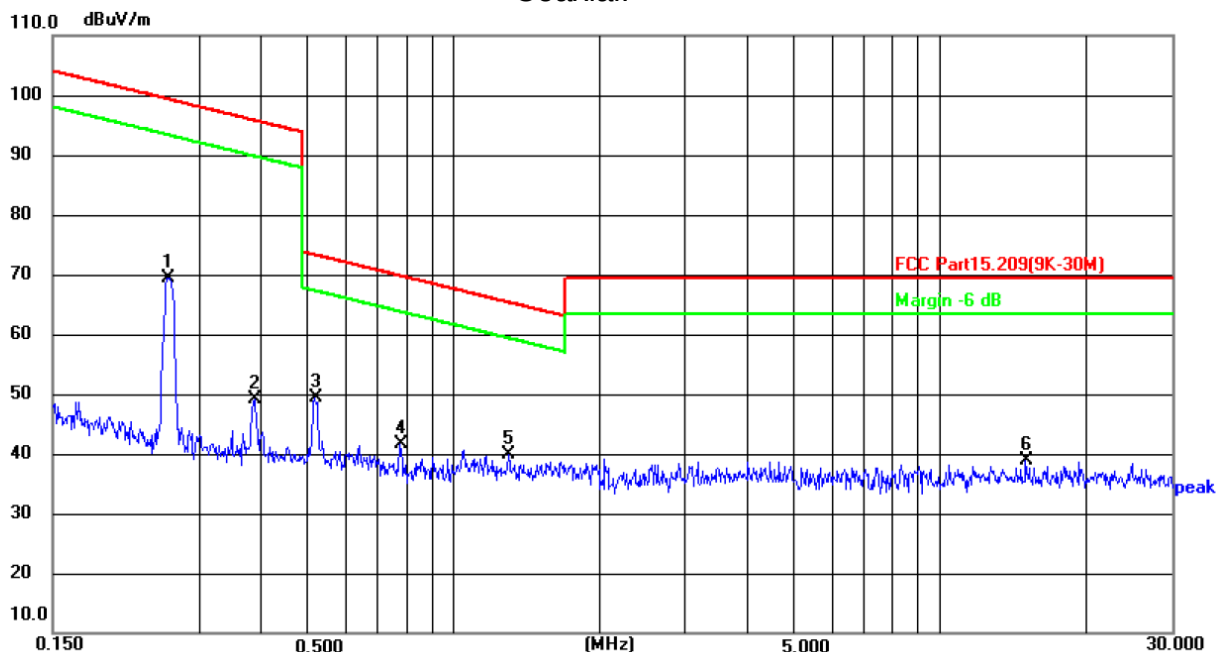

Site: 3m Anechoic Chamber

Polarization: Coaxial

Temperature: 22.9(°C)


Humidity: 53 %

Limit: FCC Part15.209(9K-30M)

Power: Supply power by internal battery

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.2590	49.15	20.30	69.45	99.34	-29.89	peak	P	
2	0.3897	28.64	20.52	49.16	95.79	-46.63	peak	P	
3 *	0.5192	28.61	20.76	49.37	73.30	-23.93	peak	P	
4	0.7784	20.30	21.22	41.52	69.79	-28.27	peak	P	
5	1.3004	17.68	22.22	39.90	65.35	-25.45	peak	P	
6	15.0536	19.70	19.30	39.00	69.50	-30.50	peak	P	

Coplanar:

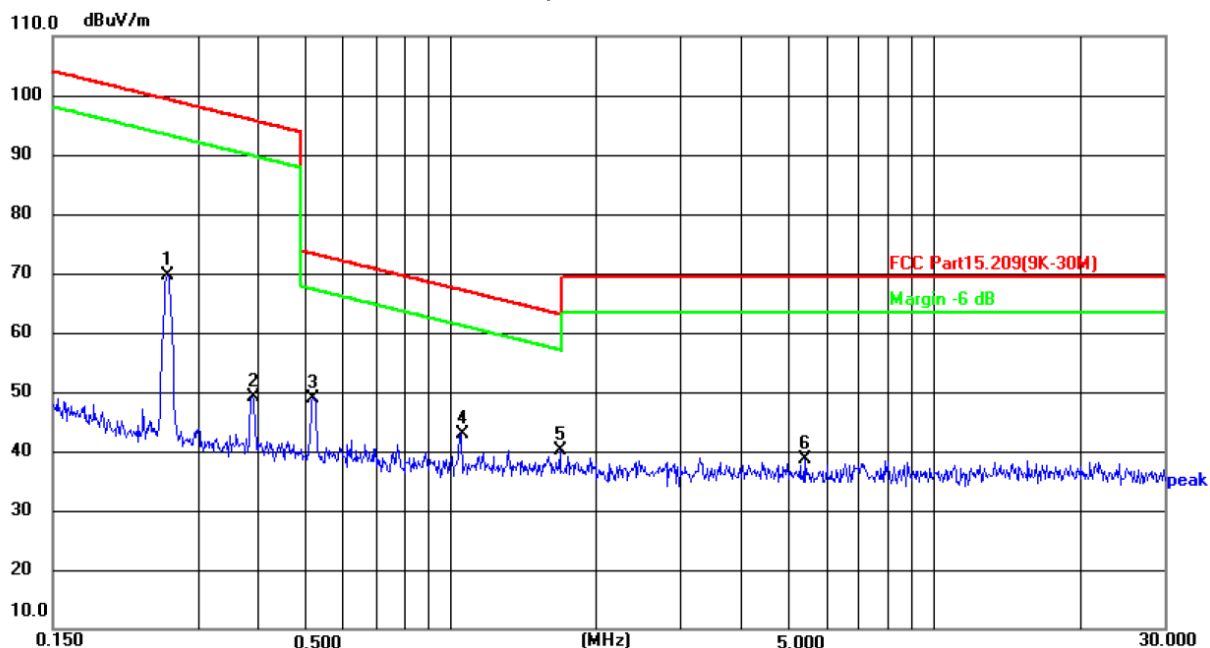

Site: 3m Anechoic Chamber

Polarization: **Coplanar**

Temperature: 22.9(°C)

Humidity: 53 %


Limit: FCC Part15.209(9K-30M)

Power: Supply power by internal battery

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.2590	49.43	20.30	69.73	99.34	-29.61	peak	P	
2	0.3883	28.50	20.52	49.02	95.82	-46.80	peak	P	
3	0.5181	28.07	20.76	48.83	73.32	-24.49	peak	P	
4	1.0487	21.13	21.72	42.85	67.21	-24.36	peak	P	
5 *	1.6837	17.07	22.98	40.05	63.11	-23.06	peak	P	
6	5.4143	8.12	30.44	38.56	69.50	-30.94	peak	P	

30MHz-1GHz

Horizontal:

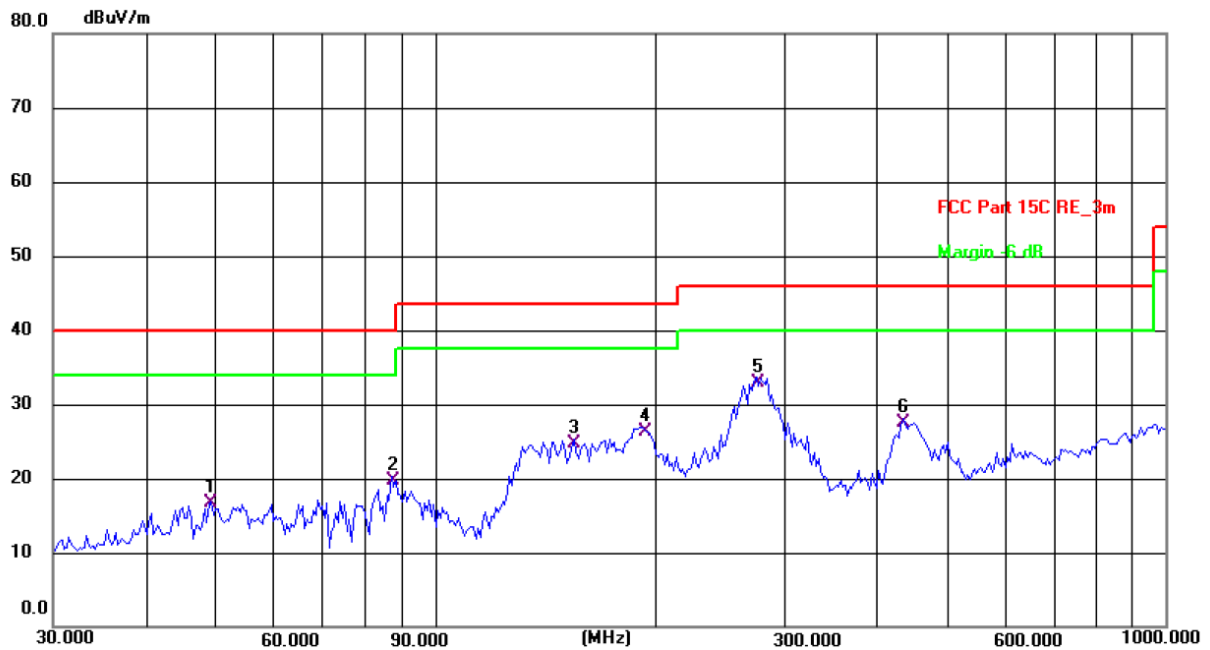

Site: 3m Anechoic Chamber1

Polarization: **Horizontal**


Temperature: 24.6(C) Humidity: 49 %

Limit: FCC Part 15C RE_3m

Power: DC 9V(Adapter Input AC 120V/60Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	49.3594	29.27	-12.65	16.62	40.00	-23.38	QP	P	
2	87.1117	36.40	-16.67	19.73	40.00	-20.27	QP	P	
3	154.8204	35.43	-10.82	24.61	43.50	-18.89	QP	P	
4	192.4186	40.21	-13.91	26.30	43.50	-17.20	QP	P	
5 *	275.1570	44.07	-11.19	32.88	46.00	-13.12	QP	P	
6	437.1199	34.99	-7.58	27.41	46.00	-18.59	QP	P	

Vertical:

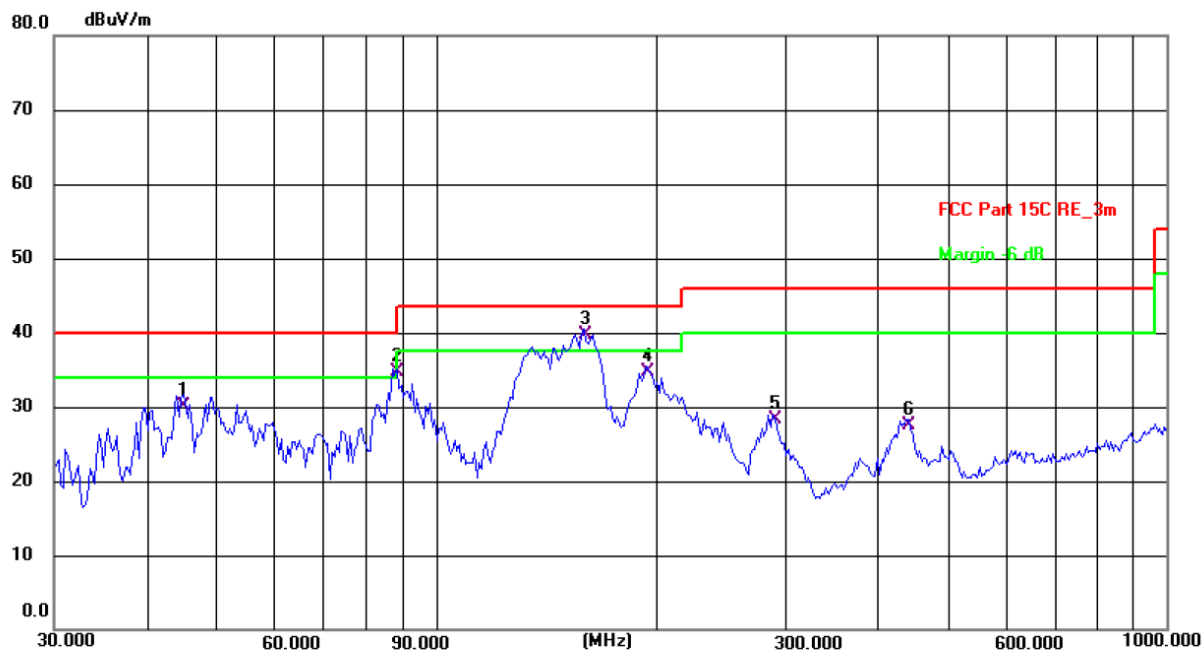

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 24.6(C) Humidity: 49 %

Limit: FCC Part 15C RE_3m

Power: DC 9V(Adapter Input AC 120V/60Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	45.0583	42.73	-12.62	30.11	40.00	-9.89	QP	P	
2	88.3421	51.41	-16.79	34.62	43.50	-8.88	QP	P	
3 *	159.2251	50.85	-11.10	39.75	43.50	-3.75	QP	P	
4	193.7728	48.65	-13.95	34.70	43.50	-8.80	QP	P	
5	289.0021	38.84	-10.59	28.25	46.00	-17.75	QP	P	
6	440.1963	35.05	-7.60	27.45	46.00	-18.55	QP	P	

Note:



Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Appendix A: Photographs of Test Setup

Product: Magnetic Wireless Power Bank

Model: EB621

Radiated Emission

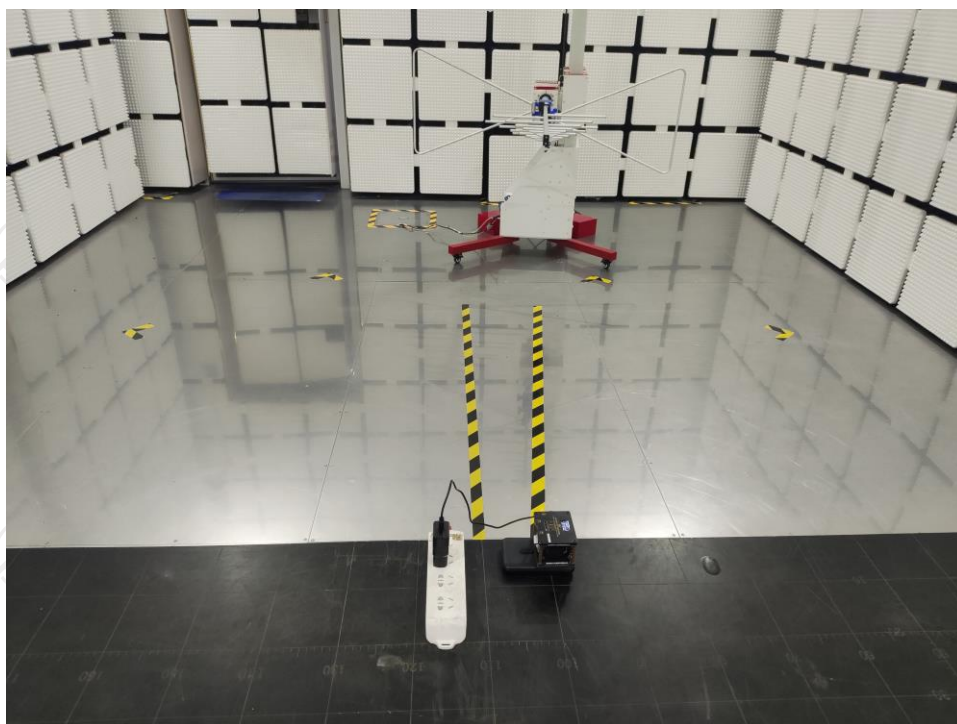
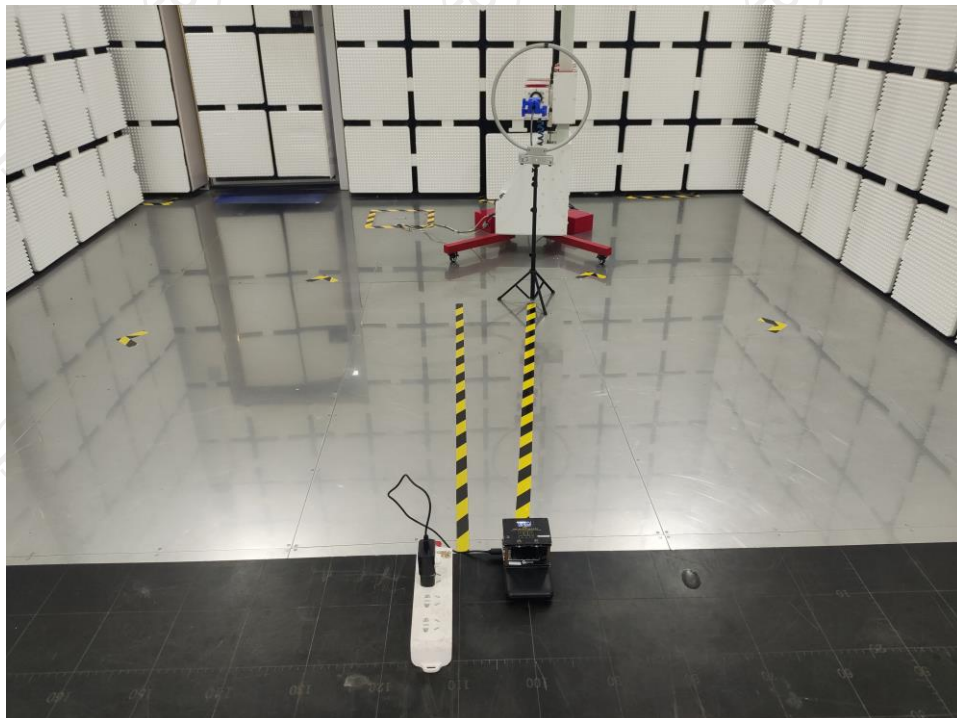




Conducted Emission





Appendix B: Photographs of EUT
Product: Magnetic Wireless Power Bank
Model: EB621
External Photos





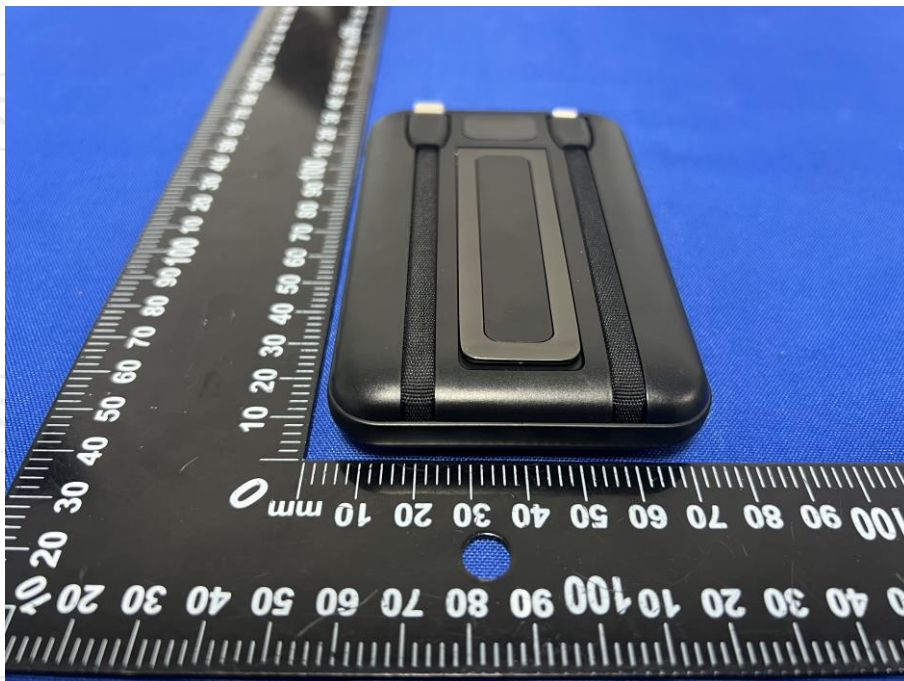
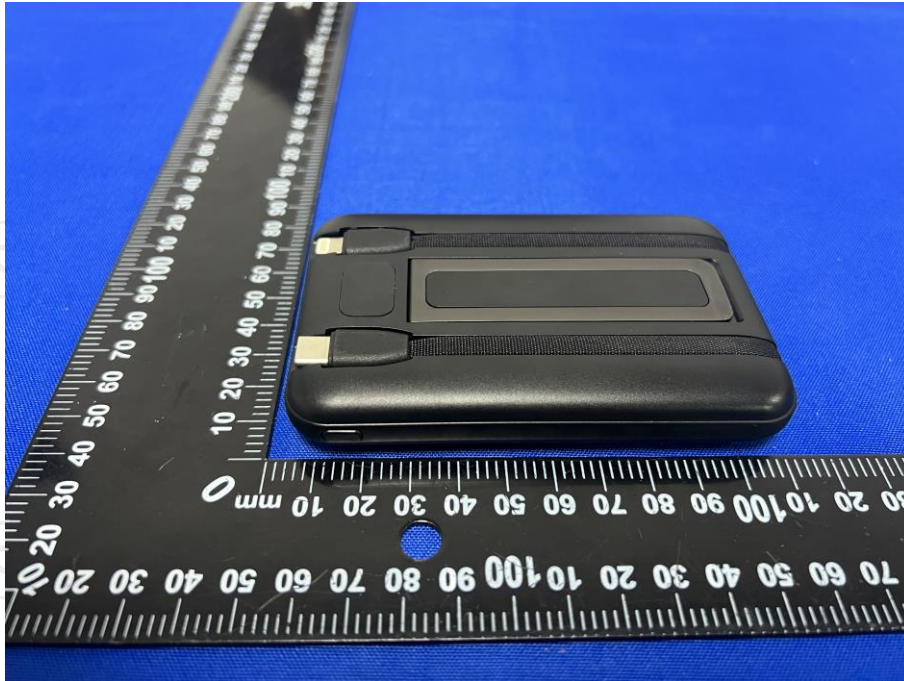


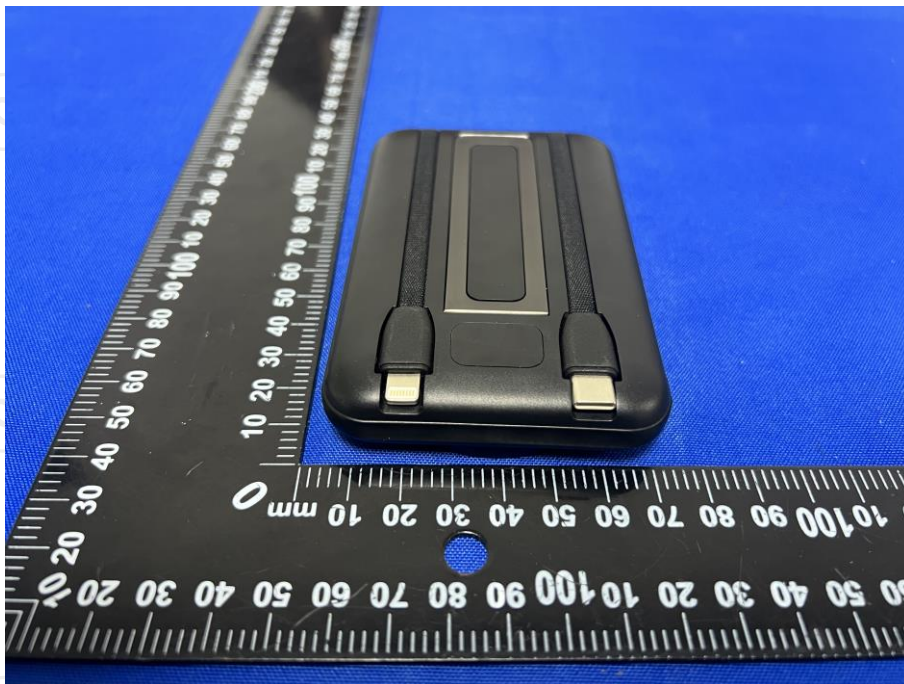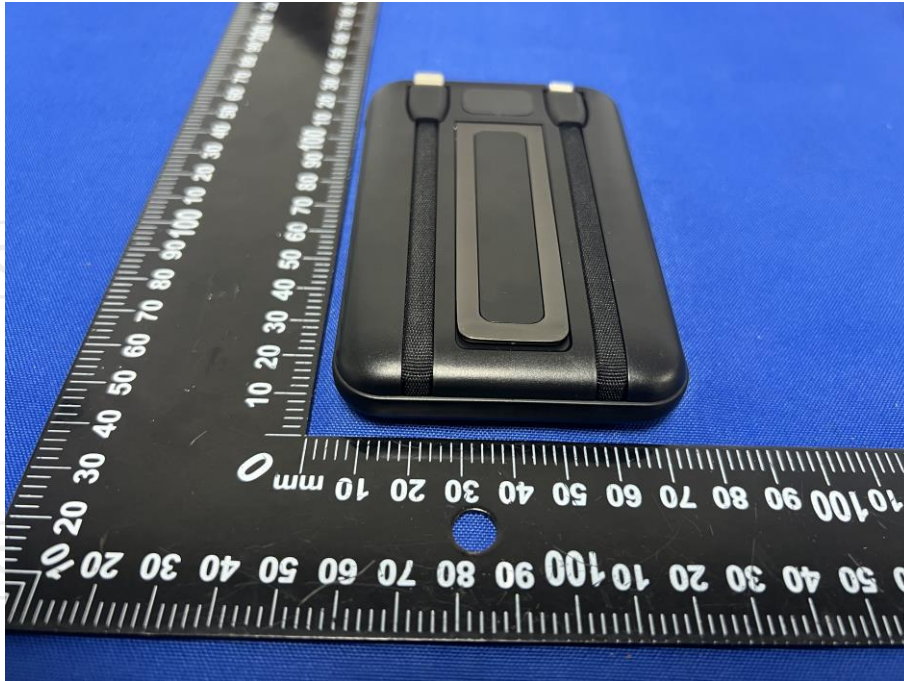

Product: Magnetic Wireless Power Bank
Model: EB621
Internal Photos

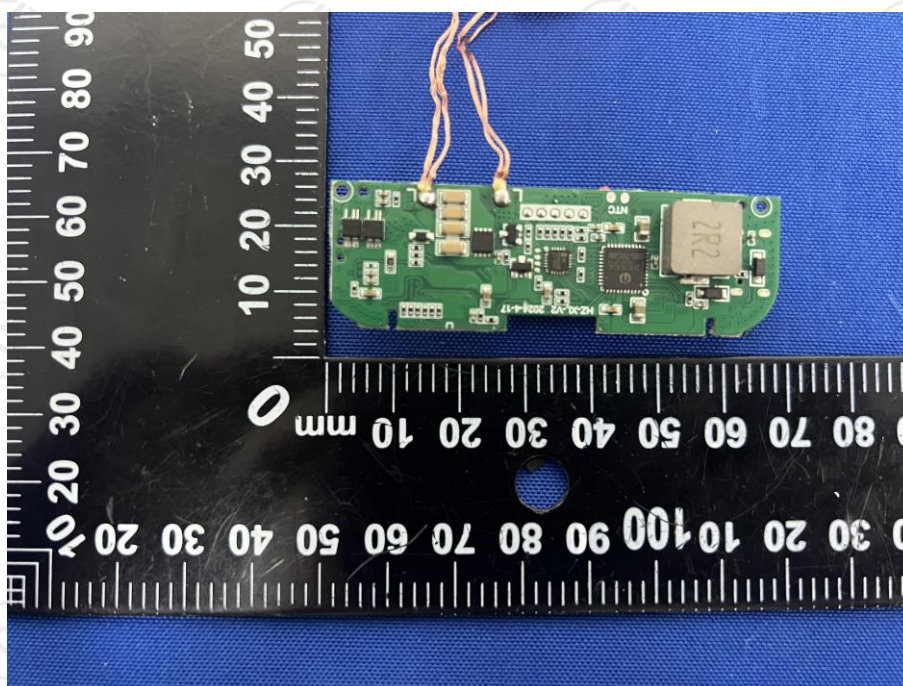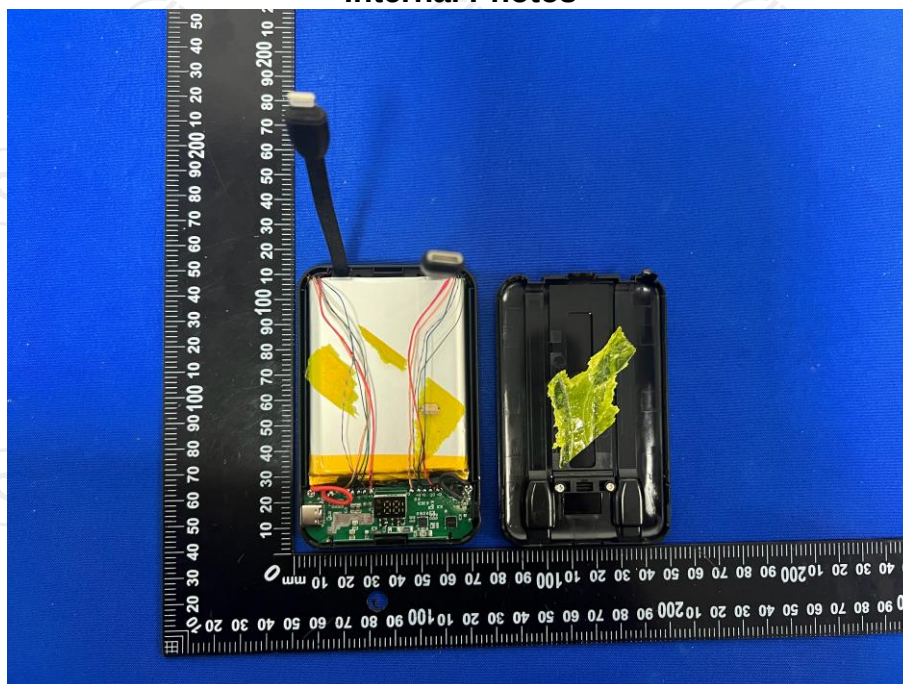

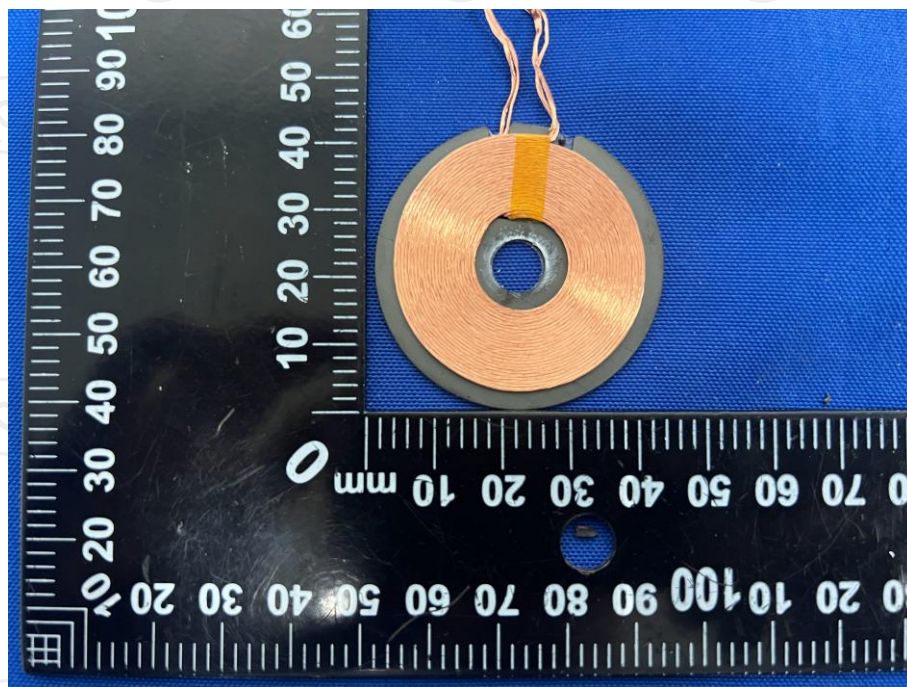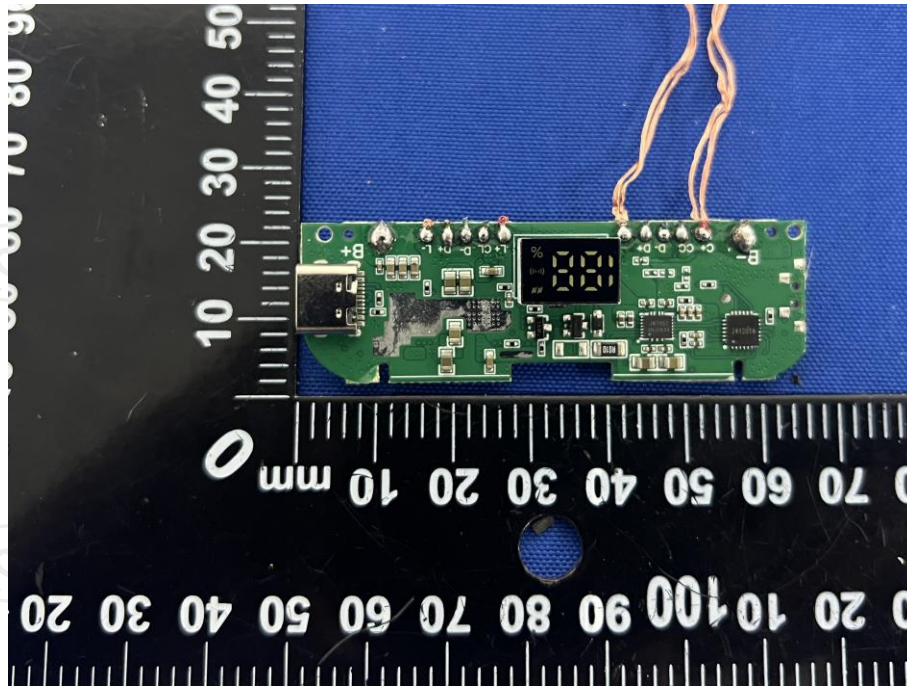

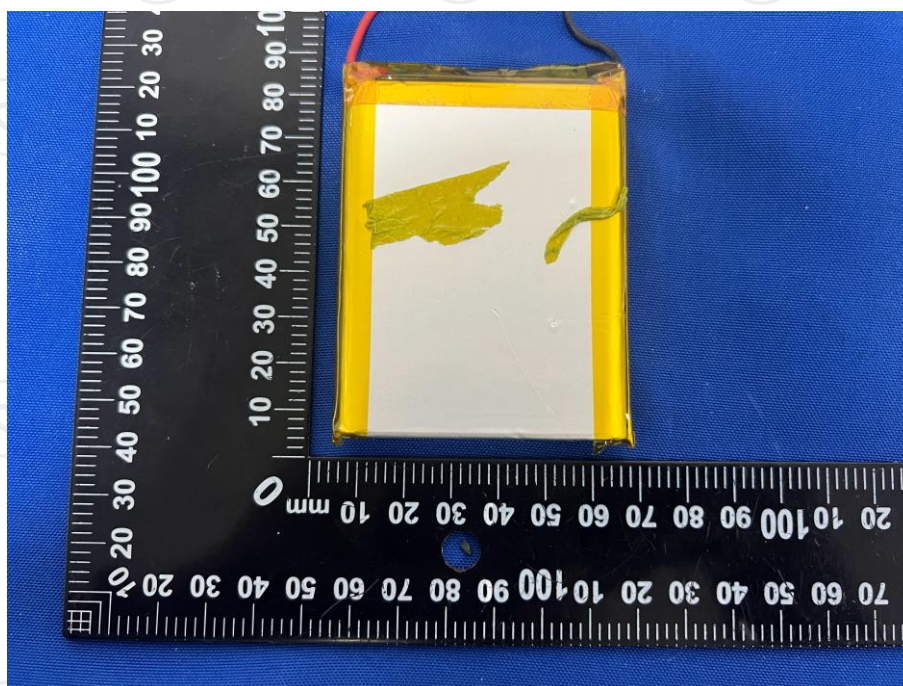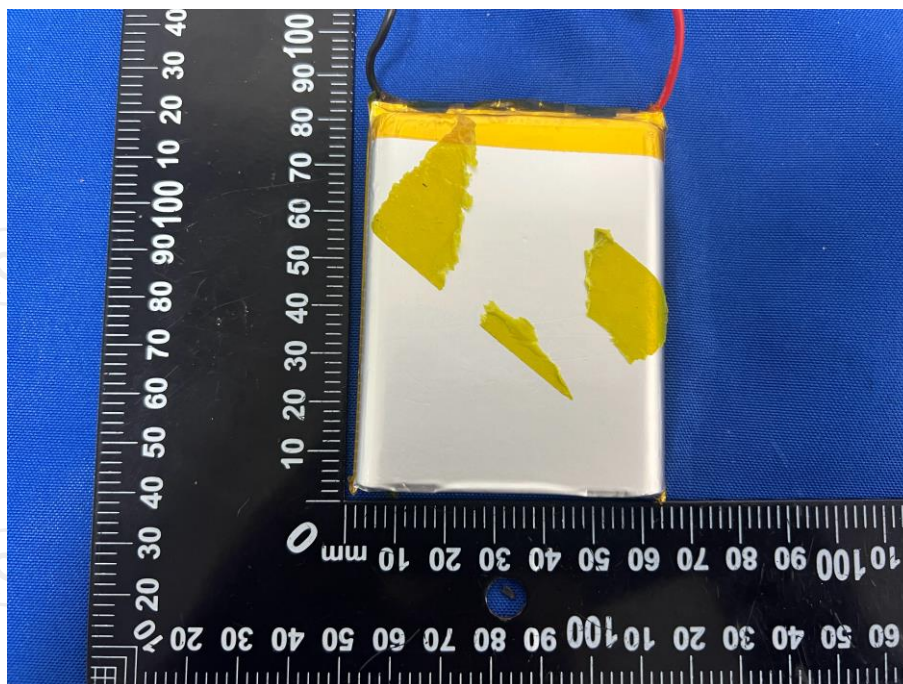

*******END OF REPORT*******