



Report No: FCC1605243 File reference No: 2016-05-31

Applicant: DawnSun Electronic Technology Co., Ltd. Zhongshan

Product: Remote Control – Transmitter

Model No: TX006.TX006-R

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.231 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung Manager

Dated: May 31, 2016

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No: FCC1605243 Page 2 of 35

Date: 2016-05-31



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

Date: 2016-05-31



# **Test Report Conclusion**

#### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	9
6.1	Test Method and Test Procedure.	9
6.2	Configuration of the EUT	9
6.3	EUT Operation Condition.	9
6.4	Radiated Emission Limit.	10
6.5	Test Result.	11
7.0	20dB Bandwidth Test.	16
8.0	Deactivate Test	18
9.0	Duty Cycle	20
10.0	Antenna Requirement.	25
11.0	FCC ID Label.	26
12.0	Photo of Testing	27

Report No: FCC1605243 Page 4 of 35

Date: 2016-05-31



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

#### 1.2 Applicant Details

Applicant: DawnSun Electronic Technology Co., Ltd. Zhongshan

Address: 8# Nanyi Street, Xinggong Road, Longxing Industrial District, Shaxi Town, Zhongshan,

Guangdong, China 528471

Telephone: (86) 0760-87336328

Fax: 0760-87332108

#### 1.3 Description of EUT

Product: Remote Control – Transmitter

Manufacturer: DawnSun Electronic Technology Co., Ltd. Zhongshan

Address: 8# Nanyi Street, Xinggong Road, Longxing Industrial District, Shaxi Town,

Zhongshan, Guangdong, China 528471

Brand Name: N/A

Model Number: TX006,TX006-R Rating: DC9V (Battery)

Operation Frequency: 315MHz Modulation Type: OOK

Antenna Designation PCB Antenna with Gain 0dBi

#### 1.4 Submitted Sample

2 Samples

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1605243 Page 5 of 35

Date: 2016-05-31



1.5 Test Duration 2016-05-25 to 2016-05-30

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0	Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2015-08-23	2016-08-22		
System Controller	CT	SC100	-	2015-08-23	2016-08-22		
Power Amplifier	AR	150W1000	300999	2015-08-23	2016-08-22		
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2015-08-23	2016-08-22		
3m OATS			N/A	2015-08-23	2016-08-22		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2015-08-23	2016-08-22		

Report No: FCC1605243 Page 6 of 35

Date: 2016-05-31



#### 3.0 Technical Details

# 3.1 Summary of test results

# The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna	PASS	Compliant
	requirements		
FCC Part 15, Paragraph 15.207	Conducted	PASS	N/A
	Emission Test		
FCC Part 15, Paragraph 15.209	General	PASS	Compliant
rec Fait 13, Faiagraph 13.209	Requirement	TASS	Сопірпані
	Radiated		
FCC Part 15, Paragraph 15.231 (b)	Emission Test	PASS	Compliant
FCC Part 15, Paragraph 15.231 (c)	20dB	PASS	Compliant
	Bandwidth		
	Testing		
FCC Part 15, Paragraph 15.231 (a) (1)	Deactivate	PASS	Compliant
	Testing		

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2016-05-31



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

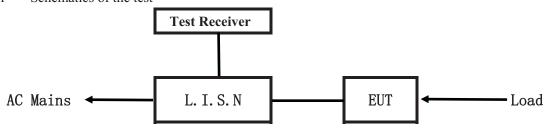


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

#### Block diagram of Test setup

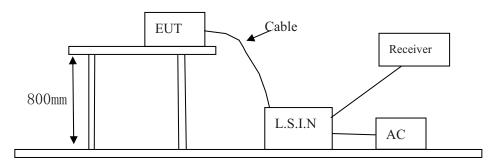

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

Device	Manufacturer	Model	FCC ID
Remote Control –	DawnSun Electronic Technology Co.,	TX006,TX006-R	FCCID: A25-TX006
Transmitter	Ltd. Zhongshan		

#### B. Internal Device

Device	Manufacturer	Model	FCC
			ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC1605243 Page 8 of 35

Date: 2016-05-31



#### C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

# 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class A Limits (dB µ V)		Class B Limits (dB µ V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

Note: Battery operation, this test item not applicable.

Date: 2016-05-31



#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Date: 2016-05-31



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

# A FCC Part 15 Subpart C Paragraph 15.231 Limit

Fundamental Frequency (MHz)	Field Strength of		Field Strength of Spurious	
	Fundamental		Emission	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66-40.70	2250	67.04	225	47.04
70-130	1250	61.94	125	41.94
130-174	1250-3370	61.94-70.55	125-375	41.94-51.48
174-260	3750	71.48	375	51.48
260-470	3750-12500	71.48-81.94	375-1250	51.48-61.94
Above 470	12500	81.94	1250	61.94

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4. Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges

# B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz. As to 1G-5G, the final emission level got using PK detector. And Average Value = peak(dBuV/m)+duty cycle factor(dB)
- 6. New batteries were installed in the equipment under test for radiated emission testing.

Report No: FCC1605243 Page 11 of 35

Date: 2016-05-31



#### 6.5 Test result

# A Fundamental Radiated Emission Data

Product:	Remote Control-Transmitter	Test Mode:	Keeping Tx transmitting
Test Item:	Fundamental Radiated Emission and Spurious Emission Data	Temperature:	25℃
Test Voltage:	9V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
315	83.8/74.3	Horizontal	95.62/75.62	-11.82/-1.32
315	77.9/68.4	Vertical	95.62/75.62	-17.72/-7.22
630	53.9/44.4	Horizontal	75.62/55.62	-21.72/-11.22
630	48.5/39.0	Vertical	75.62/55.62	-27.12/-16.62
945	52.9/43.4	Horizontal	75.62/55.62	-22.72/-12.22
945	49.5/40.0	Vertical	75.62/55.62	-26.12/-15.62

Note: Average = peak(dBuV/m) + duty cycle factor(dB)

AV=PK-9.5

Report No: FCC1605243 Page 12 of 35

Date: 2016-05-31




# B. General Radiated Emission Data and Harmonics Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx Transmitting

**Results:** Pass

Please refer to following diagram for individual

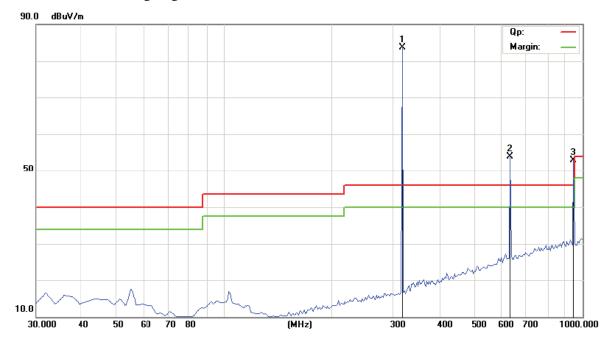


Report No: FCC1605243 Page 13 of 35

Date: 2016-05-31



# Radiated Emission In Vertical (30MHz----1000MHz)

Please refer to following diagram for individual

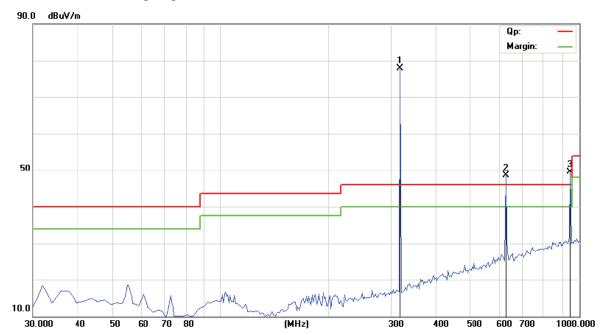

Date: 2016-05-31




# C. General Radiated Emission Data and Harmonics Radiated Emission Data

#### Radiated Emission In Horizontal (1000MHz----6000MHz)

EUT set Condition: Keep Tx Transmitting

**Results:** Pass

Please refer to following diagram for individual

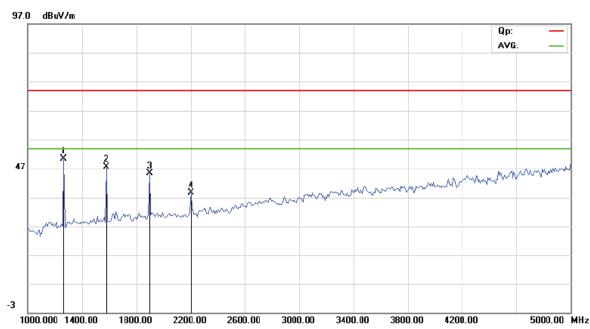

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
1260	50.26/40.76	Н	74(PK)/54(AV)
1575	47.68/38.18	Н	74(PK)/54(AV)
1890	45.39/35.89	Н	74(PK)/54(AV)
2205	38.69/29.19	Н	74(PK)/54(AV)

AV=PK-9.5

Date: 2016-05-31




# C. General Radiated Emission Data and Harmonics Radiated Emission Data

#### Radiated Emission In Vertical (1000MHz----6000MHz)

EUT set Condition: Keep Tx Transmitting

**Results:** Pass

Please refer to following diagram for individual

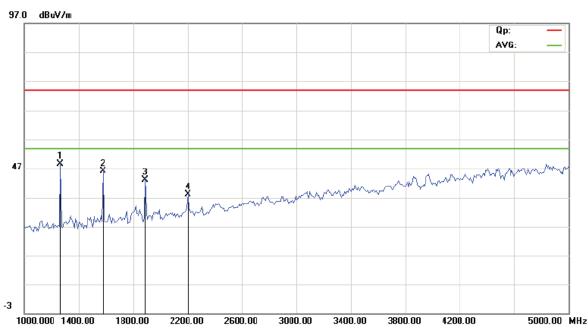

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
1260	48.61/39.11	V	74(PK)/54(AV)
1575	46.09/36.59	V	74(PK)/54(AV)
1890	43.18/33.68	V	74(PK)/54(AV)
2205	38.07/28.57	V	74(PK)/54(AV)

AV=PK-9.5

Report No: FCC1605243 Page 16 of 35

Date: 2016-05-31



# 7.0 20dB Bandwidth Testing

# 7.1 Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

# 7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

#### 7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
315	149	787.5	Pass

Limit=Frequency x 0.25%=315 x 0.25%=787.5kHz


Refer to attached plots:

Report No: FCC1605243 Page 17 of 35

Date: 2016-05-31



#### 20dB Bandwidth

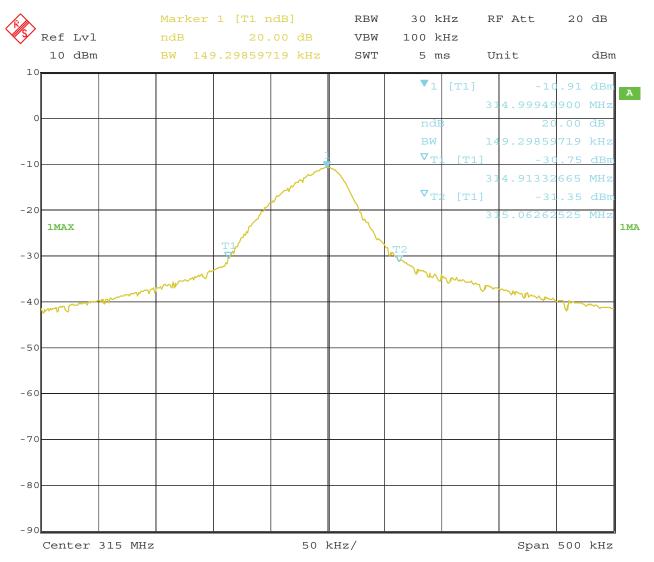

Date: 26.MAY.2016 12:09:33

Report No: FCC1605243 Page 18 of 35

Date: 2016-05-31




#### 8.0 Deactivate Test

# 8.1 Requirement

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

# 8. 2 Radiated Test Setup

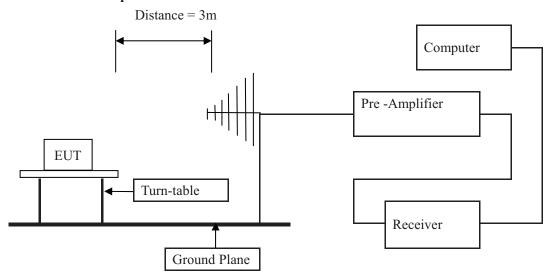

For the actual test configuration, please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2014. The specification used was the FCC 15.231(a) limits.

#### 8.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.


# 8.4 Test Data

#### Refer to attached plots:

Report No: FCC1605243 Page 19 of 35

Date: 2016-05-31



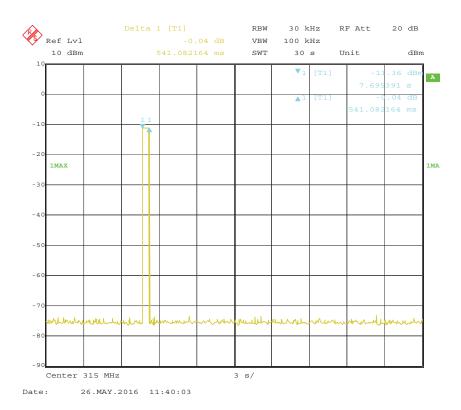

Report No: FCC1605243 Page 20 of 35

Date: 2016-05-31



# 9.0 Duty Cycle

#### **9.1** Limit

No dedicated limit specified in the Rules

#### 9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW=VBW=100kHz, Span=0Hz, Adjust Sweep=100ms.
- 5. Repeat above procedures until all frequency measured were complete.

#### 9.3 Test Data

#### Base on the worst case

Tp = 42.49 msTon1 = 0.351\*11

Ton1 = 0.351\*11 = 3.861(ms)

Ton2 = 0.741\*14=10.374(ms)

Duty cycle=Ton/Tp=14.235/42.49=0.335

Duty cycle factor = 20 \* log (duty cycle) = 20 \* log (0.335) = -9.50dB

Report No: FCC1605243 Page 21 of 35

Date: 2016-05-31



Delta 2 [T1] RBW 100 kHz RF Att 20 dB Ref Lvl VBW 100 kHz 10 dBm 55.711423 ms SWT 100 ms Unit dBm 10 449 ms SGL 453 1MA -30 -40 -50 -60 -80 Center 315 MHz 10 ms/

Date: 26.MAY.2016 12:05:46

Report No: FCC1605243 Page 22 of 35

Date: 2016-05-31



Marker 2 [T1] RBW 100 kHz RF Att 20 dB Ref Lvl VBW 100 kHz 10 dBm 36.392786 ms SWT 40 ms Unit dBm 10 SGL 6.973948 ms -10 -20 1MAX 1MA -30 -40 -50 -60 -80 - 90 Center 315 MHz 4 ms/


Date: 26.MAY.2016 12:11:54

Report No: FCC1605243 Page 23 of 35

Date: 2016-05-31



Ton 1

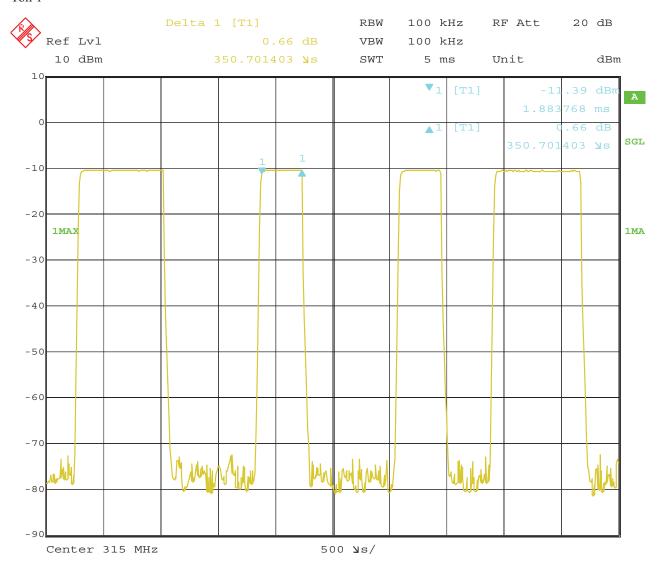


Date: 26.MAY.2016 11:47:45

Report No: FCC1605243 Page 24 of 35

Date: 2016-05-31



Ton 2

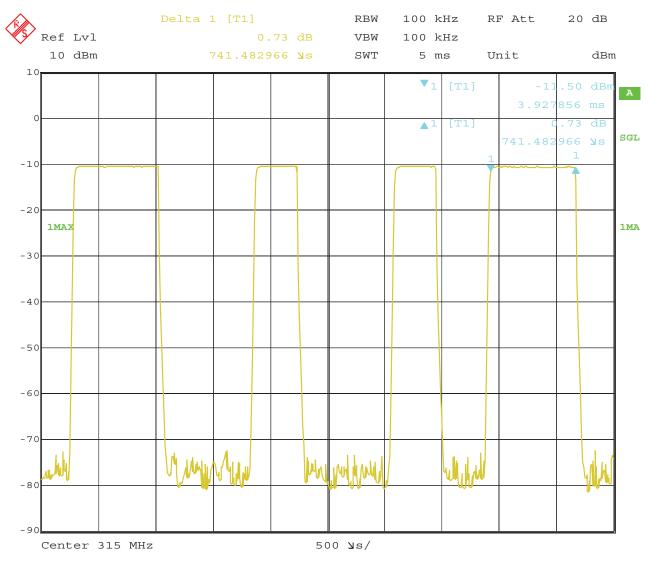

Date: 26.MAY.2016 11:47:24

Report No: FCC1605243 Page 25 of 35

Date: 2016-05-31



# 10 Antenna Requirements

# 10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 10.2 Antenna Connected constructions

The antenna is PCB Printed antenna which is built-in. The antenna gain is 0dBi. So it meets the requirement of 15.203

Report No: FCC1605243 Page 26 of 35

Date: 2016-05-31




#### 11.0 FCC ID Label

#### FCC ID: A25-TX006

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

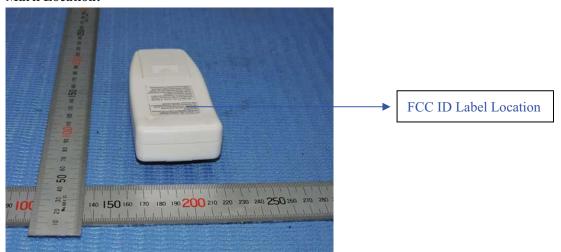

Page 27 of 35

Report No: FCC1605243

Date: 2016-05-31



#### 12.0. Photo of testing

# 12.1 Conducted test View—N/A

# 12.2 Radiated emission test view—N/A





Date: 2016-05-31



#### Photo for the EUT for model TX006 and TX006-R 12.3





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-31



# Photo for the EUT for model TX006 and TX006-R





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-31



# Photo for the EUT for model TX006 and TX006-R





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-31



#### Photo for the EUT for model TX006 and TX006-R





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 32 of 35

Report No: FCC1605243

Date: 2016-05-31



#### Photo for the EUT- for model TX006






The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-31



# Photo for the EUT-for model TX006

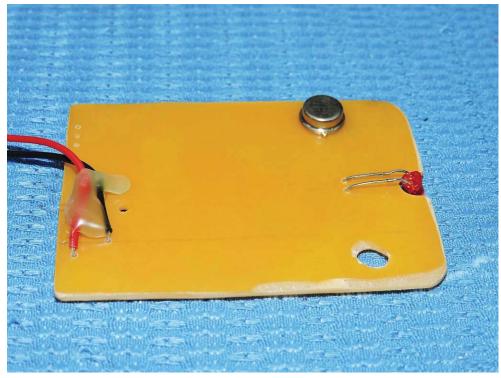



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC1605243 Page 34 of 35

Date: 2016-05-31




# Photo for the EUT- for model TX006

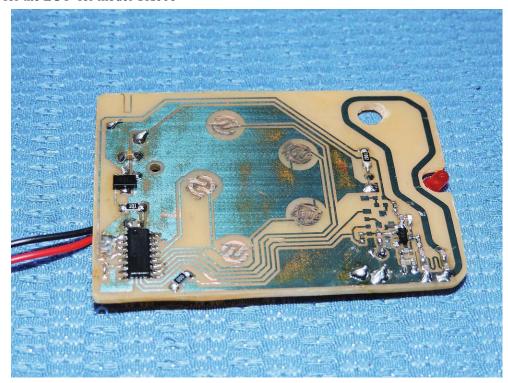

Date: 2016-05-31



#### Photo for the EUT- for model TX006-R

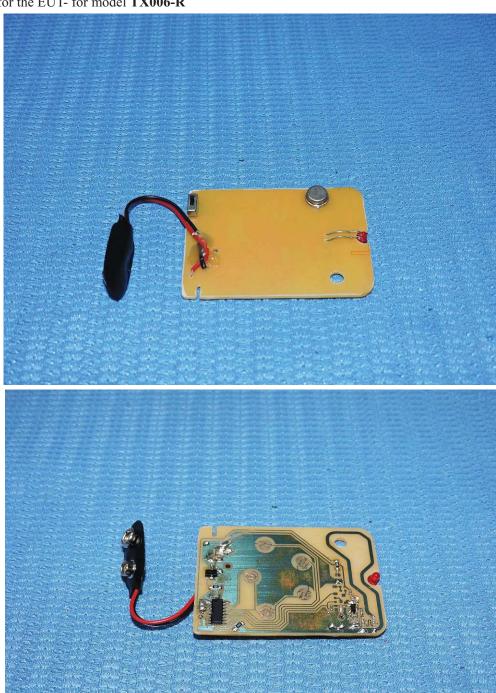

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.