




# RADIO TEST REPORT

**Test Report No. : 13332972S-A-R2**

**Applicant** : ALPINE ELECTRONICS, INC.  
**Type of EUT** : Display Unit  
**Model Number of EUT** : GABI01  
**FCC ID** : A269ZUA152  
**Test regulation** : FCC Part 15 Subpart C: 2020  
"For Permissive Change  
(Radiated Spurious: Emission tests only)"  
**Test Result** : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 13332972S-A-R1. 13332972S-A-R1 is replaced with this report.

**Date of test:** May 3 to 8, 2020

**Representative test engineer:**   
Shiro Kobayashi  
Engineer  
Consumer Technology Division

**Approved by:**   
Hikaru Shirasawa  
Engineer  
Consumer Technology Division



CERTIFICATE 1266.03

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Report Cover Page 13-EM-F0429 Issue # 16.0

## REVISION HISTORY

**Original Test Report No.: 13332972S-A**

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13332972S-A	June 4, 2020	-	-
1	13332972S-A-R1	June 16, 2020	1	Deletion of description: Test item: Radiated emission Addition of remarks "For Permissive Change (Radiated Spurious: Emission tests only)"
			9	Addition of remarks: "* Pre-check has been performed with Tag and without Tag, and measurement was conducted with the worst case with Tag."
			11	Addition of description: "The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit."
			17	Correction of typo: "Below 1 GHz" and "Above 1 GHz" → "Below 30 MHz" and "Above 30 MHz"
2	13332972S-A-R2	June 23, 2020	5	Addition of remarks to Section 2: "The original test report was performed with a model of a car to install (E2UL)." and "* In this test report, the test had been conducted with a model of a car to install (C1UL)."

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

**UL Japan, Inc.****Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Contents**

	<b><u>Page</u></b>
<b>SECTION 1: Customer information .....</b>	<b>5</b>
<b>SECTION 2: Equipment under test (E.U.T.) .....</b>	<b>5</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>6</b>
<b>SECTION 4: Operation of E.U.T. during testing.....</b>	<b>9</b>
<b>SECTION 5: Radiated emission .....</b>	<b>10</b>
<b>APPENDIX 1: Data of Radio tests.....</b>	<b>13</b>
<b>APPENDIX 2: Test instruments .....</b>	<b>16</b>
<b>APPENDIX 3: Photographs of test setup.....</b>	<b>17</b>

## **SECTION 1: Customer information**

Company Name : Alpine Electronics, Inc.  
Address : 20-1 Yoshima-Industrial Park, Iwaki, Fukushima 970-1192, Japan  
Telephone Number : +81-246-36-4111  
Facsimile Number : +81-246-36-6898  
Contact Person : Nobuyuki Omi

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT)
- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Display Unit  
Model No. : GABI01  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 13.5 V  
Receipt Date of Sample : April 28, 2020  
(Information from test lab.)  
Country of Mass-production : China, Mexico  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product description**

Model: GABI01(referred to as the EUT in this report) is a Display Unit.

The original test report was performed with a model of a car to install (E2UL).

This EUT is a variant model of original filing. The difference is only a model of a car to install (C1UL, C1TL).

\* In this test report, the test had been conducted with a model of a car to install (C1UL).

### **General Specification**

Clock frequency(ies) in the system : Ucom: 8 MHz/ NFC: 13.56 MHz/ Xta: 27.12 MHz

### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 13.56 MHz  
Modulation : ASK  
Antenna type : Loop  
Operating Temperature : -40 deg.C to +85 deg C.

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test specification**

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on April 1, 2020 and effective June 1, 2020 except 15.258  
\* The revision does not affect the test result conducted before its effective date.

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.209 Radiated emission limits, general requirements  
Section 15.215 Additional provisions to the general radiated emission limitations.  
Section 15.225 Operation within the bands 13.110 - 14.010 MHz.

### **3.2 Procedures & Results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 6.4, 6.12	FCC: Section 15.225 (a) IC: RSS-210 B.6	72.7 dB (Vertical)	Complied a)	Radiated
Electric Field Strength of Spurious Emission (within the 13.110-14.010 MHz band)	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 6.4, 6.13	FCC: Section 15.225 (b)(c) IC: RSS-210 B.6	44.0 dB (14.010 MHz, Horizontal & Vertical)	Complied a)	Radiated
Electric Field Strength of Spurious Emission (outside of the 13.110-14.010 MHz band)	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 6.4, 6.13	FCC: Section 15.209 Section 15.225 (d) IC: RSS-210 B.6	4.7 dB (40.68 MHz, Vertical)	Complied b)	Radiated
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.					
a) Refer to APPENDIX 1 (data of Electric field strength of Fundamental emission and Spurious emission within the band)					
b) Refer to APPENDIX 1 (data of Radiated Emission)					
Symbols:					
Complied The data of this test item has enough margin, more than the measurement uncertainty.					
Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.					

#### **FCC Part 15.31 (e)**

This EUT provides stable voltage constantly to RF part regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the requirement.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4,5,6,8 SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.6 dB	2.6 dB	2.5 dB	2.6 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.0 dB	3.0 dB	3.0 dB	-
	30 MHz-200 MHz	4.6 dB	4.6 dB	4.6 dB	-
	200 MHz-1 GHz	6.0 dB	6.0 dB	6.0 dB	-
	1 GHz-6 GHz	4.9 dB	4.9 dB	4.9 dB	-
	6 GHz-18 GHz	5.5 dB	5.5 dB	5.5 dB	-
	18 GHz-40 GHz	5.4 dB	5.4 dB	5.4 dB	-
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.8 dB	5.8 dB	5.8 dB	-
	18 GHz-40 GHz	5.7 dB	5.7 dB	5.7 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.98 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	1.75 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.89 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.12 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.06 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.24 dB
Spurious emission (Conducted) below 1GHz	0.9 dB
Spurious emission (Conducted) 1 GHz-3 GHz	0.9 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.9 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.6 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.0 dB
Bandwidth Measurement	0.07 %
Duty cycle and Time Measurement	0.262 %
Temperature	0.95 deg.C.
Voltage	0.83 %

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03 (FCC Test Firm Registration Number: 626366, ISED Lab Company Number: 2973D)

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	2.55 x 4.1 x 2.5	-	-

### 3.6 Test setup, Data of EMI & Test instruments

Refer to APPENDIX.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## SECTION 4: Operation of E.U.T. during testing

### 4.1 Operating mode


The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Test sequence is used: Transmitting (13.56 MHz)

Power settings	Fixed
Software	MY20 C1UL
Version	Ver. 1.600
Date	May 3, 2020

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

### 4.2 Configuration of tested system

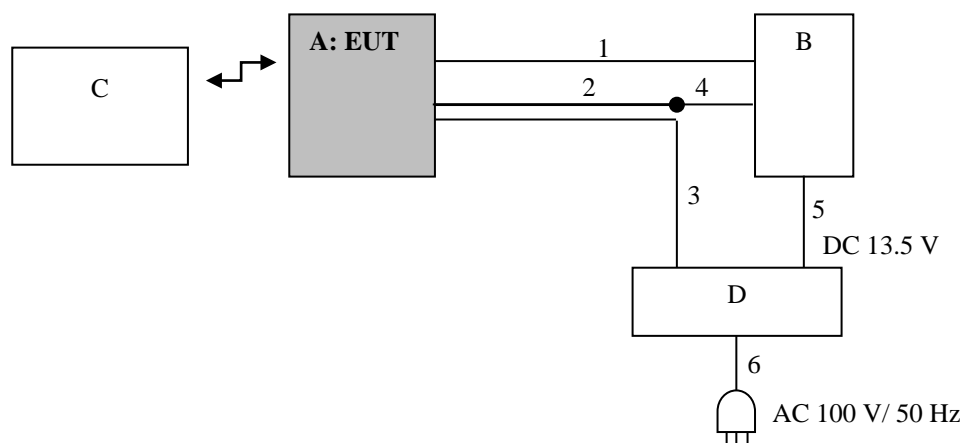

\* Test data was taken under worse case conditions.

\* Pre-check has been performed with Tag and without Tag, and measurement was conducted with the worst case with Tag.

#### Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Display Unit	GABI01	1	Alpine Electronics, Inc.	EUT
B	CAN BOX	-	-	Alpine Electronics, Inc.	-
C	Tag	NFC Forum Type2	TU-C1-E52349	-	-
D	Power Supply(DC)	PAN35-10A	NA000955	KIKUSUI	-

#### List of cables used

No.	Cable	Length (m)	Shield-Cable	Shield-Connector	Remarks
1	Signal	5.1	Unshielded	Unshielded	-
2	Signal	5.1	Unshielded	Unshielded	-
3	DC	5.1	Unshielded	Unshielded	-
4	Signal	0.45	Unshielded	Unshielded	-
5	DC	0.3	Unshielded	Unshielded	-
6	AC	2.0	Unshielded	Unshielded	-

### UL Japan, Inc. Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## **SECTION 5: Radiated emission**

### **5.1 Operating environment**

Test place : See test data (APPENDIX 1)

Temperature : See test data (APPENDIX 1)

Humidity : See test data (APPENDIX 1)

### **5.2 Test configuration**

EUT was placed on a platform of nominal size, 1.0 m by 1.5 m, raised 80 cm above the conducting ground plane. That has very low permittivity.

Photographs of the set up are shown in APPENDIX 3.

### **5.3 Test procedure**

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane at a distance of 3 m.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788. These tests were performed in semi anechoic chamber. Therefore the measured level of emissions may be higher than if measurements were made without a ground plane. However test results were confirmed to pass against standard limit.

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3 m.

Frequency: From 9 kHz to 30 MHz at distance 3 m (Refer to Figure 2)

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg. and 135 deg.) and horizontal polarization. Drawing of the antenna direction is shown in Figure 1.

Frequency: From 30 MHz to 1 GHz at distance 3 m (Refer to Figure 2).

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

	9 kHz to 90 kHz & 110 kHz to 150 kHz	90 kHz to 110 kHz	150 kHz to 490 kHz	490 kHz to 30 MHz	30 MHz to 1 GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	10 kHz	9 kHz	120 kHz
Distance factor *1)	-80 dB	-80 dB	-80 dB	-40 dB	-
Measuring antenna	Loop antenna				Biconical (30 MHz - 199.99 MHz) Logperiodic (200 MHz - 1 GHz)

\*1) FCC 15.31 (f)(2) (9 kHz-30 MHz)

Distance Factor:  $40 \times \log (3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

Distance Factor:  $40 \times \log (3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

The EUT was set at 51.5 degree (on the condition that the horizontal plane is set to 0 deg.) as normal position according to the EUT's specification.

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y - 51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

**Figure 1: Direction of the Loop Antenna**

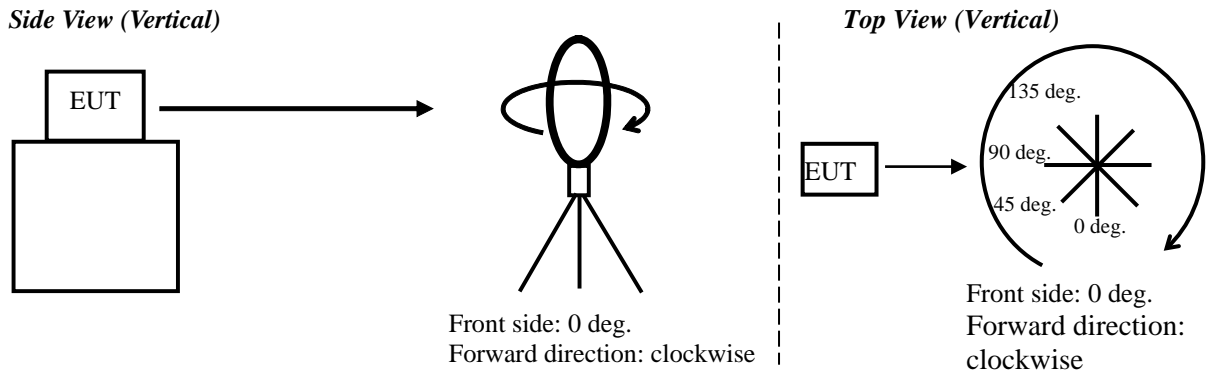


**Top View (Horizontal)**

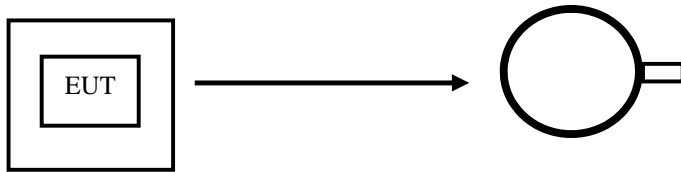


Antenna was not rotated.

**Figure 2. Antenna angle**

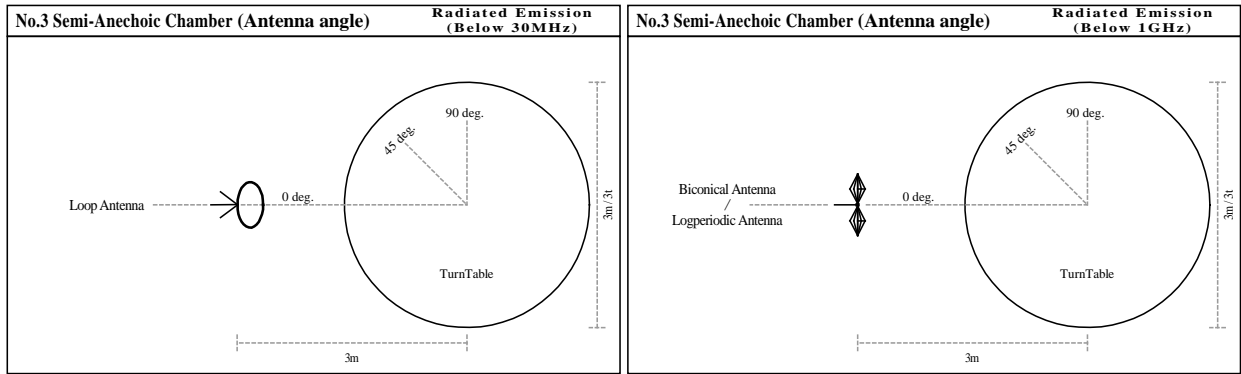

[Test Setup]  
Below 1 GHz

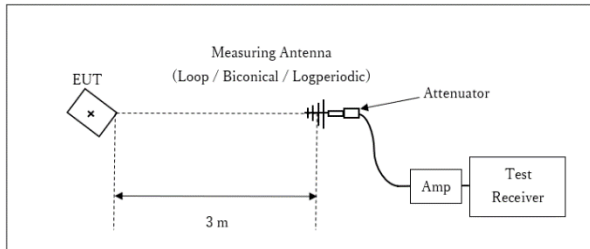

× : Center of turn table

Test Distance: 3 m

**5.4 Results**

Summary of the test results : Pass

Refer to APPENDIX 1

**APPENDIX 1: Data of Radio tests****Data of Electric field strength of Fundamental emission and Spurious emission within the band: FCC15.225(a)(b)(c)**

UL Japan, Inc.  
Shonan EMC Lab., No.3 Semi Anechoic Chamber

Company:	Alpine Electronics, Inc.	Regulation:	FCC Part15 Subpart C 15.225
Equipment:	Display Unit	Test Distance:	3 m
Model:	GABI01	Date:	May 03, 2020      May 08, 2020
Sample No.:	1	Temperature:	23 deg.C      22 deg.C
Power:	DC 13.5 V	Humidity:	50 %RH      40 %RH
Mode:	Transmitting 13.56 MHz	ENGINEER:	Toshinori Yamada    Shiro Kobayashi

Remarks: : Tag Type 2 , Vertical polarization (antenna angle) of the worst case: 0 deg

**Fundamental emission**

No.	FREQ [MHz]	Test Receiver Reading		Antenna Factor [dB/m]	Loss [dB]	AMP GAIN [dB]	Distance factor [dB]	RESULT		LIMIT (30m) [dBuV/m]	MARGIN	
		Hor [dBuV]	Ver [dBuV]					Hor [dBuV/m]	Ver [dBuV/m]		Hor [dB]	Ver [dB]
1	13.560	48.98	56.11	20.91	6.36	32.19	-40.00	4.06	11.19	83.9	79.8	72.7

Calculation:Result[dBuV/m]=Reading[dBuV]+Ant.Fac[dB/m]+Loss(Cable+ATT)[dB]-Gain(AMP)[dB]+Distance factor[dB]

Distance factor: 40 x log (3 m/30 m) = -40 dB

Limits (30 m)

•13.553 MHz to 13.567 MHz : 83.9 dBuV/m (FCC 15.225(a))

**Spurious emission within the band**

No.	FREQ [MHz]	Test Receiver Reading		Antenna Factor [dB/m]	Loss [dB]	AMP GAIN [dB]	Distance factor [dB]	RESULT		LIMIT (30m) [dBuV/m]	MARGIN	
		Hor [dBuV]	Ver [dBuV]					Hor [dBuV/m]	Ver [dBuV/m]		Hor [dB]	Ver [dB]
1	13.110	30.30	30.20	20.84	6.36	32.19	-40.00	-14.69	-14.79	29.5	44.1	44.2
2	13.349	31.20	33.80	20.88	6.36	32.19	-40.00	-13.75	-11.15	40.5	54.2	51.6
3	13.410	30.40	30.40	20.89	6.36	32.19	-40.00	-14.54	-14.54	40.5	55.0	55.0
4	13.456	30.40	31.30	20.90	6.36	32.19	-40.00	-14.53	-13.63	50.4	64.9	64.0
5	13.469	30.60	31.70	20.90	6.36	32.19	-40.00	-14.33	-13.23	50.4	64.7	63.6
6	13.472	30.40	32.00	20.90	6.36	32.19	-40.00	-14.53	-12.93	50.4	64.9	63.3
7	13.553	36.60	41.40	20.91	6.36	32.19	-40.00	-8.32	-3.52	50.4	58.7	53.9
6	13.567	38.10	43.30	20.91	6.36	32.19	-40.00	-6.82	-1.62	50.4	57.2	52.0
7	13.653	30.40	31.50	20.93	6.37	32.19	-40.00	-14.49	-13.39	50.4	64.8	63.7
8	13.668	30.20	31.10	20.93	6.37	32.19	-40.00	-14.69	-13.79	50.4	65.0	64.1
9	13.710	30.30	30.30	20.94	6.37	32.19	-40.00	-14.58	-14.58	40.5	55.0	55.0
10	13.772	30.70	32.90	20.95	6.37	32.19	-40.00	-14.17	-11.97	40.5	54.6	52.4
11	14.010	30.30	30.30	20.98	6.37	32.19	-40.00	-14.54	-14.54	29.5	44.0	44.0

Calculation:Result[dBuV/m]=Reading[dBuV]+Ant.Fac[dB/m]+Loss(Cable+ATT)[dB]-Gain(AMP)[dB]+Distance factor[dB]

Outside filed strength frequencies

- Fc±7 kHz: 13.553 MHz to 13.567 MHz
  - Fc±150 kHz: 13.410 MHz to 13.710 MHz
  - Fc±450 kHz: 13.110 MHz to 14.010 MHz
- Fc = 13.56MHz

Limits (30 m)

- 13.410 MHz to 13.553 MHz and 13.567 MHz to 13.710 MHz : 50.4 dBuV/m (FCC 15.225(b))
- 13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz : 40.5 dBuV/m (FCC 15.225(c))
- Below 13.110 MHz and Above 14.010 MHz : 29.5 dBuV/m (FCC 15.225(d)and FCC 15.209)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa, Japan 259-1220

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

UL Japan, Inc.

Shonan EMC Lab. No.3 Semi Anechoic Chamber

Company: Alpine Electronics, Inc.	Regulation: FCC Part15 Subpart C 15.225
Equipment: Display Unit	Test Distance: 3 m
Model: GABI01	Date: May 03, 2020    May 08, 2020
Sample No.: 1	Temperature: 23 deg.C    22 deg.C
Power: DC 13.5 V	Humidity: 50 %RH    40 %RH
Mode: Transmitting 13.56 MHz	ENGINEER: Toshinori Yamad Shiro Kobayashi
EUT axis: Below 30 MHz, Tag Type 2, Vertical polarization (antenna angle) of the worst case: 90 deg	
Above 30 MHz, Tag Type 2	

Remarks:

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	27.12	QP	29.60	22.33	6.62	32.18	-40.0	-13.63	29.5	43.1	-	10	* Limit: 30 m
Hori.	40.68	QP	38.43	14.45	6.65	32.17	0.0	27.36	40.0	12.6	278	162	
Hori.	176.29	QP	31.77	16.17	7.81	32.06	0.0	23.69	43.5	19.8	173	35	
Hori.	195.296	QP	25.75	16.52	7.80	32.05	0.0	18.02	43.5	25.4	155	127	
Hori.	257.644	QP	39.22	12.09	8.30	31.98	0.0	27.63	46.0	18.3	131	264	
Hori.	865.665	QP	33.20	21.80	10.72	31.23	0.0	34.49	46.0	11.5	100	16	
Hori.	881.419	QP	32.23	21.95	10.76	31.15	0.0	33.79	46.0	12.2	100	2	
Hori.	908.54	QP	32.48	22.07	10.85	30.98	0.0	34.42	46.0	11.5	100	1	
Hori.	935.657	QP	31.00	21.98	10.93	30.76	0.0	33.15	46.0	12.8	100	3	
Hori.	962.782	QP	33.35	22.22	11.03	30.51	0.0	36.09	53.9	17.8	100	3	
Vert.	27.12	QP	29.50	22.33	6.62	32.18	-40.00	-13.73	29.5	43.2	-	15	* Limit: 30 m
Vert.	40.68	QP	46.35	14.45	6.65	32.17	0.00	35.28	40.0	<b>4.7</b>	100	88	
Vert.	67.80	QP	44.90	6.80	6.62	32.15	0.00	26.17	40.0	13.8	100	98	
Vert.	94.920	QP	40.31	9.09	7.44	32.14	0.00	24.70	43.5	18.8	100	102	
Vert.	153.912	QP	22.40	14.91	7.81	32.08	0.00	13.04	43.5	30.4	100	124	
Vert.	176.284	QP	31.46	16.17	7.81	32.06	0.00	23.38	43.5	20.1	100	1	
Vert.	257.646	QP	33.79	12.09	8.30	31.98	0.00	22.20	46.0	23.8	209	189	
Vert.	618.33	QP	29.77	19.50	9.86	31.94	0.00	27.19	46.0	18.8	100	223	
Vert.	865.67	QP	32.84	21.80	10.72	31.23	0.00	34.13	46.0	11.8	128	193	

Result = Reading + Ant Factor + Loss (Cable+ATT+ΔAF(above 30 MHz)) - Gain(Amprifier) + Distance factor(below 30 MHz)



\* Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

\* Carrier level (Result at 3 m): Hor= 44.1 dBuV/m, Ver= 51.2 dBuV/m

# Radiated Emission (Worst mode plot)

UL Japan, Inc.  
Shonan EMC Lab. No.3 Semi Anechoic Chamber

<p>Company: Alpine Electronics, Inc.                  Equipment: Display Unit                  Model: GABI01                  Sample No.: 1                  Power: DC 13.5 V                  Mode: Transmitting 13.56 MHz                  EUT axis: Below 30 MHz, Tag Type 2, Vertical polarization (antenna angle) of the worst case: 90 deg                  Above 30 MHz, Tag Type 2                  Remarks: These plots data contains sufficient number to show the trend of characteristic features for EUT.</p>	<p>Regulation: FCC Part15 Subpart C 15.225                  Test Distance: 3 m                  Date: May 03, 2020    May 08, 2020                  Temperature: 23 deg.C    22 deg.C                  Humidity: 50 %RH    40 %RH                  ENGINEER: Toshinori Yamad Shiro Kobayashi</p>	
--	--	--

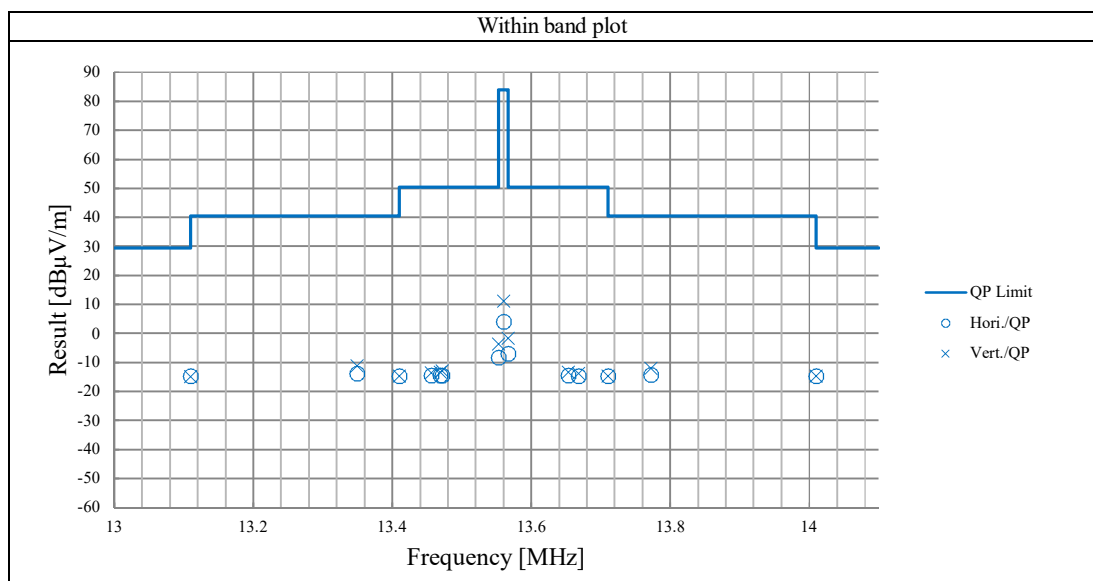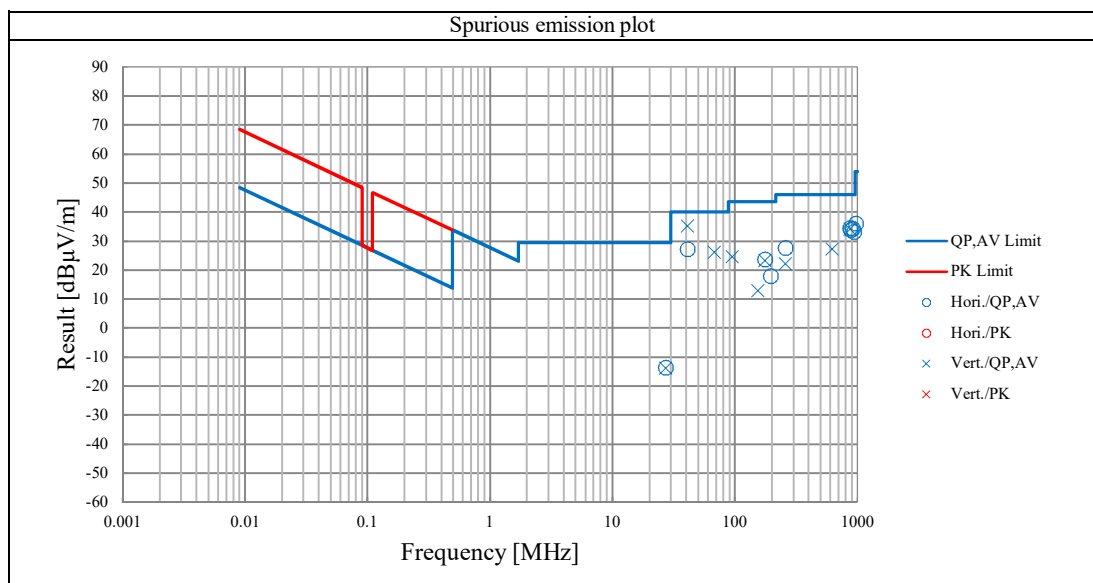

**APPENDIX 2: Test instruments****Test Instruments**

Test Name	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Interval (Month)
RE	COTS-SE MI-5	170932	EMI Software	TSJ	TEPTO-DV3(R E,CE,ME,PE)	-	-	-
RE	KBA-01	146343	Biconical Antenna	Schwarzbeck Mess - Elektronik	BBA9106	1748	2019/06/05	12
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	SAEC-03 (NSA)	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2020/04/12	12
RE	SAF-03	145126	Pre Amplifier	SONOMA	310N	290213	2020/02/19	12
RE	SAT6-13	167094	Attenuator	JFW	50HF-006N	-	2020/02/21	12
RE	SAT6-15	167096	Attenuator	JFW	50HF-006N	-	2020/02/21	12
RE	SCC-C1/ C2/C3/C4 /C5/C10/ SRSE-03	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner /Suhner/Suhner/ TOYO	8D2W/12DSFA /141PE/141PE/1 41PE/141PE/NS 4906	-/0901-271(RF Selector)	2020/04/12	12
RE	SCC-M1	194601	Coaxial Cable	Fujikura	5D-2W	-	2019/12/17	12
RE	SLA-05	145527	Logperiodic Antenna	Schwarzbeck Mess - Elektronik	VUSLP9111B	193	2020/04/04	12
RE	SOS-23	191840	Humidity Indicator	CUSTOM	CTH-201	-	2019/12/12	12
RE	STR-08	150463	Test Receiver	Rohde & Schwarz	ESW44	101581	2019/11/22	12
RE	STS-03	146210	Digital Hitester	Hioki	3805-50	80997823	2019/10/01	12
RE	TLP-05	174863	Loop Antenna	Rohde & Schwarz	HFH2-Z2	826532/009	2019/11/12	12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test item: RE: Radiated Emission test**