

RADIO TEST REPORT

Test Report No. 14911698S-A-R1

Customer	ALPS ALPINE CO., LTD.
Description of EUT	Head unit
Model Number of EUT	AH00ICB
FCC ID	A269ZUA165
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	December 4, 2023
Remarks	Bluetooth Low Energy part(s) (except for 1 M-PHY)

Representative Test Engineer



Yosuke Murakami
Engineer

Approved By



Kazuya Noda
Leader



CERTIFICATE 1266.03

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
 There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 22.0

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission.....	13
SECTION 6: Antenna Terminal Conducted Tests	15
APPENDIX 1: Test Data	16
99 % Occupied Bandwidth and 6 dB Bandwidth.....	16
Maximum Peak Output Power	18
Radiated Spurious Emission.....	20
Conducted Spurious Emission.....	26
Power Density	27
APPENDIX 2: Test Instruments	29
APPENDIX 3: Photographs of Test Setup	31
Radiated Spurious Emission.....	31
Antenna Terminal Conducted Tests	32

SECTION 1: Customer Information

Company Name	ALPS ALPINE CO., LTD.
Address	20-1 Yoshima Industrial park, Iwaki, Fukushima, Japan 970-1192
Telephone Number	+81-246-36-4111
Contact Person	Kenji Nagase

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Head unit
Model Number	AH00ICB
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	August 9, 2023
Test Date	August 13 to 21, 2023

2.2 Product Description

General Specification

Rating	DC 13.2 V
Operating temperature	-30 deg. C to +70 deg. C

Radio Specification

Bluetooth

Radio Type	:	Transceiver
Frequency of Operation	:	2402 MHz to 2480 MHz
Antenna type	:	Planar Inverted-F Antenna
Modulation	:	FHSS (GFSK, $\pi/4$ -DQPSK, 8DPSK)
Antenna Gain	:	-0.2 dBi

Bluetooth Low Energy

Radio Type	:	Transceiver
Frequency of Operation	:	2402 MHz to 2480 MHz
Antenna type	:	Planar Inverted-F Antenna
Modulation	:	GFSK
Antenna Gain	:	-0.2 dBi

WLAN 2.4 GHz (IEEE802.11b/g/n-20)

Radio Type : Transceiver
Frequency of Operation : 2412 MHz to 2462 MHz
Antenna type : Planar Inverted-F Antenna
Modulation : DSSS (CCK, DQPSK, DBPSK)
OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Gain : -0.2 dBi

WLAN 5 GHz (IEEE802.11a/n-20/n-40/ac-20/ac-40/ac-80)

Radio Type : Transceiver
Frequency of Operation : 5180 MHz to 5825 MHz
Antenna type : Planar Inverted-F Antenna
Modulation : OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Gain : +2.71 dBi (Chain1)
+2.71 dBi (Chain2)

2.3 Variant model(s)

Model Name	Details
AH00ICB (EUT)	External amplifier model
AH00ICB 1	Internal amplifier model

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISEE: RSS-Gen 8.8	FCC: Section 15.207 ----- ISEE: RSS-Gen 8.8	-	N/A	*1)
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISEE: -	FCC: Section 15.247(a)(2) ----- ISEE: RSS-247 5.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISEE: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ----- ISEE: RSS-247 5.4(d)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISEE: -	FCC: Section 15.247(e) ----- ISEE: RSS-247 5.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISEE: RSS-Gen 6.13	FCC: Section 15.247(d) ----- ISEE: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	8.3 dB 2483.500 MHz, AV, Vertical Mode: Tx BT LE 2 M-PHY 2480 MHz	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
<p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.</p> <p>*1) The test is not applicable since the EUT does not have AC Mains. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p>					

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the RF Part regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted Emission (AC Mains) LISN	150 kHz-30 MHz	3.1 dB
Radiated Emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.3 dB
	30 MHz-200 MHz	4.8 dB
	200 MHz-1 GHz	6.1 dB
	1 GHz-6 GHz	4.7 dB
	6 GHz-18 GHz	5.3 dB
	18 GHz-40 GHz	5.5 dB
Radiated Emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB
	18 GHz-40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector) SPM-06	1.3 dB
Power Measurement above 1 GHz (Peak Detector) SPM-06	2.1 dB
Power Measurement above 1 GHz (Average Detector) SPM-07	1.1 dB
Power Measurement above 1 GHz (Peak Detector) SPM-07	1.2 dB
Power Measurement above 1 GHz (Average Detector) SPM-13	1.1 dB
Power Measurement above 1 GHz (Peak Detector) SPM-13	1.4 dB
Spurious Emission (Conducted) below 1 GHz	0.84 dB
Conducted Emissions Power Density Measurement 1 GHz-3 GHz	0.86 dB
Conducted Emissions Power Density Measurement 3 GHz-18 GHz	2.4 dB
Spurious Emission (Conducted) 18 GHz-26.5 GHz	2.4 dB
Spurious Emission (Conducted) 26.5 GHz-40 GHz	2.2 dB
Bandwidth Measurement	0.012 %
Duty Cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.87 deg.C.
Humidity_SCH-01	3.5 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.7 %
Voltage	0.92 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81-463-50-6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	8.1 x 5.1 x 3.55	8.1 x 5.1	-
Wireless anechoic chamber 1	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
Wireless anechoic chamber 2	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
No.1 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	2.55 x 4.1 x 2.5	-	-
Wireless Shielded room 1	3.0 x 4.5 x 2.7	3.0 x 4.5	-
Wireless Shielded room 2	3.0 x 4.5 x 2.7	3.0 x 4.5	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth Low Energy (BT LE)	2M-PHY Uncoded PHY (2M-PHY), Maximum Packet Size, PRBS9
	Coded PHY S-2 coding(coded_S-2), Maximum Packet Size, PRBS9
	Coded PHY S-8 coding(coded_S-8), Maximum Packet Size, PRBS9
<p>*Power of the EUT was set by the software as follows; Power Setting: 8 (setting value) Software: QRCT (Qualcomm Radio Control Toolkit) v4.0.00195.0 (Date: 2021.10.18, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested Antenna	Tested Frequency
Conducted Spurious Emission,	Tx BT LE, 2M-PHY *1)	-	2440 MHz
Radiated Spurious Emission, Power Density, 6dB Bandwidth, 99% Occupied Bandwidth,	Tx BT LE, 2M-PHY	-	2402 MHz 2440 MHz 2480 MHz
Maximum Peak Output Power *2)	Tx BT LE, 2M-PHY, Tx BT LE, coded_S-2 Tx BT LE, coded_S-8	-	2402 MHz 2440 MHz 2480 MHz
<p>*1) Conducted Spurious emissions for frequencies below 30 MHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands. *2) Coded_S-2 and coded_S-8 were tested only Maximum Peak Output Power. Since the maximum peak output data of 1M-PHY, coded_S-2, and coded_S-8 were compared, and the maximum peak output power(1M-PHY) was considered representative for other tests. (1M-PHY data refer to 13977035S-A and 13977035M-A-R1)</p>			

4.2 Configuration and Peripherals

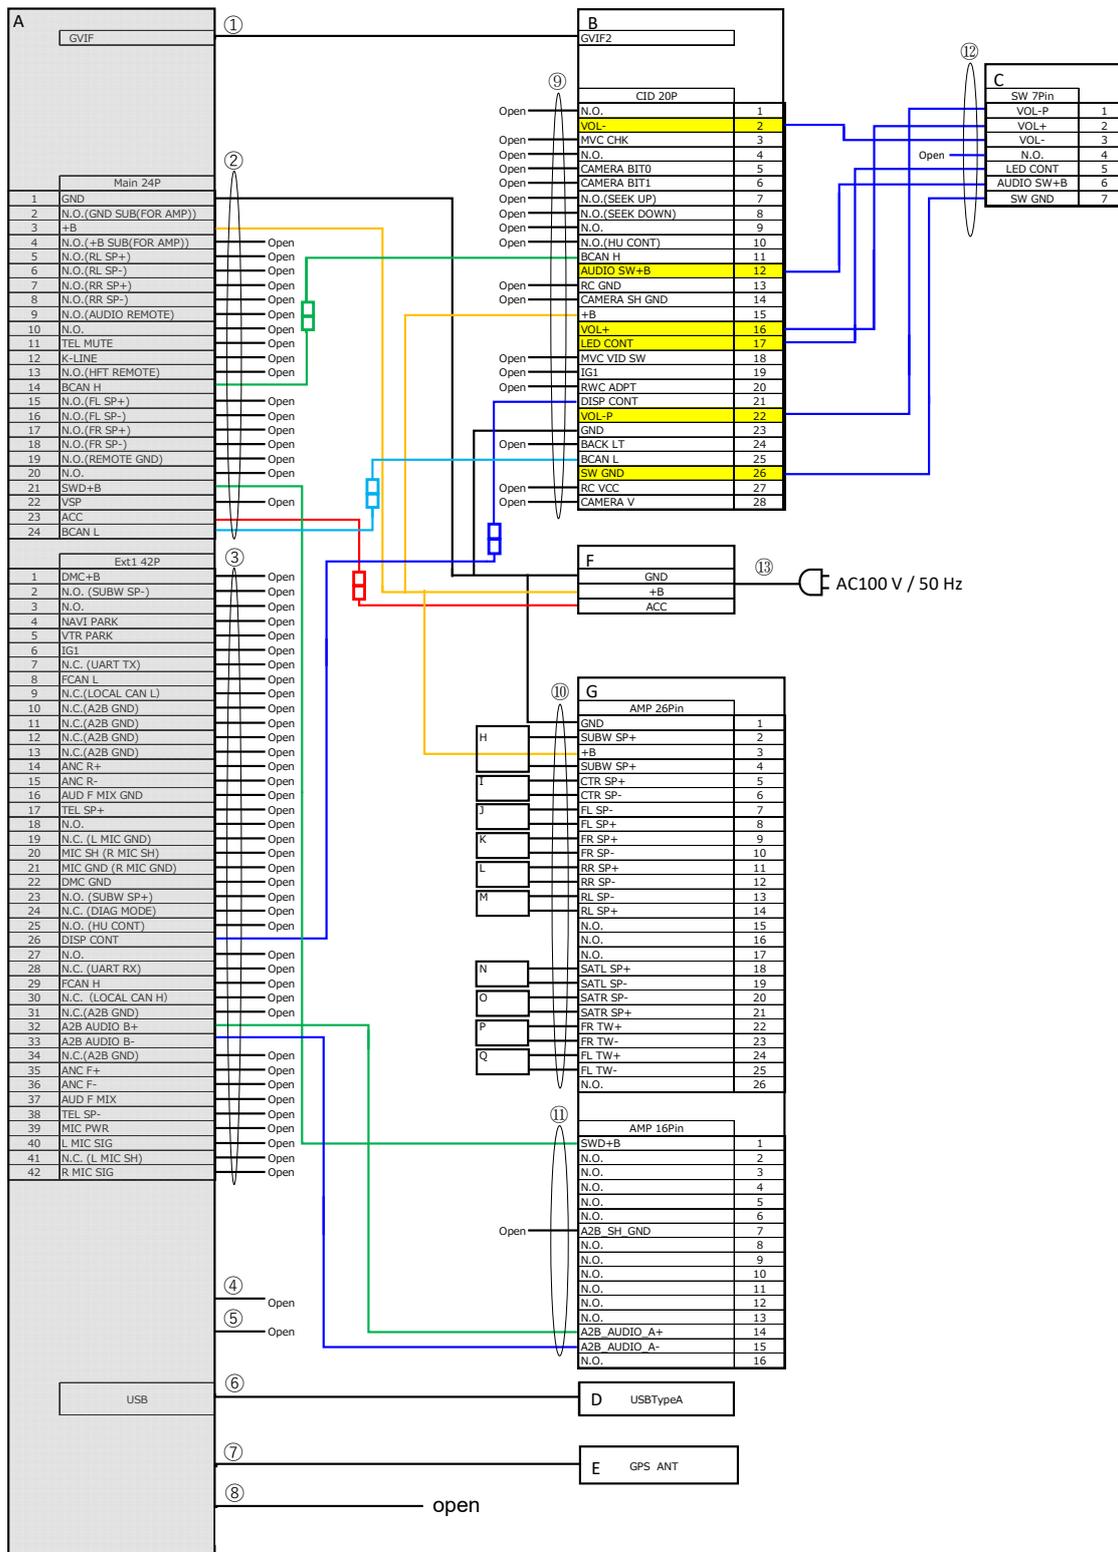

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Head unit	AH001CB	60 *1) 73 *2)	ALPS ALPINE CO., LTD.	EUT
B	Display	QH00159A	99	ALPS ALPINE CO., LTD.	-
C	Switch Unit	SP008GB	-	ALPS ALPINE CO., LTD.	-
D	USB Memory	SDDDC2-064G-G46	-	SanDisk	-
E	GPS Antenna	8B550-T20-A111-M1	19510050	YOKOWO	-
F	DC Power Supply	PAN35-10A	NA000955	KIKUSUI	-
G	Amplifier	8A400-30AA-A01-M1	86427800200496-21118119	BOSE	-
H	Speaker	KFC-RS160	-	JVC KENWOOD	-
I	Speaker	KFC-RS160	-	JVC KENWOOD	-
J	Speaker	KFC-RS160	-	JVC KENWOOD	-
K	Speaker	KFC-RS160	-	JVC KENWOOD	-
L	Speaker	TS-F1030	V44QAH2	Pioneer	-
M	Speaker	TS-F1030	V44QAH2	Pioneer	-
N	Speaker	TS-F1030	V44QBA1	Pioneer	-
O	Speaker	TS-F1030	V44QBA1	Pioneer	-
P	Speaker	LV-002	S11014200775	L&V	-
Q	Speaker	LV-002	S11014200775	L&V	-

*1) Used for Antenna Terminal conducted test

*2) Used for Conducted Emission test and Radiated Emission test

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	GVIIF Cable	2.4	Shielded	-	-
2	Main Harness	2.0	Unshielded	-	-
3	EXT1 Harness	2.0	Unshielded	-	-
4	Ethernet Cable	2.0	Unshielded	-	-
5	EXT2 Cable	2.0	Unshielded	-	-
6	USB Cable	2.3	Shielded	-	-
7	GPS Antenna Cable	2.2+0.5	Shielded	-	-
8	Tuner Cable (Main/Sub)	2.2	Shielded	-	-
9	Display Harness	0.5	Shielded	-	-
10	Amplifier Harness	0.5	Unshielded	-	-
11	Amplifier Harness	0.5	Unshielded	-	-
12	Switch Unit Harness	0.5	Unshielded	-	-
13	AC Power Cable	2.0	Unshielded	-	-

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.2 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

Figure 2: Test Setup


Below 1 GHz

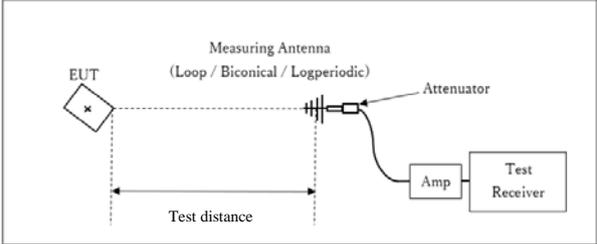

* : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

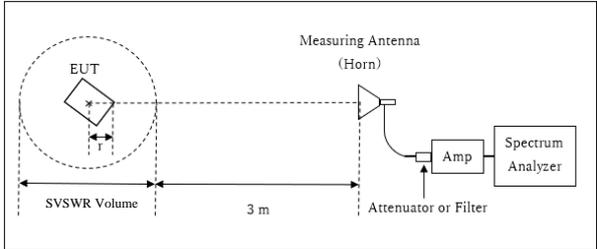


r : Radius of an outer periphery of EUT
 * : Center of turn table

Distance Factor: $20 \times \log(3.89 \text{ m} / 3.0 \text{ m}) = 2.26 \text{ dB}$
 * Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.89 \text{ m}$

SVSWR Volume : 2.0 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.11 \text{ m}$

10 GHz to 26.5 GHz

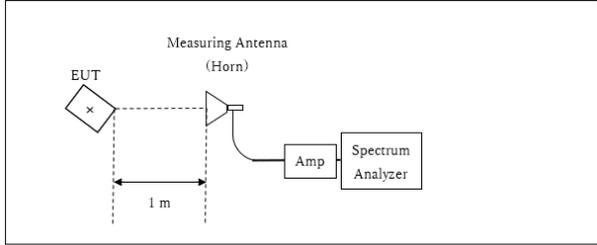

* : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
 *Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
 Test Data : APPENDIX
 Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6dB Bandwidth	5 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed. The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass


APPENDIX 1: Test Data

99 % Occupied Bandwidth and 6 dB Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room
Date August 21, 2023
Temperature / Humidity 21 deg. C / 48 % RH
Engineer Ken Fujita
Mode Tx

BT LE 2 M-PHY

Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	2007.5	1.144	> 0.5000
2440	2007.3	1.147	> 0.5000
2480	2003.0	1.143	> 0.5000

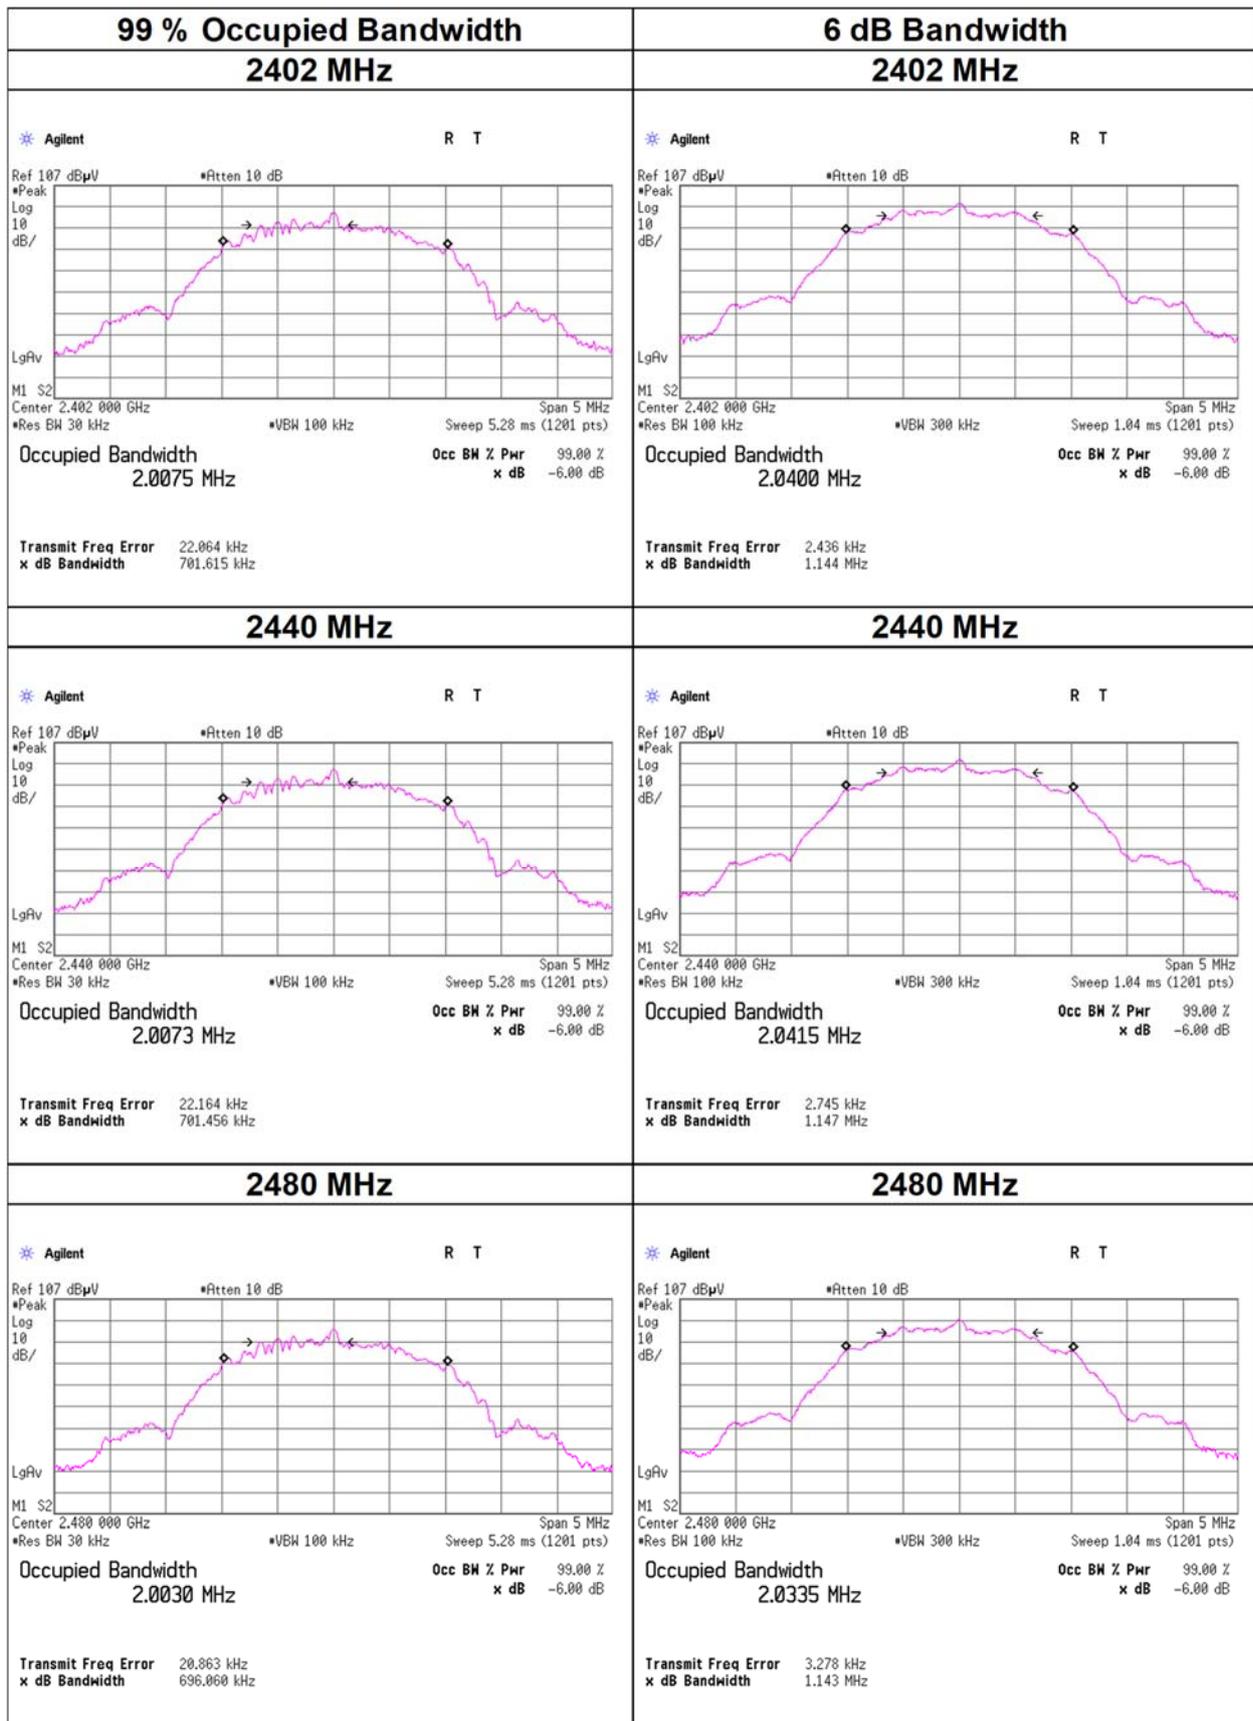

Maximum Peak Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date August 21, 2023
Temperature / Humidity 21 deg. C / 48 % RH
Engineer Ken Fujita
Mode Tx BT LE

BT LE 2 M-PHY

Maximum peak output power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power				Margin [dB]	Antenna Gain [dBi]	e.i.r.p. for RSS-247				
				Result		Limit				Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-7.50	0.94	9.89	3.33	2.15	30.00	1000	26.67	-0.20	3.13	2.06	36.02	4000	32.89
2440	-7.43	0.95	9.89	3.41	2.19	30.00	1000	26.59	-0.20	3.21	2.09	36.02	4000	32.81
2480	-8.62	0.94	9.89	2.21	1.66	30.00	1000	27.79	-0.20	2.01	1.59	36.02	4000	34.01

Coded PHY S-2 coding(coded S-2)

Maximum peak output power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power				Margin [dB]	Antenna Gain [dBi]	e.i.r.p. for RSS-247				
				Result		Limit				Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-7.69	0.94	9.89	3.14	2.06	30.00	1000	26.86	-0.20	2.94	1.97	36.02	4000	33.08
2440	-7.58	0.95	9.89	3.26	2.12	30.00	1000	26.74	-0.20	3.06	2.02	36.02	4000	32.96
2480	-8.78	0.94	9.89	2.05	1.60	30.00	1000	27.95	-0.20	1.85	1.53	36.02	4000	34.17

Coded PHY S-8 coding(coded S-8)

Maximum peak output power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power				Margin [dB]	Antenna Gain [dBi]	e.i.r.p. for RSS-247				
				Result		Limit				Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-7.72	0.94	9.89	3.11	2.05	30.00	1000	26.89	-0.20	2.91	1.95	36.02	4000	33.11
2440	-7.70	0.95	9.89	3.14	2.06	30.00	1000	26.86	-0.20	2.94	1.97	36.02	4000	33.08
2480	-8.89	0.94	9.89	1.94	1.56	30.00	1000	28.06	-0.20	1.74	1.49	36.02	4000	34.28

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

BT LE 2 M-PHY

Average power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-10.75	0.94	9.89	0.08	1.02	2.30	2.38	1.73
2440	-10.69	0.95	9.89	0.15	1.04	2.30	2.45	1.76
2480	-11.94	0.94	9.89	-1.11	0.77	2.30	1.19	1.32

Coded PHY S-2 coding(coded S-2)

Average power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-8.66	0.94	9.89	2.17	1.65	0.38	2.55	1.80
2440	-8.60	0.95	9.89	2.24	1.68	0.38	2.62	1.83
2480	-9.86	0.94	9.89	0.97	1.25	0.38	1.35	1.36

Coded PHY S-8 coding(coded S-8)

Average power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-8.37	0.94	9.89	2.46	1.76	0.11	2.57	1.81
2440	-8.36	0.95	9.89	2.48	1.77	0.11	2.59	1.82
2480	-9.60	0.94	9.89	1.23	1.33	0.11	1.34	1.36

Sample Calculation:



Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Result (Time average) + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation

Test place Shonan EMC Lab. No.5 Shielded Room
 Date August 21, 2023
 Temperature / Humidity 21 deg. C / 48 % RH
 Engineer Ken Fujita
 Mode Tx

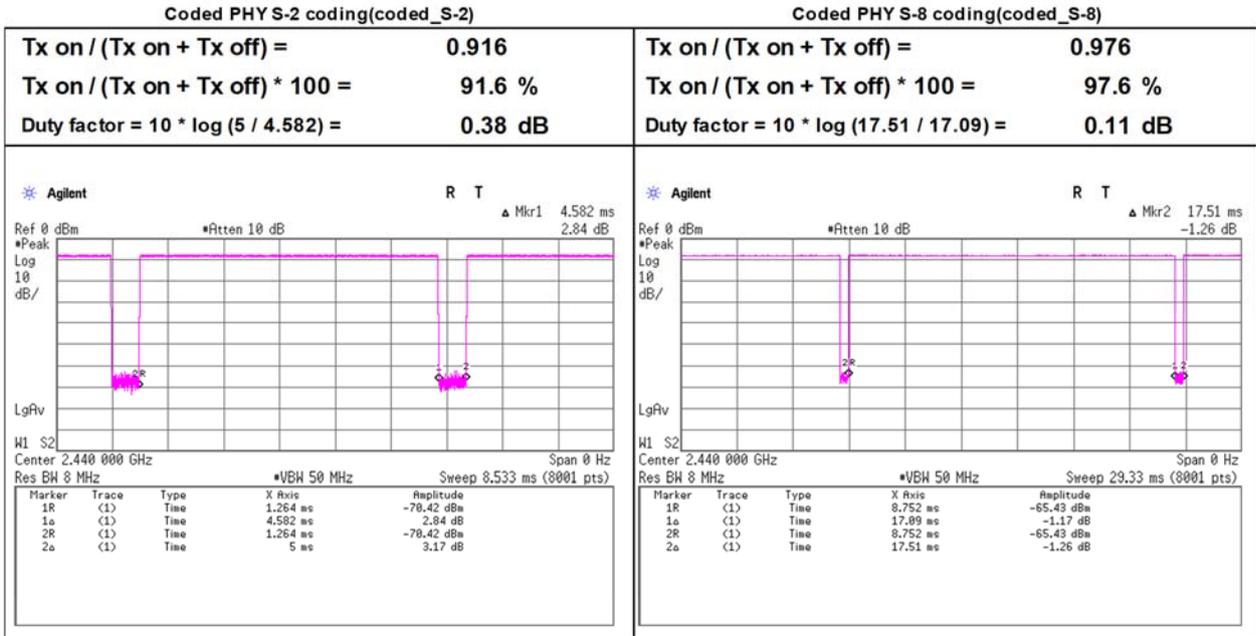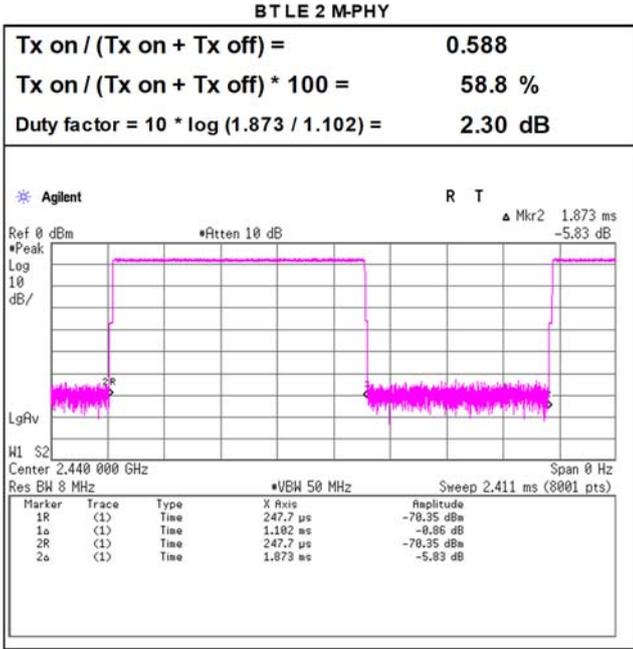

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	August 13, 2023	August 14, 2023
Temperature / Humidity	22 deg. C / 43 % RH	23 deg.C, 56 %RH
Engineer	Yosuke Murakami (30 MHz -1 GHz, 10 GHz -26.5 GHz)	Yosuke Murakami (1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	249.998	QP	35.69	11.78	6.19	31.70	0.00	21.96	46.0	24.0	143	253	-
Hori.	311.587	QP	37.21	13.89	6.69	31.67	0.00	26.12	46.0	19.8	100	168	-
Hori.	430.543	QP	35.67	16.09	7.56	31.62	0.00	27.70	46.0	18.3	100	263	-
Hori.	880.149	QP	28.98	21.93	10.05	30.93	0.00	30.03	46.0	15.9	100	256	-
Hori.	2390.000	PK	45.15	28.16	14.19	38.75	2.26	51.01	73.9	22.8	302	292	-
Hori.	4804.000	PK	44.79	31.50	7.00	38.57	2.26	46.98	73.9	26.9	100	0	-
Hori.	7206.000	PK	46.41	36.96	8.36	39.17	2.26	54.82	73.9	19.0	100	0	-
Hori.	9608.000	PK	46.88	38.47	9.56	39.73	2.26	57.44	73.9	16.4	100	0	-
Hori.	4804.000	AV	35.51	31.50	7.00	38.57	2.26	37.70	53.9	16.2	100	0	floor noise
Hori.	7206.000	AV	36.20	36.96	8.36	39.17	2.26	44.61	53.9	9.2	100	0	floor noise
Hori.	9608.000	AV	36.94	38.47	9.56	39.73	2.26	47.50	53.9	6.4	100	0	floor noise
Vert.	35.884	QP	29.41	16.35	6.98	31.90	0.00	20.84	40.0	19.1	100	274	-
Vert.	71.721	QP	29.89	6.37	7.50	31.88	0.00	11.88	40.0	28.1	100	286	-
Vert.	417.780	QP	29.74	15.99	7.46	31.62	0.00	21.57	46.0	24.4	100	328	-
Vert.	720.991	QP	29.68	20.13	9.19	31.49	0.00	27.51	46.0	18.4	100	237	-
Vert.	2390.000	PK	45.25	28.16	14.19	38.75	2.26	51.11	73.9	22.7	144	307	-
Vert.	4804.000	PK	44.82	31.50	7.00	38.57	2.26	47.01	73.9	26.8	100	0	-
Vert.	7206.000	PK	46.33	36.96	8.36	39.17	2.26	54.74	73.9	19.1	100	0	-
Vert.	9608.000	PK	46.99	38.47	9.56	39.73	2.26	57.55	73.9	16.3	100	0	-
Vert.	4804.000	AV	35.45	31.50	7.00	38.57	2.26	37.64	53.9	16.2	100	0	floor noise
Vert.	7206.000	AV	36.20	36.96	8.36	39.17	2.26	44.61	53.9	9.2	100	0	floor noise
Vert.	9608.000	AV	36.80	38.47	9.56	39.73	2.26	47.36	53.9	6.5	100	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$
10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	36.53	28.16	14.19	38.75	2.30	2.26	44.69	53.9	9.2	*1)
Vert.	2390.000	AV	36.57	28.16	14.19	38.75	2.30	2.26	44.73	53.9	9.1	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$
10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	90.44	28.15	14.21	38.74	2.26	96.32	-	-	Carrier
Hori.	2400.000	PK	45.44	28.15	14.20	38.74	2.26	51.31	76.3	24.9	-
Vert.	2402.000	PK	92.11	28.15	14.21	38.74	2.26	97.99	-	-	Carrier
Vert.	2400.000	PK	46.66	28.15	14.20	38.74	2.26	52.53	77.9	25.3	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$
10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**Radiated Spurious Emission
 (Reference Plot for band-edge)**

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	August 14, 2023
Temperature / Humidity	23 deg.C, 56 %RH
Engineer	Yosuke Murakami
	(1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz

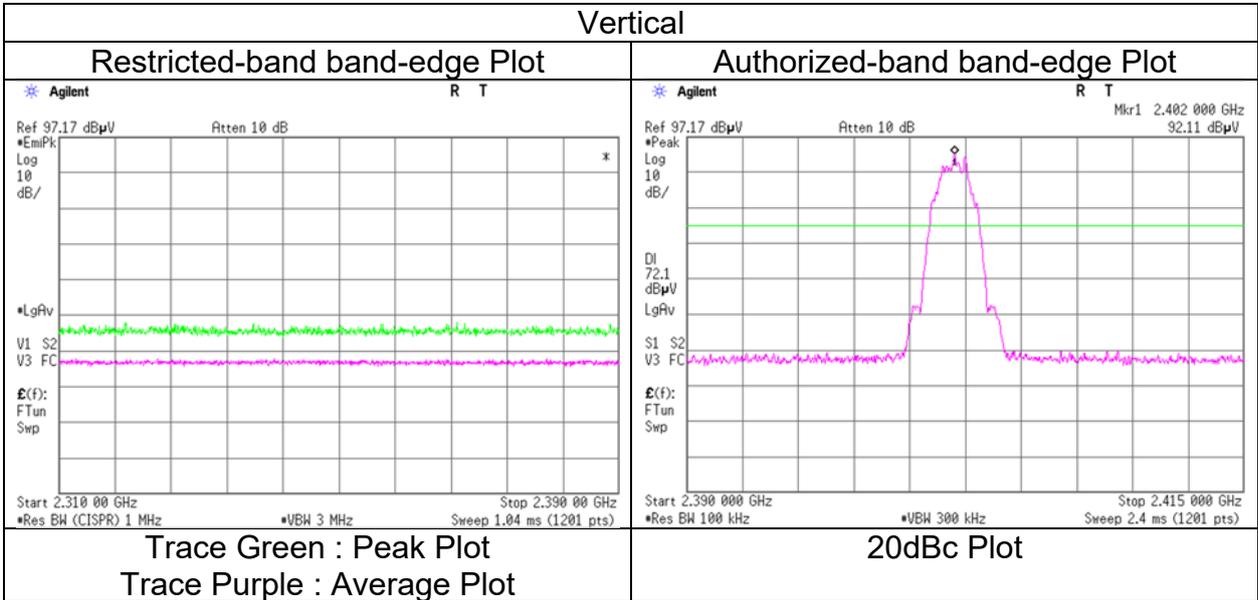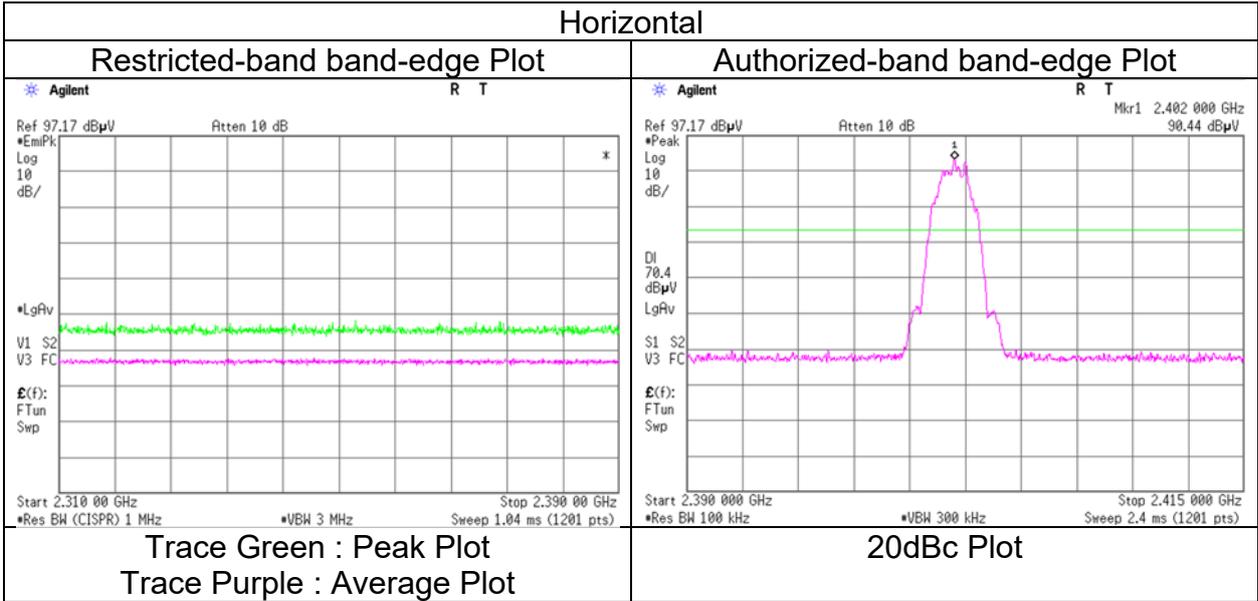

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	August 13, 2023	August 14, 2023
Temperature / Humidity	22 deg. C / 43 % RH	23 deg.C, 56 %RH
Engineer	Yosuke Murakami (30 MHz -1 GHz, 10 GHz -26.5 GHz)	Yosuke Murakami (1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2440 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	229.997	QP	37.04	11.38	6.02	31.72	0.00	22.72	46.0	23.2	141	252	-
Hori.	311.334	QP	36.95	13.88	6.69	31.67	0.00	25.85	46.0	20.1	100	175	-
Hori.	431.602	QP	36.94	16.10	7.56	31.62	0.00	28.98	46.0	17.0	100	239	-
Hori.	880.121	QP	29.31	21.93	10.05	30.93	0.00	30.36	46.0	15.6	100	252	-
Hori.	4880.000	PK	44.30	31.53	7.04	38.60	2.26	46.53	73.9	27.3	100	0	-
Hori.	7320.000	PK	45.05	37.10	8.45	39.23	2.26	53.63	73.9	20.2	100	0	-
Hori.	9760.000	PK	46.63	38.88	9.64	39.75	2.26	57.66	73.9	16.2	100	0	-
Hori.	4880.000	AV	35.42	31.53	7.04	38.60	2.26	37.65	53.9	16.2	100	0	floor noise
Hori.	7320.000	AV	35.81	37.10	8.45	39.23	2.26	44.39	53.9	9.5	100	0	floor noise
Hori.	9760.000	AV	36.55	38.88	9.64	39.75	2.26	47.58	53.9	6.3	100	0	floor noise
Vert.	35.881	QP	28.98	16.36	6.98	31.90	0.00	20.42	40.0	19.5	100	243	-
Vert.	71.748	QP	30.51	6.37	7.51	31.88	0.00	12.51	40.0	27.4	100	265	-
Vert.	417.779	QP	29.85	15.99	7.46	31.62	0.00	21.68	46.0	24.3	100	316	-
Vert.	719.982	QP	29.55	20.13	9.18	31.49	0.00	27.37	46.0	18.6	100	245	-
Vert.	4880.000	PK	44.28	31.53	7.04	38.60	2.26	46.51	73.9	27.3	100	0	-
Vert.	7320.000	PK	45.34	37.10	8.45	39.23	2.26	53.92	73.9	19.9	100	0	-
Vert.	9760.000	PK	46.59	38.88	9.64	39.75	2.26	57.62	73.9	16.2	100	0	-
Vert.	4880.000	AV	35.36	31.53	7.04	38.60	2.26	37.59	53.9	16.3	100	0	floor noise
Vert.	7320.000	AV	35.76	37.10	8.45	39.23	2.26	44.34	53.9	9.5	100	0	floor noise
Vert.	9760.000	AV	36.61	38.88	9.64	39.75	2.26	47.64	53.9	6.2	100	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	August 13, 2023	August 14, 2023
Temperature / Humidity	22 deg. C / 43 % RH	23 deg.C, 56 %RH
Engineer	Yosuke Murakami	Yosuke Murakami
	(30 MHz -1 GHz,	(1 GHz -10 GHz)
	10 GHz -26.5 GHz)	
Mode	Tx BT LE 2 M-PHY 2480 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	239.972	QP	36.21	11.58	6.11	31.71	0.00	22.19	46.0	23.8	144	255	-
Hori.	311.512	QP	37.14	13.89	6.69	31.67	0.00	26.05	46.0	19.9	100	168	-
Hori.	431.962	QP	36.58	16.10	7.57	31.62	0.00	28.63	46.0	17.3	100	241	-
Hori.	880.131	QP	28.55	21.93	10.05	30.93	0.00	29.60	46.0	16.4	100	251	-
Hori.	2483.500	PK	45.89	28.05	14.29	38.70	2.26	51.79	73.9	22.1	248	292	-
Hori.	4960.000	PK	44.22	31.72	7.09	38.63	2.26	46.66	73.9	27.2	100	0	-
Hori.	7440.000	PK	44.91	37.28	8.53	39.30	2.26	53.68	73.9	20.2	100	0	-
Hori.	9920.000	PK	45.69	39.04	9.73	39.77	2.26	56.95	73.9	16.9	100	0	-
Hori.	4960.000	AV	35.79	31.72	7.09	38.63	2.26	38.23	53.9	15.6	100	0	floor noise
Hori.	7440.000	AV	35.66	37.28	8.53	39.30	2.26	44.43	53.9	9.4	100	0	floor noise
Hori.	9920.000	AV	35.82	39.04	9.73	39.77	2.26	47.08	53.9	6.8	100	0	floor noise
Vert.	35.887	QP	29.17	16.35	6.98	31.90	0.00	20.60	40.0	19.4	100	256	-
Vert.	71.721	QP	30.18	6.37	7.50	31.88	0.00	12.17	40.0	27.8	100	290	-
Vert.	417.776	QP	29.93	15.99	7.46	31.62	0.00	21.76	46.0	24.2	100	311	-
Vert.	719.991	QP	29.43	20.13	9.18	31.49	0.00	27.25	46.0	18.7	100	245	-
Vert.	2483.500	PK	45.60	28.05	14.29	38.70	2.26	51.50	73.9	22.4	113	307	-
Vert.	4960.000	PK	44.51	31.72	7.09	38.63	2.26	46.95	73.9	26.9	100	0	-
Vert.	7440.000	PK	45.09	37.28	8.53	39.30	2.26	53.86	73.9	20.0	100	0	-
Vert.	9920.000	PK	45.67	39.04	9.73	39.77	2.26	56.93	73.9	16.9	100	0	-
Vert.	4960.000	AV	35.77	31.72	7.09	38.63	2.26	38.21	53.9	15.6	100	0	floor noise
Vert.	7440.000	AV	35.51	37.28	8.53	39.30	2.26	44.28	53.9	9.6	100	0	floor noise
Vert.	9920.000	AV	35.63	39.04	9.73	39.77	2.26	46.89	53.9	7.0	100	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	36.90	28.05	14.29	38.70	2.30	2.26	45.10	53.9	8.8	*1)
Vert.	2483.500	AV	37.31	28.05	14.29	38.70	2.30	2.26	45.51	53.9	8.3	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$



Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

**Radiated Spurious Emission
 (Reference Plot for band-edge)**

Test place
 Semi Anechoic Chamber
 Date
 Temperature / Humidity
 Engineer
 Mode


Shonan EMC Lab.
 2
 August 14, 2023
 23 deg.C, 56 %RH
 Yosuke Murakami
 (1 GHz -10 GHz)
 Tx BT LE 2 M-PHY 2480 MHz

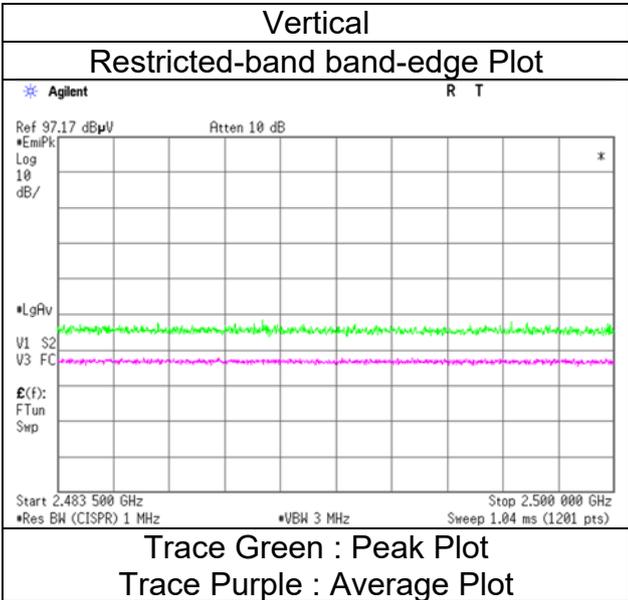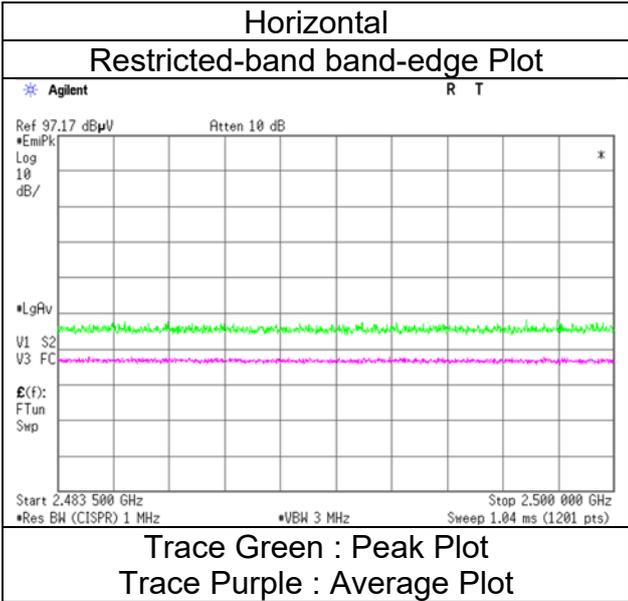

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)




Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	August 13, 2023	August 14, 2023
Temperature / Humidity	22 deg. C / 43 % RH	23 deg.C, 56 %RH
Engineer	Yosuke Murakami (30 MHz -1 GHz, 10 GHz -26.5 GHz)	Yosuke Murakami (1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2440 MHz	

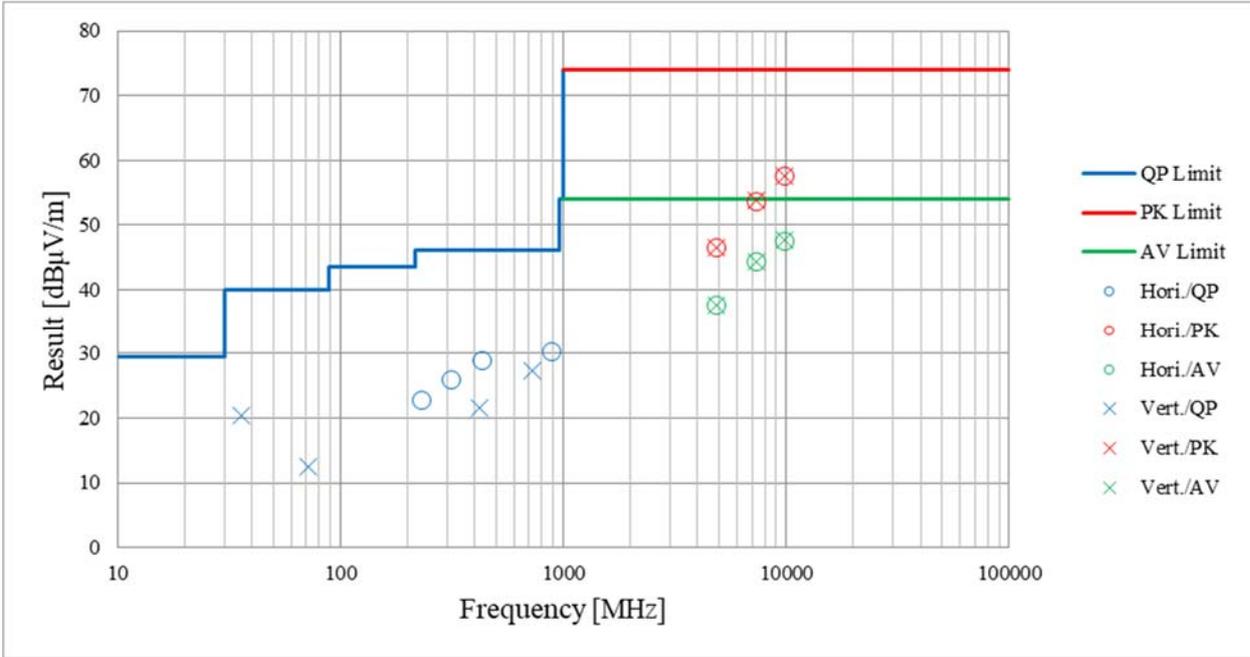

*These plots data contain sufficient number to show the trend of characteristic features for EUT.

Power Density

BT LE 2 M-PHY

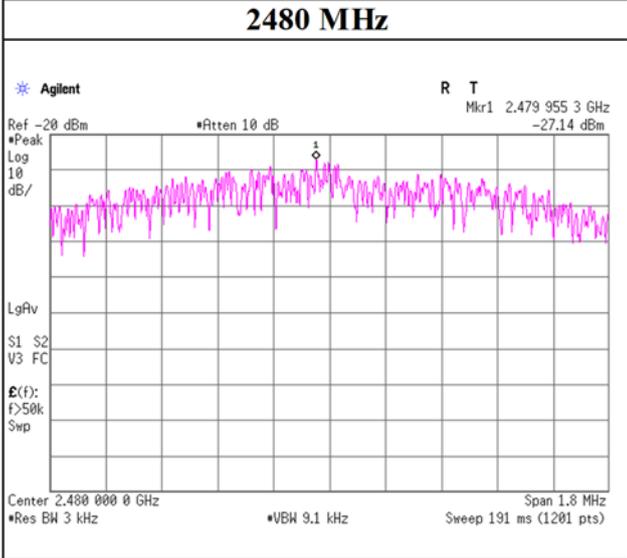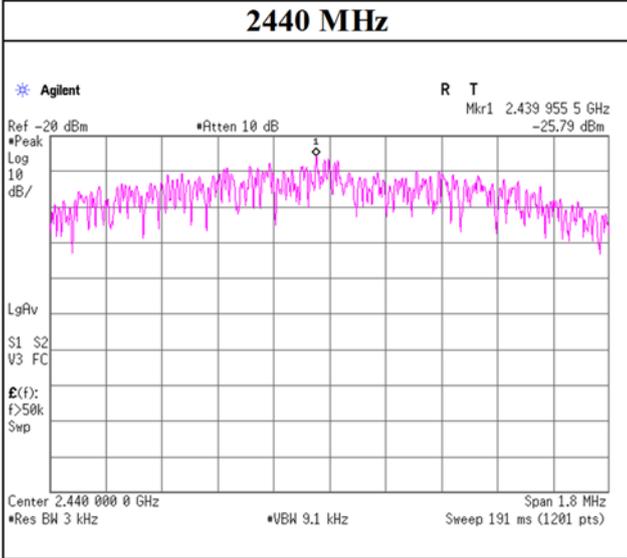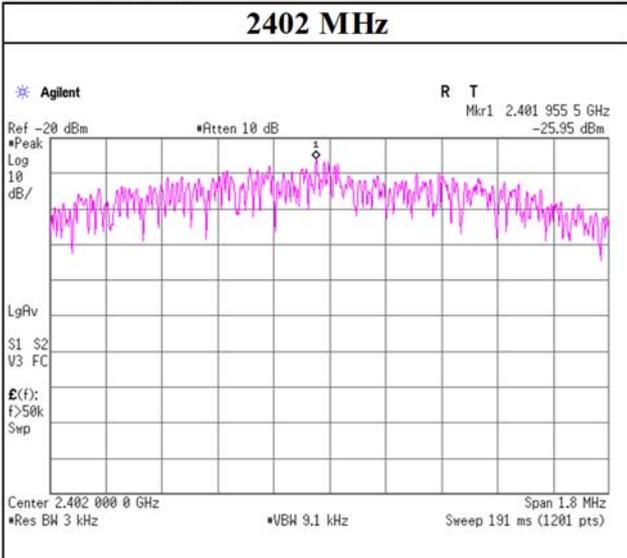

APPENDIX 2: Test Instruments

Test Equipment(1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SAF-05	145128	Pre Amplifier	Toyo Corporation	TPA0118-36	1440490	2023/05/19	12
RE	SCC-G50	178573	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	MY13407/4E	2023/03/02	12
RE	SCC-G51	178572	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800288 /4A	-	-
RE	SHA-02	145384	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-726	2023/03/09	12
RE	SOS-21	191838	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/08/03	12
RE	STR-08	150463	Test Receiver	Rohde & Schwarz	ESW44	101581	2023/07/11	12
RE	SJM-20	207277	Measuring	ASKUL	-	-	-	-
RE	SAEC-02(SVSWR)	145598	Semi-Anechoic Chamber	TDK	SAEC-02(SVSWR)	2	2023/05/17	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
RE	STS-02	145793	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997819	2023/05/26	12
RE	SAF-02	145004	Pre Amplifier	SONOMA	310N	290212	2023/02/09	12
RE	SAT6-14	167095	Attenuator	JFW	50HF-006N	-	2023/02/09	12
RE	SAT3-11	150921	Attenuator	JFW	50HF-003N	-	2023/02/09	12
RE	SBA-02	145022	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032665	2023/04/12	12
RE	SCC-B1/B3/B5/B7/B8/B13/SRSE-02	144975	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	2023/04/18	12
RE	SCC-B2/B4/B6/B7/B8/B13/SRSE-02	144976	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	2023/04/18	12

Test Equipment(2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SLA-06	145528	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	195	2023/04/12	12
RE	SAEC-02(NSA)	145563	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	2023/03/28	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2023/03/03	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2023/03/03	12
RE	SHA-08	194683	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	694	2023/03/01	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2023/06/12	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2023/03/03	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2022/10/20	12
RE	SFL-02	145301	Highpass Filter	Micro-Tronics	HPM50111	51	2022/10/20	12
RE	SSA-02	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2023/03/01	12
RE	SCC-G69	200009	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575617/4	2023/06/06	12
AT	SOS-27	191845	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/08/07	12
AT	STS-05	146212	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997828	2022/09/20	12
AT	SCC-H21	197395	Microwave cable	RS Pro	R-132G7210 100CO	-	2023/04/06	12
AT	SCC-H22	197396	Microwave cable	RS Pro	R-132G7210 100CO	-	2023/04/12	12
AT	STM-G8	171615	Terminator	Weinschel - API Technologies Corp	M1459A	88997	2023/05/11	12
AT	SCC-G64	196945	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803414/2	2023/03/02	12
AT	SAT10-12	151609	Attenuator	Weinschel Corp.	54A-10	81601	2023/03/02	12
AT	SSA-03	145801	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250152	2022/08/04	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/11/08	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/11/08	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission