

FCC Part 15B Measurement and Test Report

For

KZ Broadband Technologies, Ltd.

1601 Tower C, Skyworth Building, High-tech Industrial Park, Nanshan

District, Shenzhen, China

FCC ID: A28AM4000DB43

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>LTE Outdoor CPE</u>
Tested Model:	<u>AirMaster 4000D B43</u>
Report No.:	<u>STR16048224I-2</u>
Tested Date:	<u>2016-05-09 to 2016-05-24</u>
Issued Date:	<u>2016-05-25</u>
Tested By:	<u>Iven Guo / Engineer</u> <i>Iven Guo</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. CONDUCTED EMISSIONS	8
3.1 TEST PROCEDURE	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM	8
3.3 ENVIRONMENTAL CONDITIONS	8
3.4 SUMMARY OF TEST RESULTS/PLOTS	8
3.5 CONDUCTED EMISSIONS TEST DATA	9
4. RADIATED EMISSIONS	11
4.1 TEST PROCEDURE	11
4.2 TEST RECEIVER SETUP	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
4.4 ENVIRONMENTAL CONDITIONS	12
4.5 SUMMARY OF TEST RESULTS/PLOTS	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: KZ Broadband Technologies, Ltd.
Address of applicant: 1601 Tower C, Skyworth Building, High-tech Industrial Park,
Nanshan District, Shenzhen, China

Manufacturer: KZ Broadband Technologies, Ltd.
Address of manufacturer: 1601 Tower C, Skyworth Building, High-tech Industrial Park,
Nanshan District, Shenzhen, China

General Description of EUT	
Product Name:	LTE Outdoor CPE
Trade Name:	AirMaster
Model No.:	AirMaster 4000D B43
Adding Model(s):	GLC130D-43,GWG130WV,AirMaster 4000M B43, AM4000D XXX,AM4000M XXX, AM4000W XXX
IMEI:	864423020401146
Rated Voltage:	DC 24V/0.5A by PoE port
Power Adaptor:	Model: G0549-240-050
	INPUT: AC100-240V 50/60Hz
	OUTPUT: DC24V/0.5A
Device Category:	Fixed
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model AirMaster 4000D B43 but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	PoE DC 24V
Rated Current:	0.5A
Highest Internal Frequency:	38.4MHz
Classification of ITE:	CLASS B

1.2 Test Standards

The following report is prepared on behalf of the KZ Broadband Technologies, Ltd. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Operating	Connected to PC, PING IP

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Adapter Cable	0.8	Unshielded	Without Ferrite
RJ45	2.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
RJ45	1.5	Unshielded	Without Ferrite

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
PC	DELL	OPTIPLEX 380	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

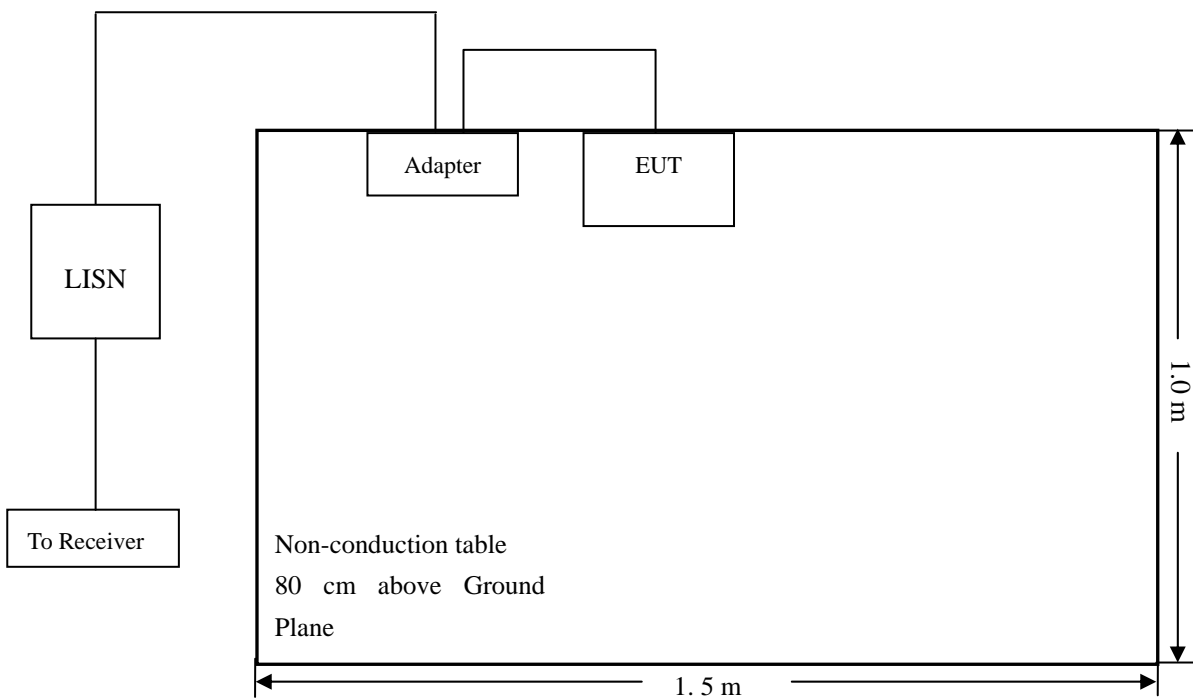

3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.4 Summary of Test Results/Plots


According to the data in section 3.5, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

-4.88 dB at 0.4580 MHz in the **Live AVG** detector, 0.15-30MHz

3.5 Conducted Emissions Test Data


Plot of Conducted Emissions Test Data

EUT: *LTE Outdoor CPE*
 Tested Model: *AirMaster 4000D B43*
 Operating Condition: *TM1*
 Comment: *DC24V/0.5A(PoE)*
 Test Specification: *Neutral*

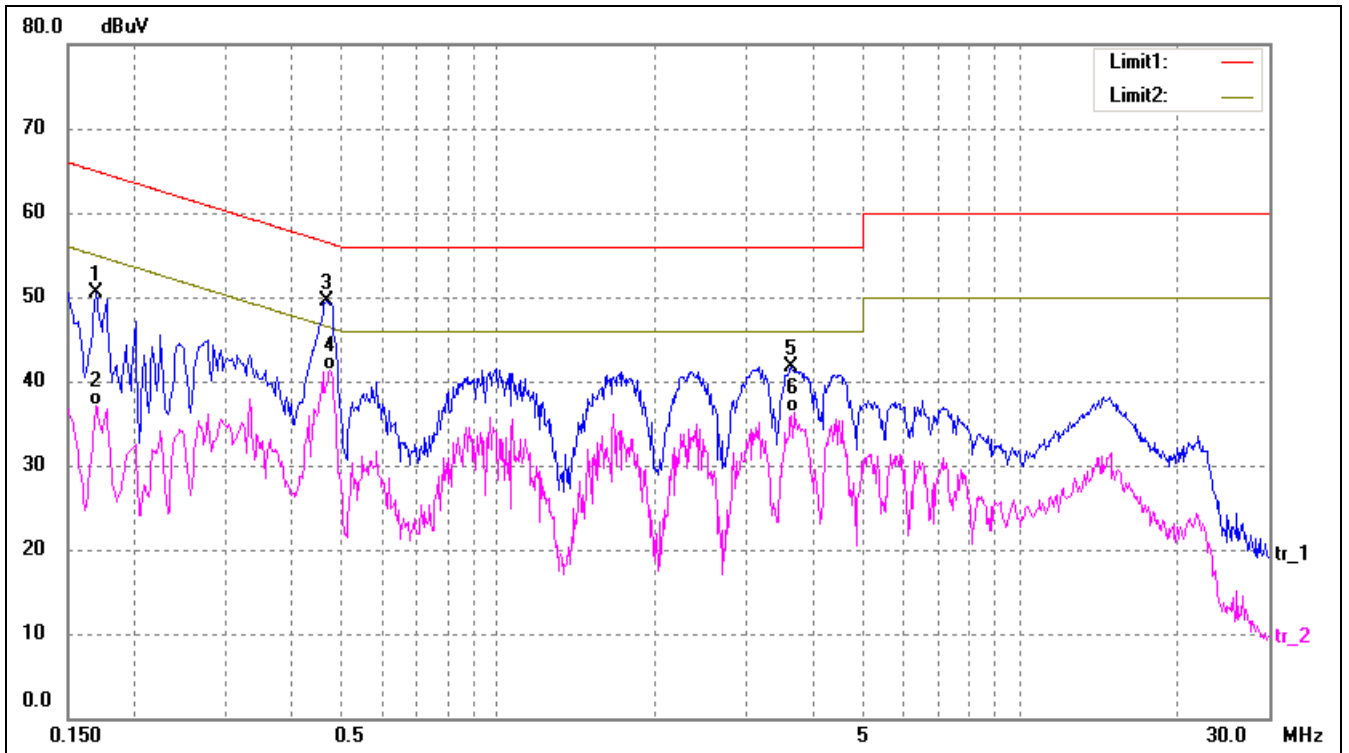

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	41.02	9.50	50.52	64.96	-14.44	peak
2	0.1700	27.61	9.50	37.11	54.96	-17.85	AVG
3	0.4700	39.97	9.54	49.51	56.51	-7.00	peak
4*	0.4780	31.79	9.55	41.34	46.37	-5.03	AVG
5	3.6420	31.70	10.05	41.75	56.00	-14.25	peak
6	3.6980	26.22	10.06	36.28	46.00	-9.72	AVG

Test Specification: Live

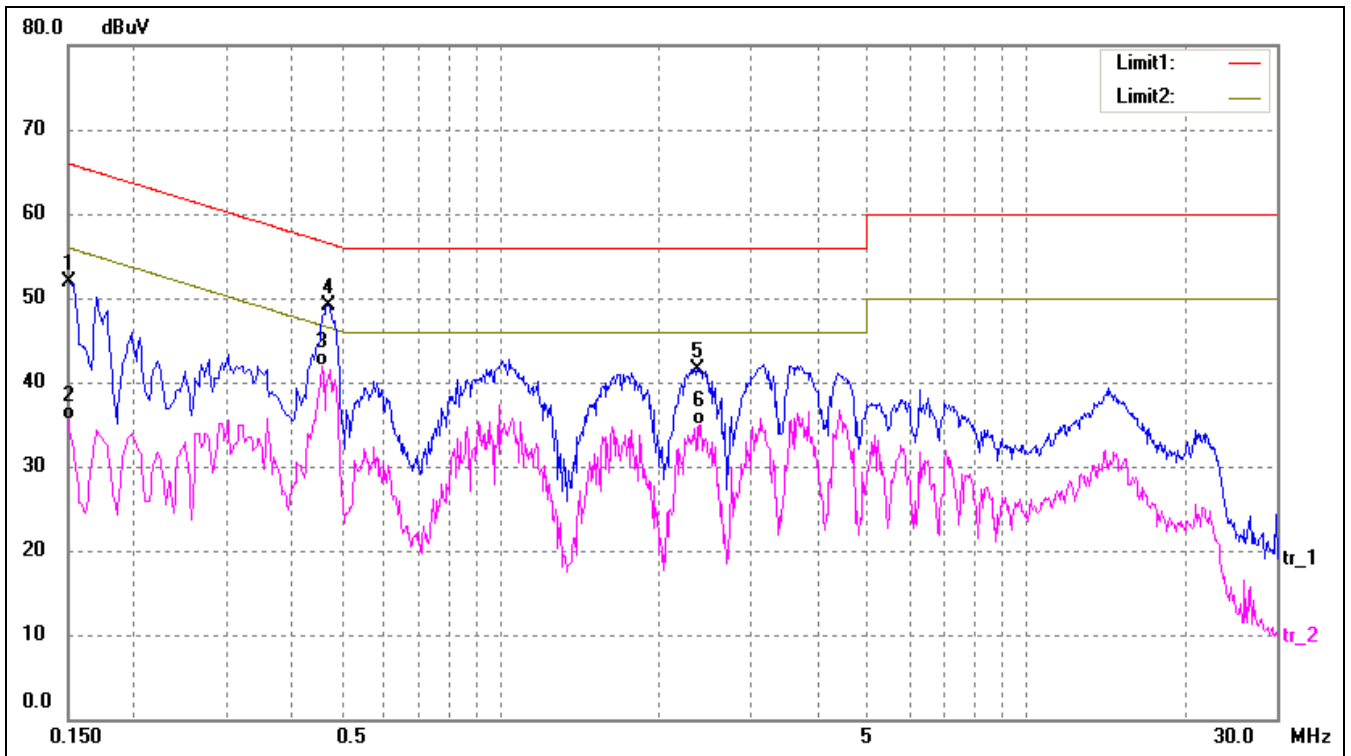

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	42.39	9.50	51.89	66.00	-14.11	peak
2	0.1500	25.97	9.50	35.47	56.00	-20.53	AVG
3*	0.4580	32.32	9.53	41.85	46.73	-4.88	AVG
4	0.4700	39.66	9.54	49.20	56.51	-7.31	peak
5	2.3660	31.73	9.87	41.60	56.00	-14.40	peak
6	2.3900	25.09	9.87	34.96	46.00	-11.04	AVG


4. Radiated Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

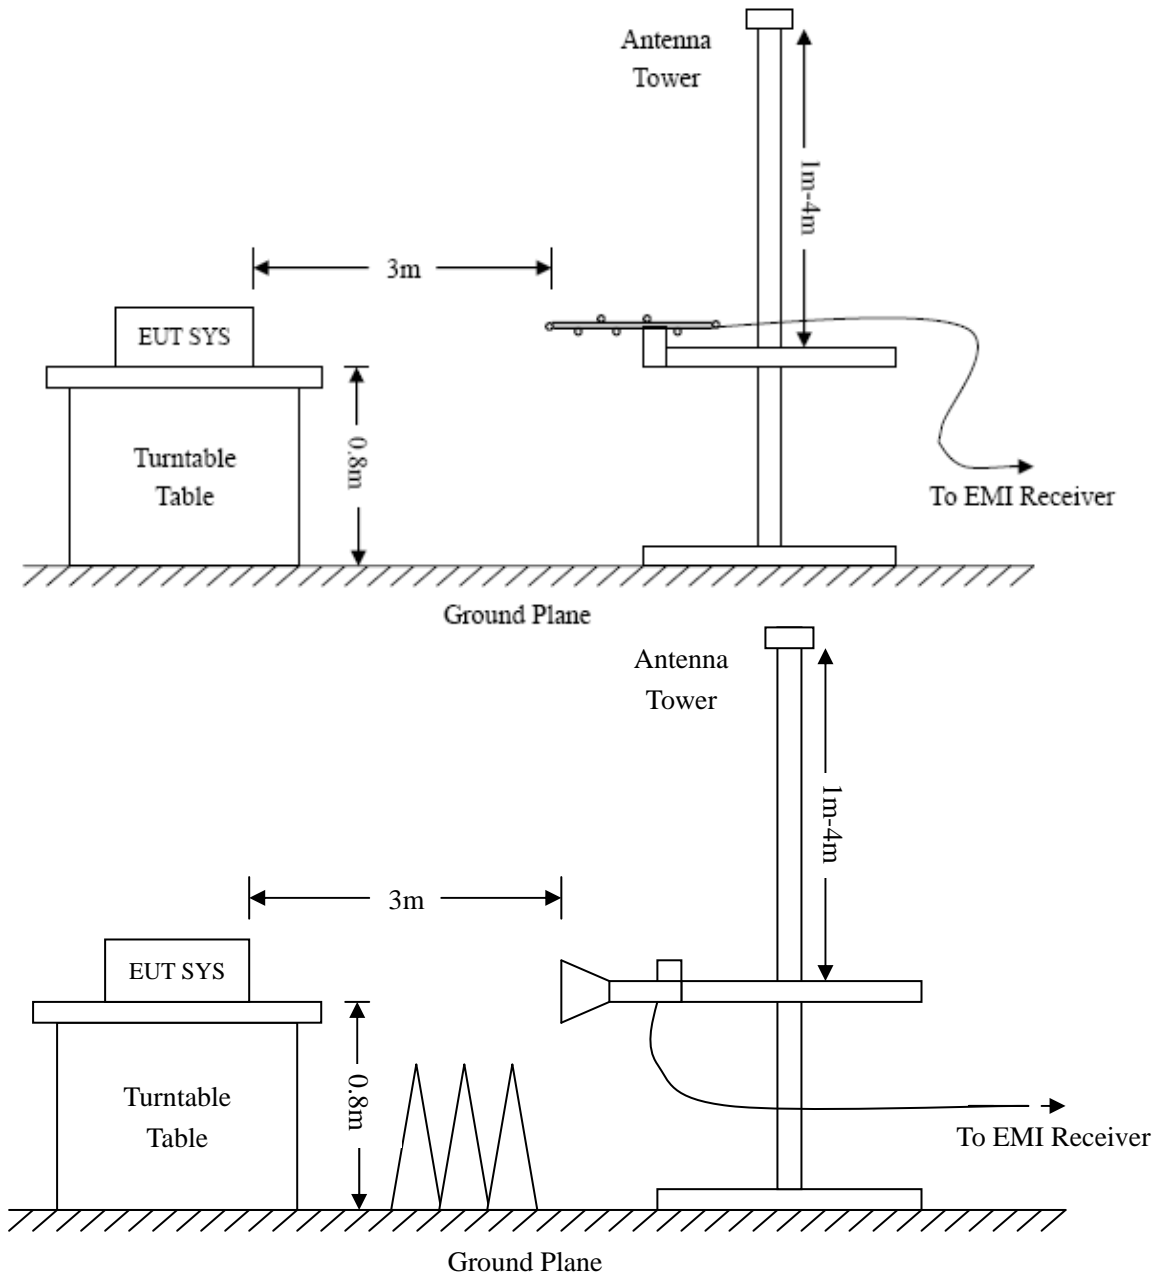

4.2 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-8.74 dB at 240.8304MHz in the Horizontal polarization, 30MHz to 1 GHz, 3Meters


Plot of Radiated Emissions Test Data

EUT: *LTE Outdoor CPE*
 Tested Model: *AirMaster 4000D B43*
 Operating Condition: *TM1*
 Comment: *DC24V/0.5A(PoE)*
 Test Specification: *Horizontal*

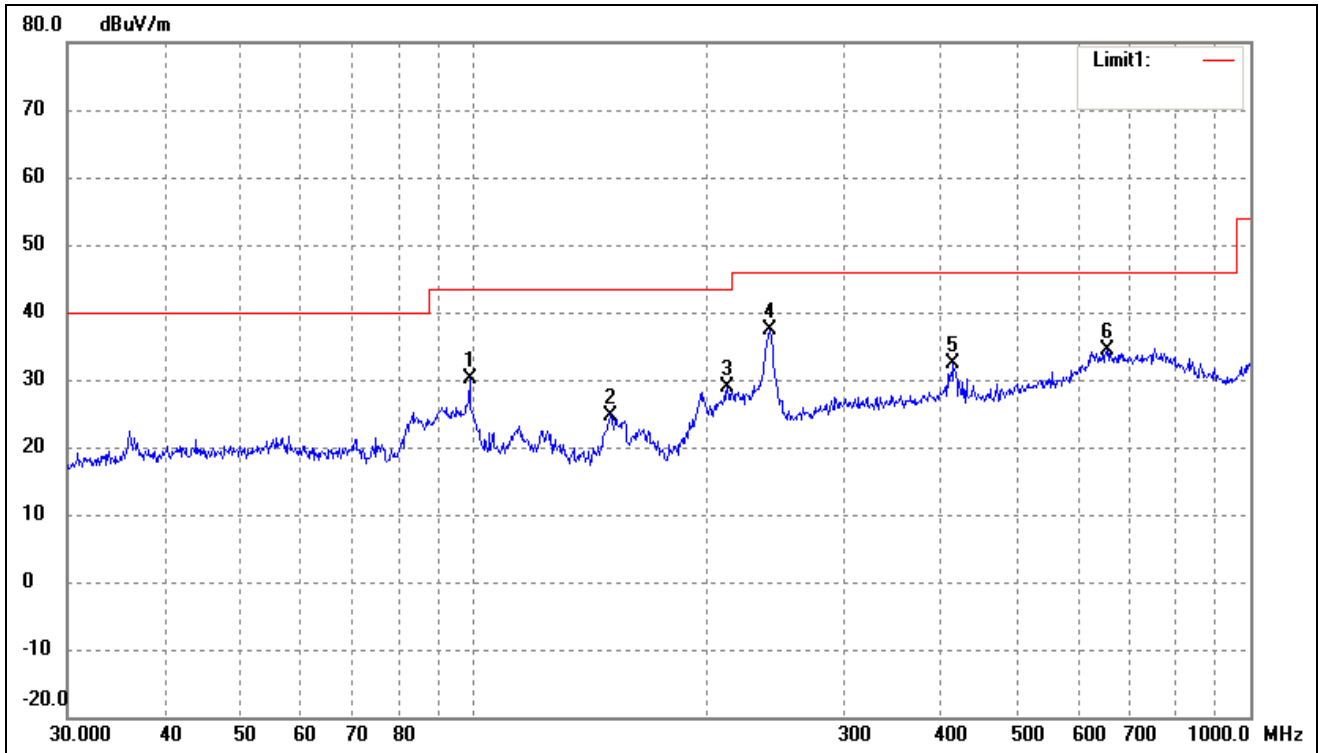

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.8326	25.36	4.76	30.12	43.50	-13.38	75	150	peak
2	150.0108	22.00	2.75	24.75	43.50	-18.75	37	100	peak
3	212.2695	22.91	6.02	28.93	43.50	-14.57	180	120	peak
4	240.8304	28.30	8.96	37.26	46.00	-8.74	352	100	peak
5	414.7223	20.35	12.10	32.45	46.00	-13.55	182	200	peak
6	654.2318	16.60	17.71	34.31	46.00	-11.69	350	200	peak

Test Specification: Vertical

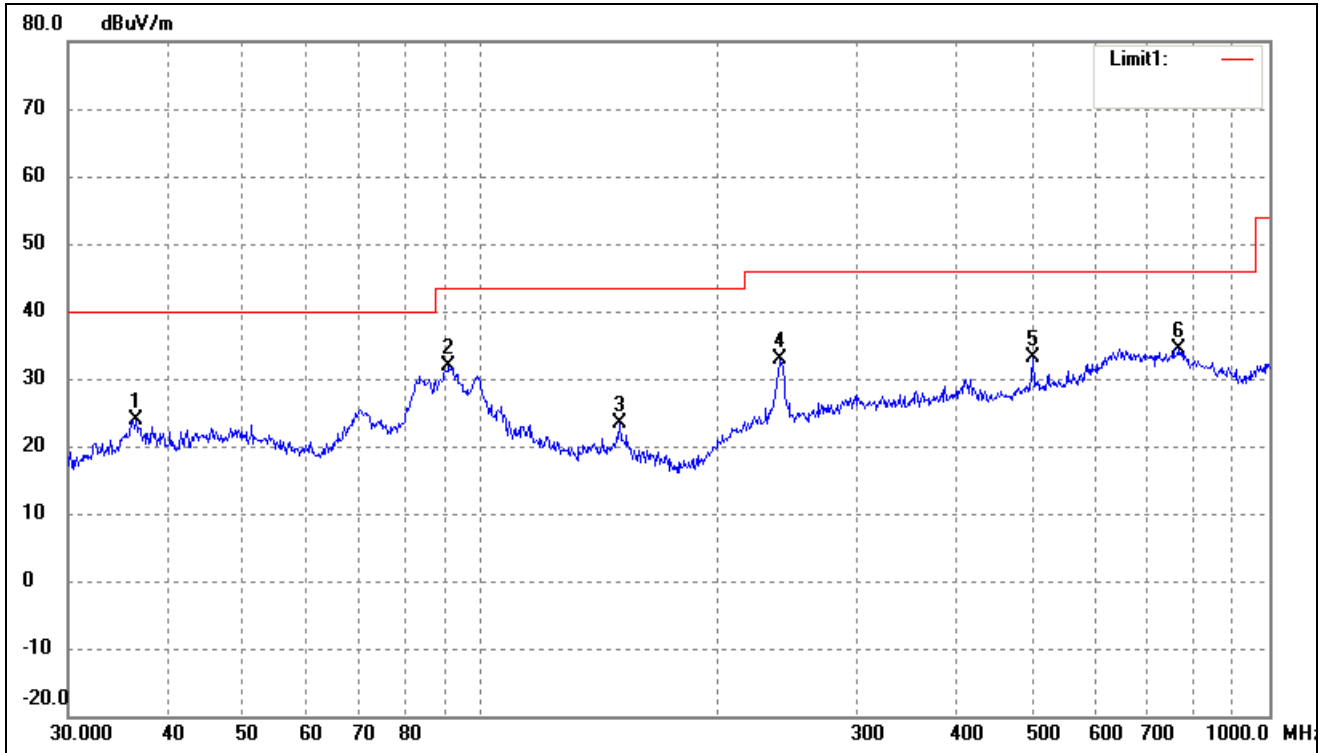

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.6375	19.40	4.44	23.84	40.00	-16.16	180	100	peak
2	91.1746	28.25	3.60	31.85	43.50	-11.65	256	100	peak
3	150.0108	20.56	2.75	23.31	43.50	-20.19	180	100	peak
4	239.9874	23.89	8.93	32.82	46.00	-13.18	355	100	peak
5	501.1790	19.69	13.37	33.06	46.00	-12.94	189	100	peak
6	766.0572	16.61	17.79	34.40	46.00	-11.60	355	100	peak

***** END OF REPORT *****