

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Alco Electronics Ltd.

OF

Applicant:

Product Name: Tablet Brand Name: Model No.: Model Difference: FCC ID: A2HCT101 **Report Number:** FCC Rule Part: Issue Date: Date of Test: Date of EUT Received:

11/F Metropole Square, 2 On Yiu Street, Sha Tin, New Territories, Hong Kong Venturer, Compag CT9L03W23H1, CT101 Different model no. for trading purpose. ER/2018/80010 §15.247, Cat: DTS Sep. 18, 2018 Aug. 01, 2018 ~ Sep. 12, 2018 Aug. 01, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Marcus

Tested By:

Marcus Tseng / Sr. Engineer

Approved By:

Blue Yang / Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/80010	Rev.00	Initial creation of document	All	Sep. 18, 2018	Tiffany Kao

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	8
5	MEASUREMENT UNCERTAINTY	10
6	CONDUCTED EMISSION TEST	11
7	DUTY CYCLE OF TEST SIGNAL	15
8	PEAK OUTPUT POWER MEASUREMENT	17
9	6dB BANDWIDTH MEASUREMENT	20
10	CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	24
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	33
12	PEAK POWER SPECTRAL DENSITY	80
13	ANTENNA REQUIREMENT	84



GENERAL INFORMATION 1

1.1 Product description

General:

Product Name:	Tablet		
Brand Name:	Venturer,	Compaq	
Model No.:	CT9L03W	23H1, CT101	
Model Difference:	Different r	nodel no. for trading purpose.	
Product SW/HW Version:	N/A / N/A		
Radio SW/HW Version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
	3.7Vdc from Rechargeable Li-ion Battery or 5V from AC/DC Adapter.		
Power Supply:	Battery: Model No.: PT3075110-2P, Supplier: Gua Pow-Tech New Power Co., Ltd.		
	Adapter:	Model No.: APS-H012050200W-G, Supplier: Shenzhen ACT Industrial Co., Ltd.	

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power in dBm (Peak)	Modulation Technology		
802.11b			15.73	DSSS		
802.11g	2412-2462	2412-2462 11	20.89			
802.11n HT20			20.53	OFDM		
802.11n HT40	2422-2452	7	20.27			
Antenna Designation:		Inner Antenna, Gain: 1.5dBi				
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM				
Transition Rate:		802.11 n_20N	/5.5/11 Mbps /12/18/24/36/48/54 Mbps MHz: 6.5 – 72.2Mbps MHz: 13.5 - 150.0Mbps			

Report No.:ER/2018/80010 Page 5 of 84



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 DTS Meas. Guidance v04

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

(TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

Radiated Emissions 2.3.2

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is farawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted Emission (AC Power Line) Configuration




Fig.2-2 Conducted Emission (Antenna Port) Configuration



Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留的无。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is ungived and partice to the fulleet evalued to the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is ungived and offenders may the prosecuted to the fulleet evaluet of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	ANNEL FREQUENCY		FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n_HT40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留的无。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is ungived and partice to the fulleet evalued to the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is ungived and offenders may the prosecuted to the fulleet evaluet of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
RADIATED EMISSION TEST (BELOW 1 GHz)						
802.11g	1 to 11	6	OFDM	6	CH0	
	RADIATI	ED EMISSIO	N TEST (ABOVE	1 GHz)		
802.11b	1 to 11	1,6,11	DSSS	1	CH0	
802.11g	1 to 11	1,6,11	OFDM	6	CH0	
802.11n (HT20)	1 to 11	1,6,11	OFDM	MCS 0	CH0	
802.11n (HT40)	3 to 9	3,6,9	OFDM	MCS 0	CH0	
Notor						

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1,6,11	DSSS	1	CH0		
802.11g	1 to 11	1,6,11	OFDM	6	CH0		
802.11n (HT20)	1 to 11	1,6,11	OFDM	MCS 0	CH0		
802.11n (HT40)	3 to 9	3,6,9	OFDM	MCS 0	CH0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edge	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty (Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz-30MHz: +/-2.87dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range		nits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note	,	

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI7	100335	2018/02/02	2019/02/01
LISN	SCHWARZBECK	NSLK 8127	8127-649	2018/05/18	2019/05/17

6.3 EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is farawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4 Test SET-UP (Block Diagram of Configuration)

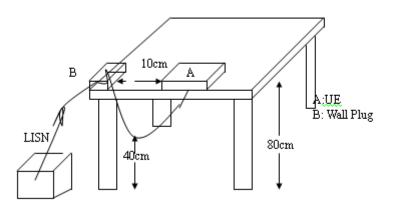

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

除非方方 说明,此我告结本性可测码之标而且頁,问时时还称近性休留90天。今和或不死空全公司會四时了,个小可可放展彩。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



AC POWER LINE CONDUCTED EMISSION TEST DATA

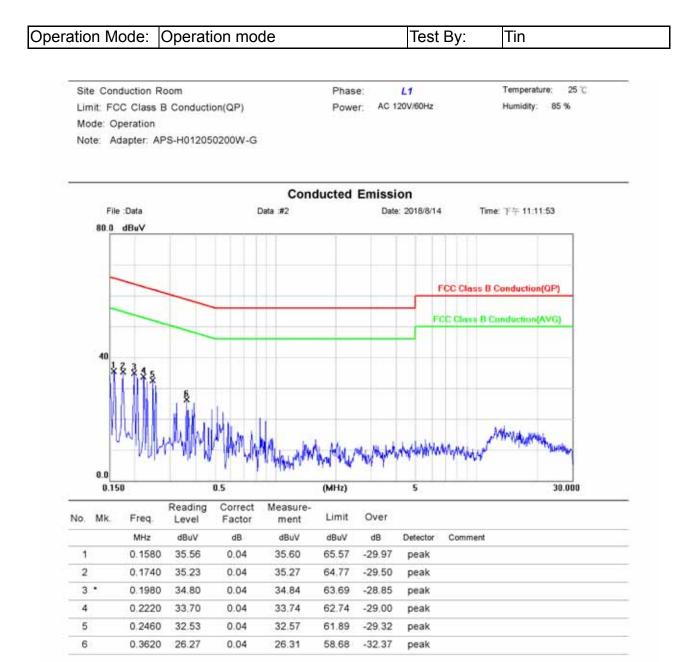


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す另有説明、此報告結果僅對測試之様品負責。同時此様品僅保留90.tr。本報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is farawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Temperature: 25 0 Site Conduction Room Phase: N AC 120V/60Hz Limit: FCC Class B Conduction(QP) Power: Humidity: 85 % Mode: Operation Note: Adapter: APS-H012050200W-G

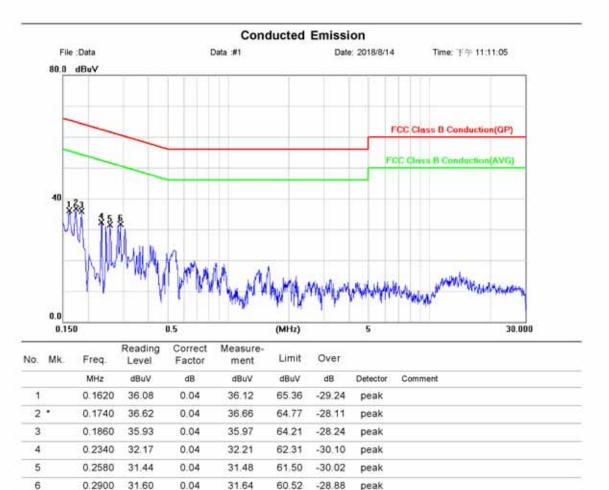

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留的无。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is ungived and partice to the fulleet evalued to the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is ungived and offenders may the prosecuted to the fulleet evaluet of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

peak



DUTY CYCLE OF TEST SIGNAL 7

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	100.00	0.00	0.00	0.01
802.11g	100.00	0.00	0.00	0.01
802.11n_20	100.00	0.00	0.00	0.01
802.11n_40	100.00	0.00	0.00	0.01

b = 100%, *g* = 100%, *n_ht_*20 = 100%, *n_ht_*40 = 100%

Duty Cycle Factor: $10 * \log(1/1) = 0$


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is farawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.1 DUTY CYCLE TEST SIGNAL Measurement Result

Duty Cycle_802.11b_20MHz_Chain0_2412MHz

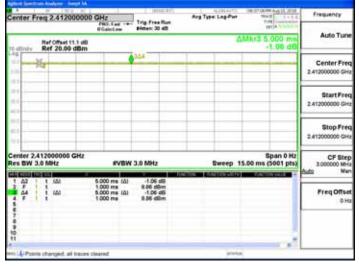

Duty Cycle_802.11g_20MHz_Chain0_2412MHz

er Freq 2.412000000	GHz	Avg Type Log-Put es Run		Frequency
Ref Offset 11.1 dB	TORICON PROP		ΔMkr3 5.000 ms -0.68 dB	Auto Tune
uton Antonio est	netpretoret netpr	354	ni matanatana	Center Freq 2.412000000 GHz
				Start Freq 2.412000006 GHz
				Stop Freq 2.41200000 GHz
er 2.412000000 GHz SW 3.0 MHz	#VBW 3.0 M	z Sweep 1	Span 0 Hz 0.00 ms (10001 pts)	CF Step 3.000000 MHg Auto Man
2021 (122) (122) 122 (124) 124	1.000 ms 5.65 5.000 ms (Å) -0.0	। ८३ विकेश विकेस विकि विकि	2	Auto Men FreqOffset 0 Hz
Points changed, all insure			-	

Duty Cycle_802.11n_20MHz_Chain0_2412MHz



Duty Cycle_802.11n_40MHz_Chain0_2422MHz

nter Fr	eq 2.42200	00000 GH2	i fas -+-	Trig Free Run Addum: 30 dB	Avg Typ	e LogPut	TET 47. SEPARAGE 12, 2018	and the second second second
ettrate	Ref Offset 11 Ref 20.00 c	.1 dB				۵	Mkr3 5,000 ms 1,93 dB	Auto Tune
-	-	-	-	-	3.04			Center Freq 2.422000000 GHz
								StartFree 2.422000005 GH
								Stop Free 2.42200000 GH
nter 2.4 s BW 3	22000000 C	2Hz	#VBW	3.0 MHz	5	weep 10	Span 0 Hz 00 ms (10001 pts)	CF Step 3.000000 MH
42 F 44 F	τω τ τ τ τ	1.00	Oms (Δ) Oms (Δ) Oms (Δ)	1,83 dB 0,61 dBm 1,93 dB 0,61 dBm	HACTON 4		244-2004 100-10	Freq Offse 0 H

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



PEAK OUTPUT POWER MEASUREMENT 8

8.1 Standard Applicable


For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

8.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1804001	2018/02/01	2019/01/31
Power Sensor	Anritsu	MA2411B	1726104	2018/02/01	2019/01/31
Coaxial Cables	N/A	WK CE Cable	N/A	2018/01/02	2019/01/01

8.3 Test Set-up

Power Meter:



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

Record the max. Reading as observed from Spectrum or Power Meter.

Re非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的方式。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

8.5 Measurement Result

802.1	1b CH0						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Limit		RESULT
1	2412	1	15.73	1 Watt =	30.00	dBm	PASS
6	2437	1	15.48	1 Watt =	30.00	dBm	PASS
11	2462	1	15.56	1 Watt =	30.00	dBm	PASS
802.1	1b CH0		-				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)		Limit		RESULT
1	2412	1	13.85	1 Watt =	30.00	dBm	PASS
6	2437	1	13.63	1 Watt =	30.00	dBm	PASS
11	2462	1	13.66	1 Watt =	30.00	dBm	PASS
802.1	1g CH0						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Limit		RESULT
1	2412	6	20.35	1 Watt =	30.00	dBm	PASS
6	2437	6	20.83	1 Watt =	30.00	dBm	PASS
11	2462	6	20.89	1 Watt =	20.00	dBm	PASS
000 4		0	20.09	T VVall =	30.00	ubiii	1 433
802.1	1g CH0	0	20.09	T VVall =	30.00	UDIII	1 433
802.1 CH	1g CH0 Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)		Limit	ubiii	RESULT
	Freq.	Data	Max. Avg. Output include tune up tolerance Power			dBm	
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)		Limit		RESULT
CH	Freq. (MHz)	Data Rate 6	Max. Avg. Output include tune up tolerance Power (dBm) 11.64	1 Watt =	L imit 30.00	dBm	RESULT PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnitization and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



802.1	1n_HT20	M CH0					
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Limit		RESULT
1	2412	MCS0	20.15	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	19.99	1 Watt =	30.00	dBm	PASS
11	2462	MCS0	20.53	1 Watt =	30.00	dBm	PASS
802.1	1n_HT20	M CH0					
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)		Limit		RESULT
1	2412	MCS0	11.69	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	11.56	1 Watt =	30.00	dBm	PASS
11	2462	MCS0	11.73	1 Watt =	30.00	dBm	PASS
802.1	1n_HT40	M CH0					
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)		Limit		RESULT
3	2422	MCS0	20.27	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	19.96	1 Watt =	30.00	dBm	PASS
9	2452	MCS0	20.02	1 Watt =	30.00	dBm	PASS
802.1	1n_HT40	M CH0					
	Freq.	Data	Max. Avg. Output include tune up	Limit			RESULT
СН	(MHz)	Rate	tolerance Power (dBm)				
CH 3			tolerance Power	1 Watt =	30.00	dBm	PASS
	(MHz)	Rate	tolerance Power (dBm)			dBm dBm	

* Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,可時此樣品僅保留90天。本報告未經本公司書面許可,不可能分積製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6DB BANDWIDTH MEASUREMENT 9


9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	2018/05/03	2019/05/02
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01
DC Block	Mini-Circuits	BLK-18-S+	1	2018/01/02	2019/01/01
Coaxial Cables	N/A	WK CE Cable	N/A	2018/01/02	2019/01/01

9.3 Test Set-up



9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- Repeat above procedures until all frequency of interest measured was complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

旅行方列 就例 "DL報告結本性質満識之体論更良" 同時DL報告性論 1997、今報告末空をの言面計引 " 个引部切模影" This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.5 Measurement Result

6dB Bandwidth

802.11b	11b CH0 802.11g CH0						
Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	9605.00	> 500	PASS	2412	16570.00	> 500	PASS
2437	9994.00	> 500	PASS	2437	16600.00	> 500	PASS
2462	9597.00	> 500	PASS	2462	16610.00	> 500	PASS
802.11_	n_HT20 CH0			802.11_	_n_HT40 CH0)	
Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	17800.00	> 500	PASS	2422	36460.00	> 500	PASS
2437	17830.00	> 500	PASS	2437	36510.00	> 500	PASS
2462	17820.00	> 500	PASS	2452	36460.00	> 500	PASS

*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This documents issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the context or appearance of this document is unlawful and offenders may be preserved to the fullest extent of the law may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

OBW 6dB 802.11b 20MHz Chain0 2412MHz




OBW 6dB 802.11b 20MHz Chain0 2437MHz



OBW 6dB 802.11b 20MHz Chain0 2462MHz




OBW 6dB_802.11g_20MHz_Chain0_2412MHz

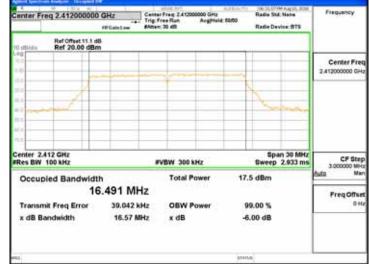

OBW 6dB_802.11g_20MHz_Chain0_2437MHz



OBW 6dB 802.11g 20MHz Chain0 2462MHz

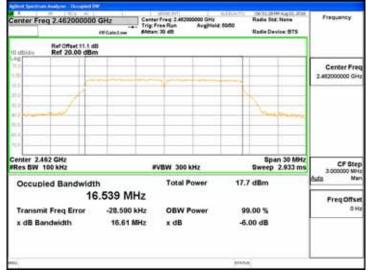

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

biness only more stated the results and the results and report for the angle of t documents, subject to the company subject to its General Conditions for Electronic Documents at <u>www.sgs.com/terms</u> and conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488


www.tw.sas.com

OBW 6dB_802.11n_20MHz_Chain0_2412MHz

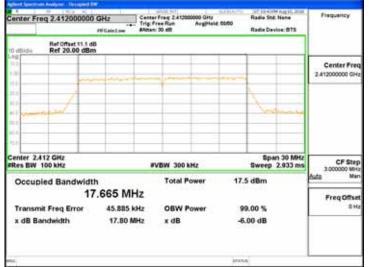

OBW 6dB_802.11n_20MHz_Chain0_2437MHz



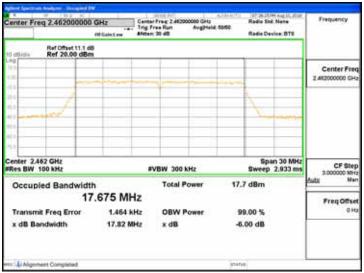

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

biness only more stated the results and the results and report for the angle of t documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Ref Offset 11.1 dB Ref 20.00 dBm

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com

36.086 MHz Freq Offse 55.120 kHz OH Transmit Freg Error **OBW Power** 99.00 % x dB Bandwidth 36.51 MHz x dB -6.00 dB

OBW 6dB_802.11n_40MHz_Chain0_2452MHz

WWW 300 KHz

x dB

36.037 MHz

1.478 kHz

36.46 MHz

Total Power

OBW Power

Aughtald 55/50

Radio Std. None

Radie Device: 875

Span 50 MHz

18.1 dBm

99.00 %

-6.00 dB

Frequency

Center Fred


CF Step

Freq Offse OH

2.412000000 G

OBW 6dB_802.11n_40MHz_Chain0_2437MHz ter Freq 2.437000000 GHz Center Freq 2.437000 Trig Free Run Dada Std Mana Augintale Corto Radie Device: 815 Ref Offset 11.1 dB Ref 20.00 dBm Center Freq 2.437000000 Gi Res BW 100 kHz Span 50 MHz Sweep 4.8 ms CF Step #VBW 300 kHz 5.00000001 **Total Power** 17.5 dBm Occupied Bandwidth

OBW 6dB_802.11n_40MHz_Chain0_2422MHz

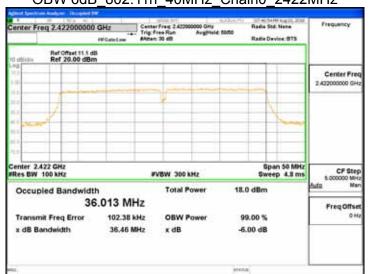





10 CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	2018/05/03	2019/05/02
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01
DC Block	Mini-Circuits	BLK-18-S+	1	2018/01/02	2019/01/01
Coaxial Cables	N/A	WK CE Cable	N/A	2018/01/02	2019/01/01

10.3Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4Measurement Procedure

Conducted Reference Level

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8.Allow trace to fully stabilize.

9.Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector =Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This desument is issued by the Company subject to its Constal Conditions of Socials printed works of available as request

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is advised to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 th TA RE is first.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




10.5Measurement Result

Reference Level of Limit 802.11b mode			Reference Level of Limit 802.11g mode				
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit		
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)		
2412	2.99	-17.01	2412	-2.87	-22.87		
2437	2.65	-17.35	2437	-3.29	-23.29		
2462	2.67	-17.33	2462	-2.95	-22.95		
Referen	Reference Level of Limit 802.11n20 mode						
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit		
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)		
2412	-2.79	-22.79	2422	-5.34	-25.34		
2437	-2.76	-22.76	2437	-5.88	-25.88		
2462	-2.40	-22.40	2452	-5.34	-25.34		

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

Reference Level_802.11b_20MHz_Chain0_2412MHz

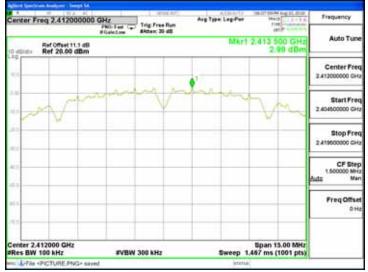

Reference Level 802.11b 20MHz Chain0 2437MHz



Reference Level_802.11b_20MHz_Chain0_2462MHz



Reference Level_802.11g_20MHz_Chain0_2412MHz



Reference Level 802.11g 20MHz Chain0 2437MHz



Reference Level_802.11g_20MHz_Chain0_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

t (886-2) 2299-3279

Re非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的方式。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Reference Level_802.11n_20MHz_Chain0_2412MHz



Reference Level 802.11n 20MHz Chain0 2437MHz



Reference Level_802.11n_20MHz_Chain0_2462MHz




Reference Level_802.11n_40MHz_Chain0_2422MHz



Reference Level 802.11n 40MHz Chain0 2437MHz



Reference Level_802.11n_40MHz_Chain0_2452MHz

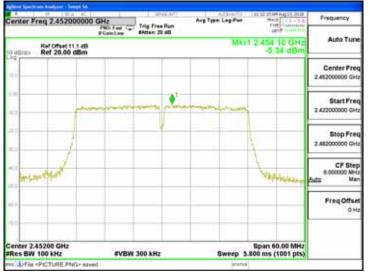

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

t (886-2) 2299-3279

Re非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的方式。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Band Edge_802.11b_20MHz_Chain0_2412MHz

SG



Band Edge_802.11b_20MHz_Chain0_2462MHz



Band Edge_802.11g_20MHz_Chain0_2412MHz



Band Edge_802.11g_20MHz_Chain0_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Re非另有說明,此報告結果僅對測試之樣品員,同時此樣品僅保留的方。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279 台灣檢驗科技股份有限公司 f (886-2) 2298-0488 www.tw.sas.com

Band Edge_802.11n_20MHz_Chain0_2412MHz

SG



Band Edge_802.11n_20MHz_Chain0_2462MHz

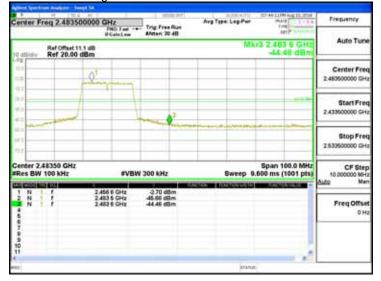

Band Edge_802.11n_40MHz_Chain0_2422MHz



Band Edge_802.11n_40MHz_Chain0_2452MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Re非另有說明,此報告結果僅對測試之樣品員,同時此樣品僅保留的方。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

SGS

Spurious Emission_802.11b_20MHz_Chain0_2412MHz



Spurious Emission_802.11b_20MHz_Chain0_2437MHz

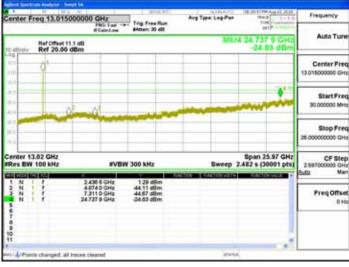

Spurious Emission_802.11b_20MHz_Chain0_2462MHz



Spurious Emission_802.11g_20MHz_Chain0_2412MHz



Spurious Emission_802.11g_20MHz_Chain0_2437MHz



Spurious Emission_802.11g_20MHz_Chain0_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com

Spurious Emission_802.11n_20MHz_Chain0_2412MHz

SG



Spurious Emission 802.11n 20MHz Chain0 2437MHz



Spurious Emission_802.11n_20MHz_Chain0_2462MHz



Spurious Emission_802.11n_40MHz_Chain0_2422MHz



Spurious Emission_802.11n_40MHz_Chain0_2437MHz



Spurious Emission 802.11n 40MHz Chain0 2452MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness only more stated in the lost and the interest of the lost documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488



11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




11.2Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Bi-log Antenna	SCHWAZBECK	VULB9168	378	2017/12/29	2018/12/28
Horn Antenna	Schwarzbeck	BBHA9120D	1441	2018/08/16	2019/08/15
Horn Antenna	Schwarzbeck	BBHA9170	184	2017/12/12	2018/12/11
Loop Antenna	ETS.LINDGREN	6502	148045	2017/09/26	2018/09/25
3m Site NSA	SGS	966 chamber	N/A	2018/01/02	2019/01/01
Spectrum Analyzer	Agilent	E4446A	MY51100003	2018/05/15	2019/05/14
EMI Test Receiver	R&S	ESCI7	100335	2018/02/02	2019/02/01
Pre-Amplifier	HP	8449B	3008A00578	2018/01/02	2019/01/01
Pre-Amplifier	HP	8447D	2944A07676	2018/01/02	2019/01/01
Pre-Amplifier	EMC Instruments	EMC184045B	980135	2017/10/27	2018/10/26
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01
2GHz High Pass Filter	Micro-Tronics	HPM50110	36	2018/01/02	2019/01/01
Filter 5150-5350 MHz	Micro-Tronics	BRM50703	1	2018/01/02	2019/01/01
Low Loss Cable	Huber Suhner	966_RX	9	2018/01/02	2019/01/01




11.3Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

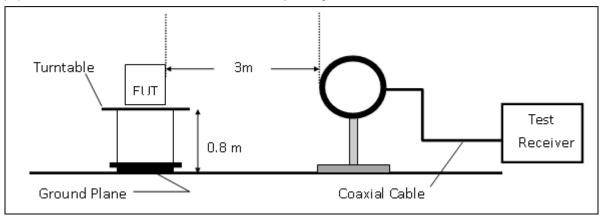



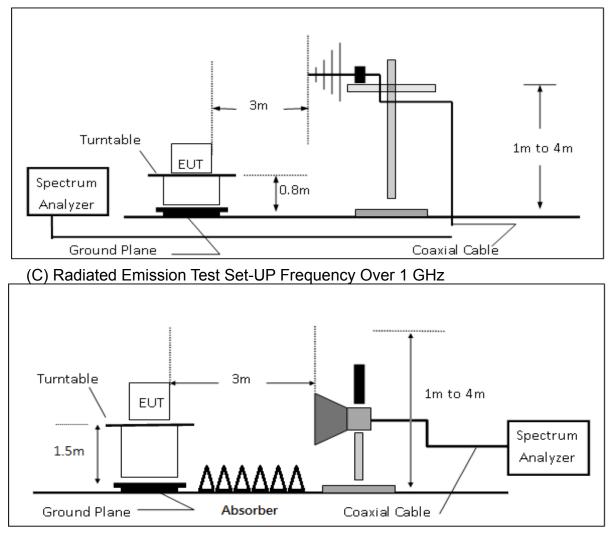

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and store sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



11.4Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

11.5Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)			
	RA = Reading Amplitude	AG = Amplifier Gain			
	AF = Antenna Factor				
Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)					
Factor	Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




Radiated Band Edge Measurement Result

Operation Band	:802.11b
Fundamental Frequency	:2412 MHz
Operation Mode	:Bandedge CH LOW
EUT Pol.	:E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

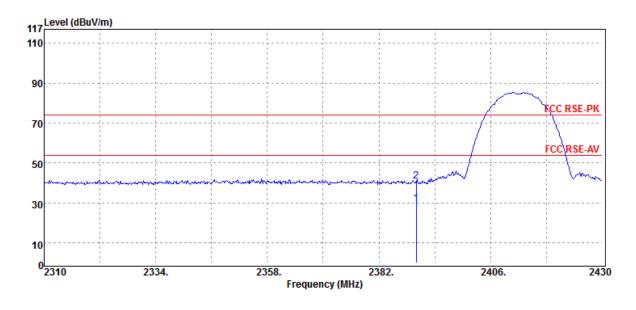

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.27	0.20	29.47	54.00	-24.53
2390.00	Peak	40.66	0.20	40.86	74.00	-33.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 39 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2412 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

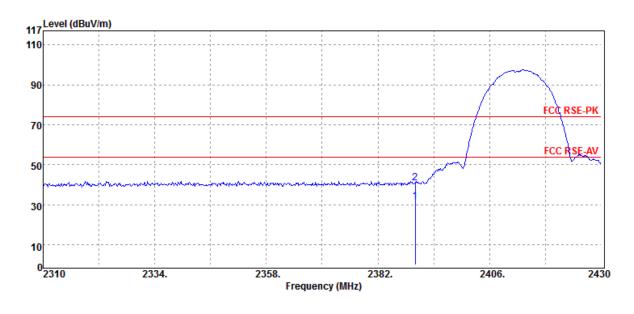

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	31.35	0.20	31.55	54.00	-22.45
Peak	40.60	0.20	40.80	74.00	-33.20
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage31.35	ModeReading LevelPK/QP/AVdBµVdBAverage31.350.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage31.350.2031.55	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 31.35 0.20 31.55 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 40 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

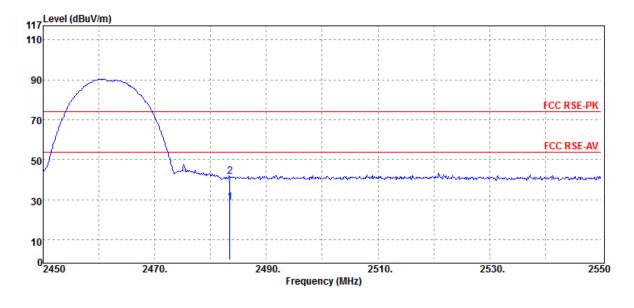

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.31	0.53	28.84	54.00	-25.16
2483.50	Peak	41.16	0.53	41.69	74.00	-32.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 41 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

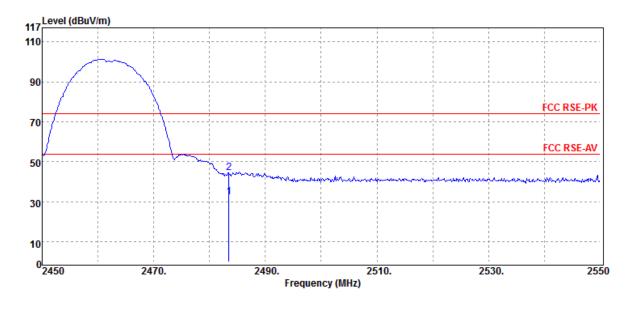

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	31.72	0.53	32.25	54.00	-21.75
2483.50	Peak	43.99	0.53	44.52	74.00	-29.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.:ER/2018/80010 Page 42 of 84



Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2412 MHz :Bandedge CH LOW :E2 Plane

Test Date :2018-08-09 Temp./Humi. :21 deg_C / 62 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

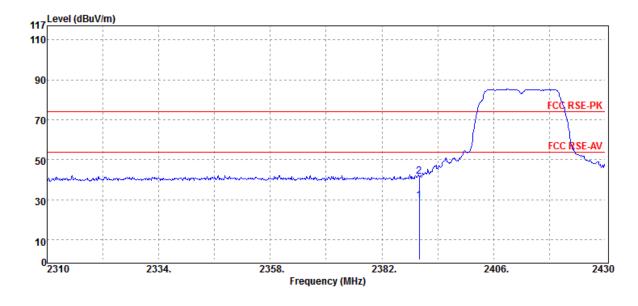

etector Spectrur	m Factor	Actual	Limit	Margin
Mode Reading Le	evel	FS	@3m	-
(/QP/AV dBµV	dB	dBµV/m	dBµV/m	dB
verage 29.29	0.20	29.49	54.00	-24.51
Peak 41.49	0.20	41.69	74.00	-32.31
	Mode Reading Lo (/QP/AV dBµV verage 29.29	Mode Reading Level (/QP/AV dBµV dB verage 29.29 0.20	ModeReading LevelFS(/QP/AVdBµVdBdBµV/mverage29.290.2029.49	Mode Reading Level FS @3m (/QP/AV dBµV dB dBµV/m dBµV/m verage 29.29 0.20 29.49 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 43 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2412 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

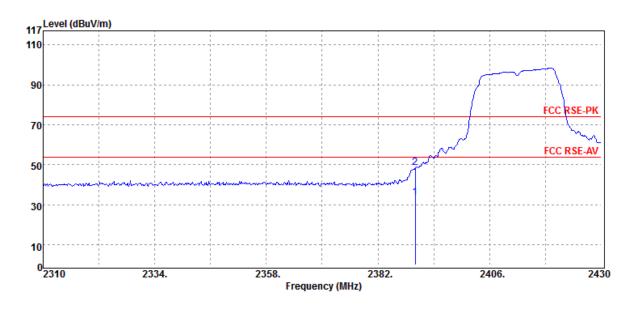

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	33.36	0.20	33.56	54.00	-20.44
2390.00	Peak	48.20	0.20	48.40	74.00	-25.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 44 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

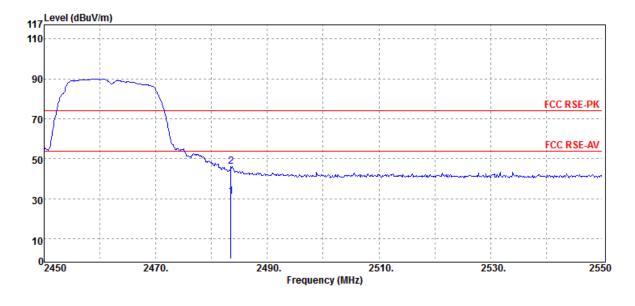

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.63	0.53	31.16	54.00	-22.84
2483.50	Peak	45.73	0.53	46.26	74.00	-27.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 45 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

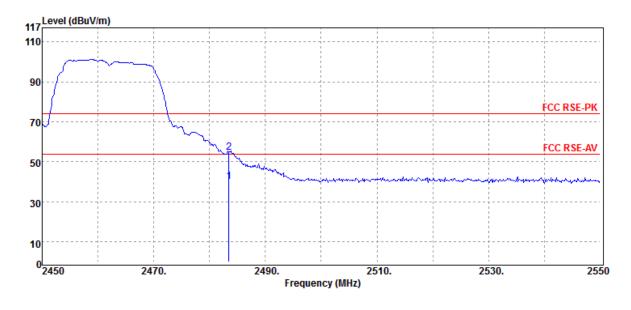

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.41	0.53	39.94	54.00	-14.06
2483.50	Peak	54.27	0.53	54.80	74.00	-19.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 46 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2412 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

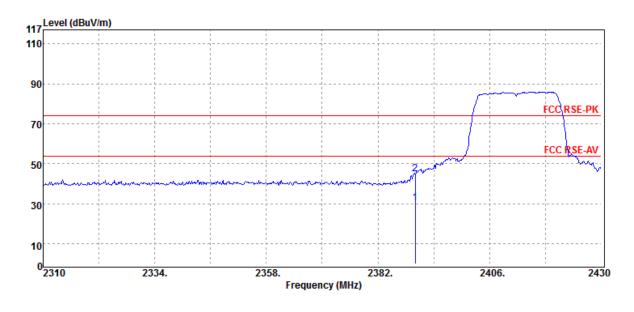

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	30.12	0.20	30.32	54.00	-23.68
2390.00	Peak	44.62	0.20	44.82	74.00	-29.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 47 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2412 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

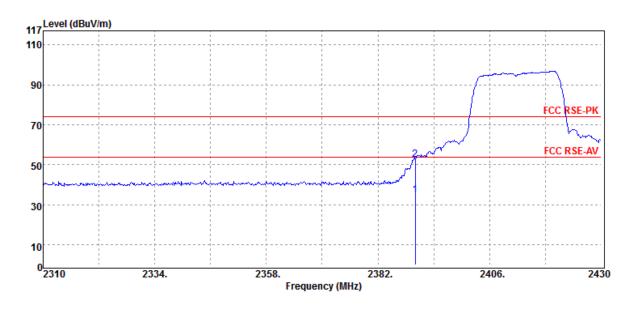

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	34.42	0.20	34.62	54.00	-19.38
2390.00	Peak	52.52	0.20	52.72	74.00	-21.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 48 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

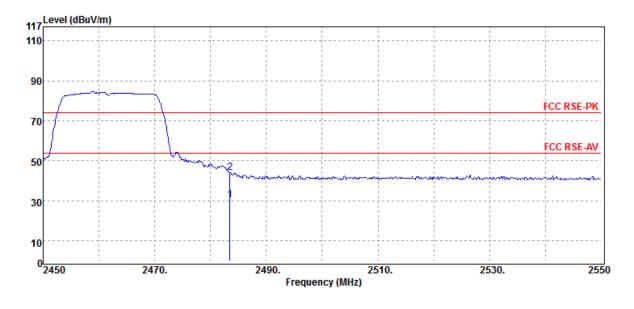

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	29.74	0.53	30.27	54.00	-23.73
Peak	43.52	0.53	44.05	74.00	-29.95
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage29.74	ModeReading LevelPK/QP/AVdBµVdBAverage29.740.53	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage29.740.5330.27	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 29.74 0.53 30.27 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 49 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2462 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

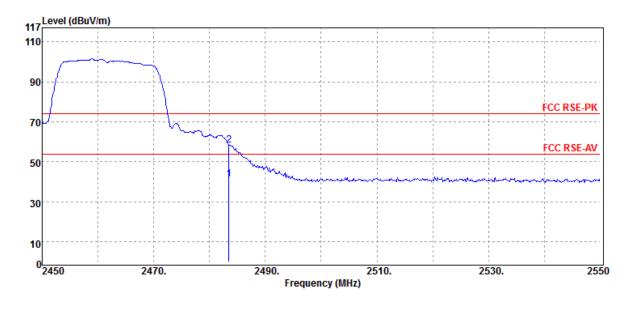

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	40.86	0.53	41.39	54.00	-12.61
2483.50	Peak	57.73	0.53	58.26	74.00	-15.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 50 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2422 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

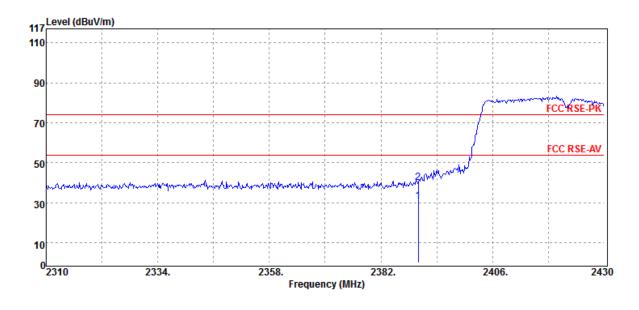

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	30.62	0.20	30.82	54.00	-23.18
Peak	39.97	0.20	40.17	74.00	-33.83
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage30.62	ModeReading LevelPK/QP/AVdBµVdBAverage30.620.20	ModeReading LevelFSPK/QP/AVdBμVdBdBμV/mAverage30.620.2030.82	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 30.62 0.20 30.82 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 51 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2422 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

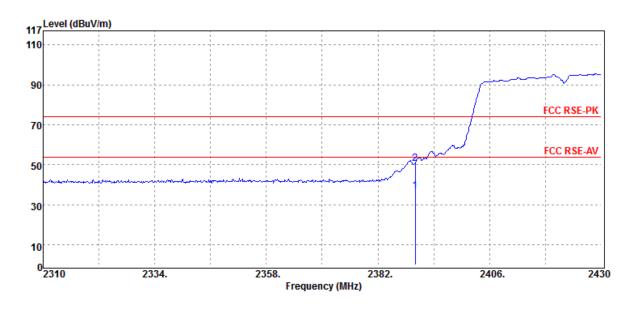

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	36.45	0.20	36.65	54.00	-17.35
Peak	50.60	0.20	50.80	74.00	-23.20
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage36.45	ModeReading LevelPK/QP/AVdBµVdBAverage36.450.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage36.450.2036.65	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 36.45 0.20 36.65 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 52 of 84




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:802.11n40 :2452 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :VERTICAL

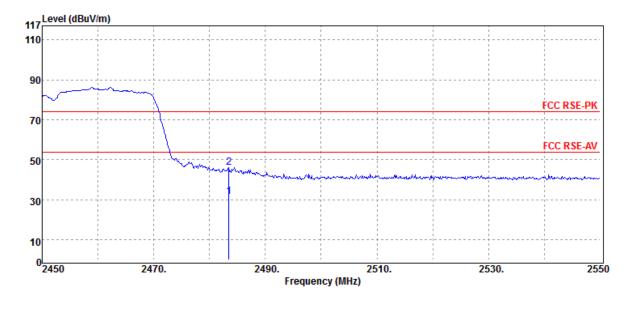

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.92	0.53	31.45	54.00	-22.55
2483.50	Peak	45.45	0.53	45.98	74.00	-28.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 53 of 84




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2452 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :Tin :HORIZONTAL

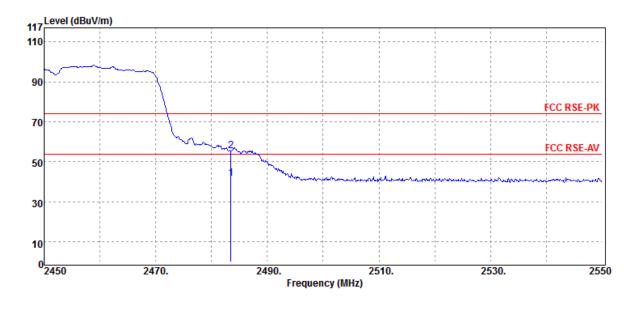

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	41.24	0.53	41.77	54.00	-12.23
Peak	54.94	0.53	55.47	74.00	-18.53
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage41.24	ModeReading LevelPK/QP/AVdBµVdBAverage41.240.53	ModeReading LevelFSPK/QP/AVdBμVdBdBμV/mAverage41.240.5341.77	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 41.24 0.53 41.77 54.00


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result

Below 1GHz (Worst Case):

Operation Band	:802.11g	Test Date	:2018-08-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg C / 62 RH
Operation Mode	:Tx CH MID :E2 Plane	Engineer	:Tin :VERTICAL

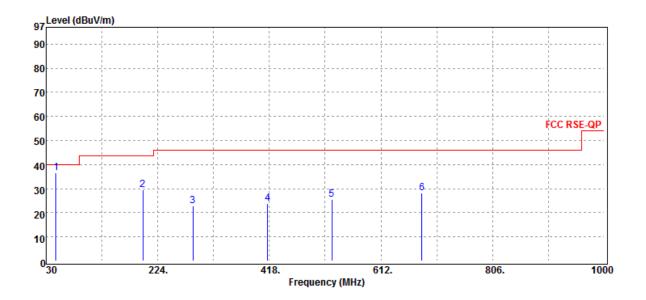


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
47.46	Peak	44.28	-7.64	36.64	40.00	-3.36
197.81	Peak	38.89	-9.20	29.69	43.50	-13.81
285.11	Peak	28.95	-5.99	22.96	46.00	-23.04
415.09	Peak	26.62	-2.95	23.67	46.00	-22.33
526.64	Peak	27.06	-1.43	25.63	46.00	-20.37
682.81	Peak	26.74	1.53	28.27	46.00	-17.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 55 of 84



Operation Band	:802.11g	Test Date	:2018-08-14
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

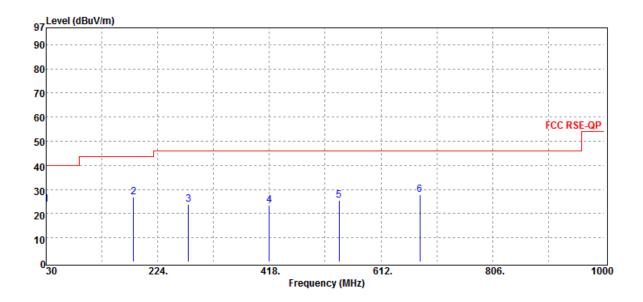

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	Peak	32.75	-8.96	23.79	40.00	-16.21
182.29	Peak	35.22	-8.37	26.85	43.50	-16.65
277.35	Peak	30.08	-6.27	23.81	46.00	-22.19
418.00	Peak	26.48	-2.84	23.64	46.00	-22.36
539.25	Peak	26.69	-1.31	25.38	46.00	-20.62
679.90	Peak	26.40	1.45	27.85	46.00	-18.15


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result

Above 1GHz:

Operation Band	:802.11b	Test Date	:2018-08-09
Fundamental Frequency	:2412 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

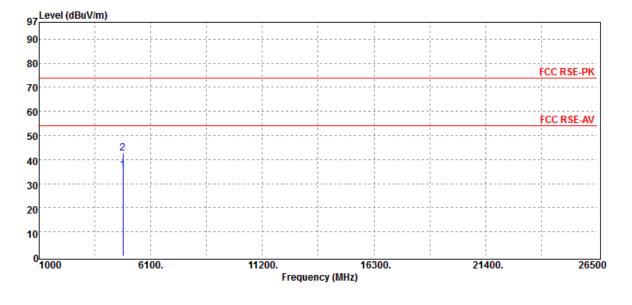


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	30.10	5.61	35.71	54.00	-18.29
4824.00	Peak	36.87	5.61	42.48	74.00	-31.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 57 of 84



Operation Mode:Tx CH LOWEngineer:TinEUT Pol.:E2 PlaneMeasurement Antenna Pol.:HORIZONTAL	Operation Band Fundamental Frequency Operation Mode EUT Pol.	:802.11b :2412 MHz :Tx CH LOW :E2 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.	
--	---	--	--	--

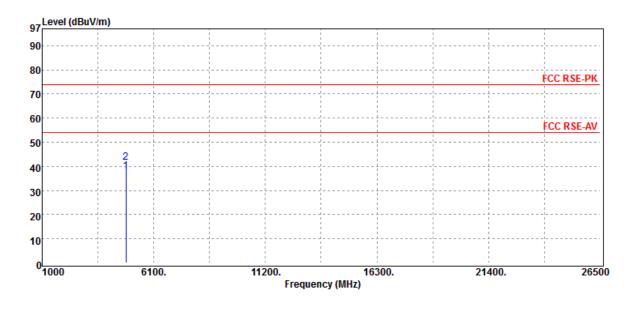


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	32.32	5.61	37.93	54.00	-16.07
4824.00	Peak	35.91	5.61	41.52	74.00	-32.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 58 of 84



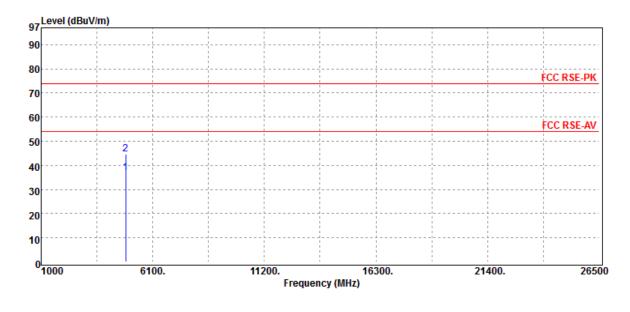


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	31.12	5.85	36.97	54.00	-17.03
4874.00	Peak	38.83	5.85	44.68	74.00	-29.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 59 of 84



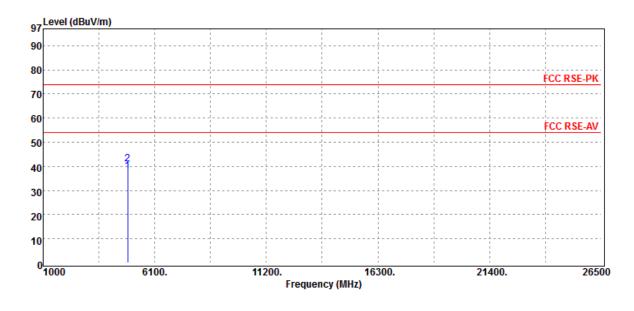

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	32.23	5.85	38.08	54.00	-15.92
4874.00	Peak	35.01	5.85	40.86	74.00	-33.14


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 60 of 84



Operation Band :802.11b Test Date Fundamental Frequency :2462 MHz Temp./Humi. **Operation Mode** :Tx CH HIGH Engineer EUT Pol. :E2 Plane

:2018-08-09 :21 deg_C / 62 RH :Tin :VERTICAL Measurement Antenna Pol.

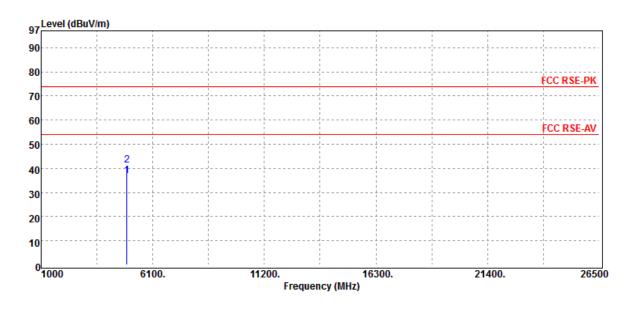

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	31.19	5.82	37.01	54.00	-16.99
4924.00	Peak	35.39	5.82	41.21	74.00	-32.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.:ER/2018/80010 Page 61 of 84



Operation Band :802.11b Fundamental Frequency :2462 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :HORIZONTAL

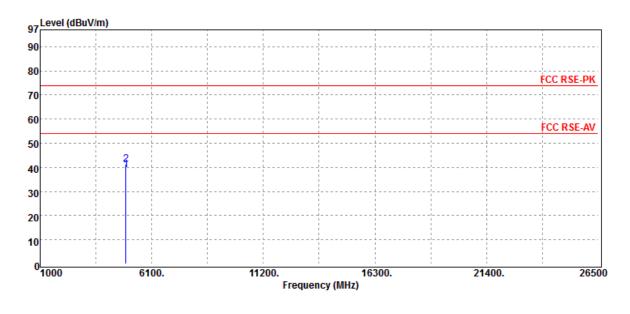


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	33.13	5.82	38.95	54.00	-15.05
4924.00	Peak	35.61	5.82	41.43	74.00	-32.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 62 of 84



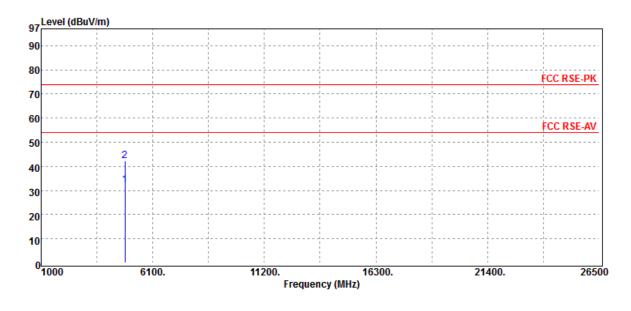


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	26.54	5.61	32.15	54.00	-21.85
4824.00	Peak	36.76	5.61	42.37	74.00	-31.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 63 of 84



Operation Mode :Tx CH LOW Engine	/Humi. :21 deg_C / 62 RH
----------------------------------	--------------------------

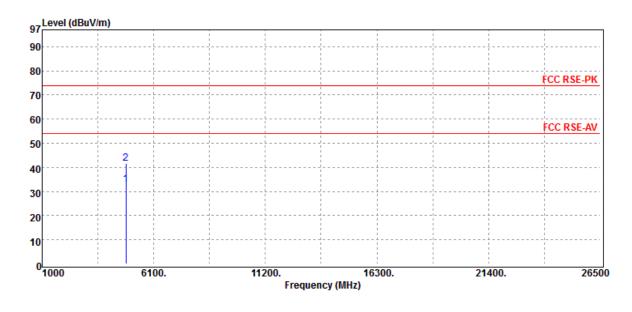


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.14	5.61	32.75	54.00	-21.25
4824.00	Peak	35.85	5.61	41.46	74.00	-32.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 64 of 84



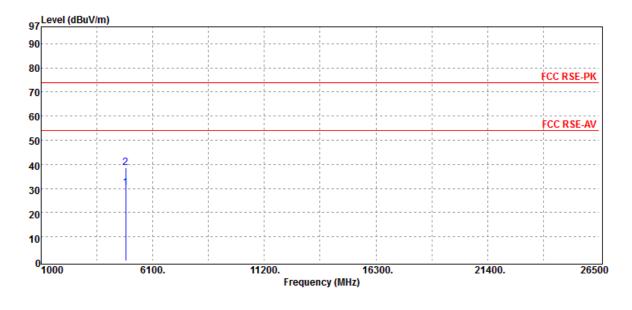

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	26.12	4.08	30.20	54.00	-23.80
4874.00	Peak	34.59	4.08	38.67	74.00	-35.33
407 4.00	I Car	04.00	4.00	00.07	74.00	00.00


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 65 of 84



Operation Band :802.11g Test Date :2018-08-09 Fundamental Frequency :2437 MHz Temp./Humi. **Operation Mode** :Tx CH MID Engineer EUT Pol. :E2 Plane Measurement Antenna Pol.

:21 deg_C / 62 RH :Tin :HORIZONTAL

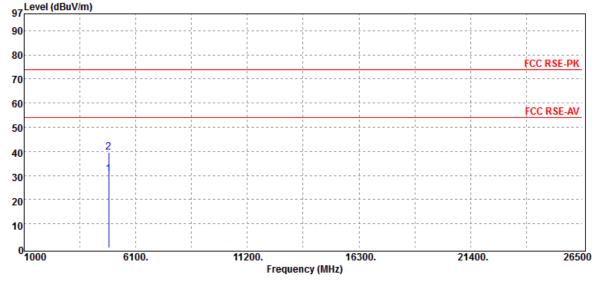

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	26.54	4.08	30.62	54.00	-23.38
4874.00	Peak	35.38	4.08	39.46	74.00	-34.54


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 66 of 84



Operation Band :802.11g Fundamental Frequency :2462 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E2 Plane

Test Date :2018-08-09 Temp./Humi. :21 deg_C / 62 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

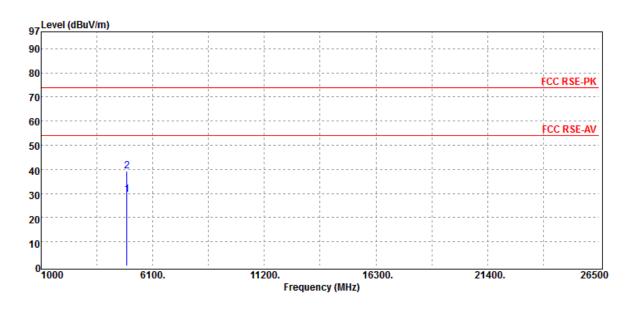

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	25.56	4.05	29.61	54.00	-24.39
4924.00	Peak	35.31	4.05	39.36	74.00	-34.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.:ER/2018/80010 Page 67 of 84



Operation Band :802.11g Fundamental Frequency :2462 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :HORIZONTAL

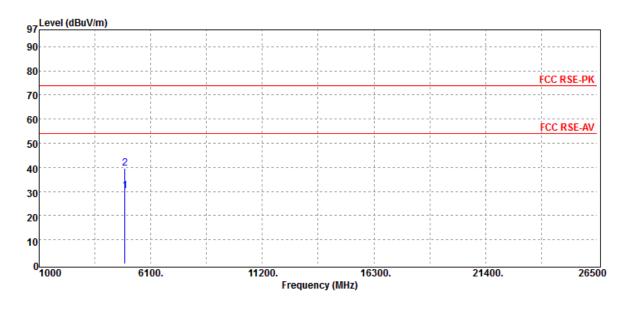


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	26.24	4.05	30.29	54.00	-23.71
4924.00	Peak	35.61	4.05	39.66	74.00	-34.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 68 of 84



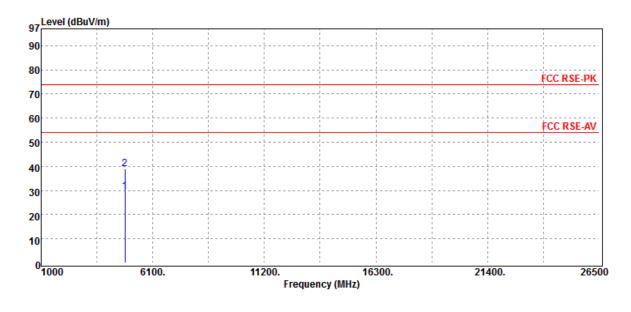


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	25.73	3.87	29.60	54.00	-24.40
4824.00	Peak	35.23	3.87	39.10	74.00	-34.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 69 of 84



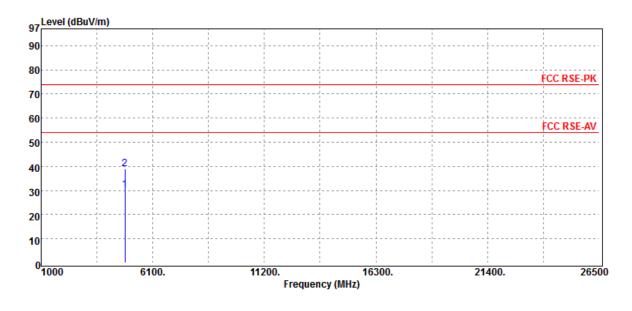


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	26.40	3.87	30.27	54.00	-23.73
4824.00	Peak	35.12	3.87	38.99	74.00	-35.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 70 of 84



EUT Pol. :E2 Plane Measurement Antenna Pol. :VERTICAL	Operation Band	:802.11n20	Test Date	:2018-08-09
	Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
	Operation Mode	:Tx CH MID	Engineer	:Tin
	EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

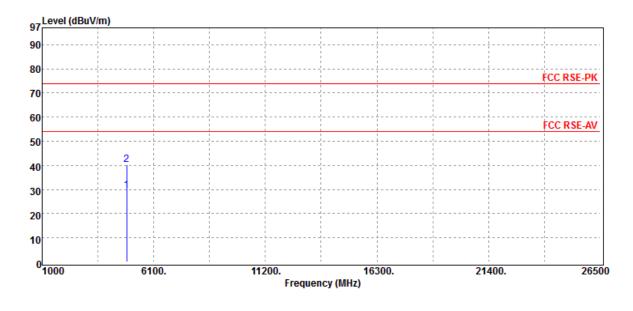


Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	25.33	4.08	29.41	54.00	-24.59
Peak	36.21	4.08	40.29	74.00	-33.71
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage25.33	ModeReading LevelPK/QP/AVdBµVdBAverage25.334.08	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage25.334.0829.41	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 25.33 4.08 29.41 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 71 of 84



Operation Band	:802.11n20	Test Date	:2018-09-04
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane		:HORIZONTAL

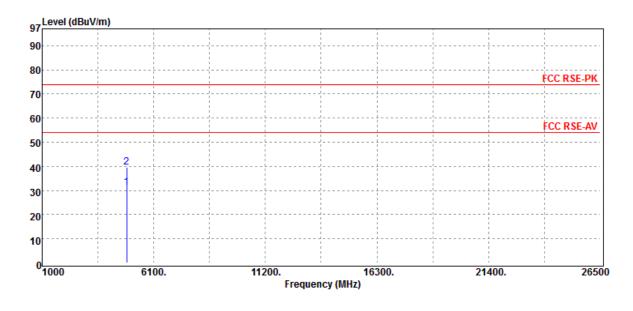


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	4874.00	Average	25.40	5.85	31.25	54.00	-22.75
	4874.00	Peak	35.55	4.08	39.63	74.00	-34.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 72 of 84



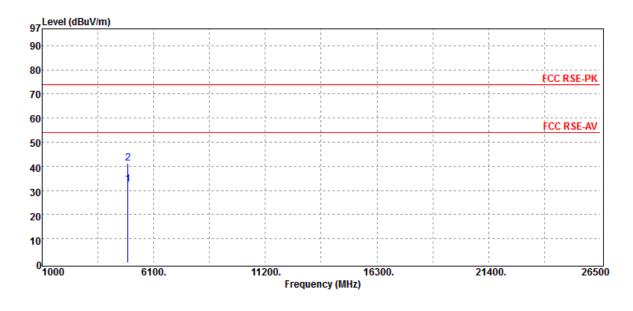

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	26.66	5.82	32.48	54.00	-21.52
4924.00	Peak	35.35	5.82	41.17	74.00	-32.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.:ER/2018/80010 Page 73 of 84



Operation Band :802.11n20 Test Date Fundamental Frequency :2462 MHz **Operation Mode** :Tx CH HIGH Engineer EUT Pol. :E2 Plane

Temp./Humi. :Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :HORIZONTAL

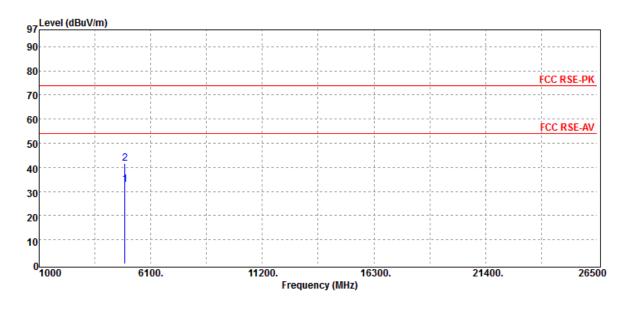


Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	27.17	5.82	32.99	54.00	-21.01
Peak	35.86	5.82	41.68	74.00	-32.32
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage27.17	ModeReading LevelPK/QP/AVdBµVdBAverage27.175.82	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage27.175.8232.99	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 27.17 5.82 32.99 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 74 of 84



	Operation Mode	:Tx CH LOW	Engineer	
--	----------------	------------	----------	--

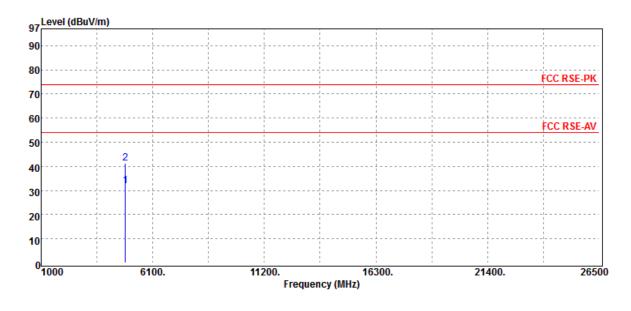


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	26.35	5.60	31.95	54.00	-22.05
4844.00	Peak	35.81	5.60	41.41	74.00	-32.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 75 of 84



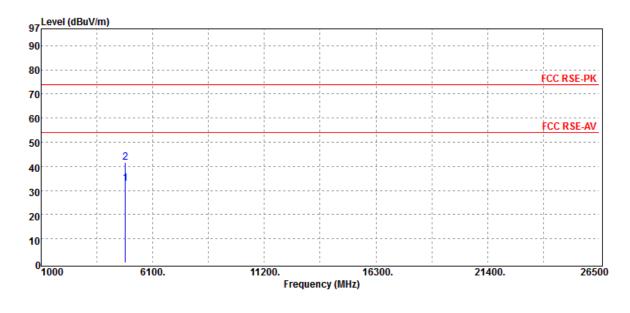


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.42	5.60	33.02	54.00	-20.98
4844.00	Peak	36.06	5.60	41.66	74.00	-32.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 76 of 84



EUT Pol. :E2 Plane Measurement Antenna Pol. :VERTICAL	Fundamental Frequency :2 Operation Mode :7		Engineer	:2018-08-09 :21 deg_C / 62 RH :Tin :VERTICAL
---	---	--	----------	---

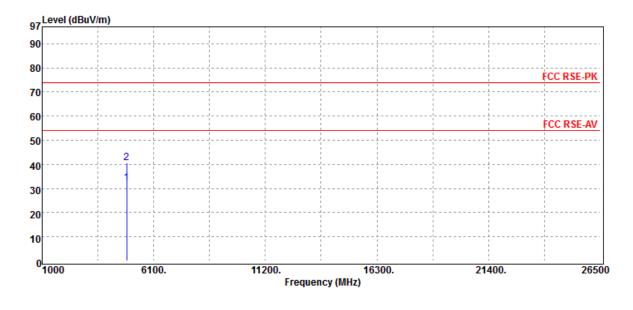

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	26.34	5.85	32.19	54.00	-21.81
4874.00	Peak	34.85	5.85	40.70	74.00	-33.30


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 77 of 84

62 RH



Fundamental Frequency :243 Operation Mode :Tx	CH MID Engir	./Humi. :21 deg_C /	62 F
--	--------------	---------------------	------

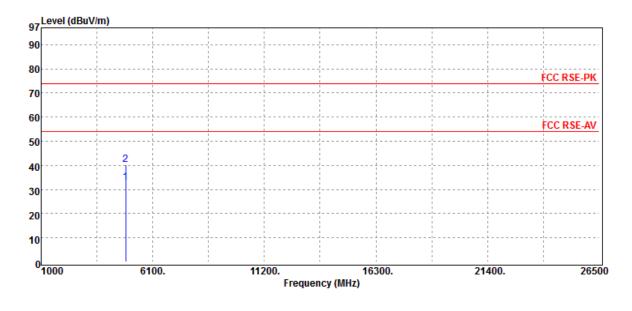


etector Spectrum	Factor	Actual	Limit	Margin
Mode Reading Lev	el	FS	@3m	
/QP/AV dBµV	dB d	dBµV/m	dBµV/m	dB
verage 27.19	5.85	33.04	54.00	-20.96
Peak 34.36	5.85	40.21	74.00	-33.79
	Mode Reading Lev /QP/AV dBµV verage 27.19	Mode Reading Level /QP/AV dBµV dB verage 27.19 5.85	ModeReading LevelFS/QP/AVdBµVdBdBµV/mverage27.195.8533.04	Mode Reading Level FS @3m /QP/AV dBµV dB dBµV/m dBµV/m verage 27.19 5.85 33.04 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.:ER/2018/80010 Page 78 of 84



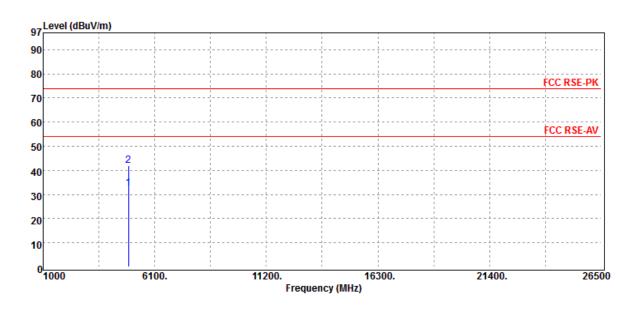

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4904.00	Average	26.56	5.85	32.41	54.00	-21.59
4904.00	Peak	35.97	5.85	41.82	74.00	-32.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.:ER/2018/80010 Page 79 of 84



Operation Band :802.11n40 Test Date Fundamental Frequency :2452 MHz Temp./Humi. **Operation Mode** :Tx CH HIGH Engineer EUT Pol. :E2 Plane

:Tin Measurement Antenna Pol.

:2018-08-09 :21 deg_C / 62 RH :HORIZONTAL

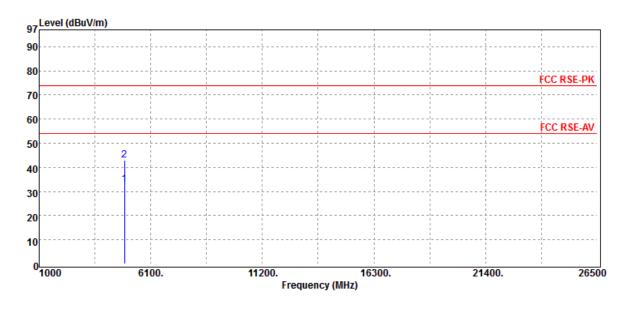

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4904.00	Average	26.99	5.85	32.84	54.00	-21.16
4904.00	Peak	37.04	5.85	42.89	74.00	-31.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 PEAK POWER SPECTRAL DENSITY


12.1 Standard Applicable

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

12.2Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	2018/05/03	2019/05/02
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01
DC Block	Mini-Circuits	BLK-18-S+	1	2018/01/02	2019/01/01
Coaxial Cables	N/A	WK CE Cable	N/A	2018/01/02	2019/01/01

12.3Test Set-up



12.4Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.



12.5Measurement Result

POWER DENSITY 802.11b			POWER DENSITY 802.11g				
Freq.	PPSD	Limit	Result	Freq.	PPSD	Limit	Decult
(MHz)	(dBm)	(dBm)		(MHz)	(dBm)	(dBm)	Result
2412	-15.68	8.00	PASS	2412	-17.28	8.00	PASS
2437	-15.96	8.00	PASS	2437	-17.54	8.00	PASS
2462	-15.97	8.00	PASS	2462	-17.45	8.00	PASS

POWER DENSITY 802.11n HT20				POWER DENSITY 802.11n HT40			
Freq.	PPSD	Limit	Result	Freq.	PPSD	Limit	Result
(MHz)	(dBm)	(dBm)		(MHz)	(dBm)	(dBm)	
2412	-16.56	8.00	PASS	2422	-19.16	8.00	PASS
2437	-17.03	8.00	PASS	2437	-17.65	8.00	PASS
2462	-16.97	8.00	PASS	2452	-18.43	8.00	PASS

*Refer to next page for plots

Power Density_802.11b_20MHz_Chain0_2412MHz



Power Density 802.11b 20MHz Chain0 2437MHz




Power Density 802.11b 20MHz Chain0 2462MHz



Power Density_802.11g_20MHz_Chain0_2412MHz



Power Density 802.11g 20MHz Chain0 2437MHz

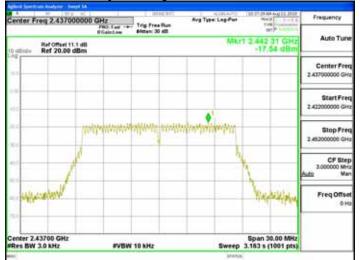

Power Density_802.11g_20MHz_Chain0_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

Power Density_802.11n_20MHz_Chain0_2412MHz

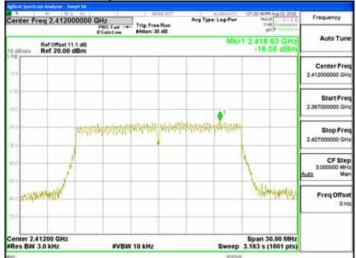

Power Density_802.11n_20MHz Chain0 2437MHz




Power Density 802.11n 20MHz Chain0 2462MHz








Power Density_802.11n_40MHz Chain0 2437MHz

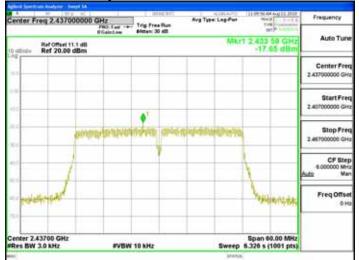

Power Density_802.11n_40MHz_Chain0_2452MHz

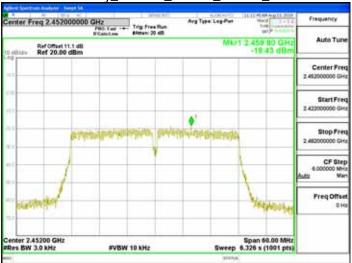

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

biness only more stated in the lost and the interest of the lost documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines Galaxie in state and state tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.