

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Soundbar

ISSUED TO
ALCO Electronics Limited.

11/F Zung Fu Industrial Buiding 1067 King's Road, Quarry Bay Hong kong



Tested by:

Zhengmuyi
Zheng Muyi
(Engineer)

Date

May 22, 2017

Approved by:

Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date

May 22, 2017

Report No.: BL-SZ1730152-602

EUT Name: Soundbar

Model Name: SBT17113WS, RTS7113WS

Brand Name: Venturer / RCA

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: A2HRTS7113WS

Test conclusion: Pass

Test Date: Apr. 20, 2017 ~ Apr. 27, 2017

Date of Issue: May 22, 2017

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>May 22, 2017</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	6
1.1	Identification of the Testing Laboratory	6
1.2	Identification of the Responsible Testing Location	6
1.3	Laboratory Condition	6
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Ancillary Equipment	8
2.6	Technical Information	9
2.7	Additional Instructions	10
3	SUMMARY OF TEST RESULTS	12
3.1	Test Standards	12
3.2	Verdict	12
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments	13
4.2	Test Equipment List	13
4.3	Measurement Uncertainty	14
4.4	Description of Test Setup	15
4.4.1	For Antenna Port Test	15
4.4.2	For AC Power Supply Port Test	16
4.4.3	For Radiated Test (Below 30 MHz)	16
4.4.4	For Radiated Test (30 MHz-1 GHz)	17

4.4.5	For Radiated Test (Above 1 GHz).....	17
4.5	Measurement Results Explanation Example.....	18
4.5.1	For conducted test items:.....	18
4.5.2	For radiated band edges and spurious emission test:.....	18
5	TEST ITEMS.....	19
5.1	Antenna Requirements.....	19
5.1.1	Standard Applicable	19
5.1.2	Antenna Anti-Replacement Construction	19
5.1.3	Antenna Gain	20
5.2	Number of Hopping Frequencies	21
5.2.1	Limit.....	21
5.2.2	Test Setup	21
5.2.3	Test Procedure	21
5.2.4	Test Result	21
5.3	Peak Output Power and E.I.R.P.....	22
5.3.1	Test Limit.....	22
5.3.2	Test Setup	22
5.3.3	Test Procedure	22
5.3.4	Test Result	22
5.4	Occupied Bandwidth	23
5.4.1	Limit.....	23
5.4.2	Test Setup	23
5.4.3	Test Procedure	23
5.4.4	Test Result	23
5.5	Carrier Frequency Separation	24
5.5.1	Limit.....	24
5.5.2	Test Setup	24
5.5.3	Test Procedure	24
5.5.4	Test Result	24
5.6	Time of Occupancy (Dwell time)	25
5.6.1	Limit.....	25

5.6.2	Test Setup	25
5.6.3	Test Procedure	25
5.6.4	Test Result	25
5.7	Conducted Spurious Emission & Authorized-band band-edge	26
5.7.1	Limit.....	26
5.7.2	Test Setup	26
5.7.3	Test Procedure	26
5.7.4	Test Result	26
5.8	Conducted Emission	27
5.8.1	Limit.....	27
5.8.2	Test Setup	27
5.8.3	Test Procedure	27
5.8.4	Test Result	27
5.9	Radiated Spurious Emission	28
5.9.1	Limit.....	28
5.9.2	Test Setup	28
5.9.3	Test Procedure	28
5.9.4	Test Result	29
5.10	Band Edge (Restricted-band band-edge).....	30
5.10.1	Limit.....	30
5.10.2	Test Setup	30
5.10.3	Test Procedure	30
5.10.4	Test Result	30
ANNEX A	TEST RESULT	31
A.1	Number of Hopping Frequency	31
A.2	Peak Output Power	32
A.3	20 dB and 99% bandwidth	35
A.4	Hopping Frequency Separation.....	38
A.5	Average Time of Occupancy	39
A.6	Conducted Spurious Emissions & Authorized-band band-edge	41
A.7	Conducted Emissions.....	48

A.8	Radiated Spurious Emission	54
A.9	Band Edge (Restricted-band band-edge).....	67
ANNEX B	TEST SETUP PHOTOS	70
ANNEX C	EUT EXTERNAL PHOTOS	70
ANNEX D	EUT INTERNAL PHOTOS	70

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20 to 25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.6.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	ALCO Electronics Limited.
Address	11/F Zung Fu Industrial Buiding 1067 King's Road, Quarry Bay Hong kong

2.2 Manufacturer Information

Manufacturer	Alco Electronics (Dongguan) Limited.
Address	Gong Ye Xi Road, Houjie Technology Industrial Park, Houjie, Dongguan, Guangdong, P.R.C. Postal Code: 523960

2.3 Factory Information

Factory	Alco Electronics (Dongguan) Limited.
Address	Gong Ye Xi Road, Houjie Technology Industrial Park, Houjie, Dongguan, Guangdong, P.R.C. Postal Code: 523960

2.4 General Description for Equipment under Test (EUT)

EUT Type	Soundbar
Model Name Under Test	SBT17113WS
Series Model Name	SBT17113WS, RTS7113WS
Description of Model name differentiation	With different model no. and brand name used for trading purpose, which model name is SBT17113WS related to brand name Venturer, and model name is RTS7113WS related to brand name RCA.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	Bluetooth 4.1

2.5 Ancillary Equipment

Ancillary Equipment 1	Adapter 1	
	Brand Name	GST
	Model No.	GT-WCAL13000130-302
	Serial No.	N/A
	Rated Input	100-120 V~, 0.4 A, 50/60 Hz
	Rated Output	13 V=, 1.3 A
Ancillary Equipment 2	Adapter 2	
	Brand Name	GST
	Model No.	GT-WWLA13000180-302
	Serial No.	N/A
	Rated Input	100-120 V~, 0.7 A, 50/60 Hz
	Rated Output	13 V=, 1.8 A
Ancillary Equipment 3	Adapter 3	
	Brand Name	Uprite
	Model No.	ZL-B024W1301800
	Serial No.	N/A
	Rated Input	100-240 V~, 1 A, 50/60 Hz
	Rated Output	13 V=, 1.8 A
Ancillary Equipment 4	Remote Control	

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	Mobile
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PCB Antenna
Antenna Gain	3 dBi (All involve the antenna gain test item, has been included in the final results)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.7 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing. Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	ESP Series Modules FCC & CE Test Tool V2.1		
Support Units (Software installation media)	Description	Manufacturer	Model
	Laptop	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 15
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software

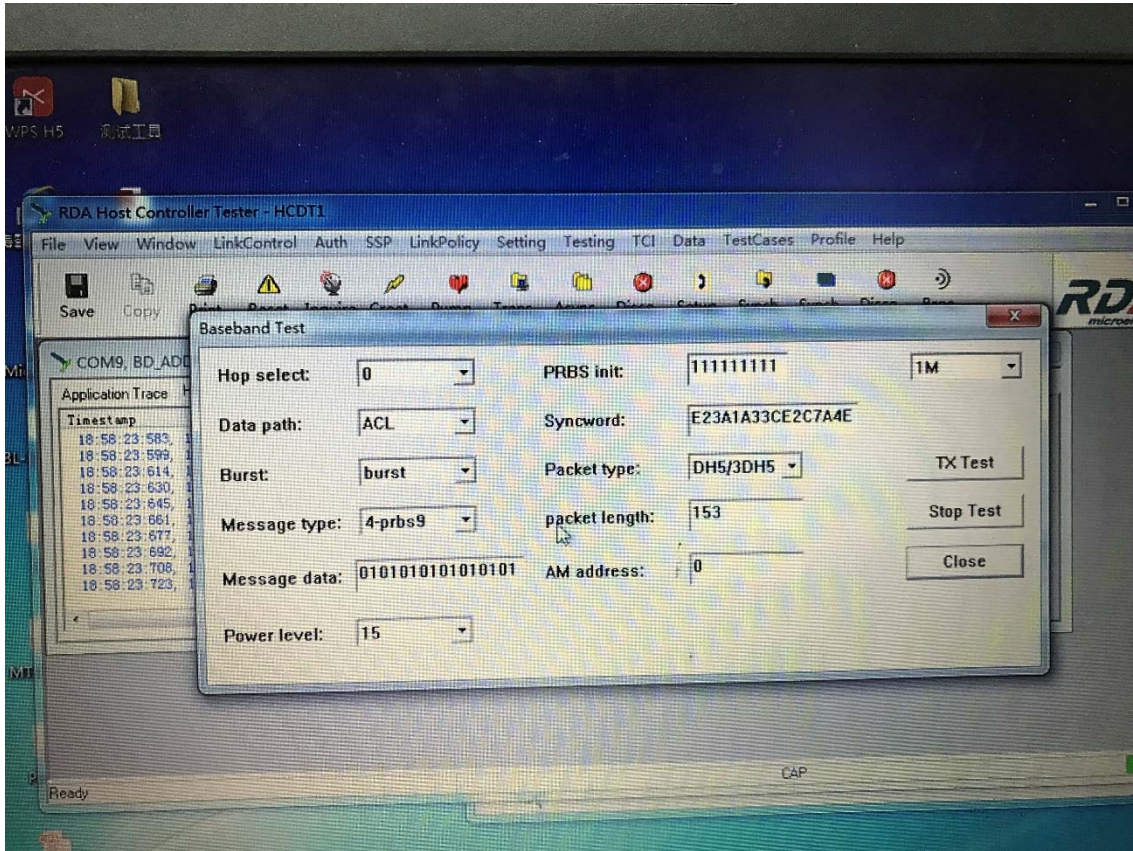

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-15 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²

Note¹: Please refer to section 5.1

Note²: Because of the modulation of $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	13 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2016.07.13	2017.07.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2016.07.13	2017.07.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2016.09.09	2017.09.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2016.07.13	2017.07.12
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2016.07.13	2017.07.12
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2016.07.13	2017.07.12
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2016.07.13	2017.07.12
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2016.07.13	2017.07.12
Power Amplifier	OPHIR RF	5225F	1037	2017.02.17	2018.02.16
Power Amplifier	OPHIR RF	5273F	1016	2017.02.17	2018.02.16
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2017.02.23	2018.02.22
Mouth Simulator	B&K	4227	2423931	2016.11.15	2017.11.14
Sound Calibrator	B&K	4231	2430337	2016.11.09	2017.11.08
Sound Level Meter	B&K	NL-20	00844023	2016.11.11	2017.11.10
Ear Simulator	B&K	4185	2409449	2016.11.15	2017.11.14
Ear Simulator	B&K	4195	2418189	2016.11.15	2017.11.14
Audio analyzer	B&K	UPL 16	100129	2016.11.08	2017.11.07

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

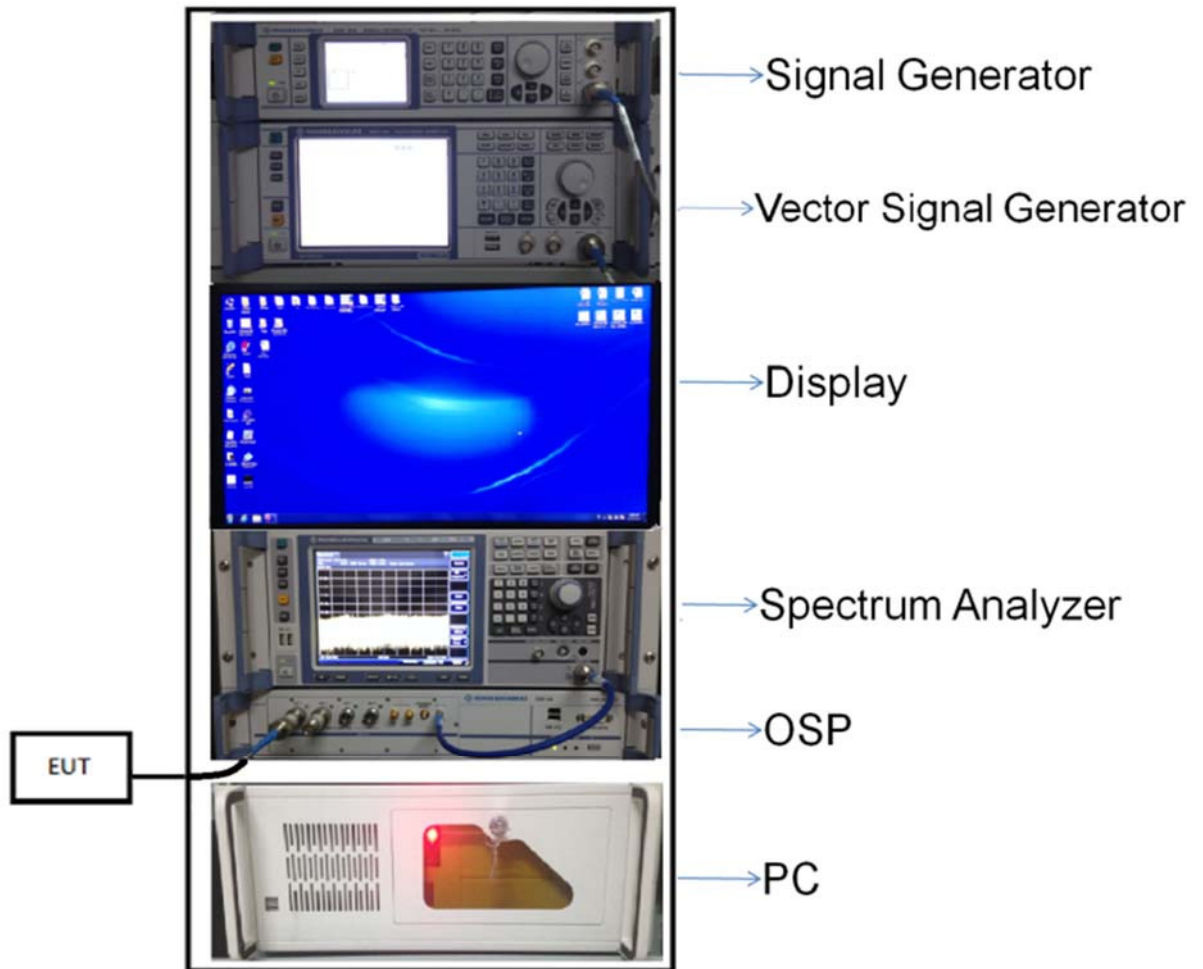


(Diagram 1)

4.4.2 For AC Power Supply Port Test

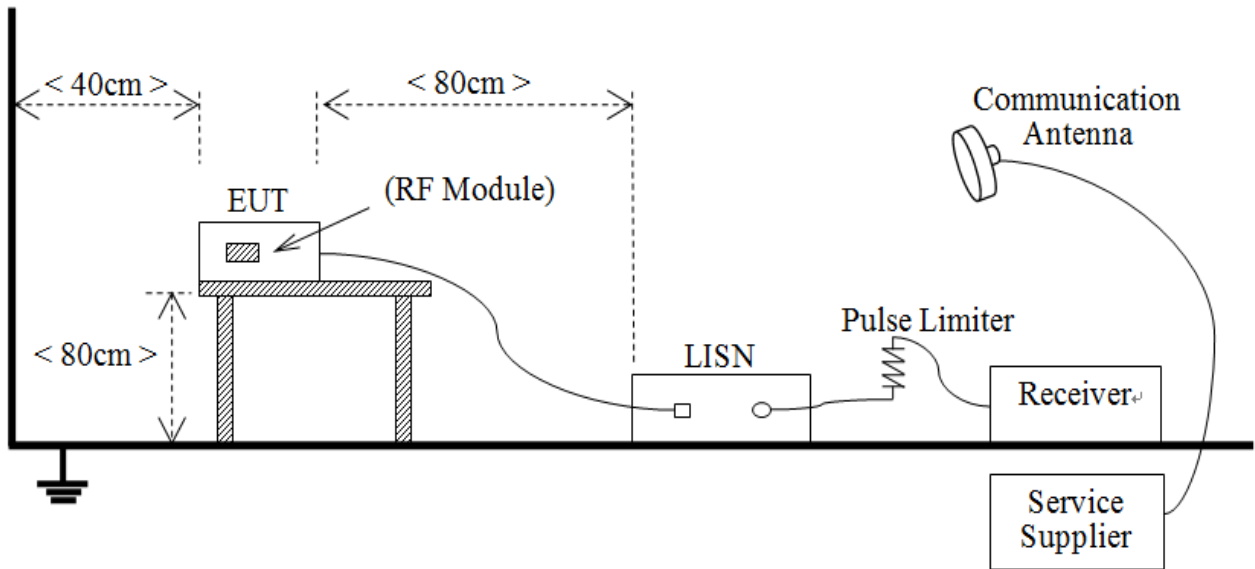


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

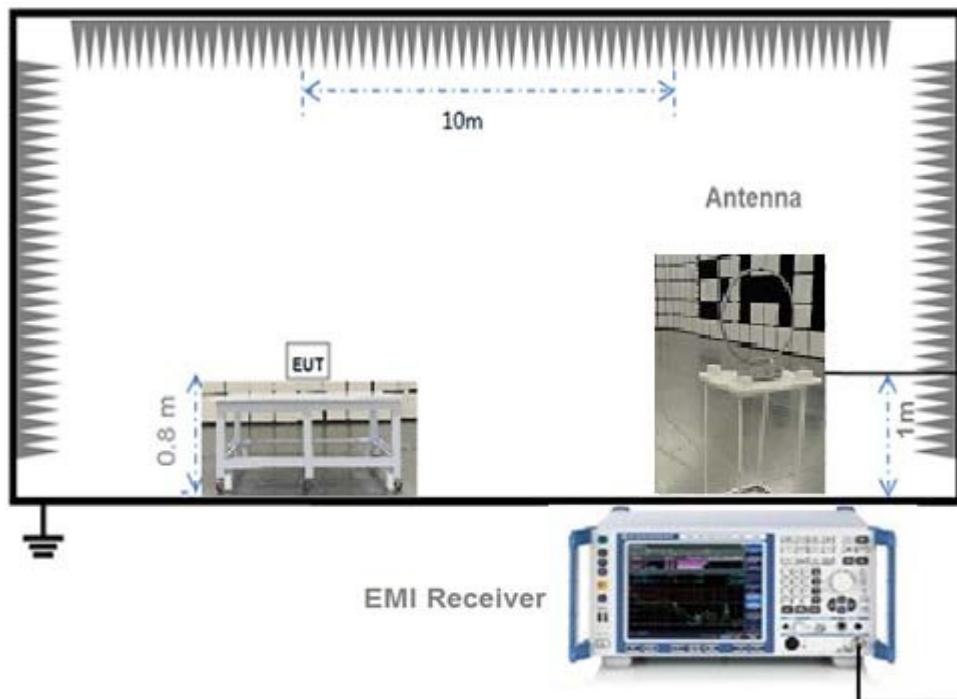


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

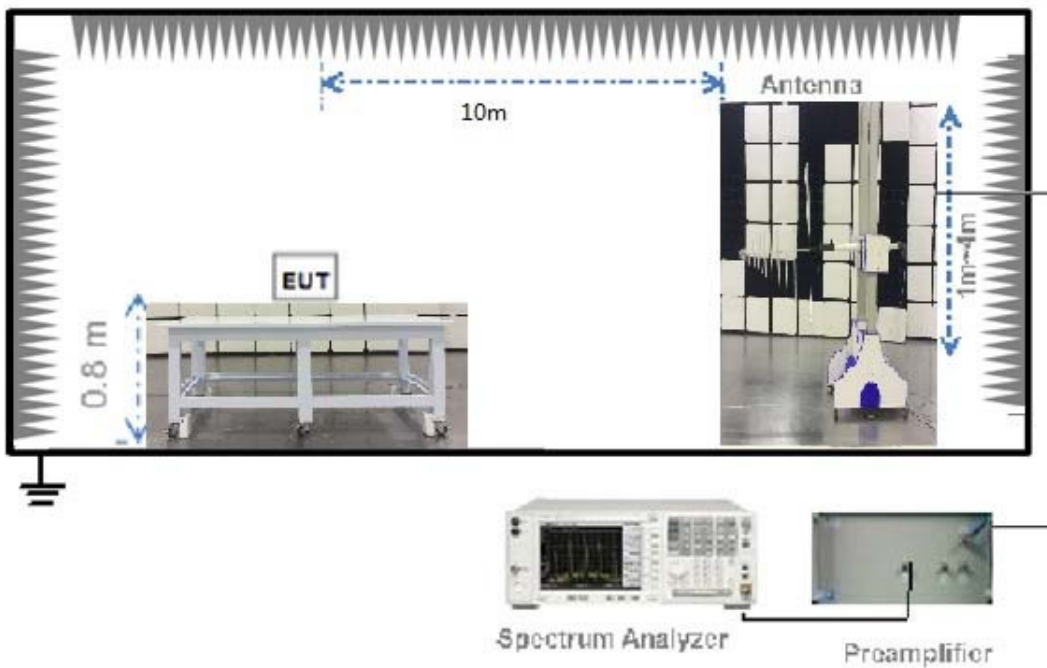

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

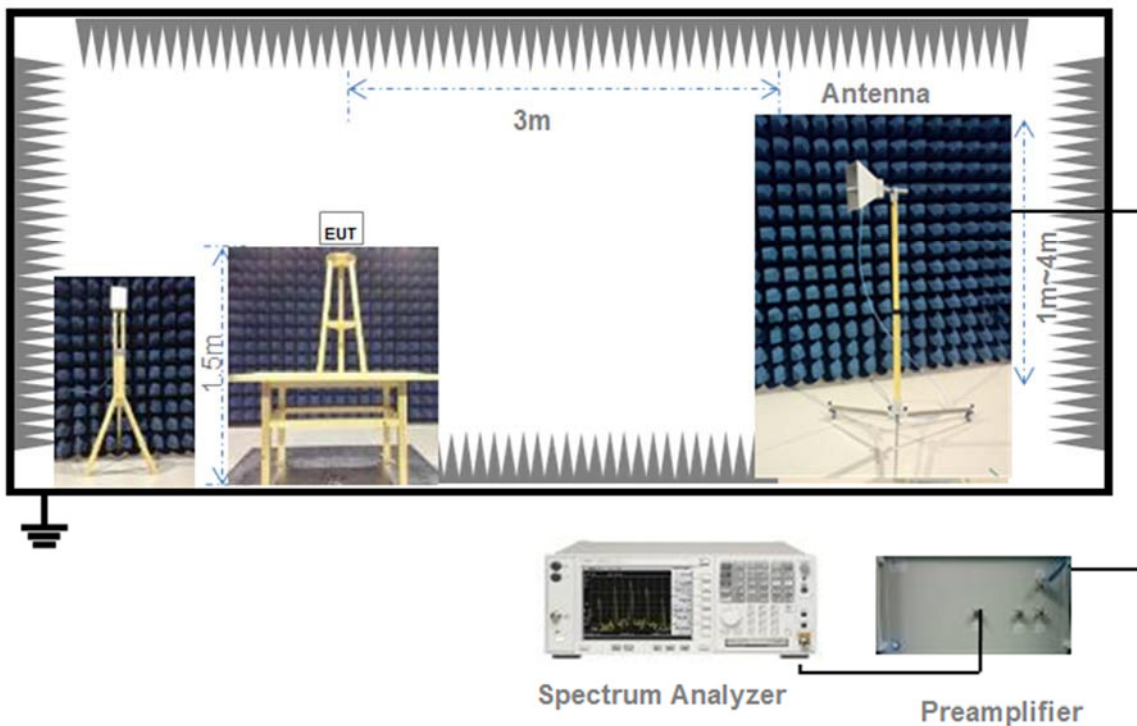

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log(\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Standard Applicable

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	The antenna is welded on the mainboard, can't be replaced by the consumer

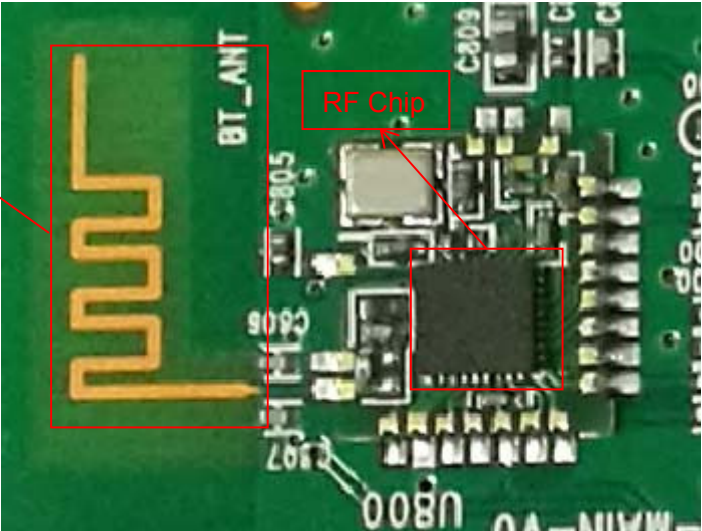Reference Documents	Item
Photo	 <p>The photograph shows a green printed circuit board (PCB) with various components. A yellow PCB antenna is visible on the left side, with a red box and arrow pointing to it labeled 'PCB Antenna'. In the center-right, there is a black integrated circuit (IC) labeled 'RF Chip', also highlighted with a red box and arrow. Other components like capacitors (C805, C806, C809) and a USB connector are also visible. The text 'BT_ANT' is printed on the board near the antenna, and 'U800' is visible near the bottom edge.</p>

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = 20*log[Field Strength ($\mu\text{V}/\text{m}$)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

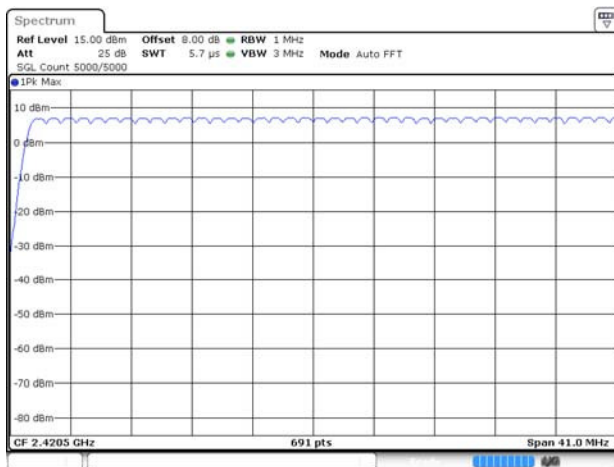


GFSK 2.4415 GHz ~ 2.4835 GHz

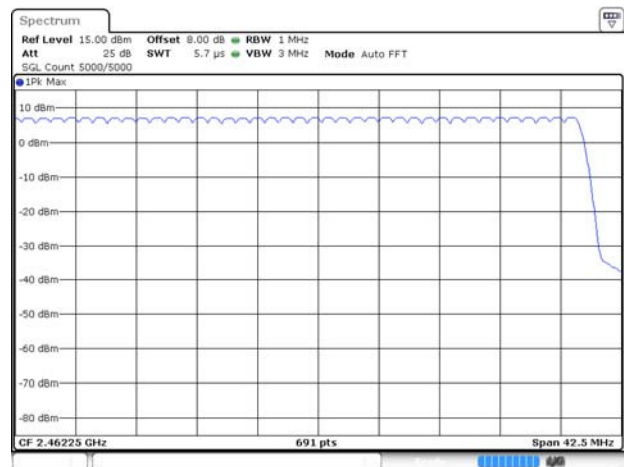

8-DPSK 2.4 GHz ~ 2.4415 GHz

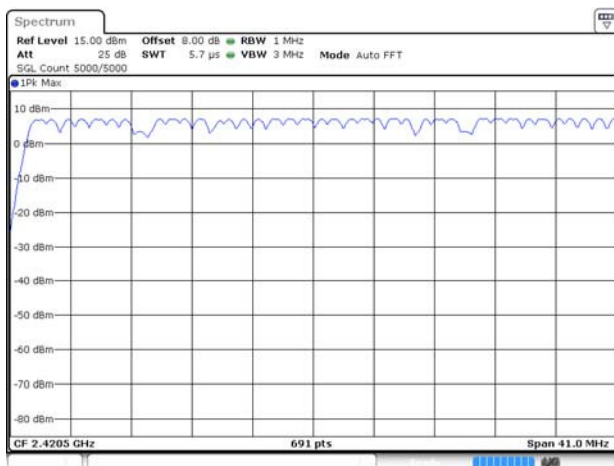

8-DPSK 2.4415 GHz ~ 2.4835 GHz

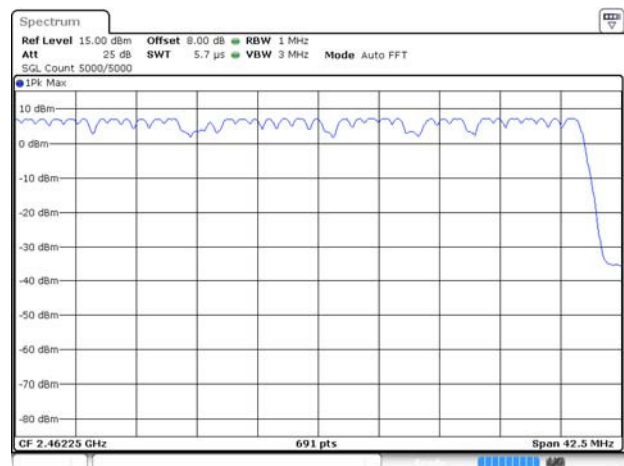

A.2 Peak Output Power


Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	7.24	5.30	30	1000	Pass
Middle	7.30	5.37			Pass
High	7.35	5.43			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	5.95	3.94	6.48	4.45	21	125	Pass
Middle	5.98	3.96	6.50	4.47			Pass
High	5.98	3.96	6.55	4.52			Pass


Test plots

GFSK LOW CHANNEL

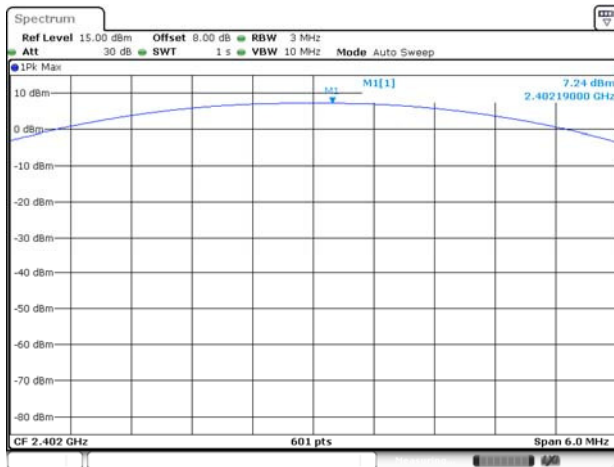

Date: 16 MAR 2017 15:12:46

GFSK MIDDLE CHANNEL

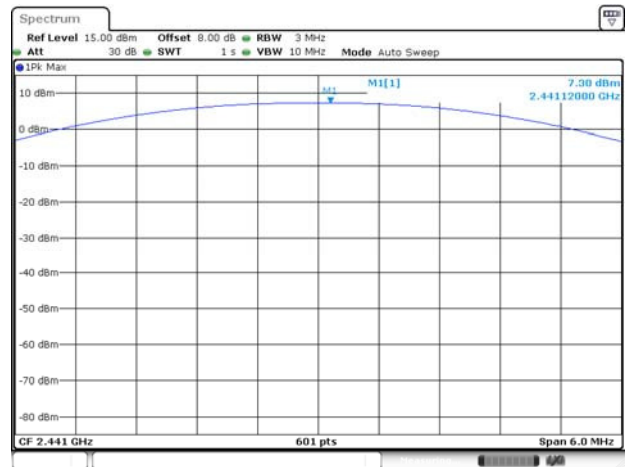


Date: 16 MAR 2017 15:19:16

GFSK HIGH CHANNEL




Date: 16 MAR 2017 15:24:26

II/4-DQPSK LOW CHANNEL

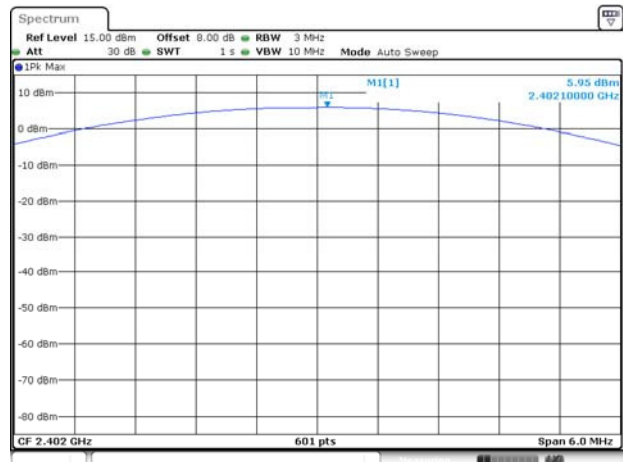


Date: 16 MAR 2017 16:34:18

II/4-DQPSK MIDDLE CHANNEL

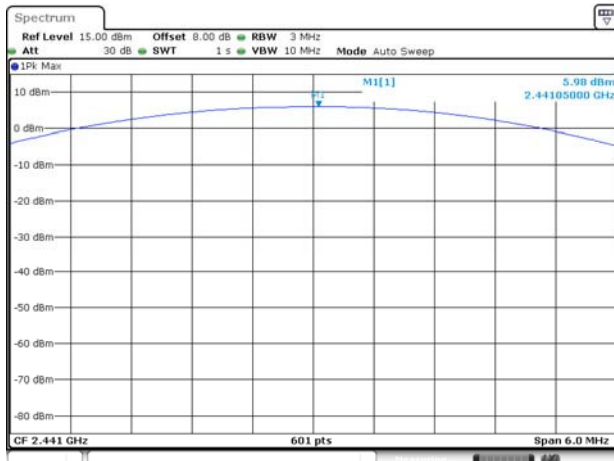

Date: 16 MAR 2017 16:35:41

II/4-DQPSK HIGH CHANNEL

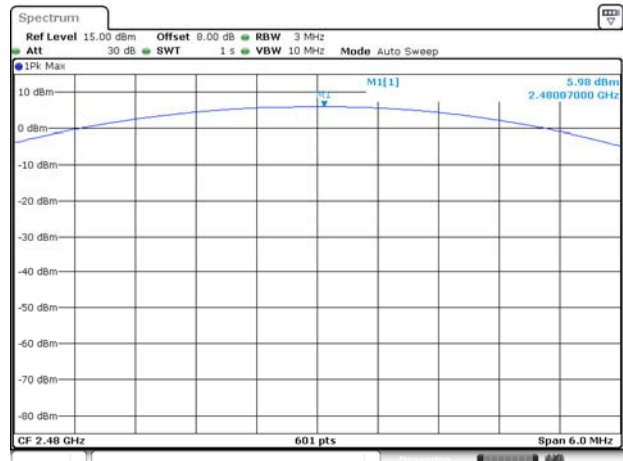


Date: 16 MAR 2017 16:36:25

8-DPSK LOW CHANNEL




Date: 16 MAR 2017 16:37:22

8-DPSK MIDDLE CHANNEL

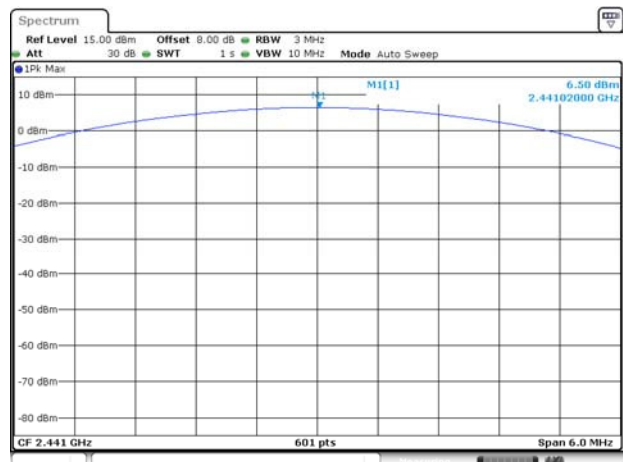

Date: 16 MAR 2017 16:40:59

8-DPSK HIGH CHANNEL

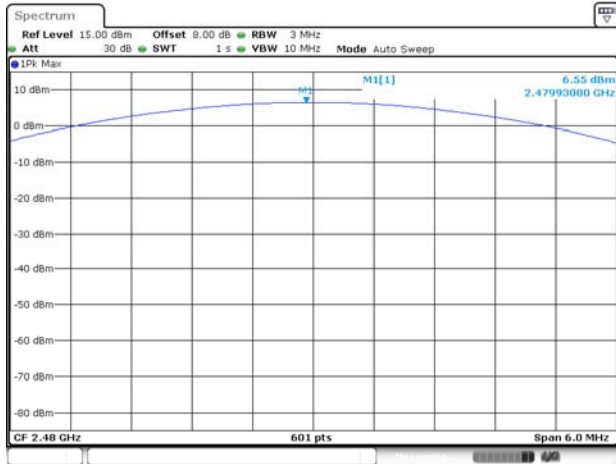

Date: 16.MAR.2017 16:47:05

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.974	0.916
Middle	0.978	0.916
High	0.978	0.916
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.343	1.198
Middle	1.343	1.203
High	1.339	1.203


Test plots

20 dB Bandwidth:


GFSK LOW CHANNEL

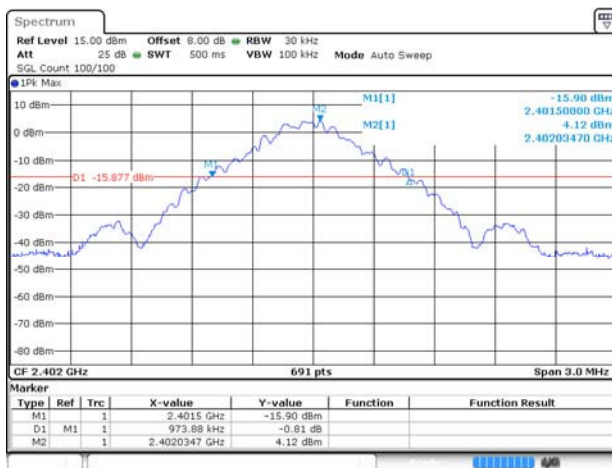

GFSK MIDDLE CHANNEL

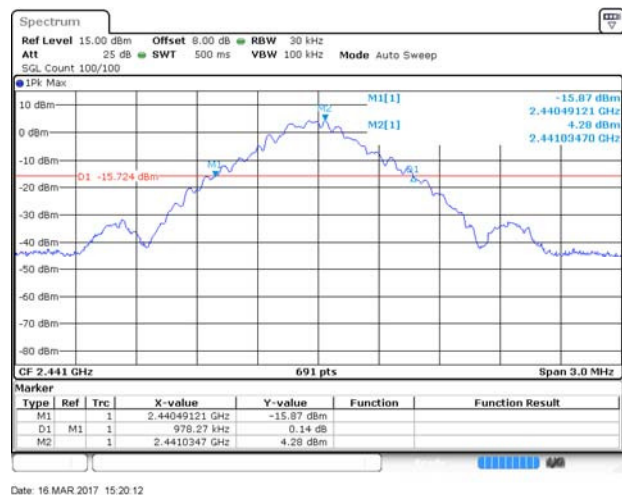


GFSK HIGH CHANNEL

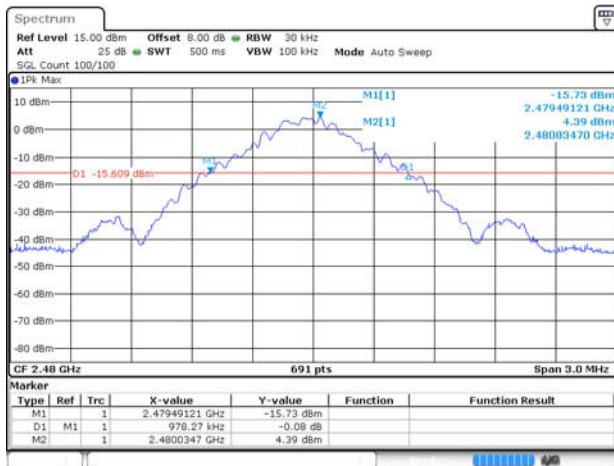

Date: 16 MAR 2017 15:25:23

8-DPSK LOW CHANNEL

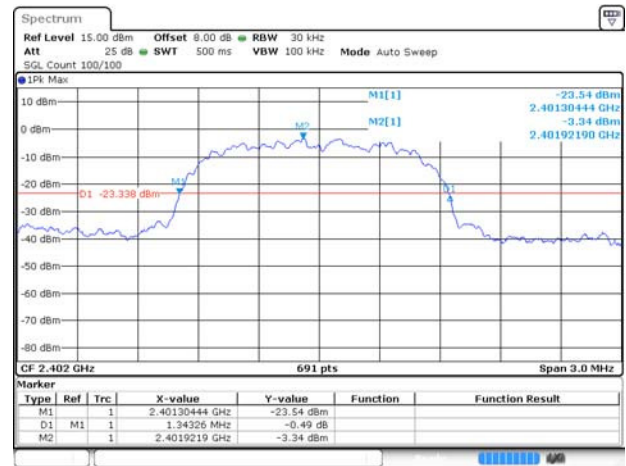

Date: 16 MAR 2017 16:38:18

8-DPSK MIDDLE CHANNEL



Date: 16 MAR 2017 16:41:55

8-DPSK HIGH CHANNEL



Date: 16 MAR 2017 16:48:01


99% Bandwidth:

GFSK LOW CHANNEL




Date: 16 MAR 2017 15:14:39

GFSK MIDDLE CHANNEL

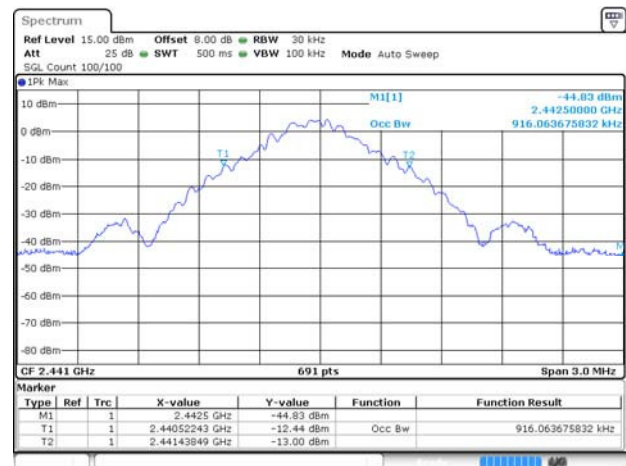


Date: 16 MAR 2017 15:21:09

GFSK HIGH CHANNEL

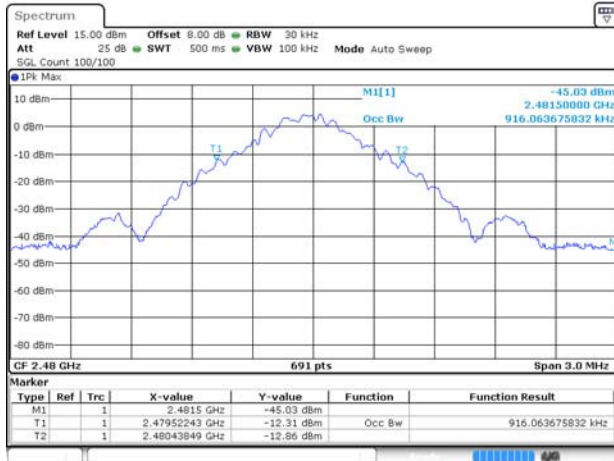

Date: 16 MAR 2017 15:26:19

8-DPSK LOW CHANNEL

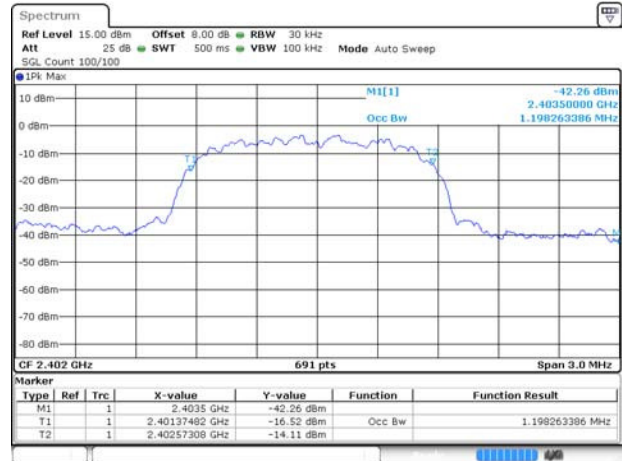

Date: 16 MAR 2017 16:39:15

8-DPSK MIDDLE CHANNEL



Date: 16 MAR 2017 16:42:52

8-DPSK HIGH CHANNEL



Date: 16 MAR 2017 16:48:57

A.4 Hopping Frequency Separation


Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.003	0.978	0.652	Pass
8-DPSK	0.998	1.343	0.896	Pass


Test Plots

GFSK

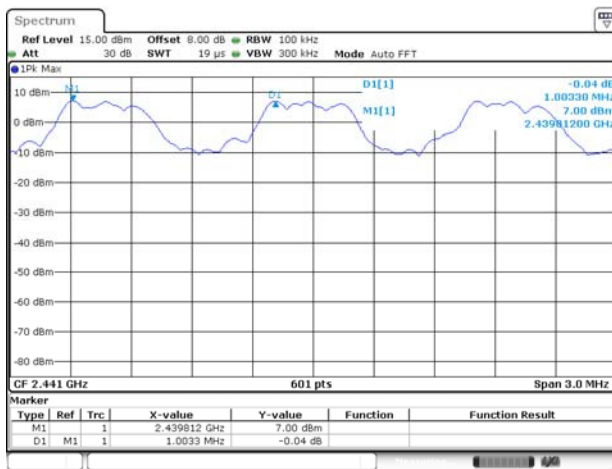

Date: 16 MAR 2017 16:55:14

8-DPSK

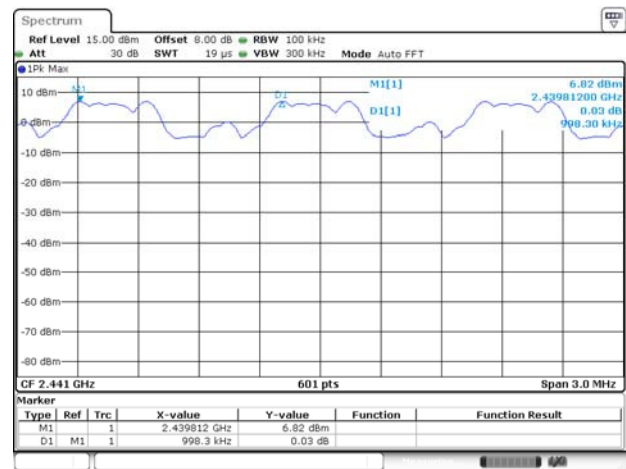

Date: 16 MAR 2017 17:18:39


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.392	125.364	0.4	Pass
DH 3	1.656	264.941	0.4	Pass
DH 5	2.908	310.161	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.401	128.324	0.4	Pass
DH 3	1.646	263.288	0.4	Pass
DH 5	2.897	309.023	0.4	Pass


Test Plots

GFSK DH1

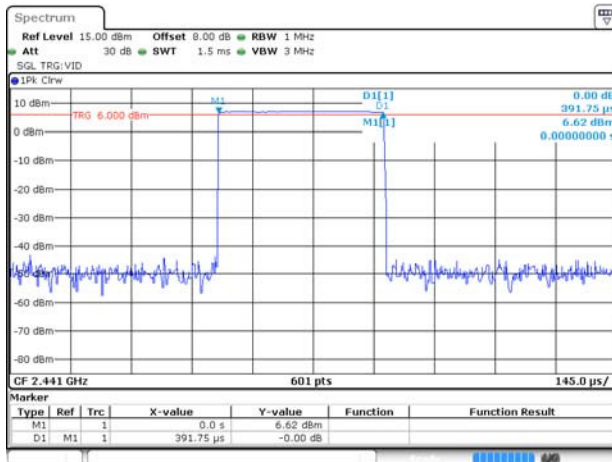


Date: 16 MAR 2017 17:26:02

GFSK DH3

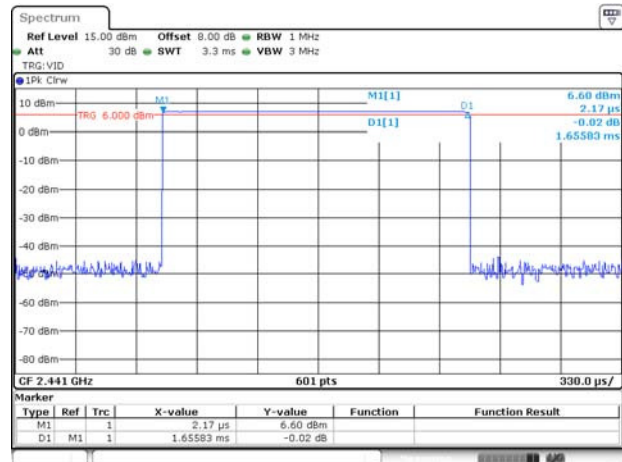


Date: 16 MAR 2017 17:31:10

GFSK DH5

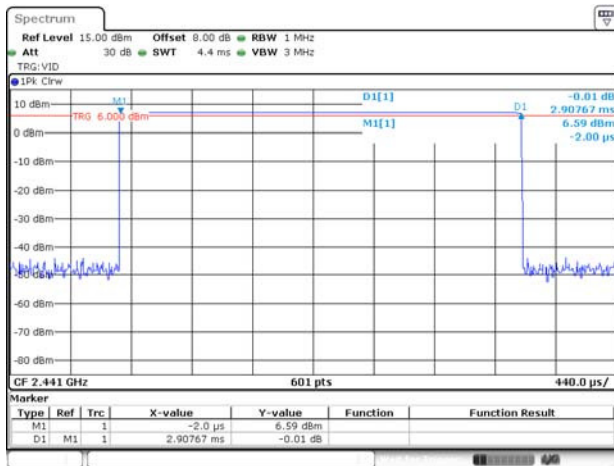


Date: 16 MAR 2017 17:31:58

8-DPSK DH1

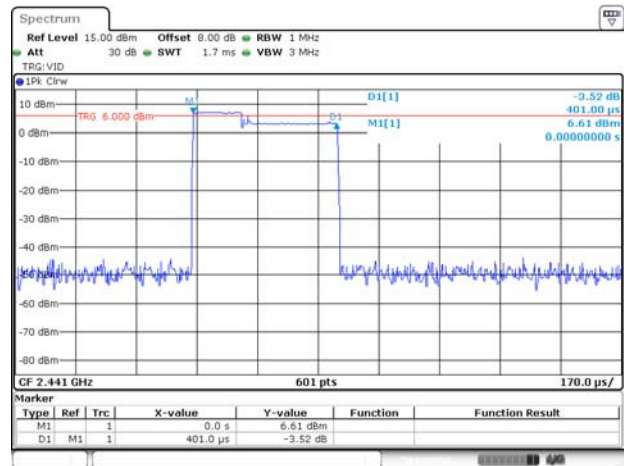


Date: 16 MAR 2017 17:52:25

8-DPSK DH3

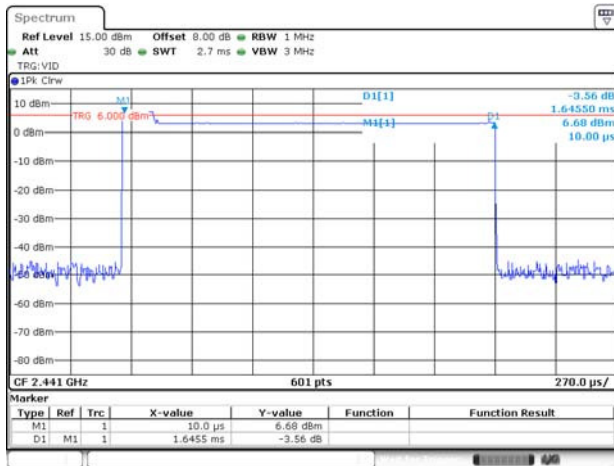

Date: 16 MAR 2017 17:53:21

8-DPSK DH5

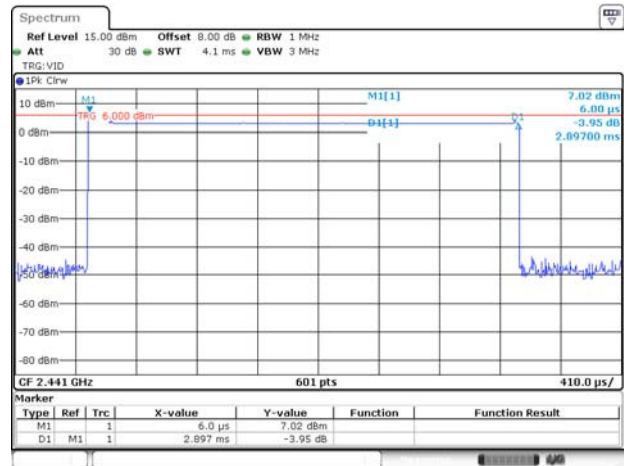

Date: 16 MAR 2017 17:54:06

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-28.43	6.54	-13.46	Pass
Middle	-27.98	6.61	-13.39	Pass
High	-27.54	6.65	-13.35	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-31.53	1.10	-18.90	Pass
Middle	-32.63	1.07	-18.93	Pass
High	-33.90	1.01	-18.99	Pass


Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-27.13	6.98	-13.02	Pass
8-DPSK	-31.56	6.94	-13.06	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

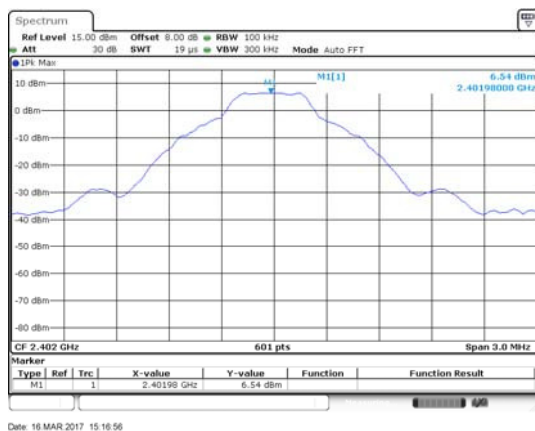

GFSK LOW CHANNEL, BAND EDGE

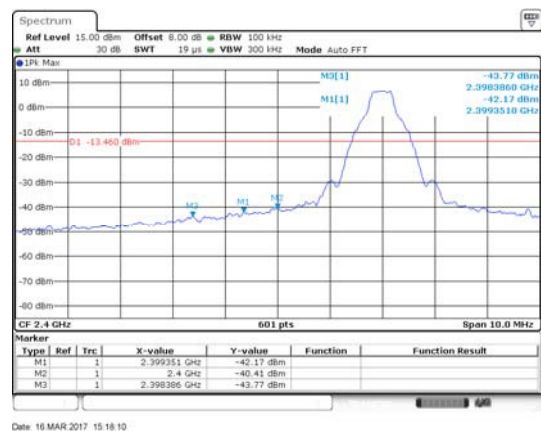


GFSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

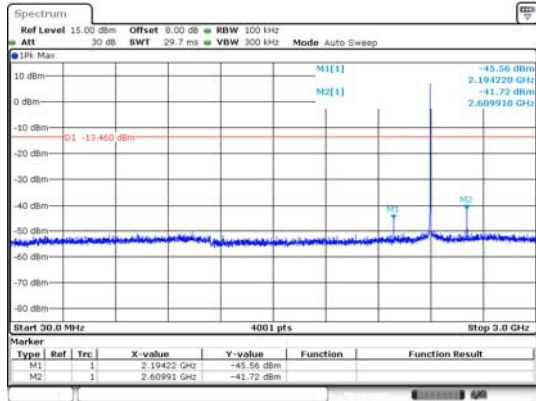


Date: 16 MAR 2017 15:17:33

GFSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

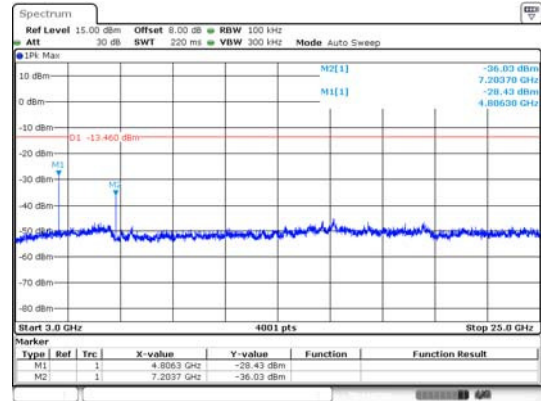


Date: 16 MAR 2017 15:17:45

GFSK MIDDLE CHANNEL, CARRIER LEVEL

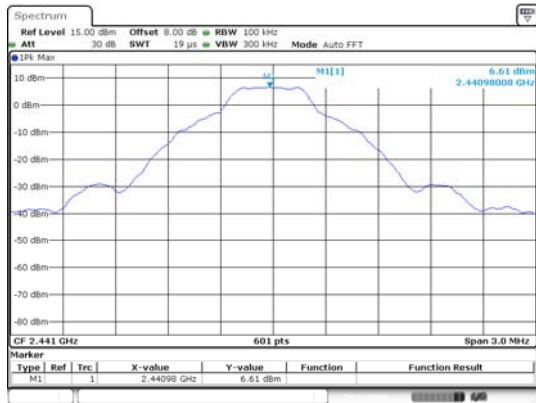


Date: 16 MAR 2017 15:21:36

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

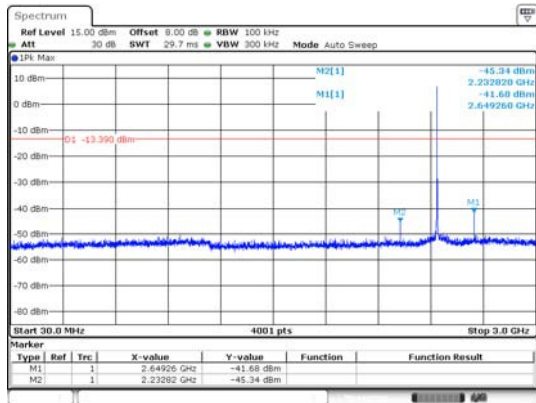


Date: 16 MAR 2017 15:21:57

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

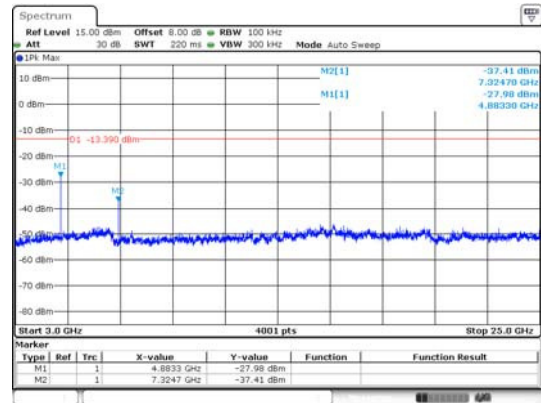


Date: 16 MAR 2017 15:22:09

GFSK HIGH CHANNEL, CARRIER LEVEL

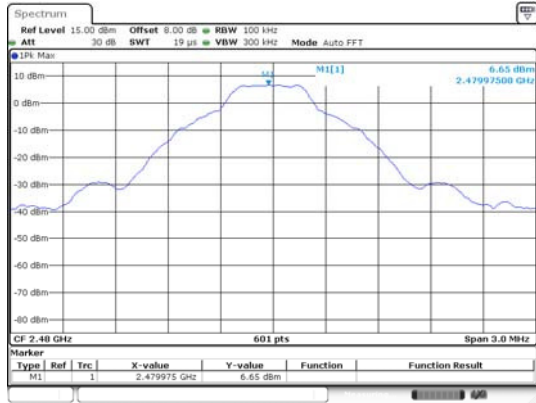


Date: 16 MAR 2017 15:26:40

GFSK HIGH CHANNEL, BAND EDGE

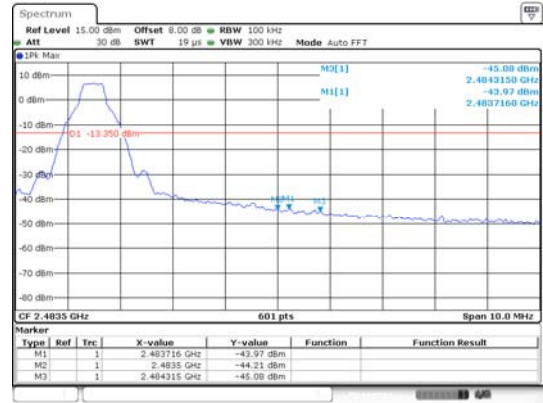


Date: 16 MAR 2017 15:27:57

GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

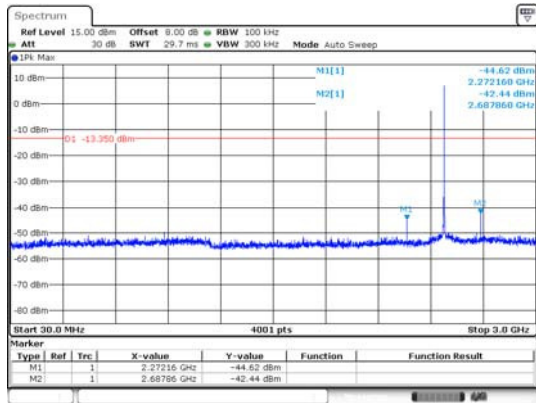


Date: 16 MAR 2017 15:27:12

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

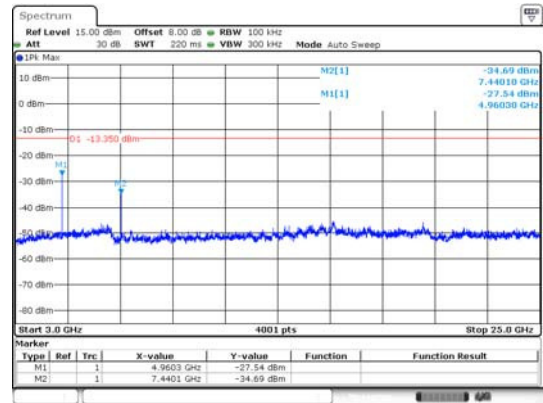


Date: 16 MAR 2017 15:27:27

8-DPSK LOW CHANNEL, CARRIER LEVEL

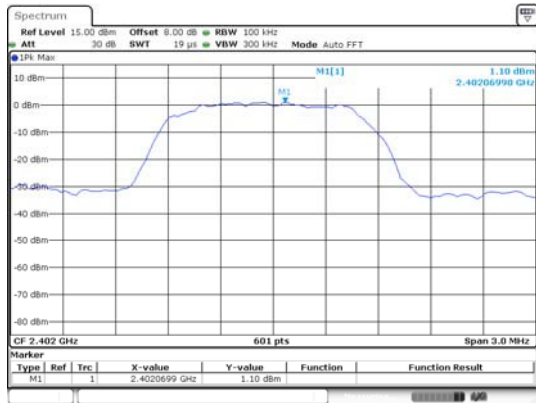


Date: 16 MAR 2017 16:39:26

8-DPSK LOW CHANNEL, BAND EDGE

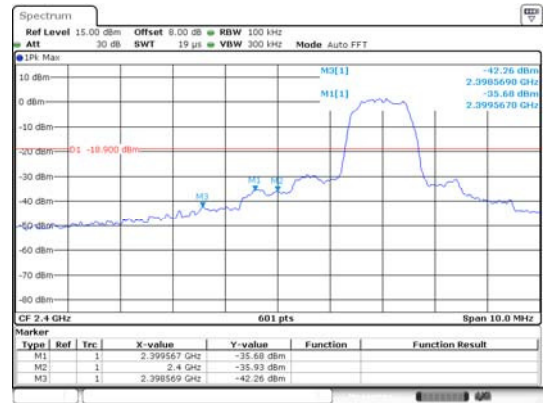


Date: 16 MAR 2017 16:40:31

8-DPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

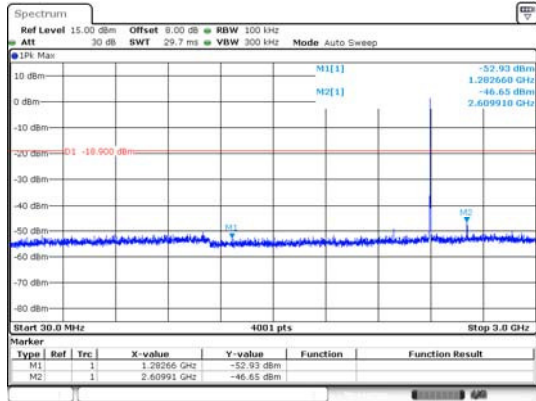


Date: 16 MAR 2017 16:39:54

8-DPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

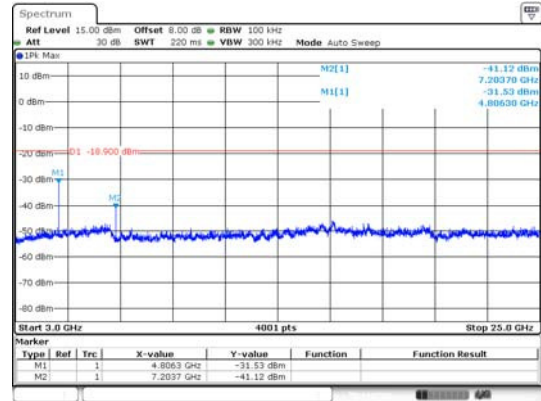


Date: 16 MAR 2017 16:40:06

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

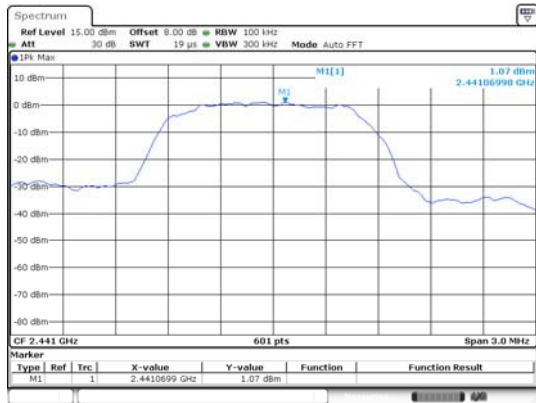


Date: 16 MAR 2017 16:44:50

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

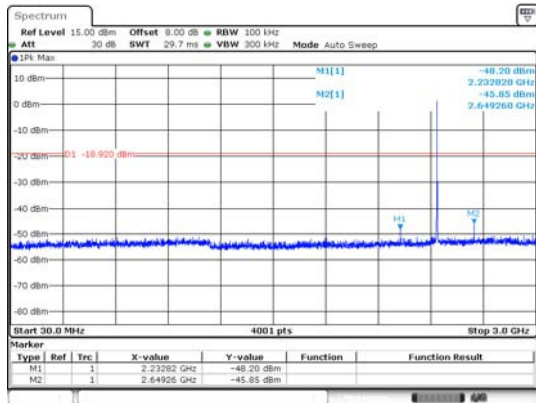


Date: 16 MAR 2017 16:45:22

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

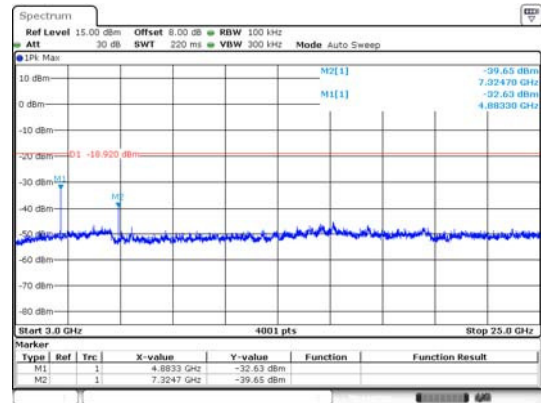


Date: 16 MAR 2017 16:45:39


8-DPSK HIGH CHANNEL, CARRIER LEVEL

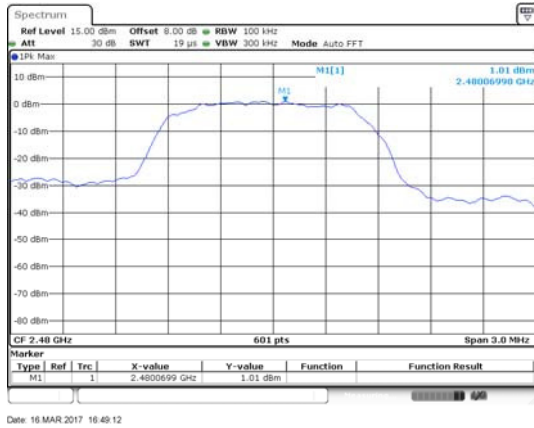


8-DPSK HIGH CHANNEL, BAND EDGE

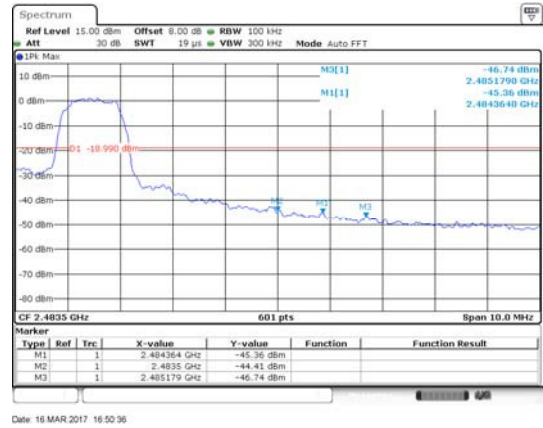


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

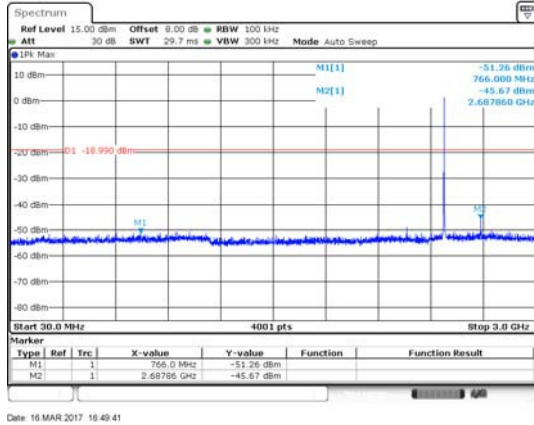


8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

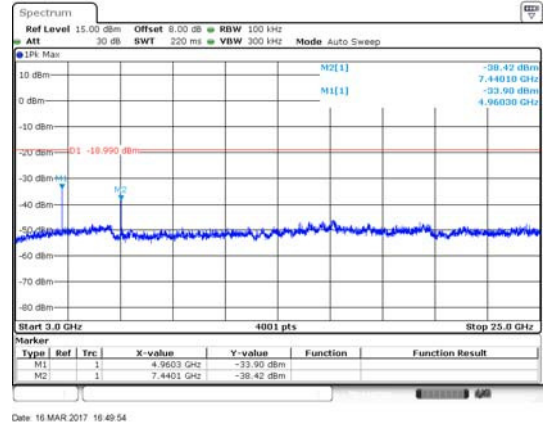

GFSK HOPPING, CARRIER LEVEL

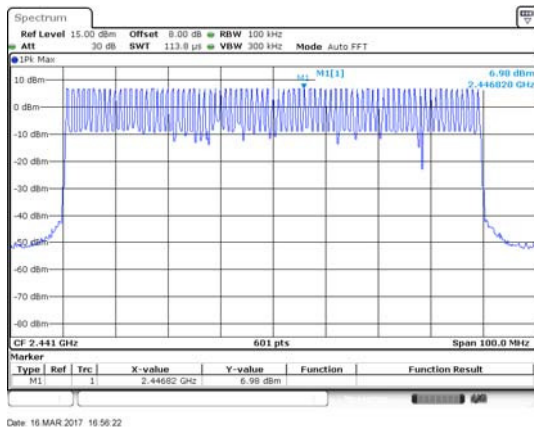


GFSK HOPPING BAND EDGE (LOW)

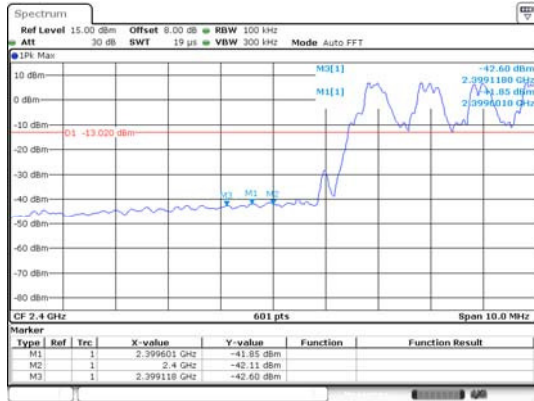


Date: 16 MAR 2017 16:58:45

GFSK HOPPING BAND EDGE (HIGH)

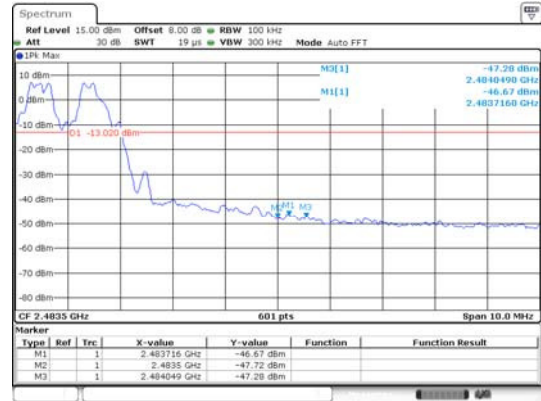


Date: 16 MAR 2017 16:59:11

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

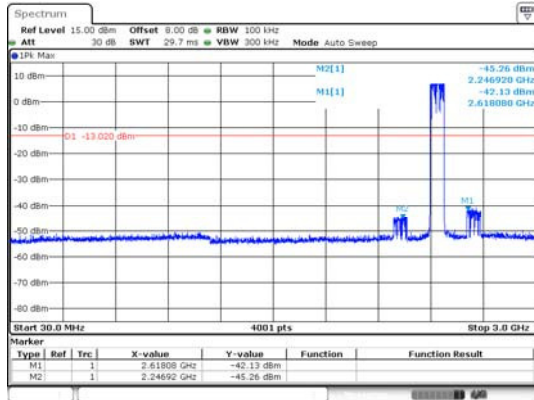


Date: 16 MAR 2017 16:57:44

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

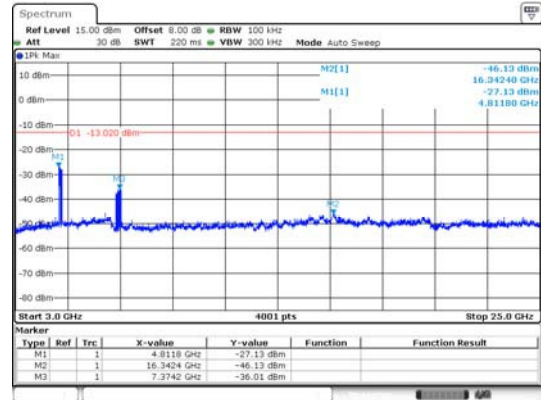

Date: 16 MAR 2017 16:58:18


8-DPSK HOPPING, CARRIER LEVEL

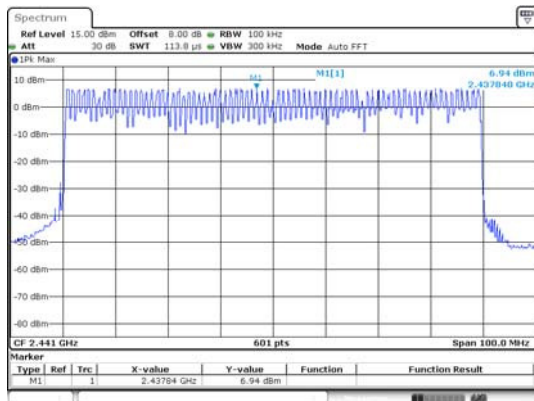


Date: 16 MAR 2017 17:06:12

8-DPSK Hopping BAND EDGE (LOW)

8-DPSK Hopping BAND EDGE (HIGH)

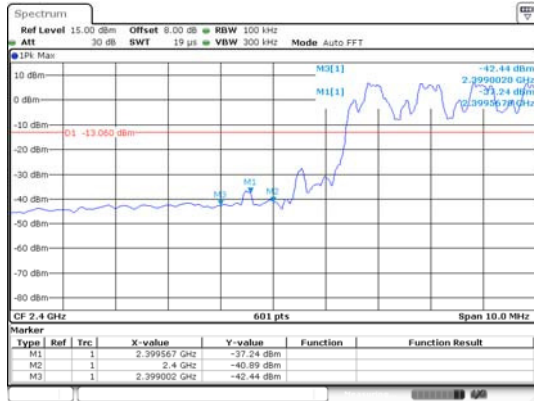


Date: 16 MAR 2017 17:08:34

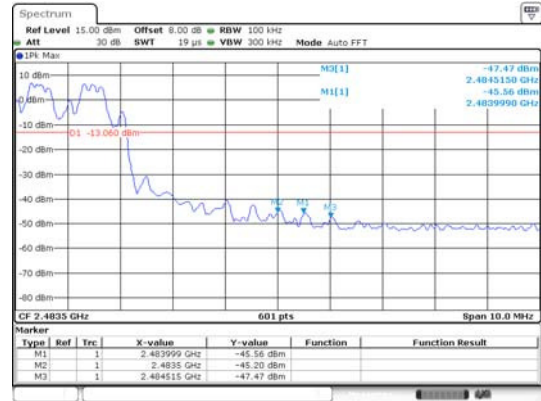


Date: 16 MAR 2017 17:09:04

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

8-DPSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

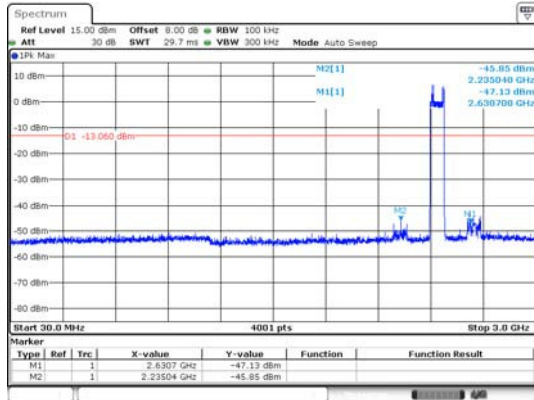

Date: 16 MAR 2017 17:06:58

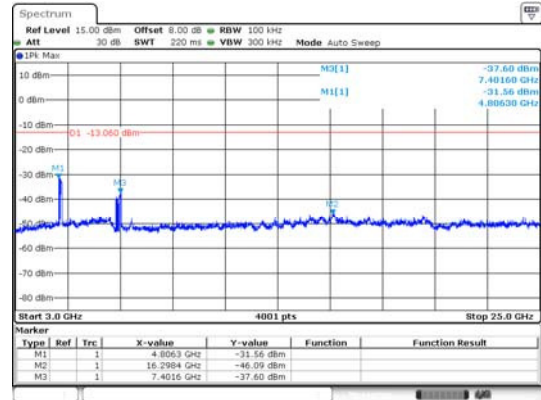

Date: 16 MAR 2017 17:07:33

A.7 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: All models of the charger were tested. The GT-WCAL13000130-302 is the main test model and only the worst case was shown in the test report.

Test Data and Plots


GT-WCAL13000130-302

PHASE L

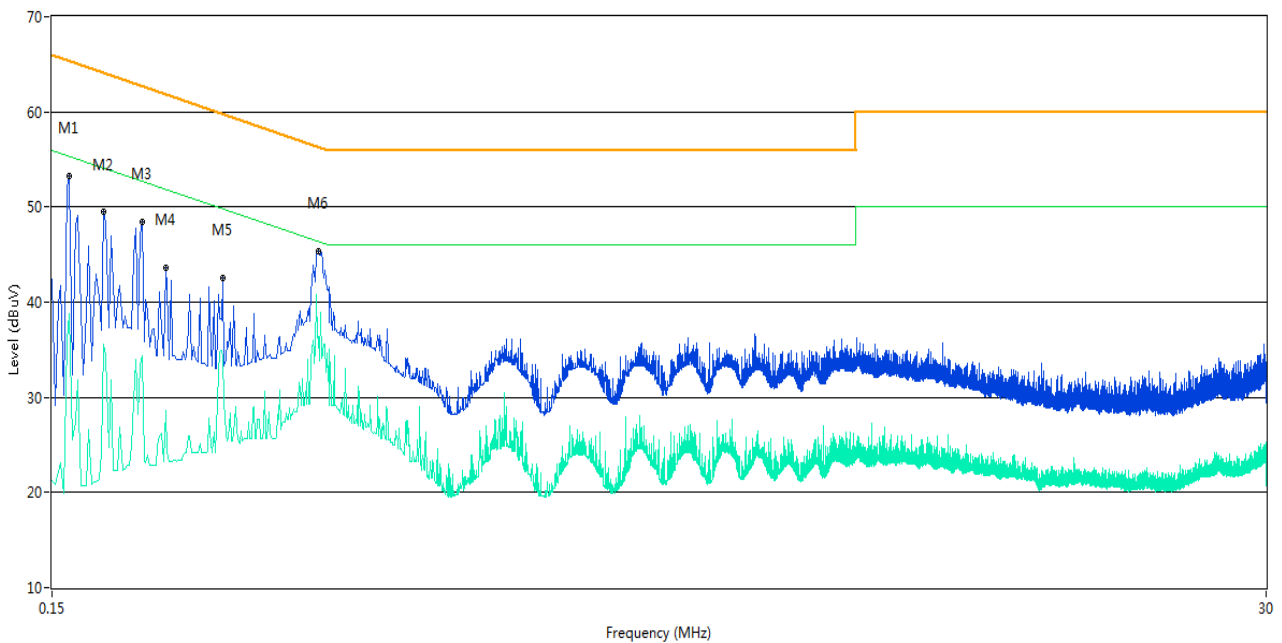

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	53.3	9.85	65.4	12.10	Peak	L Line	Pass
1**	0.162	38.8	9.85	55.4	16.60	AV	L Line	Pass
2	0.188	49.5	9.49	64.1	14.60	Peak	L Line	Pass
2**	0.188	35.6	9.49	54.1	18.50	AV	L Line	Pass
3	0.222	48.5	10.82	62.7	14.20	Peak	L Line	Pass
3**	0.222	34.3	10.82	52.7	18.40	AV	L Line	Pass
4	0.246	43.7	9.25	61.9	18.20	Peak	L Line	Pass
4**	0.246	28.7	9.25	51.9	23.20	AV	L Line	Pass
5	0.316	42.6	9.04	59.8	17.20	Peak	L Line	Pass
5**	0.316	34.4	9.04	49.8	15.40	AV	L Line	Pass
6	0.480	45.4	11.23	56.3	10.90	Peak	L Line	Pass
6**	0.480	36.4	11.23	46.3	9.90	AV	L Line	Pass


PHASE N

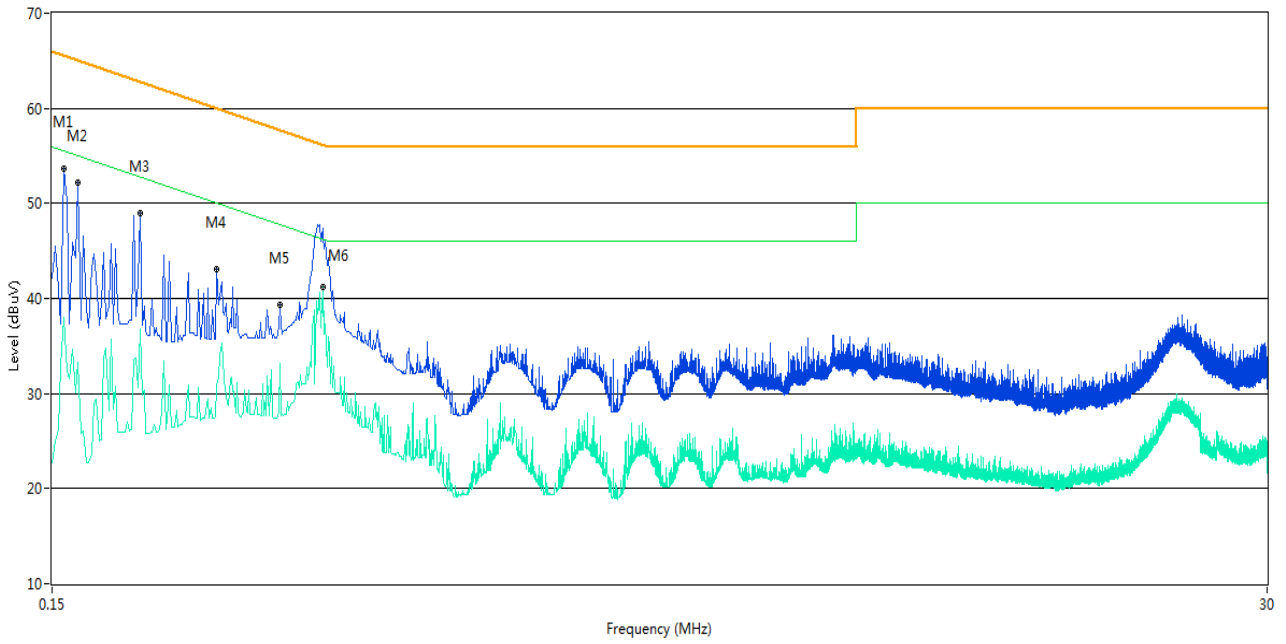

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	53.7	10.41	65.6	11.90	Peak	N Line	Pass
1**	0.158	38.0	10.41	55.6	17.60	AV	N Line	Pass
2	0.168	52.2	9.10	65.1	12.90	Peak	N Line	Pass
2**	0.168	33.3	9.10	55.1	21.80	AV	N Line	Pass
3	0.220	49.0	11.35	62.8	13.80	Peak	N Line	Pass
3**	0.220	36.8	11.35	52.8	16.00	AV	N Line	Pass
4	0.308	43.1	9.81	60.0	16.90	Peak	N Line	Pass
4**	0.308	31.0	9.81	50.0	19.00	AV	N Line	Pass
5	0.406	39.3	10.93	57.7	18.40	Peak	N Line	Pass
5**	0.406	33.2	10.93	47.7	14.50	AV	N Line	Pass
6	0.490	46.6	10.09	56.2	9.60	Peak	N Line	Pass
6**	0.490	41.3	10.09	46.2	4.90	AV	N Line	Pass


GTWWLA13000180-302

PHASE L

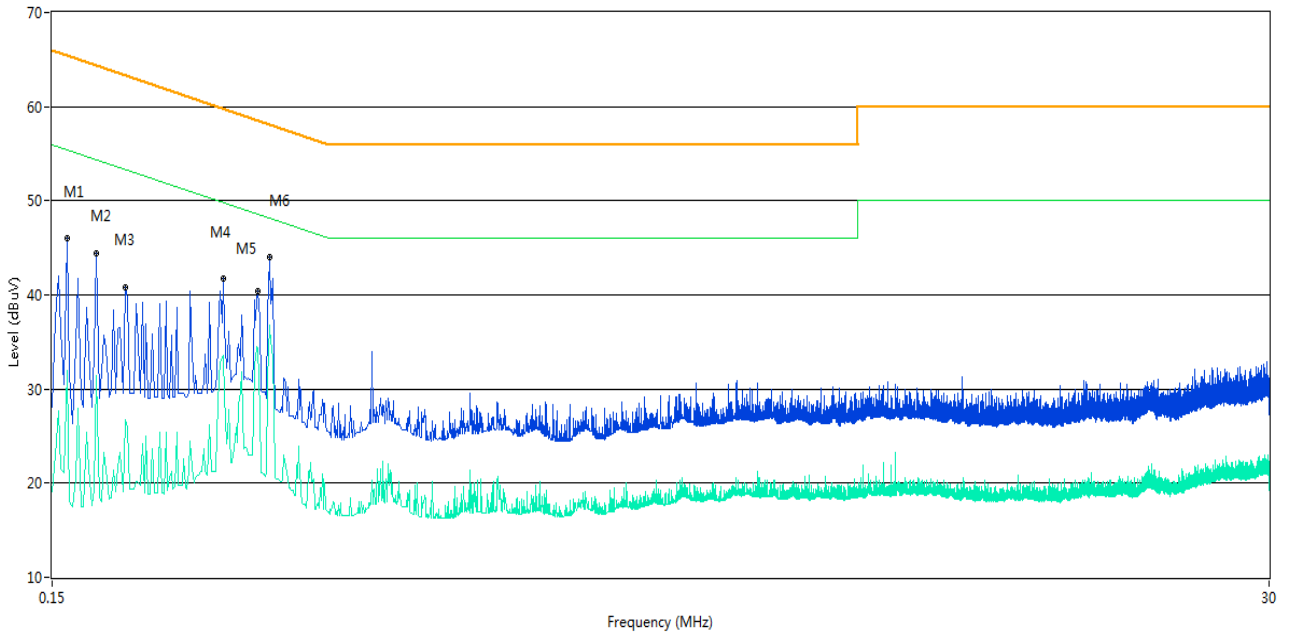

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	46.0	10.29	65.5	19.50	Peak	L Line	Pass
1**	0.160	31.9	10.29	55.5	23.60	AV	L Line	Pass
2	0.182	44.4	10.46	64.4	20.00	Peak	L Line	Pass
2**	0.182	31.4	10.46	54.4	23.00	AV	L Line	Pass
3	0.206	40.8	9.22	63.4	22.60	Peak	L Line	Pass
3**	0.206	26.7	9.22	53.4	26.70	AV	L Line	Pass
4	0.316	41.7	9.04	59.8	18.10	Peak	L Line	Pass
4**	0.316	33.5	9.04	49.8	16.30	AV	L Line	Pass
5	0.368	40.4	8.97	58.5	18.10	Peak	L Line	Pass
5**	0.368	34.4	8.97	48.5	14.10	AV	L Line	Pass
6	0.386	44.0	10.43	58.1	14.10	Peak	L Line	Pass
6**	0.386	36.8	10.43	48.1	11.30	AV	L Line	Pass


PHASE N

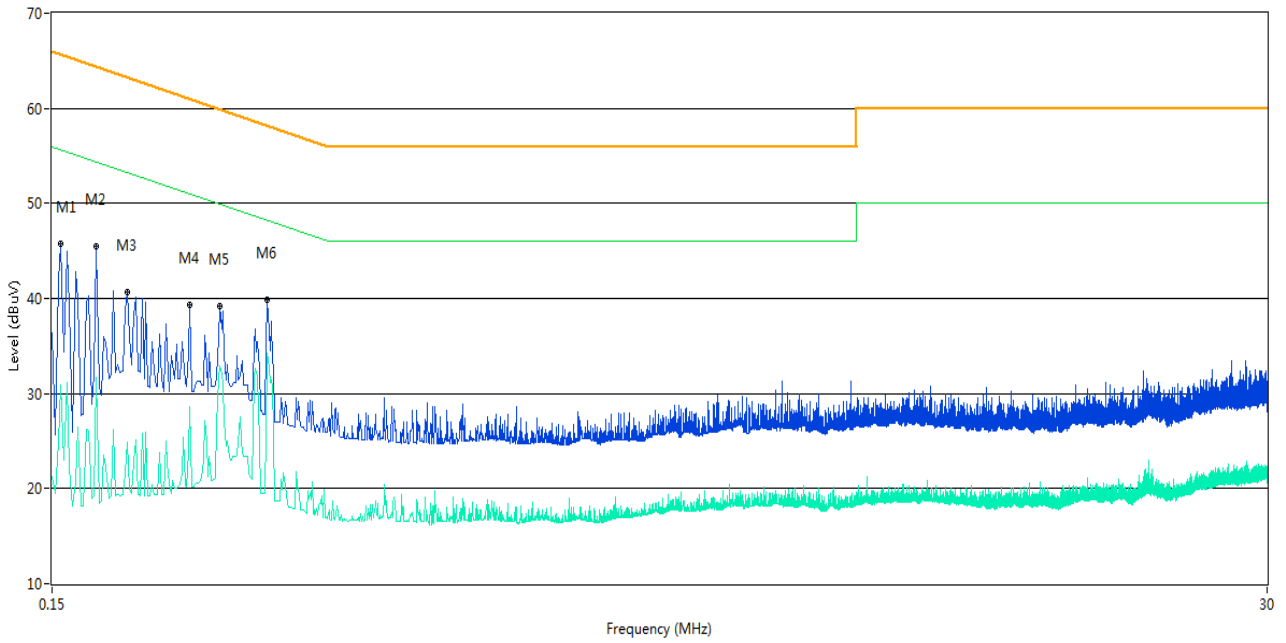

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	45.8	10.20	65.7	19.90	Peak	N Line	Pass
1**	0.156	30.9	10.20	55.7	24.80	AV	N Line	Pass
2	0.182	45.5	10.46	64.4	18.90	Peak	N Line	Pass
2**	0.182	31.7	10.46	54.4	22.70	AV	N Line	Pass
3	0.208	40.7	9.34	63.3	22.60	Peak	N Line	Pass
3**	0.208	24.8	9.34	53.3	28.50	AV	N Line	Pass
4	0.274	39.3	10.62	61.0	21.70	Peak	N Line	Pass
4**	0.274	28.6	10.62	51.0	22.40	AV	N Line	Pass
5	0.312	39.2	9.58	59.9	20.70	Peak	N Line	Pass
5**	0.312	32.9	9.58	49.9	17.00	AV	N Line	Pass
6	0.384	39.8	10.78	58.2	18.40	Peak	N Line	Pass
6**	0.384	34.2	10.78	48.2	14.00	AV	N Line	Pass


ZL-B024W1301800

PHASE L

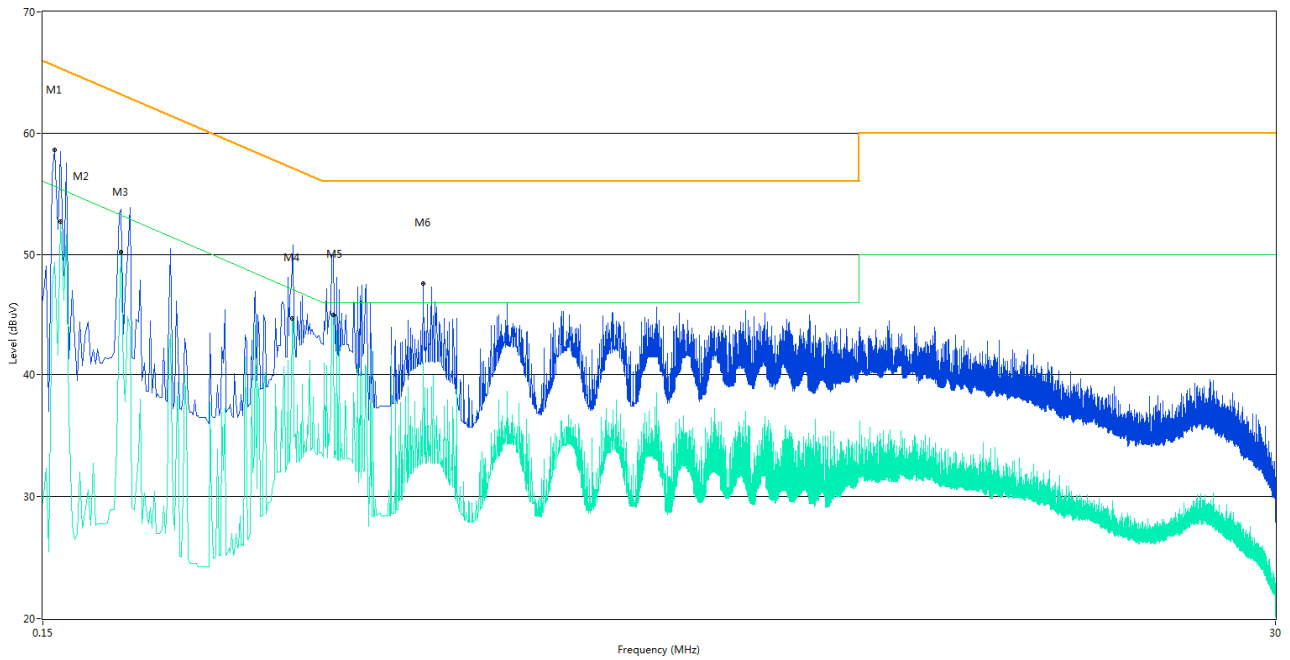

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	58.6	10.41	65.6	7.00	Peak	L Line	Pass
1**	0.158	49.3	10.41	55.6	6.30	AV	L Line	Pass
2	0.162	58.5	9.85	65.4	6.90	Peak	L Line	Pass
2**	0.162	52.7	9.85	55.4	2.70	AV	L Line	Pass
3	0.210	53.7	9.45	63.2	9.50	Peak	L Line	Pass
3**	0.210	50.2	9.45	53.2	3.00	AV	L Line	Pass
4	0.438	49.2	10.59	57.1	7.90	Peak	L Line	Pass
4**	0.438	44.7	10.59	47.1	2.40	AV	L Line	Pass
5	0.522	49.9	9.97	56.0	6.10	Peak	L Line	Pass
5**	0.522	45.0	9.97	46.0	1.00	AV	L Line	Pass
6	0.770	47.6	10.09	56.0	8.40	Peak	L Line	Pass
6**	0.770	41.0	10.09	46.0	5.00	AV	L Line	Pass

PHASE N

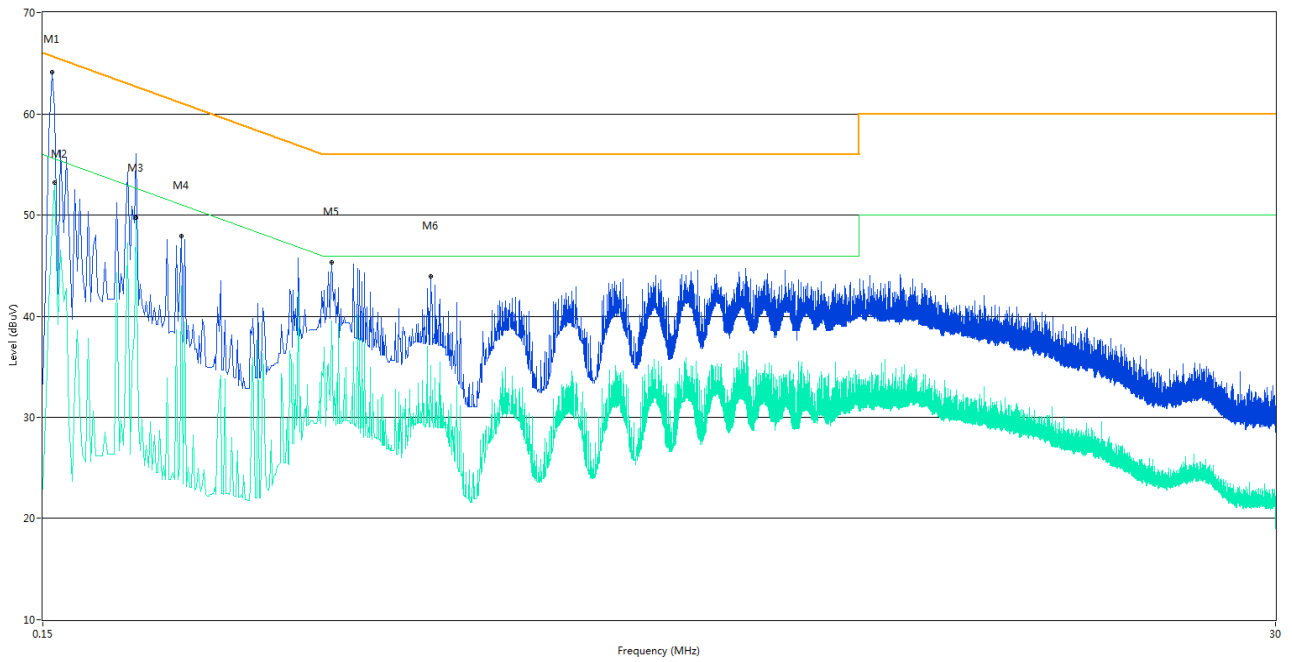

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	62.88	10.20	65.7	2.82	Peak	N Line	Pass
1*	0.156	60.02	10.20	65.7	5.68	QP	N Line	Pass
1**	0.156	47.10	10.20	55.7	8.60	AV	N Line	Pass
2	0.158	60.4	10.41	65.6	5.20	Peak	N Line	Pass
2**	0.158	53.2	10.41	55.6	2.40	AV	N Line	Pass
3	0.224	56.1	10.30	62.7	6.60	Peak	N Line	Pass
3**	0.224	49.8	10.30	52.7	2.90	AV	N Line	Pass
4	0.272	47.9	10.57	61.1	13.20	Peak	N Line	Pass
4**	0.272	43.0	10.57	51.1	8.10	AV	N Line	Pass
5	0.520	45.4	10.07	56.0	10.60	Peak	N Line	Pass
5**	0.520	39.6	10.07	46.0	6.40	AV	N Line	Pass
6	0.794	44.0	10.24	56.0	12.00	Peak	N Line	Pass


A.8 Radiated Spurious Emission

Duty cycle correction factor for average measurement.

Note:


1. Duty cycle = on time/100 milliseconds = $3 * 2.91 / 100 = 8.72\%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -21.19 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

DH5 on time/100 ms (One Pulse) Plot on Channel 39

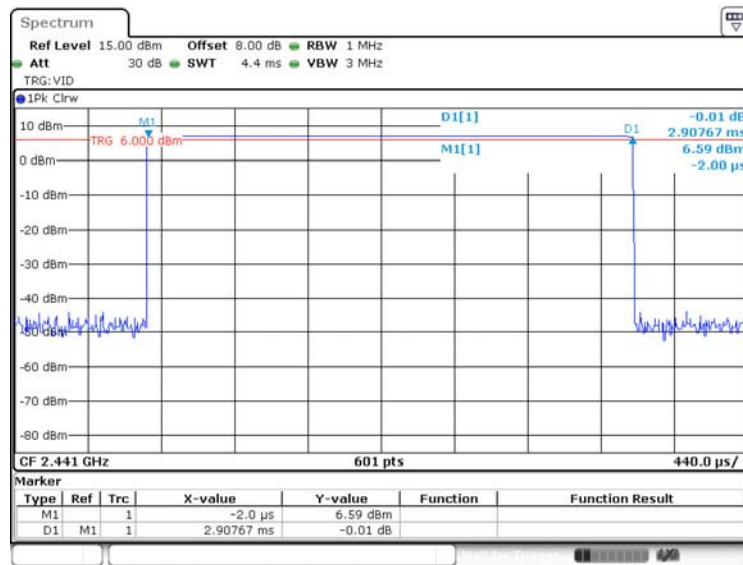

Date: 16.MAR.2017 17:31:58

DH5 on time/100 ms (Count Pulses) Plot on Channel 39

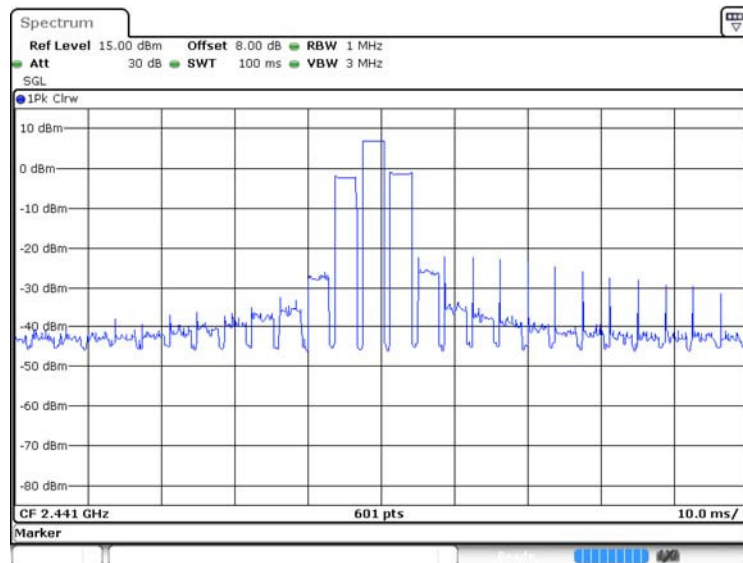

Date: 16.MAR.2017 17:00:00

Test Data and Plots

Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, according to the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: All models of the charger were tested. The GT-WCAL13000130-302 is the main test model and only the worst case was shown in the test report.

Note 4: The EUT is working in the Normal link mode below 1 GHz.

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


GT-WCAL13000130-302

30 MHz to 1 GHz, ANT V

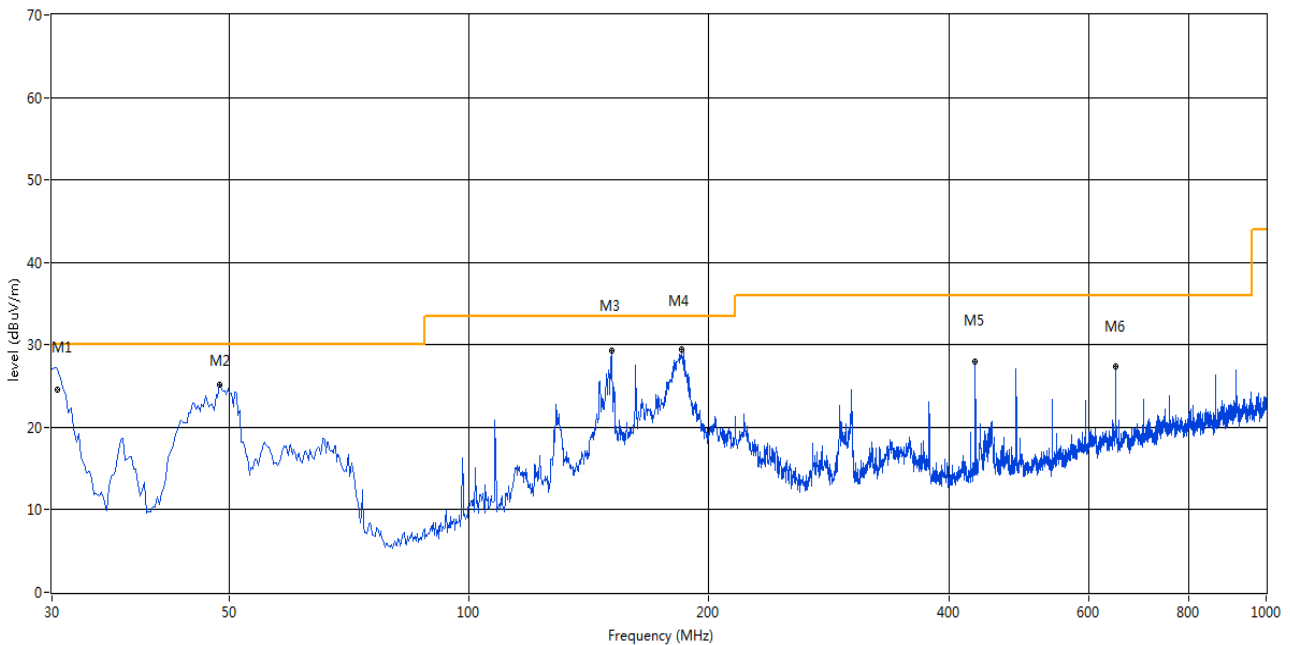

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.170	28.48	-16.61	30.0	1.52	Peak	44.00	100.00	Vertical	Pass
1*	30.170	24.51	-16.61	30.0	5.49	QP	44.00	100.00	Vertical	Pass
2	48.668	25.11	-13.28	30.0	4.89	Peak	52.00	200	Vertical	Pass
3	150.977	29.37	-18.63	33.5	4.13	Peak	82.00	100	Vertical	Pass
4	184.919	29.48	-16.53	33.5	4.02	Peak	161.00	100	Vertical	Pass
5	431.965	27.95	-9.01	36.0	8.05	Peak	10.00	100	Vertical	Pass
6	647.978	27.33	-4.97	36.0	8.67	Peak	123.00	300	Vertical	Pass


30 MHz to 1 GHz, ANT H

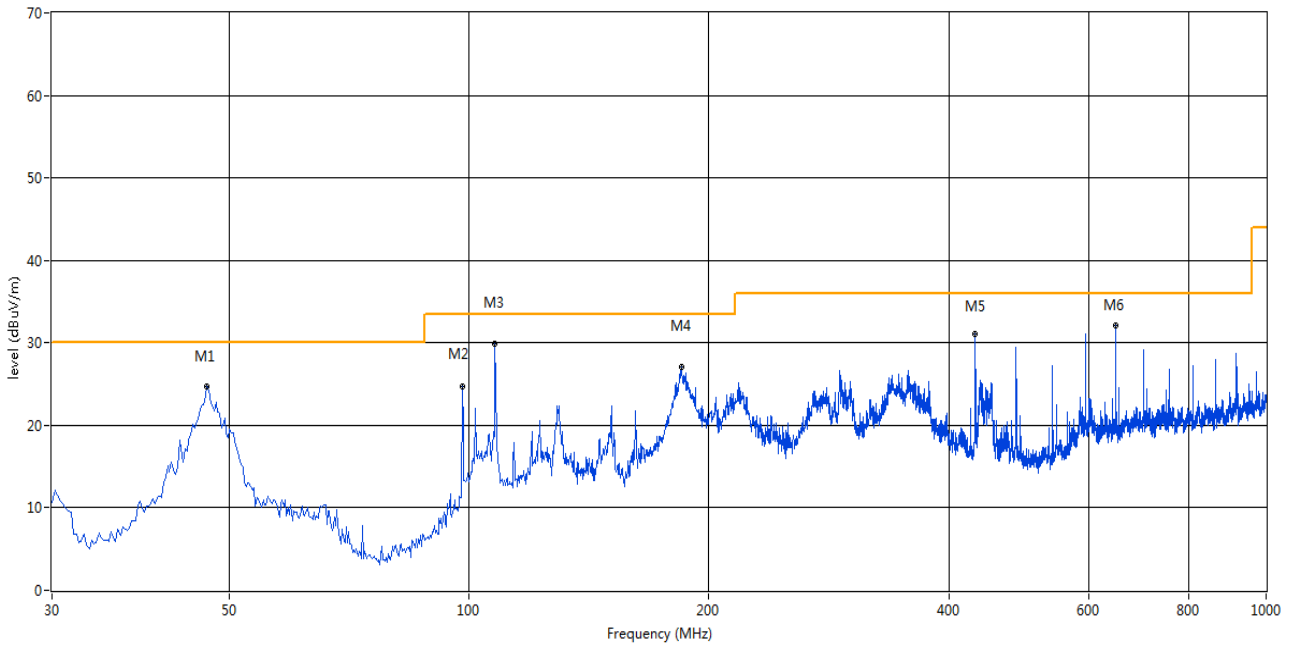

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	46.971	23.34	-13.37	30.0	6.66	Peak	165.00	300	Horizontal	Pass
2	98.125	24.71	-15.57	33.5	8.79	Peak	360.00	400	Horizontal	Pass
3	107.823	29.96	-15.20	33.5	3.54	Peak	360.00	400	Horizontal	Pass
4	184.676	27.09	-16.57	33.5	6.41	Peak	328.00	400	Horizontal	Pass
5	431.965	31.03	-9.01	36.0	4.97	Peak	0.00	300	Horizontal	Pass
6	647.978	32.16	-4.97	36.0	3.84	Peak	343.00	100	Horizontal	Pass


GTWWLA13000180-302

30 MHz to 1 GHz, ANT V

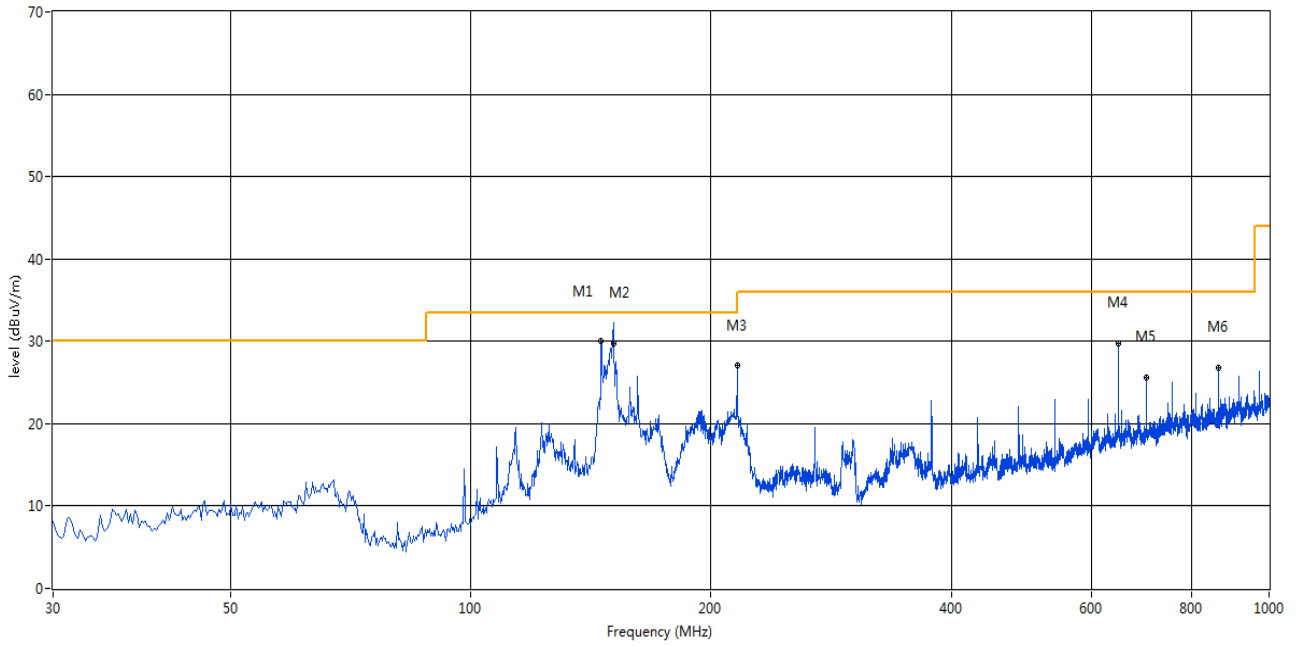

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	145.644	30.06	-18.99	33.5	3.44	Peak	18.00	100	Vertical	Pass
2	151.031	35.49	-18.63	33.5	-1.99	Peak	76.000	118.000	Vertical	Pass
2*	151.031	29.69	-18.63	33.5	3.81	QP	76.000	118.000	Vertical	Pass
3	215.951	27.04	-15.04	33.5	6.46	Peak	360.00	200	Vertical	Pass
4	647.978	29.71	-4.97	36.0	6.29	Peak	32.00	300	Vertical	Pass
5	701.800	25.62	-4.16	36.0	10.38	Peak	76.00	300	Vertical	Pass
6	863.749	26.77	-1.61	36.0	9.23	Peak	181.00	200	Vertical	Pass


30 MHz to 1 GHz, ANT H

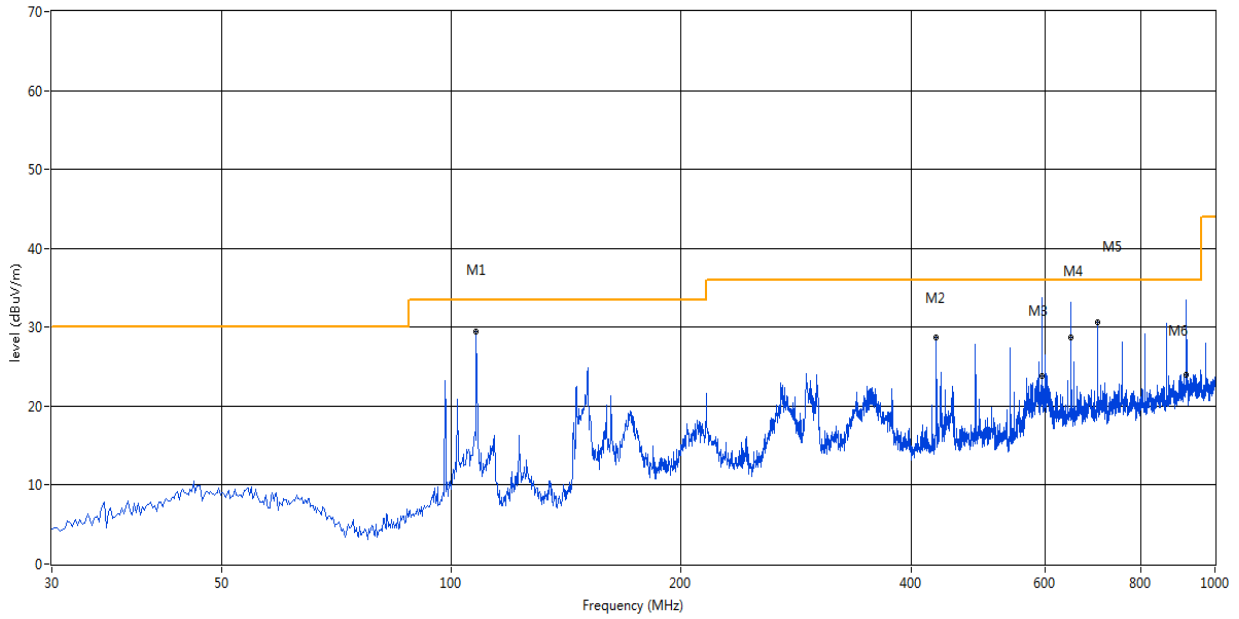

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	107.823	28.58	-15.20	33.5	4.92	Peak	229.00	300	Horizontal	Pass
2	431.965	25.76	-9.01	36.0	10.24	Peak	5.00	100	Horizontal	Pass
3	593.998	28.46	-5.62	36.0	7.54	Peak	256.00	157.00	Horizontal	Pass
3*	593.998	23.90	-5.62	36.0	12.10	QP	256.00	157.00	Horizontal	Pass
4	647.992	31.09	-4.97	36.0	4.91	Peak	353.00	132.00	Horizontal	Pass
4*	647.992	28.67	-4.97	36.0	7.33	QP	353.00	132.00	Horizontal	Pass
5	701.800	30.69	-4.16	36.0	5.31	Peak	117.00	100	Horizontal	Pass
6	917.984	28.88	-1.03	36.0	7.12	Peak	82.000	100.00	Horizontal	Pass
6*	917.984	23.93	-1.03	36.0	12.07	QP	82.000	100.00	Horizontal	Pass


ZL-B024W1301800

30 MHz to 1 GHz, ANT V

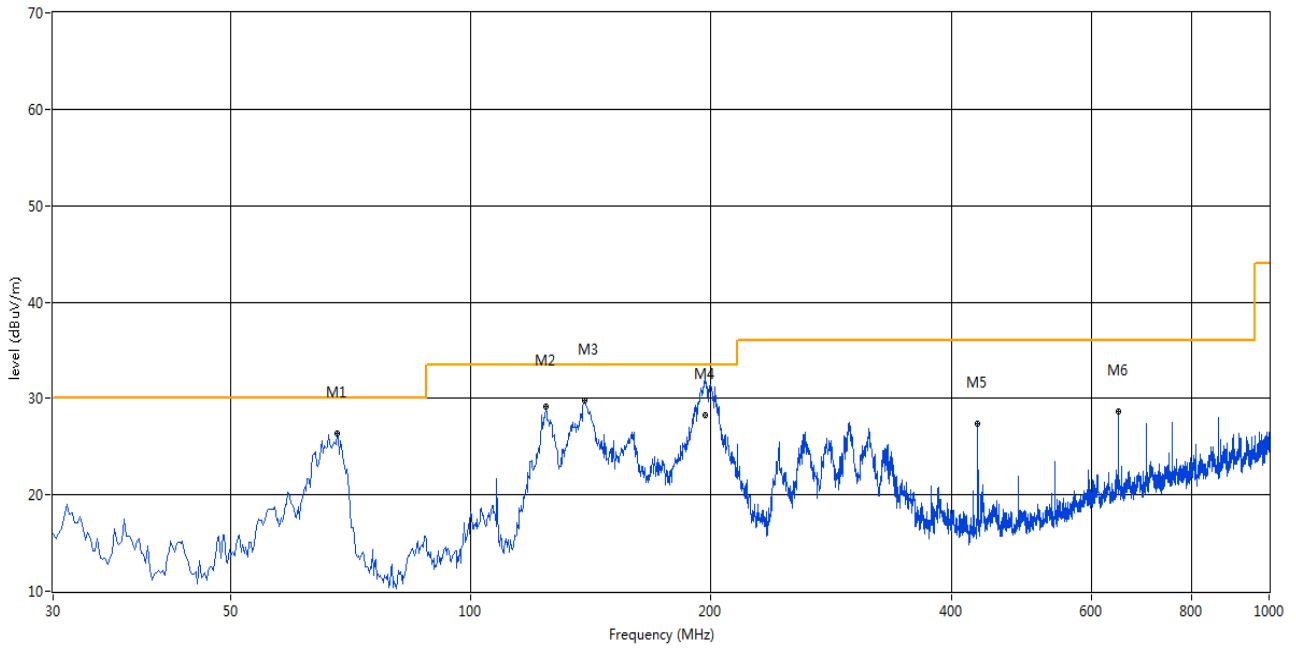

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	68.063	26.33	-16.72	30.0	3.67	Peak	287.00	300	Vertical	Pass
2	124.309	29.11	-17.83	33.5	4.39	Peak	75.00	100	Vertical	Pass
3	139.098	29.80	-18.82	33.5	3.70	Peak	157.00	100	Vertical	Pass
4	196.605	33.46	-15.15	33.5	0.04	Peak	184.00	108.00	Vertical	Pass
4*	196.605	28.30	-15.15	33.5	5.20	QP	184.00	108.00	Vertical	Pass
5	431.965	27.42	-9.01	36.0	8.58	Peak	260.00	300	Vertical	Pass
6	647.978	28.67	-4.97	36.0	7.33	Peak	191.00	300	Vertical	Pass

30 MHz to 1 GHz, ANT H

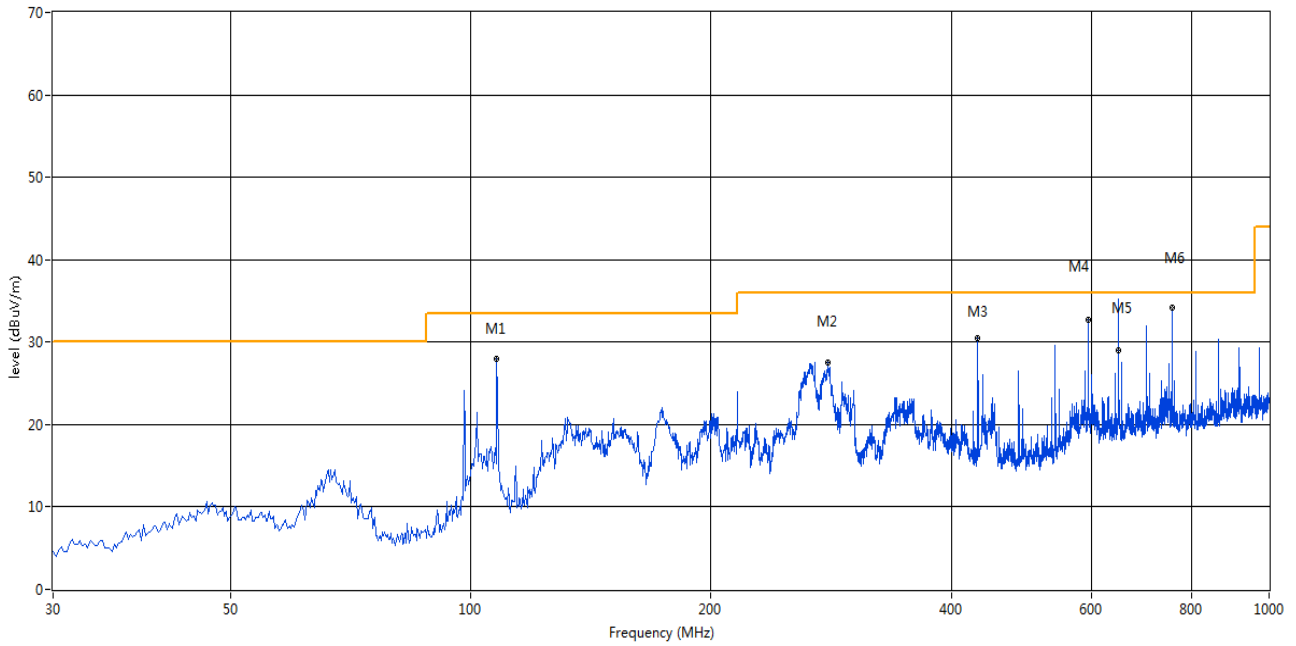

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	107.823	27.91	-15.20	33.5	5.59	Peak	144.00	300	Horizontal	Pass
2	280.440	27.54	-12.82	36.0	8.46	Peak	210.00	200	Horizontal	Pass
3	431.965	30.54	-9.01	36.0	5.46	Peak	200.00	200	Horizontal	Pass
4	593.914	32.66	-5.62	36.0	3.34	Peak	2.00	200	Horizontal	Pass
5	647.992	31.87	-4.97	36.0	4.13	Peak	166.00	124.00	Horizontal	Pass
5*	647.992	29.00	-4.97	36.0	7.00	QP	166.00	124.00	Horizontal	Pass
6	755.991	37.10	-2.94	36.0	-1.10	Peak	162.00	151.00	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2038.39	46.35	0.15	74	27.65	Peak	230.2	150	Vertical	Pass
2	2402.10	72.71	0.86	74	1.29	Peak	57.6	150	Vertical	N/A
3	2537.89	49.53	3.80	74	24.48	Peak	194.4	150	Vertical	Pass
4	11638.10	43.83	14.95	74	30.17	Peak	234.3	150	Vertical	Pass
5	17741.68	47.06	10.91	74	26.94	Peak	258.7	150	Vertical	Pass
6	22893.51	50.89	12.09	74	23.11	Peak	187.4	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2016.71	45.99	-0.44	74	28.02	Peak	164.4	150	Horizontal	Pass
2	2402.02	78.05	0.88	74	-4.05	Peak	162.4	150	Horizontal	N/A
3	5774.89	49.88	10.90	74	24.12	Peak	57.8	150	Horizontal	Pass
4	11683.03	49.74	17.74	74	24.26	Peak	109.7	150	Horizontal	Pass
5	14403.49	47.29	11.26	74	26.71	Peak	130.6	150	Horizontal	Pass
6	19129.78	44.12	9.42	74	29.88	Peak	90.1	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2037.84	46.09	0.09	74	27.91	Peak	183.6	150	Vertical	Pass
2	2440.15	74.12	0.84	74	-0.12	Peak	239	150	Vertical	N/A
3	2540.65	49.45	3.66	74	24.56	Peak	315	150	Vertical	Pass
4	6696.34	44.31	16.92	74	29.69	Peak	218.6	150	Vertical	Pass
5	13789.93	43.36	9.05	74	30.64	Peak	70.2	150	Vertical	Pass
6	23971.71	44.87	13.97	74	29.14	Peak	4.6	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2018.32	46.50	-0.36	74	27.51	Peak	339.1	150	Horizontal	Pass
2	2440.23	77.47	0.96	74	-3.47	Peak	81.3	150	Horizontal	N/A
3	5775.21	50.05	11.01	74	23.95	Peak	89	150	Horizontal	Pass
4	10032.03	48.40	19.68	74	25.61	Peak	12.8	150	Horizontal	Pass
5	15786.61	40.86	9.35	74	33.15	Peak	355.6	150	Horizontal	Pass
6	20836.94	48.36	9.42	74	25.64	Peak	333	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2037.91	46.82	0.15	74	27.18	Peak	133.4	150	Vertical	Pass
2	2480.38	72.68	0.74	74	1.32	Peak	99.3	150	Vertical	N/A
3	2540.09	48.33	3.67	74	25.68	Peak	80	150	Vertical	Pass
4	10818.22	48.92	18.90	74	25.08	Peak	35.5	150	Vertical	Pass
5	14486.69	44.91	9.08	74	29.09	Peak	265.8	150	Vertical	Pass
6	21685.52	47.65	9.90	74	26.35	Peak	354	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2019.35	46.06	-0.37	74	27.95	Peak	62.4	150	Horizontal	Pass
2	2480.72	77.60	0.88	74	-3.60	Peak	109.6	150	Horizontal	N/A
3	5773.49	49.98	10.99	74	24.02	Peak	159.2	150	Horizontal	Pass
4	9650.17	44.55	15.09	74	29.45	Peak	300	150	Horizontal	Pass
5	13498.75	46.17	9.64	74	27.83	Peak	132.2	150	Horizontal	Pass
6	23033.28	42.52	12.67	74	31.49	Peak	174.2	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2039.18	47.01	0.26	74	26.99	Peak	290.4	150	Vertical	Pass
2	2402.06	73.79	0.84	74	0.21	Peak	324	150	Vertical	N/A
3	2538.65	49.97	3.53	74	24.04	Peak	16.2	150	Vertical	Pass
4	11166.39	48.95	14.16	74	25.05	Peak	314.4	150	Vertical	Pass
5	14060.32	49.16	9.48	74	24.84	Peak	116.3	150	Vertical	Pass
6	19000.00	45.85	9.29	74	28.15	Peak	194.4	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2019.74	45.30	-0.44	74	28.71	Peak	245.5	150	Horizontal	Pass
2	2402.04	78.36	0.84	74	-4.36	Peak	260.7	150	Horizontal	N/A
3	5778.49	49.38	10.95	74	24.62	Peak	14.1	150	Horizontal	Pass
4	11615.64	49.18	14.81	74	24.82	Peak	13	150	Horizontal	Pass
5	17034.53	49.19	13.20	74	24.81	Peak	309.1	150	Horizontal	Pass
6	23193.01	44.55	11.25	74	29.45	Peak	130.2	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2040.85	47.38	0.07	74	26.62	Peak	355.9	150	Vertical	Pass
2	2440.80	73.00	0.86	74	1.00	Peak	39.2	150	Vertical	N/A
3	2540.86	49.71	3.80	74	24.30	Peak	173.9	150	Vertical	Pass
4	9212.15	44.94	13.58	74	29.06	Peak	18.3	150	Vertical	Pass
5	13862.73	47.43	12.51	74	26.57	Peak	118.2	150	Vertical	Pass
6	20517.47	44.94	11.64	74	29.07	Peak	259.4	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2020.20	45.88	-0.40	74	28.13	Peak	33.6	150	Horizontal	Pass
2	2440.33	77.03	0.89	74	-3.03	Peak	116.8	150	Horizontal	N/A
3	5775.41	48.72	10.90	74	25.28	Peak	345.4	150	Horizontal	Pass
4	6898.50	47.70	14.38	74	26.30	Peak	241.6	150	Horizontal	Pass
5	16472.96	48.23	9.56	74	25.77	Peak	269.9	150	Horizontal	Pass
6	20986.69	47.92	11.16	74	26.08	Peak	331.4	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2041.35	46.82	0.07	74	27.18	Peak	134.4	150	Vertical	Pass
2	2480.82	72.46	0.89	74	1.54	Peak	356.4	150	Vertical	N/A
3	2541.36	49.98	3.47	74	24.03	Peak	60.7	150	Vertical	Pass
4	10065.72	44.23	13.80	74	29.77	Peak	304.4	150	Vertical	Pass
5	13592.35	44.69	9.09	74	29.31	Peak	136.7	150	Vertical	Pass
6	18064.06	44.25	12.33	74	29.75	Peak	273.3	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2018.73	44.93	-0.37	74	29.08	Peak	138.5	150	Horizontal	Pass
2	2480.84	77.14	0.96	74	-3.14	Peak	174.8	150	Horizontal	N/A
3	5775.06	50.25	10.94	74	23.75	Peak	172.2	150	Horizontal	Pass
4	7392.68	48.73	14.03	74	25.27	Peak	311.2	150	Horizontal	Pass
5	13280.37	45.28	9.71	74	28.72	Peak	112.2	150	Horizontal	Pass
6	24510.82	46.17	10.54	74	27.83	Peak	78.2	150	Horizontal	Pass

Hopping Mode:

GFSK MODE 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2040.51	47.41	0.26	74	26.59	Peak	119.4	150	Vertical	Pass
2	2402.07	73.44	0.89	74	0.56	Peak	124.6	150	Vertical	N/A
3	2540.73	48.84	3.66	74	25.17	Peak	215.5	150	Vertical	Pass
4	10436.36	51.69	14.81	74	22.31	Peak	71.5	150	Vertical	Pass
5	12693.84	45.53	9.23	74	28.47	Peak	10.9	150	Vertical	Pass
6	19349.42	43.72	9.69	74	30.28	Peak	217	150	Vertical	Pass

GFSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2019.32	46.39	-0.44	74	27.62	Peak	212.8	150	Horizontal	Pass
2	2402.06	78.74	0.88	74	-4.74	Peak	63.9	150	Horizontal	N/A
3	5777.04	49.27	10.98	74	24.73	Peak	31.9	150	Horizontal	Pass
4	9436.77	50.50	14.30	74	23.50	Peak	209.2	150	Horizontal	Pass
5	13852.33	46.52	20.39	74	27.48	Peak	271.2	150	Horizontal	Pass
6	22623.96	47.42	14.05	74	26.58	Peak	113.5	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2038.23	46.81	0.26	74	27.19	Peak	280.7	150	Vertical	Pass
2	2402.02	73.70	0.89	74	0.30	Peak	129	150	Vertical	N/A
3	2536.52	48.91	3.80	74	25.10	Peak	93	150	Vertical	Pass
4	7224.21	47.95	20.21	74	26.05	Peak	43.4	150	Vertical	Pass
5	16493.76	43.87	9.13	74	30.14	Peak	87.1	150	Vertical	Pass
6	20327.79	46.07	9.26	74	27.93	Peak	236.2	150	Vertical	Pass

8-DPSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2016.62	44.85	-0.39	74	29.16	Peak	218.1	150	Horizontal	Pass
2	2402.03	77.35	0.74	74	-3.35	Peak	160	150	Horizontal	N/A
3	5776.17	48.64	10.95	74	25.36	Peak	229.8	150	Horizontal	Pass
4	6673.88	45.76	14.27	74	28.25	Peak	356.5	150	Horizontal	Pass
5	14445.09	46.63	9.21	74	27.38	Peak	17.3	150	Horizontal	Pass
6	19129.78	48.48	10.43	74	25.52	Peak	190.2	150	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	43.72	74	30.28	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	46.08	74	27.92	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	46.83	74	27.18	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	45.32	74	28.68	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	44.16	74	29.84	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	44.27	74	29.73	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	43.76	74	30.24	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	44.86	74	29.15	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL , PEAK

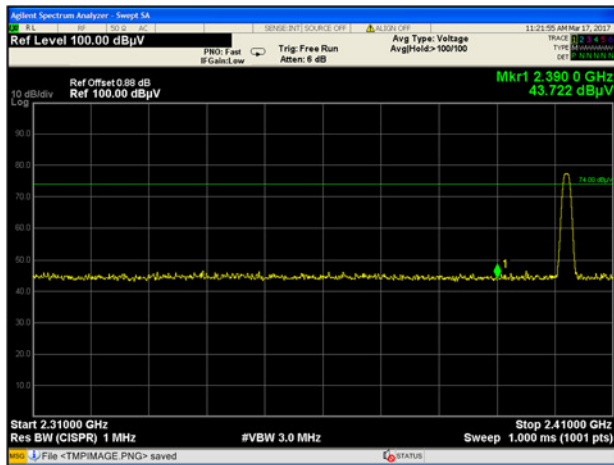


GFSK HIGH CHANNEL , PEAK

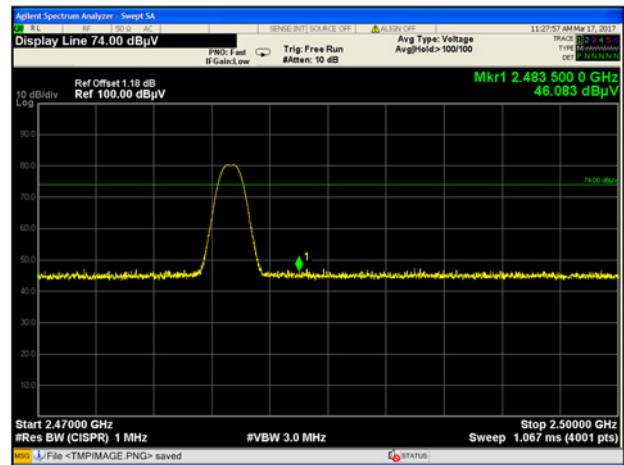

8-DPSK LOW CHANNEL , PEAK

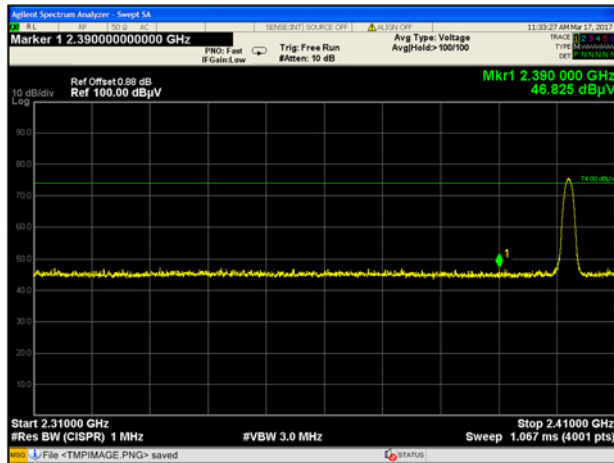


8-DPSK HIGH CHANNEL , PEAK

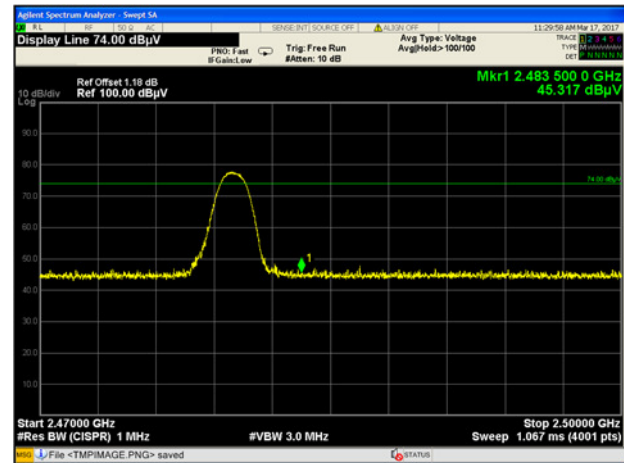


Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK


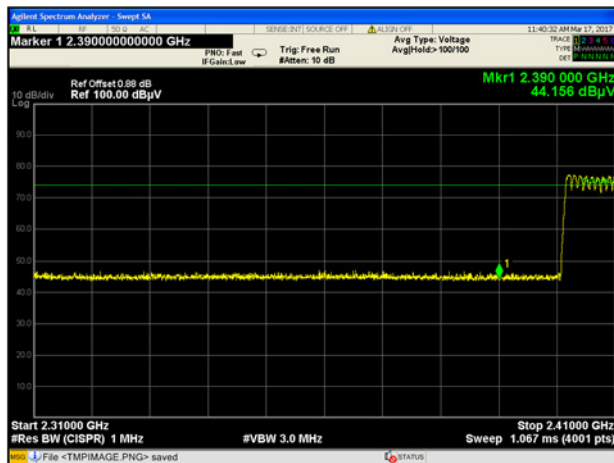


GFSK HIGH FREQUENCY BAND, PEAK

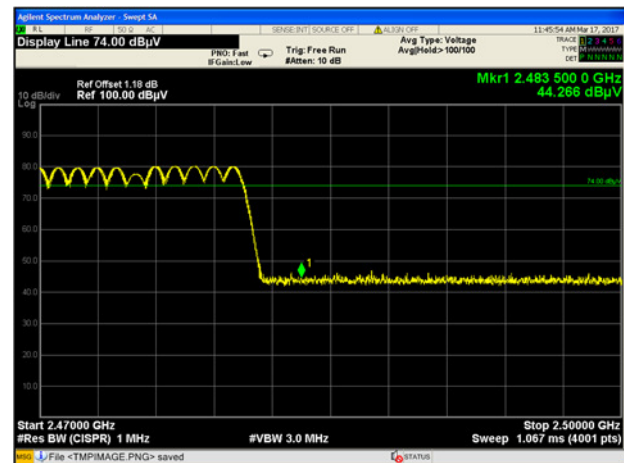

8-DPSK LOW FREQUENCY BAND, PEAK

8-DPSK HIGH FREQUENCY BAND, PEAK

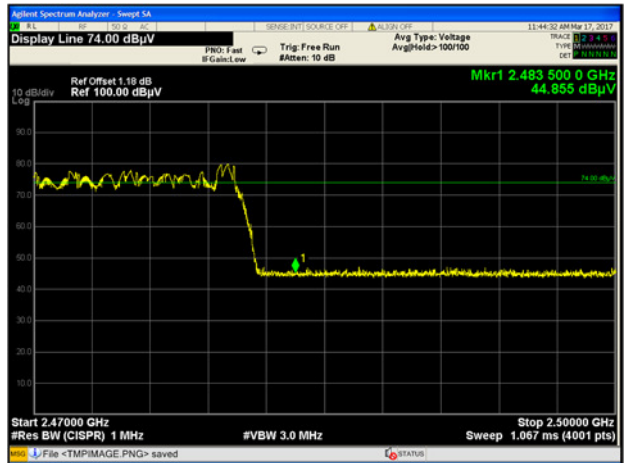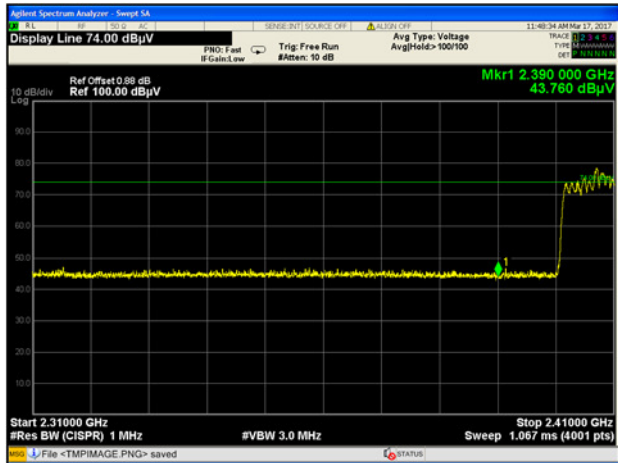

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1730152-AR (Soundbar).PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL- SZ1730152-AW (Soundbar).PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL- SZ1730152-AI (Soundbar).PDF”.

--END OF REPORT--