


**ATTACHMENT D – TEST PLOTS**


---

NEC Corp. MODEL: NR-7900A LINE A  
INTERNAL CD R/RW DRIVE (EN55022) PCTEST Engineering Lab.

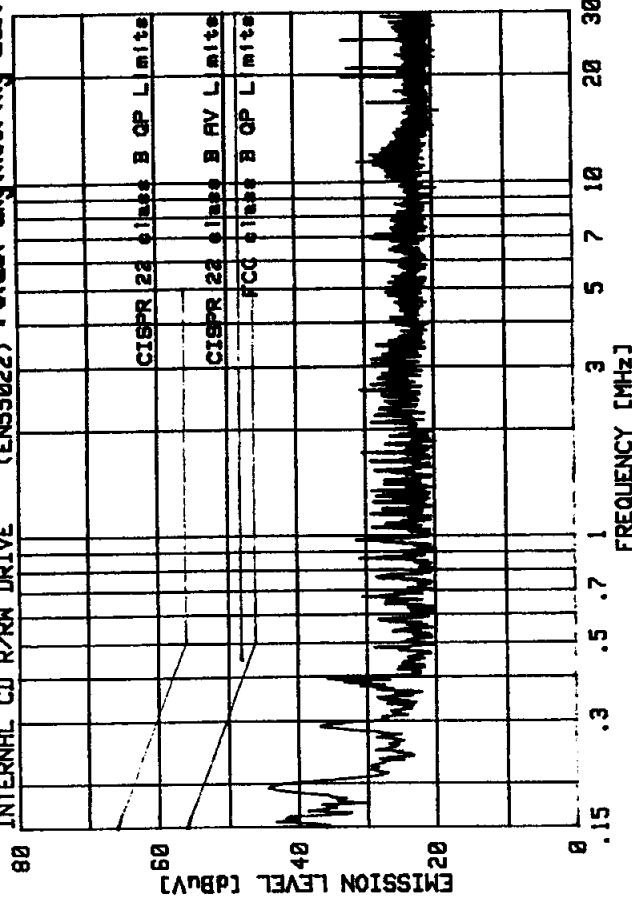


| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .189        | 43.47           | 64.00        | -20.61      | 42.07          | 54.11        | -12.04      |
| 2   | .390        | 29.36           | 58.00        | -28.70      | 18.59          | 48.00        | -29.43      |
| 3   | .151        | 42.56           | 65.94        | -23.38      | 32.94          | 56.00        | -23.06      |
| 4   | .285        | 35.47           | 60.66        | -25.19      | 33.74          | 50.70        | -16.96      |
| 5   | .968        | 29.88           | 56.00        | -26.12      | 27.92          | 46.00        | -18.08      |
| 6   | .391        | 29.37           | 58.04        | -28.67      | 19.09          | 48.12        | -29.03      |
| 7   | .860        | 28.06           | 56.00        | -27.94      | 23.93          | 46.00        | -22.07      |
| 8   | 2.586       | 30.04           | 56.00        | -25.96      | 26.29          | 46.00        | -19.71      |
| 9   | .668        | 28.05           | 56.00        | -27.95      | 25.21          | 46.00        | -20.79      |
| 10  | 1.721       | 29.05           | 56.00        | -26.95      | 25.42          | 46.00        | -20.58      |

NEC Corp. MODEL: NR-7900A LINE B  
INTERNAL CD R/RW DRIVE (EN55022) PCTEST Engineering Lab.

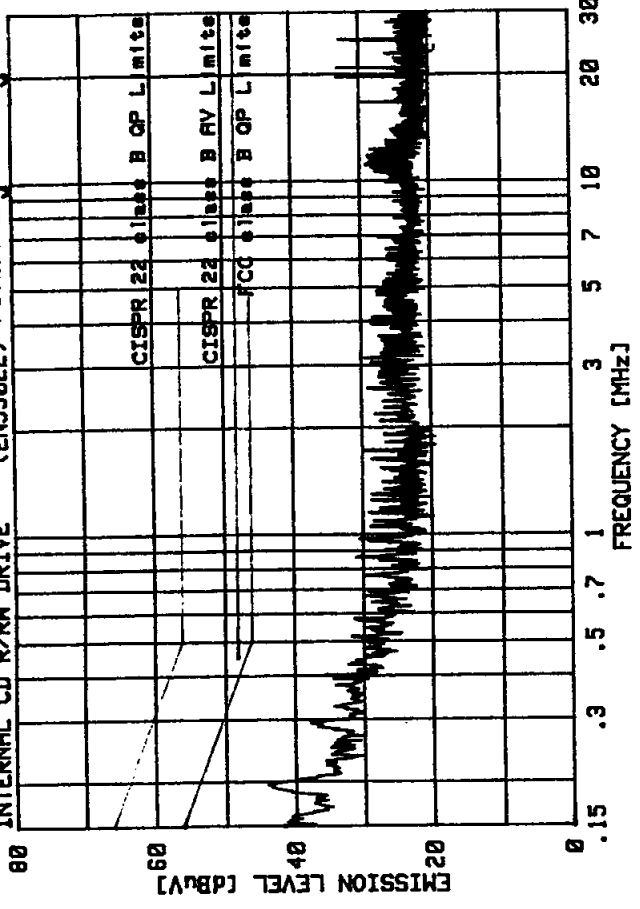


| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .179        | 45.73           | 64.53        | -18.80      | 41.34          | 54.20        | -12.86      |
| 2   | .391        | 30.24           | 58.05        | -27.81      | 22.75          | 48.03        | -25.28      |
| 3   | .285        | 36.95           | 60.66        | -23.71      | 33.71          | 50.67        | -16.96      |
| 4   | .381        | 30.40           | 58.25        | -27.85      | 22.97          | 48.06        | -25.09      |
| 5   | .151        | 49.77           | 65.95        | -16.18      | 43.69          | 56.00        | -12.31      |
| 6   | .372        | 30.68           | 58.45        | -27.77      | 25.85          | 48.46        | -22.61      |
| 7   | .505        | 25.85           | 56.00        | -30.15      | 19.99          | 46.00        | -26.01      |
| 8   | .572        | 28.93           | 56.00        | -27.07      | 25.17          | 46.00        | -20.83      |
| 9   | .433        | 29.07           | 57.19        | -28.12      | 24.13          | 47.19        | -23.06      |
| 10  | .859        | 30.14           | 56.00        | -25.86      | 25.56          | 46.00        | -20.44      |

NEC Corp. MODEL: NR-7900R LINE R PCTEST Engineering Lab.  
INTERNAL CD R/RM DRIVE (EN55022)

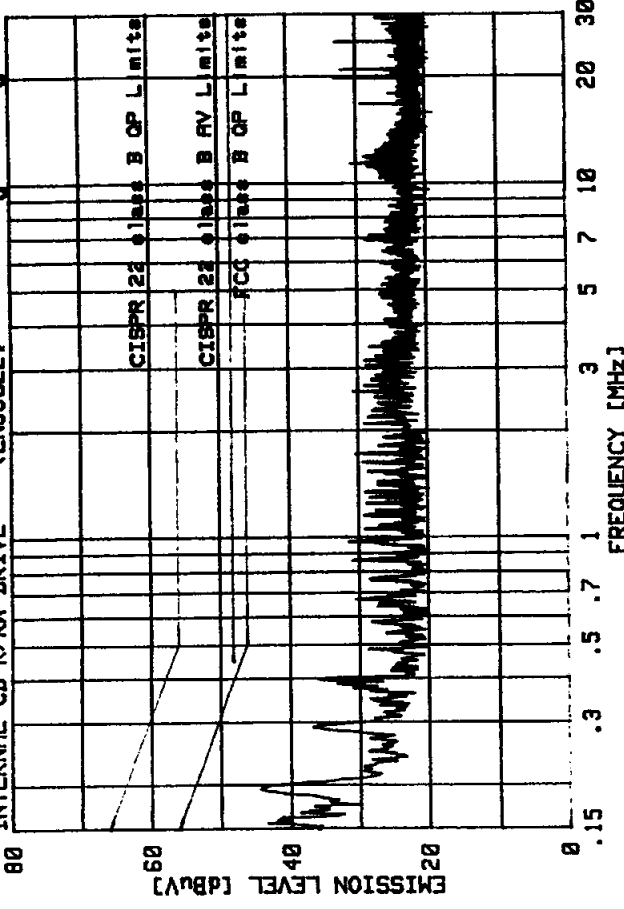


| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .189        | 43.47           | 64.08        | -20.61      | 42.07          | 54.11        | -12.04      |
| 2   | .390        | 29.36           | 58.06        | -28.70      | 18.59          | 48.02        | -29.43      |
| 3   | .151        | 42.56           | 65.94        | -23.38      | 32.94          | 56.00        | -23.06      |
| 4   | .285        | 35.47           | 60.66        | -25.19      | 33.74          | 50.70        | -16.96      |
| 5   | .968        | 29.88           | 56.00        | -26.12      | 27.92          | 46.00        | -18.08      |
| 6   | .391        | 29.37           | 58.04        | -28.67      | 19.09          | 48.12        | -29.03      |
| 7   | .860        | 28.06           | 56.00        | -27.94      | 23.93          | 46.00        | -22.07      |
| 8   | 2.586       | 30.04           | 56.00        | -25.96      | 26.29          | 46.00        | -19.71      |
| 9   | .668        | 28.05           | 56.00        | -27.95      | 25.21          | 46.00        | -20.79      |
| 10  | 1.721       | 29.05           | 56.00        | -26.95      | 25.42          | 46.00        | -20.58      |

NEC Corp. MODEL: NR-7900R LINE B PCTEST Engineering Lab.  
INTERNAL CD R/RM DRIVE (EN55022)

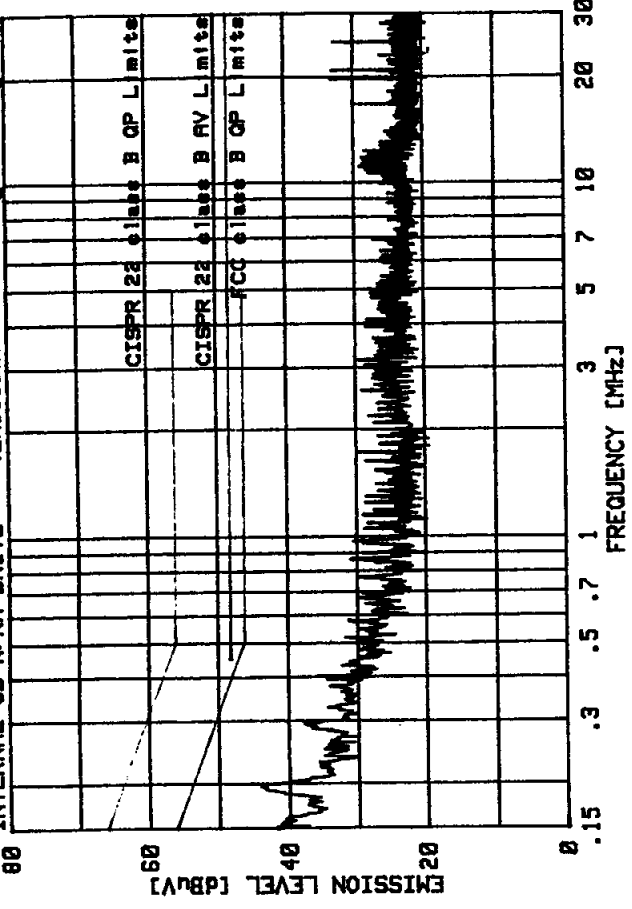


| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .179        | 45.73           | 64.53        | -18.80      | 41.34          | 54.20        | -12.86      |
| 2   | .391        | 30.24           | 58.05        | -27.81      | 22.75          | 48.03        | -25.28      |
| 3   | .285        | 36.95           | 60.66        | -23.71      | 33.71          | 50.67        | -16.96      |
| 4   | .381        | 30.40           | 58.25        | -27.85      | 22.97          | 48.06        | -25.09      |
| 5   | .151        | 49.77           | 65.95        | -16.18      | 43.69          | 56.00        | -12.31      |
| 6   | .372        | 30.68           | 58.45        | -27.77      | 25.85          | 48.46        | -22.61      |
| 7   | .505        | 25.85           | 56.00        | -30.15      | 19.99          | 46.00        | -26.01      |
| 8   | .572        | 28.93           | 56.00        | -27.07      | 25.17          | 46.00        | -20.83      |
| 9   | .433        | 29.07           | 57.19        | -28.12      | 24.13          | 47.19        | -23.06      |
| 10  | .859        | 30.14           | 56.00        | -25.86      | 25.56          | 46.00        | -20.44      |

NEC Corp. MODEL: NR-7900A LINE B PCTEST Engineering Lab.  
INTERNAL CD R/RW DRIVE (EN55022)

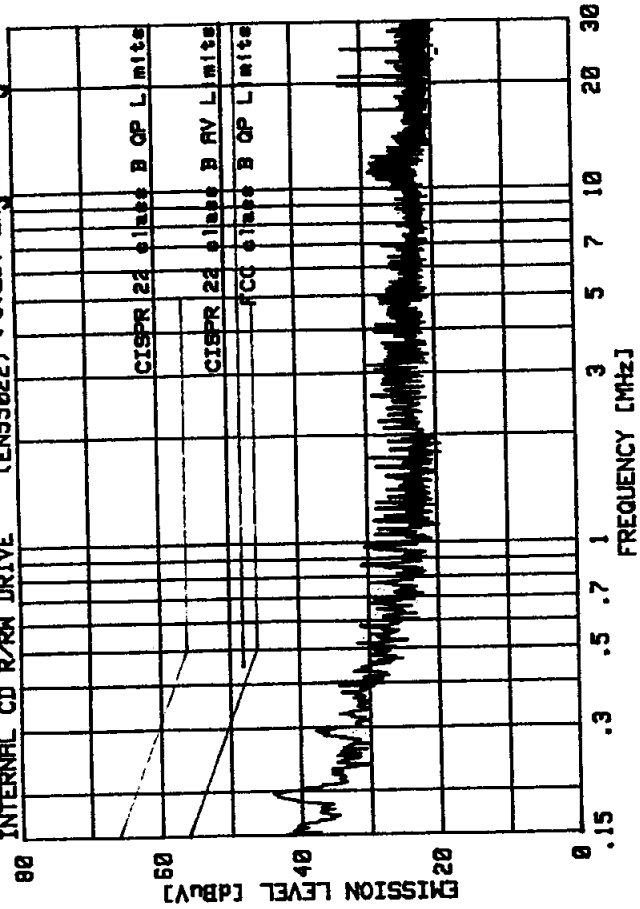

| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .179        | 45.73           | 64.53        | -18.80      | 41.34          | 54.20        | -12.86      |
| 2   | .391        | 30.24           | 58.05        | -27.81      | 22.75          | 48.03        | -25.28      |
| 3   | .285        | 36.95           | 60.66        | -23.71      | 33.71          | 50.67        | -16.96      |
| 4   | .381        | 30.40           | 58.25        | -27.85      | 22.97          | 48.06        | -25.09      |
| 5   | .151        | 49.77           | 65.95        | -16.18      | 43.69          | 56.00        | -12.31      |
| 6   | .372        | 30.68           | 58.45        | -27.77      | 25.85          | 48.46        | -22.61      |
| 7   | .505        | 25.85           | 56.00        | -30.15      | 19.99          | 46.00        | -26.01      |
| 8   | .572        | 28.93           | 56.00        | -27.07      | 25.17          | 46.00        | -20.83      |
| 9   | .433        | 29.07           | 57.19        | -28.12      | 24.13          | 47.19        | -23.06      |
| 10  | .859        | 30.14           | 56.00        | -25.86      | 25.56          | 46.00        | -20.44      |

NEC Corp. MODEL: NR-7900A LINE A PCTEST Engineering Lab.  
INTERNAL CD R/RW DRIVE (EN55022)

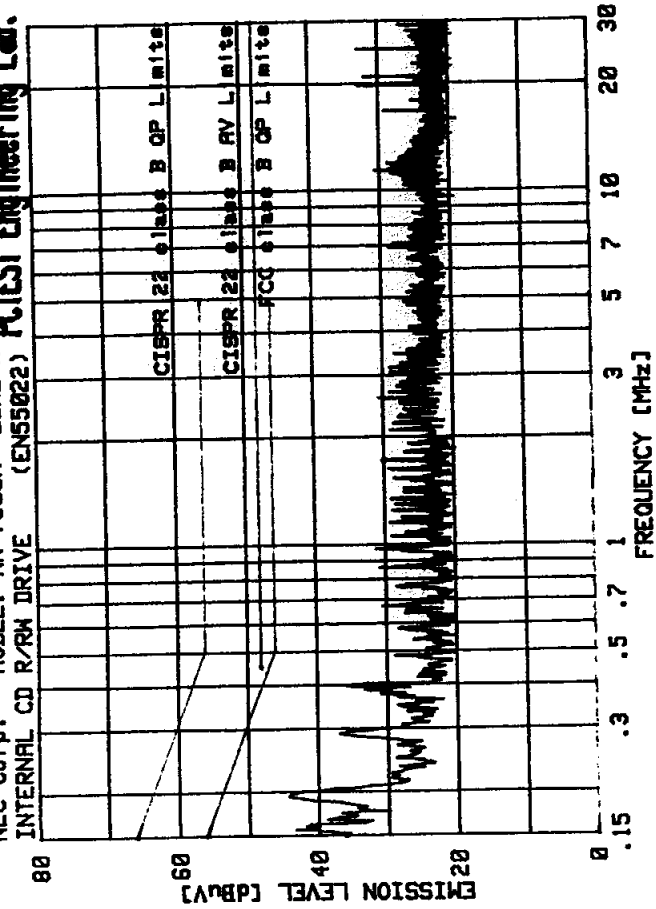

| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1   | .189        | 43.47           | 64.00        | -20.61      | 42.07          | 54.11        | -12.04      |
| 2   | .390        | 29.36           | 58.06        | -28.70      | 18.59          | 48.02        | -29.43      |
| 3   | .151        | 42.56           | 65.94        | -23.38      | 32.94          | 56.00        | -23.06      |
| 4   | .285        | 35.47           | 60.66        | -25.19      | 33.74          | 50.70        | -16.96      |
| 5   | .968        | 29.88           | 56.00        | -26.12      | 27.92          | 46.00        | -18.08      |
| 6   | .391        | 29.37           | 58.04        | -28.67      | 19.09          | 48.12        | -29.03      |
| 7   | .860        | 28.06           | 56.00        | -27.94      | 23.93          | 46.00        | -22.07      |
| 8   | 2.586       | 30.04           | 56.00        | -25.96      | 26.29          | 46.00        | -19.71      |
| 9   | .668        | 28.05           | 56.00        | -27.95      | 25.21          | 46.00        | -20.79      |
| 10  | 1.721       | 29.05           | 56.00        | -26.95      | 25.42          | 46.00        | -20.58      |