

Exhibit 8

**TEST REPORT OF RADIATED AND
CONDUCTED EMISSIONS**

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 18" LCD color monitor :

Model No. : 18L8025Q
 FCC ID : A3KM087
 Brand : PHILIPS

The LCD monitor automatically scans horizontal frequencies between 30KHz and 82KHz , and vertical frequencies between 56Hz and 75Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1280x1024 pixels. .

The monitor has 27 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 350	31.5KHz	70Hz	Non-interlaced
M02	720 X 400	31.5KHz	70Hz	Non-interlaced
M03	640 X 480	37.5KHz	75Hz	Non-interlaced
M04	640 X 480	37.9KHz	72Hz	Non-interlaced
M05	640 X 480	35.0KHz	67Hz	Non-interlaced
M06	640 X 480	31.5KHz	60Hz	Non-interlaced
M07	800 X 600	35.2KHz	56Hz	Non-interlaced
M08	800 X 600	46.9KHz	75Hz	Non-interlaced
M09	800 X 600	37.9KHz	60Hz	Non-interlaced
M10	832 X 624	49.7KHz	75Hz	Non-interlaced
M11	800 X 600	48.1KHz	72Hz	Non-interlaced
M12	1024 X 768	60.0KHz	75Hz	Non-interlaced
M13	1024 X 768	48.3KHz	60Hz	Non-interlaced
M14	1024 X 768	56.5KHz	70Hz	Non-interlaced
M15	1024 X 768	61.1KHz	76Hz	Non-interlaced
M16	1152 X 864	67.5KHz	75Hz	Non-interlaced
M17	1152 X 864	63.9KHz	70Hz	Non-interlaced
M18	1152 X 870	68.7KHz	75Hz	Non-interlaced
M19	1152 X 900	61.8KHz	66Hz	Non-interlaced
M20	1152 X 900	71.8KHz	76Hz	Non-interlaced
M21	1280 X 960	60.0KHz	60Hz	Non-interlaced
M22	1280 X 960	75.0KHz	75Hz	Non-interlaced
M23	1280 X 1024	76.0KHz	72Hz	Non-interlaced
M24	1280 X 1024	64.0KHz	60Hz	Non-interlaced
M25	1280 X 1024	80.0KHz	75Hz	Non-interlaced
M26	1280 X 1024	81.1KHz	76Hz	Non-interlaced
M27	1280 X 1024	71.7KHz	67Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION
EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
P.O. Box 123, Chungli, Taoyuan, Taiwan
R. O. C.

Tel : 886-3-4549862 Fax : 886-3-4549887
Internet: ronnie.yang@cli.ce.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2808A17338	11/17/1998
RF Preselector	HP85685A	2620A00138	11/17/1998
QP Adapter	HP85650A	2811A01326	11/17/1998
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	3/22/1999
Biconical Antenna	EMCO 3110B	3222	12/17/1998
Biconical Antenna	EMCO 3110B	3224	12/30/1998
Log-Periodic Antenna	EMCO 3146A	1424	12/29/1998
Log-Periodic Antenna	EMCO 3146A	1425	12/29/1998
LISN	EMCO 3825/2	9311-2153	3/15/1999
LISN	EMCO 3825/2	9311-2154	3/15/1999
Turn Table	EMCO 1060	1068	3/31/1999
Antenna Tower	EMCO 1050	1113	3/31/1999
RF Cable	M17/75-RG214-NE	N/A	3/31/1999
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "18L8025Q" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	IBM Aptiva 2176-T33	90-A58TZ	FCC Logo
2. Keyboard	IBM KB-7953	0024658	FCC Logo
3. Mouse	IBM M-S34	23-146196	DZL211029
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	USRobotics 268	0002680559278575	CJE-0318
6. Vide Card	Winner 3000L	023004001190	KJGW3000L
7. CD-ROM	Sony CDU31A	--	KGACDU31A2

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 3 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

D-sub and BNC types I/F cable were used receptively.

Extra USB-Keyboard, USB-Mouse and 2 USB cables with dummy load were connected to USB HUB.

Tested and reported modes as following:

Report No.	Resolution	Frequencies	I/F Cable
EMI99-016	1280 X 1024	80.0KHz/75Hz	D-sub
EMI99-016A	1280 X 1024	80.0KHz/75Hz	BNC
EMI99-016B	1280 x 1024	64.0KHz/60Hz	D-sub

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.


- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" pattern to USRobotics 268 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB μ v/m) = Reading (dB μ v) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

FCC TEST REPORT

FCC ID : A3KM087
REPORT NO.: EMI99-016
TEST DATE : APR./12/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : 18L8025Q LCD COLOR MONITOR S/N.: TY9904016
FCC ID. : A3KM087
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
FCC ID. : FCC L060
3. PRINTER : HP 2225C S/N.: 3145502419
FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
FCC ID. : CJE-0318
5. MOUSE : IBM M-S34 S/N.: 23-146196
FCC ID. : DZL211029
6. KEYBOARD: IBM KB-7953 S/N.: 0024658
FCC ID. : FCC LOGO
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
FCC ID. : KJ6W3000L
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 'AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz'

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
80.0Kz MODE(1280X1024/75Hz) WAS TESTED.
D-USB I/O CABLE WITH TWO FERRITE CORES WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE AND MICPHONE WERE USED DURING TEST.
EXTRA USB-KEYBOARD,USB-MOUSE AND 2 USB-CABLES WERE CONNECTED
TO USB HUB.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
42.82	26.62	32.22	40
72	28.16	32.66	40
75.92	30.18	32.48	40
85.64	27.8	29.6	40
123.42	32.09	29.59	43.5
128.1	30.24	27.94	43.5
133.1	31.83	29.93	43.5
137.81	32.38	30.38	43.5
151.84	33.9	31	43.5
180.46	32.8	31.5	43.5
242.33	36.88	38.68	46
246	37.54	36.04	46
252	38.6	35	46
265.95	38.54	38.54	46
270.56	35.24	36.24	46
276	38.34	AMBIENT	46
289.68	36.5	35.5	46
294.3	37.18	35.98	46
300	36.7	35.6	46
304	33.516	30.516	46
308.71	33.036	32.936	46
312	36.148	33.848	46
318.02	34.772	31.572	46
323.06	30.492	30.692	46
324	31.396	30.596	46
329.97	34.12	29.52	46
336.54	33.388	33.988	46
341.97	33.308	32.608	46
347.97	33.552	30.252	46
353.97	31.9	30.5	46
356.66	36.8	33.5	46
363.47	35	32.4	46
365.69	33.9	34.3	46
372.01	32.5	30.9	46
376.93	32.172	32.072	46
379.93	38.88	38.88	46
384.01	37.424	35.924	46
389.43	34.604	39.504	46
396.22	36.056	36.656	46
398.43	34.628	31.528	46
427.43	37.948	36.348	46
436.76	32.688	33.688	46
441.03	33.584	31.984	46
455.93	34.944	34.944	46
460.54	33.664	34.864	46

471.17	35.304	36.604	46
474.93	35.4	37.8	46
493.91	35.508	36.808	46
503.42	35.224	33.524	46
512.92	35.804	36.004	46
522.43	34.676	37.676	46
538.47	36.852	34.552	46
541.42	35.464	33.564	46
550.91	33.724	33.724	46
560.41	34.24	33.44	46
569.91	35.58	33.98	46
588.89	34.968	37.368	46
594.41	35.228	37.128	46
605.79	39.792	39.692	46
617.4	37.344	38.244	46
636.39	36.44	37.24	46
767.3	38.772	39.372	46
788.37	38.908	39.708	46
834.63	39.56	39.26	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
47.5	29.62	34.02	40
52.17	32.52	33.82	40
56.84	29.97	35.67	40
61.89	30.56	35.76	40
66.55	34.61	35.71	40
71.24	34.38	36.58	40
118.74	35.14	33.54	43.5
142.48	38.52	36.32	43.5
150.71	30.85	37.15	43.5
161.62	34.16	34.56	43.5
170.98	32.93	31.13	43.5
189.98	40.2	40.5	43.5
209	32.6	30.2	43.5
218.46	32.74	31.94	46
228	32.06	31.56	46
237.47	41.15	39.55	46
261.22	38.24	36.24	46
332.45	42.868	40.968	46
408.43	36.296	40.096	46
417.93	36.916	40.616	46
480.01	40.36	39.06	46
528.01	39.712	39.312	46
673.08	38.364	37.764	46

FCC ID : A3KM087

-- #016 CONT. --

780.78	38.196	38.696	46
807.69	41.528	39.428	46
901.92	39.208	39.508	46
915.38	38.16	39.86	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

TESTED BY:

C. C. Wu

K.J.HSU, NVLAP SIGNATORY

C.C.Wu


APR./12/1999

RFI EMISSION LEVEL dBuv/m

REPORT NO: EMI99-016
MODEL NO: 18L8025Q

FCC CLASS B

FREQUENCY MHz

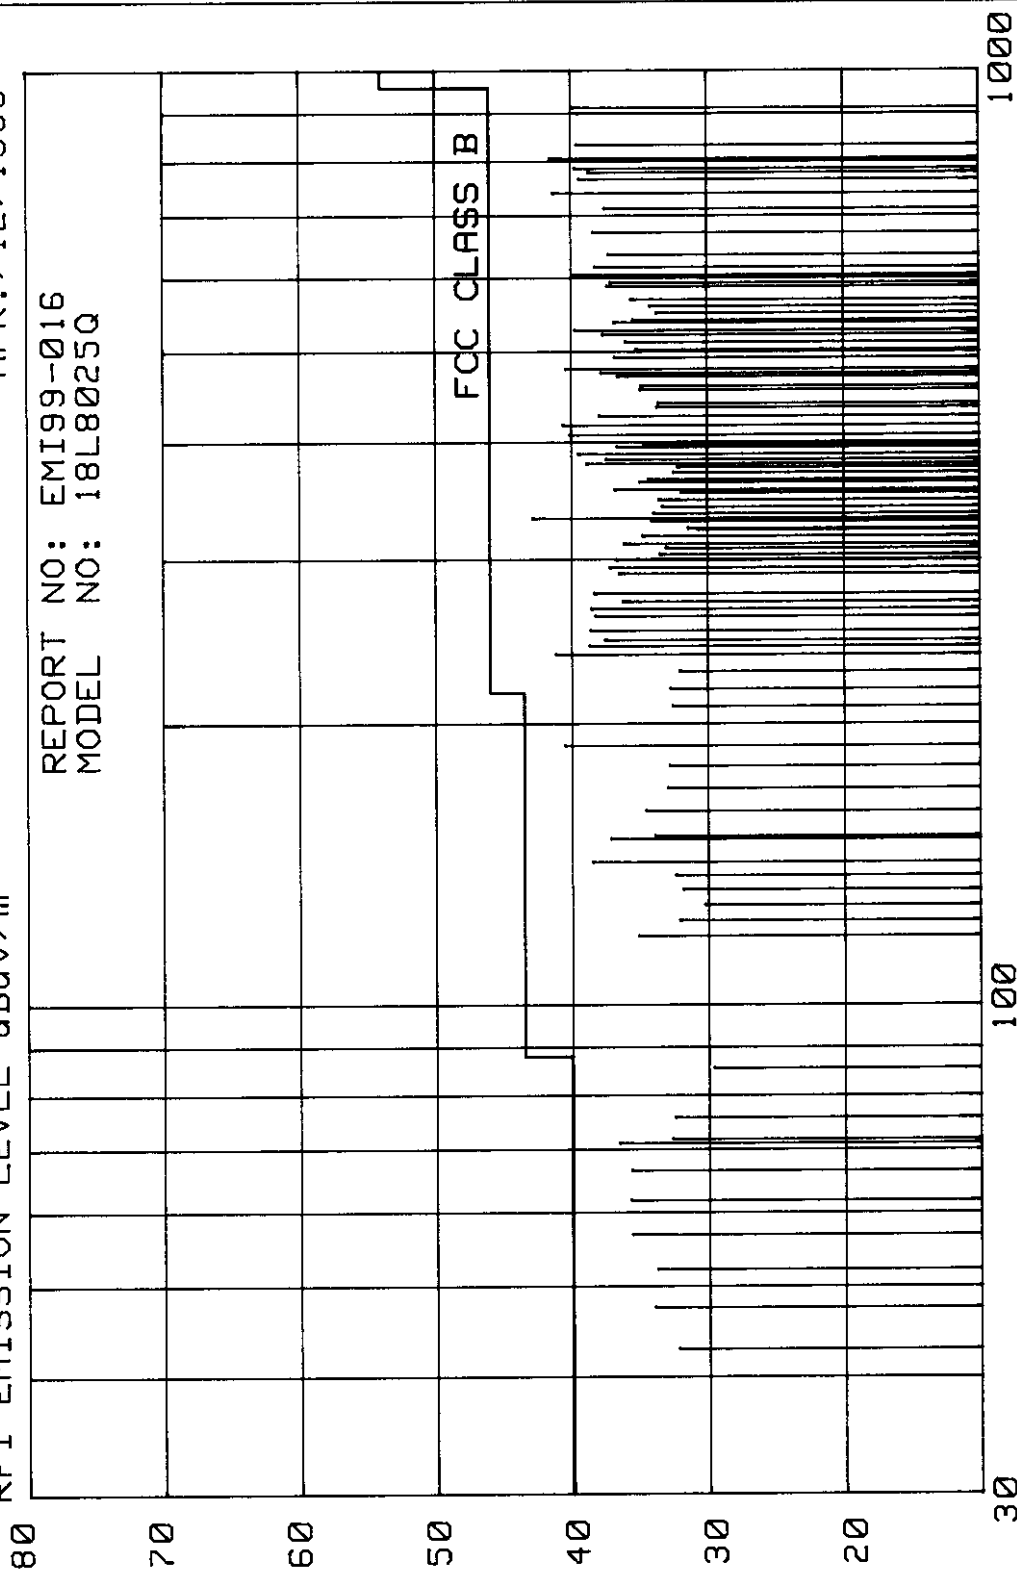


hp

A3KM087 1280X1024/75Hz 80KHz 110VAC D-SUB I/F MKR 510 KHz
REF 107.0 dBμV ATTEN 10 dB 41.70 dBμV

10 dB/

DL
48.0
dBμV

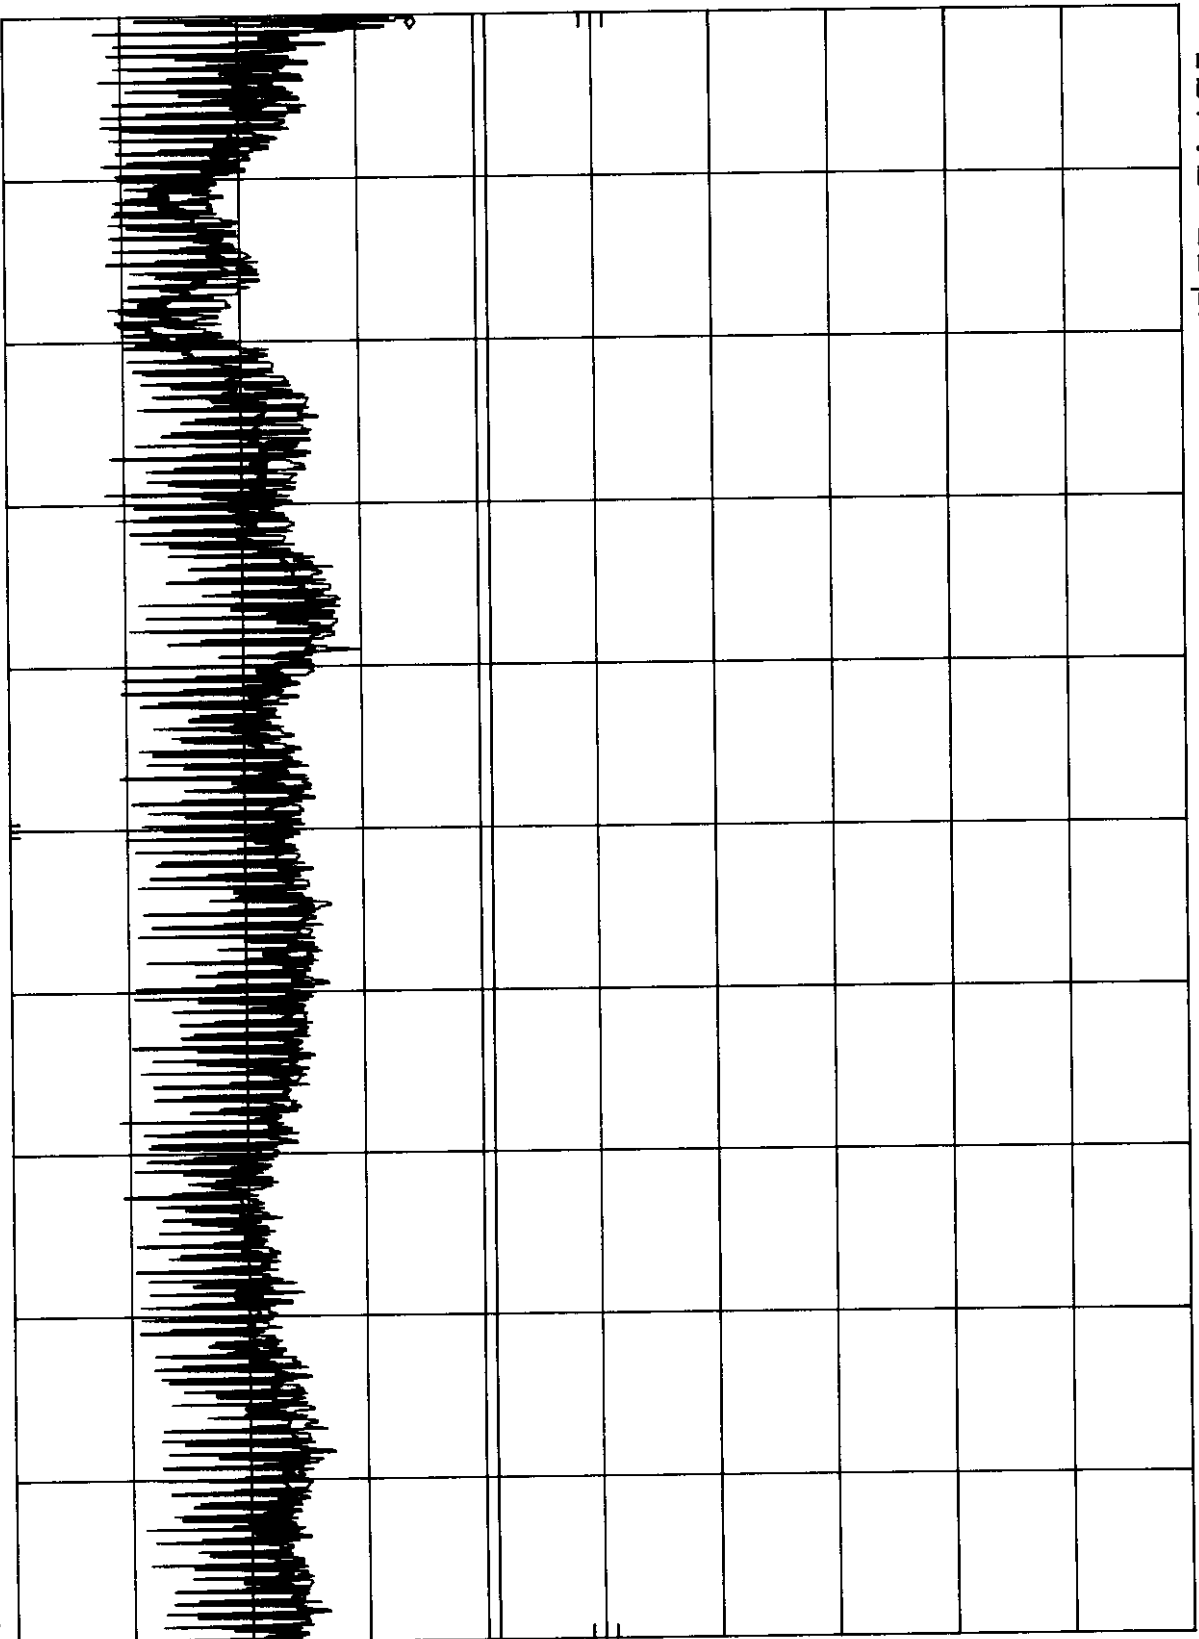


START 450 KHz STOP 30.00 MHz
RES BW 10 KHz VBW 10 KHz SWP 750 msec

HP

A3KM087 1280X1024/75Hz 80KHz 220VAC D-SUB I/F MKR 660 KHz
REF 107.0 dBμV ATTN 10 dB 41.00 dBμV

10 dB/

DL
48.0
dBμV

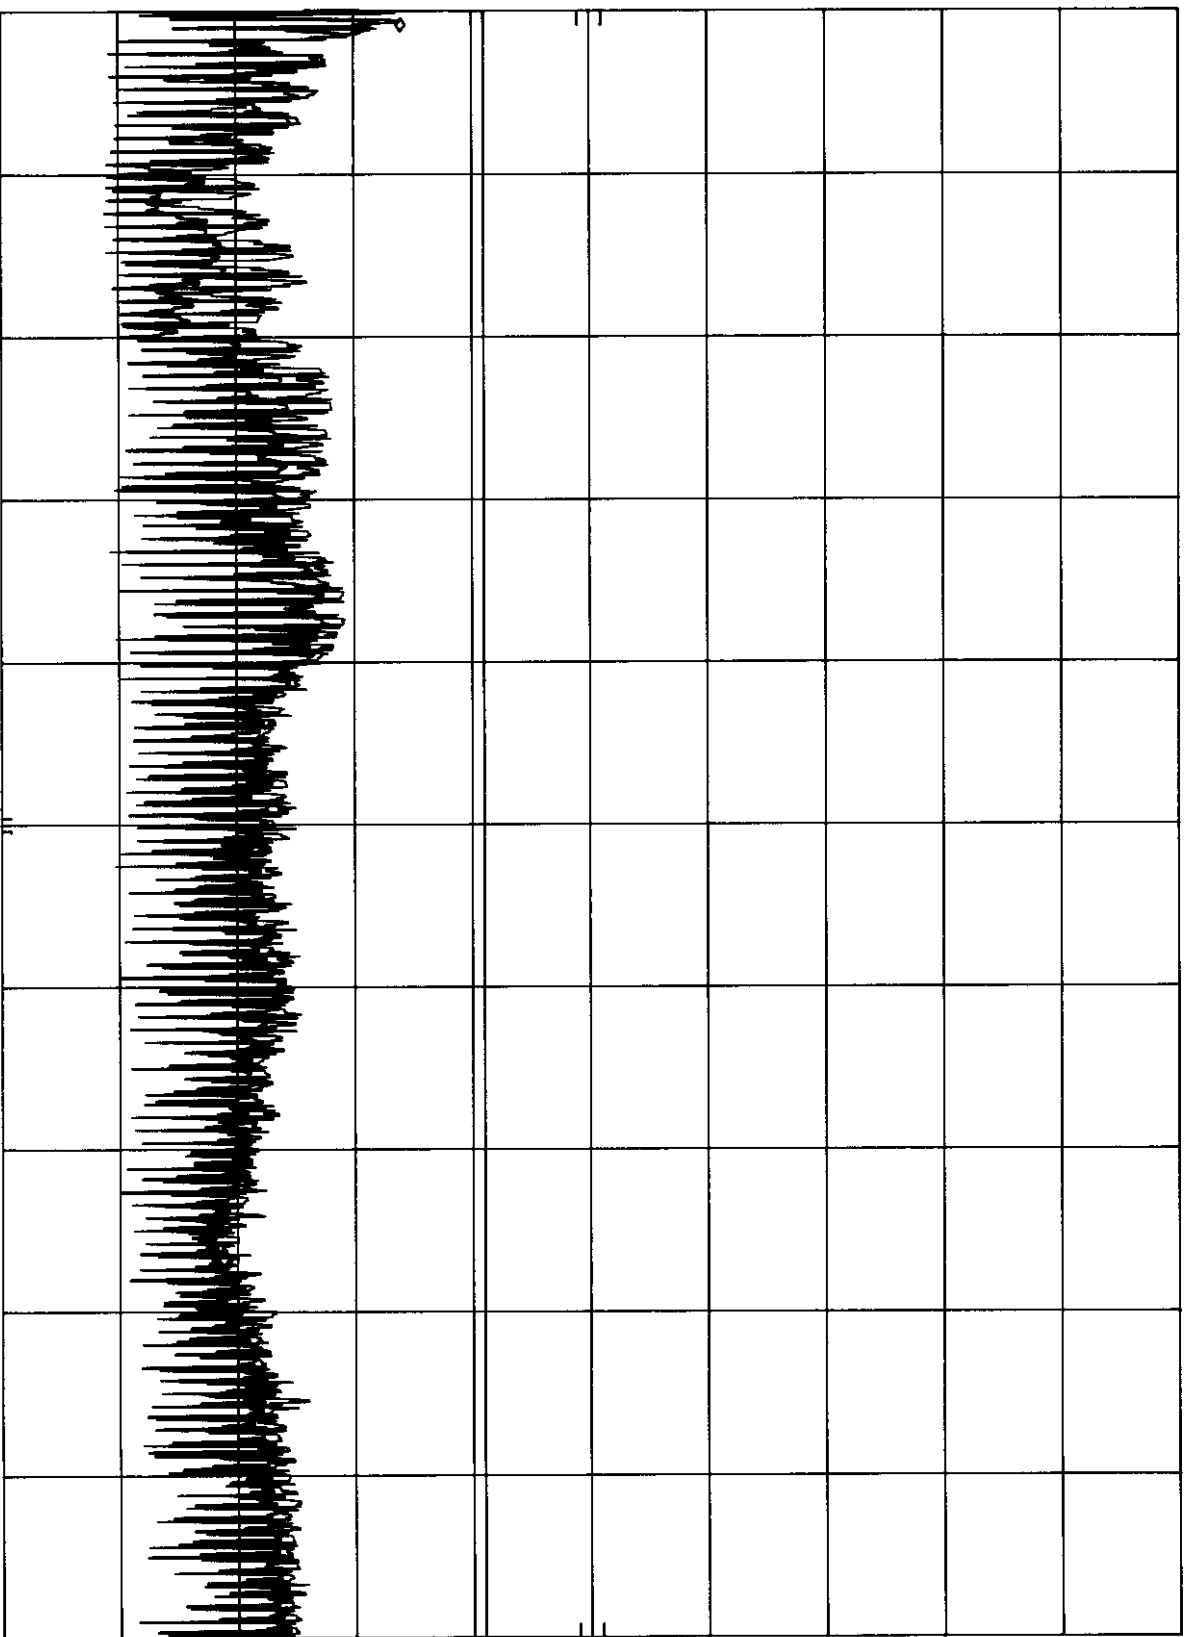

START 450 KHz

RES BW 10 KHz

VBW 10 KHz

STOP 30.00 MHz
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM087
REPORT NO.: EMI99-016A
TEST DATE : APR./13/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNG LI, TAoyuan, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : 18L8025Q LCD COLOR MONITOR S/N.: TY9904016
FCC ID. : A3KM087
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
FCC ID. : CJE-0318
5. MOUSE : IBM M-S34 S/N.: 23-146196
FCC ID. : DZL211029
6. KEYBOARD: IBM KB-7953 S/N.: 0024658
FCC ID. : FCC LOGO
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
FCC ID. : KJGW3000L
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
64.0Kz MODE(1280X1024/60Hz) WAS TESTED.
D-USB I/O CABLE WITH TWO FERRITE CORES WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE AND MICPHONE WERE USED DURING TEST.
EXTRA USB-KEYBOARD,USB-MOUSE AND 2 USB-CABLES WERE CONNECTED
TO USB HUB.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
39.98	26.9	31.2	40
72	28.36	33.36	40
111.89	27.82	33.82	43.5
216.02	33.68	31.08	46
216.62	33.96	32.36	46
234	35.7	35.7	46
237.91	37	37.3	46
246.02	36.64	34.94	46
252.02	37.2	34.8	46
258.03	36.4	34.9	46
264.03	35.36	34.96	46
276.03	36.84	AMBIENT	46
288.03	37.1	35.6	46
302.52	29.412	30.712	46
310.85	29.144	31.144	46
323.55	32.696	32.896	46
324.91	31.5	31.3	46
356.6	37.8	36.1	46
361.39	37.2	37	46
379.07	34.744	34.044	46
396.21	34.256	39.156	46
401.52	35.724	38.624	46
416.01	34.792	33.692	46
441.01	32.584	35.684	46
449.32	31.876	33.776	46
481.01	33.192	35.892	46
522.07	32.576	33.676	46
562.32	34.088	35.988	46
594.39	37.228	37.228	46
628.18	38.52	39.62	46
639	36.76	36.56	46
747.29	39.236	38.536	46
790.62	39.956	39.556	46
996.38	41.72	42.12	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
 SPECTRUM ANALYZER SETTINGS:
 RBW : 100KHz
 VBW : 100KHz

FCC ID : A3KM087

-- #016A CONT. --

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
52.12	29.92	32.32	40
56	30.06	33.76	40
59.86	31	34.3	40
63.75	33.02	36.72	40
67.7	32.64	34.04	40
75.81	34.08	32.48	40
119.46	34.94	36.64	43.5
127.21	37.71	35.61	43.5
135.15	35.75	35.15	43.5
158.85	33.75	36.55	43.5
210.02	36	30.8	43.5
541.53	39.568	37.968	46
595.67	40.152	39.352	46
736.46	39.368	37.968	46
758.12	41.328	41.428	46
812.28	42.492	41.992	46
866.43	40.884	40.884	46
920.57	39.384	41.484	46
974.73	43	44.5	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. HSU

K.J.HSU, NVLAP SIGNATORY

TESTED BY:

C.C. Wu

C.C.Wu


RFI EMISSION LEVEL dBuV/m

APR./13/1999

REPORT NO: EMI99-016A
MODEL NO: 18L8025Q

FCC CLASS B

FREQUENCY MHz

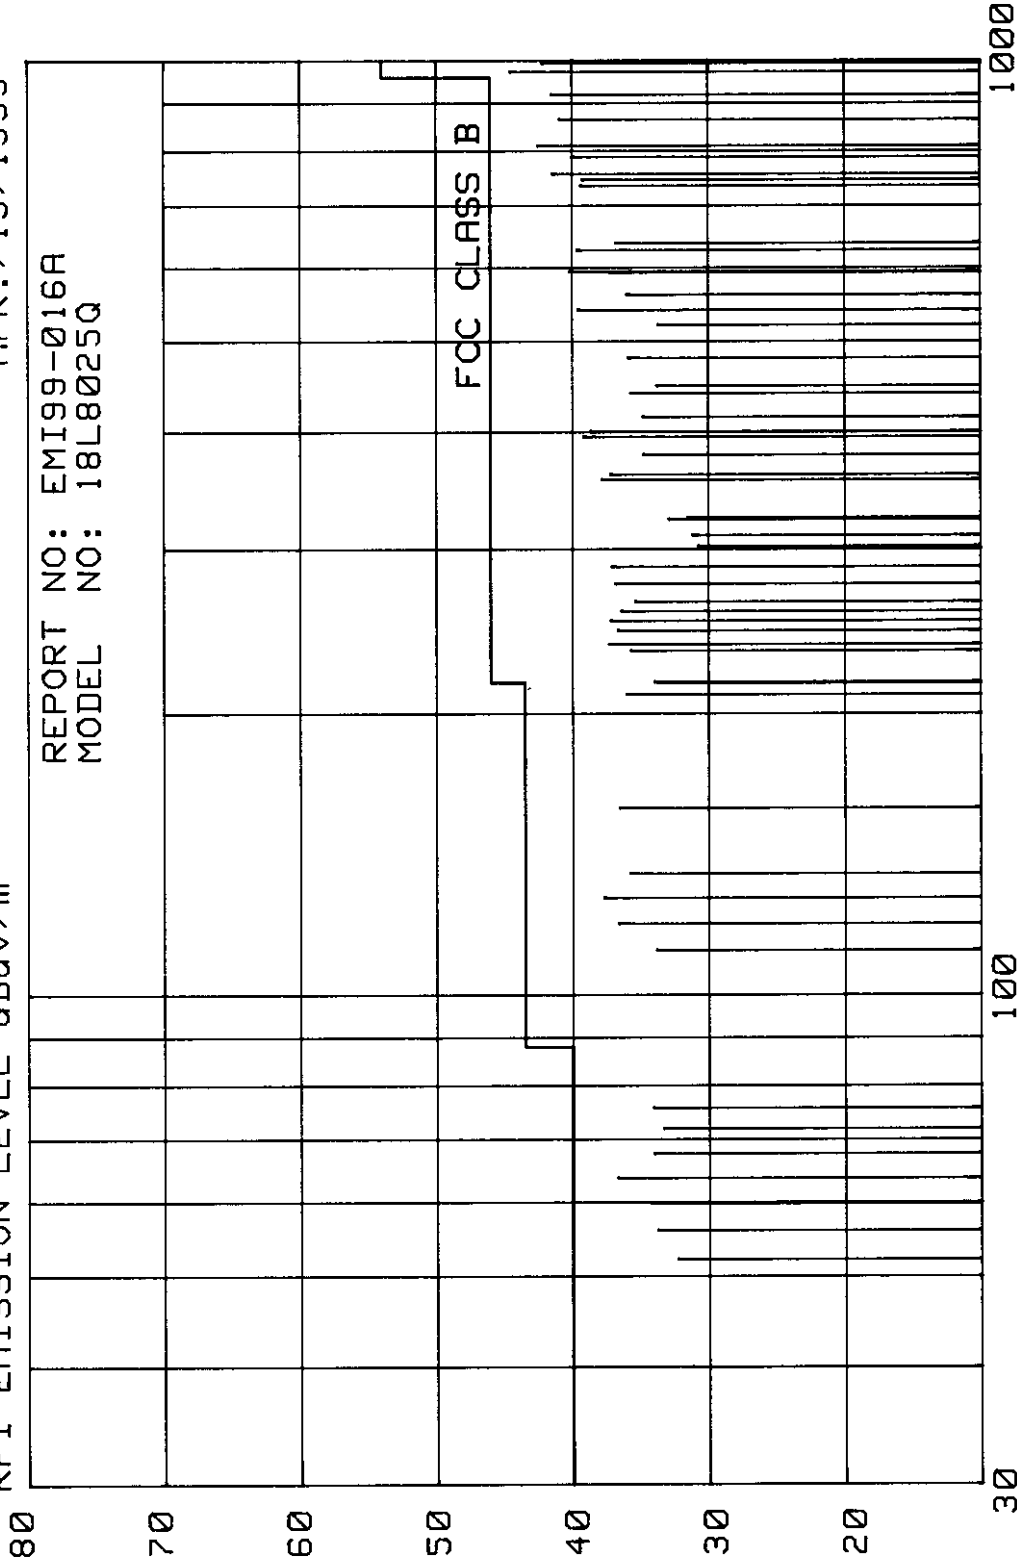


hp

A3KM087 1280X1024/60HZ 64KHZ 110VAC D-SUB I/F MKR 510 KHZ
REF 107.0 dBμV ATTEN 10 dB 41.90 dBμV

10 dB/

DL
48.0
dBμV


START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

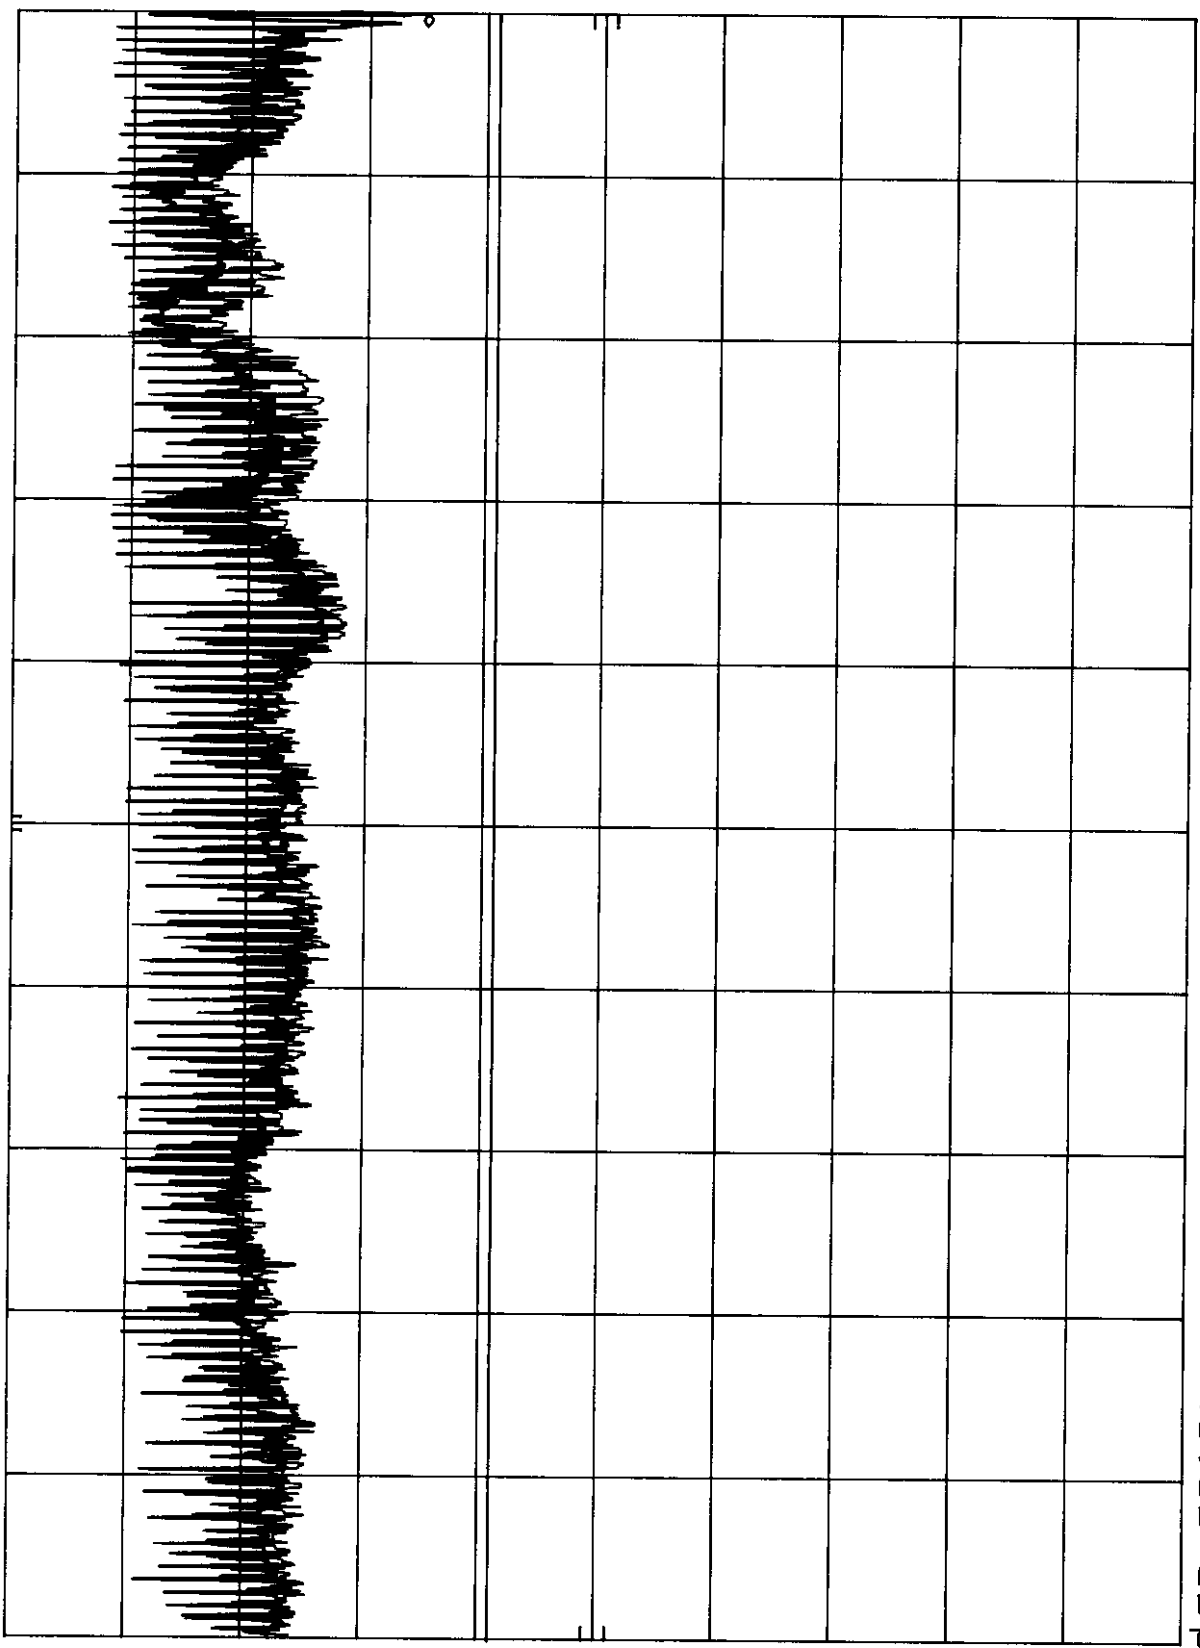

A3KM087 1280X1024/60HZ 64KHZ 220VAC D-SUB I/F MKR 510 KHZ
h_p REF 107.0 DBμV ATTEN 10 DB 39.50 DBμV

10 DB/

DL
48.0
DBμV

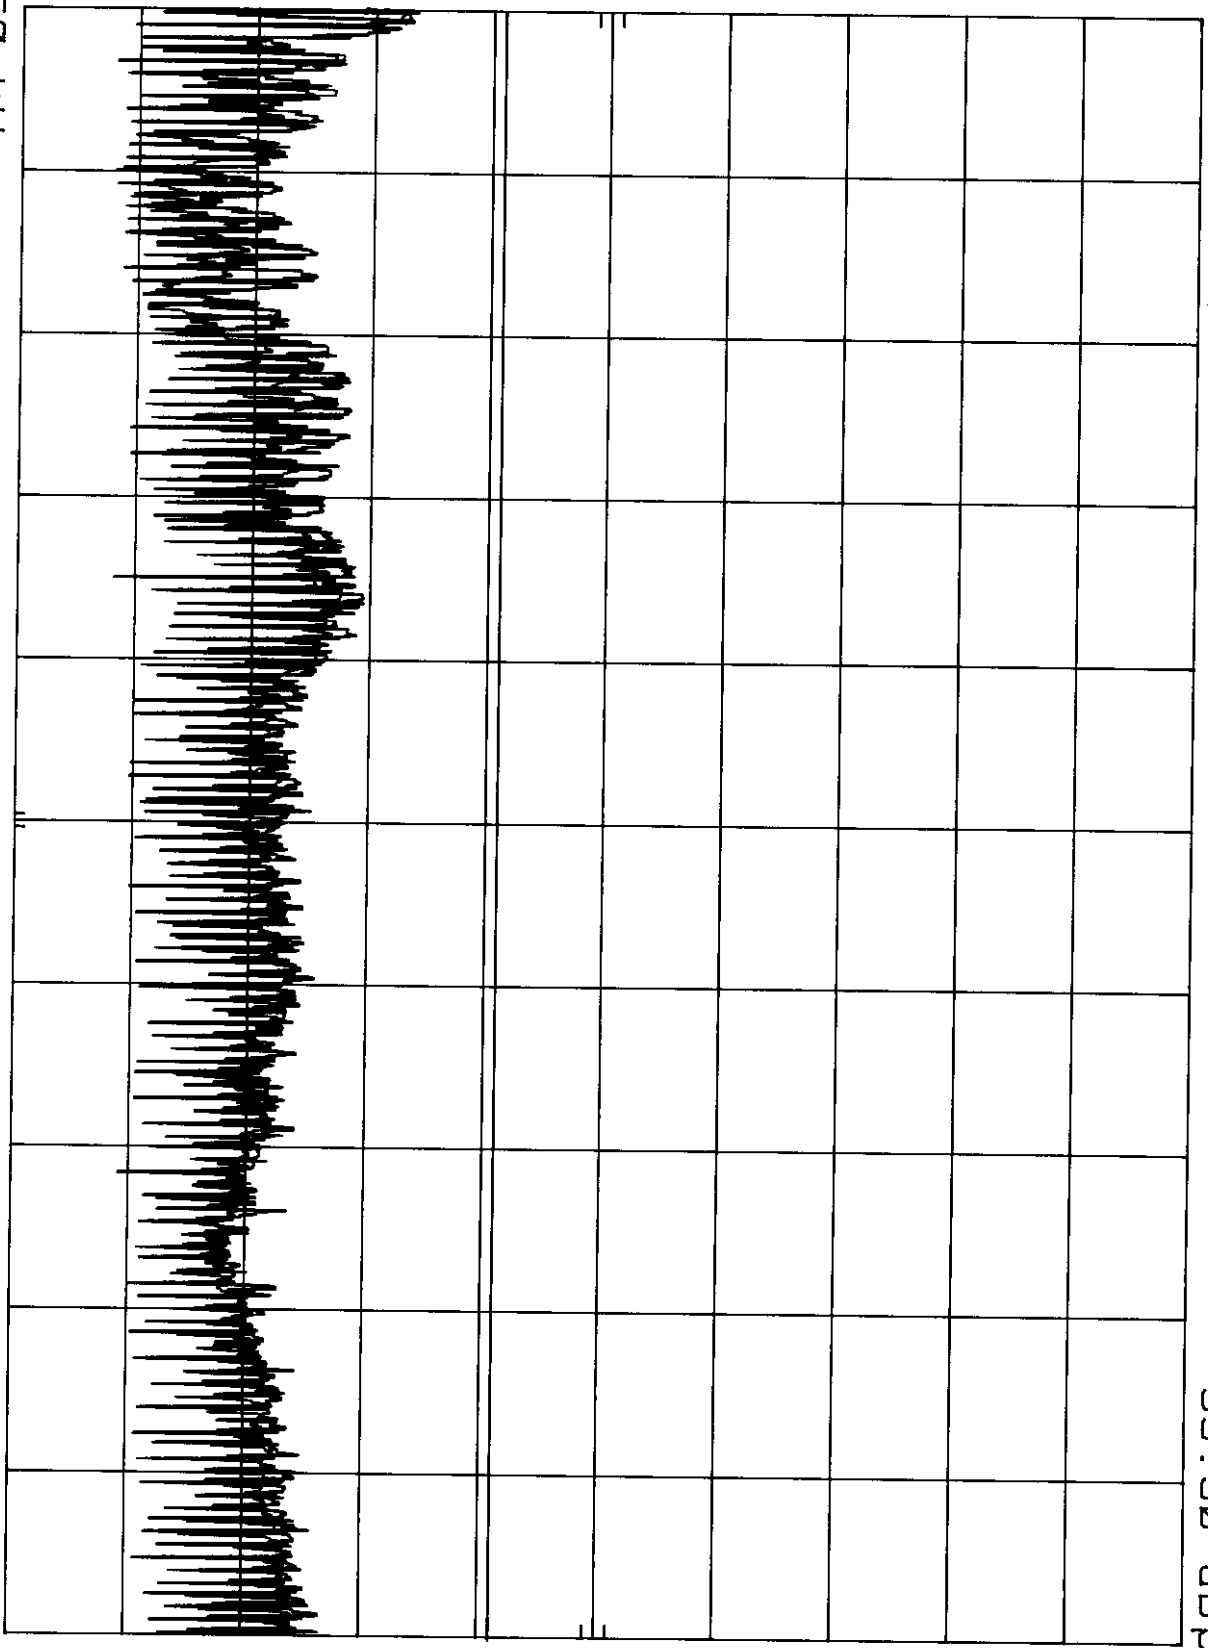

START 450 KHZ STOP 30.00 MHZ
RES BW 10 KHZ VBW 10 KHZ SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM087
REPORT NO.: EMI99-016B
TEST DATE : APR./14/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNG LI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : 18L8025Q LCD COLOR MONITOR S/N.: TY9904016
FCC ID. : A3KM087
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
FCC ID. : D5I6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
FCC ID. : CJE-0318
5. MOUSE : IBM M-S34 S/N.: 23-146196
FCC ID. : DZL211029
6. KEYBOARD: IBM KB-7953 S/N.: 0024658
FCC ID. : FCC LOGO
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
FCC ID. : KJ6W3000L
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
80.0Kz MODE(1280X1024/75Hz) WAS TESTED.
B.N.C. I/O CABLE WITH ONE FERRITE CORE WAS USED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE AND MICPHONE WERE USED DURING TEST.
EXTRA USB-KEYBOARD,USB-MOUSE AND 2 USB-CABLES WERE CONNECTED
TO USB HUB.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
42.82	26.12	29.92	40
47.5	28.82	33.12	40
52.17	29.92	30.62	40
56.84	28.97	33.77	40
61.89	27.36	31.86	40
66.55	27.71	31.61	40
72	26.86	31.36	40
75.92	26.98	28.68	40
85.64	28.1	30.1	40
123.42	28.19	30.49	43.5
128.1	29.04	29.04	43.5
133.1	29.83	30.83	43.5
161.62	30.76	31.76	43.5
170.98	30.83	30.83	43.5
180.46	29.4	32.4	43.5
242.33	33.98	36.28	46
246	34.54	36.24	46
252	36.3	34.8	46
261.2	39.34	36.84	46
265.95	38.34	34.24	46
276	37.44	AMBIENT	46
300	36.8	35.2	46
304	29.616	29.916	46
308.71	32.036	30.536	46
318	34.172	30.572	46
322.95	29.492	30.692	46
329.95	36.12	31.22	46
336.54	35.688	34.288	46
341.95	34.008	30.808	46
356.6	34.1	35.3	46
365.69	35.5	34.2	46
379.93	37.08	39.38	46
389.43	32.204	32.704	46
396.22	37.056	34.456	46
417.93	31.916	32.716	46
427.42	35.448	36.548	46
441.03	32.084	32.384	46
471.17	35.104	34.904	46
474.92	34.2	35.8	46
522.43	33.976	33.676	46
538.51	38.456	37.956	46
569.89	34.58	35.48	46
588.89	34.868	35.068	46
594.41	35.428	35.528	46
617.4	35.444	36.044	46

FCC ID : A3KM087
-- #016B CONT. --

636.39	37.14	38.64	46
788.37	39.108	39.208	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
71.24	32.98	34.58	40
118.74	32.24	37.04	43.5
137.81	29.38	32.48	43.5
142.48	37.92	31.22	43.5
150.95	35.85	37.35	43.5
151.84	34	30.6	43.5
189.98	33.1	38.7	43.5
237.45	42.85	40.35	46
332.45	41.068	41.168	46
605.79	37.792	38.092	46
673.09	36.764	39.164	46
740.39	42.22	39.32	46
807.69	37.828	38.228	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

K.J.HSU, NVLAP SIGNATORY

TESTED BY:

C.C. Wu

C.C.Wu

RFI EMISSION LEVEL dBuV/m

APR./14/1999

REPORT NO: EMI99-016B
MODEL NO: 18L8025Q

FCC CLASS B

FREQUENCY MHz

80

70

60

50

40

30

20

30

100


1000

A3KM087 1280X1024/75Hz 80KHz 110VAC BNC I/F MKR 480 KHz
REF 107.0 dBμV ATTN 10 dB 41.30 dBμV

h_p

10 dB/

DL
48.0
dBμV

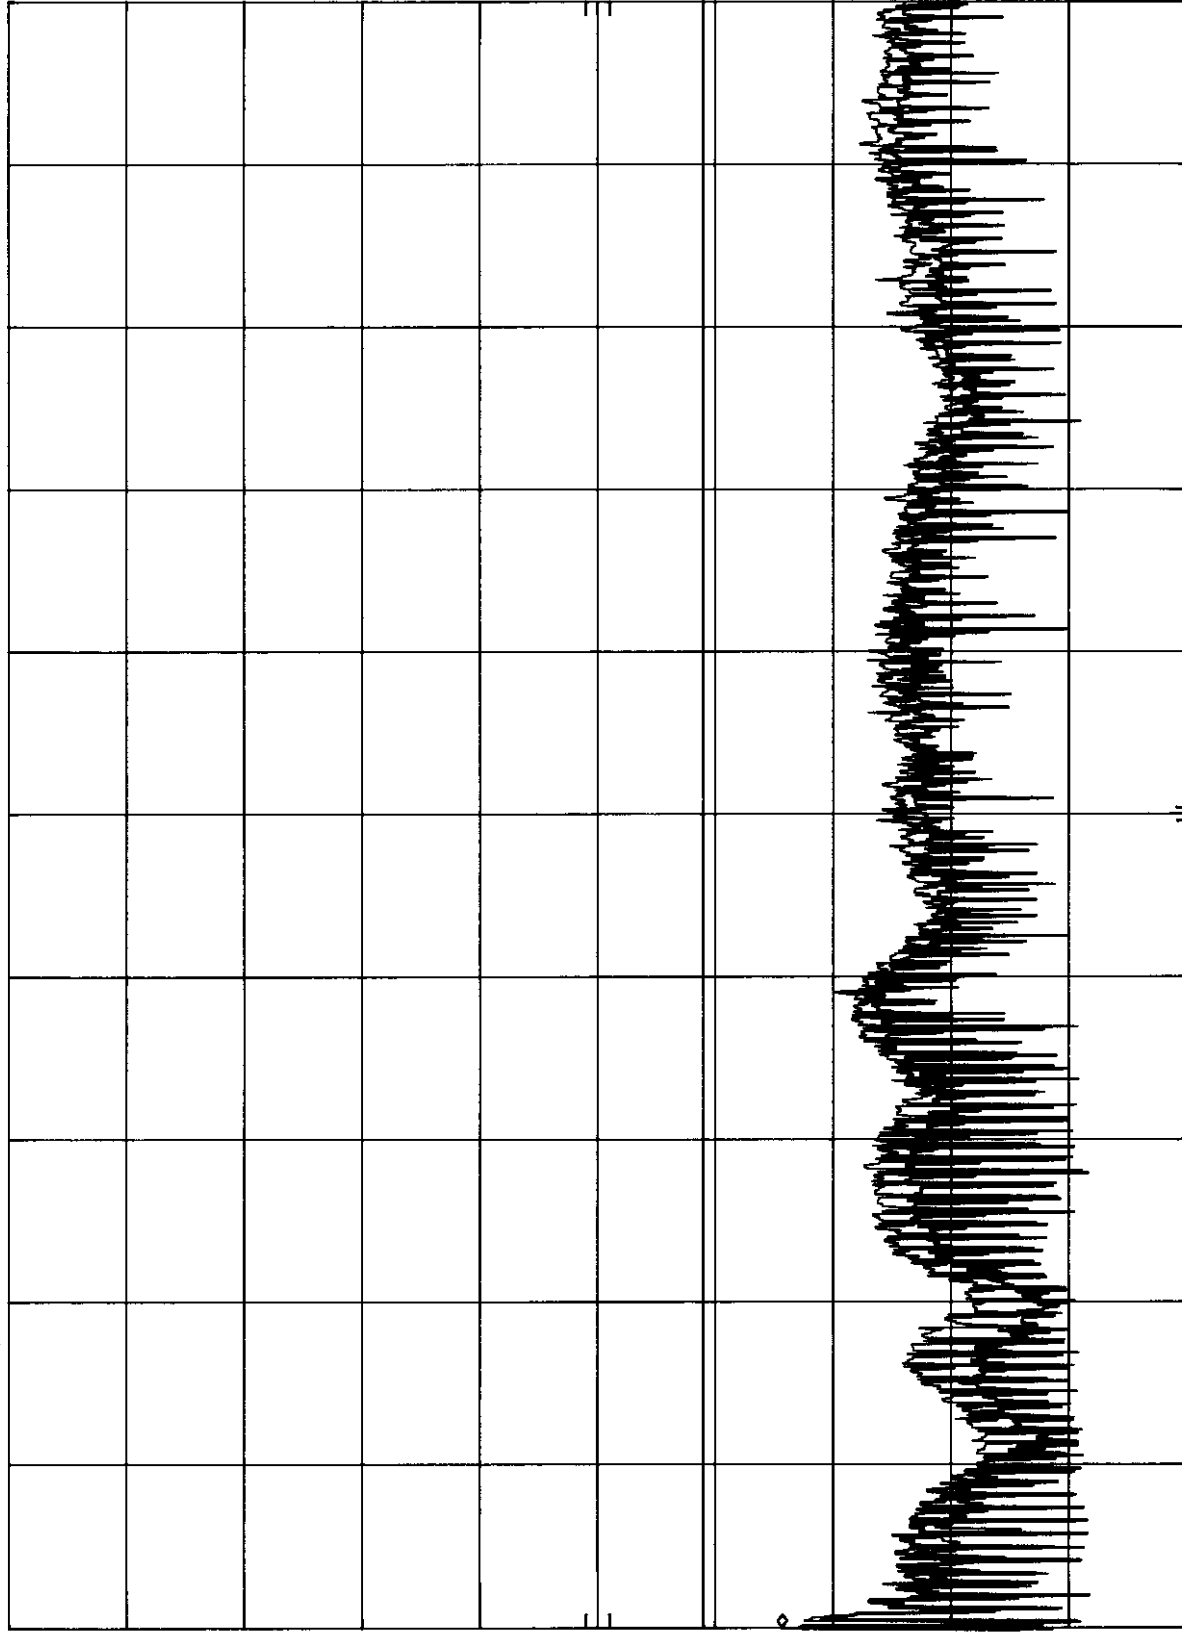


START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

A3KM087 1280X1024/75Hz 80KHz 220VAC BNC I/F MKR 660 KHz
REF 107.0 dBμV ATTN 10 dB 41.10 dBμV

hp

10 dB/

DL
48.0
dBμV

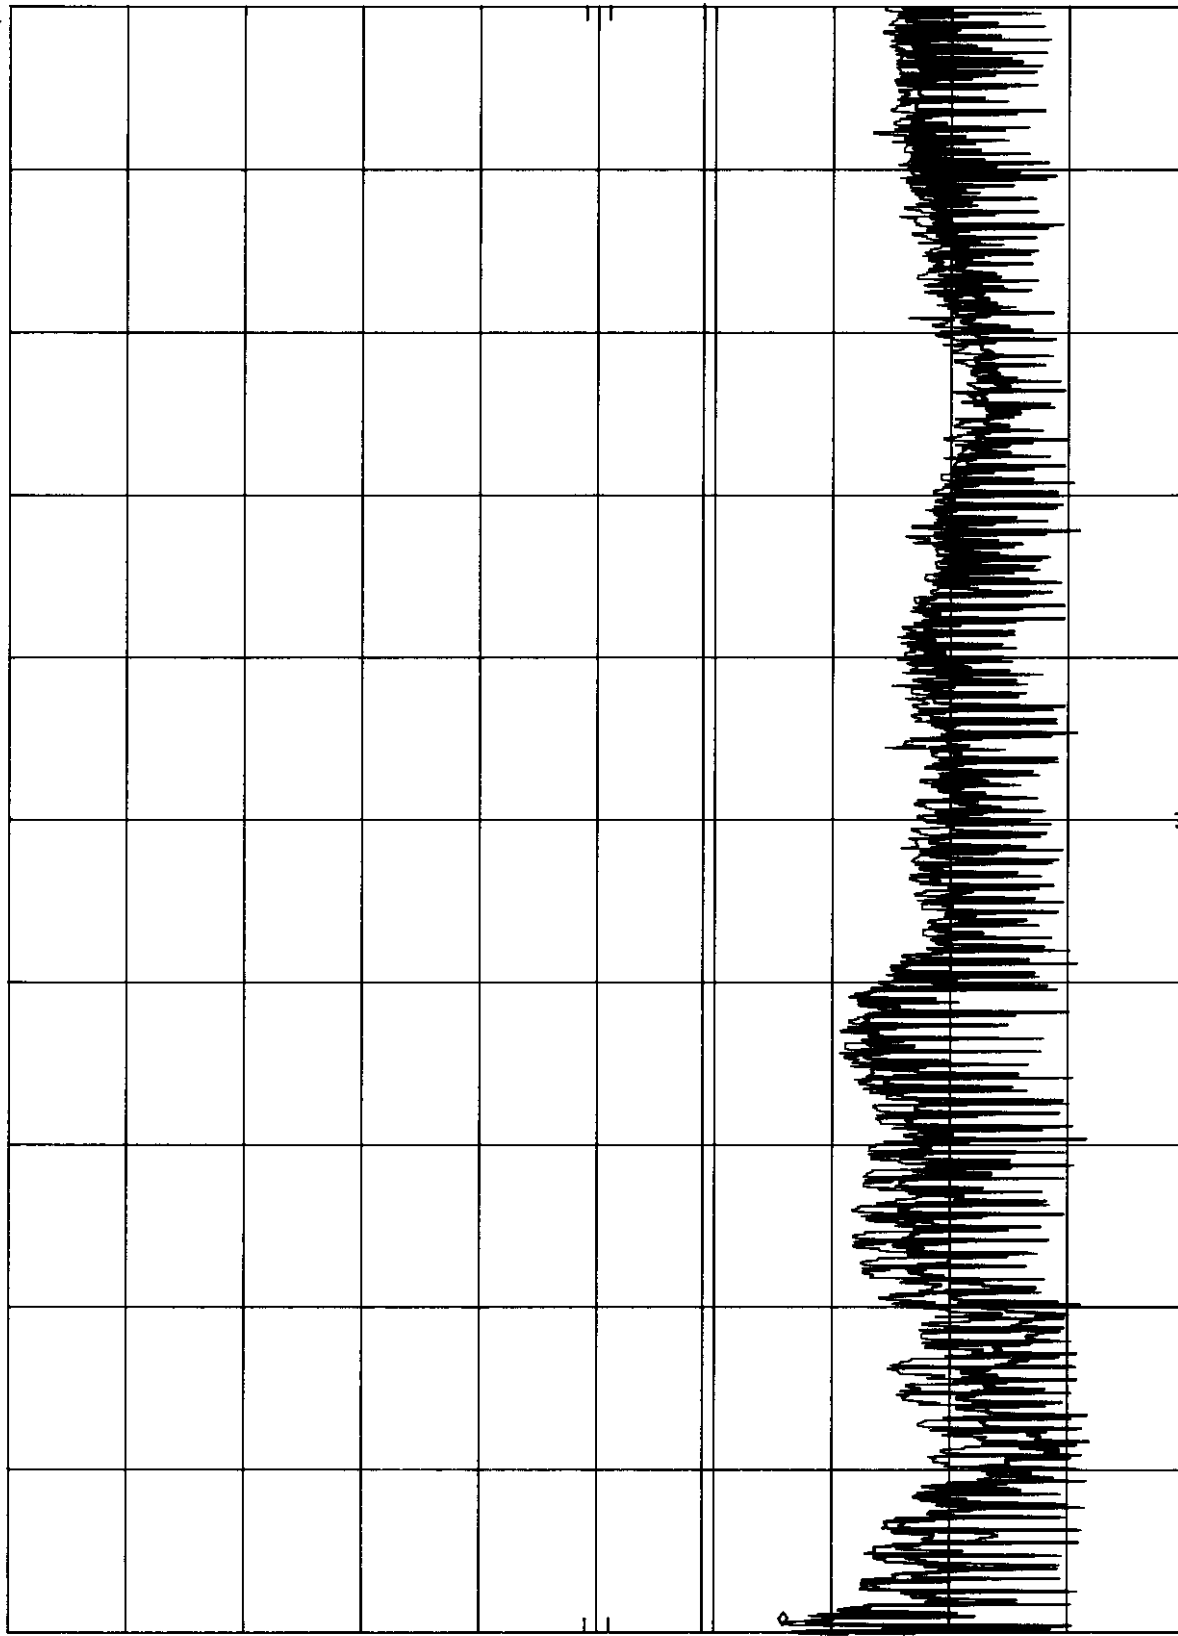

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

Exhibit 9

**PHOTOGRAPHS OF EUT
AND
TEST CONFIGURATION**