

EMI TEST REPORT

Test report No.	: EMC- FCC- 0255
Type of equipment	: Digital Camcorder
Model No.	: SC-D455
FCC ID.	: A3L05TIGER
Applicant	: SAMSUNG ELECTRONICS CO., LTD.
Test standards	: FCC part 15 subpart B, Class B

Test Procedure and Items :

- AC Power Line Conducted Emissions Measurement: ANSI C63.4-1992
- Radiated Emissions Measurement : ANSI C63.4-1992

Test result : Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of test: 2005. 02. 07 Issued date: 2005 .02. 14

Tested by : Approved by: M. S. Chong

YOO, SANG HUN

Chung, Min-Seok

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

[Contents]

1. Client information	3
2. Laboratory information	4
3. Test system configuration.....	5
3.1 Operation Environment	5
3.2 Measurement Uncertainty	5
3.3 Sample calculation	6
4. Description of EUT	7
4.1 Product Description	7
4.2 Peripherals	7
4.3 Used cables	8
4.4 Operating conditions	8
4.5 EUT test configuration	9
5. Summary of test results.....	9
5.1 Modification to the E.U.T.....	9
5.2 Standards & results	9
6. Test results	10
6.1 Conducted emission.....	10
6.1.1 Measurement procedure.....	10
6.1.2 Used equipments	10
6.1.3 Measurement uncertainty	10
6.1.4 Test data	11
6.1.5. Result	11
6.2 Radiated emission	12
6.2.1 Measurement procedure	12
6.2.2 Used equipments	12
6.2.3 Measurement uncertainty	12
6.2.4 Test data	13
6.2.5. Result	13
7. Test Graph	14

1. Client information

Applicant: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Yeongtong-Gu, Suwon City,
Kyungki-Do, Korea
Telephone number: 82-31-200-5922
Facsimile number: 82-31-200-5938

Manufacture: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Yeongtong-Gu, Suwon City,
Kyungki-Do, Korea
Telephone number: 82-31-200-5922
Facsimile number: 82-31-200-5938

2. Laboratory information

Address

EMC compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

Telephone Number : 82 31 336 9919


Facsimile Number : 82 31 336 4767

FCC Filing No. : 793334

VCCI Registration No. : C-1713, R-1606

KOLAS NO.: 231

SITE MAP

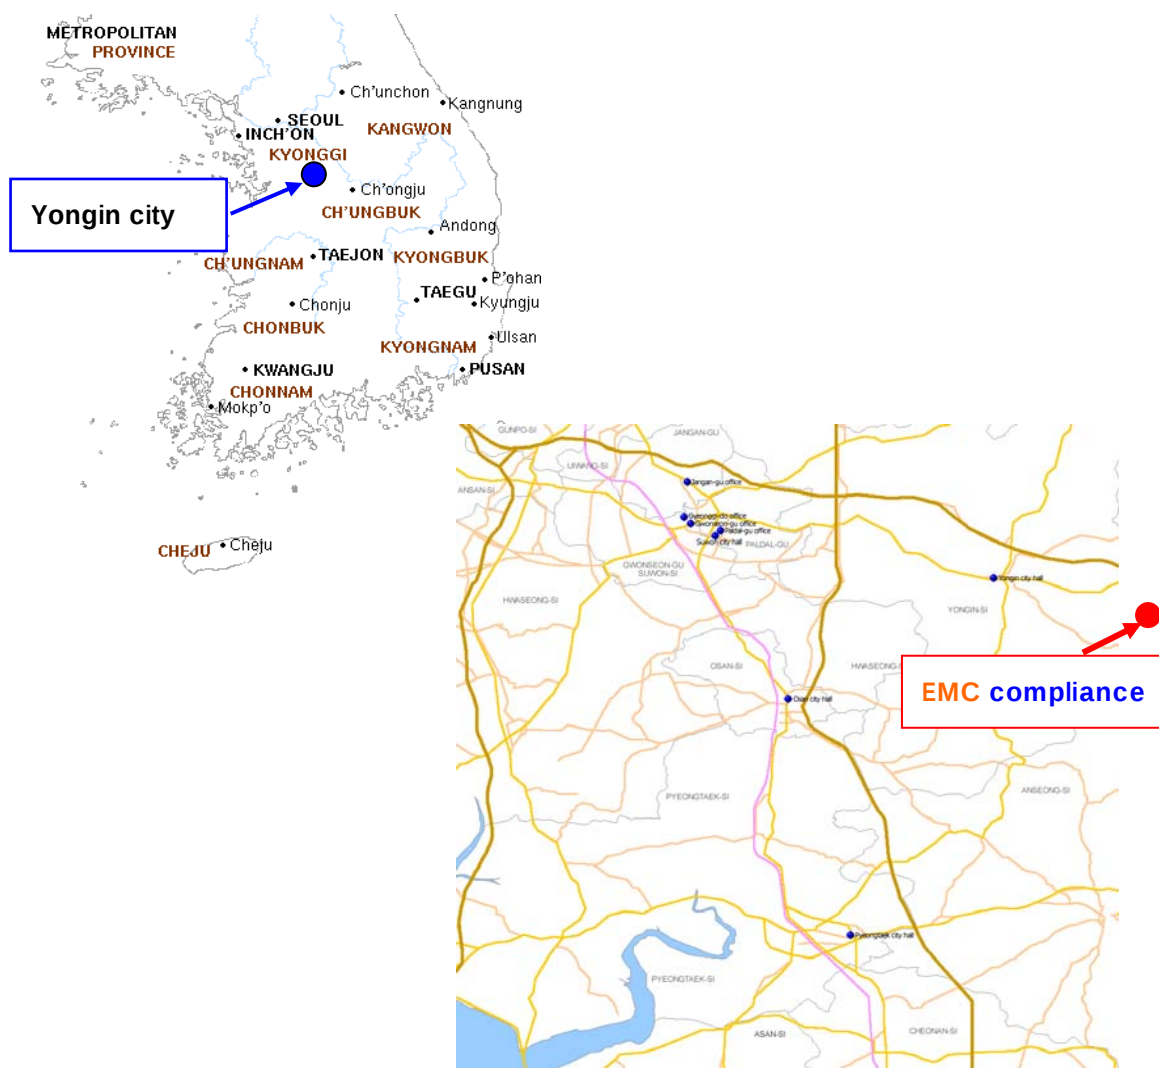

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

3. Test system configuration

3.1 Operation Environment

		Temperature	Humidity	Pressure
OATS	:	-2 °C	38 %	1008 hPa
Shielded room	:	26 °C	40 %	1010 hPa

Test site

These testing were performed following locations;

Shielded room: Conducted emission

OATS (10m) : Radiated emission

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are test receiver, Cable Loss, antenna factor calibration, Antenna directivity, antenna factor Variation with height, antenna phase center variation, antenna Frequency interpolation, measurement distance variation, Site imperfection, mismatching, and system repeatability.

Based on NIS 80, 81, the measurement uncertainty level with a 95% confidence level was applied.

3.3 Sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss to the measured reading.

The sample calculation is as follows :

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

Radiated emission

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follows :

$$FS = MR + AF + CL + AT - AG$$

MR = Meter Reading

AF = Antenna Factor

CL = Cable Loss

AP = Antenna Pad

AG=Amplifier Gain

If MR is 30dB, AF 12dB, CL 5dB, AP 10dB, AG 35dB

The result (MR) is

$$30 + 12 + 5 + 10 - 35 = 22\text{dBuV/m}$$

4. Description of EUT

4.1 Product Description

Manufactured by:	SAMSUNG ELECTRONICS CO., LTD.
Address:	416, Maetan-3Dong, Yeontong-Gu, Suwon City, Kyungki-Do, Korea
Type of equipment:	Digital Camcorder
Model:	SC-D455
Serial number:	None
Video recording system:	2 rotary heads, helical scanning system
Audio recording system:	Rotary heads, PCM system
Image device:	CCD(Charge Coupled Device)
Power supply:	DC 8.4V, Lithium Ion Battery pack 7.4V (Power Supply(100V-240V) or Lithium Ion battery pack)

4.2 Peripherals

Description	Model / Part #	Serial Number	Manufacture
PC	Presario S6500KR	KRJ41103C7	COMPAQ
LCD MONITOR	cx714MP	N495H4KXB00713H	SAMSUNG
PRINTER	EPSON STYLUS C60	DR5K015097	EPSON
KEYBOARD	SKR-2239	OCA038728	SEJIN
SERIAL MOUSE	SWW-23	N/A	A4Tech
PS/2 MOUSE	M-S69	F466B0MN3NG1CH0	COMPAQ
MIC	N/A	N/A	N/A
HEADSET	RP-HM211	N/A	PANASONIC

4.3 Used cables


EUT Port	Type	Shield (Y / N)	Length (m)	Connection point 1	Connection point 2
USB	USB	Y	1.1	EUT	PC
IEEE1394	1394	Y	2.0		PC
S-Video	DIN	Y	1.5		LCD MONITOR
Audio	Audio	Y	1.5		10K Ω Termination
Video	Video	Y	1.5		75K Ω Termination

4.4 Operating conditions

Operating :

- file up/ down load mode.

4.5 EUT test configuration

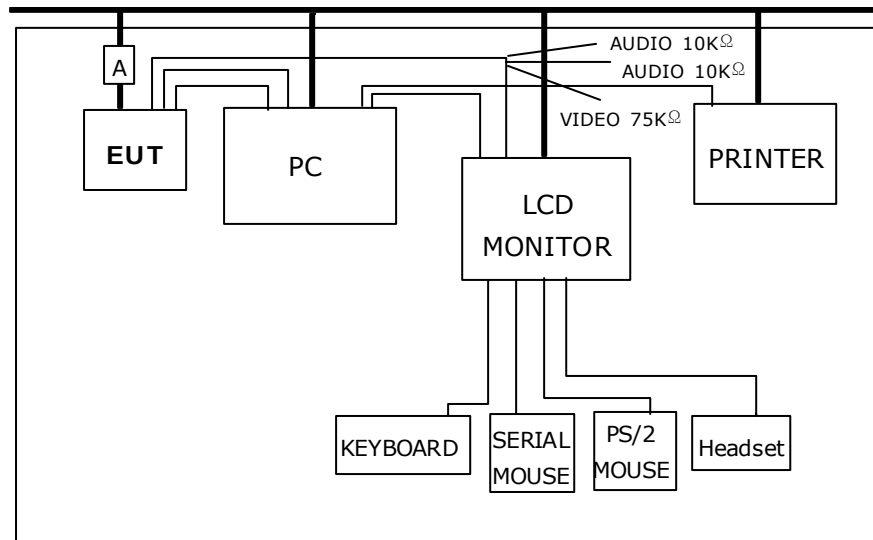

5. Summary of test results

5.1 Modification to the E.U.T.

None

5.2 Standards & results

FCC Part 15 Subpart B (Class B)
ANSI C63.4 – 1992

Test items	Test methods	Result
Conducted emission	ANSI C63.4-1992	Pass
Radiated emission	ANSI C63.4-1992	Pass

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6. Test results

6.1 Conducted emission

6.1.1 Measurement procedure

Mains

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

The rear of tabletop was located 0.4m to the vertical conducted plane.

All other surfaces of tabletop were at least 0.8m away from any other grounded conducting surface.

They were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral were measured.

6.1.2 Used equipments

Equipment	Model	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESHS10	843276/003	R&S	04.05.13	☒
L.I.S.N.	ESH3-Z5	100267	R&S	04.06.17	☒
	L3-32A	0120J20305	PMM	05.04.03	☒
Test site	Shield room	-	-	-	☒

6.1.3 Measurement uncertainty

Conducted emission measurement : ± 2.4 (K=2, 95%)

6.1.4 Test data

Frequency	Correction		Line	Quasi-peak			Average		
	Factor			Limit	Reading	Result	Limit	Reading	Result
	[MHz]	LISN		Cable	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.201	0.03	0.2	N	63.57	53.00	53.23	53.57	26.87	27.10
0.204	0.03	0.2	H	63.45	51.83	52.06	53.45	24.69	24.92
0.264	0.03	0.2	H	61.30	45.29	45.52	51.30	19.66	19.89
0.267	0.03	0.2	N	61.21	45.61	45.84	51.21	20.94	21.17
0.327	0.08	0.2	H	59.53	38.23	38.51	49.53	12.61	12.89
0.330	0.09	0.2	N	59.45	39.12	39.41	49.45	15.41	15.70
0.606	0.10	0.2	N	56.00	32.95	33.25	46.00	13.16	13.46
0.612	0.09	0.2	H		30.89	31.18		11.10	11.39
0.726	0.11	0.3	N		33.10	33.51		12.60	13.01
1.230	0.13	0.5	N		30.97	31.60		10.35	10.98
1.710	0.14	0.4	N		31.58	32.12		11.10	11.64
3.630	0.16	0.5	N		31.94	32.60		10.78	11.44
5.060	0.18	0.4	N	60.00	30.34	30.92	50.00	10.91	11.49
5.590	0.19	0.5	H		27.29	27.98		8.19	8.88
5.990	0.20	0.5	N		27.44	28.14		9.45	10.15
6.430	0.19	0.5	H		27.49	28.18		8.73	9.42
6.500	0.22	0.5	N		28.63	29.35		9.53	10.25
7.140	0.22	0.5	N		27.92	28.64		10.43	11.15

- Note. QP = Quasi-Peak, AV= Average
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

6.1.5. Result

Complied

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.2 Radiated emission

6.2.1 Measurement procedure

A pretest was performed at 3m distance in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

They were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESVS 10	82786/006	R&S	04.05.13	☒
TRILOG Broadband Antenna	VULB 9160	3138	SCHWARZBECK	05.04.10	☒
Antenna Mast	A109	N/A	DEAIL	-	☒
Turn Table	TS14	N/A	DEAIL	-	☒
10m OATS	-	-	EMC Compliance	-	☒

6.2.3 Measurement uncertainty

Radiated Emission measurement : (K=2, 95%)

30-300 MHz : 3 m: ± 3.67 , 10 m: ± 4.4

300-1000 MHz ; 3 m: $+4.6/-2.92$, 10 m: $+2.94/-2.88$

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.2.4 Test data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	angle	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
					Antenna	Cable			
54.30	8.2	V	1.0	163	11.70	1.00	30.0	20.90	9.10
127.24	11.3	H	4.0	234	11.72	1.93		25.00	5.01
161.03	10.6	H	4.0	163	13.10	2.21		25.90	4.10
233.19	14.9	H	3.9	311	11.15	2.73	37.0	28.78	8.22
441.09	10.3	H	2.1	245	16.43	4.01		30.73	6.27
738.01	4.8	H	1.3	114	21.49	6.19		32.48	4.52

* Receiving Antenna Mode : *Horizontal, Vertical*

* 10 m OATS

* Note : Reading = Test Receiver meter,

P= Polarization → POL H = Horizontal, POL V = Vertical

Result = Field Strength (Antenna factor + Cable factor + Reading)

6.2.5. Result

Complied

7. Test Graph

Conducted Emission test graph


EUT: DIGITAL CAMCODER
Manuf: SEC
Op Cond: H
Operator:
Test Spec: FCC Class B Conducted Emission
Comment:

Result File: sec_h.dat : SC-D455

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

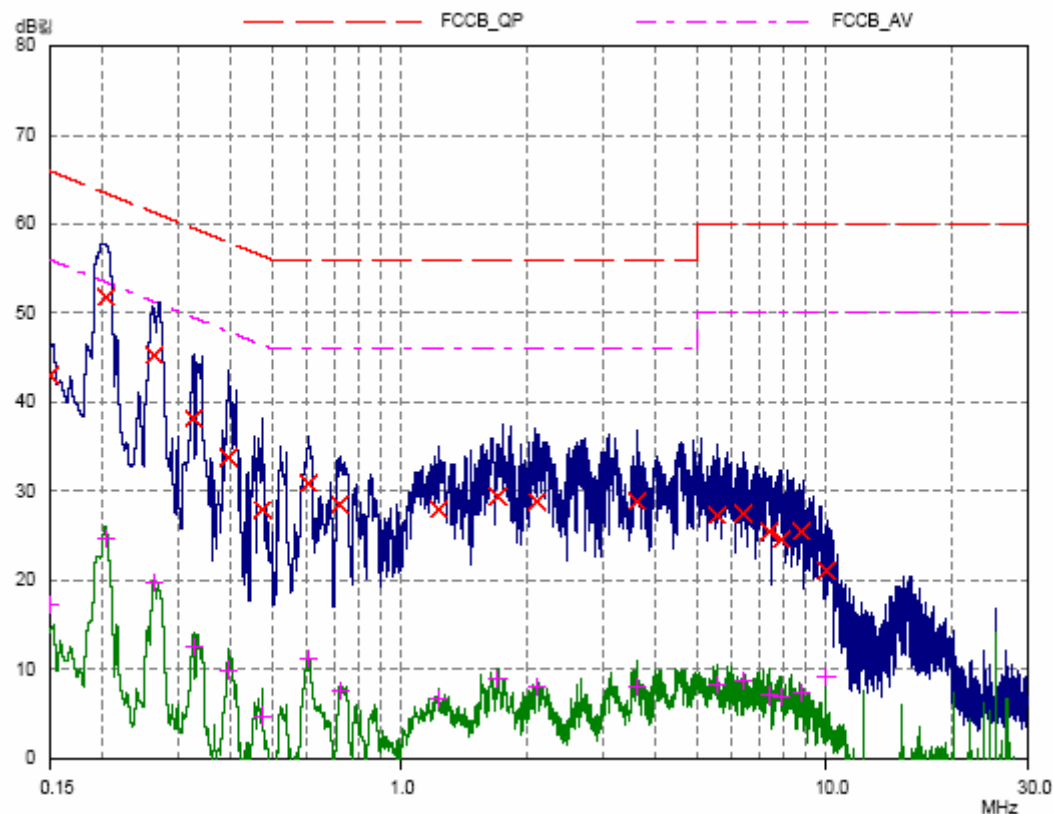

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

EUT: DIGITAL CAMCODER
Manuf: SEC
Op Cond: N
Operator:
Test Spec: FCC Class B Conducted Emission
Comment:

Result File: sec_n.dat : SC-D455

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

