






TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SPF0064 Page (1) of (152)	 KCTL
<p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677 Rep. of Korea ◦ Date of Receipt : 2022-09-28 <p>2. Use of Report : Class II Permissive Change</p> <p>3. Name of Product and Model : WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card</p> <ul style="list-style-type: none"> ◦ Model Number : AX211D2W ◦ Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / Vietnam <p>4. Host Product Name : Notebook PC</p> <ul style="list-style-type: none"> ◦ Host Model Name : NP730QFG ◦ Manufacturer : Samsung Electronics Co., Ltd.. <p>5. FCC ID : A3LAX211D</p> <p>6. Date of Test : 2022-12-07 ~2022-12-12</p> <p>7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p>8. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication</p> <p>9. Test Results : Refer to the test result in the test report</p>		
Affirmation	Tested by Name : Mungi Jeong (Signature) 	Technical Manager Name : Jongwon Ma (Signature) 
2022-12-16		
<p>Eurofins KCTL Co.,Ltd.</p> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.</p>		

REPORT REVISION HISTORY

Date	Revision	Page No
2022-12-16	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests
 (may be required by the product standard or client)



Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:
Procedure number, issue date and title:
 Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

1. Identification when information is provided by the customer: Information marked " # " is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1.	General information.....	4
2.	Device information.....	5
3.	Specific Absorption Rate	18
4.	RF Exposure Limits.....	20
5.	RF Average Conducted Output Power.....	21
6.	System Verification	22
7.	SAR Test Results	25
8.	Power Density Test Results	29
9.	Simultaneous Transmission	32
10.	SAR Measurement Variability.....	33
11.	Measurement Uncertainty.....	34
12.	Test Equipment Information	36
13.	SAR Test System Verification and Test Results	37
14.	PD Test System Verification and Test Results	37
	Appendixes List.....	67
	Appendix A. Calibration certificate	68
	Appendix B. #Antenna Location & Distance	143
	Appendix C. EUT Photo	144
	Appendix D. Test Setup Photo.....	148
	End of test report	152

<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR22-SPF0064 Page (4) of (152)</p>	 
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Laboratory : Eurofins KCTL Co.,Ltd.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-3327, G-198, C-3706, T-1849
CAB Identifier: KR0040, ISED Number: 8035A
KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of Eurofins KCTL Co.,Ltd. Wireless lab or testing done by Eurofins KCTL Co.,Ltd. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by Eurofins KCTL Co.,Ltd. Wireless lab.

2. Device information

2.1 Basic description

Product Name		WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Product Model Number		AX211D2W
Product Manufacturer		Samsung Electronics Co., Ltd.
Host Product Name		Notebook PC
Host Model Name		NP730QFG
Derivative model		NP734QFG
Product Serial Number	Radiation	61K19FMTA00004R, 61K19FMTA00051A
	WLAN Conduction	61K19FMTA00051A
Mode of Operation		WLAN 802.11ax
Device Overview		U-NII-5: 5 955.0 MHz ~ 6 415.0 MHz U-NII-6: 6 435.0 MHz ~ 6 515.0 MHz U-NII-7: 6 535.0 MHz ~ 6 855.0 MHz U-NII-8: 6 875.0 MHz ~ 7 115.0 MHz

2.1.1 Differences from Derivative Models

Main model	NP730QFG
Derivative model	NP734QFG
Differences	Model numbers are allocated for marketing and logistic purposes only.

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported	
		1g SAR (W/kg)	PD 4cm ² (W/m ²)
U-NII-5	6XD	1.06	4.91
U-NII-6	6XD	1.15	5.85
U-NII-7	6XD	1.16	5.25
U-NII-8	6XD	1.03	5.50

2.3 #Antenna information

Antenna Type		PIFA antenna			
Band		U-NII-5	U-NII-6	U-NII-7	U-NII-8
Peak gain (dBi)	Main	0.62	1.68	3.03	2.63
	Aux	3.95	3.95	3.82	3.75

2.4 Measurement date and environment

Shield room	Date	Environment	
		Temperature (°C)	Humidity (%)
8F - 3	2022-12-09	20.9 ~ 21.5	47.9
	2022-12-12	20.9 ~ 21.7	46.2
8F - 4	2022-12-07	20.8 ~ 21.3	47.8
	2022-12-08	20.5 ~ 21.1	49.5
	2022-12-09	20.6 ~ 20.9	49.2
	2022-12-10	20.3 ~ 20.8	49.9

2.5 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04.

2.5.1 #Maximum WLAN Output Power(Notebook Mode)

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-5	Main	SU 20 MHz	All Channel	4.50	5.50
		SU 40 MHz	All Channel	7.75	8.75
		SU 80 MHz	All Channel	10.25	11.25
		SU 160 MHz	All Channel	12.50	13.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	7.75	8.75
		RU 996T_80/160 MHz	All Channel	10.25	11.25
		RU 2x996T_160 MHz	All Channel	12.50	13.50
	Aux	SU 20 MHz	All Channel	4.50	5.50
		SU 40 MHz	All Channel	6.50	7.50
		SU 80 MHz	All Channel	6.50	7.50
		SU 160 MHz	All Channel	6.50	7.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	6.50	7.50
		RU 996T_80/160 MHz	All Channel	6.50	7.50
		RU 2x996T_160 MHz	All Channel	6.50	7.50

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-6	Main	SU 20 MHz	All Channel	3.50	4.50
		SU 40 MHz	All Channel	7.50	8.50
		SU 80 MHz	All Channel	10.25	11.25
		SU 160 MHz	All Channel	12.50	13.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40 MHz	All Channel	7.50	8.50
		RU 484T_80/160 MHz	All Channel	7.75	8.75
		RU 996T_80/160 MHz	All Channel	10.25	11.25
	RU 2x996T_160 MHz	All Channel	12.50	13.50	
	Aux	SU 20 MHz	All Channel	3.50	4.50
		SU 40 MHz	All Channel	7.50	8.50
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	7.50	8.50
		RU 996T_80/160 MHz	All Channel	7.50	8.50
RU 2x996T_160 MHz		All Channel	7.50	8.50	

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-7	Main	SU 20 MHz	All Channel	3.75	4.75
		SU 40 MHz	Except 115	7.00	8.00
			115	7.50	8.50
		SU 80 MHz	All Channel	9.50	10.50
		SU 160 MHz	All Channel	12.25	13.25
			Except 115	-4.75	-3.75
		RU 26T_20/40/80/160 MHz	115	-4.00	-3.00
			Except 115	-1.75	-0.75
		RU 52T_20/40/80/160 MHz	115	0.00	1.00
			Except 115	1.25	2.25
		RU 106T_20/40/80/160 MHz	115	2.00	3.00
			Except 115	3.75	4.75
	RU 242T_20/40/80/160 MHz	115	4.50	5.50	
		Except 115	7.00	8.00	
	RU 484T_40/80/160 MHz	115	7.50	8.50	
		RU 996T_80/160 MHz	All Channel	9.50	10.50
	RU 2x996T_160 MHz	All Channel	12.25	13.25	
	Aux	SU 20 MHz	All Channel	3.75	4.75
		SU 40 MHz	Except 115	7.00	8.00
			115	7.50	8.50
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
			Except 115	-4.75	-3.75
		RU 26T_20/40/80/160 MHz	115	-4.00	-3.00
Except 115			-1.75	-0.75	
RU 52T_20/40/80/160 MHz		115	0.00	1.00	
		Except 115	1.25	2.25	
RU 106T_20/40/80/160 MHz		115	2.00	3.00	
		Except 115	3.75	4.75	
RU 242T_20/40/80/160 MHz	115	4.50	5.50		
	Except 115	7.00	8.00		
RU 484T_40/80/160 MHz	115	7.50	8.50		
	RU 996T_80/160 MHz	All Channel	7.50	8.50	
RU 2x996T_160 MHz	All Channel	7.50	8.50		

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-8	Main	SU 20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		SU 40 MHz	All Channel	7.00	8.00
		SU 80 MHz	All Channel	9.50	10.50
		SU 160 MHz	All Channel	12.25	13.25
		RU 26T_20/40/80/160 MHz	All Channel	-4.75	-3.75
		RU 52T_20/40/80/160 MHz	All Channel	-1.75	-0.75
		RU 106T_20/40/80/160 MHz	All Channel	1.25	2.25
		RU 242T_20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		RU 242T_40/80/160 MHz	All Channel	3.75	4.75
		RU 484T_40/80/160 MHz	All Channel	7.00	8.00
	RU 996T_80/160 MHz	All Channel	9.50	10.50	
	RU 2x996T_160 MHz	All Channel	12.25	13.25	
	Aux	SU 20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		SU 40 MHz	All Channel	7.00	8.00
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.75	-3.75
		RU 52T_20/40/80/160 MHz	All Channel	-1.75	-0.75
		RU 106T_20/40/80/160 MHz	All Channel	1.25	2.25
		RU 242T_20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
RU 242T_40/80/160 MHz		All Channel	3.75	4.75	
RU 484T_40/80/160 MHz		All Channel	7.00	8.00	
RU 996T_80/160 MHz	All Channel	7.50	8.50		
RU 2x996T_160 MHz	All Channel	7.50	8.50		

2.5.2 #Maximum WLAN Output Power (Tablet Mode)

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-5	Main, Aux	SU 20 MHz	All Channel	4.50	5.50
		SU 40 MHz	All Channel	7.75	8.75
		SU 80 MHz	All Channel	10.25	11.25
		SU 160 MHz	All Channel	12.50	13.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	7.75	8.75
		RU 996T_80/160 MHz	All Channel	10.25	11.25
		RU 2x996T_160 MHz	All Channel	12.50	13.50
U-NII-6	Main, Aux	SU 20 MHz	All Channel	3.50	4.50
		SU 40 MHz	All Channel	7.50	8.50
		SU 80 MHz	All Channel	10.25	11.25
		SU 160 MHz	All Channel	12.50	13.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40 MHz	All Channel	7.50	8.50
		RU 484T_80/160 MHz	All Channel	7.75	8.75
		RU 996T_80/160 MHz	All Channel	10.25	11.25
RU 2x996T_160 MHz	All Channel	12.50	13.50		

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-7	Main, Aux	SU 20 MHz	All Channel	3.75	4.75
		SU 40 MHz	Except 115	7.00	8.00
			115	7.50	8.50
		SU 80 MHz	All Channel	9.50	10.50
		SU 160 MHz	All Channel	12.25	13.25
			Except 115	-4.75	-3.75
		RU 26T_20/40/80/160 MHz	115	-4.00	-3.00
			Except 115	-1.75	-0.75
		RU 52T_20/40/80/160 MHz	115	0.00	1.00
			Except 115	1.25	2.25
		RU 106T_20/40/80/160 MHz	115	2.00	3.00
			Except 115	3.75	4.75
RU 242T_20/40/80/160 MHz	115	4.50	5.50		
	Except 115	7.00	8.00		
RU 484T_40/80/160 MHz	115	7.50	8.50		
RU 996T_80/160 MHz	All Channel	9.50	10.50		
RU 2x996T_160 MHz	All Channel	12.25	13.25		
U-NII-8	Main, Aux	SU 20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		SU 40 MHz	All Channel	7.00	8.00
		SU 80 MHz	All Channel	9.50	10.50
		SU 160 MHz	All Channel	12.25	13.25
		RU 26T_20/40/80/160 MHz	All Channel	-4.75	-3.75
		RU 52T_20/40/80/160 MHz	All Channel	-1.75	-0.75
		RU 106T_20/40/80/160 MHz	All Channel	1.25	2.25
		RU 242T_20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		RU 242T_40/80/160 MHz	All Channel	3.75	4.75
		RU 484T_40/80/160 MHz	All Channel	7.00	8.00
RU 996T_80/160 MHz	All Channel	9.50	10.50		
RU 2x996T_160 MHz	All Channel	12.25	13.25		

2.5.3 #Reduced WLAN Output Power (Notebook Mode-Grip Sensor)

The Power-Backoff of this model supports only the main antenna in Notebook mode.

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-5	Main	SU 20 MHz	All Channel	4.50	5.50
		SU 40 MHz	All Channel	7.50	8.50
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	7.50	8.50
		RU 996T_80/160 MHz	All Channel	7.50	8.50
		RU 2x996T_160 MHz	All Channel	7.50	8.50
U-NII-6	Main	SU 20 MHz	All Channel	3.50	4.50
		SU 40 MHz	All Channel	7.50	8.50
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.00	-3.00
		RU 52T_20/40/80/160 MHz	All Channel	0.00	1.00
		RU 106T_20/40/80/160 MHz	All Channel	2.00	3.00
		RU 242T_20/40/80/160 MHz	All Channel	4.50	5.50
		RU 484T_40/80/160 MHz	All Channel	7.50	8.50
		RU 996T_80/160 MHz	All Channel	7.50	8.50
		RU 2x996T_160 MHz	All Channel	7.50	8.50

Band	Ant.	Mode	Channel	Output Power (dB m)	
				Target	Max. Allowed
U-NII-7	Main	SU 20 MHz	All Channel	3.75	4.75
		SU 40 MHz	Except 115	7.00	8.00
			115	7.50	8.50
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
			Except 115	-4.75	-3.75
		RU 26T_20/40/80/160 MHz	115	-4.00	-3.00
			Except 115	-1.75	-0.75
		RU 52T_20/40/80/160 MHz	115	0.00	1.00
			Except 115	1.25	2.25
		RU 106T_20/40/80/160 MHz	115	2.00	3.00
			Except 115	3.75	4.75
RU 242T_20/40/80/160 MHz	115	4.50	5.50		
	Except 115	7.00	8.00		
RU 484T_40/80/160 MHz	115	7.50	8.50		
RU 996T_80/160 MHz	All Channel	7.50	8.50		
RU 2x996T_160 MHz	All Channel	7.50	8.50		
U-NII-8	Main	SU 20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		SU 40 MHz	All Channel	7.00	8.00
		SU 80 MHz	All Channel	7.50	8.50
		SU 160 MHz	All Channel	7.50	8.50
		RU 26T_20/40/80/160 MHz	All Channel	-4.75	-3.75
		RU 52T_20/40/80/160 MHz	All Channel	-1.75	-0.75
		RU 106T_20/40/80/160 MHz	All Channel	1.25	2.25
		RU 242T_20 MHz	Except 233	2.75	3.75
			233	-1.50	-0.50
		RU 242T_40/80/160 MHz	All Channel	3.75	4.75
		RU 484T_40/80/160 MHz	All Channel	7.00	8.00
RU 996T_80/160 MHz	All Channel	7.50	8.50		
RU 2x996T_160 MHz	All Channel	7.50	8.50		

2.6 SAR Test Configurations

2.6.1 #DUT Antenna Locations

The device is a 2-in-1 model that operations as a laptop when folded 90 degrees and as a tablet when folded 360 degrees.

When in tablet mode the overall dimensions of this device are > 20 cm.

A diagram showing the location of the device antennas can be found in Appendix B.

2.6.2 SAR Test Exclusion Considerations(Tablet Mode)

Device's each edge positions consider SAR test exclusion according to Appendix B.3 of KDB 447498 D04 Interim General RF exposure guide.

Above 6GHz, Threshold ERP was calculated and exempted.

RF Source Frequency			Minimum Distance			Threshold ERP
f_L MHz		f_H MHz	$\lambda_L / 2\pi$		$\lambda_H / 2\pi$	W
0.3	–	1.34	159 m	–	35.6 m	1,920 R ²
1.34	–	30	35.6 m	–	1.6 m	3,450 R ² /f ²
30	–	300	1.6 m	–	159 mm	3.83 R ²
300	–	1,500	159 mm	–	31.8 mm	0.0128 R ² f
1,500	–	100,000	31.8 mm	–	0.5 mm	19.2R ²

Subscripts L and H are low and high; λ is wavelength.
 From § 1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.

Ant.	Band	Freq. [MHz]	Output Power			Separation distances [mm]					SAR Exemption (ERP_{th})				
			dBm	mW	ERP [mW]	Rear	Left	Right	Top	Bot.	Rear	Left	Right	Top	Bottom
Main	U-NII-5	6 415.0	13.50	22	16	5	5	310	70	87	Measure	Measure	1845 EXEMPT	94 EXEMPT	145 EXEMPT
	U-NII 6	6 515.0	13.50	22	20	5	5	310	70	87	Measure	Measure	1845 EXEMPT	94 EXEMPT	145 EXEMPT
	U-NII 7	6 855.0	13.25	21	26	5	5	310	70	87	Measure	Measure	1845 EXEMPT	94 EXEMPT	145 EXEMPT
	U-NII 8	7 115.0	13.25	21	24	5	5	310	70	87	Measure	Measure	1845 EXEMPT	94 EXEMPT	145 EXEMPT
Aux	U-NII-5	6 415.0	13.50	22	34	5	310	5	70	87	Measure	1845 EXEMPT	Measure	94 EXEMPT	145 EXEMPT
	U-NII 6	6 515.0	13.50	22	34	5	310	5	70	87	Measure	1845 EXEMPT	Measure	94 EXEMPT	145 EXEMPT
	U-NII 7	6 855.0	13.25	21	31	5	310	5	70	87	Measure	1845 EXEMPT	Measure	94 EXEMPT	145 EXEMPT
	U-NII 8	7 115.0	13.25	21	31	5	310	5	70	87	Measure	1845 EXEMPT	Measure	94 EXEMPT	145 EXEMPT

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.



Note 2: Output power is the worst of the maximum rated power (including tune-up or manufacturing tolerances) and ERP(E.I.R.P – 2.15 dB).

Note 3: The exemption requirement $R > \lambda/2\pi$ was applied in accordance with Annex B.3 of the KDB 447498 D04 Temporary General RF Exposure Guide.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Device Type	Ant. / Band		Device Edge for SAR Testing (Rear View)					
			Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth		No	Yes	No	No	No	No
Tablet	Main	U-NII-5	No	Yes	Yes	No	No	No
		U-NII 6	No	Yes	Yes	No	No	No
		U-NII 7	No	Yes	Yes	No	No	No
		U-NII 8	No	Yes	Yes	No	No	No
	Aux	U-NII-5	No	Yes	No	Yes	No	No
		U-NII 6	No	Yes	No	Yes	No	No
		U-NII 7	No	Yes	No	Yes	No	No
		U-NII 8	No	Yes	No	Yes	No	No



<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR22-SPF0064 Page (17) of (152)</p>	 
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------

2.7 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- IEC 62479:2010
- IEC TR 63170:2018
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 Interim General RF Exposure Guidance v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- TCB Workshop–October 2021 : RF Exposure Policies and Procedures
- SPEAG DASY6 System Handbook (June 2020)
- SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz)

2.7.1 6-7 GHz Tested Conditions

The Device was operated utilizing proprietary software and each channel was measured using a broadband power meter to determine the maximum average power.

As per the Interim Procedures for 6-7GHz RF Exposure, explained in RF Exposure Policies and Procedures: TCB Workshop – October 2020, the testing has been performed on SAR following IEC/IEEE 62209-1528:2020 and then on Power Density for the highest SAR test configurations.

The testing has been in both chains and four considered bands U-NII-5, U-NII-6, U-NII-7 and U-NII-8 in SAR mode.

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

3.3 Peak Spatially Averaged Power Density Assessment Based on E-field Measurements

Within a short distance from the transmitting source, power density was determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field were needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. The general measurement approach used for this device was:

- a) The local E field on the measurement surface was measured at a reference location where the field is well above the noise level. This reference level was used at the end of this procedure to assess output power drift of the DUT during the measurement.
- b) The electric field on the measurement surface was scanned. Measurements are conducted according to the instructions provided by the measurement system manufacturer. Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. The planar scan step size was configured at $\lambda/4$.
- c) For cDASY6, H-field was calculated from the measured E-field using a reconstruction algorithm. As the power density calculation requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured E-field data (e.g. the phase from the amplitude if only the amplitude is measured). H-field and phase data was reconstructed from repeated measurements (three per measurement point) on two measurement planes separated by $\lambda/4$.
- d) The total Peak spatially averaged power density (psPD) distribution on the evaluation surface is determined per the below equation. The spatial averaging area, A, is specified by the applicable exposure limits or regulatory requirements.

$$psPD = \frac{1}{2A_{av}} \iint_{A_{av}} || Re\{E \times H^*\} || dA$$

- e) The maximum spatial-average on the evaluation surface is the final quantity to determine compliance against applicable limits.
- f) The local E field reference value, at the same location as step 2, was re-measured after the scan was complete to calculate the power drift. If the drift deviated by more than 5%, the power density test and drift measurements were repeated.

4. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

4.1 RF Exposure Limits for Frequencies Above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Power Density	1.0 mW/cm ²	5.0 mW/cm ²

Note: 1.0 mW/cm² is 10 W/m²

5. RF Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



5.1 WLAN Average Conducted Output Power(Notebook Mode)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)		
				Normal		Grip Sensor
				Main Ant.	Aux Ant.	Main Ant.
U-NII-5	SU 160 MHz	6 025.0	15	12.59	6.53	7.90
		6 185.0	47	12.50	6.51	7.81
		6 345.0	79	12.39	6.42	7.62
U-NII-6	SU 160 MHz	6 505.0	111	12.47	7.95	8.01
U-NII-7	SU 160 MHz	6 665.0	143	12.28	7.94	8.03
		6 825.0	175	12.32	7.56	7.84
U-NII-8	SU 160 MHz	6 985.0	207	12.38	7.83	7.71

5.2 WLAN Average Conducted Output Power(Tablet Mode)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)	
				Main Ant.	Aux Ant.
U-NII-5	SU 160 MHz	6 025.0	15	12.59	12.56
		6 185.0	47	12.50	12.41
		6 345.0	79	12.39	12.50
U-NII-6	SU 160 MHz	6 505.0	111	12.47	12.52
U-NII-7	SU 160 MHz	6 665.0	143	12.28	12.38
		6 825.0	175	12.32	12.21
U-NII-8	SU 160 MHz	6 985.0	207	12.38	12.43

Note:

About verification of grip sensor, refer to Appendix C. Power Reduction Verification of Report No: KR22-SPF0063 SAR report.

6. System Verification

6.1 Tissue Verification


The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
6 500.0	Recommended Limit		$34.50 \pm 5 \%$ (32.78~36.23)	$6.07 \pm 5 \%$ (5.77~6.37)	22 ± 2
	Measured	2022-12-07	33.50	6.19	20.81
	Measured	2022-12-08	33.30	6.23	20.95
6 025.0	Recommended Limit		$35.07 \pm 5 \%$ (33.32~36.82)	$5.51 \pm 5 \%$ (5.23~5.79)	22 ± 2
	Measured	2022-12-07	34.40	5.65	20.81
	Measured	2022-12-08	34.30	5.69	20.95
6 185.0	Recommended Limit		$34.88 \pm 5 \%$ (33.14~36.62)	$5.70 \pm 5 \%$ (5.42~5.99)	22 ± 2
	Measured	2022-12-07	34.09	5.84	20.81
	Measured	2022-12-08	33.90	5.88	20.95
6 345.0	Recommended Limit		$34.69 \pm 5 \%$ (32.96~36.42)	$5.89 \pm 5 \%$ (5.60~6.18)	22 ± 2
	Measured	2022-12-07	33.76	6.02	20.81
	Measured	2022-12-08	33.61	6.06	20.95
6 505.0	Recommended Limit		$34.49 \pm 5 \%$ (32.77~36.21)	$6.08 \pm 5 \%$ (5.78~6.38)	22 ± 2
	Measured	2022-12-07	33.50	6.20	20.81
	Measured	2022-12-08	33.30	6.24	20.95
6 665.0	Recommended Limit		$34.30 \pm 5 \%$ (32.59~36.02)	$6.26 \pm 5 \%$ (5.95~6.57)	22 ± 2
	Measured	2022-12-07	33.20	6.39	20.81
	Measured	2022-12-08	33.00	6.44	20.95
6 825.0	Recommended Limit		$34.11 \pm 5 \%$ (32.40~35.82)	$6.45 \pm 5 \%$ (6.13~6.77)	22 ± 2
	Measured	2022-12-07	32.90	6.57	20.81
	Measured	2022-12-08	32.70	6.63	20.95
6 985.0	Recommended Limit		$33.92 \pm 5 \%$ (32.22~35.62)	$6.63 \pm 5 \%$ (6.30~6.96)	22 ± 2
	Measured	2022-12-07	32.60	6.73	20.81
	Measured	2022-12-08	32.50	6.78	20.95

<Table 1. Measurement result of Tissue electric parameters>

6.1.1 SAR Test System Verification

The microwave circuit arrangement for system verification is sketched below picture. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2. During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

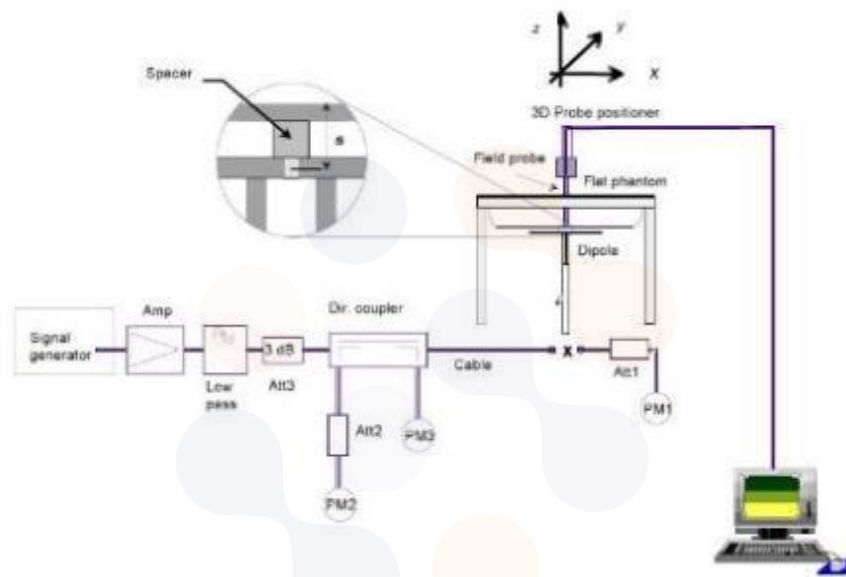


Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Input Power (mW)	Date	Limit/Measured (Normalized to 1 W)
D6.5GHzV2 SN: 1005	EX3DV4 SN: 7540	6 500.0	HSL	100	Measured	277.00 \pm 10 % (249.30~304.70)
					2022-12-07	288.00
					2022-12-08	281.00

<Table 2. System Verification Result>

6.1.2 Power Density Test System Verification

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

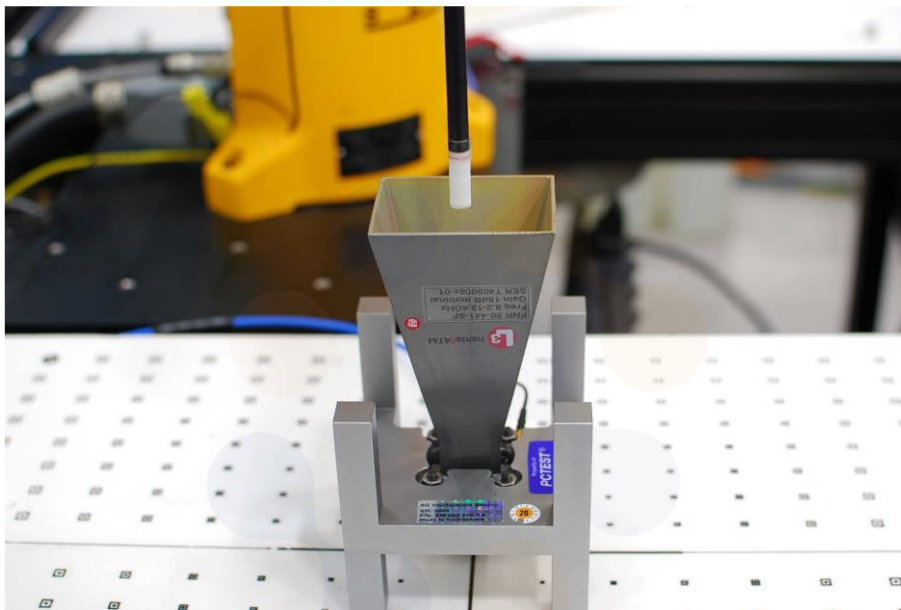

[Figure 3. System Verification Setup Photo]

Source (S/N)	Probe (S/N)	Frequency (GHz)	Date	Prad (mW)	Total 4 cm ² psPD (W/m ²)		Deviation (dB)	Limit (dB)
					Target	Measured		
1023	9489	10	2022-12-09	86.1	51.5	49.3	-0.19	± 0.66
1023	9605	10	2022-12-09	86.1	51.5	50.9	-0.19	± 0.66
1023	9489	10	2022-12-10	86.1	51.5	49.5	-0.17	± 0.66
1023	9605	10	2022-12-12	86.1	51.5	52.4	0.07	± 0.66

Notes

- 1) 10 mm distance spacing was used from the reference horn antenna aperture to the probe element.
- 2) According to IEC TR 63170, the power density measurement results should be normalized to the delivered input power to an input power level of 0 dBm and compared to the appropriate target values of the calibrated reference sources.

7. SAR Test Results

7.1 Standalone Body SAR and Absorbed Power Density Test Results (Notebook Mode)

U-NII-5												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Grip Sensor off										
		Rear	9	6 025.0	12.59	13.50	1.233	1.015	0.188	0.235	1.38	
		Rear	9	6 185.0	12.50	13.50	1.259	1.015	0.125	0.160	0.92	
		Grip Sensor on										
		Rear	0	6 025.0	7.90	8.50	1.148	1.015	0.585	0.682	2.94	1
		Rear	0	6 185.0	7.81	8.50	1.172	1.015	0.500	0.595	2.43	
	Aux	Rear	0	6 025.0	6.53	7.50	1.250	1.015	0.835	1.059	4.10	2
		Rear	0	6 185.0	6.51	7.50	1.256	1.015	0.778	0.992	3.84	
		Rear	0	6 345.0	6.42	7.50	1.282	1.015	0.803	1.045	3.90	
	Repeated SAR Test											
Aux	Rear	0	6 025.0	6.53	7.50	1.250	1.015	0.827	1.049	4.07		

U-NII-6												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Grip Sensor off										
		Rear	9	6 505.0	12.47	13.50	1.268	1.015	0.166	0.214	1.21	
		Grip Sensor on										
	Rear	0	6 505.0	8.01	8.50	1.119	1.015	0.611	0.694	2.85	3	
	Aux	Rear	0	6 505.0	7.95	8.50	1.135	1.015	0.997	1.149	4.87	4
	Repeated SAR Test											
Aux	Rear	0	6 505.0	7.95	8.50	1.135	1.015	0.992	1.143	4.81		

U-NII-7

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Grip Sensor off										
		Rear	9	6 825.0	12.32	13.25	1.239	1.015	0.152	0.191	1.14	
		Grip Sensor on										
		Rear	0	6 665.0	8.03	8.50	1.114	1.015	0.510	0.577	2.43	5
	Aux	Rear	0	6 665.0	7.94	8.50	1.138	1.015	0.911	1.052	4.40	
		Rear	0	6 825.0	7.56	8.50	1.242	1.015	0.918	1.157	4.31	6
	Repeated SAR Test											
Aux	Rear	0	6 825.0	7.56	8.50	1.242	1.015	0.905	1.141	4.29		

U-NII-8

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Grip Sensor off										
		Rear	9	6 985.0	12.38	13.25	1.222	1.015	0.152	0.189	1.22	
		Grip Sensor on										
	Rear	0	6 985.0	7.71	8.50	1.199	1.015	0.517	0.629	2.46	7	
	Aux	Rear	0	6 985.0	7.83	8.50	1.167	1.015	0.869	1.029	4.08	8
	Repeated SAR Test											
Aux	Rear	0	6 985.0	7.83	8.50	1.167	1.015	0.864	1.023	4.06		



7.2 Standalone Body SAR and Absorbed Power Density Test Results (Tablet Mode)

U-NII-5												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Rear	0	6 025.0	12.59	13.50	1.233	1.015	0.018	0.023	0.05	
		Rear	0	6 185.0	12.50	13.50	1.259	1.015	0.021	0.027	0.06	
		Left	0	6 025.0	12.59	13.50	1.233	1.015	0.117	0.146	0.60	
		Left	0	6 185.0	12.50	13.50	1.259	1.015	0.237	0.303	1.12	9
	Aux	Rear	0	6 025.0	12.56	13.50	1.242	1.015	0.026	0.033	0.17	
		Rear	0	6 345.0	12.50	13.50	1.259	1.015	0.016	0.020	0.09	
		Right	0	6 025.0	12.56	13.50	1.242	1.015	0.320	0.403	1.64	10
		Right	0	6 345.0	12.50	13.50	1.259	1.015	0.242	0.309	1.15	

U-NII-6												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Rear	0	6 505.0	12.47	13.50	1.268	1.015	0.031	0.040	0.21	
		Left	0	6 505.0	12.47	13.50	1.268	1.015	0.234	0.301	1.00	11
	Aux	Rear	0	6 505.0	12.52	13.50	1.253	1.015	0.009	0.011	0.01	
		Right	0	6 505.0	12.52	13.50	1.253	1.015	0.062	0.079	0.24	12

U-NII-7												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Rear	0	6 825.0	12.32	13.25	1.239	1.015	0.043	0.054	0.23	
		Left	0	6 825.0	12.32	13.25	1.239	1.015	0.344	0.433	1.54	13
	Aux	Rear	0	6 665.0	12.38	13.25	1.222	1.015	0.013	0.016	0.07	
		Right	0	6 665.0	12.38	13.25	1.222	1.015	0.107	0.133	0.39	14

U-NII-8												
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Estimated 4cm ² APD (W/m ²)	Plot No.
SU 160 MHz	Main	Rear	0	6 985.0	12.38	13.25	1.222	1.015	0.102	0.127	0.49	
		Left	0	6 985.0	12.38	13.25	1.222	1.015	0.216	0.268	1.09	15
	Aux	Rear	0	6 985.0	12.43	13.25	1.208	1.015	0.010	0.012	0.06	
		Right	0	6 985.0	12.43	13.25	1.208	1.015	0.133	0.163	0.50	16

<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR22-SPF0064 Page (28) of (152)</p>	<p> </p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D04.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04.
5. All modes of operation were investigated, and worst-case results are reported.
6. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
7. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. Per October 2020 TCB Workshop notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.

WLAN Notes:

1. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
2. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
3. 6-7GHz transmission was verified using a spectrum analyzer.

8. Power Density Test Results

8.1 Standalone Body Power Density Test Results(Notebook Mode)

U-NII-5											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Aux	Rear	2	6 025.0	7.50	-	0.0625	1.462	1.14	1.67	
		Rear	2	6 345.0	7.50	-	0.0625	1.462	3.36	4.91	17

U-NII-6											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Aux	Rear	2	6 505.0	8.50	1.68	0.0625	1.462	4.00	5.85	18
		Rear	9.22	6 505.0	8.50	2.09	0.0625	1.462	2.07	3.03	

U-NII-7											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Aux	Rear	2	6 825.0	8.50	-	0.0625	1.462	3.59	5.25	19
		Rear	2	6 665.0	8.50	-	0.0625	1.462	3.59	5.25	

U-NII-8											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Aux	Rear	2	6 985.0	8.50	-	0.0625	1.462	3.76	5.50	20



8.2 Standalone Body Power Density Test Results(Tablet Mode)

U-NII-5											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Aux	Right	2	6 025.0	13.50	-	0.0625	1.462	0.75	1.10	21
		Right	2	6 345.0	13.50	-	0.0625	1.462	0.62	0.90	

U-NII-6											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Main	Left	2	6 505.0	13.50	-	0.0625	1.462	0.75	1.10	22

U-NII-7											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Main	Left	2	6 825.0	13.25	0.87	0.0625	1.462	1.29	1.89	23
		Left	8.79	6 825.0	13.25	1.10	0.0625	1.462	0.54	0.78	

U-NII-8											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Max. Tune-up Power (dBm)	iPD	Grid Step (λ)	Measurement Uncertainty	Measured Total 4cm ² psPD (W/m ²)	Scaled Total 4cm ² psPD (W/m ²)	Plot No.
SU 160 MHz	Main	Left	2	6 985.0	13.25	-	0.0625	1.462	0.93	1.36	24

<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR22-SPF0064 Page (31) of (152)</p>	<p> </p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Power Density General Notes:

1. Batteries are fully charged at the beginning of the measurements.
2. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
3. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
4. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.46 dB (76.198%) was used to determine the psPD measurement scaling factor.
5. Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ and $d=\lambda/5\text{mm}$ using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is < 1dB, the grid step was sufficient for determining compliance at $d=2\text{mm}$.



9. Simultaneous Transmission

Refer to the sec 11. Simultaneous Transmission of Report No: KR22-SPF0063 SAR report for the value.



10. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Type	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
SU 160 MHz	U-NII-5	802.11ax SU 160 MHz	Aux	6 025.0	Rear	0	0.835	0.827	1.01
	U-NII-6		Aux	6 505.0	Rear	0	0.997	0.992	1.01
	U-NII-7		Aux	6 825.0	Rear	0	0.918	0.905	1.01
	U-NII-8		Aux	6 985.0	Rear	0	0.869	0.864	1.01

11. Measurement Uncertainty

11.1 SAR Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



11.2 Power Density Measurement Uncertainty

Source f uncertainty	Uncertainty Value (± dB)	Probability distribution	Div.	c _i	Standard Uncertainty (± dB)	v _i
Measurement system						
Calibration	0.49	N	1.00	1.00	0.49	∞
Probe correction	0.00	R	1.73	1.00	0.00	∞
Frequency response (BW ≤ 1 GHz)	0.20	R	1.73	1.00	0.12	∞
Sensor cross coupling	0.00	R	1.73	1.00	0.00	∞
Isotropy	0.50	R	1.73	1.00	0.29	∞
Linearity	0.20	R	1.73	1.00	0.12	∞
Probe scattering	0.00	R	1.73	1.00	0.00	∞
Probe positioning offset	0.30	R	1.73	1.00	0.17	∞
Probe positioning repeatability	0.04	R	1.73	1.00	0.02	∞
Sensor mechanical offset	0.00	R	1.73	1.00	0.00	∞
Probe spatial resolution	0.00	R	1.73	1.00	0.00	∞
Field impedance dependence	0.00	R	1.73	1.00	0.00	∞
Amplitude and phase drift	0.00	R	1.73	1.00	0.00	∞
Amplitude and phase noise	0.04	R	1.73	1.00	0.02	∞
Measurement area truncation	0.00	R	1.73	1.00	0.00	∞
Data acquisition	0.03	N	1.00	1.00	0.03	∞
Sampling	0.00	R	1.73	1.00	0.00	∞
Field reconstruction	1.77	R	1.73	1.00	1.02	∞
Forward transformation	0.00	R	1.73	1.00	0.00	∞
Power density scaling	-	R	1.73	1.00	-	∞
Spatial averaging	0.10	R	1.73	1.00	0.06	∞
System detection limit	0.04	R	1.73	1.00	0.02	∞
DUT and environmental factors						
Probe coupling with DUT	0.00	R	1.73	1.00	0.00	∞
Modulation response	0.40	R	1.73	1.00	0.23	∞
Integration time	0.00	R	1.73	1.00	0.00	∞
Response time	0.00	R	1.73	1.00	0.00	∞
Device holder influence	0.10	R	1.73	1.00	0.06	∞
DUT alignment	0.00	R	1.73	1.00	0.00	∞
RF ambient conditions	0.04	R	1.73	1.00	0.02	∞
Ambient reflections	0.04	R	1.73	1.00	0.02	∞
Immunity / secondary reception	0.00	R	1.73	1.00	0.00	∞
Drift of the DUT	0.22	R	1.73	1.00	0.13	∞
Combined standard uncertainty	RSS				1.23	
Expanded uncertainty (95 % confidence interval)	k = 2				2.46	

12. Test Equipment Information

Test Platform	SPEAG DASY6 System			
Version	DASY6: 16.0.2.136 / DASY6 mmWave: 3.0.0.841			
Location	Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 3	-	-
Shield Room	-	8F - 4	-	-
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
DASY6 Robot	TX60 Lspeag	F/19/0007289/A/001	-	-
Phantom	2mm Oval Phantom ELI5	2098	-	-
Phantom	mmWave Phantom	1062	-	-
Phantom	mmWave Phantom	1090	-	-
Mounting Device	Laptop Holder	-	-	-
mmWave Device Holder	mmWave Device Holder	1116	-	-
mmWave Device Holder	mmWave Device Holder	1140	-	-
DAE	DAE4	666	2022-01-26	2023-01-26
DAE	DAE4	1342	2022-05-31	2023-05-31
Probe	EX3DV4	7540	2022-04-29	2023-04-29
Isotropic E-Field Probe	EUmmWV4	9489	2022-05-25	2023-05-25
Isotropic E-Field Probe	EUmmWV4	9605	2022-11-16	2023-11-16
PSG Analog Signal Generator	E8257D	MY60020337	2022-01-26	2023-01-26
Dual Power Meter	EPM-442A	GB37480680	2022-05-02	2023-05-02
Power Sensor	8481H	2703A11902	2022-05-02	2023-05-02
Power Sensor	8481H	3318A18090	2022-05-02	2023-05-02
Attenuator	8491A	21552	2022-05-02	2023-05-02
Attenuator	8491A	35560	2022-05-02	2023-05-02
Attenuator	8491A	35934	2022-05-02	2023-05-02
Dual Directional Coupler	772D	2839A160504	2022-05-02	2023-05-02
Power Amplifier	AMP2027ADB	10005	2022-07-06	2023-07-06
Low Pass Filter	PE87FL1016	1928	2022-11-04	2023-11-04
Low Pass Filter	PE87FL1017	2134	2022-01-06	2023-01-06
Dipole Validation Kits	D6.5GHzV2	1005	2022-04-29	2024-04-29
System Verification Device	5G Verification Source 10 GHz	1023	2022-01-20	2023-01-20
Network Analyzer	E5071B	MY42403524	2022-02-15	2023-02-15
Dielectric Assessment Kit	DAK-3.5	1078	2022-05-30	2023-05-30
Humidity/Temp	MHB-382SD	46301	2022-02-25	2023-02-25
Humidity/Temp	MHB-382SD	46307	2022-03-17	2023-03-17
Spectrum Analyzer	FSQ40	200062	2022-05-02	2023-05-02

13. SAR Test System Verification and Test Results

Eurofins KCTL Co.,Ltd.

Measurement Report for Dipole D6.5GHzV2, FRONT, Validation band, UID 0 -, Channel 6500 (6500.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole D6.5GHzV2, Speag	16.0 x 6.0 x 300.0	1005	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0--	6500.0, 6500	5.4	6.19	33.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	26.1	28.8
psSAR8g [W/kg]	6.25	6.69
psSAR10g [W/kg]	5.18	5.50
psAPD (1.0cm2, sq) [W/m2]		288
psAPD (4.0cm2, sq) [W/m2]		134
Power Drift [dB]		0.01
M2/M1 [%]		51.1
Dist 3dB Peak [mm]		4.8

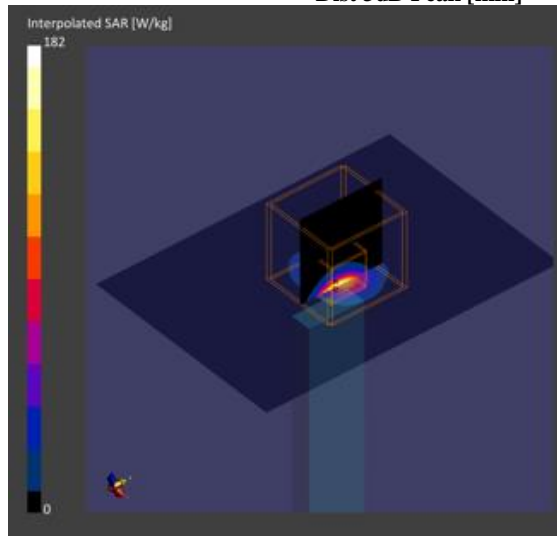

Eurofins KCTL Co.,Ltd.

Measurement Report for Dipole D6.5GHzV2, FRONT, Validation band, UID 0 -, Channel 6500 (6500.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole D6.5GHzV2, Speag	16.0 x 6.0 x 300.0	1005	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	Validation band	CW, 0--	6500.0, 6500	5.4	6.23	33.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection	Measured	Measured
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	24.7	28.1
psSAR8g [W/kg]	5.98	6.45
psSAR10g [W/kg]	4.95	5.30
psAPD (1.0cm2, sq) [W/m2]		281
psAPD (4.0cm2, sq) [W/m2]		129
Power Drift [dB]		-0.00
M2/M1 [%]		50.7
Dist 3dB Peak [mm]		4.9

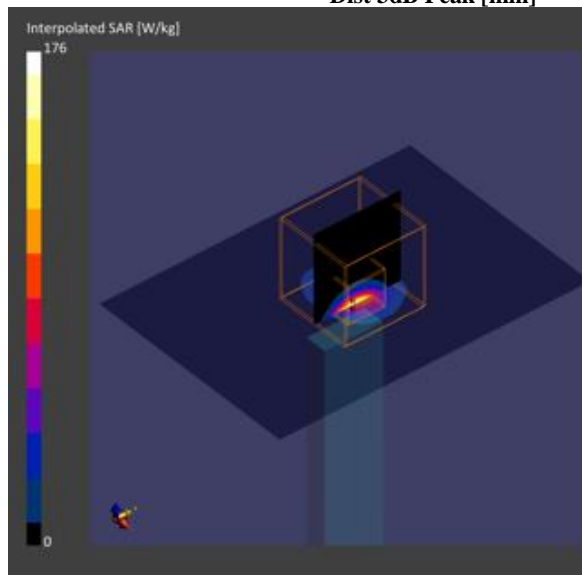

1)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMATA00004R	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.4	5.65	34.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	136.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.2
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.514	0.585
psSAR8g [W/kg]	0.133	0.147
psSAR10g [W/kg]	0.112	0.123
psAPD (1.0cm2, sq) [W/m2]		5.85
psAPD (4.0cm2, sq) [W/m2]		2.94
Power Drift [dB]		0.07
M2/M1 [%]		55.1
Dist 3dB Peak [mm]		4.1

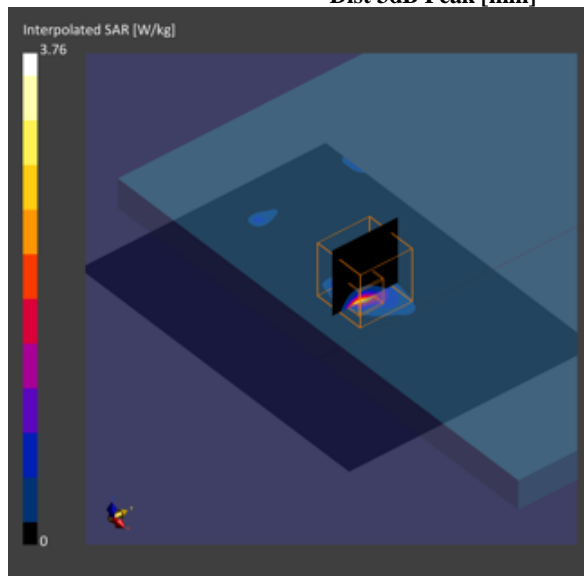

2)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMATA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.4	5.65	34.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.658	0.835
psSAR8g [W/kg]	0.183	0.205
psSAR10g [W/kg]	0.154	0.170
psAPD (1.0cm2, sq) [W/m2]		8.35
psAPD (4.0cm2, sq) [W/m2]		4.10
Power Drift [dB]		0.02
M2/M1 [%]		51.0
Dist 3dB Peak [mm]		4.8

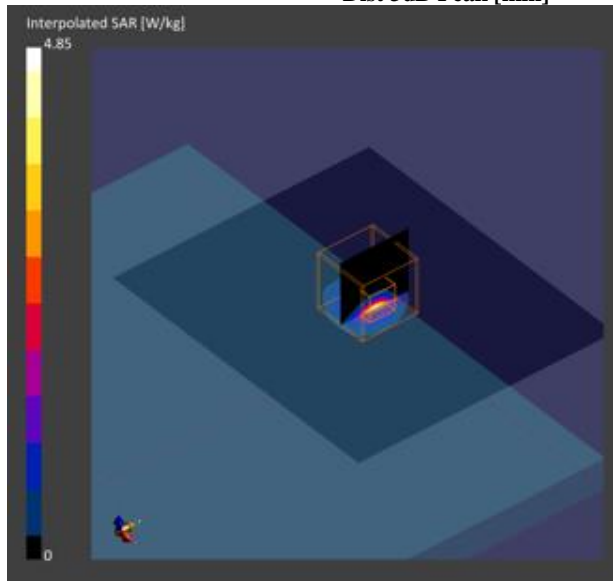

3)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMATA00004R	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.4	6.20	33.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.501	0.611
psSAR8g [W/kg]	0.128	0.143
psSAR10g [W/kg]	0.107	0.118
psAPD (1.0cm2, sq) [W/m2]		6.11
psAPD (4.0cm2, sq) [W/m2]		2.85
Power Drift [dB]		0.03
M2/M1 [%]		47.1
Dist 3dB Peak [mm]		3.4

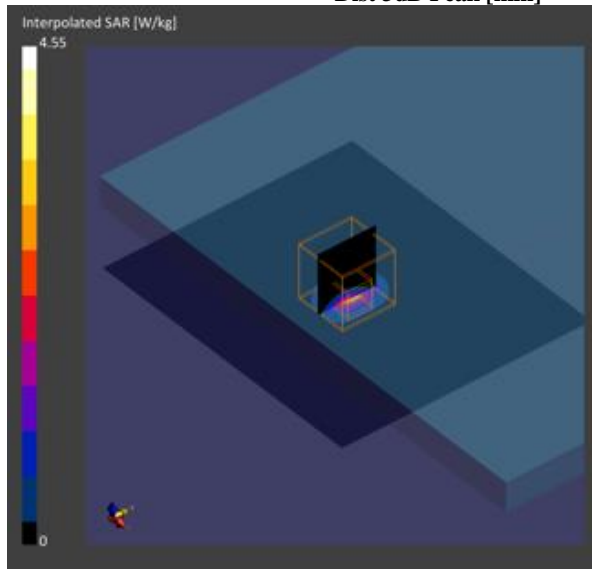

4)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.4	6.20	33.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.760	0.997
psSAR8g [W/kg]	0.212	0.243
psSAR10g [W/kg]	0.180	0.203
psAPD (1.0cm2, sq) [W/m2]		9.97
psAPD (4.0cm2, sq) [W/m2]		4.87
Power Drift [dB]		0.06
M2/M1 [%]		47.0
Dist 3dB Peak [mm]		4.3

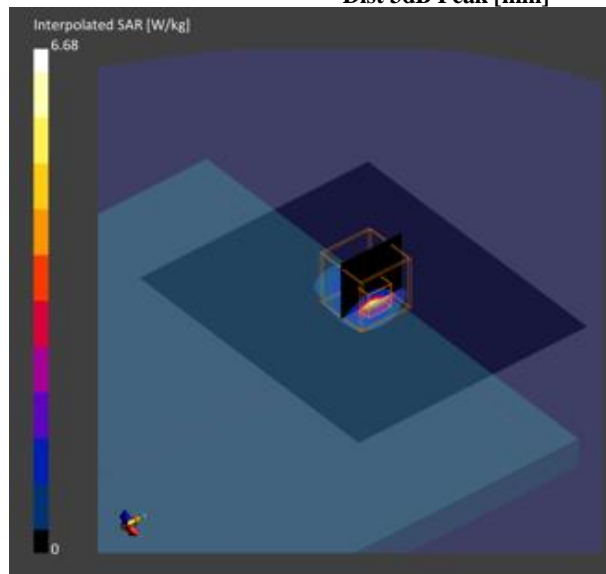

5)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMATA00004R	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6665.0, 143	5.4	6.39	33.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.425	0.510
psSAR8g [W/kg]	0.110	0.122
psSAR10g [W/kg]	0.093	0.101
psAPD (1.0cm2, sq) [W/m2]		5.10
psAPD (4.0cm2, sq) [W/m2]		2.43
Power Drift [dB]		0.09
M2/M1 [%]		46.6
Dist 3dB Peak [mm]		3.4

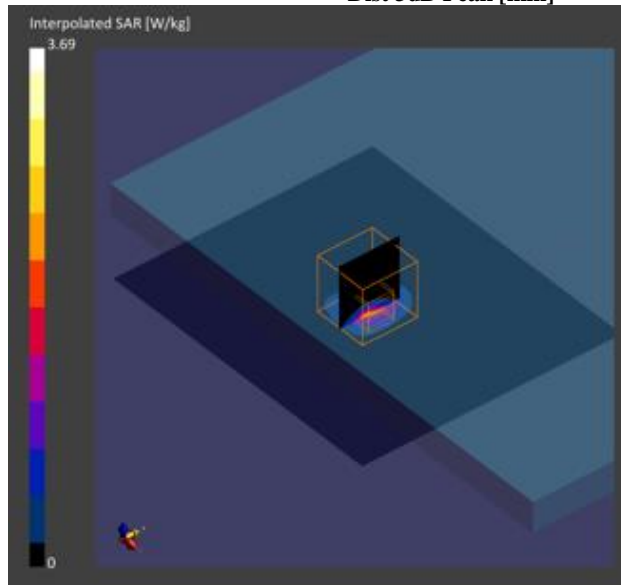

6)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 175 (6825.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMATA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6825.0, 175	5.4	6.57	32.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.681	0.918
psSAR8g [W/kg]	0.190	0.216
psSAR10g [W/kg]	0.160	0.179
psAPD (1.0cm2, sq) [W/m2]		9.18
psAPD (4.0cm2, sq) [W/m2]		4.31
Power Drift [dB]		-0.01
M2/M1 [%]		46.4
Dist 3dB Peak [mm]		4.4

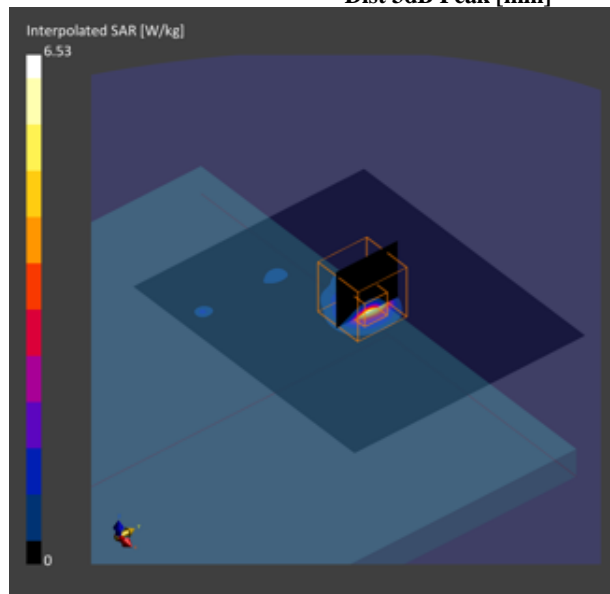

7)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMFTA00004R	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.2	6.73	32.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.402	0.517
psSAR8g [W/kg]	0.118	0.123
psSAR10g [W/kg]	0.099	0.103
psAPD (1.0cm2, sq) [W/m2]		5.17
psAPD (4.0cm2, sq) [W/m2]		2.46
Power Drift [dB]		-0.12
M2/M1 [%]		46.7
Dist 3dB Peak [mm]		3.8

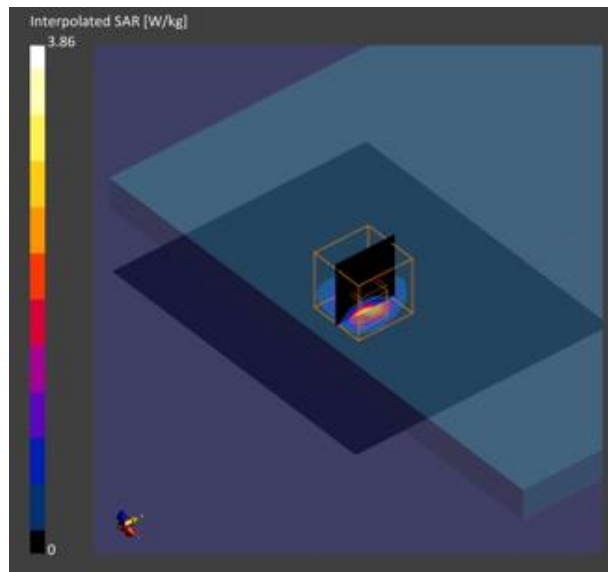

8)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 202.0 x 12.0	61K09FMFTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.2	6.73	32.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-07	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.2
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-07	2022-12-07
psSAR1g [W/kg]	0.649	0.869
psSAR8g [W/kg]	0.177	0.204
psSAR10g [W/kg]	0.148	0.169
psAPD (1.0cm2, sq) [W/m2]		8.69
psAPD (4.0cm2, sq) [W/m2]		4.08
Power Drift [dB]		-0.01
M2/M1 [%]		50.4
Dist 3dB Peak [mm]		4.3

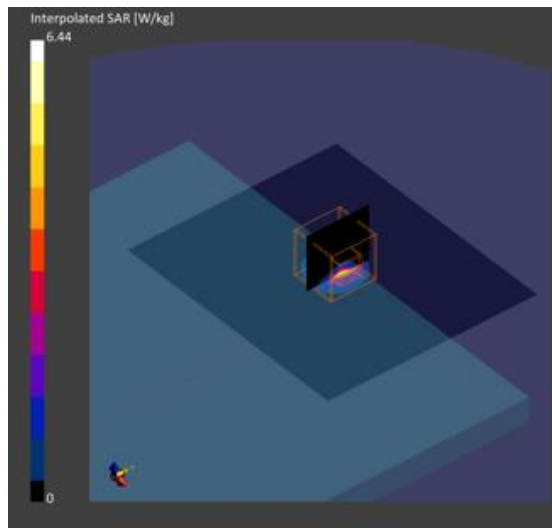

9)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 47 (6185.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6185.0, 47	5.4	5.88	33.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.223	0.237
psSAR8g [W/kg]	0.055	0.056
psSAR10g [W/kg]	0.046	0.046
psAPD (1.0cm2, sq) [W/m2]		2.37
psAPD (4.0cm2, sq) [W/m2]		1.12
Power Drift [dB]		0.05
M2/M1 [%]		52.2
Dist 3dB Peak [mm]		4.8

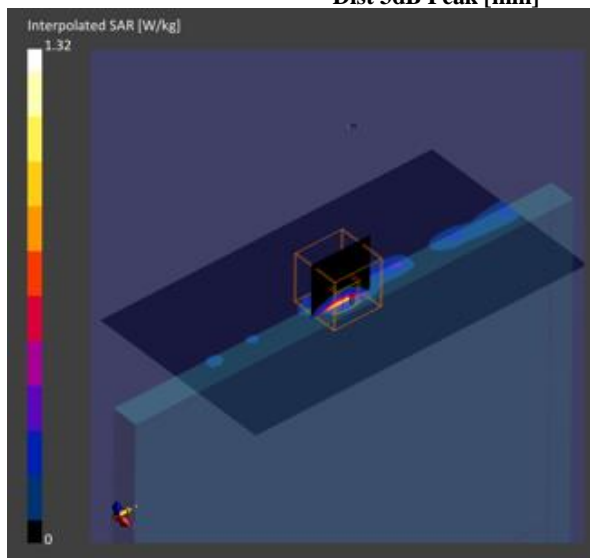

10)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	Custom Band	CW, 10755-AAC	6025.0, 15	5.4	5.69	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.294	0.320
psSAR8g [W/kg]	0.082	0.082
psSAR10g [W/kg]	0.069	0.069
psAPD (1.0cm2, sq) [W/m2]		3.20
psAPD (4.0cm2, sq) [W/m2]		1.64
Power Drift [dB]		0.01
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		4.8

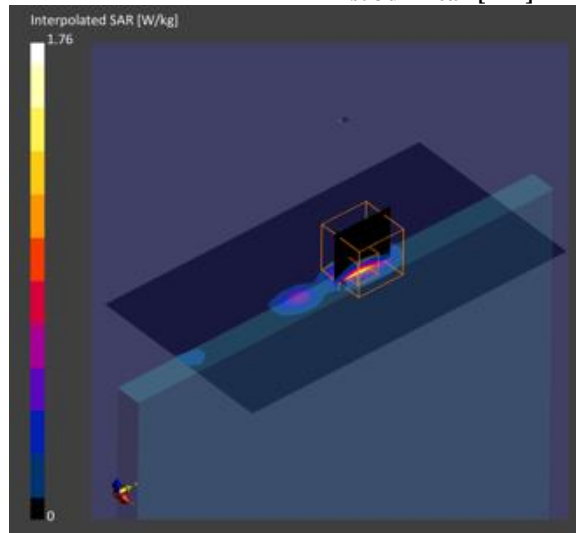

11)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.4	6.24	33.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.237	0.234
psSAR8g [W/kg]	0.057	0.050
psSAR10g [W/kg]	0.047	0.040
psAPD (1.0cm2, sq) [W/m2]		2.34
psAPD (4.0cm2, sq) [W/m2]		0.996
Power Drift [dB]		0.08
M2/M1 [%]		46.7
Dist 3dB Peak [mm]		4.6

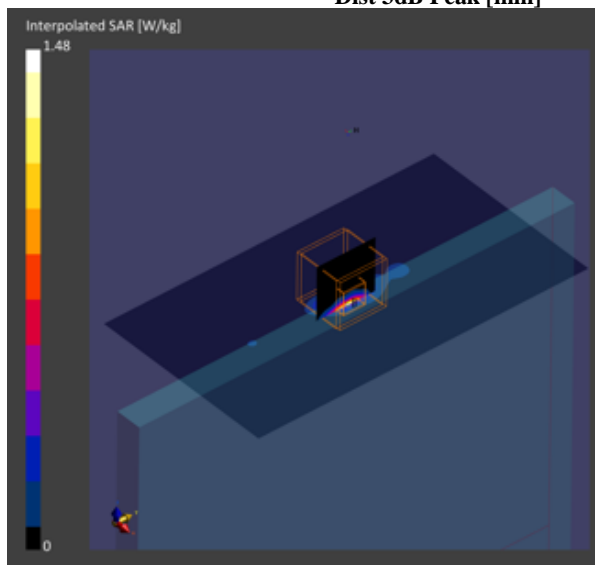

12)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	Custom Band	CW, 10755-AAC	6505.0, 111	5.4	6.24	33.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.078	0.062
psSAR8g [W/kg]	0.022	0.012
psSAR10g [W/kg]	0.019	0.009
psAPD (1.0cm2, sq) [W/m2]		0.615
psAPD (4.0cm2, sq) [W/m2]		0.240
Power Drift [dB]		0.19
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		4.1

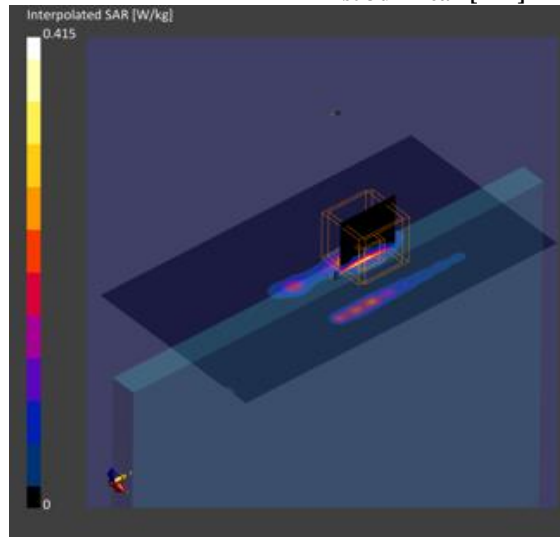

13)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 175 (6825.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6825.0, 175	5.4	6.63	32.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.345	0.344
psSAR8g [W/kg]	0.085	0.077
psSAR10g [W/kg]	0.070	0.062
psAPD (1.0cm2, sq) [W/m2]		3.44
psAPD (4.0cm2, sq) [W/m2]		1.54
Power Drift [dB]		0.06
M2/M1 [%]		46.9
Dist 3dB Peak [mm]		4.8

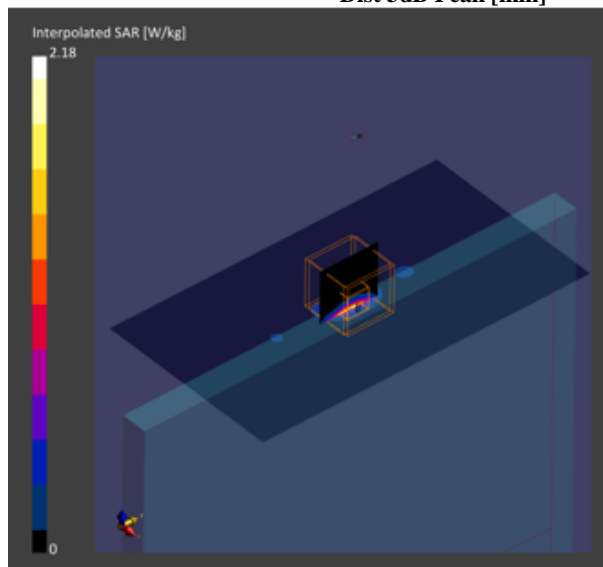

14)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 143 (6665.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	Custom Band	CW, 10755-AAC	6665.0, 143	5.4	6.44	33.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.102	0.107
psSAR8g [W/kg]	0.024	0.019
psSAR10g [W/kg]	0.020	0.015
psAPD (1.0cm2, sq) [W/m2]		1.07
psAPD (4.0cm2, sq) [W/m2]		0.389
Power Drift [dB]		-0.07
M2/M1 [%]		44.7
Dist 3dB Peak [mm]		4.1

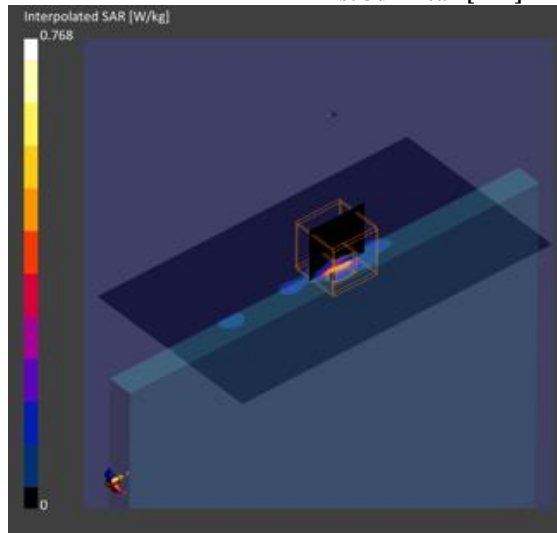

15)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.2	6.78	32.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.237	0.216
psSAR8g [W/kg]	0.066	0.054
psSAR10g [W/kg]	0.056	0.045
psAPD (1.0cm2, sq) [W/m2]		2.16
psAPD (4.0cm2, sq) [W/m2]		1.09
Power Drift [dB]		-0.06
M2/M1 [%]		49.0
Dist 3dB Peak [mm]		4.8

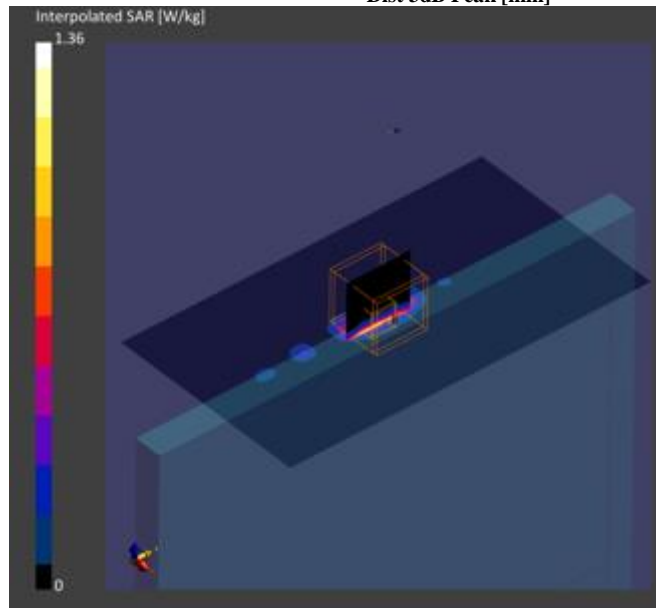

16)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 306.0 x 12.0	61K09FMTA00004R	Tablet + Aux Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	Custom Band	CW, 10755-AAC	6985.0, 207	5.2	6.78	32.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-600-10000 , 2022-Dec-08	EX3DV4 - SN7540, 2022-04-29	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-08	2022-12-08
psSAR1g [W/kg]	0.160	0.133
psSAR8g [W/kg]	0.044	0.025
psSAR10g [W/kg]	0.037	0.020
psAPD (1.0cm2, sq) [W/m2]		1.33
psAPD (4.0cm2, sq) [W/m2]		0.498
Power Drift [dB]		0.11
M2/M1 [%]		49.4
Dist 3dB Peak [mm]		4.8

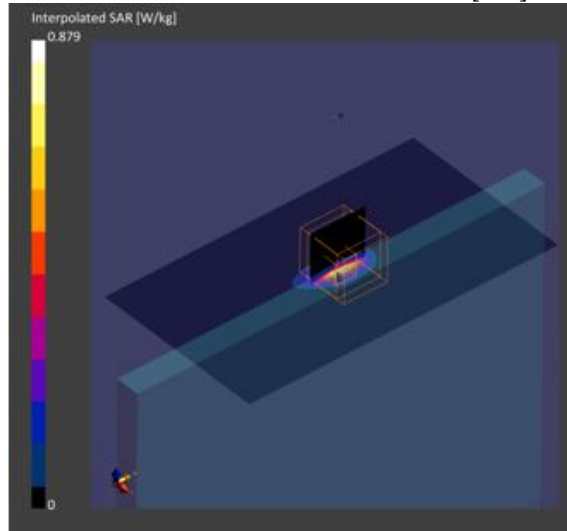

14. PD Test System Verification and Test Results

Eurofins KCTL Co.,Ltd.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	49.1
psPDtot+ [W/m ²]	49.3
E _{max} [V/m]	146
Power Drift [dB]	0.07

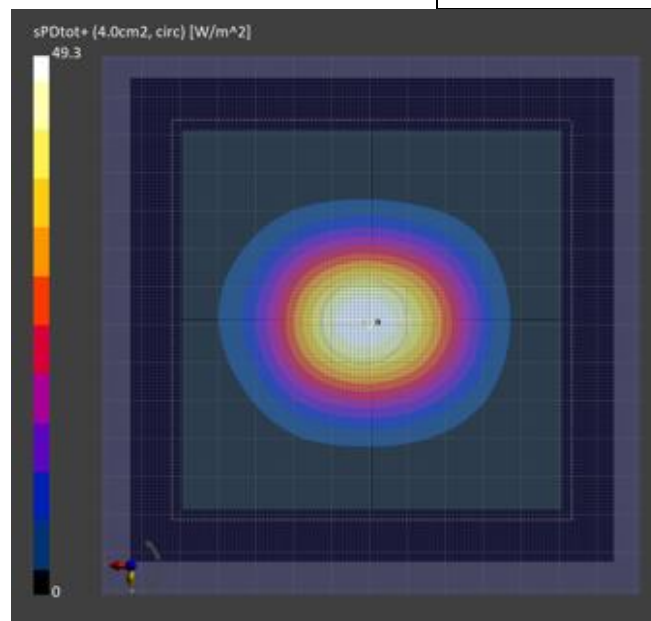

Eurofins KCTL Co.,Ltd.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	50.8
psPDtot+ [W/m ²]	50.9
E _{max} [V/m]	146
Power Drift [dB]	0.05

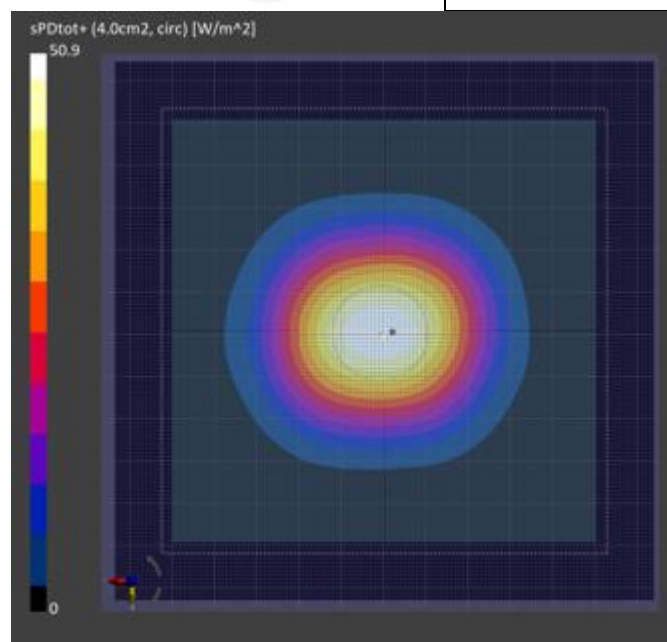

Eurofins KCTL Co.,Ltd.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-10
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	49.3
psPDtot+ [W/m ²]	49.5
E _{max} [V/m]	146
Power Drift [dB]	0.07

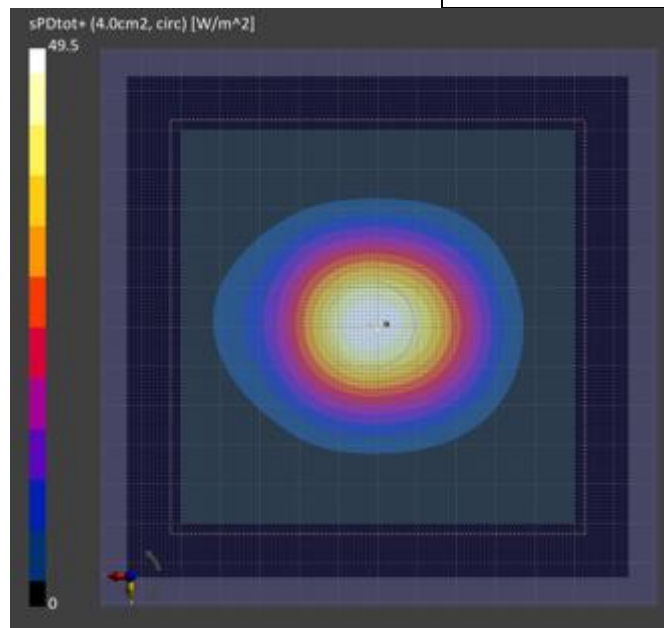

Eurofins KCTL Co.,Ltd.

Measurement Report for 10 GHz Verification Source, FRONT, Validation band, UID 0 -, Channel 10000 (10000.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
10 GHz Verification Source, Speag	100.0 x 172.0 x 100.0	1023	Validation Dipole

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 10.00	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	52.2
psPDtot+ [W/m ²]	52.4
E _{max} [V/m]	149
Power Drift [dB]	0.14

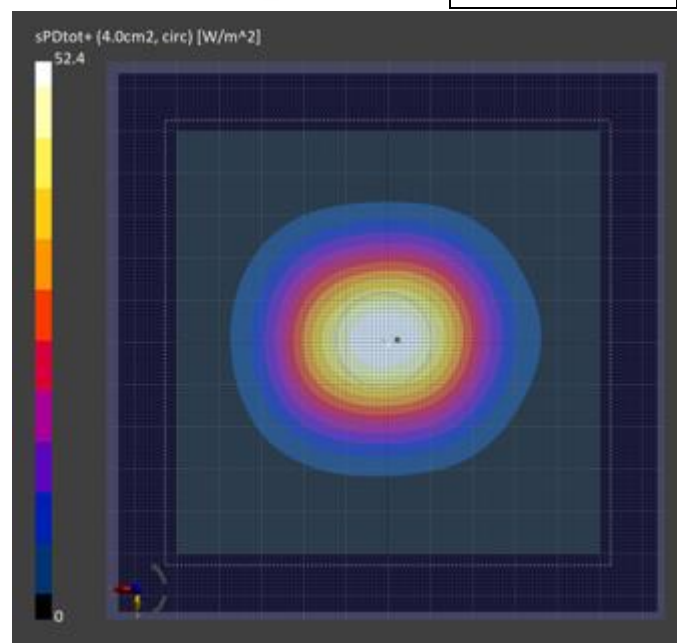

17)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 79 (6345.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 12.0 x 306.0	61K09FMTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6345.0, 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.77
psPDtot+ [W/m ²]	3.36
E _{max} [V/m]	58.6
Power Drift [dB]	-0.06

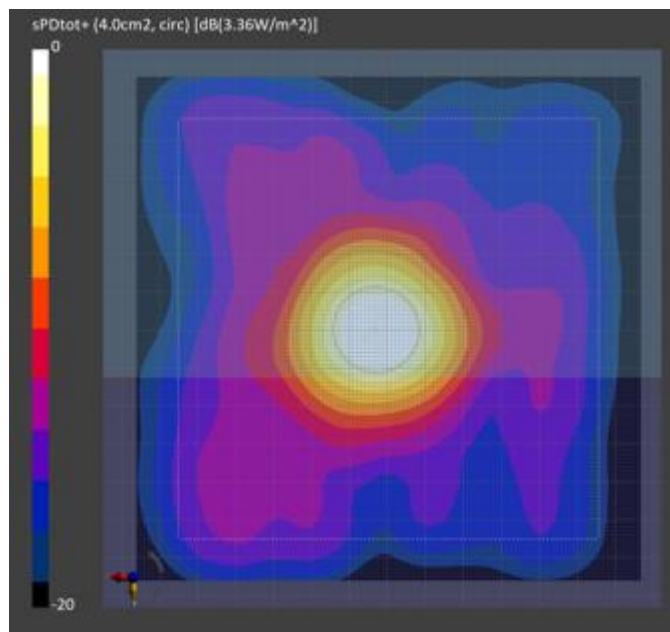

18)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 12.0 x 306.0	61K09FMTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-10
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.32
psPDtot+ [W/m ²]	4.00
E _{max} [V/m]	63.2
Power Drift [dB]	0.05

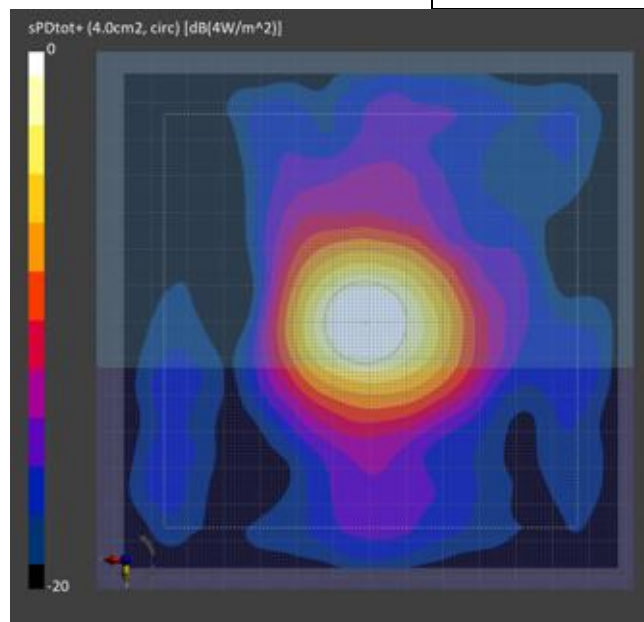

19)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 175 (6825.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 12.0 x 306.0	61K09FMTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6825.0, 175	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.19
psPDtot+ [W/m ²]	3.59
E _{max} [V/m]	59.9
Power Drift [dB]	0.01

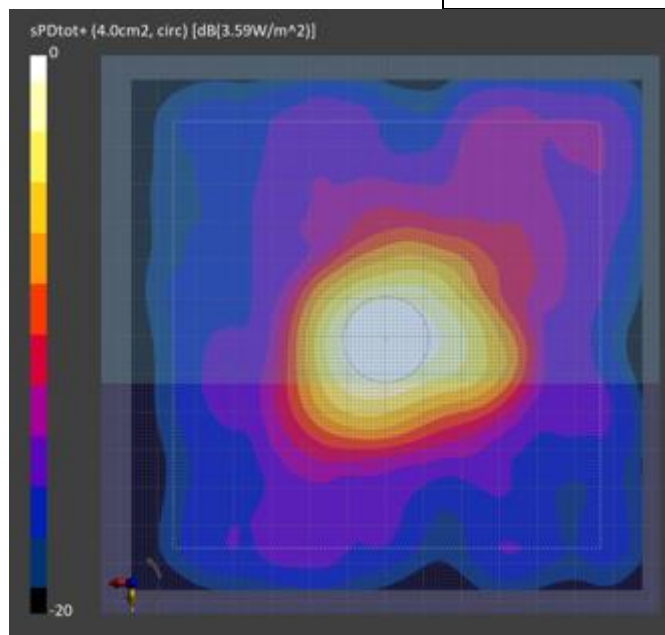

20)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, BACK, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	202.0 x 12.0 x 306.0	61K09FMTA00004R	Laptop + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9489_F1-55GHz, 2022-05-25	DAE4 Sn1342, 2022-05-31

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 130.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.23
psPDtot+ [W/m ²]	3.76
E _{max} [V/m]	60.0
Power Drift [dB]	0.11

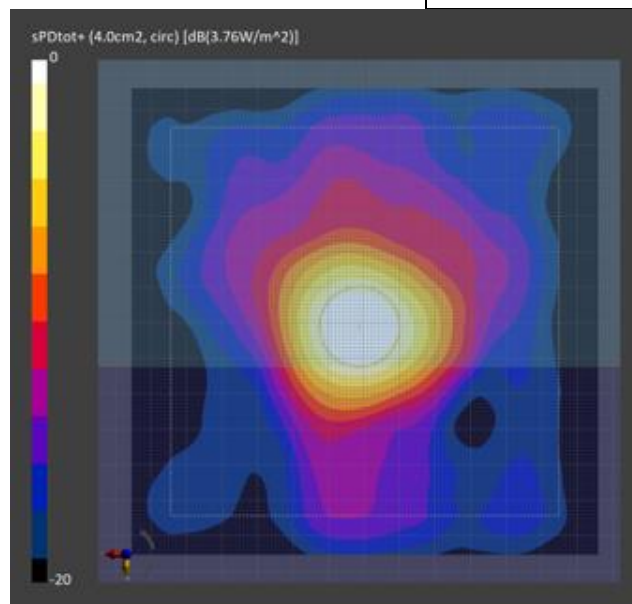

21)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE RIGHT, Custom Band 802.11 ax, UID 10755 AAC, Channel 15 (6025.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 12.0 x 202.0	61K19FMTA00051A	Tablet + Aux Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	6025.0, 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.655
psPDtot+ [W/m ²]	0.750
E _{max} [V/m]	30.8
Power Drift [dB]	-0.09

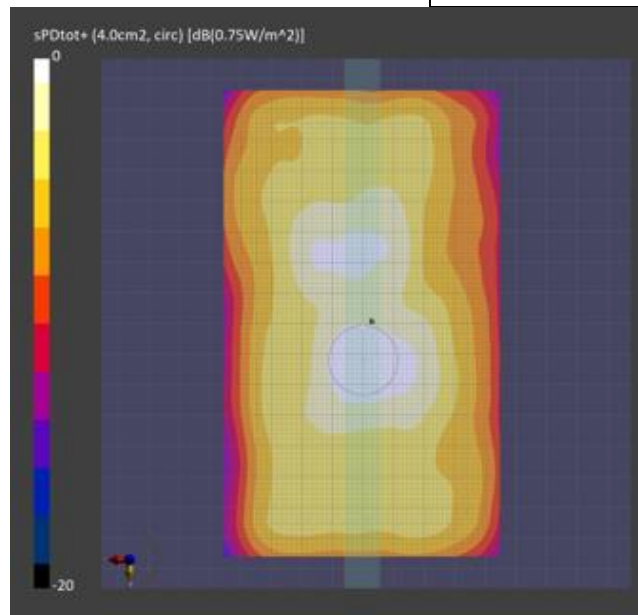

22)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 111 (6505.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 12.0 x 202.0	61K19FMTA00051A	Tablet + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE LEFT, 2.00	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.551
psPDtot+ [W/m ²]	0.749
E _{max} [V/m]	32.8
Power Drift [dB]	-0.02

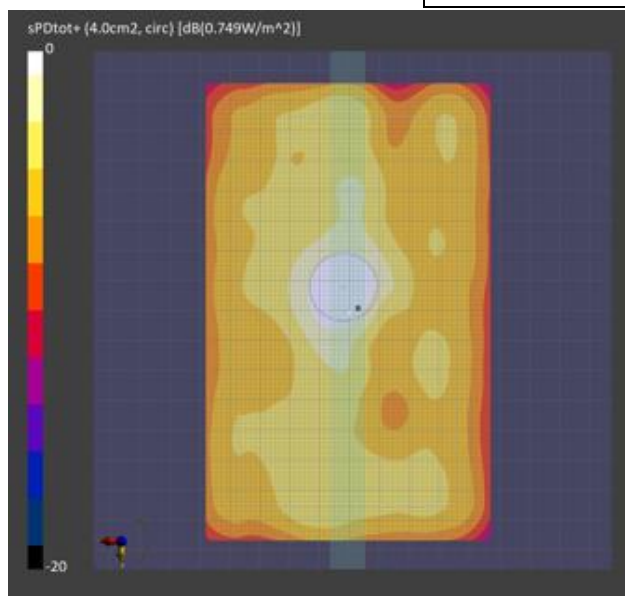

23)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 175 (6825.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 12.0 x 202.0	61K19FMTA00051A	Tablet + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE LEFT, 2.00	6825.0, 175	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.951
psPDtot+ [W/m ²]	1.29
E _{max} [V/m]	38.9
Power Drift [dB]	0.15

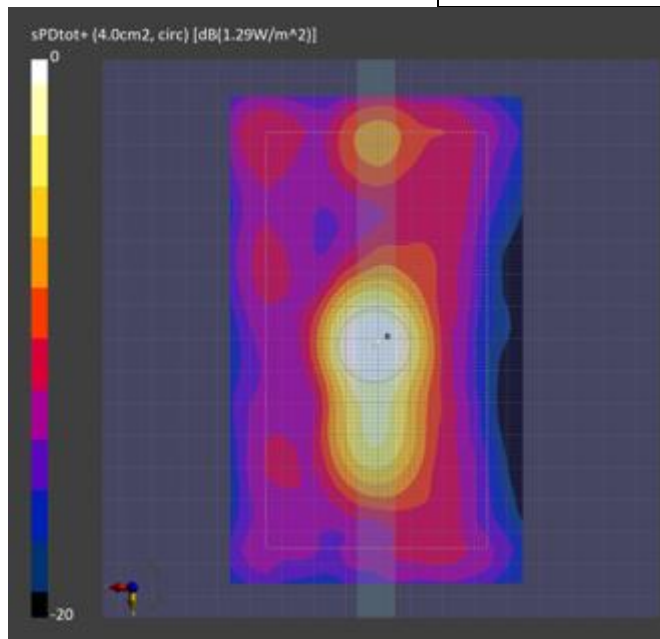

24)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP730QFG, EDGE LEFT, Custom Band 802.11 ax, UID 10755 AAC, Channel 207 (6985.0MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
NP730QFG, SAMSUNG	306.0 x 12.0 x 202.0	61K19FMTA00051A	Tablet + Main Antenna

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE LEFT, 2.00	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9605_F1-55GHz, 2022-11-16	DAE4 Sn666, 2022-01-26

Scans Setup

Measurement Results

Scan Type	5G Scan
Grid Extents [mm]	90.0 x 150.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Scan Type	5G Scan
Date	2022-12-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.730
psPDtot+ [W/m ²]	0.931
E _{max} [V/m]	37.1
Power Drift [dB]	0.07

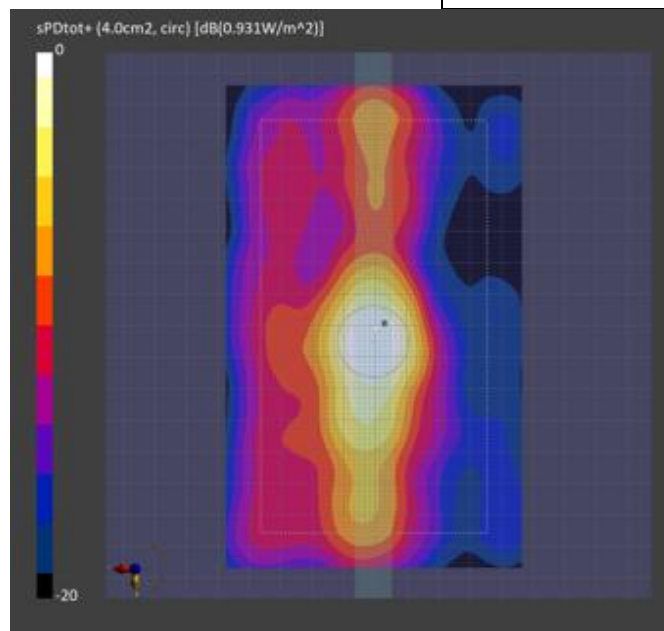

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_7540) A.2 Probe Calibration certificate (EUmmWV4_9489) A.3 Probe Calibration certificate (EUmmWV4_9605) A.4 Dipole Calibration certificate (D6.5GHzV2_SN1005) A.5 System Calibration certificate (5G Verification Source 10GHz_SN1023)
Appendix B	#Antenna Location & Distance
Appendix C	EUT Photo
Appendix D	Test Setup Photo

