




TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR21-SRF0065-B Page (1) of (319)</p>	
--	---	---

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2021-03-29

2. Use of Report : Certification

3. Name of Product / Model : WiFi Module / CWBR720M

4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Korea

5. FCC ID : A3LCWBR720M



6. IC Certificate No. : 649E-CWBR720M

7. Date of Test : 2021-03-31 to 2021-04-26, 2021-05-17

8. Location of Test : Permanent Testing Lab On Site Testing
(Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

9. Test method used : FCC Part 15 Subpart E, 15.407
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 March 2019


10. Test Result : Refer to the test result in the test report

Affirmation	<p>Tested by</p>  Name : Euijung Kim (Signature)	<p>Technical Manager</p>  Name : Hyeonsu Jang (Signature)
-------------	--	---

2021-05-20

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

<p align="center">KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p align="center">Report No.: KR21-SRF0065-B Page (2) of (319)</p>	
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2021-05-12	Originally issued	-
2021-05-18	Updated	5,24~45,75,76, 79~82,85,86, 101~104,107,108, 124,138,139,140, 142,144, 273~279,314
2021-05-20	Updated	5, 160, 314

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR21-SRF0065-A is superseded by the report No. KR21-SRF0065-B.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (3) of (319)



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
2.2.	Simultaneous Tx Condition	5
2.3.	Duty Cycle Factor	6
3.	Antenna requirement	8
3.1	Antenna information.....	9
3.2	Directional Gain Calculations.....	9
4.	Summary of tests.....	10
5.	Measurement uncertainty	11
6.	Measurement results explanation example	12
7.	Test results	13
7.1.	Maximum conducted output power	13
7.2.	Maximum Power Spectral Density	46
7.3.	26 dB Bandwidth & 99% Bandwidth.....	74
7.4.	6 dB Bandwidth & 99% Bandwidth.....	123
7.5.	Straddle channel.....	138
7.6.	Spurious Emission, Band Edge and Restricted bands.....	157
7.7.	AC Conducted emission	317
8.	Measurement equipment	319

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (4) of (319)

KCTL

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040, ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : WiFi Module
Model : CWBR720M
Modulation technique : WIFI(802.11a/b/g/n/ac)_DSSS, OFDM
Number of channels : 2.4 GHz band: 13 ch (20 MHz), 9 ch (40 MHz),
UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
Power source : DC 5.0 V
Antenna type : Metal Antenna
Antenna gain : 2.4 GHz band ANT 1: 1.60 dBi, ANT 2: 1.60 dBi
UNII-1 ANT 1: 1.70 dBi, ANT 2: 1.70 dBi
UNII-2A ANT 1: 1.20 dBi, ANT 2: 1.20 dBi
UNII-2C ANT 1: 1.10 dBi, ANT 2: 1.10 dBi
UNII-3 ANT 1: 1.00 dBi, ANT 2: 1.00 dBi
Frequency range : 2.4 GHz band: 2 412 MHz ~ 2 472 MHz (802.11b/g/n_HT20)
2.4 GHz band: 2 422 MHz ~ 2 462 MHz (802.11n_HT40)
UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n/ac_HT20/VHT20)
UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n/ac_HT40/VHT40)
UNII-1: 5 210 MHz (802.11ac_VHT80)
UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n/ac_HT20/VHT20)
UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n/ac_HT40/VHT40)
UNII-2A: 5 290 MHz (802.11ac_VHT80)
UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n/ac_HT20/VHT20)
UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n/ac_HT40/VHT40)
UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80)
UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n/ac_HT20/VHT20)
UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n/ac_HT40/VHT40)
UNII-3: 5 775 MHz (802.11ac_VHT80)
Software version : v1.0
Hardware version : v1.0
Test device serial No. : Conducted(88571DEEBB81)
Radiated(88571DEEBB3A)
Operation temperature : -10 °C ~ 70 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

WLAN 2.4 GHz_802.11b/g/n(HT20/40)

WLAN 5 GHz_802.11a/n(HT20/40)/ac(VHT20/40/80)

UNII-1

Ch.	Frequency (MHz)
36	5 180
40	5 200
48	5 240

UNII-2A

Ch.	Frequency (MHz)
52	5 260
56	5 280
64	5 320

UNII-2C

Ch.	Frequency (MHz)
100	5 500
120	5 580
140	5 700
144	5 720

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

Table 2.1.1. 802.11a/n/ac_HT20/VHT20 mode

UNII-1

Ch.	Frequency (MHz)
38	5 190
46	5 230

UNII-2A

Ch.	Frequency (MHz)
54	5 270
62	5 310

UNII-2C

Ch.	Frequency (MHz)
102	5 510
118	5 590
134	5 670
142	5 710

UNII-3

Ch.	Frequency (MHz)
151	5 755
159	5 795

Table 2.1.2. 802.11n/ac_HT40/VHT40 mode

UNII-1

Ch.	Frequency (MHz)
42	5 210

UNII-2A

Ch.	Frequency (MHz)
58	5 290

UNII-2C

Ch.	Frequency (MHz)
106	5 530
122	5 610
138	5 690

UNII-3

Ch.	Frequency (MHz)
155	5 775

Table 2.1.3. 802.11ac_VHT80 mode

2.2. Simultaneous Tx Condition

Simultaneous Tx condition

Mode	2.4GHz WIFI		5GHz WIFI		Test Case
	ANT 1	ANT 2	ANT 1	ANT 2	
2.4GHz WIFI ANT 2 + 5GHz WIFI ANT 1	-	on	on	-	V
2.4GHz WIFI ANT 1 + 5GHz WIFI ANT 2	on	-	-	on	V
2.4 GHz WIFI MIMO mode (ANT 1 + ANT 2)	on	on	-	-	V
5 GHz WIFI MIMO mode (ANT 1 + ANT 2)	-	-	on	on	V

* This device does not support simultaneous operation other than the above table.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (6) of (319)



2.3. Duty Cycle Factor

DCF is not compensated to average result because duty cycle is 100%

SISO

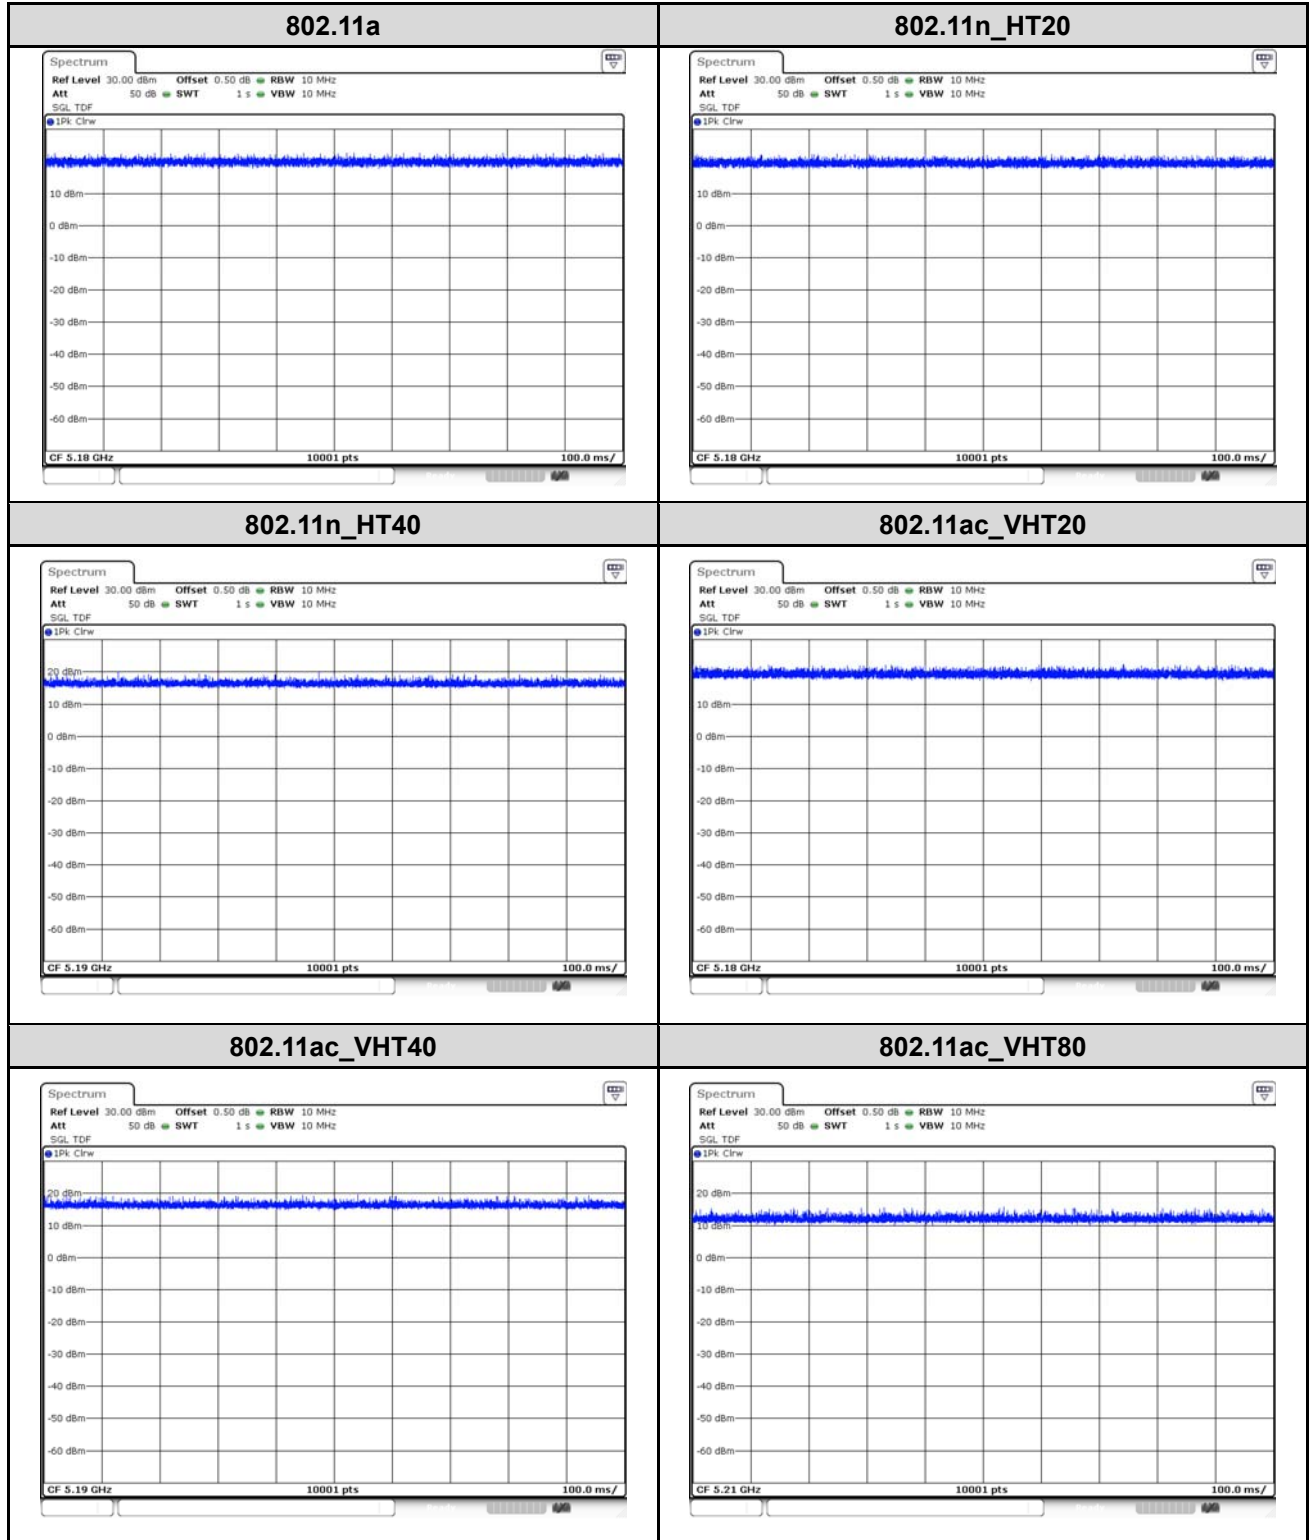

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (7) of (319)




MIMO


802.11a

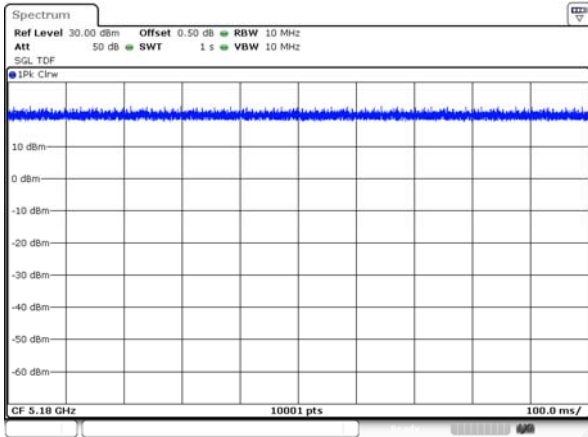


802.11n_HT20

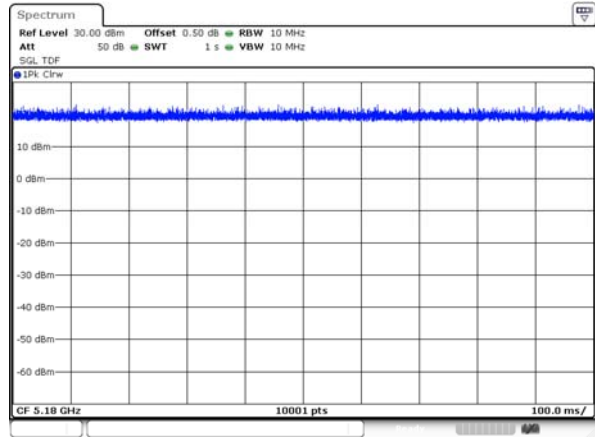


802.11n_HT40

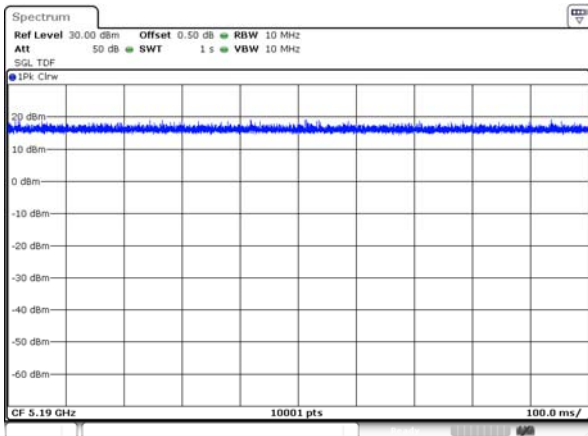


802.11ac_VHT20

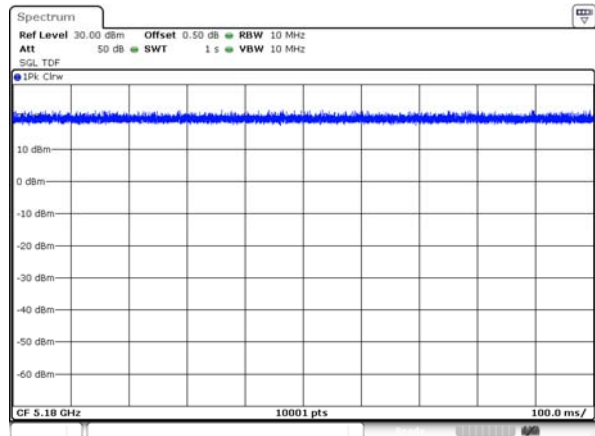

802.11ac_VHT40

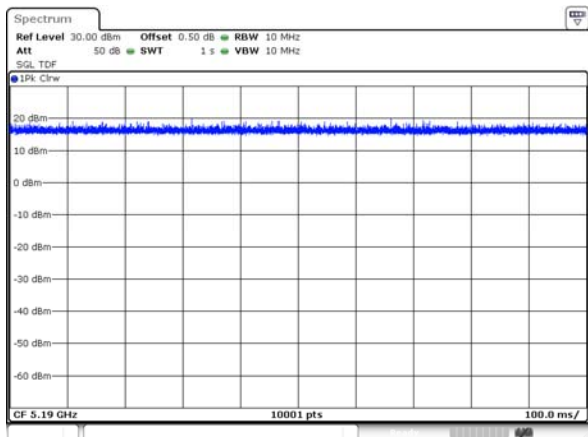

802.11ac_VHT80

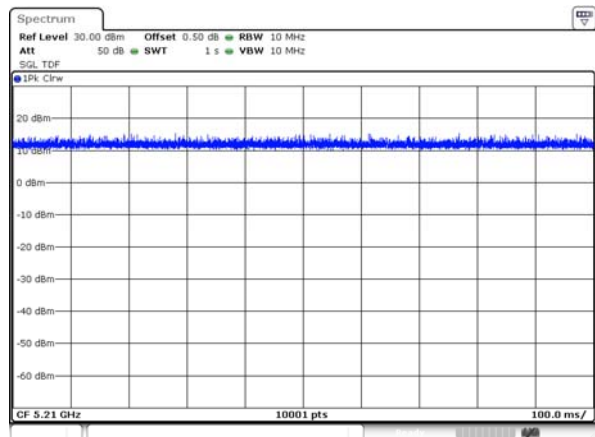

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (8) of (319)



3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached metal antenna on board.
- The E.U.T Complies with the requirement of §15.203, §15.247, §15.407.

3.1 Antenna information

Mode	SISO		CDD	SDM
	ANT 1	ANT 2	ANT 1 + 2	ANT 1 + 2
802.11a	√	√	√	X
802.11n HT20	√	√	√	√
802.11n HT40	√	√	√	√
802.11ac VHT20	√	√	√	√
802.11ac VHT40	√	√	√	√
802.11ac VHT80	√	√	√	√

√ = Support, X = Not support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2TX Function

3.2 Directional Gain Calculations

According to clause F), 2), d), (i) of KDB 662911 D01 Multiple Transmitter Output, Directional gain may be calculated by using the formulas as below.

Band	ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	Power Directional Gain (dBi)
UNII 1	1.70	1.70	4.71
UNII 2A	1.20	1.20	4.21
UNII 2C	1.10	1.10	4.11
UNII 3	1.00	1.00	4.01

Note.

Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, \dots, G_N dBi

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dB i

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test Condition	Test results
15.407(a)	RSS-247 Issue 2, 6.2	Maximum conducted output power	Conducted	Pass
15.407(a)	RSS-247 Issue 2, 6.2	Maximum power spectral density		Pass
15.407(a)	RSS-Gen Issue 5, 6.7	26 dB Channel Bandwidth		Pass
15.407(e)	RSS-247 Issue 2, 6.2.4	6 dB Channel Bandwidth		Pass
-	RSS-Gen Issue 5, 6.7	Occupied Bandwidth		Pass
15.207(a)	RSS-Gen Issue 5, 8.8	AC Conducted Emissions		Pass
15.407(b), 15.205(a), 15.209(a)	RSS-Gen Issue 5, 8.9, 8.10 RSS-247 Issue 2, 6.2,	Spurious emission Band-edge, restricted band	Radiated	Pass Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
4. The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 662911 D01 v02r01
 - KDB 789033 D02 v02r01
5. Based on the baseline scan, the worst-case data rates were:
 - 802.11a mode: 6Mbps
 - 802.11n HT20 mode: MCS0
 - 802.11n HT40 mode: MCS0
 - 802.11ac VHT20 mode: MCS0
 - 802.11ac VHT40 mode: MCS0
 - 802.11ac VHT80 mode: MCS0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (11) of (319)



5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	1.3 dB	
Conducted spurious emissions	1.3 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.3 dB
	30 MHz ~ 300 MHz	5.4 dB
	300 MHz ~ 1 000 MHz	5.5 dB
	Above 1 GHz	6.7 dB
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (12) of (319)



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.84	9 000	12.07
50	10.01	10 000	12.18
100	10.07	11 000	12.31
200	10.18	12 000	12.42
300	10.25	13 000	12.44
400	10.32	14 000	12.60
500	10.38	15 000	12.85
600	10.41	16 000	12.85
700	10.48	17 000	13.06
800	10.52	18 000	13.08
900	10.58	19 000	13.19
1 000	10.60	20 000	13.25
2 000	10.92	21 000	13.40
3 000	11.15	22 000	13.58
4 000	11.35	23 000	13.58
5 000	11.60	24 000	13.69
6 000	11.66	25 000	13.79
7 000	11.86	26 000	13.94
8 000	11.99	26 500	13.96


Notes:

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum conducted output power

Test setup



Limit

According to §15.407(a), RSS-247(6.2)

FCC

Band	EUT category	Conducted output power limit
UNII-1	Outdoor access point	1 W (30 dBm)
	Indoor access point	
	Fixed point-to-point access point	
	√ Client device	250 mW (23.98 dBm)
UNII-2A	√	250 mW or 11 dBm + 10logB ¹⁾
UNII-2C	√	250 mW or 11 dBm + 10logB ¹⁾
UNII-3	√	1 W (30 dBm)

IC

Band	Maximum e.i.r.p. limit
UNII-1	200 mW or 10 + 10 log10B ²⁾ , dBm
UNII-2A	1 W or 17 dBm + 10logB ²⁾
UNII-2C	1 W or 17 dBm + 10logB ²⁾
UNII-3	1 W (30 dBm)

Note:

- 1) Conducted output power limit B is the 26 dB emission bandwidth.
- 2) Maximum e.i.r.p. limit B is the 99% emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.3.2 and 14.2
 KDB 789033 D02 v02r01 - Section E.2.d) or e)
 KDB 662911 D01 v02r01 – Section E).1)

Test settings**◆ KDB 789033 D02 v02r01****Section E.2.d)****Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span}/\text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0,25) = 6$ dB if the duty cycle is 25%.

Section E.2.e)**Method SA-2 Alternative (power averaging(rms) detection with slow sweep with each spectrum bin averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span}/\text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- (vii) Set detector = power averaging (rms)
- (viii) Perform a single sweep.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power

units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

- (x) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25%.

Section E.3.a)

Method PM (Measurement using an RF average power meter):

- (xi) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five
- (xii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II
- (xiii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (xiv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25%).

Section E.3.b)

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (16) of (319)

**Test results****SISO Conducted Output Power**

Test mode	Band	Frequency (MHz)	Measured output power		Limit (dBm)
			Result (dBm)		
			ANT1	ANT2	
802.11a	UNII 1	5 180	12.23	11.83	23.98
		5 200	12.65	11.90	
		5 240	12.11	11.71	
	UNII 2A	5 260	15.80	13.65	23.95
		5 280	16.22	14.08	
		5 320	15.81	13.80	
	UNII 2C	5 500	16.38	14.20	23.93
		5 580	16.01	13.94	
		5 700	15.72	13.32	
	UNII 3	5 745	12.56	9.90	30.00
		5 785	12.71	9.71	
		5 825	12.43	9.97	
802.11n HT20	UNII 1	5 180	12.22	11.63	23.98
		5 200	12.19	11.74	
		5 240	12.11	11.49	
	UNII 2A	5 260	15.86	13.38	23.98
		5 280	16.09	13.68	
		5 320	15.79	13.67	
	UNII 2C	5 500	16.40	13.80	23.98
		5 580	15.81	13.81	
		5 700	15.54	13.36	
	UNII 3	5 745	12.42	9.63	30.00
		5 785	12.54	9.68	
		5 825	12.27	9.87	
802.11n HT40	UNII 1	5 190	12.17	13.45	23.98
		5 230	13.42	13.15	
	UNII 2A	5 270	14.85	14.53	23.98
		5 310	11.90	12.09	
	UNII 2C	5 510	14.28	14.72	23.98
		5 590	14.30	14.71	
		5 670	14.83	14.67	
	UNII 3	5 755	12.41	9.74	30.00
		5 795	12.58	9.82	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (17) of (319)

KCTL

Test mode	Band	Frequency (MHz)	Measured output power		Limit (dBm)
			Result (dBm)		
			ANT1	ANT2	
802.11ac VHT20	UNII 1	5 180	12.17	11.61	23.98
		5 200	12.40	11.61	
		5 240	12.01	11.41	
	UNII 2A	5 260	15.94	13.37	23.98
		5 280	16.00	13.78	
		5 320	15.77	13.51	
	UNII 2C	5 500	16.26	14.18	23.98
		5 580	15.90	13.94	
		5 700	15.61	13.37	
	UNII 3	5 745	12.38	9.77	30.00
		5 785	12.52	9.55	
		5 825	12.40	9.80	
802.11ac VHT40	UNII 1	5 190	12.28	13.55	23.98
		5 230	13.52	13.25	
	UNII 2A	5 270	14.77	14.40	23.98
		5 310	11.70	12.09	
	UNII 2C	5 510	14.21	13.84	23.98
		5 590	14.26	14.58	
		5 670	14.79	14.76	
	UNII 3	5 755	12.55	9.89	30.00
		5 795	12.64	10.04	
	802.11ac VHT80	UNII 1	5 210	11.06	12.64
UNII 2A		5 290	10.88	11.83	23.98
UNII 2C		5 530	10.45	11.02	23.98
		5 610	12.60	13.10	
UNII 3		5 775	12.70	9.85	30.00

Note.

1. DCF is not compensated to average result because duty cycle is more than 98%

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (18) of (319)

**SISO e.i.r.p.**

Test mode	Band	Frequency (MHz)	Measured output power						MAX e.i.r.p Limit (dBm)	
			Conducted output power (dBm)		ANT gain (dBi)		MAX e.i.r.p (dBm)		ANT1	ANT2
			ANT1	ANT2	ANT1	ANT2	ANT1	ANT2		
802.11a	UNII 1	5 180	12.23	11.83	1.70	1.70	13.93	13.53	22.16	22.16
		5 200	12.65	11.90			14.35	13.60	22.17	22.17
		5 240	12.11	11.71			13.81	13.41	22.17	22.17
	UNII 2A	5 260	15.80	13.65	1.20	1.20	17.00	14.85	29.20	29.17
		5 280	16.22	14.08			17.42	15.28	29.20	29.17
		5 320	15.81	13.80			17.01	15.00	29.21	29.18
	UNII 2C	5 500	16.38	14.20	1.10	1.10	17.48	15.30	29.20	29.16
		5 580	16.01	13.94			17.11	15.04	29.18	29.17
		5 700	15.72	13.32			16.82	14.42	29.17	29.17
	UNII 3	5 745	12.56	9.90	1.00	1.00	13.56	10.90	30.00	
		5 785	12.71	9.71			13.71	10.71		
		5 825	12.43	9.97			13.43	10.97		
802.11n HT20	UNII 1	5 180	12.22	11.63	1.70	1.70	13.92	13.33	22.46	22.45
		5 200	12.19	11.74			13.89	13.44	22.45	22.46
		5 240	12.11	11.49			13.81	13.19	22.45	22.46
	UNII 2A	5 260	15.86	13.38	1.20	1.20	17.06	14.58	29.49	29.46
		5 280	16.09	13.68			17.29	14.88	29.49	29.45
		5 320	15.79	13.67			16.99	14.87	29.49	29.46
	UNII 2C	5 500	16.40	13.80	1.10	1.10	17.50	14.90	29.50	29.45
		5 580	15.81	13.81			16.91	14.91	29.48	29.46
		5 700	15.54	13.36			16.64	14.46	29.46	29.46
	UNII 3	5 745	12.42	9.63	1.00	1.00	13.42	10.63	30.00	
		5 785	12.54	9.68			13.54	10.68		
		5 825	12.27	9.87			13.27	10.87		
802.11n HT40	UNII 1	5 190	12.17	13.45	1.70	1.70	13.87	15.15	23.01	
		5 230	13.42	13.15			15.12	14.85		
	UNII 2A	5 270	14.85	14.53	1.20	1.20	16.05	15.73	30.00	
		5 310	11.90	12.09			13.10	13.29		
	UNII 2C	5 510	14.28	14.72	1.10	1.10	15.38	15.82		
		5 590	14.30	14.71			15.40	15.81		
		5 670	14.83	14.67			15.93	15.77		
	UNII 3	5 755	12.41	9.74	1.00	1.00	13.41	10.74		
		5 795	12.58	9.82			13.58	10.82		

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (19) of (319)

KCTL

Test mode	Band	Frequency (MHz)	Measured output power						MAX e.i.r.p Limit (dBm)	
			Reading (dBm)		ANT gain (dBi)		MAX e.i.r.p (dBm)		ANT1	ANT2
			ANT1	ANT1	ANT1	ANT2	ANT1	ANT2		
802.11ac VHT20	UNII 1	5 180	12.17	11.61	1.70	1.70	13.87	13.31	22.45	22.45
		5 200	12.40	11.61			14.10	13.31	22.46	22.45
		5 240	12.01	11.41			13.71	13.11	22.45	22.45
	UNII 2A	5 260	15.94	13.37	1.20	1.20	17.14	14.57	29.48	29.46
		5 280	16.00	13.78			17.20	14.98	29.48	29.45
		5 320	15.77	13.51			16.97	14.71	29.49	29.45
	UNII 2C	5 500	16.26	14.18	1.10	1.10	17.36	15.28	29.48	29.46
		5 580	15.90	13.94			17.00	15.04	29.46	29.45
		5 700	15.61	13.37			16.71	14.47	29.48	29.45
	UNII 3	5 745	12.38	9.77	1.00	1.00	13.38	10.77	30.00	
		5 785	12.52	9.55			13.52	10.55		
		5 825	12.40	9.80			13.40	10.80		
802.11ac VHT40	UNII 1	5 190	12.28	13.55	1.70	1.70	13.98	15.25	23.01	
		5 230	13.52	13.25			15.22	14.95		
	UNII 2A	5 270	14.77	14.40	1.20	1.20	15.97	15.60	30.00	
		5 310	11.70	12.09			12.90	13.29		
	UNII 2C	5 510	14.21	13.84	1.10	1.10	15.31	14.94	30.00	
		5 590	14.26	14.58			15.36	15.68		
		5 670	14.79	14.76			15.89	15.86		
	UNII 3	5 755	12.55	9.89	1.00	1.00	13.55	10.89	30.00	
		5 795	12.64	10.04			13.64	11.04		
802.11ac VHT80	UNII 1	5 210	11.06	12.64	1.70	1.70	12.76	14.34	23.01	
	UNII 2A	5 290	10.88	11.83	1.20	1.20	12.08	13.03	30.00	
	UNII 2C	5 530	10.45	11.02	1.10	1.10	11.55	12.12		
		5 610	12.60	13.10			13.70	14.20		
	UNII 3	5 775	12.70	9.85	1.00	1.00	13.70	10.85		

Notes:

1. e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted output power (dBm) + Antenna gain (dBi)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (20) of (319)

KCTL**MIMO Conducted Output Power**

Test mode	Band	Frequency (MHz)	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			ANT1	ANT2			
802.11a	UNII 1	5 180	12.69	11.56	-	15.17	23.98
		5 200	12.85	11.65	-	15.30	
		5 240	12.44	11.32	-	14.93	
	UNII 2A	5 260	11.55	10.57	-	14.10	23.94
		5 280	11.73	10.93	-	14.36	
		5 320	11.55	10.59	-	14.11	
	UNII 2C	5 500	11.79	10.80	-	14.33	23.94
		5 580	11.46	10.80	-	14.15	
		5 700	11.42	10.20	-	13.86	
	UNII 3	5 745	8.70	7.50	-	11.15	30.00
		5 785	8.80	7.24	-	11.10	
		5 825	8.57	7.37	-	11.02	
802.11n HT20	UNII 1	5 180	12.60	11.40	-	15.05	23.98
		5 200	12.77	11.46	-	15.17	
		5 240	12.55	11.39	-	15.02	
	UNII 2A	5 260	11.34	10.42	-	13.91	23.98
		5 280	11.61	10.83	-	14.25	
		5 320	11.37	10.53	-	13.98	
	UNII 2C	5 500	11.49	10.72	-	14.13	23.98
		5 580	11.18	10.79	-	14.00	
		5 700	11.22	10.22	-	13.76	
	UNII 3	5 745	8.82	7.03	-	11.03	30.00
		5 785	8.88	7.05	-	11.07	
		5 825	8.48	7.28	-	10.93	
802.11n HT40	UNII 1	5 190	11.69	10.60	-	14.19	23.98
		5 230	14.49	13.34	-	16.96	
	UNII 2A	5 270	13.58	12.57	-	16.11	23.98
		5 310	10.99	10.18	-	13.61	
	UNII 2C	5 510	13.73	12.89	-	16.34	23.98
		5 590	13.05	12.66	-	15.87	
		5 670	13.56	12.98	-	16.29	
	UNII 3	5 755	8.49	6.22	-	10.51	30.00
		5 795	8.26	6.67	-	10.55	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (21) of (319)

KCTL

Test mode	Band	Frequency (MHz)	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			ANT1	ANT2			
802.11ac VHT20	UNII 1	5 180	12.36	11.57	-	14.99	24.00
		5 200	12.48	11.33	-	14.95	
		5 240	12.30	11.36	-	14.87	
	UNII 2A	5 260	11.45	10.38	-	13.96	24.00
		5 280	11.67	10.81	-	14.27	
		5 320	11.40	10.51	-	13.99	
	UNII 2C	5 500	11.71	10.74	-	14.26	24.00
		5 580	11.36	10.68	-	14.04	
		5 700	11.16	10.38	-	13.80	
	UNII 3	5 745	8.83	7.01	-	11.02	30.00
		5 785	8.72	7.26	-	11.06	
		5 825	8.61	7.09	-	10.93	
802.11ac VHT40	UNII 1	5 190	12.24	11.07	-	14.70	24.00
		5 230	14.48	13.57	-	17.06	
	UNII 2A	5 270	12.75	11.46	-	15.16	24.00
		5 310	10.75	10.29	-	13.54	
	UNII 2C	5 510	13.71	12.99	-	16.38	24.00
		5 590	13.11	13.08	-	16.11	
		5 670	13.64	12.99	-	16.34	
	UNII 3	5 755	8.36	6.55	-	10.56	30.00
		5 795	8.02	6.35	-	10.28	
	802.11ac VHT80	UNII 1	5 210	11.07	10.32	-	13.72
UNII 2A		5 290	10.34	9.27	-	12.85	24.00
UNII 2C		5 530	9.55	8.98	-	12.28	24.00
		5 610	12.42	12.03	-	15.24	
UNII 3		5 775	8.83	6.92	-	10.99	30.00

Note.

1. Result(dBm) = $10\log(10^{(\text{ANT } 1/10)} + 10^{(\text{ANT } 2/10)}) + \text{D.C.F}$

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (22) of (319)

KCTL**MIMO e.i.r.p.**

Test mode	Band	Frequency (MHz)	Measured output power			MAX e.i.r.p Limit (dBm)
			Conducted output Power (dBm)	ANT gain (dBi)	MAX e.i.r.p (dBm)	
802.11a	UNII 1	5 180	15.17	4.71	19.88	22.16
		5 200	15.30		20.01	22.14
		5 240	14.93		19.64	22.14
	UNII 2A	5 260	14.10	4.21	18.31	29.16
		5 280	14.36		18.57	29.14
		5 320	14.11		18.32	29.14
	UNII 2C	5 500	14.33	4.11	18.44	29.14
		5 580	14.15		18.26	29.14
		5 700	13.86		17.97	29.14
	UNII 3	5 745	11.15	4.01	15.16	30.00
		5 785	11.10		15.11	
		5 825	11.02		15.03	
802.11n HT20	UNII 1	5 180	15.05	4.71	19.76	22.44
		5 200	15.17		19.88	22.45
		5 240	15.02		19.73	22.45
	UNII 2A	5 260	13.91	4.21	18.12	29.45
		5 280	14.25		18.46	29.45
		5 320	13.98		18.19	29.45
	UNII 2C	5 500	14.13	4.11	18.24	29.45
		5 580	14.00		18.11	29.45
		5 700	13.76		17.87	29.45
	UNII 3	5 745	11.03	4.01	15.04	30.00
		5 785	11.07		15.08	
		5 825	10.93		14.94	
802.11n HT40	UNII 1	5 190	14.19	4.71	18.90	23.01
		5 230	16.96		21.67	
	UNII 2A	5 270	16.11	4.21	20.32	30.00
		5 310	13.61		17.82	
	UNII 2C	5 510	16.34	4.11	20.45	
		5 590	15.87		19.98	
		5 670	16.29		20.40	
	UNII 3	5 755	10.51	4.01	14.52	
5 795		10.55	14.56			

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (23) of (319)

KCTL

Test mode	Band	Frequency (MHz)	Measured output power			MAX e.i.r.p Limit (dBm)
			Conducted output Power (dBm)	ANT gain (dBi)	MAX e.i.r.p (dBm)	
802.11ac VHT20	UNII 1	5 180	14.99	4.71	19.70	22.45
		5 200	14.95		19.66	
		5 240	14.87		19.58	
	UNII 2A	5 260	13.96	4.21	18.17	29.45
		5 280	14.27		18.48	
		5 320	13.99		18.20	
	UNII 2C	5 500	14.26	4.11	18.37	29.45
		5 580	14.04		18.15	
		5 700	13.80		17.91	
	UNII 3	5 745	11.02	4.01	15.04	30.00
		5 785	11.06		15.07	
		5 825	10.93		14.94	
802.11ac VHT40	UNII 1	5 190	14.70	4.71	19.41	23.01
		5 230	17.06		21.77	
	UNII 2A	5 270	15.16	4.21	19.37	30.00
		5 310	13.54		17.75	
	UNII 2C	5 510	16.38	4.11	20.49	
		5 590	16.11		20.22	
		5 670	16.34		20.45	
	UNII 3	5 755	10.56	4.01	14.57	
		5 795	10.28		14.29	
	802.11ac VHT80	UNII 1	5 210	13.72	4.71	18.43
UNII 2A		5 290	12.85	4.21	17.06	
UNII 2C		5 530	12.28	4.11	16.39	
		5 610	15.24		19.35	
UNII 3		5 775	10.99	4.01	15.00	

Notes:

1. e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted output power (dBm) + Antenna gain (dBi)


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (24) of (319)



In order to simplify the report, attached plots were only MIMO
MIMO ANT 1

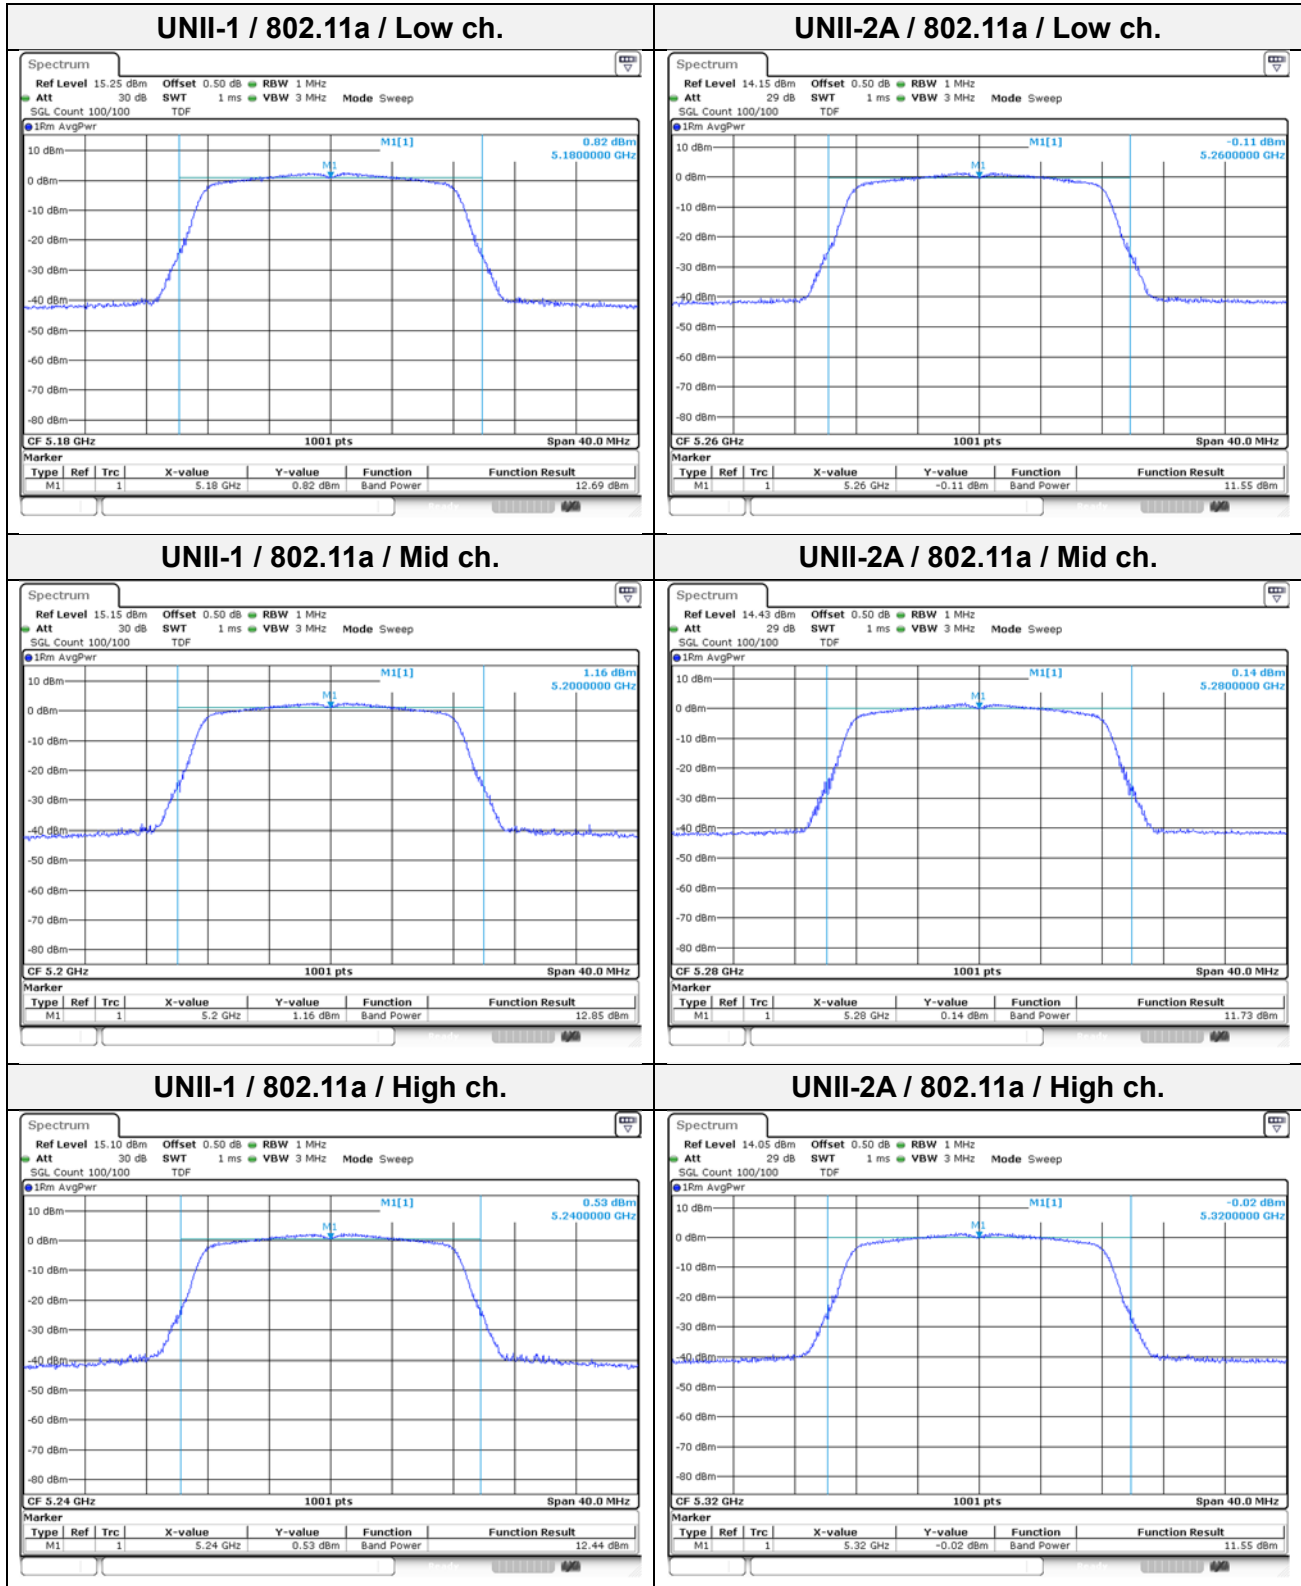


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (25) of (319)




UNII-2C / 802.11a / Low ch.

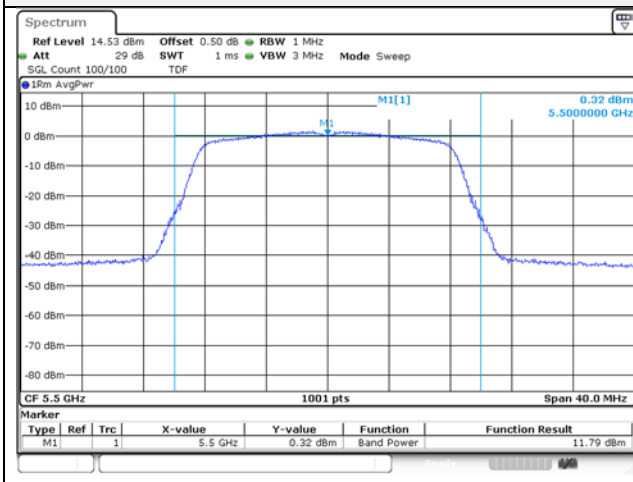


UNII-3 / 802.11a / Low ch.

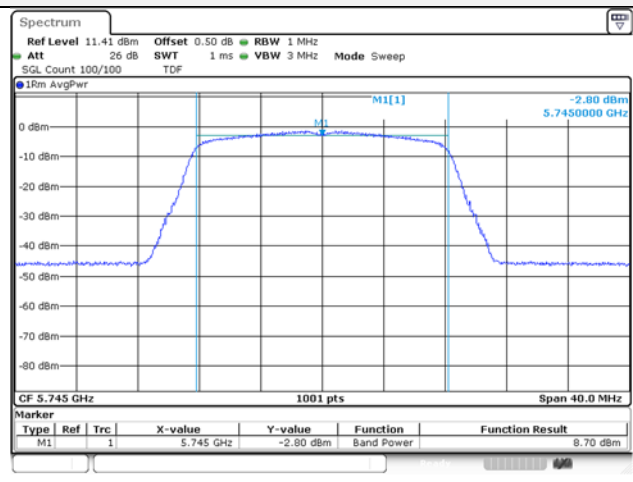


UNII-2C / 802.11a / Mid ch.

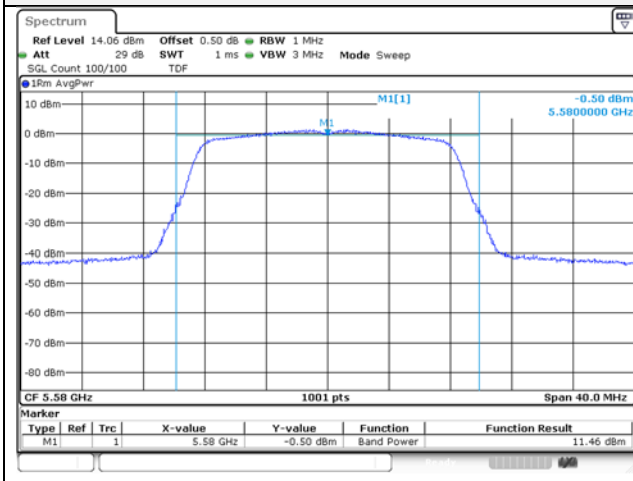


UNII-3 / 802.11a / Mid ch.

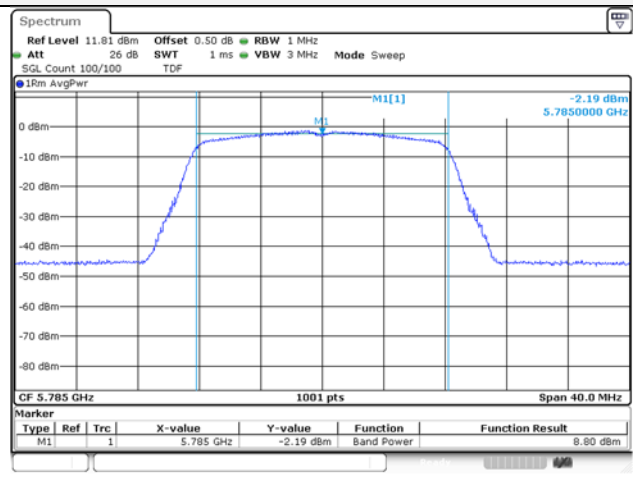

UNII-2C / 802.11a / High ch.

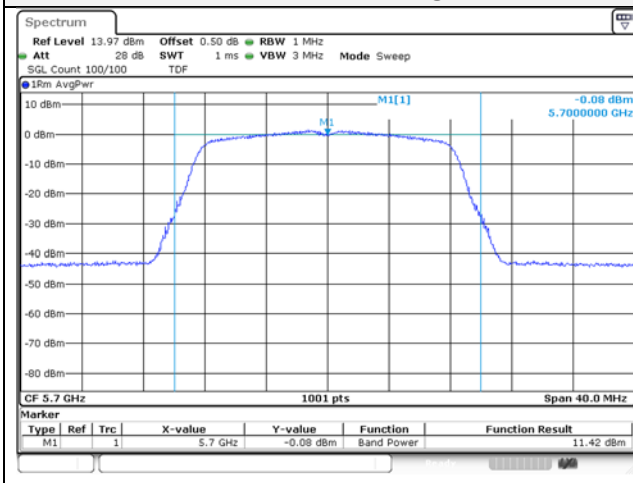

UNII-3 / 802.11a / High ch.

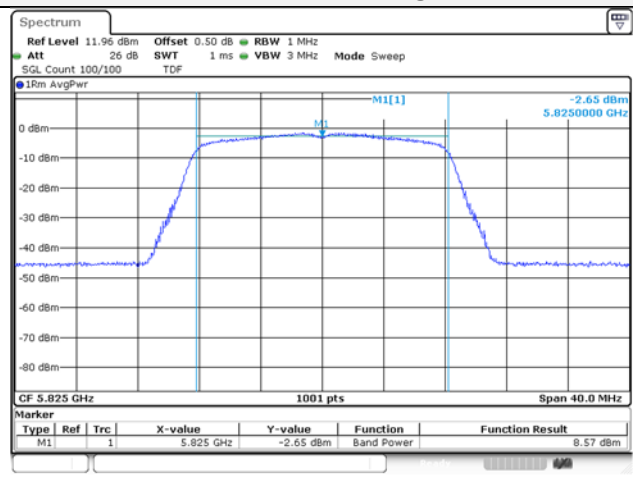


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (26) of (319)




UNII-1 / 802.11n HT 20 / Low ch.

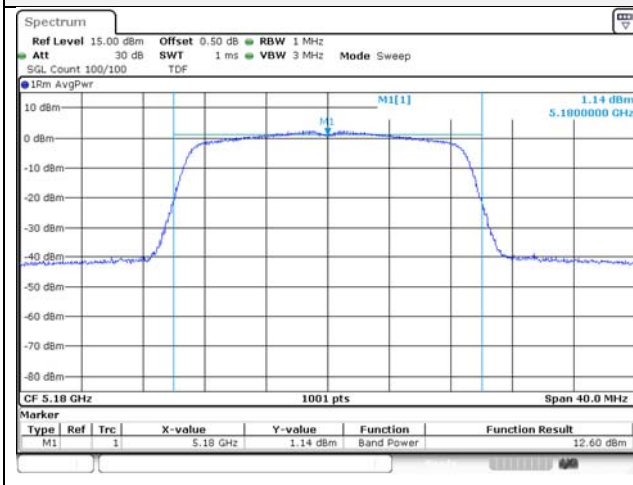


UNII-2A / 802.11n HT 20 / Low ch.

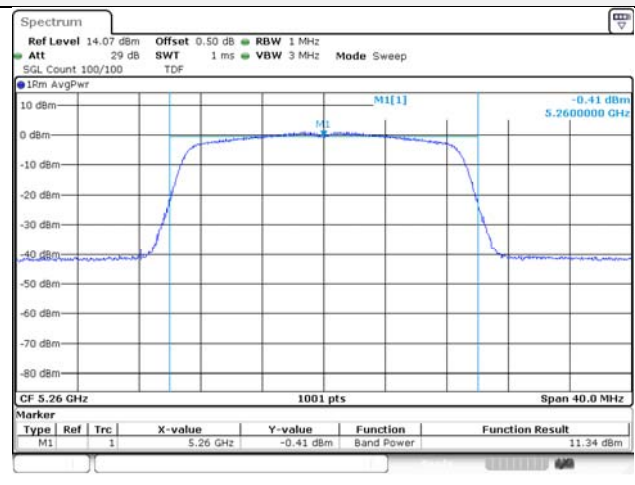


UNII-1 / 802.11n HT 20 / Mid ch.

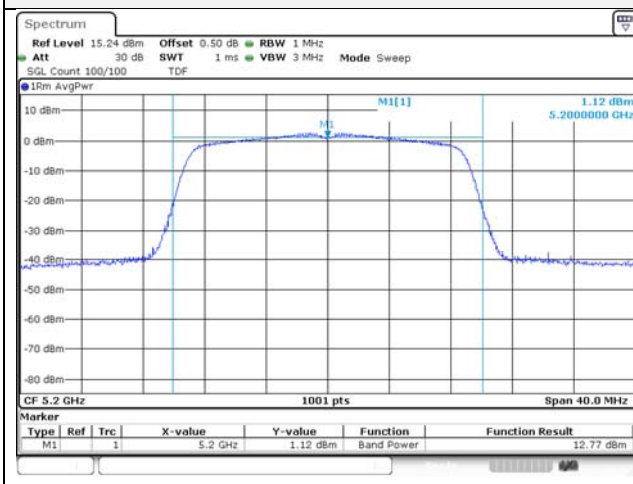


UNII-2A / 802.11n HT 20 / Mid ch.

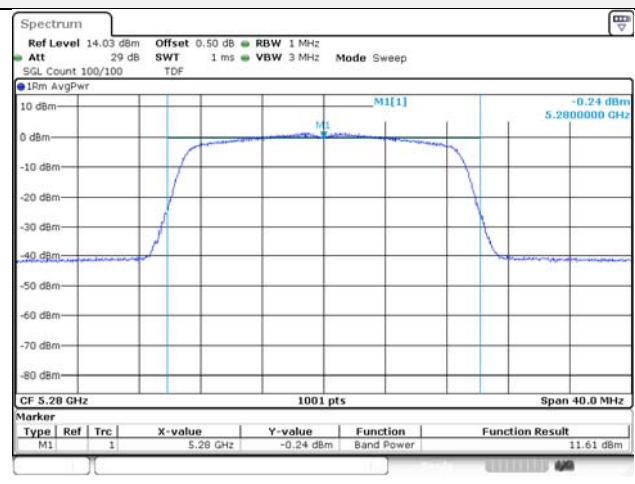

UNII-1 / 802.11n HT 20 / High ch.

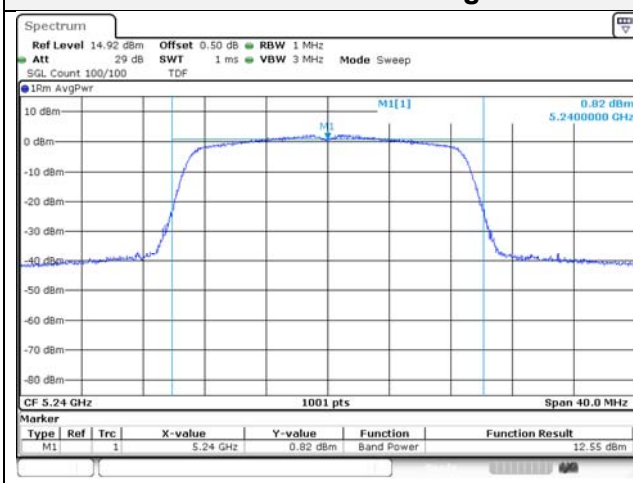

UNII-2A / 802.11n HT 20 / High ch.

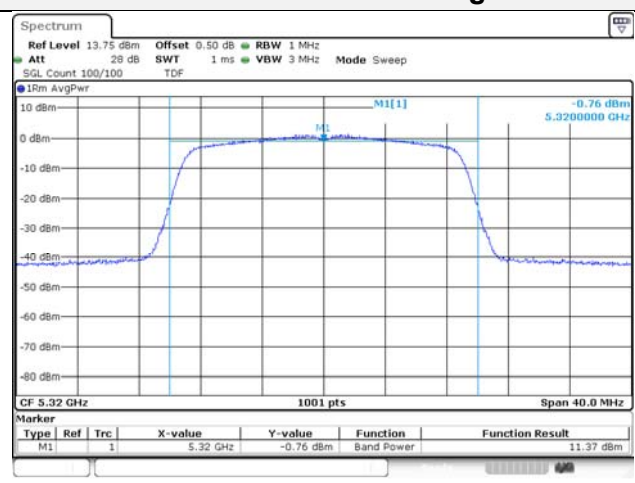


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (27) of (319)




UNII-2C / 802.11n HT 20 / Low ch.

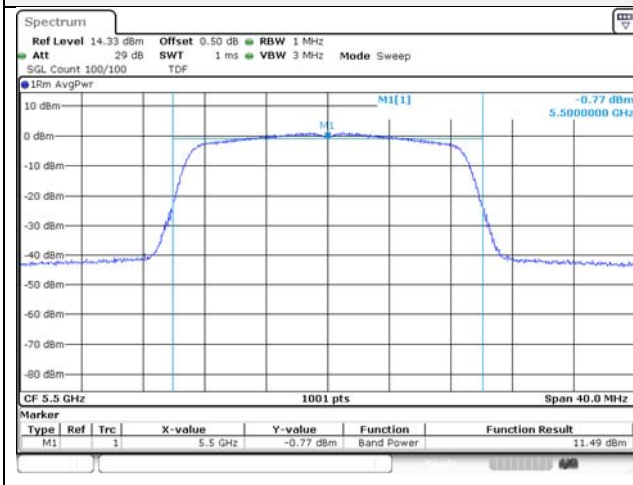


UNII-3 / 802.11n HT 20 / Low ch.

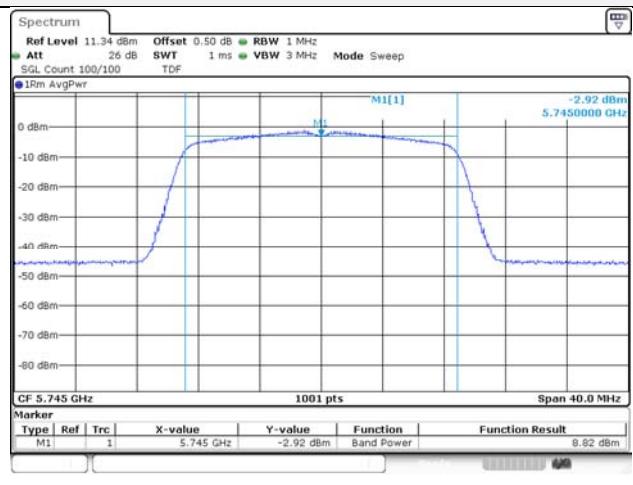


UNII-2C / 802.11n HT 20 / Mid ch.

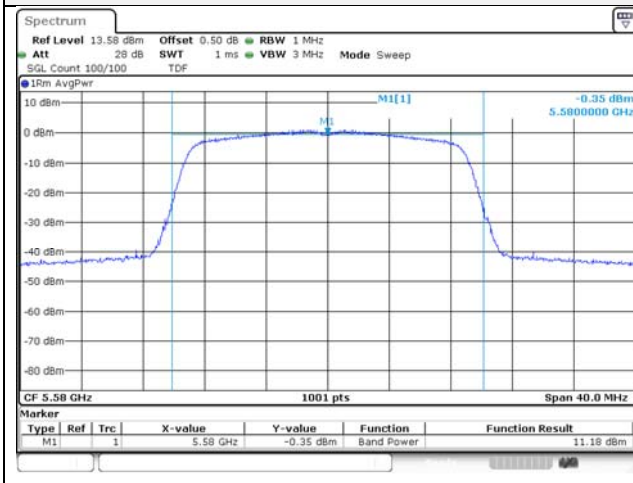


UNII-3 / 802.11n HT 20 / Mid ch.

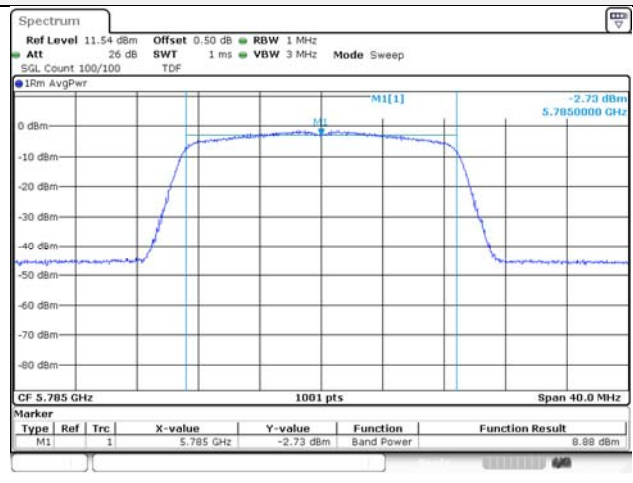

UNII-2C / 802.11n HT 20 / High ch.

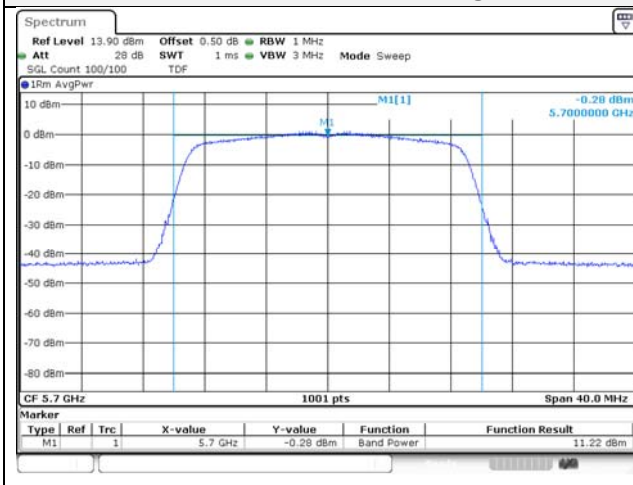

UNII-3 / 802.11n HT 20 / High ch.

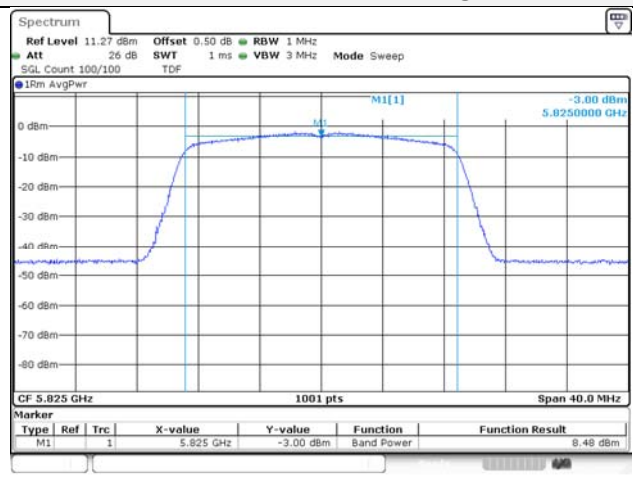


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (28) of (319)




UNII-1 / 802.11n HT 40 / Low ch.

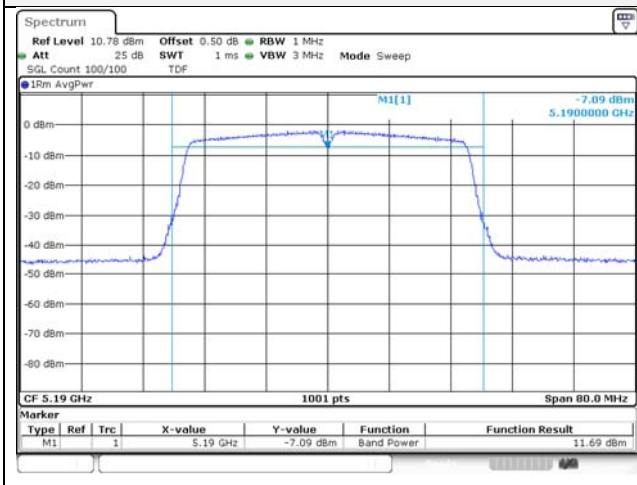


UNII-2A / 802.11n HT 40 / Low ch.

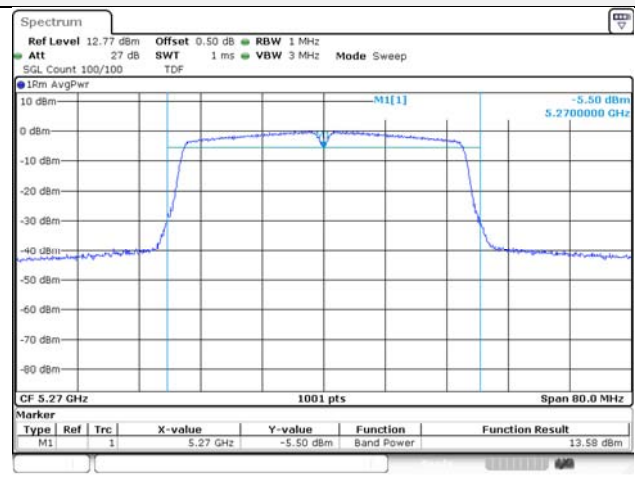

UNII-1 / 802.11n HT 40 / High ch.

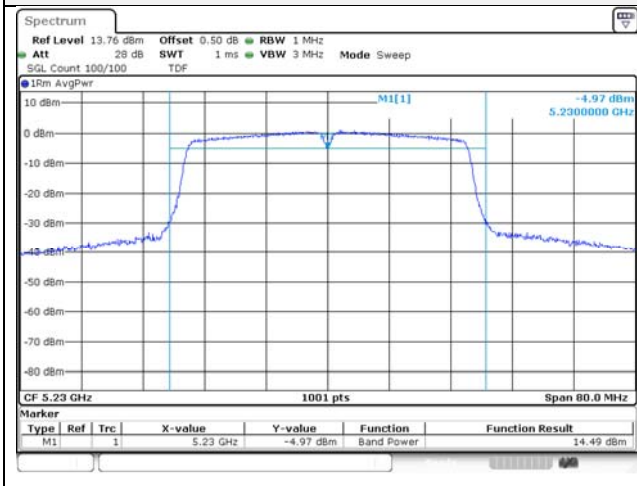

UNII-2A / 802.11n HT 40 / High ch.

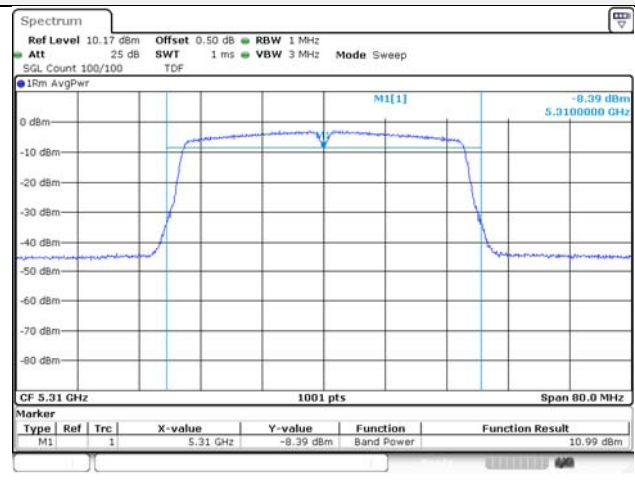


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (29) of (319)




UNII-2C / 802.11n HT 40 / Low ch.

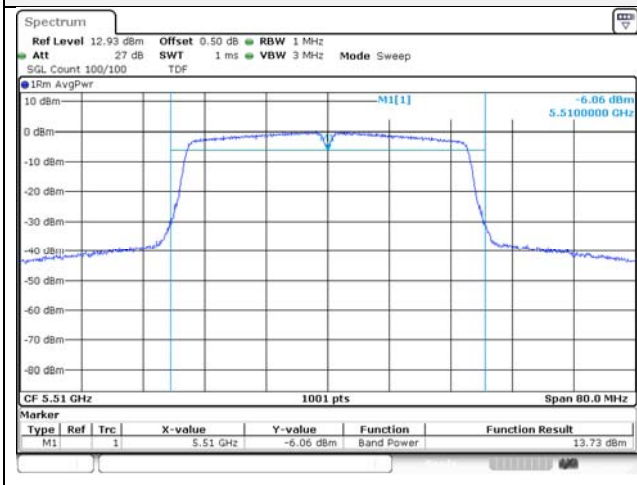


UNII-3 / 802.11n HT 40 / Low ch.

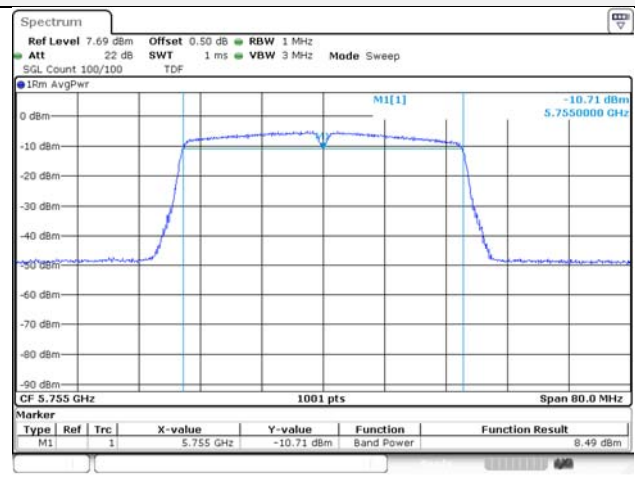


UNII-2C / 802.11n HT 40 / Mid ch.

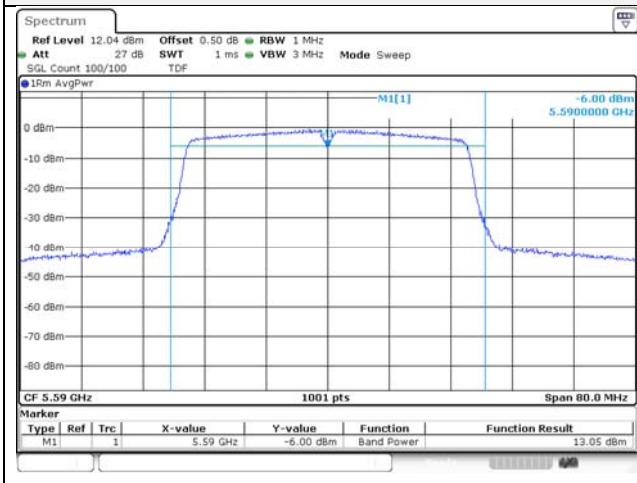

UNII-3 / 802.11n HT 40 / High ch.

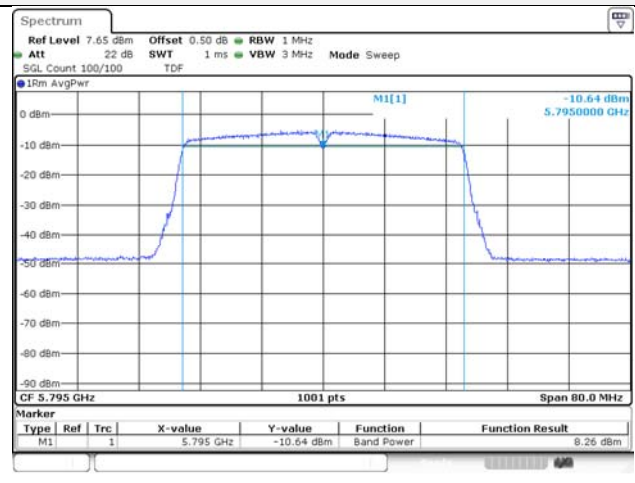

UNII-2C / 802.11n HT 40 / High ch.

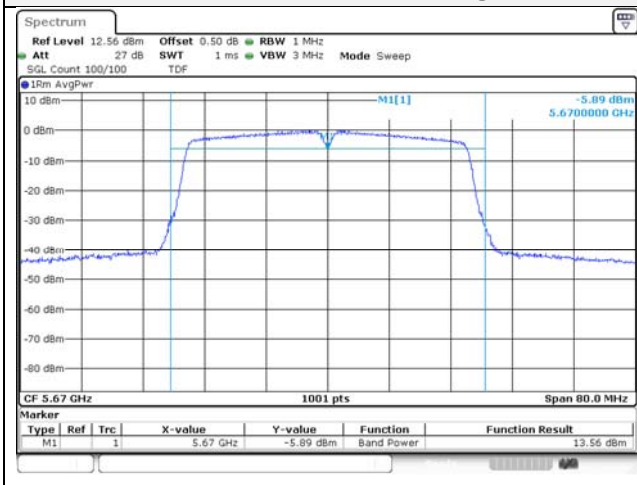

Blank


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (30) of (319)




UNII-1 / 802.11ac VHT 20 / Low ch.

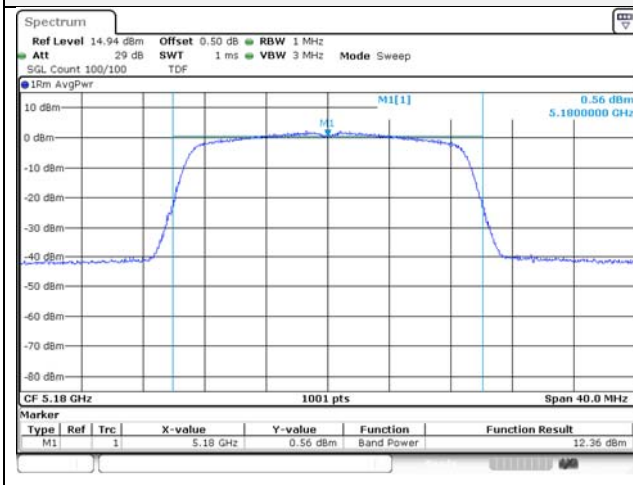


UNII-2A / 802.11ac VHT 20 / Low ch.

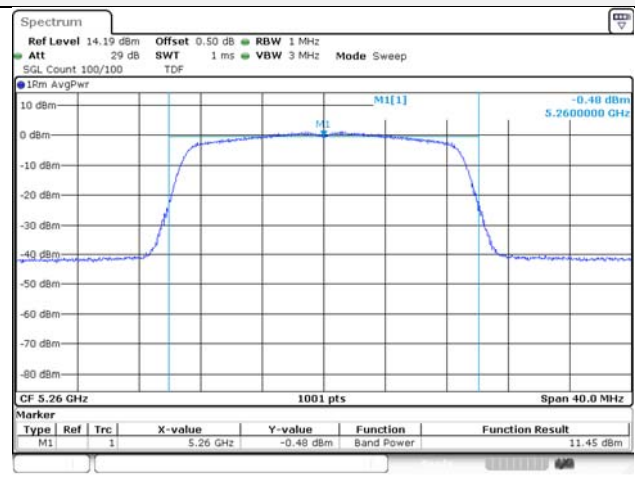


UNII-1 / 802.11ac VHT 20 / Mid ch.

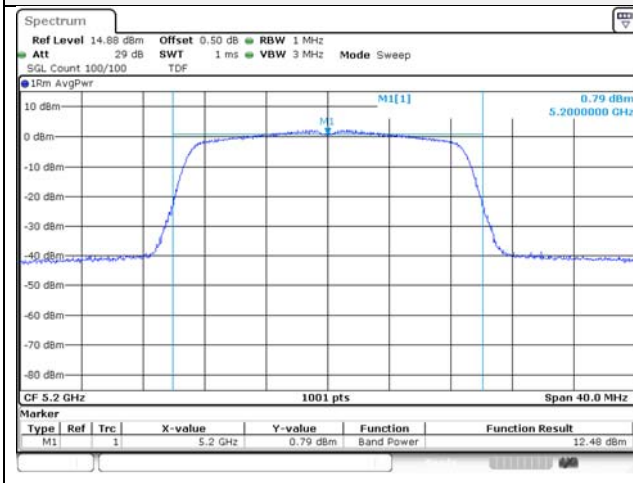


UNII-2A / 802.11ac VHT 20 / Mid ch.

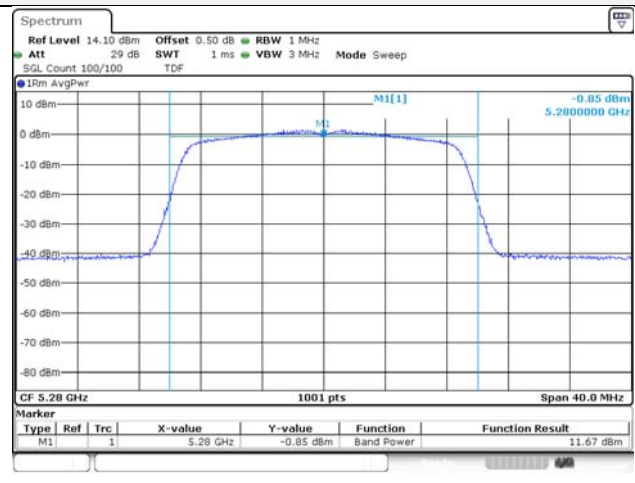

UNII-1 / 802.11ac VHT 20 / High ch.

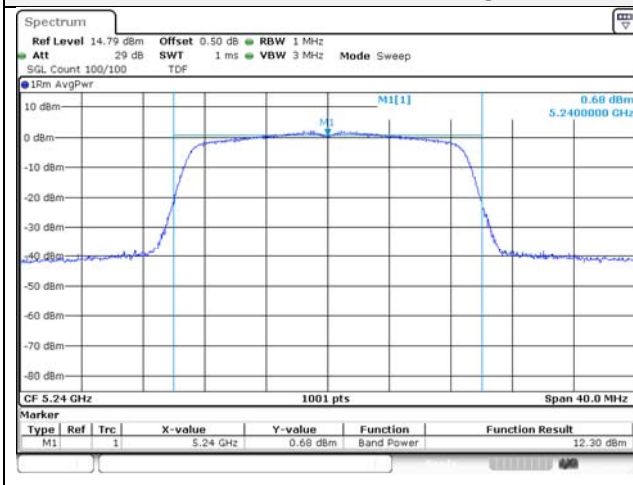

UNII-2A / 802.11ac VHT 20 / High ch.

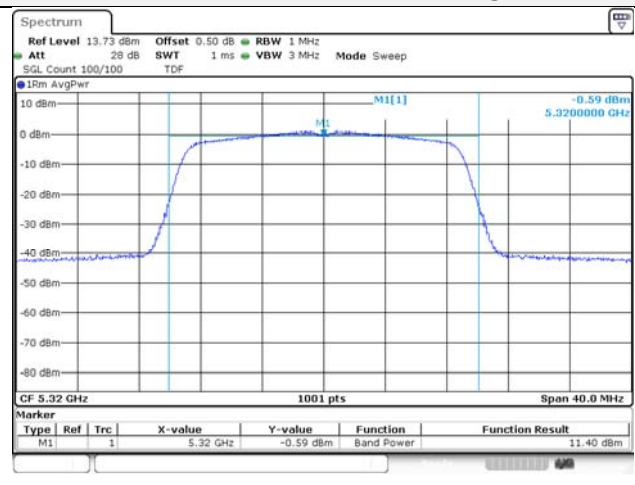


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (31) of (319)




UNII-2C / 802.11ac VHT 20 / Low ch.

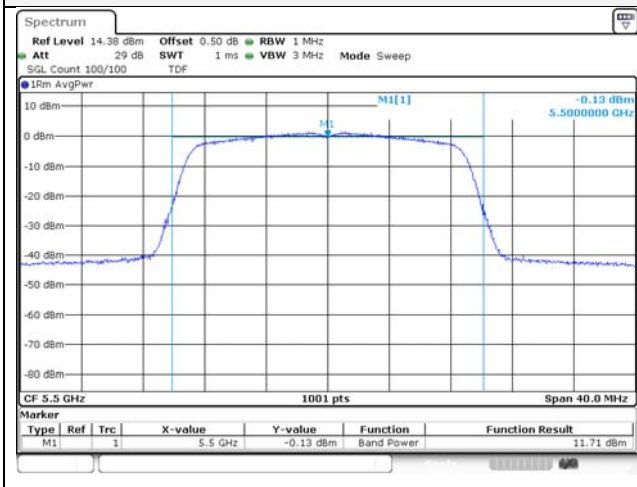


UNII-3 / 802.11ac VHT 20 / Low ch.

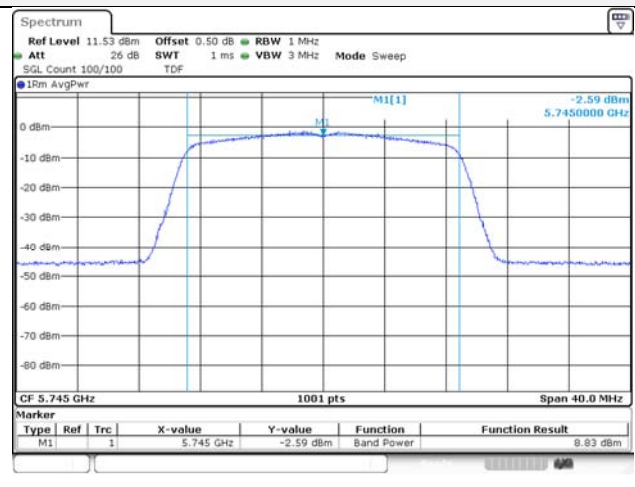


UNII-2C / 802.11ac VHT 20 / Mid ch.

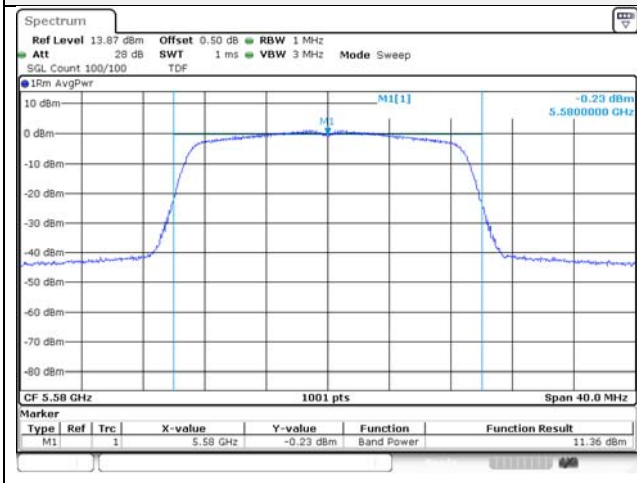


UNII-3 / 802.11ac VHT 20 / Mid ch.

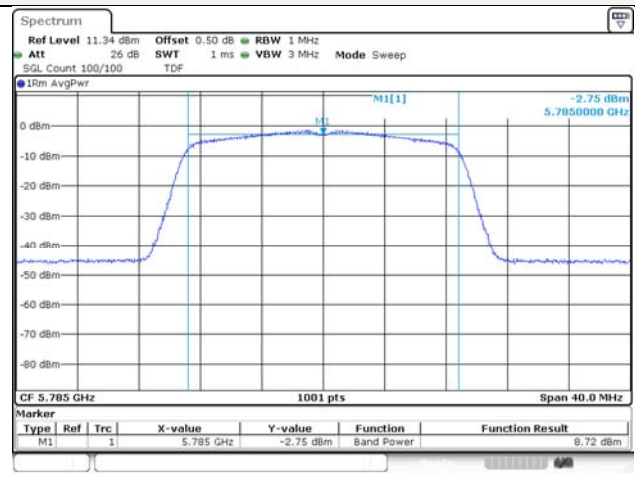

UNII-2C / 802.11ac VHT 20 / High ch.

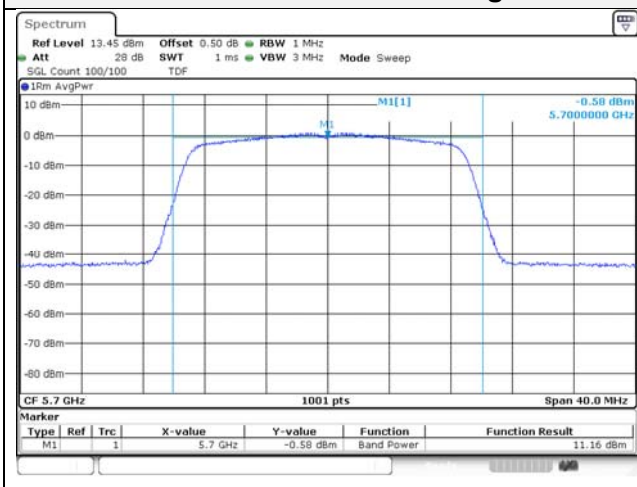

UNII-3 / 802.11ac VHT 20 / High ch.

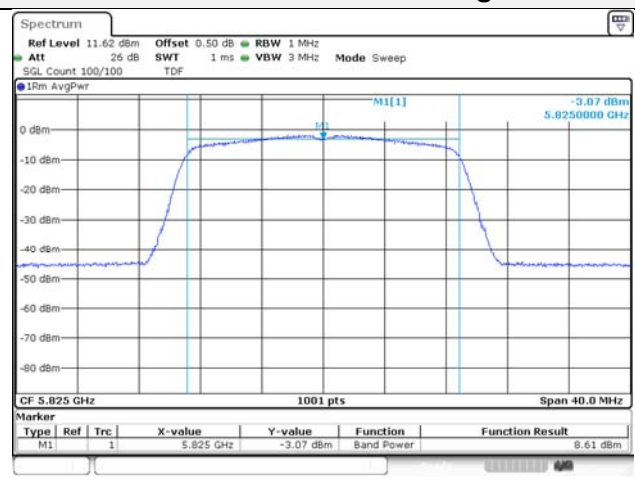


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (32) of (319)




UNII-1 / 802.11ac VHT40 / Low ch.

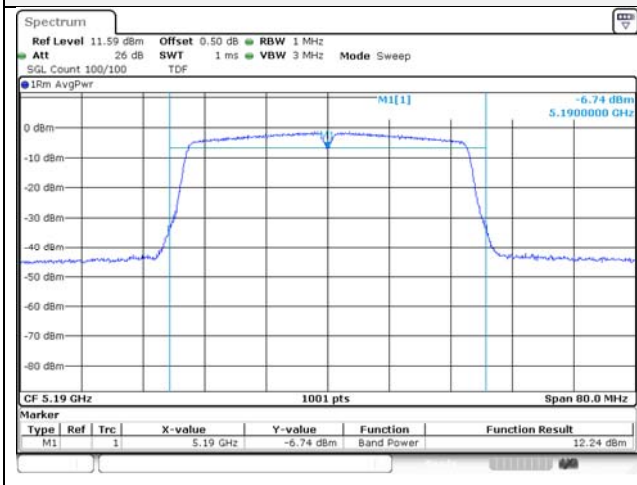


UNII-2A / 802.11ac VHT40 / Low ch.

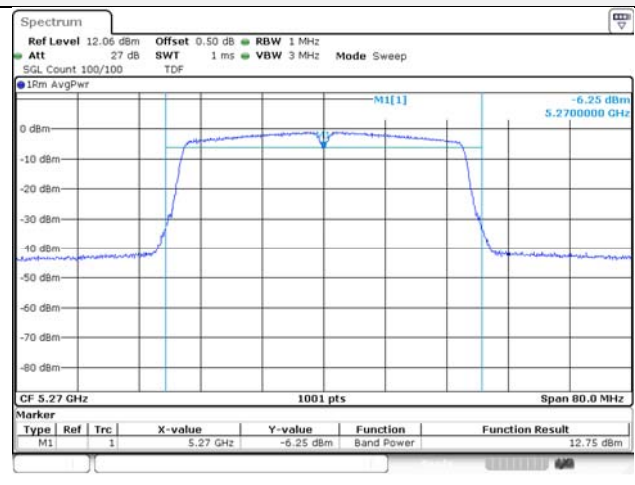

UNII-1 / 802.11ac VHT40 / High ch.

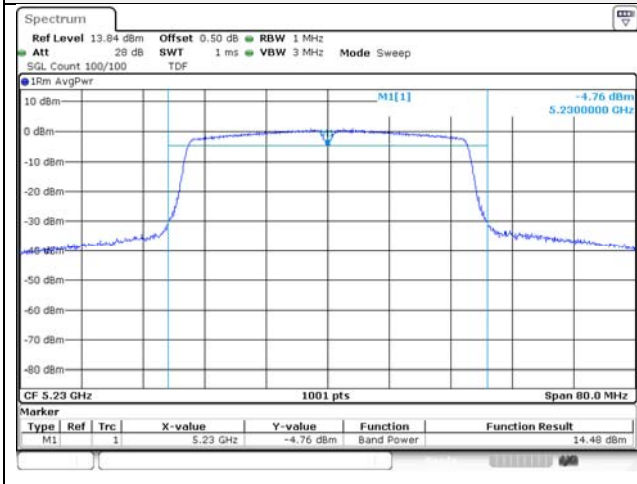

UNII-2A / 802.11ac VHT40 / High ch.

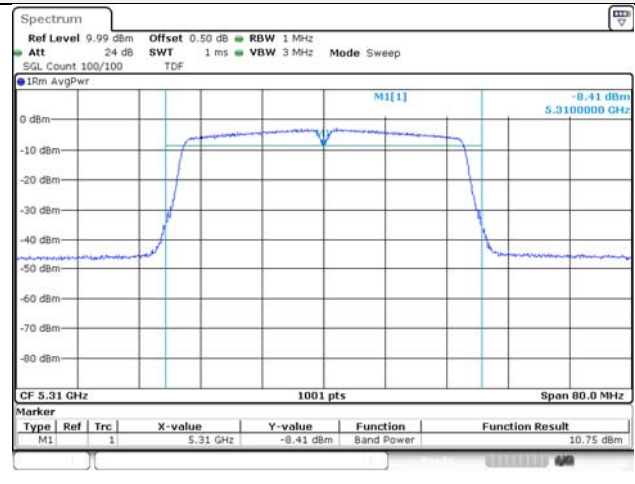


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (33) of (319)




UNII-2C / 802.11ac VHT40 / Low ch.

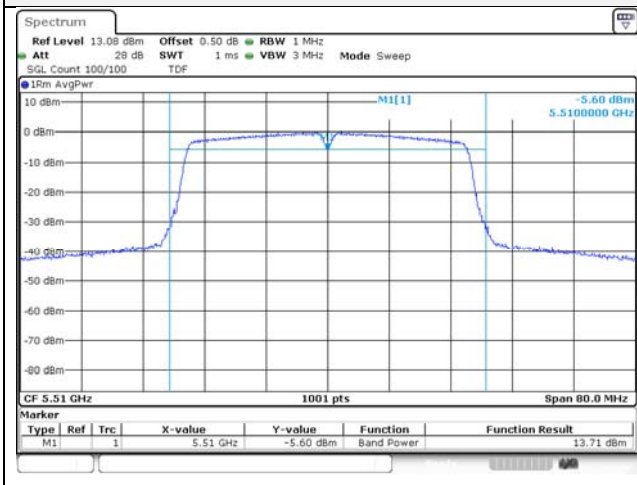


UNII-3 / 802.11ac VHT40 / Low ch.

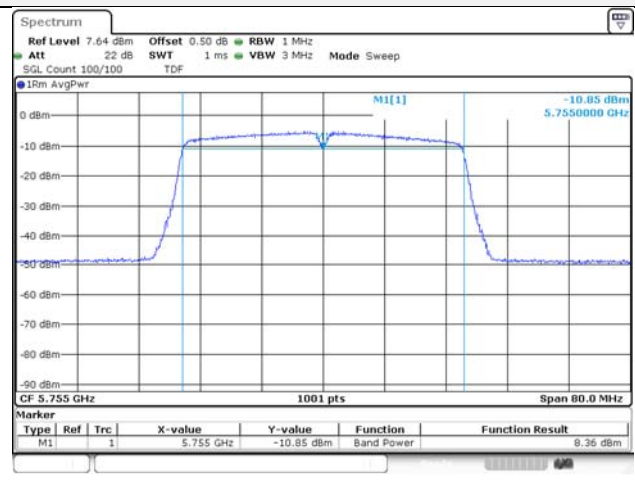


UNII-2C / 802.11ac VHT40 / Mid ch.

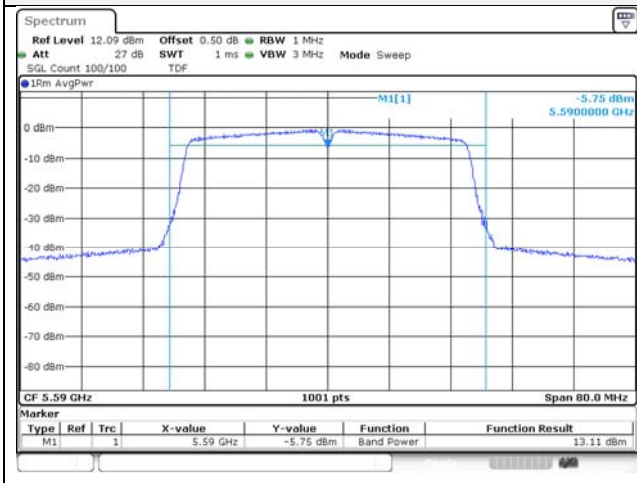

UNII-3 / 802.11ac VHT40 / High ch.

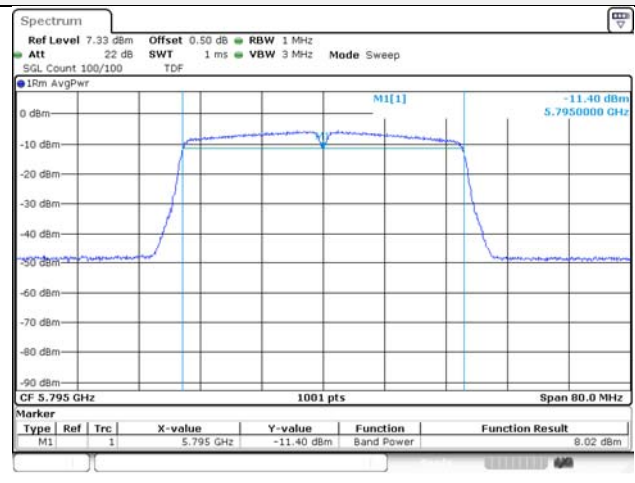

UNII-2C / 802.11ac VHT40 / High ch.

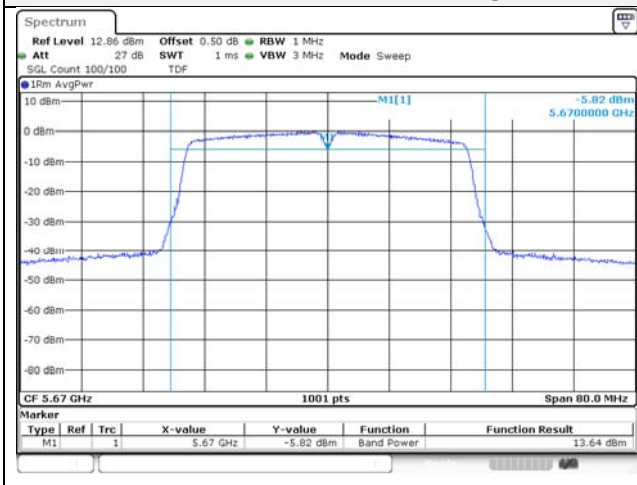

Blank


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (34) of (319)




UNII-1 / 802.11ac VHT80 / Low ch.

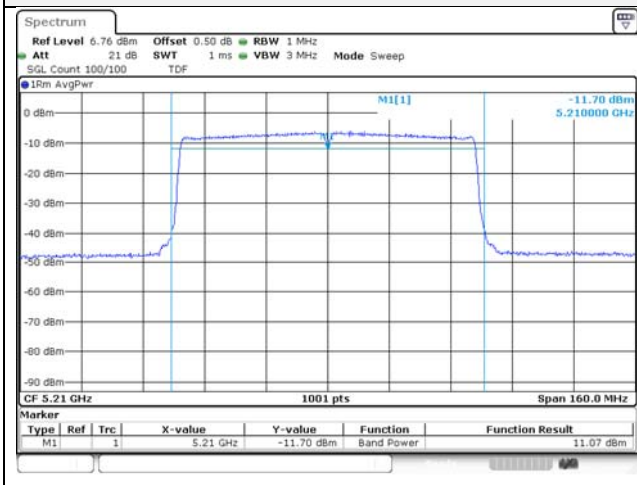


UNII-2A / 802.11ac VHT80 / Low ch.

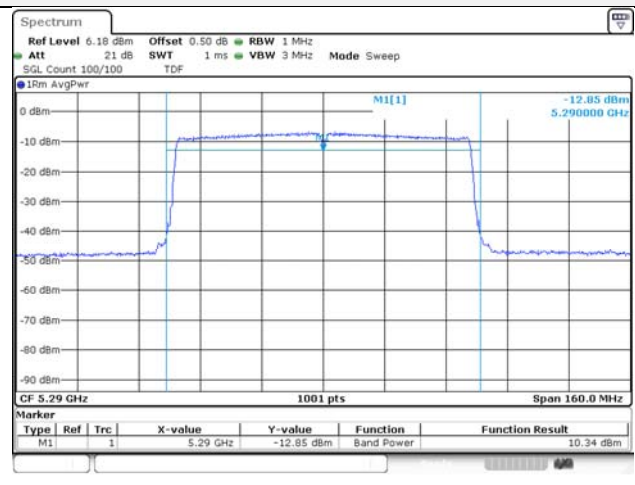


UNII-2C / 802.11ac VHT80 / Low ch.

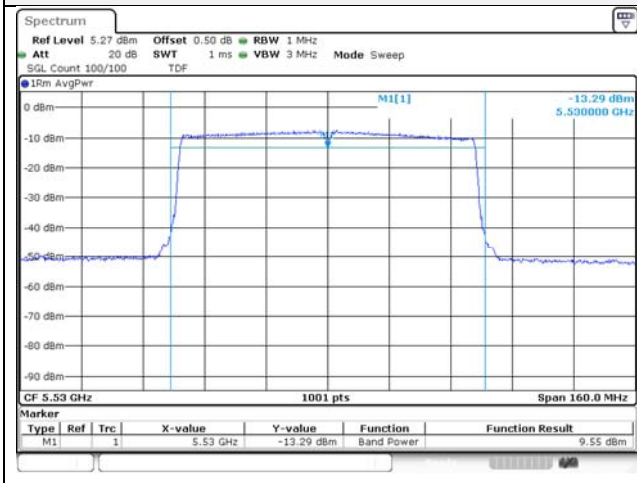

UNII-2C / 802.11ac VHT80 / High ch.

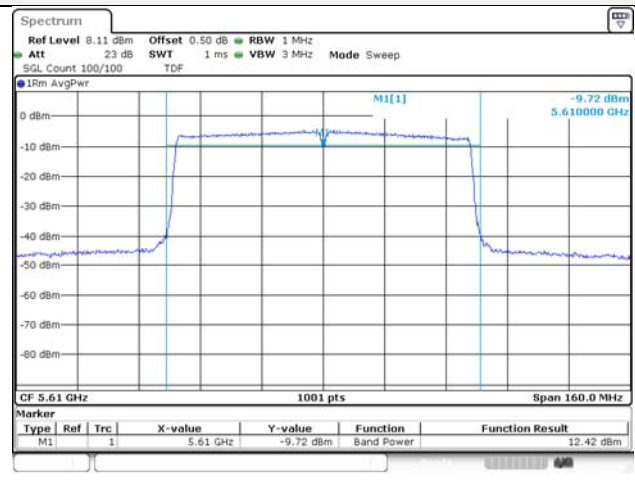

UNII-3 / 802.11ac VHT80 / Low ch.

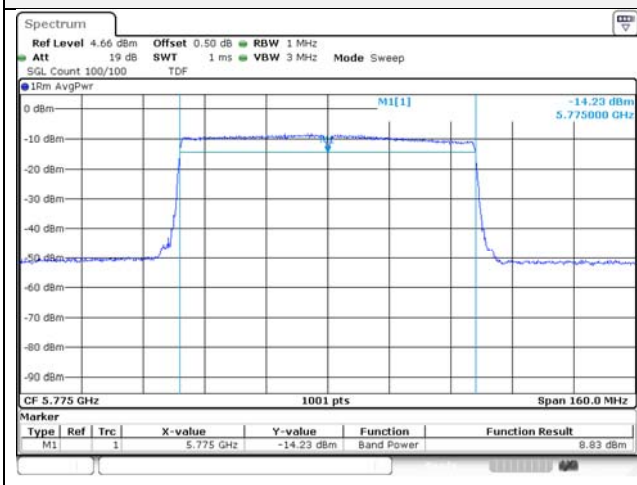

Blank

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (35) of (319)




MIMO ANT 2


UNII-1 / 802.11a / Low ch.

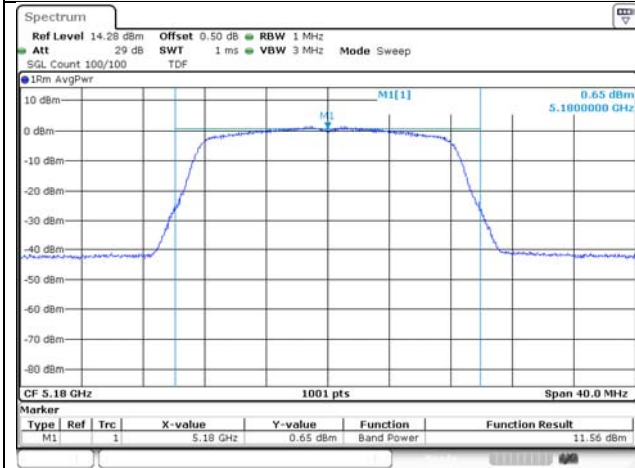


UNII-2A / 802.11a / Low ch.

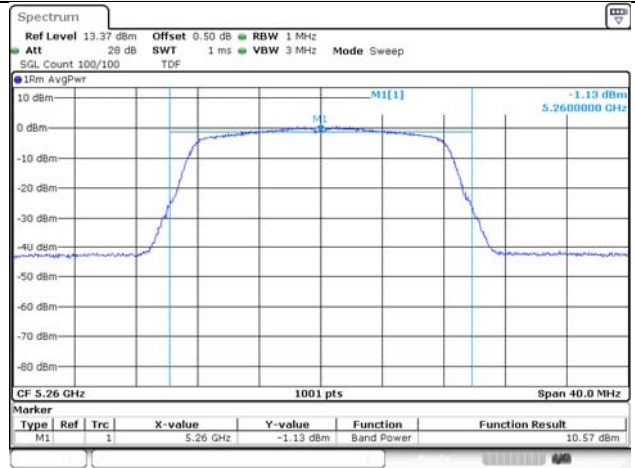


UNII-1 / 802.11a / Mid ch.

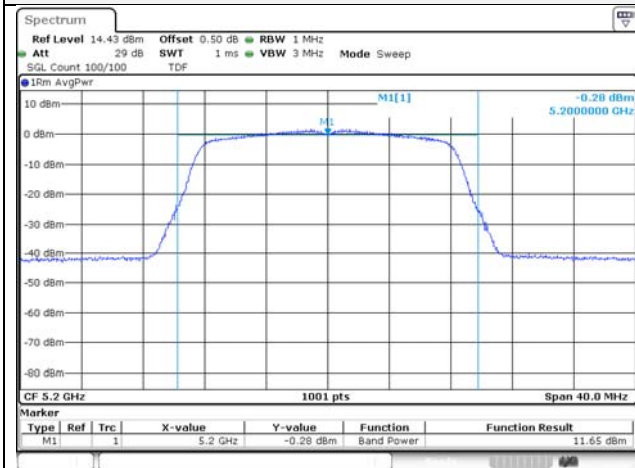


UNII-2A / 802.11a / Mid ch.

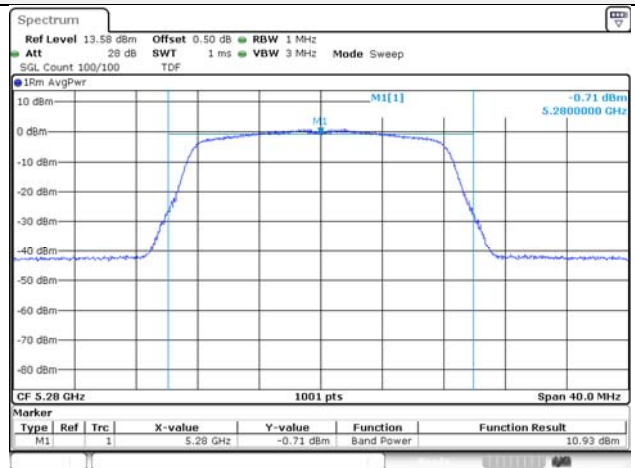

UNII-1 / 802.11a / High ch.

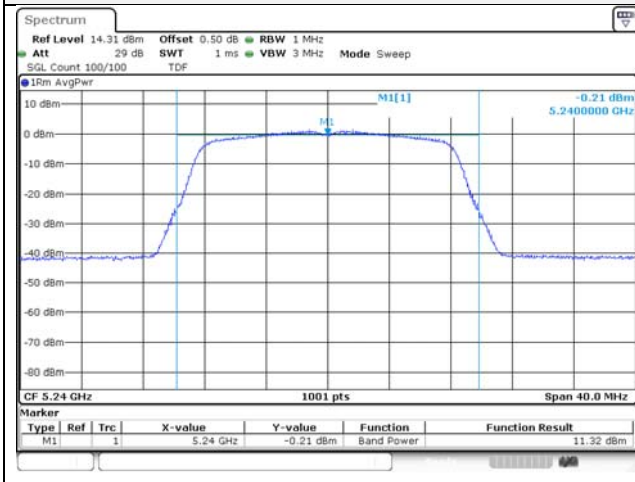

UNII-2A / 802.11a / High ch.

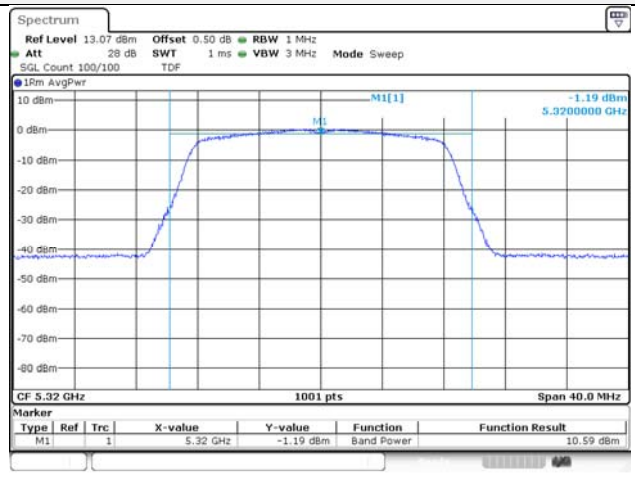


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (36) of (319)




UNII-2C / 802.11a / Low ch.

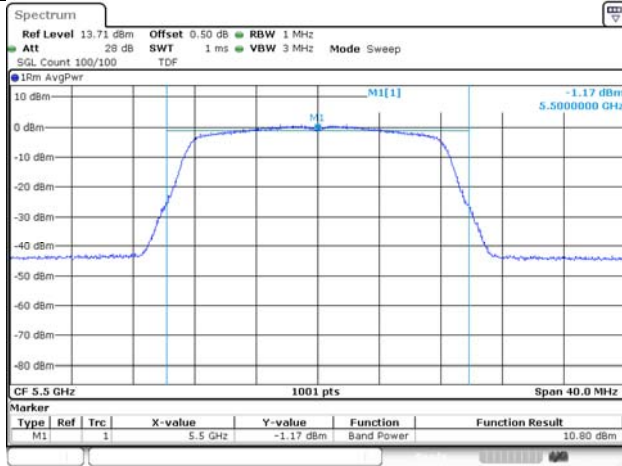


UNII-3 / 802.11a / Low ch.

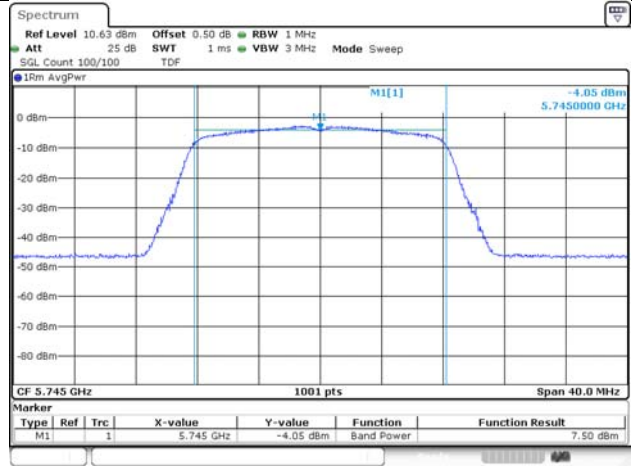


UNII-2C / 802.11a / Mid ch.

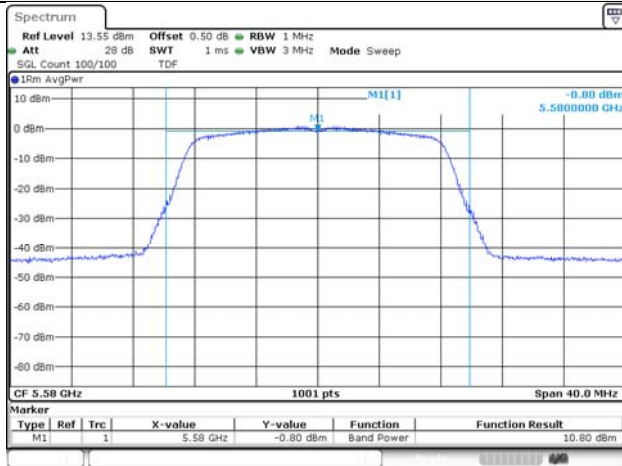


UNII-3 / 802.11a / Mid ch.

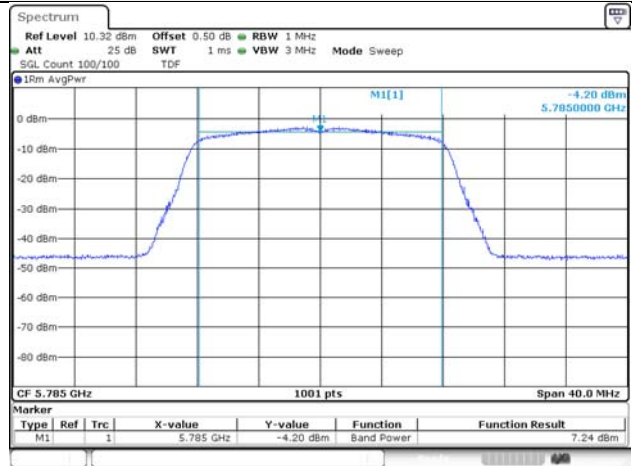

UNII-2C / 802.11a / High ch.

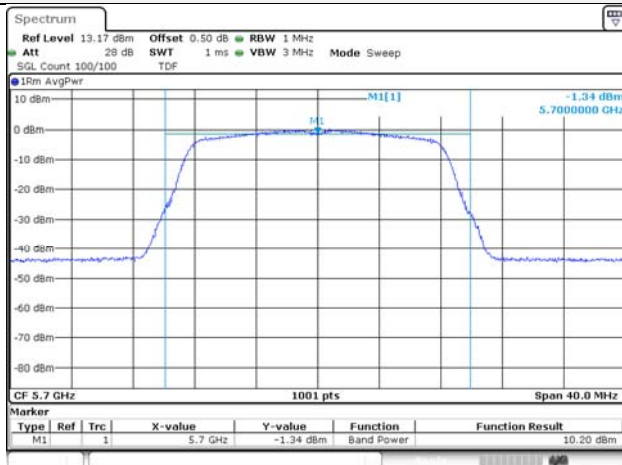

UNII-3 / 802.11a / High ch.

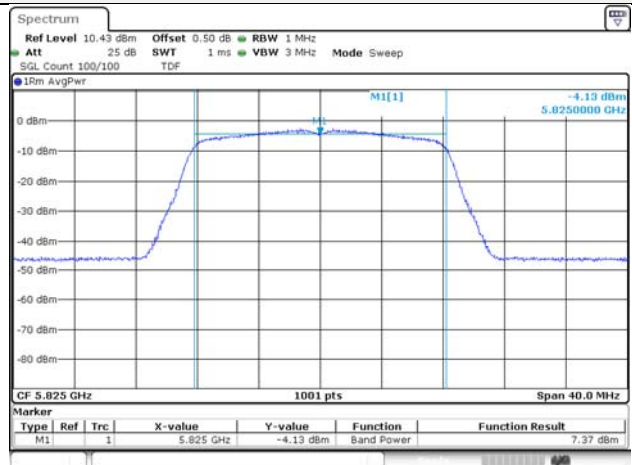


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (37) of (319)




UNII-1 / 802.11n HT 20 / Low ch.

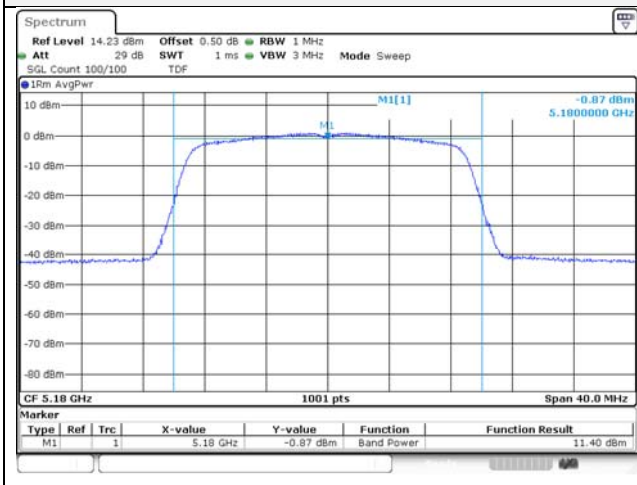


UNII-2A / 802.11n HT 20 / Low ch.

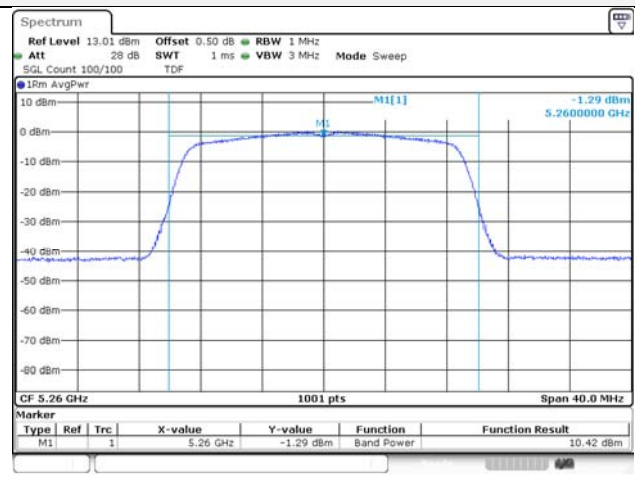


UNII-1 / 802.11n HT 20 / Mid ch.

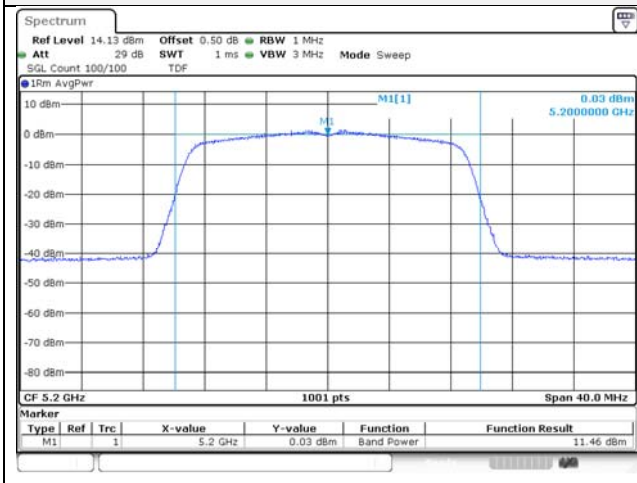


UNII-2A / 802.11n HT 20 / Mid ch.

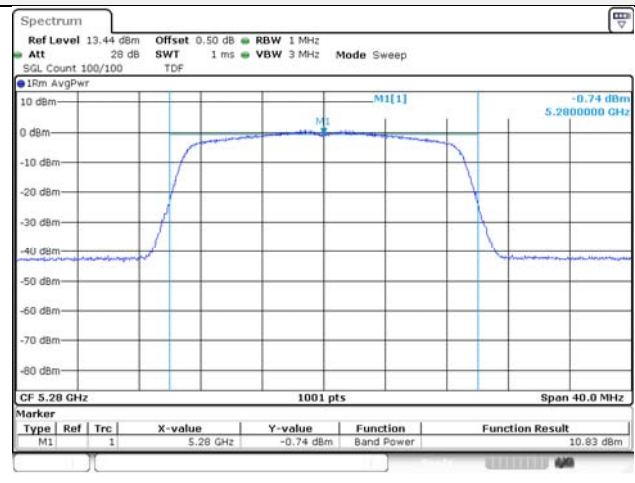

UNII-1 / 802.11n HT 20 / High ch.

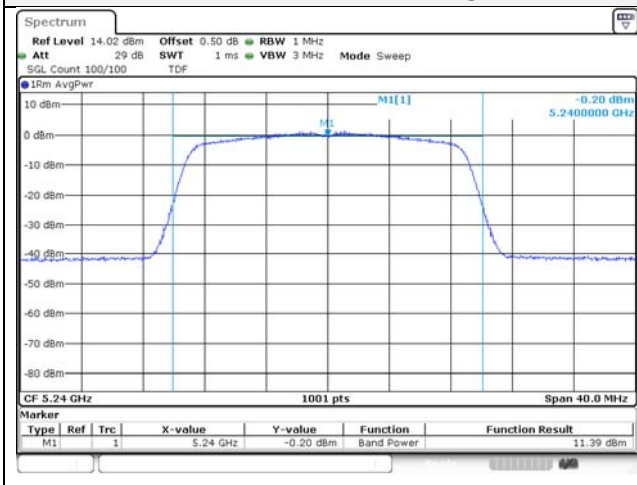

UNII-2A / 802.11n HT 20 / High ch.

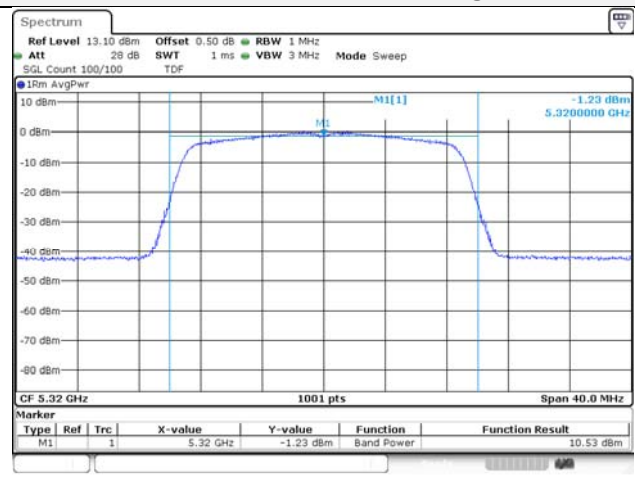


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (38) of (319)




UNII-2C / 802.11n HT 20 / Low ch.

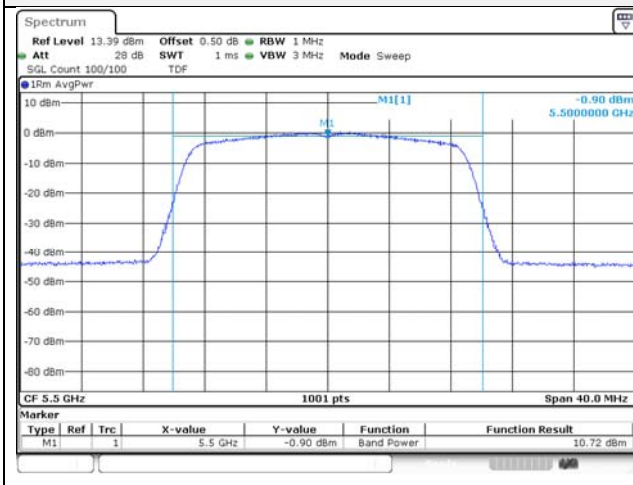


UNII-3 / 802.11n HT 20 / Low ch.

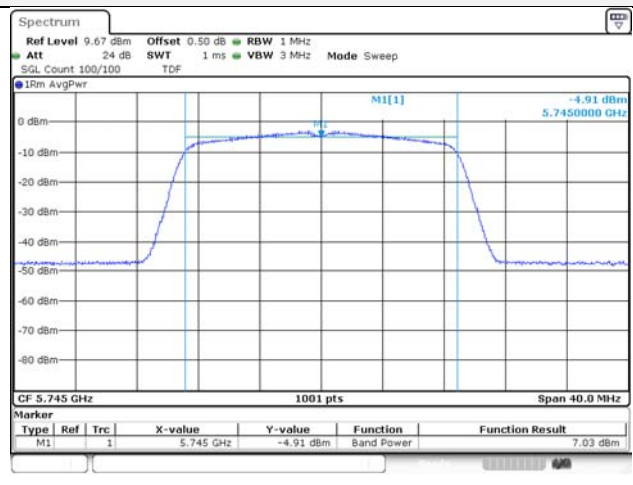


UNII-2C / 802.11n HT 20 / Mid ch.

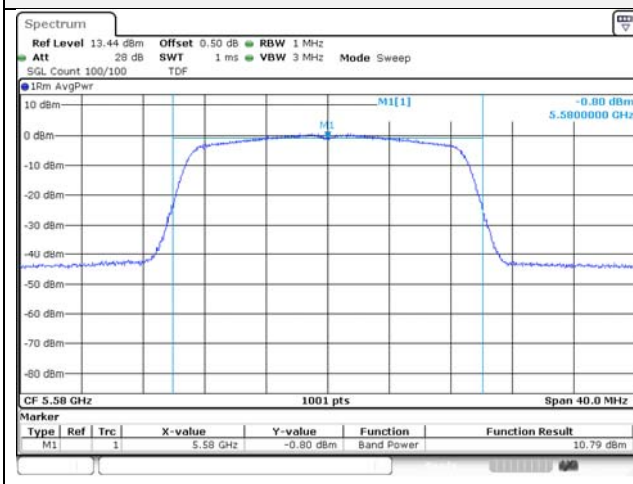


UNII-3 / 802.11n HT 20 / Mid ch.

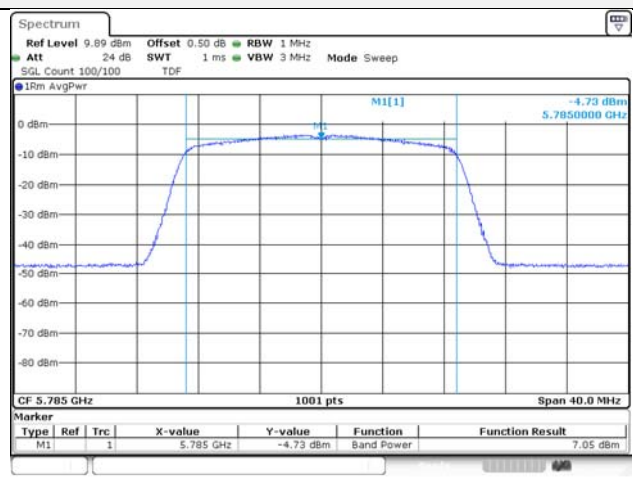

UNII-2C / 802.11n HT 20 / High ch.

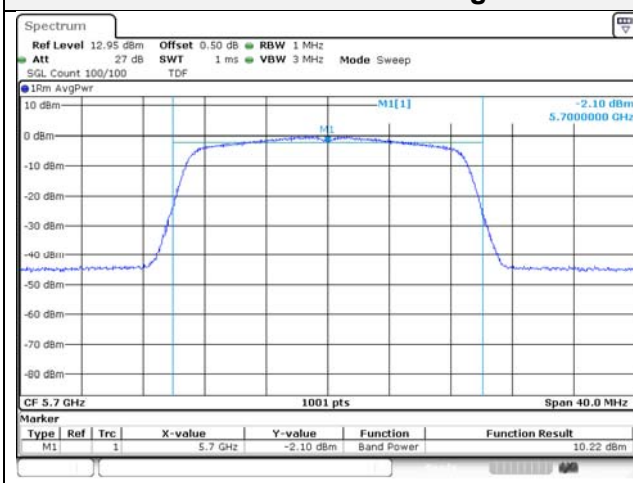

UNII-3 / 802.11n HT 20 / High ch.

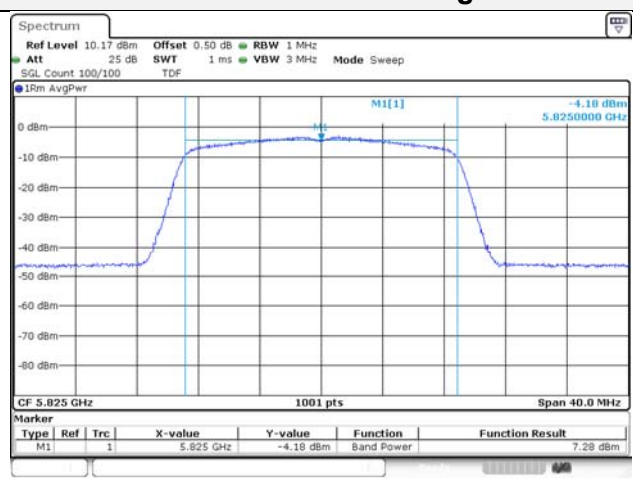


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (39) of (319)




UNII-1 / 802.11n HT 40 / Low ch.

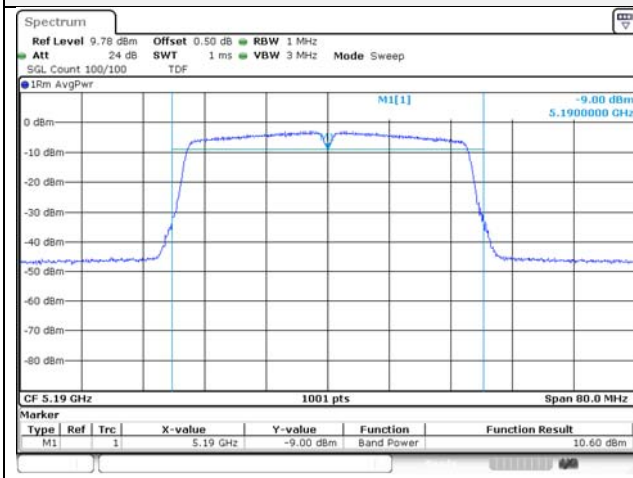


UNII-2A / 802.11n HT 40 / Low ch.

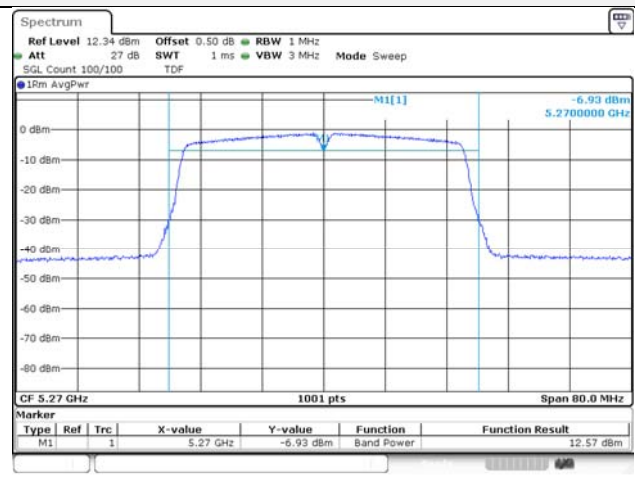

UNII-1 / 802.11n HT 40 / High ch.

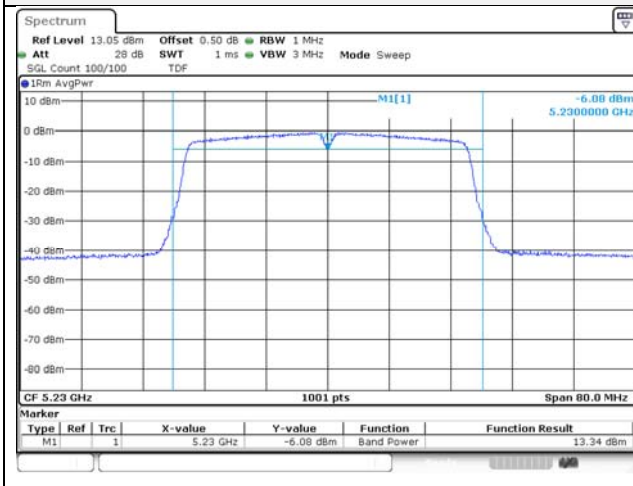

UNII-2A / 802.11n HT 40 / High ch.

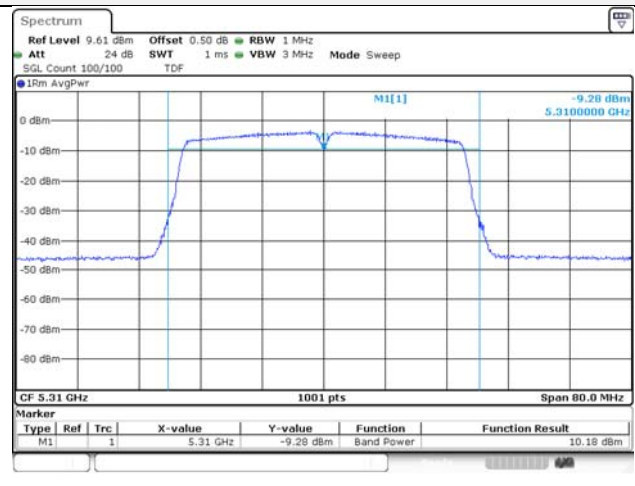


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (40) of (319)




UNII-2C / 802.11n HT 40 / Low ch.

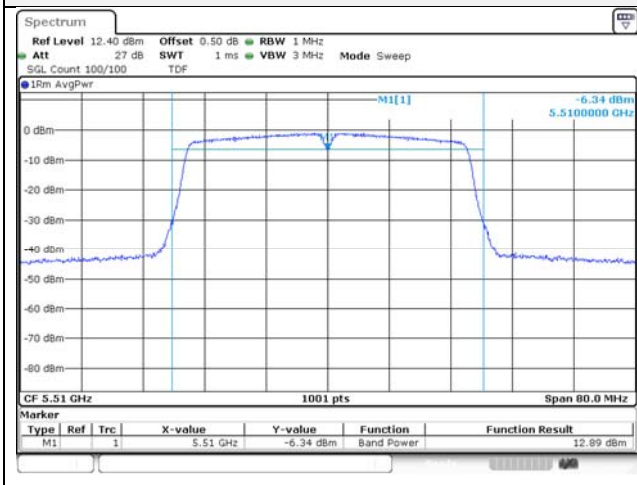


UNII-3 / 802.11n HT 40 / Low ch.

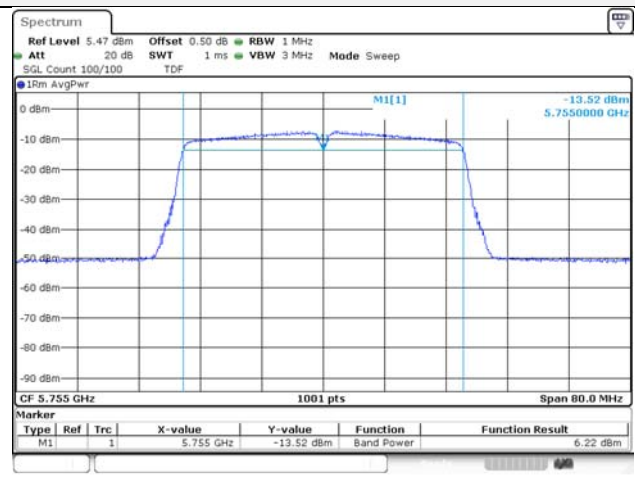


UNII-2C / 802.11n HT 40 / Mid ch.

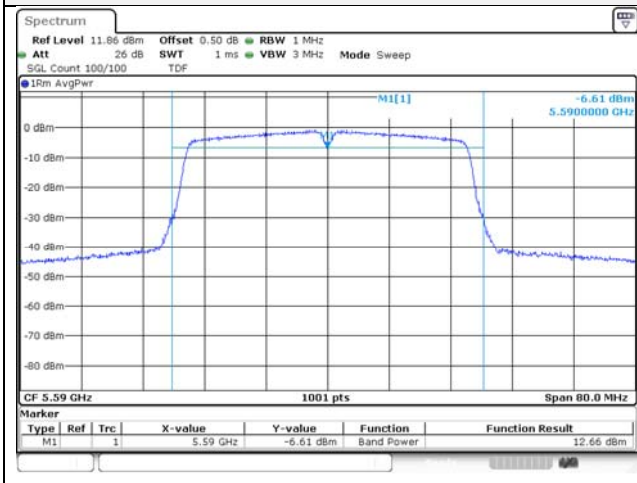

UNII-3 / 802.11n HT 40 / High ch.

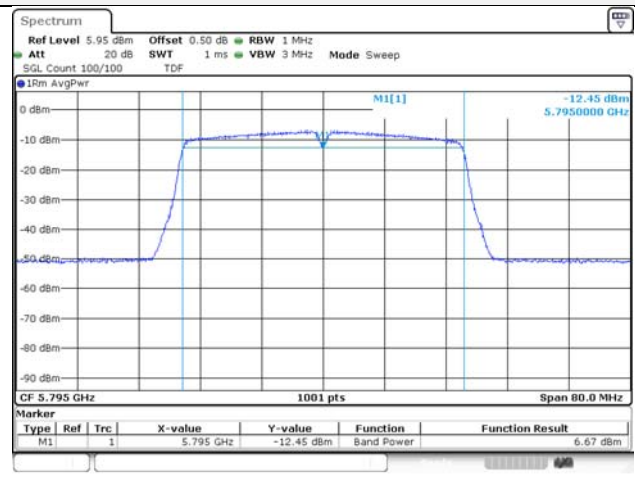

UNII-2C / 802.11n HT 40 / High ch.

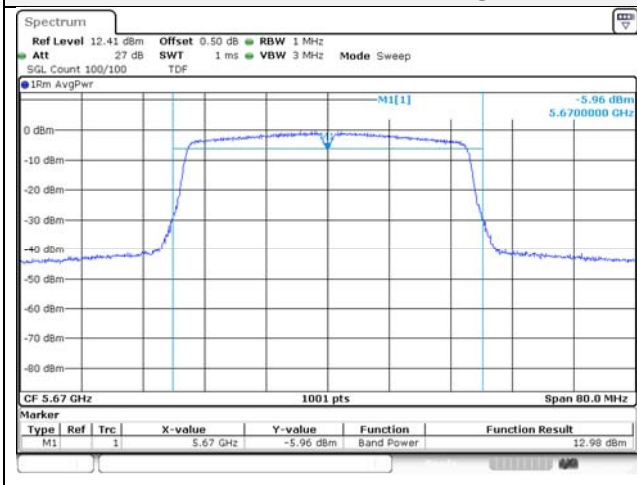

Blank


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (41) of (319)




UNII-1 / 802.11ac VHT 20 / Low ch.

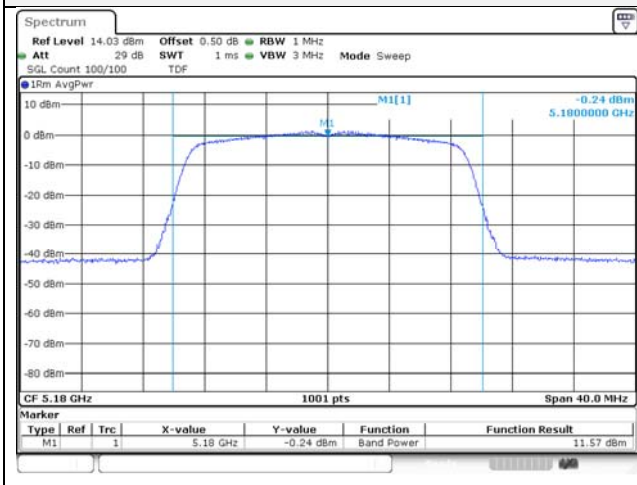


UNII-2A / 802.11ac VHT 20 / Low ch.

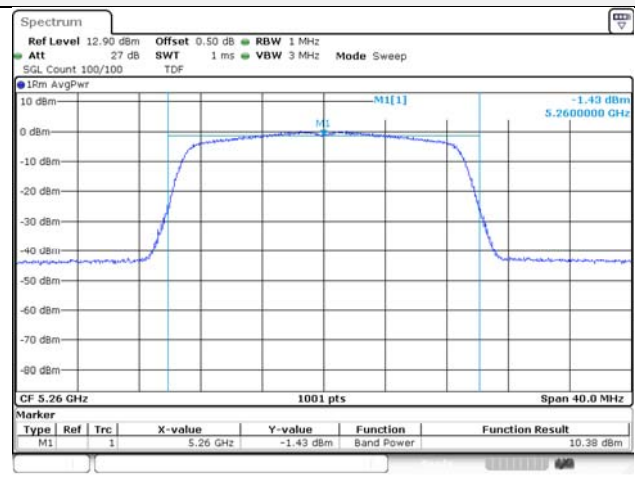


UNII-1 / 802.11ac VHT 20 / Mid ch.

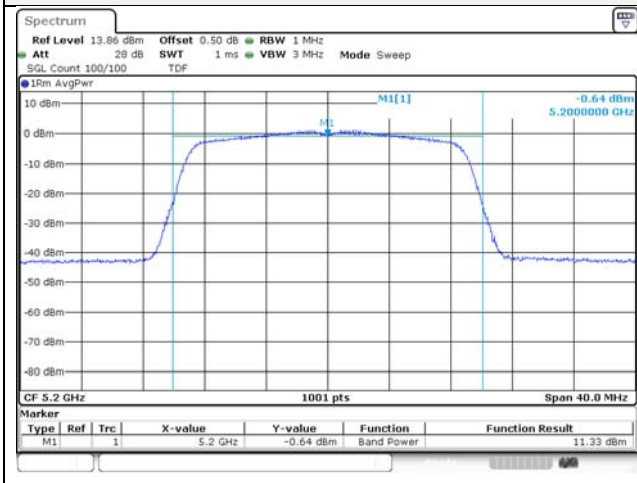


UNII-2A / 802.11ac VHT 20 / Mid ch.

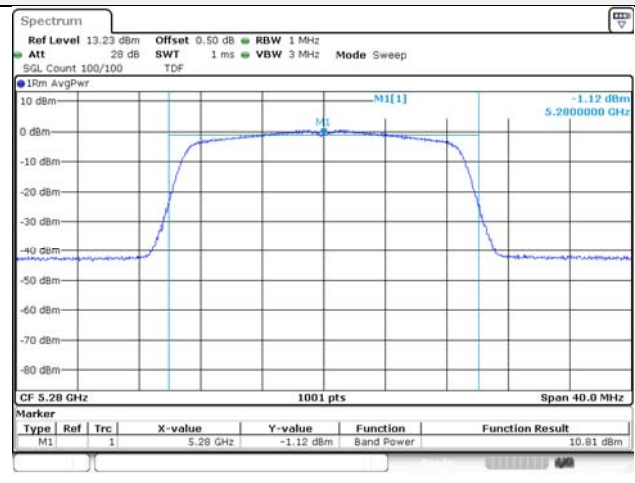

UNII-1 / 802.11ac VHT 20 / High ch.

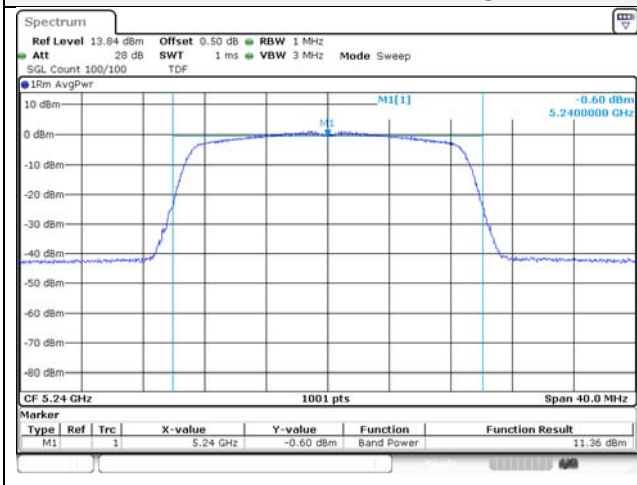

UNII-2A / 802.11ac VHT 20 / High ch.

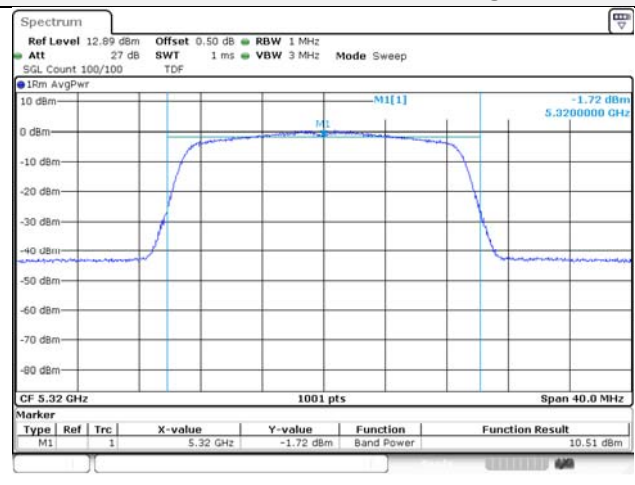


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (42) of (319)




UNII-2C / 802.11ac VHT 20 / Low ch.

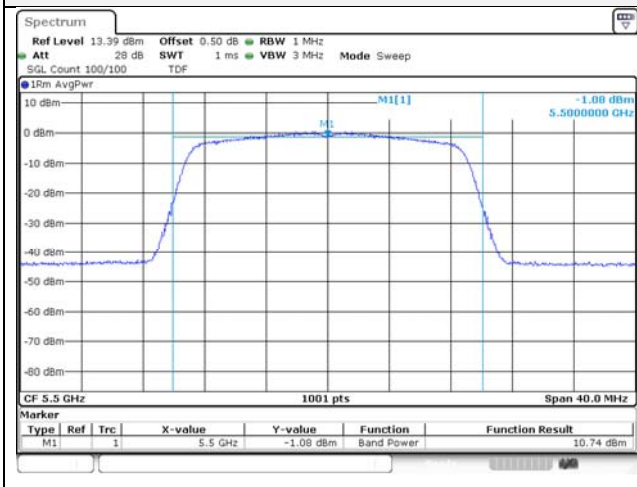


UNII-3 / 802.11ac VHT 20 / Low ch.

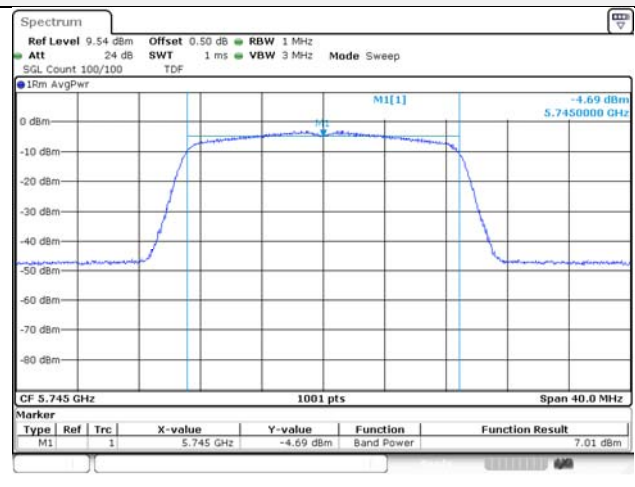


UNII-2C / 802.11ac VHT 20 / Mid ch.

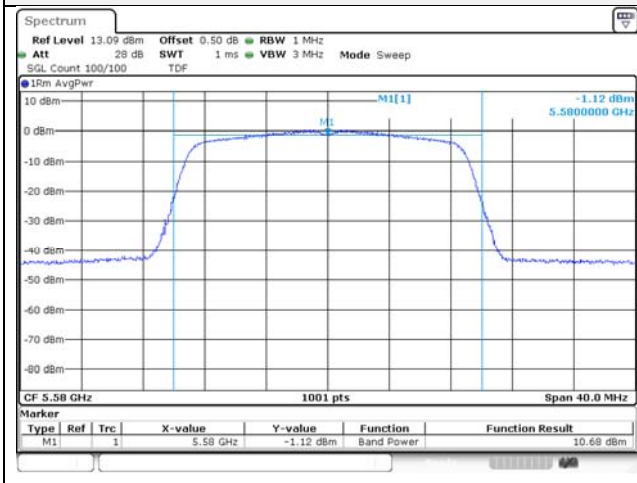


UNII-3 / 802.11ac VHT 20 / Mid ch.

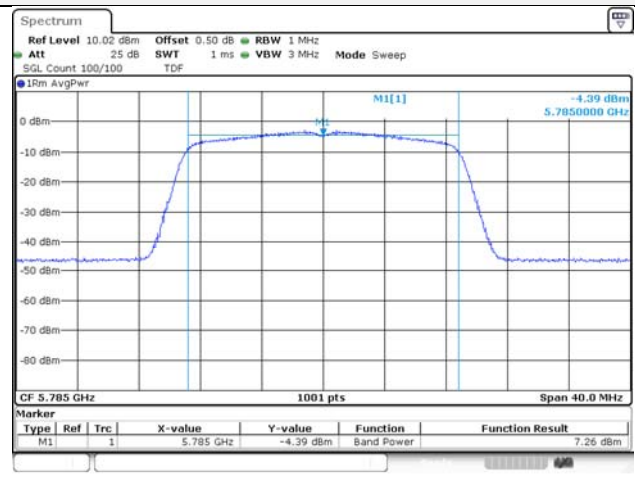

UNII-2C / 802.11ac VHT 20 / High ch.

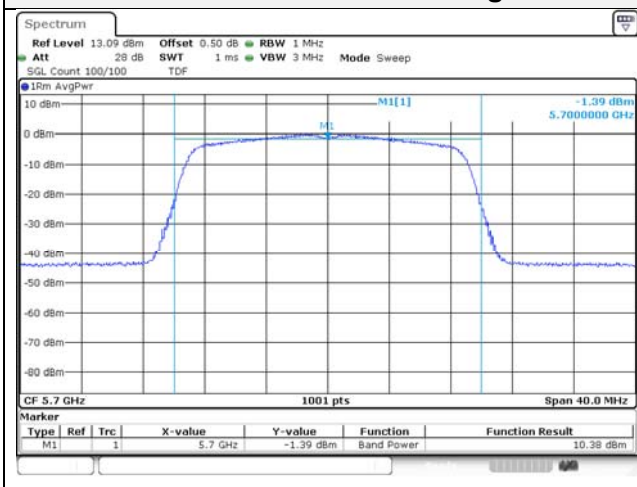

UNII-3 / 802.11ac VHT 20 / High ch.

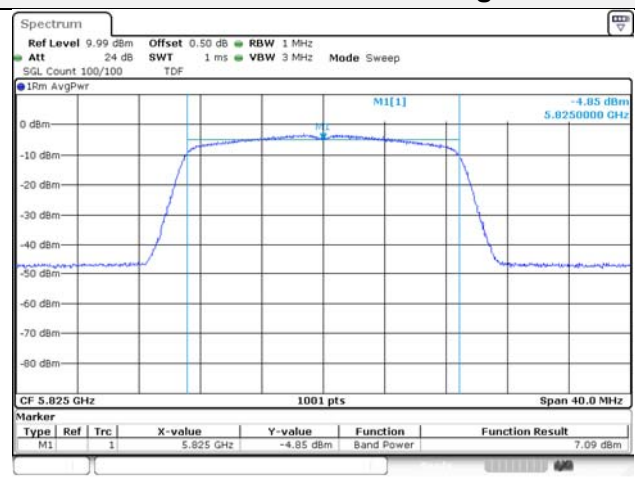


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (43) of (319)




UNII-1 / 802.11ac VHT40 / Low ch.

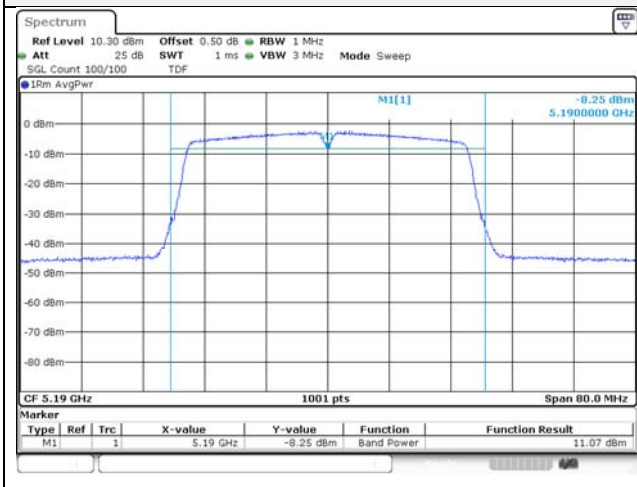


UNII-2A / 802.11ac VHT40 / Low ch.

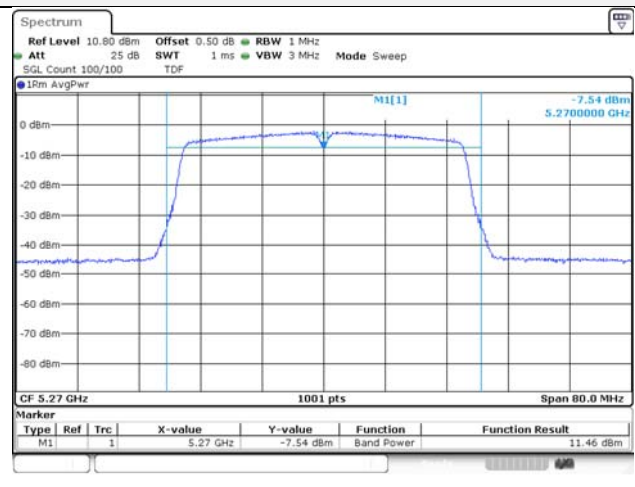

UNII-1 / 802.11ac VHT40 / High ch.

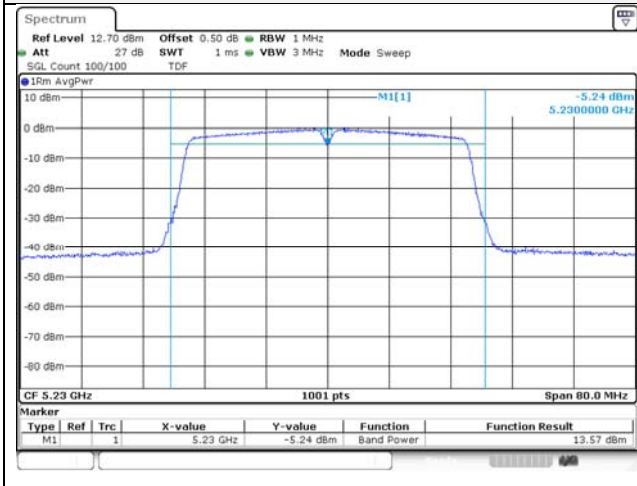

UNII-2A / 802.11ac VHT40 / High ch.

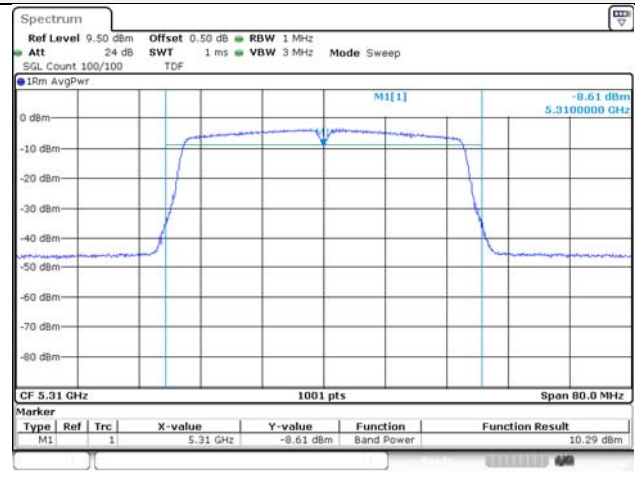


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (44) of (319)




UNII-2C / 802.11ac VHT40 / Low ch.

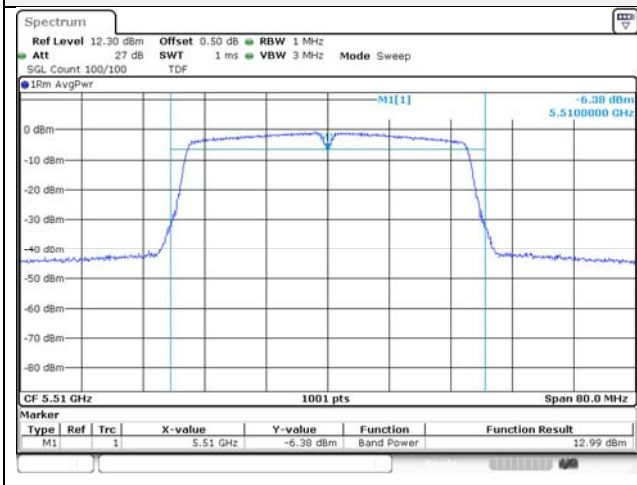


UNII-3 / 802.11ac VHT40 / Low ch.

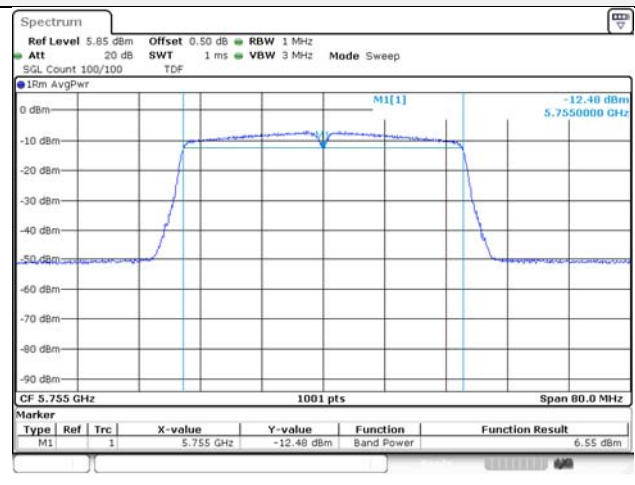


UNII-2C / 802.11ac VHT40 / Mid ch.

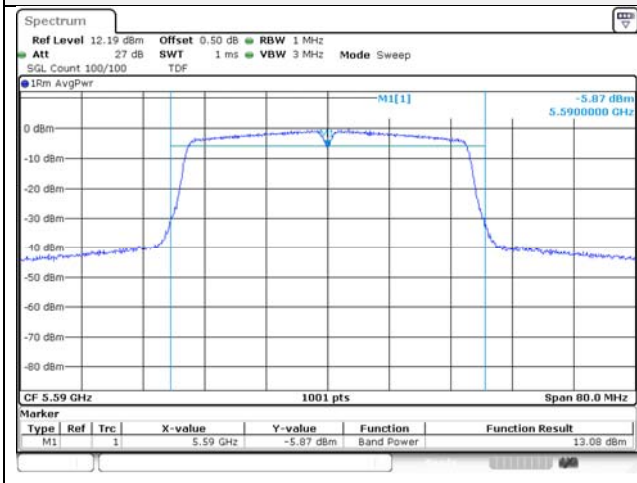

UNII-3 / 802.11ac VHT40 / High ch.

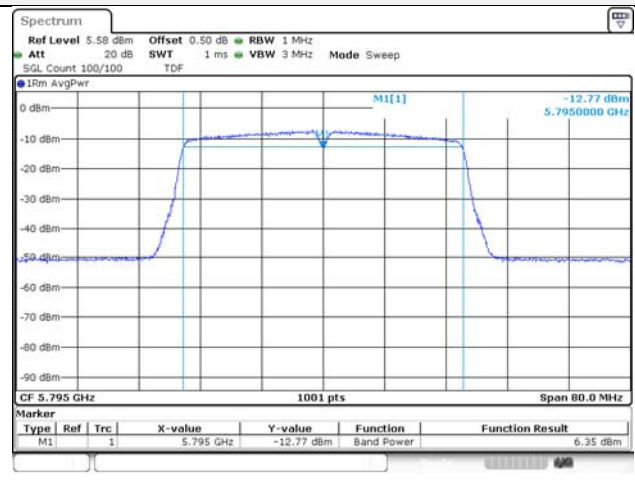

UNII-2C / 802.11ac VHT40 / High ch.

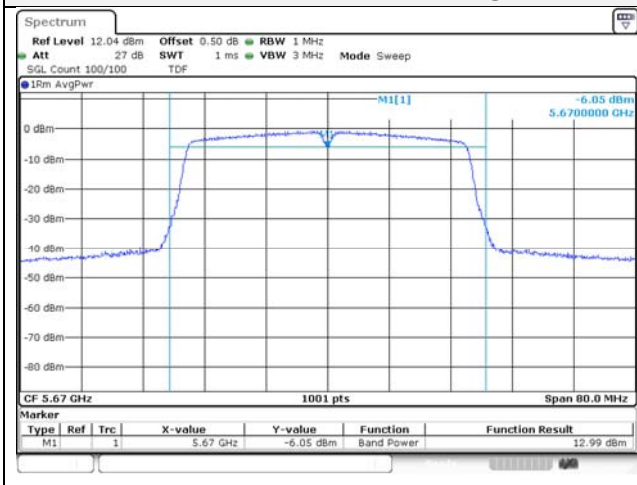

Blank


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0065-B
Page (45) of (319)




UNII-1 / 802.11ac VHT80 / Low ch.

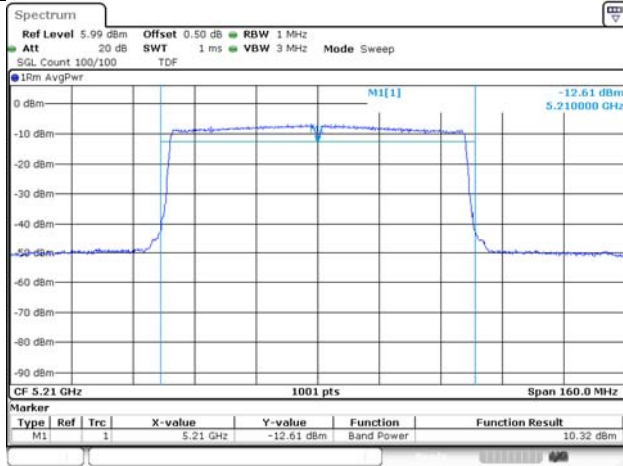


UNII-2A / 802.11ac VHT80 / Low ch.

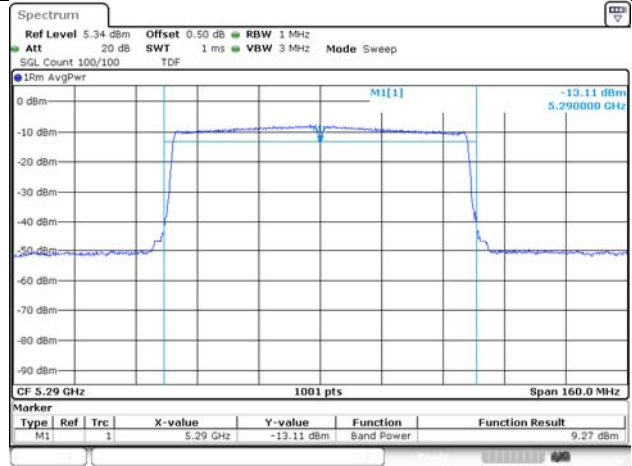


UNII-2C / 802.11ac VHT80 / Low ch.

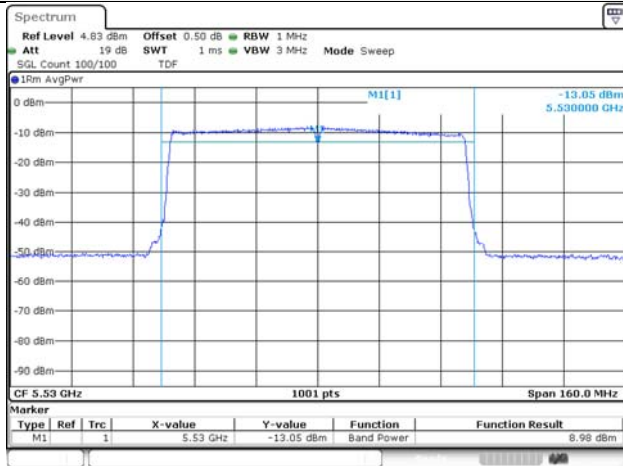

UNII-2C / 802.11ac VHT80 / High ch.

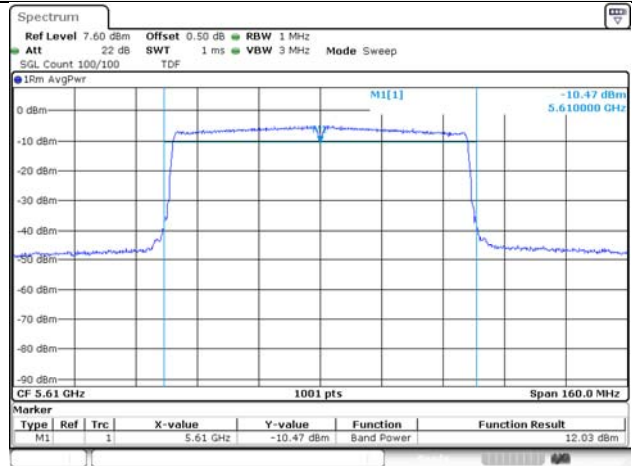


UNII-3 / 802.11ac VHT80 / Low ch.

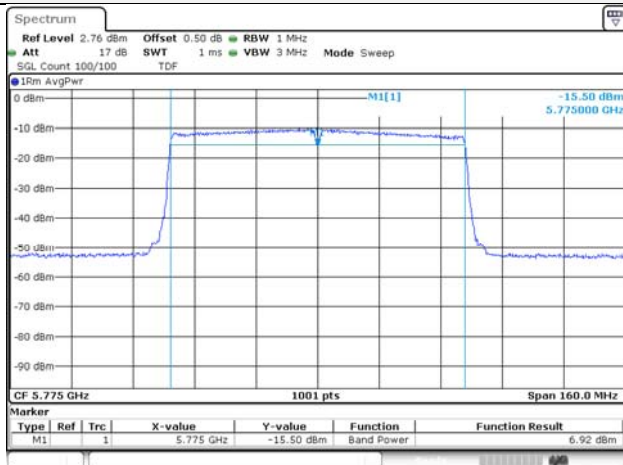

Blank

7.2. Maximum Power Spectral Density

Test setup



Limit

According to §15.407(a), RSS-247(6.2)

Band	EUT category		Limit
UNII-1		Outdoor access point	17dBm/MHz
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	11 dBm /MHz
UNII-2A		√	11 dBm /MHz
UNII-2C		√	11 dBm /MHz
UNII-3		√	30 dBm /500 kHz

Notes:

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi

Test procedure

ANSI C63.10-2013 Section 12.3.2.2, 14.3.2.2
 KDB 789033 D02 v02r01 - Section F
 KDB 662911 D01 v02r01 - Section E). 2)

Test settings

Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the

preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth(i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / RBW)$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (48) of (319)

**Test results****SISO**

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dB m/MHz)		Limit (dBm/MHz)
			ANT1	ANT2		ANT1	ANT2	
802.11a	UNII 1	5 180	2.06	1.75	-	2.06	1.75	11
		5 200	2.25	1.59	-	2.25	1.59	
		5 240	2.17	1.52	-	2.17	1.52	
	UNII 2A	5 260	5.86	3.28	-	5.86	3.28	
		5 280	5.83	3.75	-	5.83	3.75	
		5 320	5.58	3.56	-	5.58	3.56	
	UNII 2C	5 500	6.20	3.92	-	6.20	3.92	
		5 580	5.75	3.79	-	5.75	3.79	
		5 700	5.54	3.20	-	5.54	3.20	
802.11n HT20	UNII 1	5 180	1.85	1.42	-	1.85	1.42	
		5 200	1.67	1.56	-	1.67	1.56	
		5 240	1.70	1.02	-	1.70	1.02	
	UNII 2A	5 260	5.70	3.13	-	5.70	3.13	
		5 280	5.77	3.62	-	5.77	3.62	
		5 320	5.44	3.24	-	5.44	3.24	
	UNII 2C	5 500	5.93	3.73	-	5.93	3.73	
		5 580	5.48	3.61	-	5.48	3.61	
		5 700	5.21	3.17	-	5.21	3.17	
802.11n HT40	UNII 1	5 190	-1.28	-0.10	-	-1.28	-0.10	
		5 230	0.04	-0.54	-	0.04	-0.54	
	UNII 2A	5 270	1.22	0.67	-	1.22	0.67	
		5 310	-1.68	-1.26	-	-1.68	-1.26	
	UNII 2C	5 510	0.74	1.11	-	0.74	1.11	
		5 590	0.49	0.85	-	0.49	0.85	
		5 670	1.06	0.84	-	1.06	0.84	
802.11ac VHT20	UNII 1	5 180	1.85	1.29	-	1.85	1.29	
		5 200	1.75	1.40	-	1.75	1.40	
		5 240	1.53	1.13	-	1.53	1.13	
	UNII 2A	5 260	5.36	3.15	-	5.36	3.15	
		5 280	5.66	3.47	-	5.66	3.47	
		5 320	5.39	3.29	-	5.39	3.29	
	UNII 2C	5 500	5.94	3.78	-	5.94	3.78	
		5 580	5.38	3.40	-	5.38	3.40	
		5 700	5.34	2.68	-	5.34	2.68	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (49) of (319)

KCTL

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dBm/MHz)		Limit (dBm/MHz)
			ANT1	ANT2		ANT1	ANT2	
802.11ac VHT40	UNII 1	5 190	-1.34	-0.34	-	-1.34	-0.34	11
		5 230	-0.28	-0.55	-	-0.28	-0.55	
	UNII 2A	5 270	1.19	0.71	-	1.19	0.71	
		5 310	-1.65	-1.43	-	-1.65	-1.43	
	UNII 2C	5 510	0.84	0.50	-	0.84	0.50	
		5 590	0.39	0.81	-	0.39	0.81	
802.11ac VHT80	UNII 1	5 210	-6.11	-4.62	-	-6.11	-4.62	
		5 290	-6.29	-5.43	-	-6.29	-5.43	
	UNII 2C	5 530	-6.42	-5.76	-	-6.42	-5.76	
		5 610	-4.69	-4.12	-	-4.69	-4.12	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm /500 kHz)		DCF (dB)	Maximum PSD (dBm /500 kHz)		Limit (dBm /500 kHz)
			ANT1	ANT2		ANT1	ANT2	
802.11a	UNII 3	5 745	-0.15	-2.88	-	-0.15	-2.88	30
		5 785	0.34	-3.16	-	0.34	-3.16	
		5 825	0.13	-2.56	-	0.13	-2.56	
802.11n HT20		5 745	-0.43	-3.40	-	-0.43	-3.40	
		5 785	-0.64	-3.40	-	-0.64	-3.40	
		5 825	-0.44	-2.93	-	-0.44	-2.93	
802.11n HT40		5 755	3.75	-6.75	-	3.75	-6.75	
		5 795	-3.72	-6.76	-	-3.72	-6.76	
802.11ac VHT20		5 745	-0.62	-3.18	-	-0.62	-3.18	
		5 785	-0.42	-3.22	-	-0.42	-3.22	
	5 825	-0.77	-3.31	-	-0.77	-3.31		
802.11ac VHT40	5 755	-3.76	-6.64	-	-3.76	-6.64		
	5 795	-3.88	-6.73	-	-3.88	-6.73		
802.11ac VHT80	5 775	-7.45	-10.21	-	-7.45	-10.21		

Notes:

- Maximum PSD calculation
- Maximum PSD = Measured PSD + D.C.F

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0065-B
Page (50) of (319)

KCTL**MIMO**

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
			ANT1	ANT2			
802.11a	UNII 1	5 180	2.06	1.46	-	4.78	11
		5 200	2.42	1.63	-	5.05	
		5 240	2.00	1.29	-	4.67	
	UNII 2A	5 260	1.21	0.25	-	3.77	
		5 280	1.19	0.66	-	3.94	
		5 320	1.04	0.59	-	3.83	
	UNII 2C	5 500	1.39	1.05	-	4.23	
		5 580	0.77	0.71	-	3.75	
		5 700	1.19	0.26	-	3.76	
802.11n HT20	UNII 1	5 180	2.02	1.08	-	4.59	
		5 200	1.86	1.29	-	4.59	
		5 240	1.93	1.05	-	4.52	
	UNII 2A	5 260	0.67	-0.17	-	3.28	
		5 280	1.06	0.38	-	3.74	
		5 320	0.92	0.08	-	3.53	
	UNII 2C	5 500	1.40	0.55	-	4.01	
		5 580	0.59	0.44	-	3.53	
		5 700	0.51	-0.11	-	3.22	
802.11n HT40	UNII 1	5 190	-1.71	-2.80	-	0.79	
		5 230	0.66	-0.63	-	3.07	
	UNII 2A	5 270	-0.20	-1.39	-	2.26	
		5 310	-2.12	-2.97	-	0.49	
	UNII 2C	5 510	-0.33	-1.31	-	2.22	
		5 590	-1.22	-1.52	-	1.64	
802.11ac VHT20	UNII 1	5 180	2.31	0.88	-	4.66	
		5 200	2.00	1.07	-	4.57	
		5 240	1.63	0.88	-	4.28	
	UNII 2A	5 260	0.91	-0.43	-	3.30	
		5 280	1.35	0.37	-	3.90	
		5 320	1.10	-0.04	-	3.58	
	UNII 2C	5 500	1.32	0.31	-	3.85	
		5 580	1.26	0.33	-	3.83	
		5 700	0.92	-0.28	-	3.37	