

Test setup photos of EUT

1. Radiated Field strength

1.1. Frequency range: 9 kHz ~ 30 MHz

A. The photo of Field strength with client device

Client device (SM-G930V)



2. MPE

2.1. Equipment List

A. E-Field Probe

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
E-Field Probe	D.A.R.E!! Instruments	RadiSense 4	13I00444SNO04	Aug. 05, 2015	Annual	Aug. 05, 2016



B. H-Field Probe


Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Magnetic Field Sensor	HIOKI	0850-B1	3471	Jul. 16, 2015	Annual	Jul. 16, 2016
Magnetic Field Hitester	HIOKI	FT3470-50	140430999	Jul. 16, 2015	Annual	Jul. 16, 2016



2.2. Test Setup Photo of MPE

A. E-Field Probe

Client device (SM-G930V)

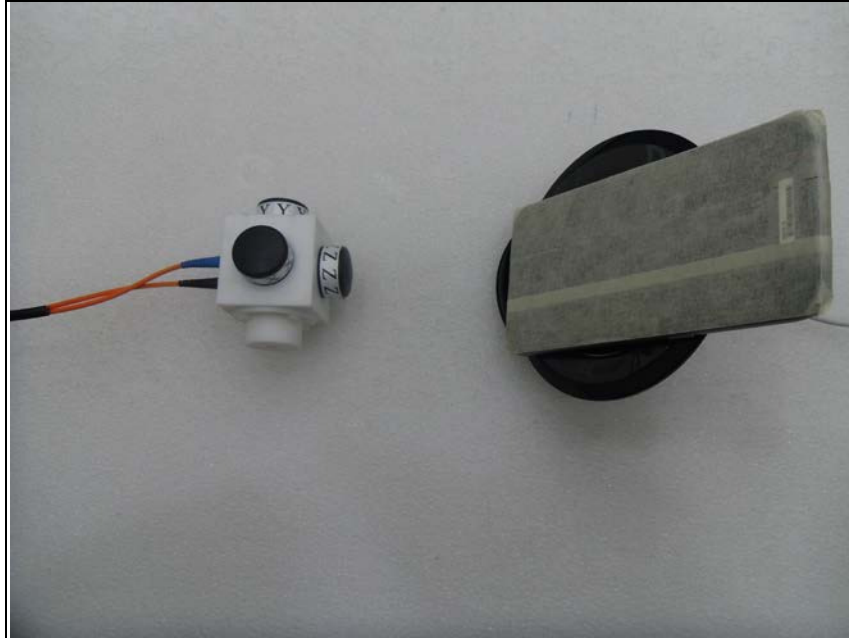

B. H-Field Probe

Client device (SM-G930V)



3. AC Conducted power line emissions

Client device (SM-G930V)

