



**8.10 Test data for Mode 6 (Ant-A : Mobile 2 (120.5 kHz) / B : Earphones (127.7 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

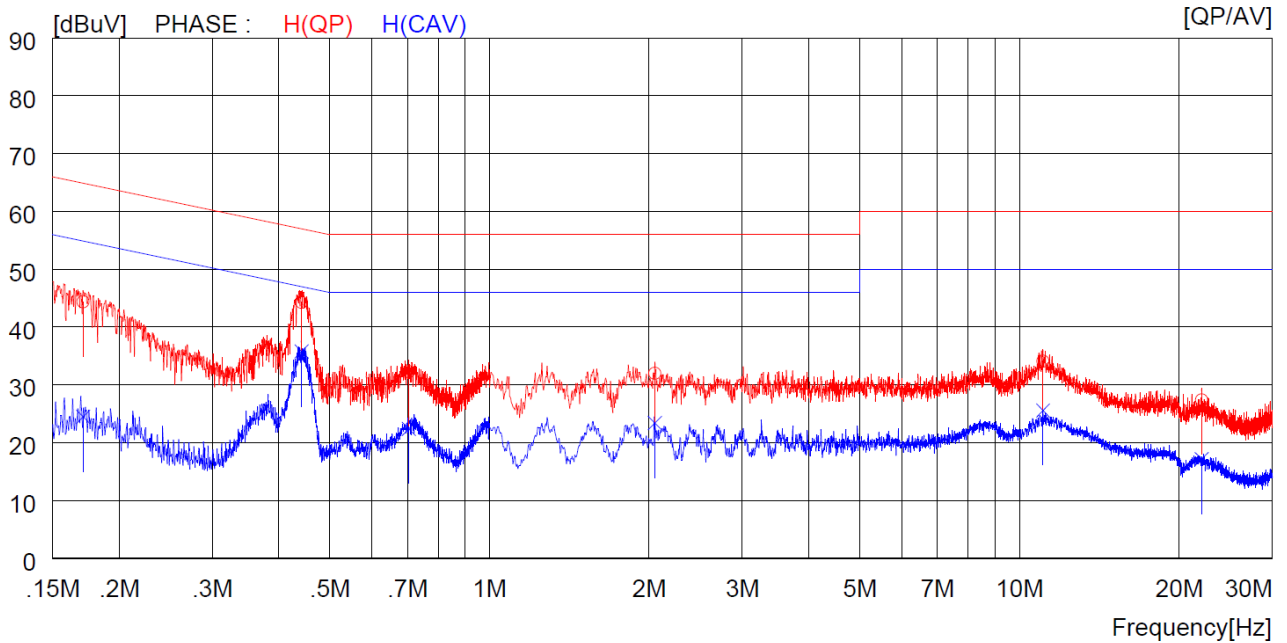

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17100	34.4	----	10.0	44.4	----	64.9	----	20.5	----	H (QP)
2	0.44200	34.3	----	10.0	44.3	----	57.0	----	12.7	----	H (QP)
3	0.70400	22.3	----	10.0	32.3	----	56.0	----	23.7	----	H (QP)
4	2.05200	21.9	----	10.1	32.0	----	56.0	----	24.0	----	H (QP)
5	11.08000	23.9	----	10.2	34.1	----	60.0	----	25.9	----	H (QP)
6	22.06000	16.9	----	10.5	27.4	----	60.0	----	32.6	----	H (QP)
7	0.17100	----	14.5	10.0	----	24.5	----	54.9	----	30.4	H (CAV)
8	0.44200	----	25.8	10.0	----	35.8	----	47.0	----	11.2	H (CAV)
9	0.70400	----	12.4	10.0	----	22.4	----	46.0	----	23.6	H (CAV)
10	2.05200	----	13.3	10.1	----	23.4	----	46.0	----	22.6	H (CAV)
11	11.08000	----	15.4	10.2	----	25.6	----	50.0	----	24.4	H (CAV)
12	22.06000	----	6.7	10.5	----	17.2	----	50.0	----	32.8	H (CAV)

-. Tested Line : NEUTRAL LINE

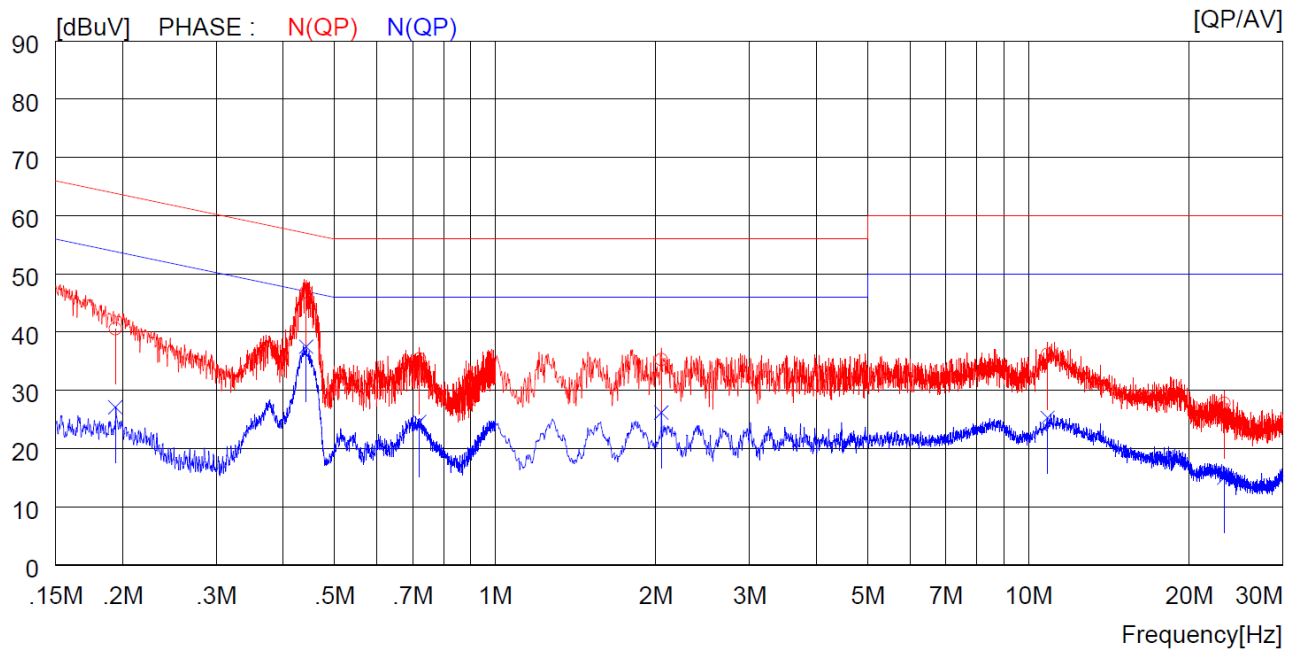


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.19400	30.6	----	10.0	40.6	----	63.9	----	23.3	----	N (QP)
2	0.44200	36.9	----	10.0	46.9	----	57.0	----	10.1	----	N (QP)
3	0.72100	25.4	----	10.0	35.4	----	56.0	----	20.6	----	N (QP)
4	2.04800	25.2	----	10.1	35.3	----	56.0	----	20.7	----	N (QP)
5	10.85000	26.0	----	10.2	36.2	----	60.0	----	23.8	----	N (QP)
6	23.26000	17.3	----	10.5	27.8	----	60.0	----	32.2	----	N (QP)
7	0.19400	----	17.1	10.0	----	27.1	----	53.9	----	26.8	N (CAV)
8	0.44200	----	27.5	10.0	----	37.5	----	47.0	----	9.5	N (CAV)
9	0.72100	----	14.6	10.0	----	24.6	----	46.0	----	21.4	N (CAV)
10	2.04800	----	16.1	10.1	----	26.2	----	46.0	----	19.8	N (CAV)
11	10.85000	----	15.1	10.2	----	25.3	----	50.0	----	24.7	N (CAV)
12	23.26000	----	4.5	10.5	----	15.0	----	50.0	----	35.0	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.11 Test data for Mode 7 (Ant-A : Mobile 1 (138.0 kHz) / B : Earphones (127.7 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

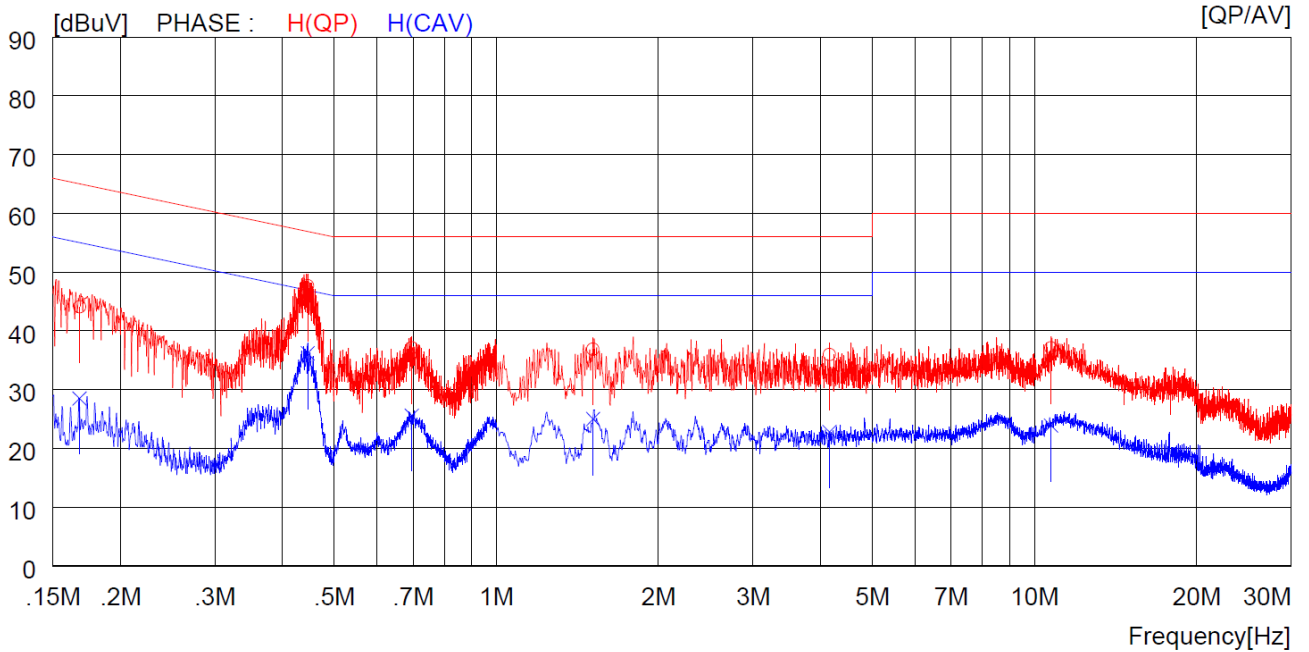

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16800	34.1	----	10.0	44.1	----	65.1	----	21.0	----	H (QP)
2	0.44600	37.7	----	10.0	47.7	----	56.9	----	9.2	----	H (QP)
3	0.69600	27.1	----	10.0	37.1	----	56.0	----	18.9	----	H (QP)
4	1.51200	26.8	----	10.1	36.9	----	56.0	----	19.1	----	H (QP)
5	4.16000	25.9	----	10.1	36.0	----	56.0	----	20.0	----	H (QP)
6	10.73000	26.9	----	10.2	37.1	----	60.0	----	22.9	----	H (QP)
7	0.16800	----	18.5	10.0	----	28.5	----	55.1	----	26.6	H (CAV)
8	0.44600	----	26.2	10.0	----	36.2	----	46.9	----	10.7	H (CAV)
9	0.69600	----	15.6	10.0	----	25.6	----	46.0	----	20.4	H (CAV)
10	1.51200	----	14.9	10.1	----	25.0	----	46.0	----	21.0	H (CAV)
11	4.16000	----	12.7	10.1	----	22.8	----	46.0	----	23.2	H (CAV)
12	10.73000	----	13.7	10.2	----	23.9	----	50.0	----	26.1	H (CAV)

-. Tested Line : NEUTRAL LINE

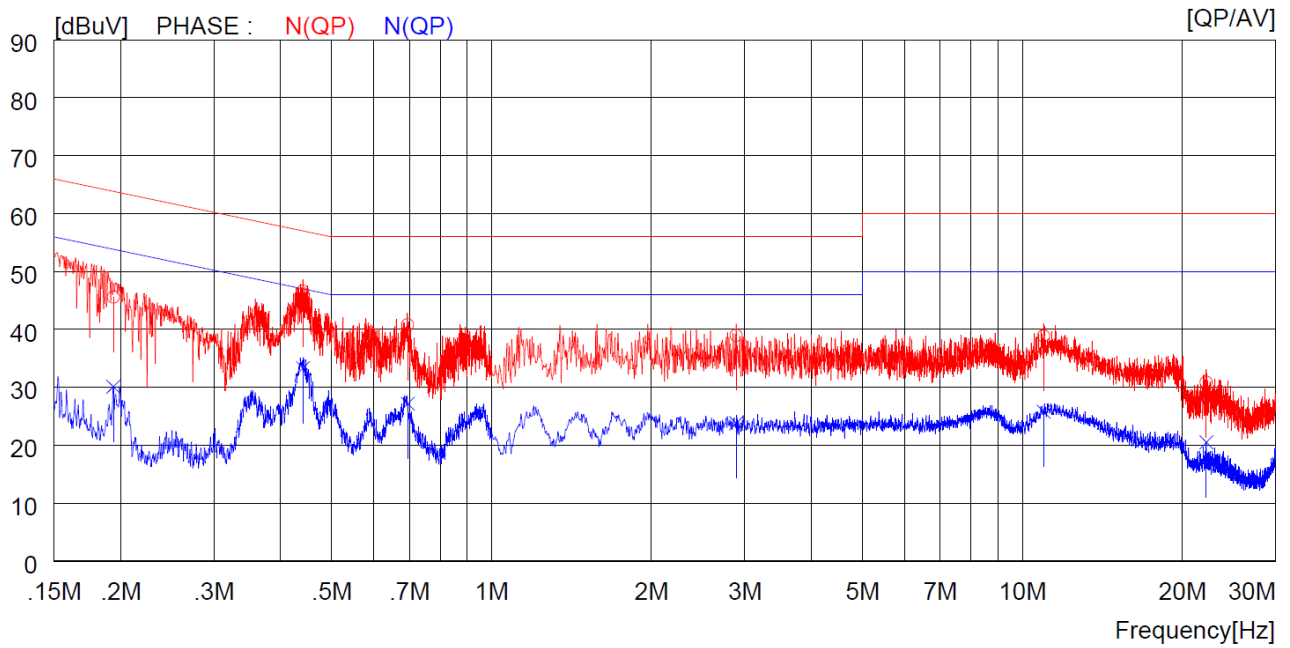


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.19400	35.6	----	10.0	45.6	----	63.9	----	18.3	----	N (QP)
2	0.44100	36.6	----	10.0	46.6	----	57.0	----	10.4	----	N (QP)
3	0.69500	30.8	----	10.0	40.8	----	56.0	----	15.2	----	N (QP)
4	2.88800	28.9	----	10.1	39.0	----	56.0	----	17.0	----	N (QP)
5	10.97000	28.7	----	10.2	38.9	----	60.0	----	21.1	----	N (QP)
6	22.21000	20.4	----	10.5	30.9	----	60.0	----	29.1	----	N (QP)
7	0.19400	----	20.1	10.0	----	30.1	----	53.9	----	23.8	N (CAV)
8	0.44100	----	23.3	10.0	----	33.3	----	47.0	----	13.7	N (CAV)
9	0.69500	----	17.2	10.0	----	27.2	----	46.0	----	18.8	N (CAV)
10	2.88800	----	13.7	10.1	----	23.8	----	46.0	----	22.2	N (CAV)
11	10.97000	----	15.6	10.2	----	25.8	----	50.0	----	24.2	N (CAV)
12	22.21000	----	10.0	10.5	----	20.5	----	50.0	----	29.5	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.12 Test data for Mode 8 (Ant-A : Mobile 1 (138.0 kHz) / B : Earphones (127.7 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

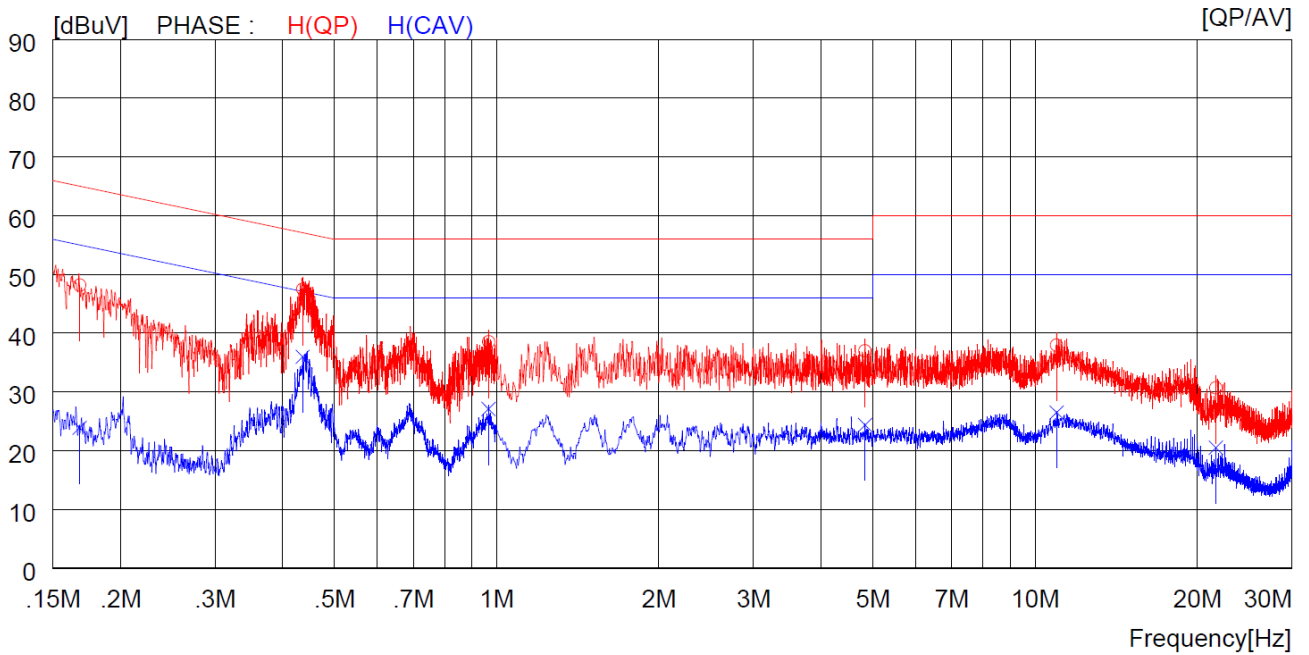

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16800	38.2	----	10.0	48.2	----	65.1	----	16.9	----	H (QP)
2	0.43600	37.5	----	10.0	47.5	----	57.1	----	9.6	----	H (QP)
3	0.96600	28.5	----	10.0	38.5	----	56.0	----	17.5	----	H (QP)
4	4.82800	26.8	----	10.2	37.0	----	56.0	----	19.0	----	H (QP)
5	10.97000	27.8	----	10.2	38.0	----	60.0	----	22.0	----	H (QP)
6	21.66000	20.2	----	10.5	30.7	----	60.0	----	29.3	----	H (QP)
7	0.16800	----	13.9	10.0	----	23.9	----	55.1	----	31.2	H (CAV)
8	0.43600	----	26.0	10.0	----	36.0	----	47.1	----	11.1	H (CAV)
9	0.96600	----	17.1	10.0	----	27.1	----	46.0	----	18.9	H (CAV)
10	4.82800	----	14.2	10.2	----	24.4	----	46.0	----	21.6	H (CAV)
11	10.97000	----	16.3	10.2	----	26.5	----	50.0	----	23.5	H (CAV)
12	21.66000	----	10.0	10.5	----	20.5	----	50.0	----	29.5	H (CAV)

-. Tested Line : NEUTRAL LINE

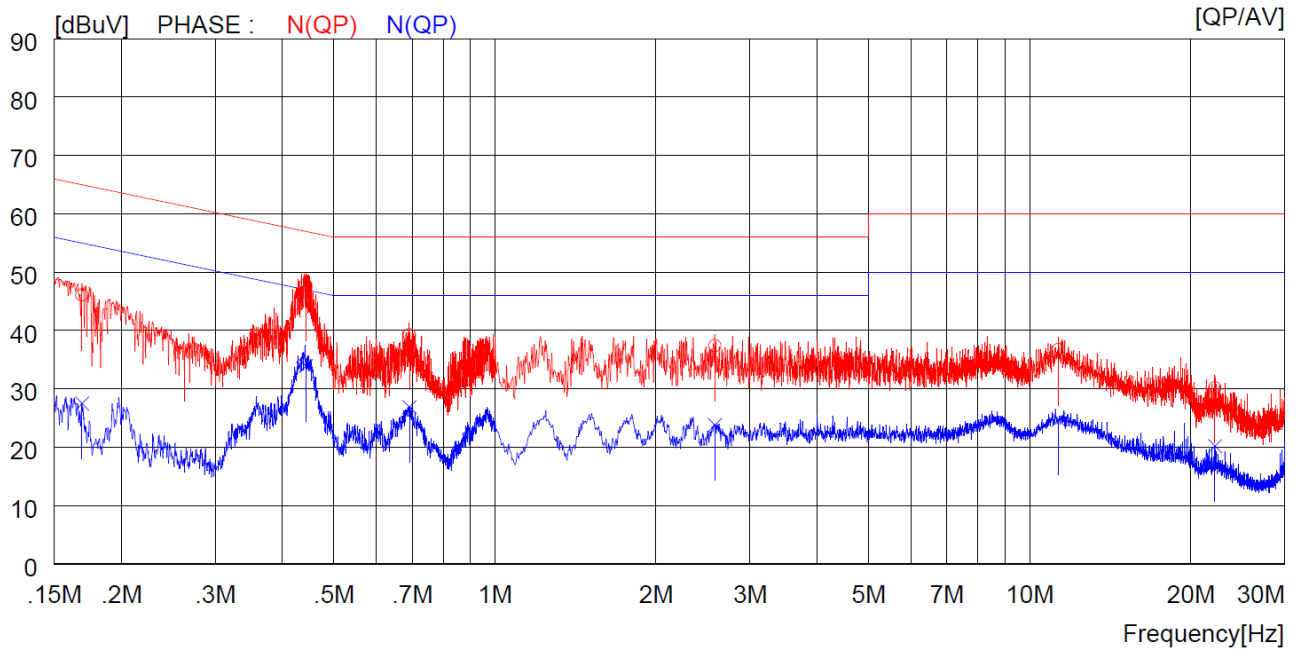


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16900	36.1	----	10.0	46.1	----	65.0	----	18.9	----	N (QP)
2	0.44300	37.8	----	10.0	47.8	----	57.0	----	9.2	----	N (QP)
3	0.69200	29.3	----	10.0	39.3	----	56.0	----	16.7	----	N (QP)
4	2.57600	27.3	----	10.1	37.4	----	56.0	----	18.6	----	N (QP)
5	11.32000	26.5	----	10.2	36.7	----	60.0	----	23.3	----	N (QP)
6	22.21000	19.7	----	10.5	30.2	----	60.0	----	29.8	----	N (QP)
7	0.16900	----	17.5	10.0	----	27.5	----	55.0	----	27.5	N (CAV)
8	0.44300	----	23.9	10.0	----	33.9	----	47.0	----	13.1	N (CAV)
9	0.69200	----	16.9	10.0	----	26.9	----	46.0	----	19.1	N (CAV)
10	2.57600	----	13.7	10.1	----	23.8	----	46.0	----	22.2	N (CAV)
11	11.32000	----	14.5	10.2	----	24.7	----	50.0	----	25.3	N (CAV)
12	22.21000	----	9.7	10.5	----	20.2	----	50.0	----	29.8	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.13 Test data for Mode 9 (Ant-A : Mobile 2 (120.5 kHz) / B : Earphones (127.7 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

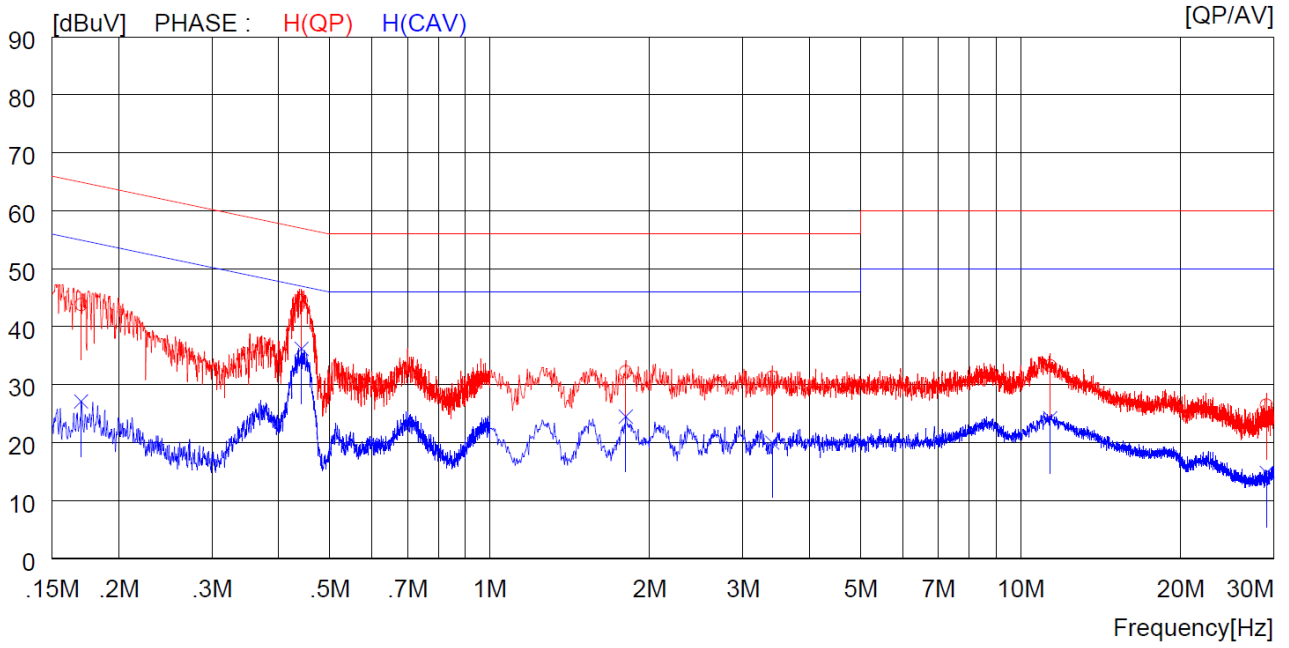

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17000	33.8	----	10.0	43.8	----	65.0	----	21.2	----	H (QP)
2	0.44200	34.5	----	10.0	44.5	----	57.0	----	12.5	----	H (QP)
3	1.80400	22.1	----	10.1	32.2	----	56.0	----	23.8	----	H (QP)
4	3.40400	21.2	----	10.1	31.3	----	56.0	----	24.7	----	H (QP)
5	11.37000	23.1	----	10.2	33.3	----	60.0	----	26.7	----	H (QP)
6	29.05000	15.8	----	10.7	26.5	----	60.0	----	33.5	----	H (QP)
7	0.17000	----	17.1	10.0	----	27.1	----	55.0	----	27.9	H (CAV)
8	0.44200	----	26.2	10.0	----	36.2	----	47.0	----	10.8	H (CAV)
9	1.80400	----	14.4	10.1	----	24.5	----	46.0	----	21.5	H (CAV)
10	3.40400	----	9.9	10.1	----	20.0	----	46.0	----	26.0	H (CAV)
11	11.37000	----	14.0	10.2	----	24.2	----	50.0	----	25.8	H (CAV)
12	29.05000	----	4.1	10.7	----	14.8	----	50.0	----	35.2	H (CAV)

-. Tested Line : NEUTRAL LINE

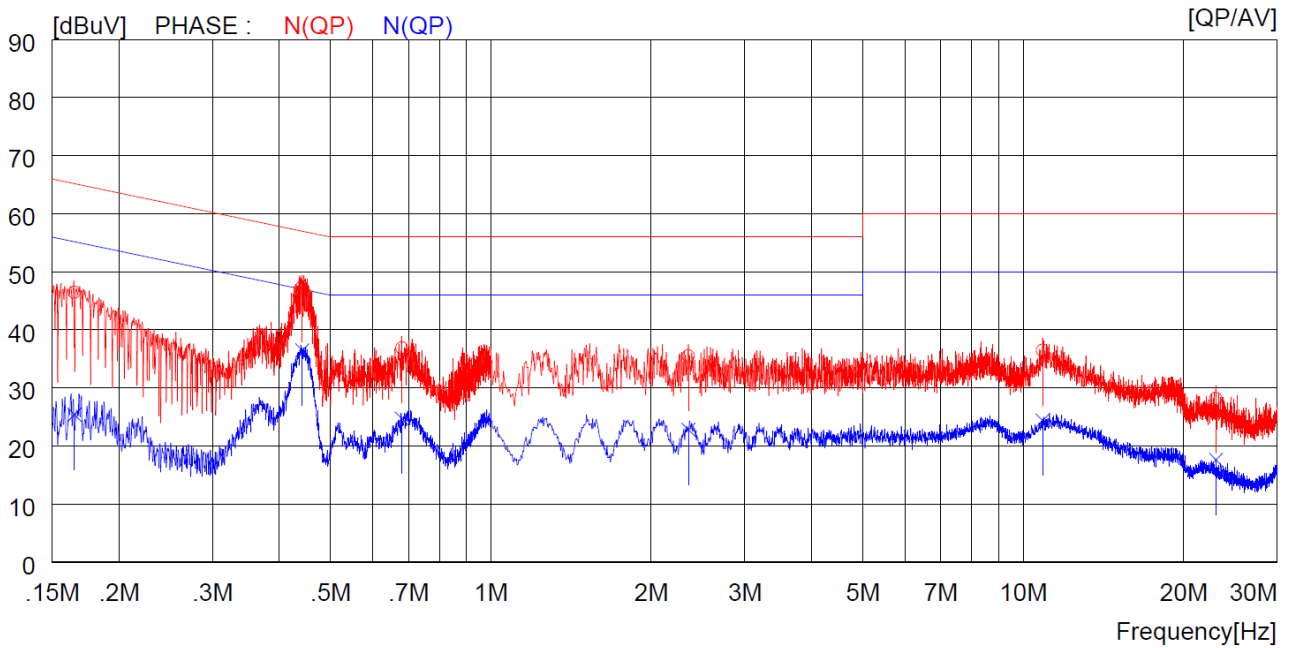

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16500	36.5	----	10.0	46.5	----	65.2	----	18.7	----	N (QP)
2	0.44200	37.4	----	10.0	47.4	----	57.0	----	9.6	----	N (QP)
3	0.68000	26.9	----	10.0	36.9	----	56.0	----	19.1	----	N (QP)
4	2.34800	25.4	----	10.1	35.5	----	56.0	----	20.5	----	N (QP)
5	10.87000	26.3	----	10.2	36.5	----	60.0	----	23.5	----	N (QP)
6	23.02000	17.7	----	10.5	28.2	----	60.0	----	31.8	----	N (QP)
7	0.16500	----	15.4	10.0	----	25.4	----	55.2	----	29.8	N (CAV)
8	0.44200	----	26.5	10.0	----	36.5	----	47.0	----	10.5	N (CAV)
9	0.68000	----	14.7	10.0	----	24.7	----	46.0	----	21.3	N (CAV)
10	2.34800	----	12.7	10.1	----	22.8	----	46.0	----	23.2	N (CAV)
11	10.87000	----	14.2	10.2	----	24.4	----	50.0	----	25.6	N (CAV)
12	23.02000	----	7.1	10.5	----	17.6	----	50.0	----	32.4	N (CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.




**8.14 Test data for Mode 10 (Ant-A : Mobile 1 (138.0 kHz) / B : Earphones (127.7 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

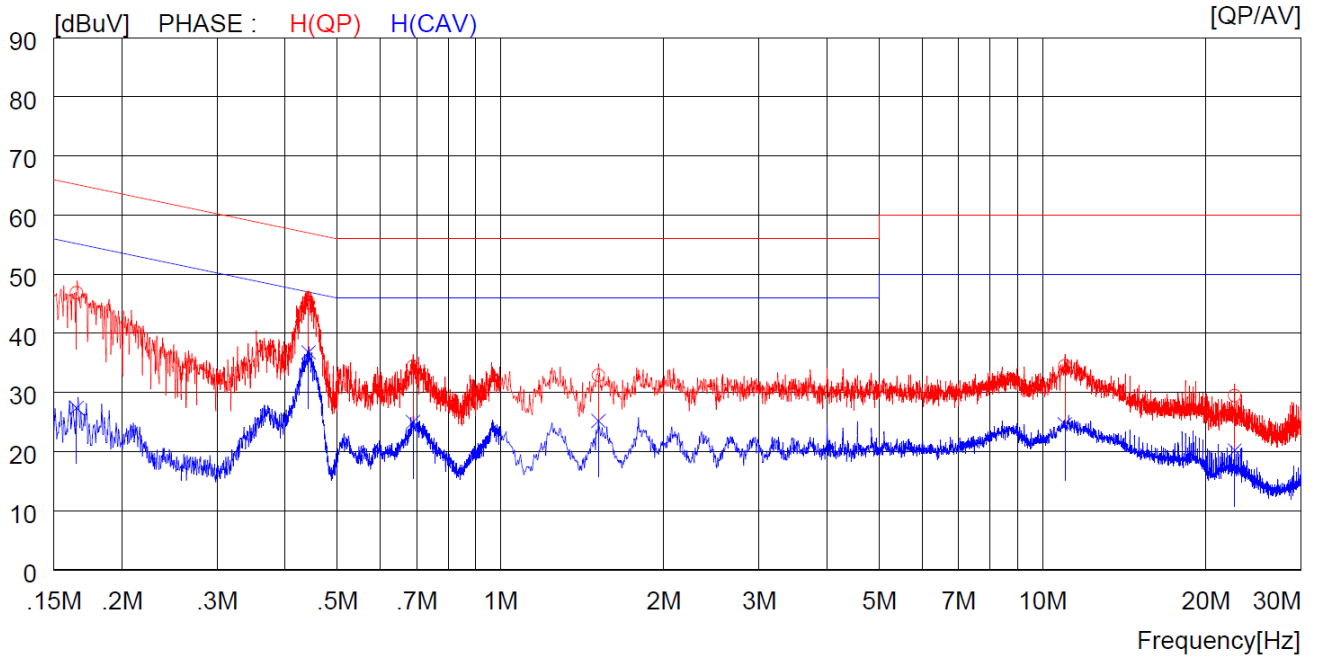

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16500	36.9	----	10.0	46.9	----	65.2	----	18.3	----	H (QP)
2	0.44200	35.2	----	10.0	45.2	----	57.0	----	11.8	----	H (QP)
3	0.68900	24.4	----	10.0	34.4	----	56.0	----	21.6	----	H (QP)
4	1.51600	22.8	----	10.1	32.9	----	56.0	----	23.1	----	H (QP)
5	10.99000	24.3	----	10.2	34.5	----	60.0	----	25.5	----	H (QP)
6	22.63000	19.0	----	10.5	29.5	----	60.0	----	30.5	----	H (QP)
7	0.16500	----	17.4	10.0	----	27.4	----	55.2	----	27.8	H (CAV)
8	0.44200	----	26.8	10.0	----	36.8	----	47.0	----	10.2	H (CAV)
9	0.68900	----	15.0	10.0	----	25.0	----	46.0	----	21.0	H (CAV)
10	1.51600	----	15.1	10.1	----	25.2	----	46.0	----	20.8	H (CAV)
11	10.99000	----	14.4	10.2	----	24.6	----	50.0	----	25.4	H (CAV)
12	22.63000	----	9.7	10.5	----	20.2	----	50.0	----	29.8	H (CAV)

-. Tested Line : NEUTRAL LINE

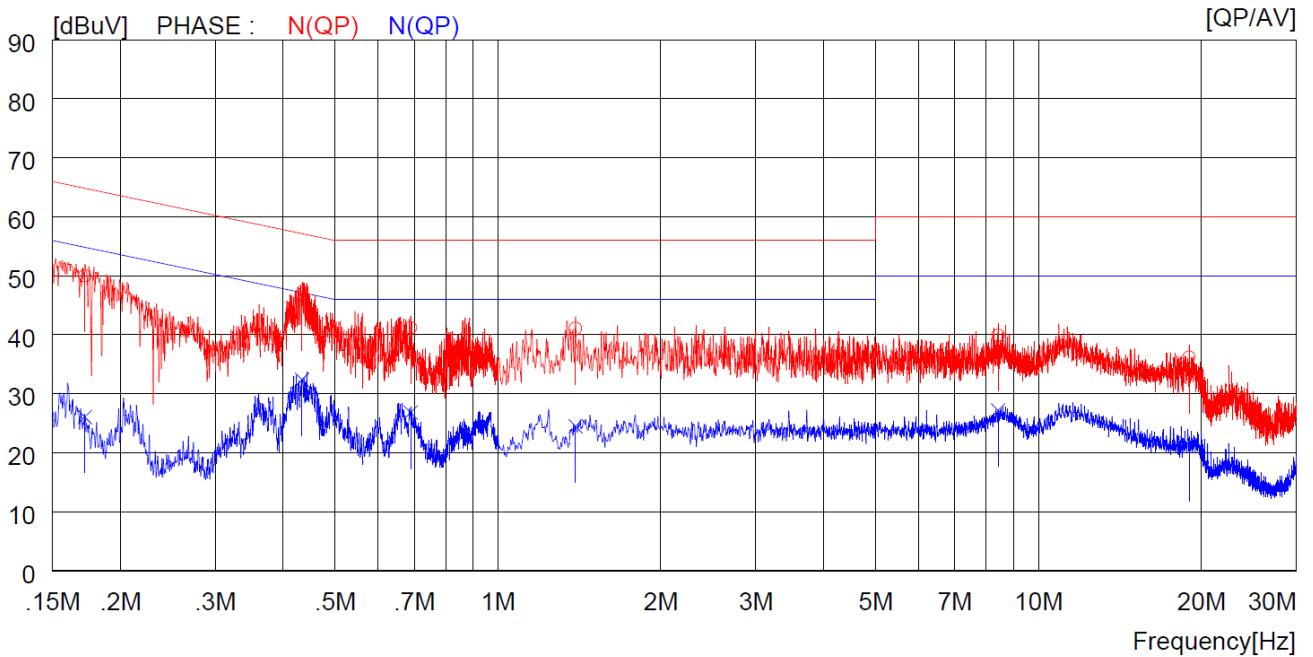


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17200	40.0	----	10.0	50.0	----	64.9	----	14.9	----	N (QP)
2	0.43400	36.9	----	10.0	46.9	----	57.2	----	10.3	----	N (QP)
3	0.68900	31.2	----	10.0	41.2	----	56.0	----	14.8	----	N (QP)
4	1.39200	31.0	----	10.1	41.1	----	56.0	----	14.9	----	N (QP)
5	8.42000	29.7	----	10.2	39.9	----	60.0	----	20.1	----	N (QP)
6	19.01000	25.8	----	10.4	36.2	----	60.0	----	23.8	----	N (QP)
7	0.17200	----	16.1	10.0	----	26.1	----	54.9	----	28.8	N (CAV)
8	0.43400	----	22.4	10.0	----	32.4	----	47.2	----	14.8	N (CAV)
9	0.68900	----	16.8	10.0	----	26.8	----	46.0	----	19.2	N (CAV)
10	1.39200	----	14.4	10.1	----	24.5	----	46.0	----	21.5	N (CAV)
11	8.42000	----	17.0	10.2	----	27.2	----	50.0	----	22.8	N (CAV)
12	19.01000	----	10.9	10.4	----	21.3	----	50.0	----	28.7	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.15 Test data for Mode 11 (Ant-A : Mobile 2 (120.5 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

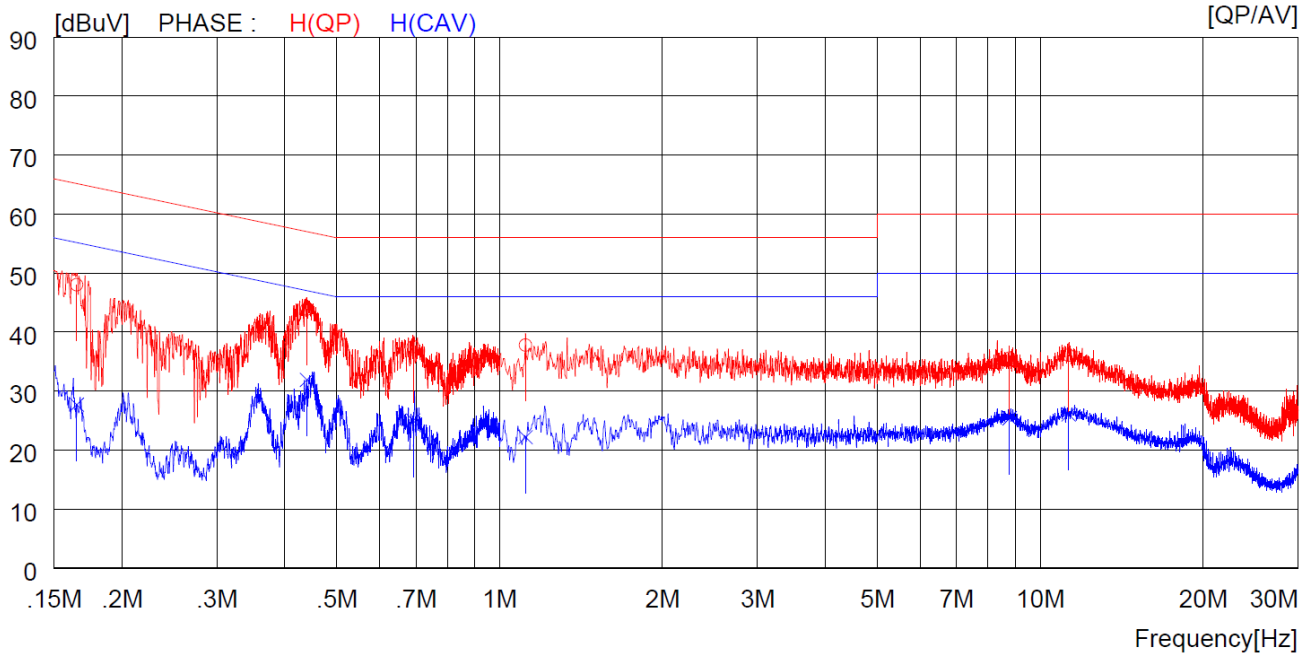

NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16500	38.0	---	10.0	---	48.0	---	65.2	---	17.2	---	H(QP)
2	0.44000	33.9	---	10.0	---	43.9	---	57.1	---	13.2	---	H(QP)
3	0.69200	27.5	---	10.0	---	37.5	---	56.0	---	18.5	---	H(QP)
4	1.11600	27.7	---	10.1	---	37.8	---	56.0	---	18.2	---	H(QP)
5	8.77500	25.4	---	10.2	---	35.6	---	60.0	---	24.4	---	H(QP)
6	11.28000	25.9	---	10.2	---	36.1	---	60.0	---	23.9	---	H(QP)
7	0.16500	---	17.7	10.0	---	27.7	---	55.2	---	27.5	---	H(CAV)
8	0.44000	---	21.9	10.0	---	31.9	---	47.1	---	15.2	---	H(CAV)
9	0.69200	---	15.0	10.0	---	25.0	---	46.0	---	21.0	---	H(CAV)
10	1.11600	---	12.1	10.1	---	22.2	---	46.0	---	23.8	---	H(CAV)
11	8.77500	---	15.2	10.2	---	25.4	---	50.0	---	24.6	---	H(CAV)
12	11.28000	---	15.9	10.2	---	26.1	---	50.0	---	23.9	---	H(CAV)

-. Tested Line : NEUTRAL LINE

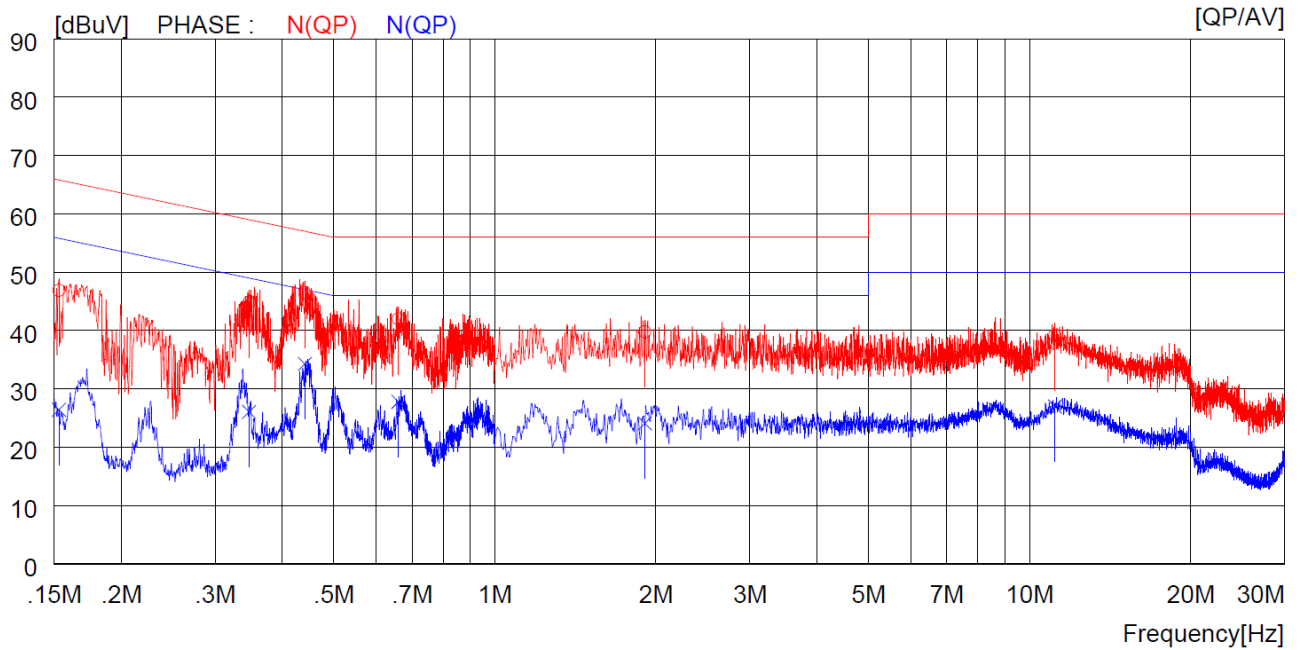


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT [dBuV]	MARGIN [dBuV]	PHASE		
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]					
1	0.15300	36.9	---	10.0	46.9	---	65.8	---	18.9	---	N(QP)
2	0.34700	34.9	---	10.0	44.9	---	59.0	---	14.1	---	N(QP)
3	0.44100	36.5	---	10.0	46.5	---	57.0	---	10.5	---	N(QP)
4	0.66000	32.0	---	10.0	42.0	---	56.0	---	14.0	---	N(QP)
5	1.90800	29.7	---	10.1	39.8	---	56.0	---	16.2	---	N(QP)
6	11.15000	29.0	---	10.2	39.2	---	60.0	---	20.8	---	N(QP)
7	0.15300	---	16.4	10.0	---	26.4	---	55.8	---	29.4	N(CAV)
8	0.34700	---	16.1	10.0	---	26.1	---	49.0	---	22.9	N(CAV)
9	0.44100	---	24.3	10.0	---	34.3	---	47.0	---	12.7	N(CAV)
10	0.66000	---	17.8	10.0	---	27.8	---	46.0	---	18.2	N(CAV)
11	1.90800	---	14.0	10.1	---	24.1	---	46.0	---	21.9	N(CAV)
12	11.15000	---	16.8	10.2	---	27.0	---	50.0	---	23.0	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.16 Test data for Mode 12 (Ant-A : Mobile 2 (120.5 kHz) / B : Mobile 2 (120.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

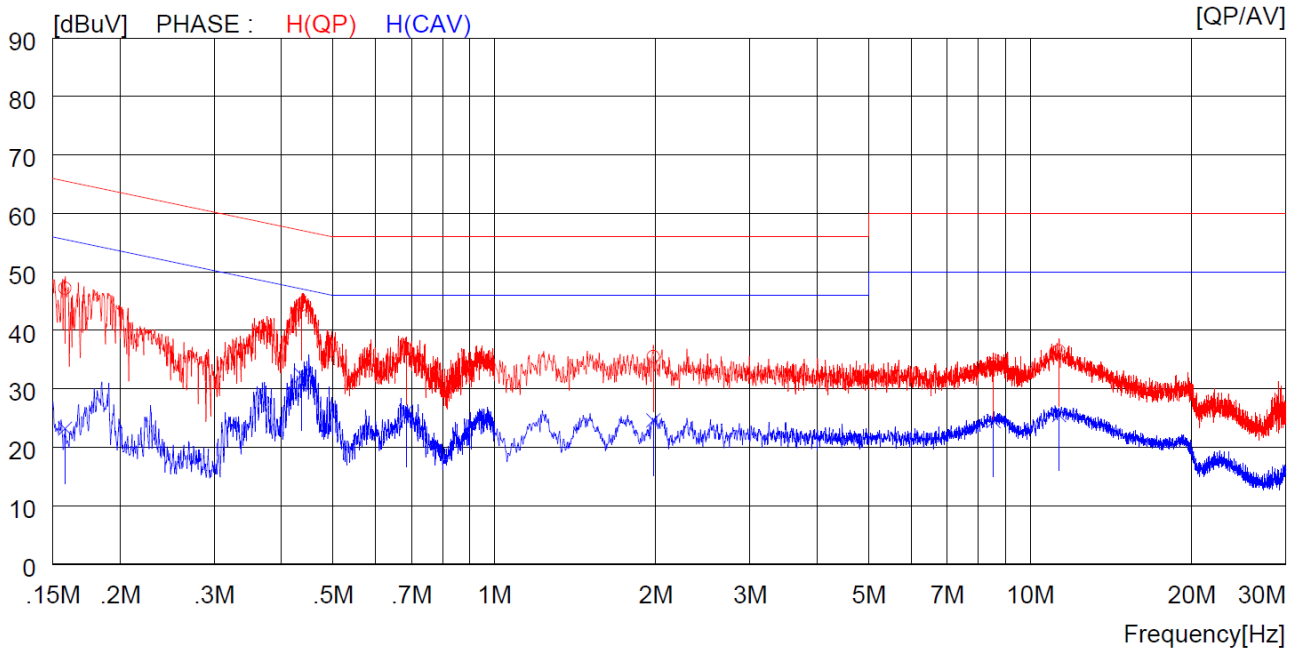

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT	MARGIN	PHASE
	QP	AV	QP	AV	QP	AV	QP	AV			
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15800	37.2	---	10.0	47.2	---	65.6	---	18.4	---	H(QP)
2	0.43700	34.4	---	10.0	44.4	---	57.1	---	12.7	---	H(QP)
3	0.68400	26.8	---	10.0	36.8	---	56.0	---	19.2	---	H(QP)
4	1.98000	25.4	---	10.1	35.5	---	56.0	---	20.5	---	H(QP)
5	8.54500	24.0	---	10.2	34.2	---	60.0	---	25.8	---	H(QP)
6	11.32000	26.3	---	10.2	36.5	---	60.0	---	23.5	---	H(QP)
7	0.15800	---	13.2	10.0	---	23.2	---	55.6	---	32.4	H(CAV)
8	0.43700	---	22.3	10.0	---	32.3	---	47.1	---	14.8	H(CAV)
9	0.68400	---	16.1	10.0	---	26.1	---	46.0	---	19.9	H(CAV)
10	1.98000	---	14.5	10.1	---	24.6	---	46.0	---	21.4	H(CAV)
11	8.54500	---	14.3	10.2	---	24.5	---	50.0	---	25.5	H(CAV)
12	11.32000	---	15.3	10.2	---	25.5	---	50.0	---	24.5	H(CAV)

-. Tested Line : NEUTRAL LINE

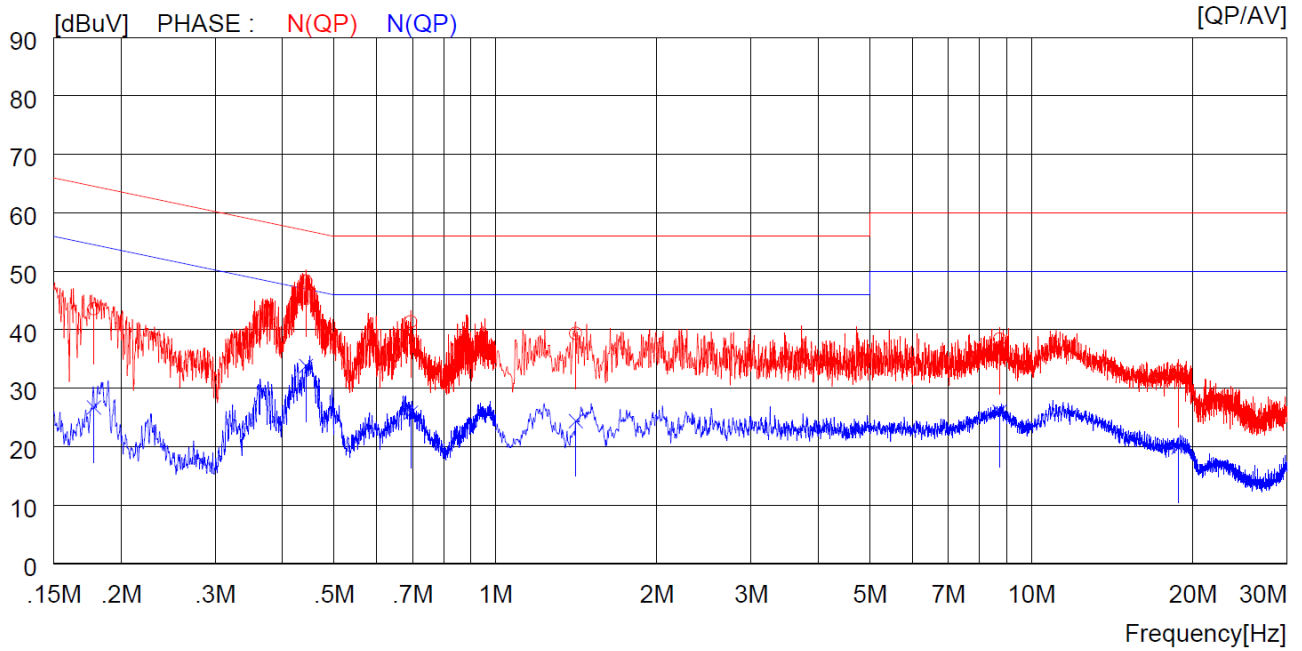


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT	MARGIN	PHASE		
		QP	AV		QP	AV					QP
		[dBuV]	[dBuV]		[dBuV]	[dBuV]	[dBuV]	[dBuV]			
1	0.17800	33.6	---	10.0	43.6	---	64.6	---	21.0	---	N(QP)
2	0.44300	38.3	---	10.0	48.3	---	57.0	---	8.7	---	N(QP)
3	0.69500	31.4	---	10.0	41.4	---	56.0	---	14.6	---	N(QP)
4	1.41200	29.3	---	10.1	39.4	---	56.0	---	16.6	---	N(QP)
5	8.73000	28.2	---	10.2	38.4	---	60.0	---	21.6	---	N(QP)
6	18.80000	22.4	---	10.4	32.8	---	60.0	---	27.2	---	N(QP)
7	0.17800	---	16.7	10.0	---	26.7	---	54.6	---	27.9	N(CAV)
8	0.44300	---	23.8	10.0	---	33.8	---	47.0	---	13.2	N(CAV)
9	0.69500	---	15.8	10.0	---	25.8	---	46.0	---	20.2	N(CAV)
10	1.41200	---	14.3	10.1	---	24.4	---	46.0	---	21.6	N(CAV)
11	8.73000	---	15.8	10.2	---	26.0	---	50.0	---	24.0	N(CAV)
12	18.80000	---	9.5	10.4	---	19.9	---	50.0	---	30.1	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.17 Test data for Mode 13 (Ant-A : Mobile 2 (120.5 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

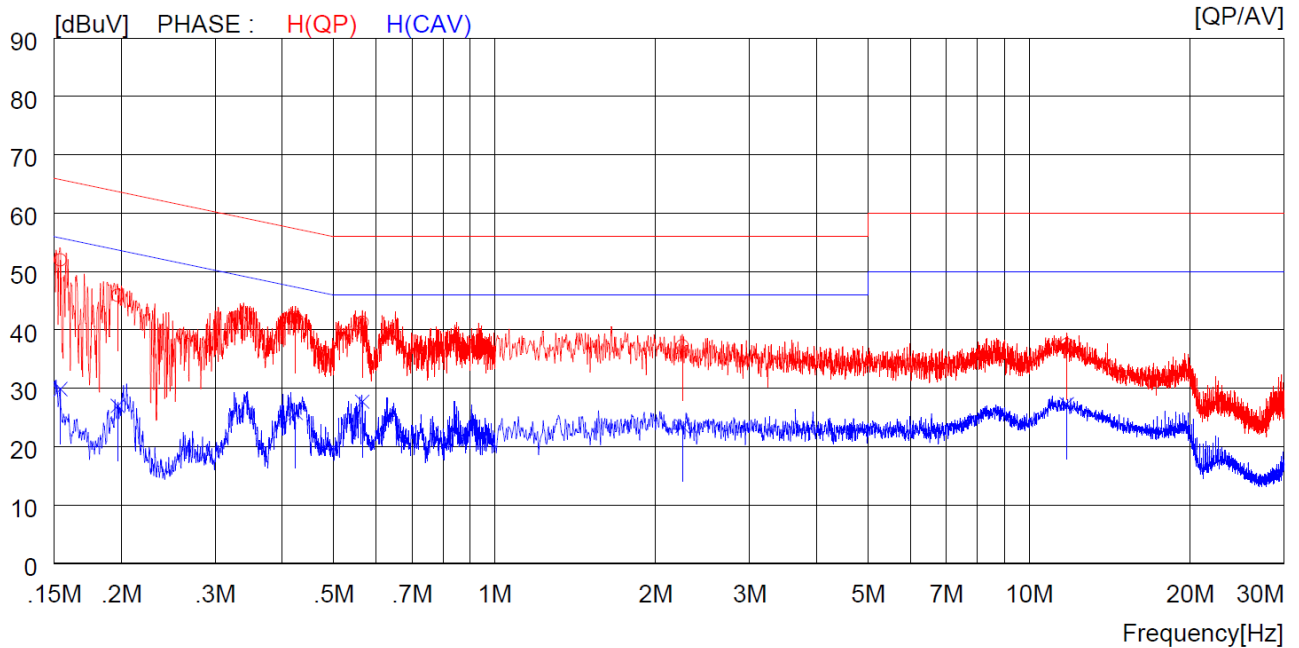

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]		
1	0.15400	42.0	---	10.0	52.0	---	65.8	---	13.8	---	H(QP)	
2	0.19700	35.9	---	10.0	45.9	---	63.7	---	17.8	---	H(QP)	
3	0.42400	32.1	---	10.0	42.1	---	57.4	---	15.3	---	H(QP)	
4	0.56500	31.3	---	10.0	41.3	---	56.0	---	14.7	---	H(QP)	
5	2.24400	27.2	---	10.1	37.3	---	56.0	---	18.7	---	H(QP)	
6	11.76000	27.3	---	10.2	37.5	---	60.0	---	22.5	---	H(QP)	
7	0.15400	---	19.9	10.0	---	29.9	---	55.8	---	25.9	H(CAV)	
8	0.19700	---	17.0	10.0	---	27.0	---	53.7	---	26.7	H(CAV)	
9	0.42400	---	15.8	10.0	---	25.8	---	47.4	---	21.6	H(CAV)	
10	0.56500	---	17.7	10.0	---	27.7	---	46.0	---	18.3	H(CAV)	
11	2.24400	---	13.4	10.1	---	23.5	---	46.0	---	22.5	H(CAV)	
12	11.76000	---	17.1	10.2	---	27.3	---	50.0	---	22.7	H(CAV)	

-. Tested Line : NEUTRAL LINE

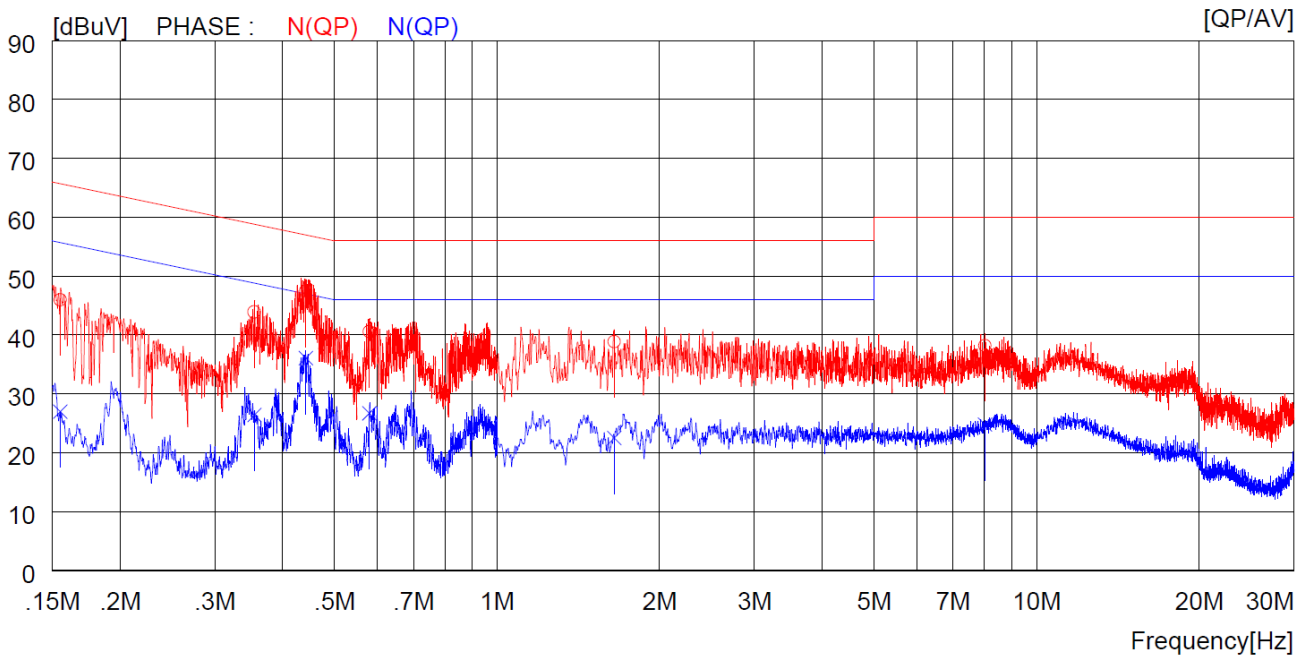

NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE
		QP	AV	QP	AV	QP	AV	QP	AV		
		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	
1	0.15500	36.0	---	10.0	46.0	---	65.7	---	19.7	---	N(QP)
2	0.35500	33.9	---	10.0	43.9	---	58.8	---	14.9	---	N(QP)
3	0.44200	37.5	---	10.0	47.5	---	57.0	---	9.5	---	N(QP)
4	0.58000	30.6	---	10.0	40.6	---	56.0	---	15.4	---	N(QP)
5	1.64800	28.8	---	10.1	38.9	---	56.0	---	17.1	---	N(QP)
6	8.02000	28.0	---	10.2	38.2	---	60.0	---	21.8	---	N(QP)
7	0.15500	---	17.0	10.0	---	27.0	---	55.7	---	28.7	N(CAV)
8	0.35500	---	16.4	10.0	---	26.4	---	48.8	---	22.4	N(CAV)
9	0.44200	---	26.1	10.0	---	36.1	---	47.0	---	10.9	N(CAV)
10	0.58000	---	16.7	10.0	---	26.7	---	46.0	---	19.3	N(CAV)
11	1.64800	---	12.4	10.1	---	22.5	---	46.0	---	23.5	N(CAV)
12	8.02000	---	14.6	10.2	---	24.8	---	50.0	---	25.2	N(CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.




**8.18 Test data for Mode 14 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 2 (120.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

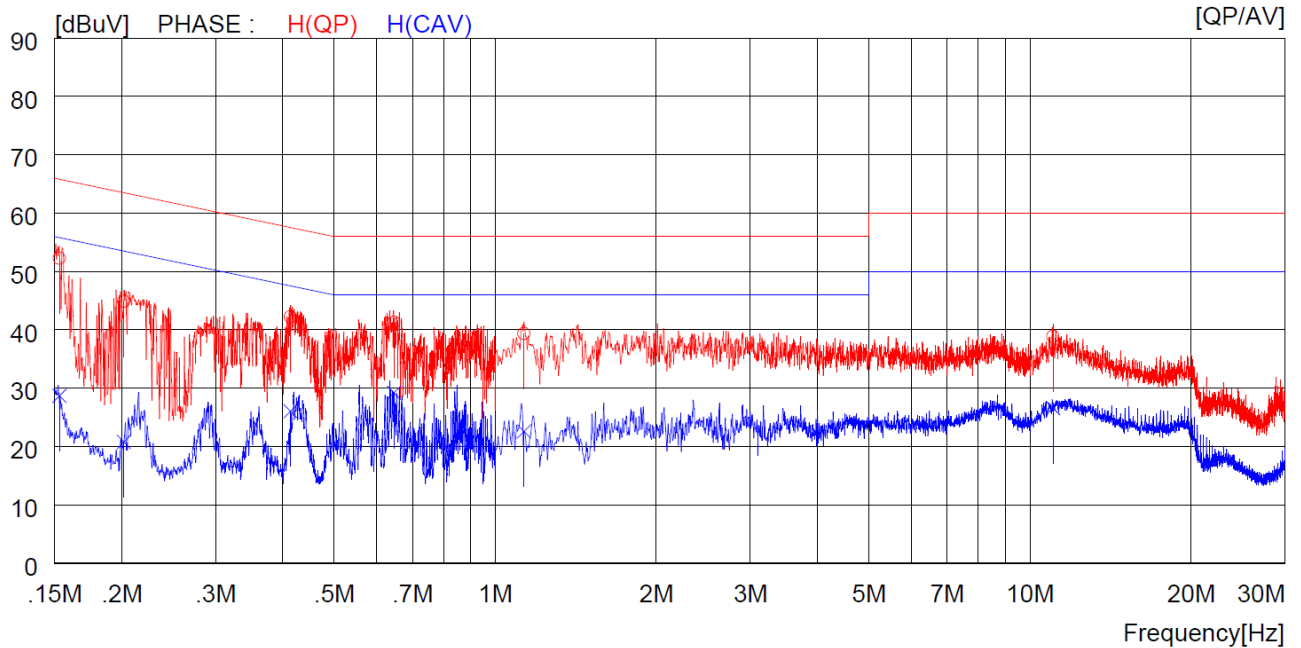

NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
		QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15300	42.3	---	10.0	52.3	---	65.8	---	13.5	---		H(QP)
2	0.20200	34.9	---	10.0	44.9	---	63.5	---	18.6	---		H(QP)
3	0.41400	32.2	---	10.0	42.2	---	57.6	---	15.4	---		H(QP)
4	0.64600	31.3	---	10.0	41.3	---	56.0	---	14.7	---		H(QP)
5	1.13200	29.3	---	10.1	39.4	---	56.0	---	16.6	---		H(QP)
6	11.04000	28.7	---	10.2	38.9	---	60.0	---	21.1	---		H(QP)
7	0.15300	---	18.7	10.0	---	28.7	---	55.8	---	27.1		H(CAV)
8	0.20200	---	10.8	10.0	---	20.8	---	53.5	---	32.7		H(CAV)
9	0.41400	---	16.1	10.0	---	26.1	---	47.6	---	21.5		H(CAV)
10	0.64600	---	19.2	10.0	---	29.2	---	46.0	---	16.8		H(CAV)
11	1.13200	---	12.5	10.1	---	22.6	---	46.0	---	23.4		H(CAV)
12	11.04000	---	16.4	10.2	---	26.6	---	50.0	---	23.4		H(CAV)

-. Tested Line : NEUTRAL LINE

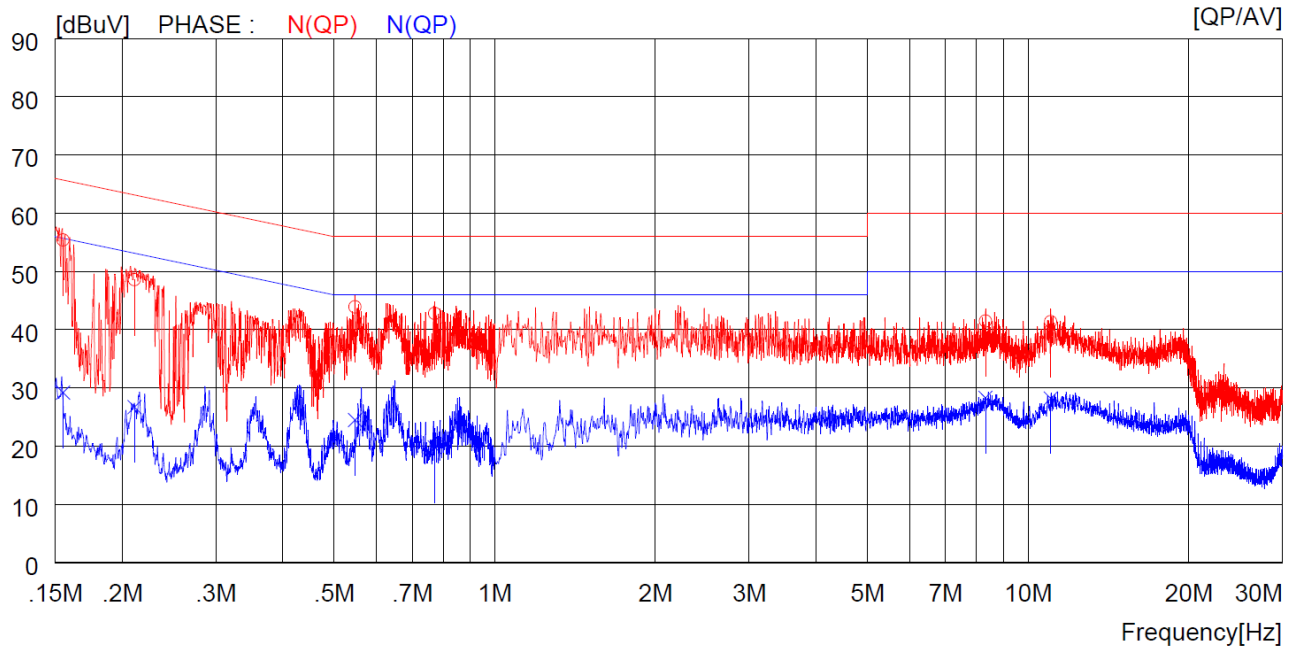


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT [dBuV]	MARGIN [dBuV]	PHASE		
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]					
1	0.15500	45.4	---	10.0	55.4	---	65.7	---	10.3	---	N(QP)
2	0.21100	38.6	---	10.0	48.6	---	63.2	---	14.6	---	N(QP)
3	0.54700	33.9	---	10.0	43.9	---	56.0	---	12.1	---	N(QP)
4	0.77100	32.8	---	10.0	42.8	---	56.0	---	13.2	---	N(QP)
5	8.32000	31.3	---	10.2	41.5	---	60.0	---	18.5	---	N(QP)
6	11.03000	31.2	---	10.2	41.4	---	60.0	---	18.6	---	N(QP)
7	0.15500	---	19.2	10.0	---	29.2	---	55.7	---	26.5	N(CAV)
8	0.21100	---	16.7	10.0	---	26.7	---	53.2	---	26.5	N(CAV)
9	0.54700	---	14.5	10.0	---	24.5	---	46.0	---	21.5	N(CAV)
10	0.77100	---	9.8	10.0	---	19.8	---	46.0	---	26.2	N(CAV)
11	8.32000	---	18.1	10.2	---	28.3	---	50.0	---	21.7	N(CAV)
12	11.03000	---	18.0	10.2	---	28.2	---	50.0	---	21.8	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.19 Test data for Mode 15 (Ant-A : Mobile 2 (120.5 kHz) / B : Mobile 2 (120.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

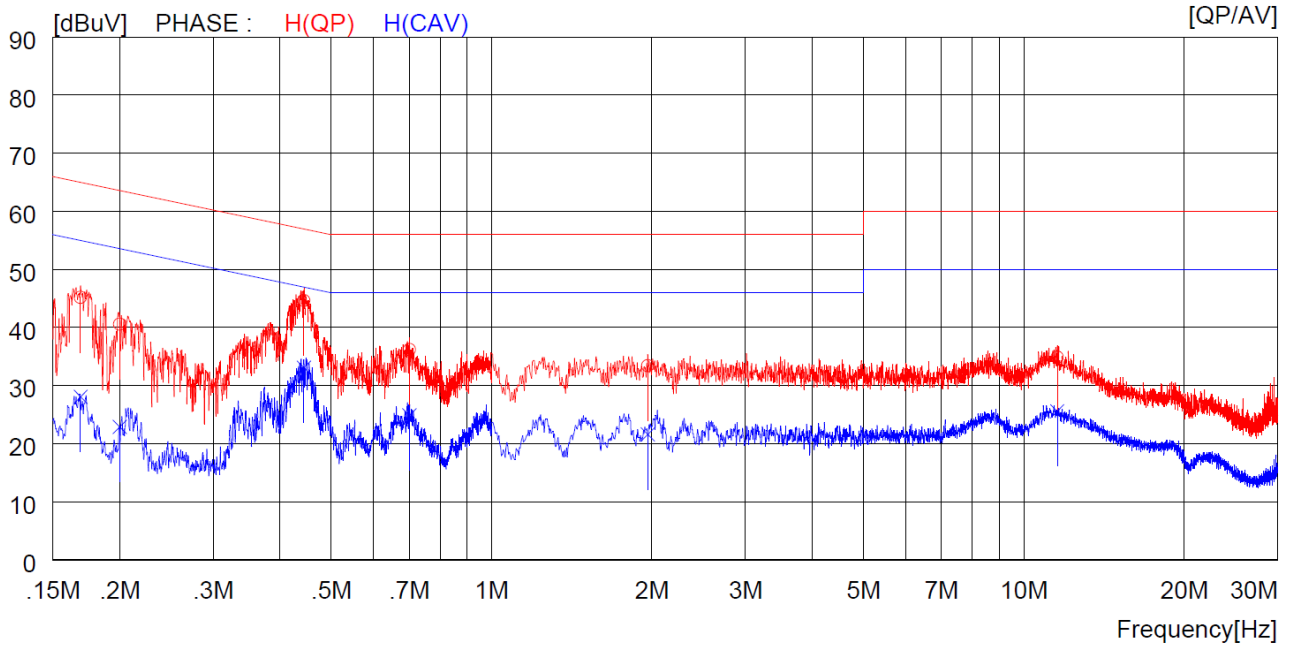

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.16900	35.2	---	10.0	45.2	---	65.0	---	19.8	---			H(QP)
2	0.20000	30.6	---	10.0	40.6	---	63.6	---	23.0	---			H(QP)
3	0.44400	34.7	---	10.0	44.7	---	57.0	---	12.3	---			H(QP)
4	0.70100	26.2	---	10.0	36.2	---	56.0	---	19.8	---			H(QP)
5	1.96400	23.3	---	10.1	33.4	---	56.0	---	22.6	---			H(QP)
6	11.55000	24.7	---	10.2	34.9	---	60.0	---	25.1	---			H(QP)
7	0.16900	---	18.1	10.0	---	28.1	---	55.0	---	26.9			H(CAV)
8	0.20000	---	12.9	10.0	---	22.9	---	53.6	---	30.7			H(CAV)
9	0.44400	---	23.1	10.0	---	33.1	---	47.0	---	13.9			H(CAV)
10	0.70100	---	14.9	10.0	---	24.9	---	46.0	---	21.1			H(CAV)
11	1.96400	---	11.5	10.1	---	21.6	---	46.0	---	24.4			H(CAV)
12	11.55000	---	15.4	10.2	---	25.6	---	50.0	---	24.4			H(CAV)

-. Tested Line : NEUTRAL LINE

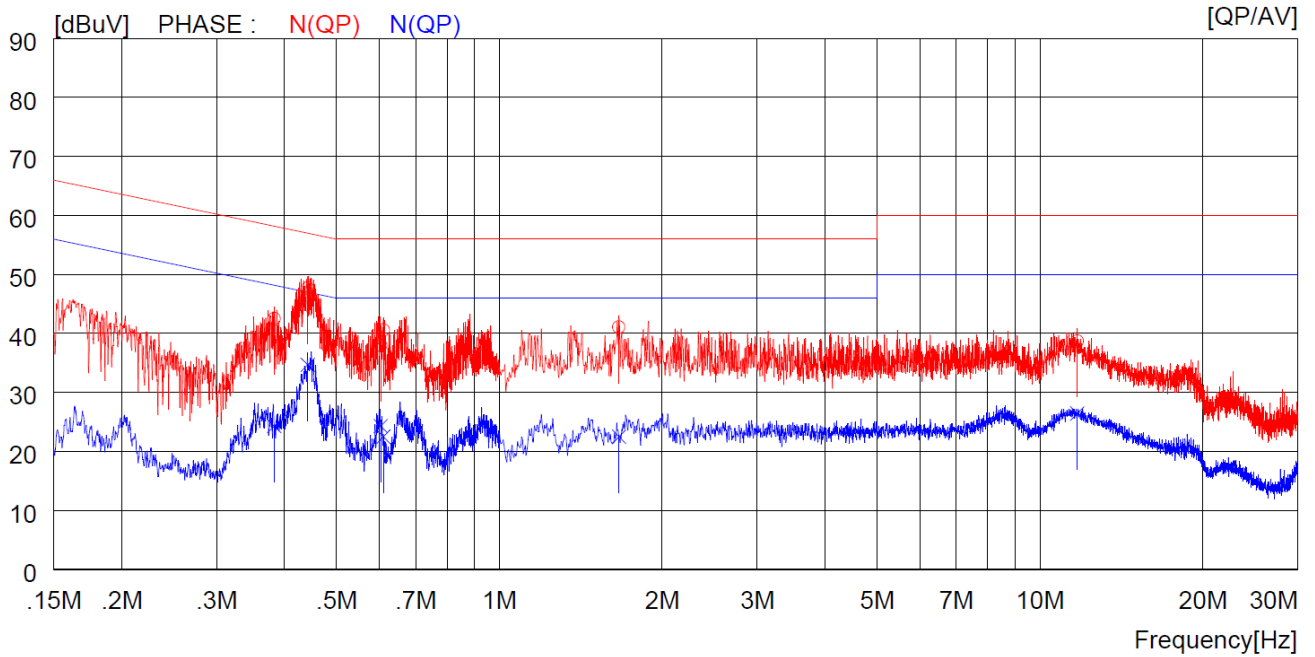


NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
		QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.38300	32.5	---	10.0	42.5	---	58.2	---	15.7	---	N(QP)	
2	0.44200	37.7	---	10.0	47.7	---	57.0	---	9.3	---	N(QP)	
3	0.60300	28.0	---	10.0	38.0	---	56.0	---	18.0	---	N(QP)	
4	0.61000	30.6	---	10.0	40.6	---	56.0	---	15.4	---	N(QP)	
5	1.66400	31.0	---	10.1	41.1	---	56.0	---	14.9	---	N(QP)	
6	11.72000	28.5	---	10.2	38.7	---	60.0	---	21.3	---	N(QP)	
7	0.38300	---	14.3	10.0	---	24.3	---	48.2	---	23.9	N(CAV)	
8	0.44200	---	24.7	10.0	---	34.7	---	47.0	---	12.3	N(CAV)	
9	0.60300	---	14.3	10.0	---	24.3	---	46.0	---	21.7	N(CAV)	
10	0.61000	---	12.5	10.0	---	22.5	---	46.0	---	23.5	N(CAV)	
11	1.66400	---	12.4	10.1	---	22.5	---	46.0	---	23.5	N(CAV)	
12	11.72000	---	16.2	10.2	---	26.4	---	50.0	---	23.6	N(CAV)	

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.20 Test data for Mode 16 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 2 (120.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

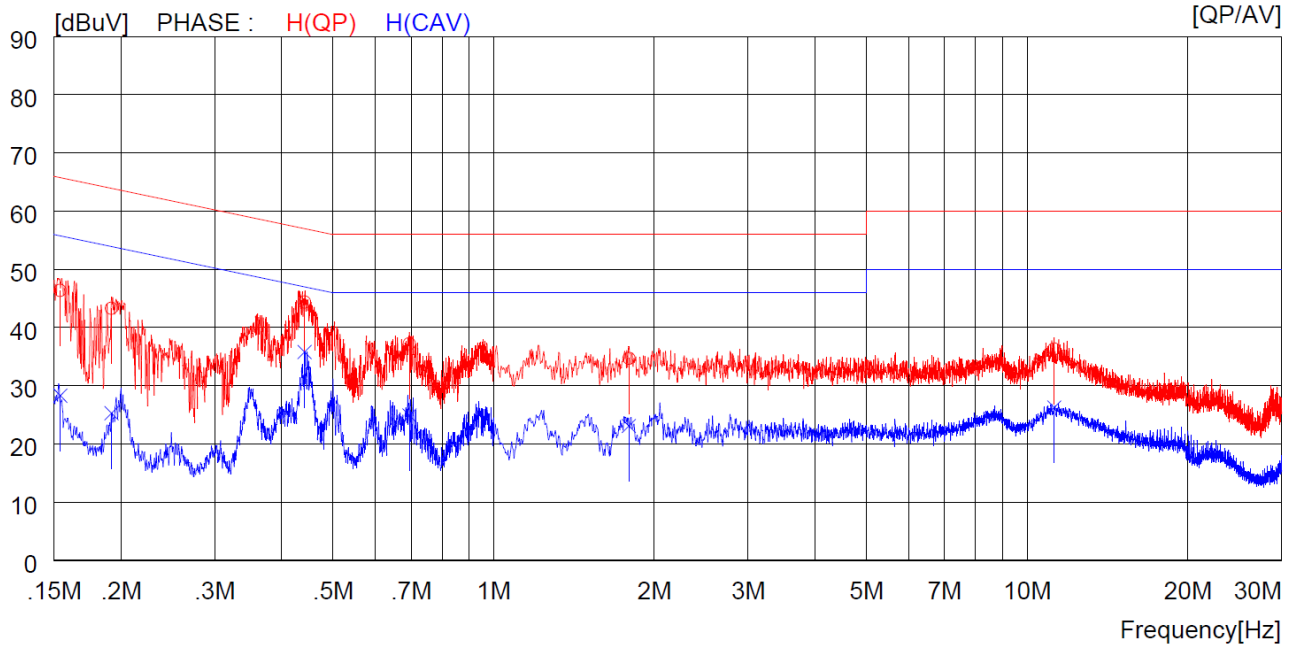

NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
		QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15400	36.4	---	10.0	46.4	---	65.8	---	19.4	---	H(QP)	
2	0.19200	33.3	---	10.0	43.3	---	63.9	---	20.6	---	H(QP)	
3	0.44200	34.4	---	10.0	44.4	---	57.0	---	12.6	---	H(QP)	
4	0.69500	27.2	---	10.0	37.2	---	56.0	---	18.8	---	H(QP)	
5	1.79200	24.6	---	10.1	34.7	---	56.0	---	21.3	---	H(QP)	
6	11.24000	26.1	---	10.2	36.3	---	60.0	---	23.7	---	H(QP)	
7	0.15400	---	18.3	10.0	---	28.3	---	55.8	---	27.5	H(CAV)	
8	0.19200	---	15.3	10.0	---	25.3	---	53.9	---	28.6	H(CAV)	
9	0.44200	---	25.8	10.0	---	35.8	---	47.0	---	11.2	H(CAV)	
10	0.69500	---	14.9	10.0	---	24.9	---	46.0	---	21.1	H(CAV)	
11	1.79200	---	13.0	10.1	---	23.1	---	46.0	---	22.9	H(CAV)	
12	11.24000	---	16.1	10.2	---	26.3	---	50.0	---	23.7	H(CAV)	

-. Tested Line : NEUTRAL LINE

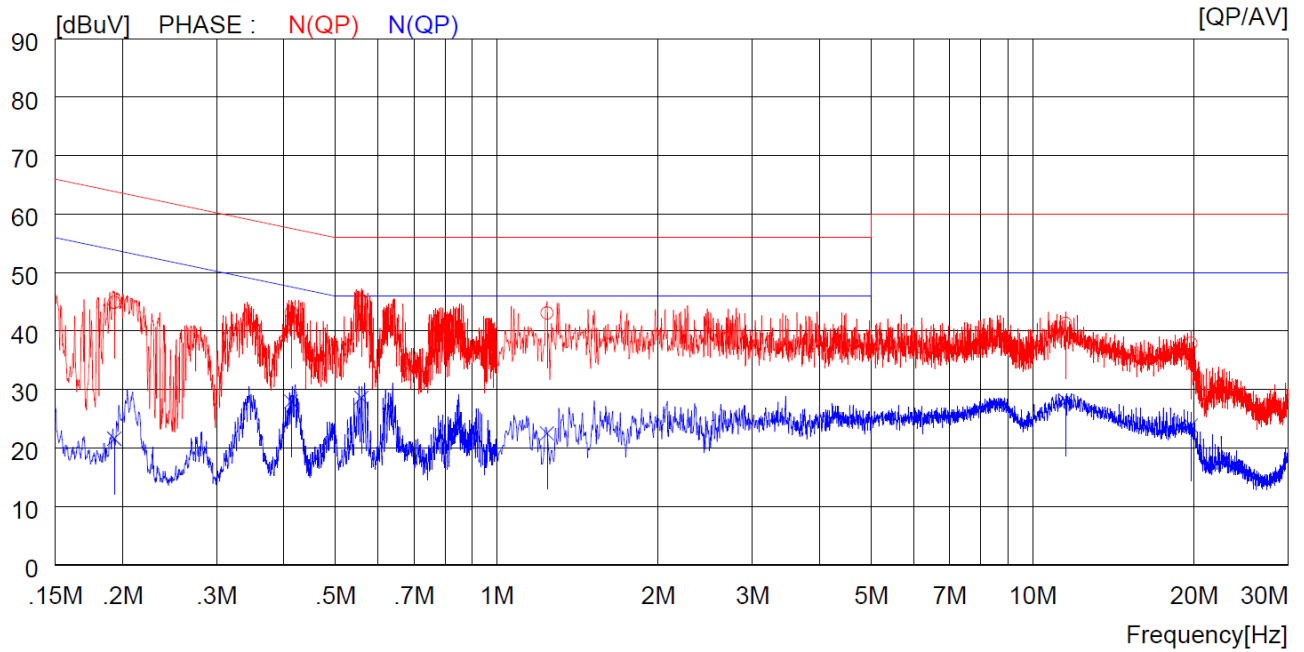


NO	FREQ [MHz]	READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE	
		QP	AV	QP	AV	QP	AV	QP	AV			
		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]		
1	0.19300	34.9	---	---	10.0	44.9	---	63.9	---	19.0	---	N(QP)
2	0.41300	33.2	---	---	10.0	43.2	---	57.6	---	14.4	---	N(QP)
3	0.55900	35.2	---	---	10.0	45.2	---	56.0	---	10.8	---	N(QP)
4	1.24000	33.0	---	---	10.1	43.1	---	56.0	---	12.9	---	N(QP)
5	11.53000	31.1	---	---	10.2	41.3	---	60.0	---	18.7	---	N(QP)
6	19.73000	27.5	---	---	10.4	37.9	---	60.0	---	22.1	---	N(QP)
7	0.19300	---	---	11.6	10.0	---	21.6	---	53.9	---	32.3	N(CAV)
8	0.41300	---	---	18.0	10.0	---	28.0	---	47.6	---	19.6	N(CAV)
9	0.55900	---	---	18.6	10.0	---	28.6	---	46.0	---	17.4	N(CAV)
10	1.24000	---	---	12.4	10.1	---	22.5	---	46.0	---	23.5	N(CAV)
11	11.53000	---	---	17.9	10.2	---	28.1	---	50.0	---	21.9	N(CAV)
12	19.73000	---	---	13.4	10.4	---	23.8	---	50.0	---	26.2	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.21 Test data for Mode 17 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 2 (120.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

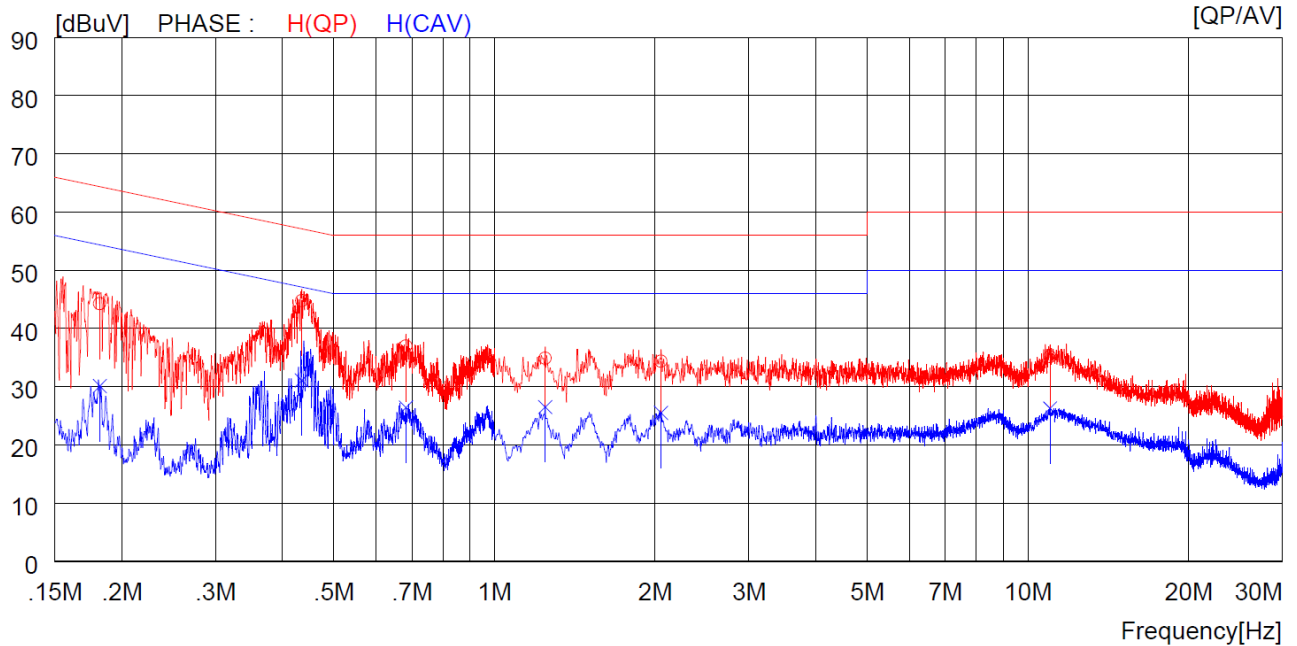

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18200	34.3	----	10.0	44.3	----	64.4	----	20.1	----	H (QP)
2	0.43500	34.8	----	10.0	44.8	----	57.2	----	12.4	----	H (QP)
3	0.68200	27.0	----	10.0	37.0	----	56.0	----	19.0	----	H (QP)
4	1.24400	24.8	----	10.1	34.9	----	56.0	----	21.1	----	H (QP)
5	2.05200	24.3	----	10.1	34.4	----	56.0	----	21.6	----	H (QP)
6	11.00000	25.0	----	10.2	35.2	----	60.0	----	24.8	----	H (QP)
7	0.18200	----	20.1	10.0	----	30.1	----	54.4	----	24.3	H (CAV)
8	0.43500	----	21.1	10.0	----	31.1	----	47.2	----	16.1	H (CAV)
9	0.68200	----	16.4	10.0	----	26.4	----	46.0	----	19.6	H (CAV)
10	1.24400	----	16.4	10.1	----	26.5	----	46.0	----	19.5	H (CAV)
11	2.05200	----	15.4	10.1	----	25.5	----	46.0	----	20.5	H (CAV)
12	11.00000	----	16.1	10.2	----	26.3	----	50.0	----	23.7	H (CAV)

-. Tested Line : NEUTRAL LINE

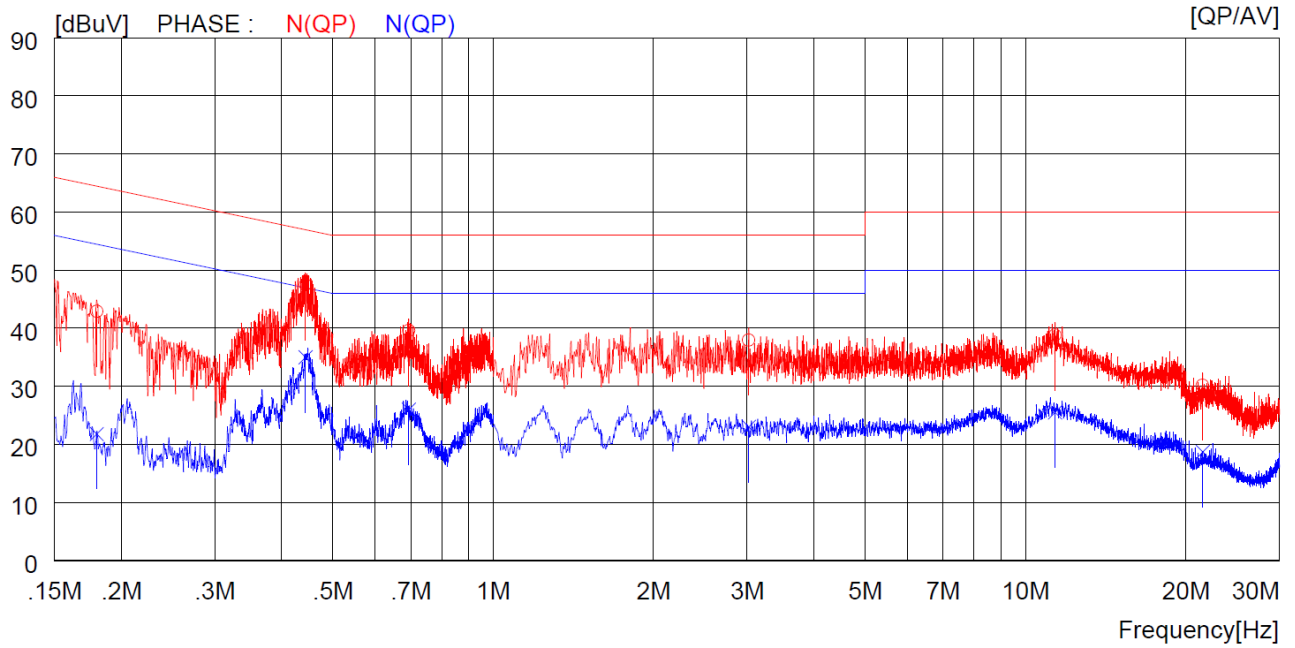

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18000	32.9	----	10.0	42.9	----	64.5	----	21.6	----	N (QP)
2	0.44400	37.5	----	10.0	47.5	----	57.0	----	9.5	----	N (QP)
3	0.69400	29.6	----	10.0	39.6	----	56.0	----	16.4	----	N (QP)
4	3.02000	27.9	----	10.1	38.0	----	56.0	----	18.0	----	N (QP)
5	11.37000	28.6	----	10.2	38.8	----	60.0	----	21.2	----	N (QP)
6	21.52000	19.7	----	10.5	30.2	----	60.0	----	29.8	----	N (QP)
7	0.18000	----	11.8	10.0	----	21.8	----	54.5	----	32.7	N (CAV)
8	0.44400	----	25.0	10.0	----	35.0	----	47.0	----	12.0	N (CAV)
9	0.69400	----	16.0	10.0	----	26.0	----	46.0	----	20.0	N (CAV)
10	3.02000	----	12.9	10.1	----	23.0	----	46.0	----	23.0	N (CAV)
11	11.37000	----	15.3	10.2	----	25.5	----	50.0	----	24.5	N (CAV)
12	21.52000	----	8.2	10.5	----	18.7	----	50.0	----	31.3	N (CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.




**8.22 Test data for Mode 18 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

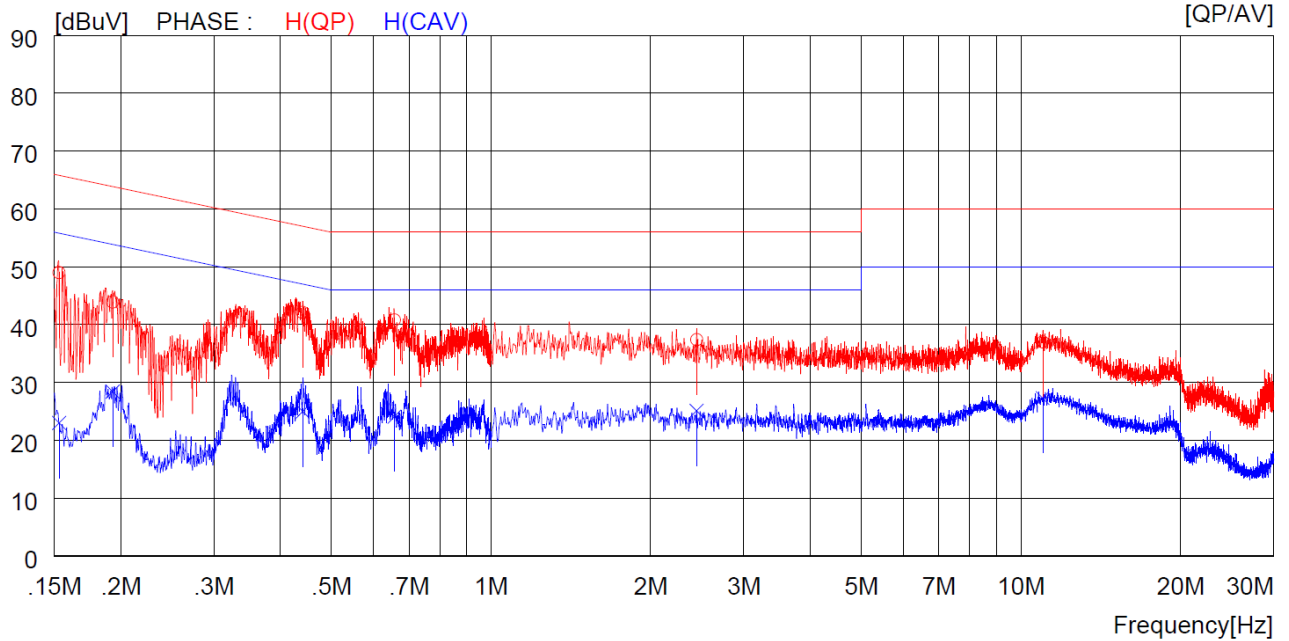

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15300	39.0	----	10.0	49.0	----	65.8	----	16.8	----	H (QP)
2	0.19300	33.9	----	10.0	43.9	----	63.9	----	20.0	----	H (QP)
3	0.44100	32.1	----	10.0	42.1	----	57.0	----	14.9	----	H (QP)
4	0.65700	30.8	----	10.0	40.8	----	56.0	----	15.2	----	H (QP)
5	2.44400	27.3	----	10.1	37.4	----	56.0	----	18.6	----	H (QP)
6	10.99000	26.8	----	10.2	37.0	----	60.0	----	23.0	----	H (QP)
7	0.15300	----	13.0	10.0	----	23.0	----	55.8	----	32.8	H (CAV)
8	0.19300	----	18.4	10.0	----	28.4	----	53.9	----	25.5	H (CAV)
9	0.44100	----	15.0	10.0	----	25.0	----	47.0	----	22.0	H (CAV)
10	0.65700	----	14.1	10.0	----	24.1	----	46.0	----	21.9	H (CAV)
11	2.44400	----	15.0	10.1	----	25.1	----	46.0	----	20.9	H (CAV)
12	10.99000	----	17.1	10.2	----	27.3	----	50.0	----	22.7	H (CAV)

-. Tested Line : NEUTRAL LINE

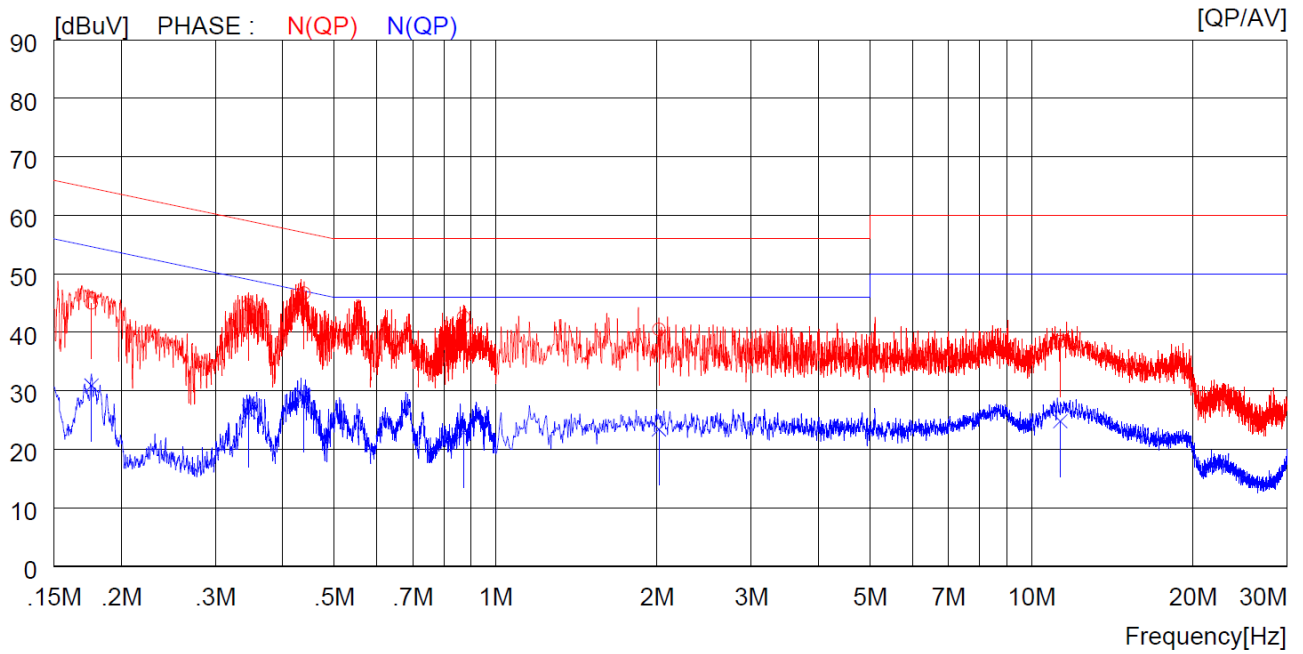


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17600	35.0	----	10.0	45.0	----	64.7	----	19.7	----	N (QP)
2	0.34600	34.7	----	10.0	44.7	----	59.1	----	14.4	----	N (QP)
3	0.43900	36.7	----	10.0	46.7	----	57.1	----	10.4	----	N (QP)
4	0.87100	32.6	----	10.0	42.6	----	56.0	----	13.4	----	N (QP)
5	2.01600	30.4	----	10.1	40.5	----	56.0	----	15.5	----	N (QP)
6	11.31000	28.2	----	10.2	38.4	----	60.0	----	21.6	----	N (QP)
7	0.17600	----	20.9	10.0	----	30.9	----	54.7	----	23.8	N (CAV)
8	0.34600	----	16.4	10.0	----	26.4	----	49.1	----	22.7	N (CAV)
9	0.43900	----	19.0	10.0	----	29.0	----	47.1	----	18.1	N (CAV)
10	0.87100	----	12.9	10.0	----	22.9	----	46.0	----	23.1	N (CAV)
11	2.01600	----	13.3	10.1	----	23.4	----	46.0	----	22.6	N (CAV)
12	11.31000	----	14.6	10.2	----	24.8	----	50.0	----	25.2	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.23 Test data for Mode 19 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

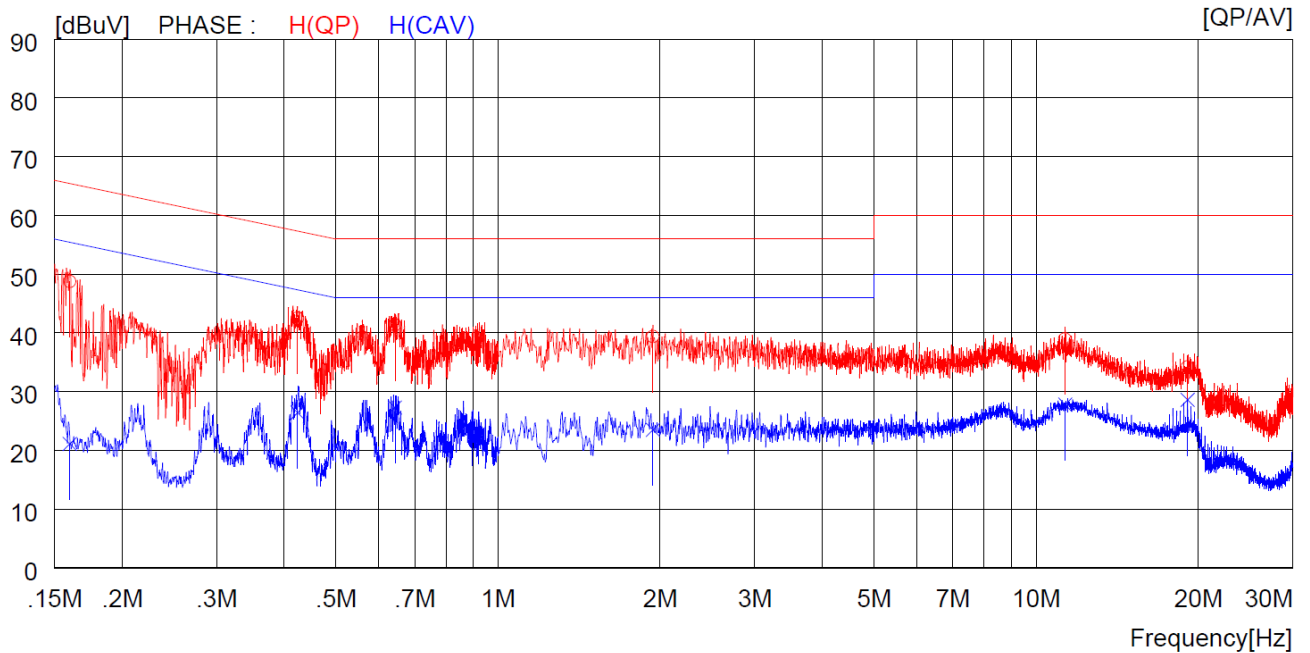

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16000	38.8	----	10.0	48.8	----	65.5	----	16.7	----	H (QP)
2	0.42400	32.5	----	10.0	42.5	----	57.4	----	14.9	----	H (QP)
3	0.64300	31.4	----	10.0	41.4	----	56.0	----	14.6	----	H (QP)
4	1.94000	29.3	----	10.1	39.4	----	56.0	----	16.6	----	H (QP)
5	11.32000	28.8	----	10.2	39.0	----	60.0	----	21.0	----	H (QP)
6	19.12000	23.8	----	10.4	34.2	----	60.0	----	25.8	----	H (QP)
7	0.16000	----	11.1	10.0	----	21.1	----	55.5	----	34.4	H (CAV)
8	0.42400	----	16.4	10.0	----	26.4	----	47.4	----	21.0	H (CAV)
9	0.64300	----	17.3	10.0	----	27.3	----	46.0	----	18.7	H (CAV)
10	1.94000	----	13.4	10.1	----	23.5	----	46.0	----	22.5	H (CAV)
11	11.32000	----	17.6	10.2	----	27.8	----	50.0	----	22.2	H (CAV)
12	19.12000	----	18.2	10.4	----	28.6	----	50.0	----	21.4	H (CAV)

-. Tested Line : NEUTRAL LINE

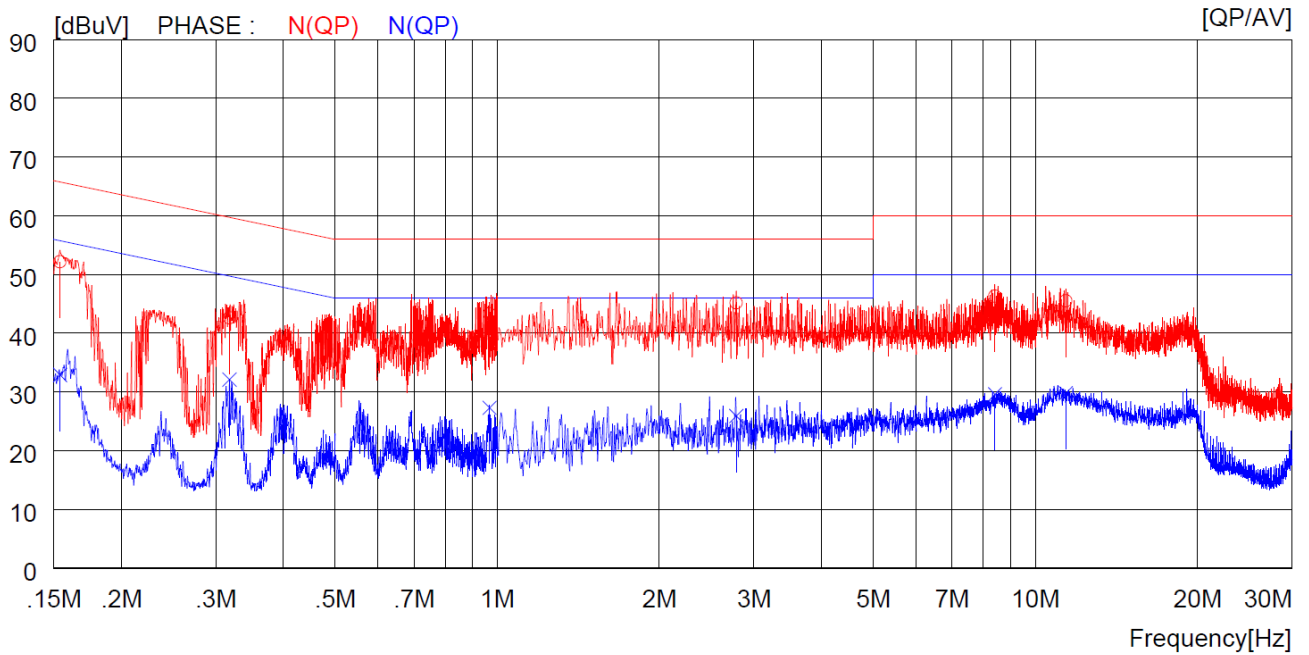


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	42.2	----	10.0	52.2	----	65.8	----	13.6	----	N (QP)
2	0.31800	32.6	----	10.0	42.6	----	59.8	----	17.2	----	N (QP)
3	0.96700	33.3	----	10.0	43.3	----	56.0	----	12.7	----	N (QP)
4	2.78000	35.1	----	10.1	45.2	----	56.0	----	10.8	----	N (QP)
5	8.41000	36.1	----	10.2	46.3	----	60.0	----	13.7	----	N (QP)
6	11.39000	35.3	----	10.2	45.5	----	60.0	----	14.5	----	N (QP)
7	0.15400	----	22.9	10.0	----	32.9	----	55.8	----	22.9	N (CAV)
8	0.31800	----	22.1	10.0	----	32.1	----	49.8	----	17.7	N (CAV)
9	0.96700	----	17.3	10.0	----	27.3	----	46.0	----	18.7	N (CAV)
10	2.78000	----	15.8	10.1	----	25.9	----	46.0	----	20.1	N (CAV)
11	8.41000	----	19.4	10.2	----	29.6	----	50.0	----	20.4	N (CAV)
12	11.39000	----	19.6	10.2	----	29.8	----	50.0	----	20.2	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.24 Test data for Mode 20 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

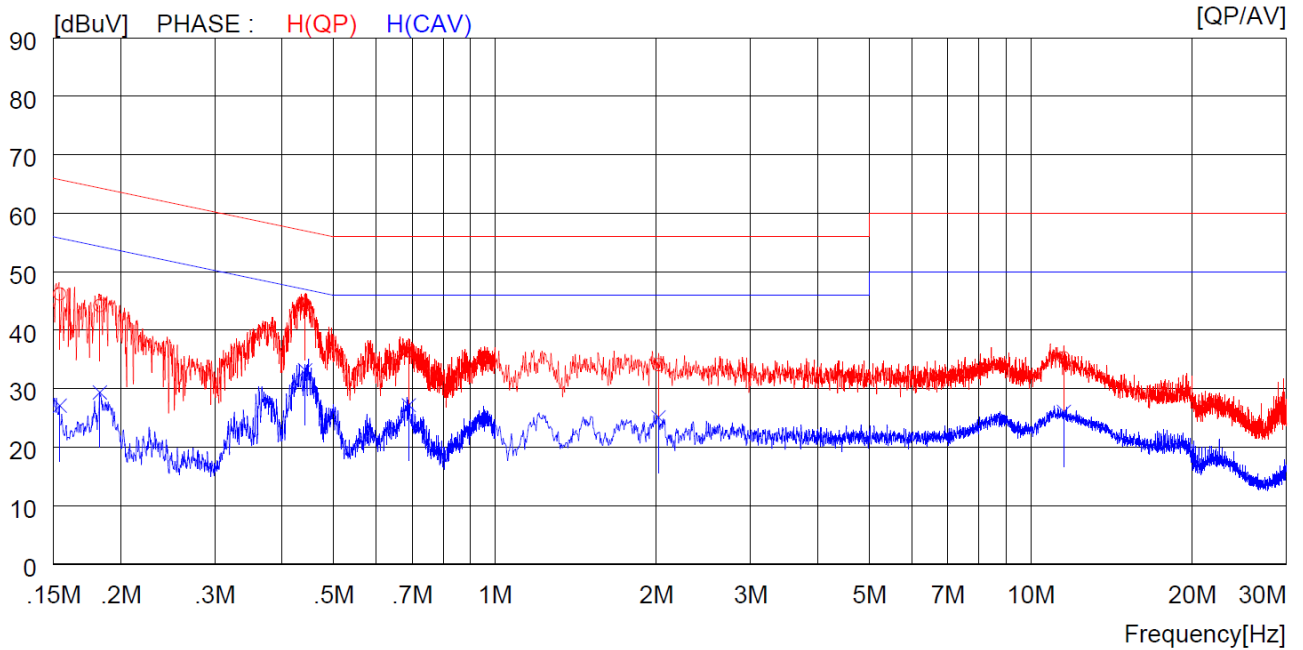

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	36.2	----	10.0	46.2	----	65.8	----	19.6	----	H (QP)
2	0.18300	34.2	----	10.0	44.2	----	64.3	----	20.1	----	H (QP)
3	0.44200	34.4	----	10.0	44.4	----	57.0	----	12.6	----	H (QP)
4	0.69000	26.5	----	10.0	36.5	----	56.0	----	19.5	----	H (QP)
5	2.02000	24.0	----	10.1	34.1	----	56.0	----	21.9	----	H (QP)
6	11.52000	25.1	----	10.2	35.3	----	60.0	----	24.7	----	H (QP)
7	0.15400	----	17.1	10.0	----	27.1	----	55.8	----	28.7	H (CAV)
8	0.18300	----	19.4	10.0	----	29.4	----	54.3	----	24.9	H (CAV)
9	0.44200	----	23.2	10.0	----	33.2	----	47.0	----	13.8	H (CAV)
10	0.69000	----	17.2	10.0	----	27.2	----	46.0	----	18.8	H (CAV)
11	2.02000	----	15.0	10.1	----	25.1	----	46.0	----	20.9	H (CAV)
12	11.52000	----	15.9	10.2	----	26.1	----	50.0	----	23.9	H (CAV)

-. Tested Line : NEUTRAL LINE

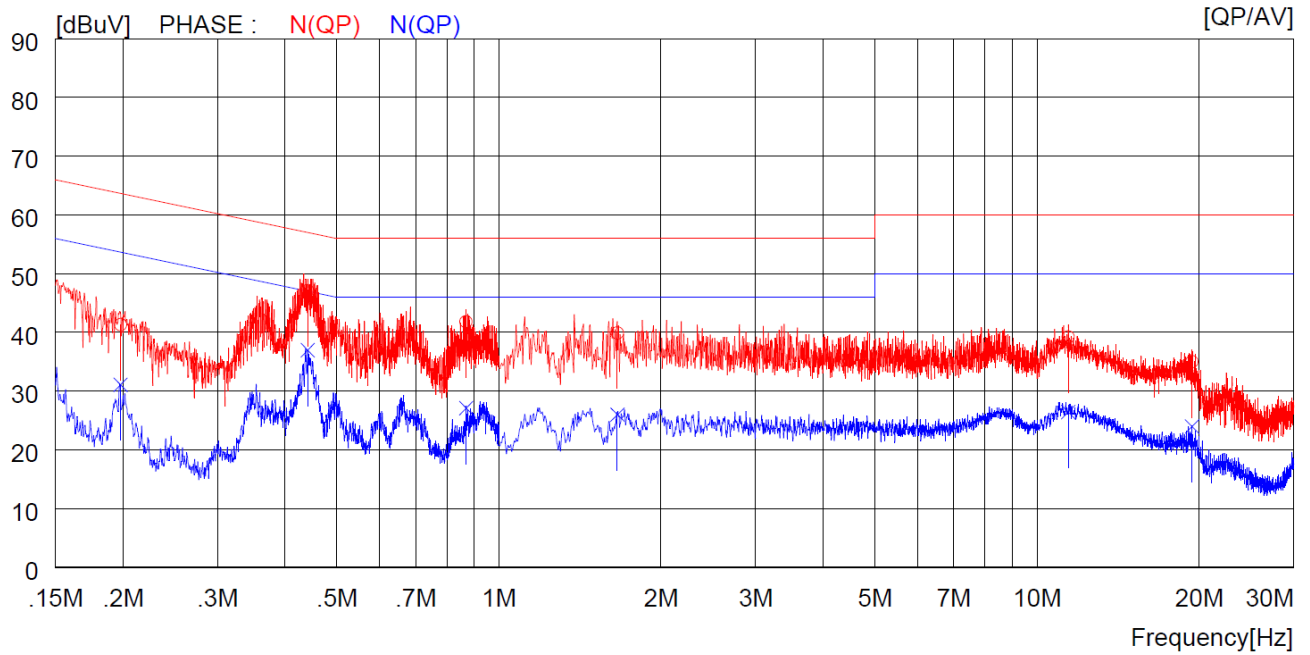


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


**8.25 Test data for Mode 21 (Ant-A : Mobile 1 (138.0 kHz) / B : Mobile 1 (145.5 kHz) / C : Watch (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

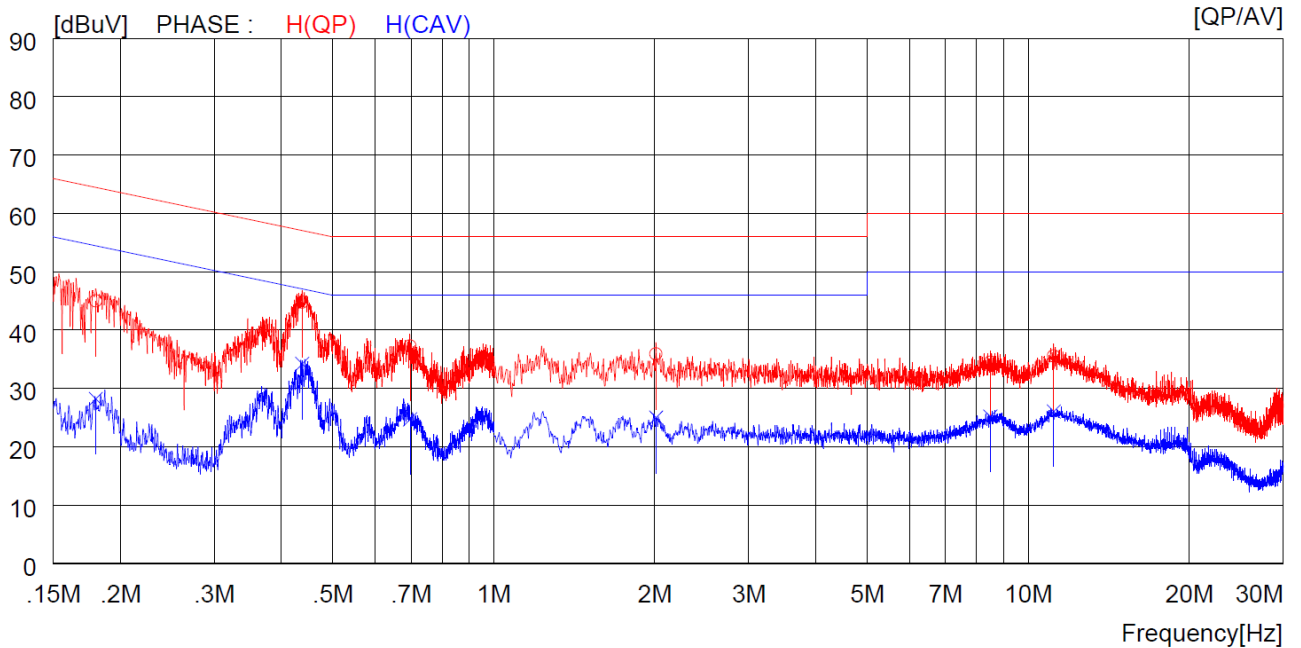

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT	MARGIN	PHASE
	QP	AV	QP	AV	QP	AV	QP	AV			
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.18000	35.0	----	10.0	45.0	----	64.5	----	19.5	----	H(QP)
2	0.43800	34.8	----	10.0	44.8	----	57.1	----	12.3	----	H(QP)
3	0.69700	27.3	----	10.0	37.3	----	56.0	----	18.7	----	H(QP)
4	2.01200	25.8	----	10.1	35.9	----	56.0	----	20.1	----	H(QP)
5	8.49500	24.3	----	10.2	34.5	----	60.0	----	25.5	----	H(QP)
6	11.16000	25.4	----	10.2	35.6	----	60.0	----	24.4	----	H(QP)
7	0.18000	----	18.2	10.0	----	28.2	----	54.5	----	26.3	H(CAV)
8	0.43800	----	24.2	10.0	----	34.2	----	47.1	----	12.9	H(CAV)
9	0.69700	----	14.7	10.0	----	24.7	----	46.0	----	21.3	H(CAV)
10	2.01200	----	14.9	10.1	----	25.0	----	46.0	----	21.0	H(CAV)
11	8.49500	----	15.0	10.2	----	25.2	----	50.0	----	24.8	H(CAV)
12	11.16000	----	15.9	10.2	----	26.1	----	50.0	----	23.9	H(CAV)

-. Tested Line : NEUTRAL LINE

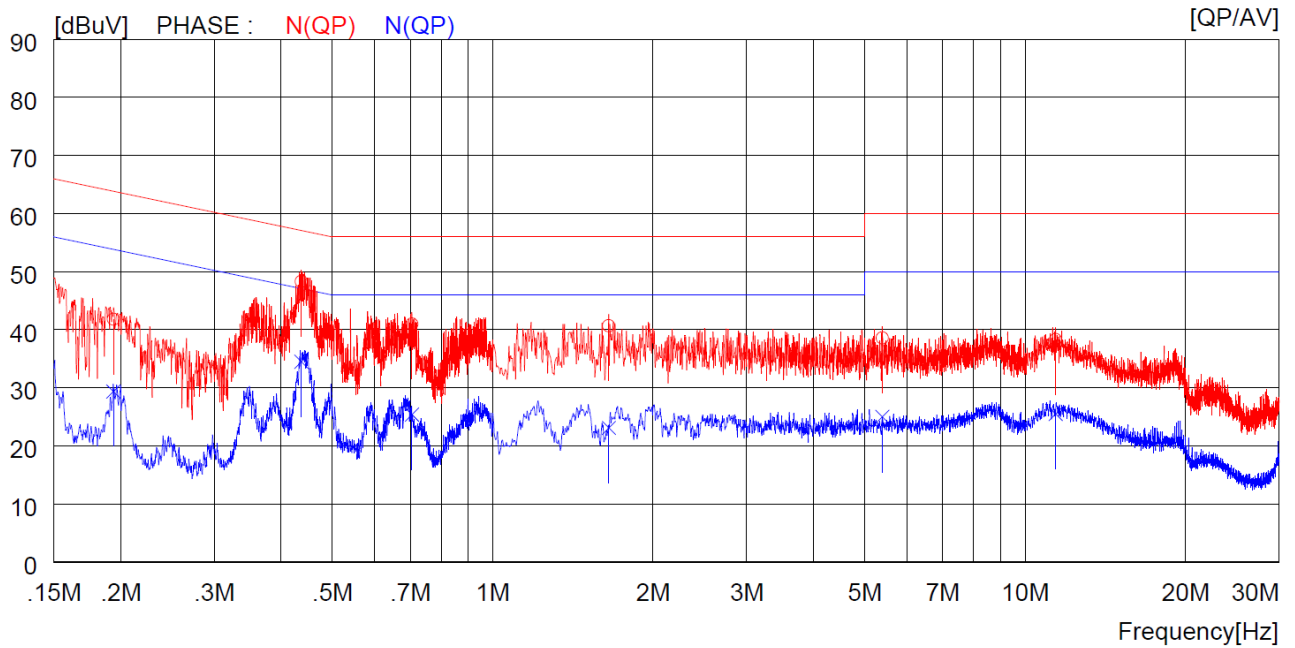

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.19400	31.8	----	10.0	41.8	----	63.9	----	22.1	----	N(QP)
2	0.43700	38.3	----	10.0	48.3	----	57.1	----	8.8	----	N(QP)
3	0.70500	31.0	----	10.0	41.0	----	56.0	----	15.0	----	N(QP)
4	1.65200	30.6	----	10.1	40.7	----	56.0	----	15.3	----	N(QP)
5	5.39500	28.4	----	10.2	38.6	----	60.0	----	21.4	----	N(QP)
6	11.41000	28.1	----	10.2	38.3	----	60.0	----	21.7	----	N(QP)
7	0.19400	----	19.4	10.0	----	29.4	----	53.9	----	24.5	N(CAV)
8	0.43700	----	24.5	10.0	----	34.5	----	47.1	----	12.6	N(CAV)
9	0.70500	----	15.4	10.0	----	25.4	----	46.0	----	20.6	N(CAV)
10	1.65200	----	13.0	10.1	----	23.1	----	46.0	----	22.9	N(CAV)
11	5.39500	----	14.8	10.2	----	25.0	----	50.0	----	25.0	N(CAV)
12	11.41000	----	15.3	10.2	----	25.5	----	50.0	----	24.5	N(CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.




**8.26 Test data for Mode 22 (Ant-A : None (138.0 kHz) / B : None (145.5 kHz) / C : None (145.5 kHz))**

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

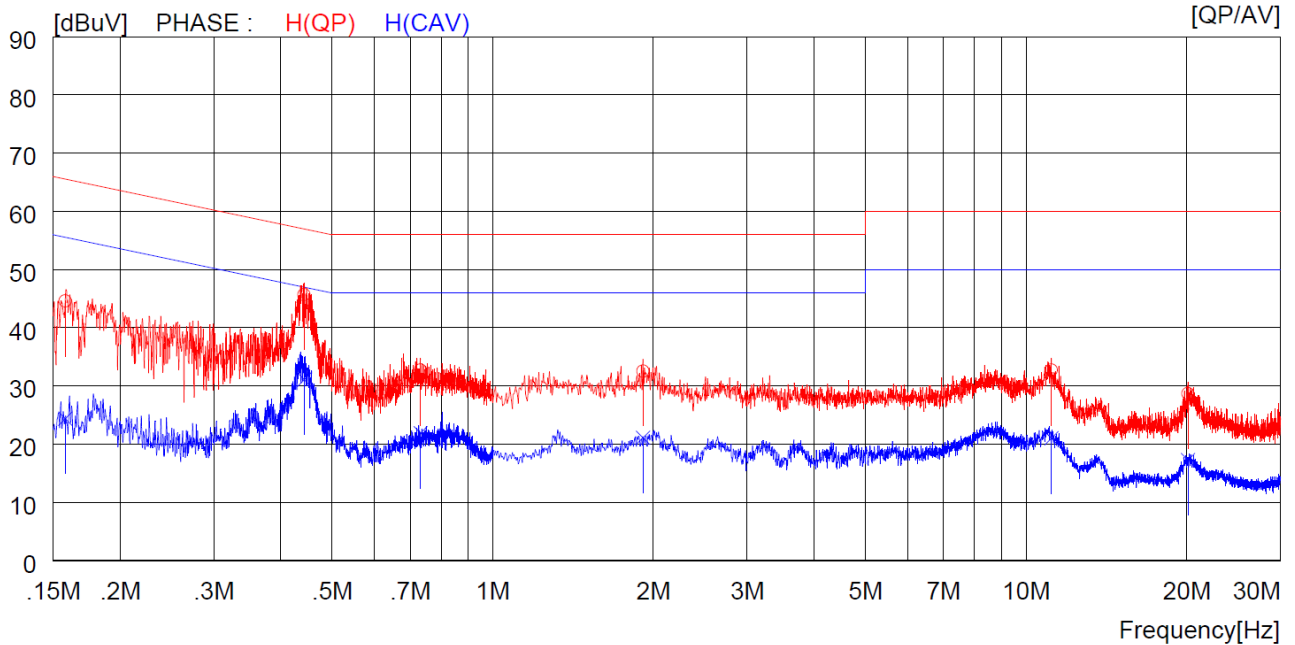

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15800	34.6	----	10.0	44.6	----	65.6	----	21.0	----	H (QP)
2	0.44300	35.7	----	10.0	45.7	----	57.0	----	11.3	----	H (QP)
3	0.73200	22.7	----	10.0	32.7	----	56.0	----	23.3	----	H (QP)
4	1.91200	22.5	----	10.1	32.6	----	56.0	----	23.4	----	H (QP)
5	11.15000	22.5	----	10.2	32.7	----	60.0	----	27.3	----	H (QP)
6	20.11000	18.2	----	10.5	28.7	----	60.0	----	31.3	----	H (QP)
7	0.15800	----	14.4	10.0	----	24.4	----	55.6	----	31.2	H (CAV)
8	0.44300	----	21.1	10.0	----	31.1	----	47.0	----	15.9	H (CAV)
9	0.73200	----	11.9	10.0	----	21.9	----	46.0	----	24.1	H (CAV)
10	1.91200	----	11.0	10.1	----	21.1	----	46.0	----	24.9	H (CAV)
11	11.15000	----	10.8	10.2	----	21.0	----	50.0	----	29.0	H (CAV)
12	20.11000	----	6.8	10.5	----	17.3	----	50.0	----	32.7	H (CAV)

-. Tested Line : NEUTRAL LINE

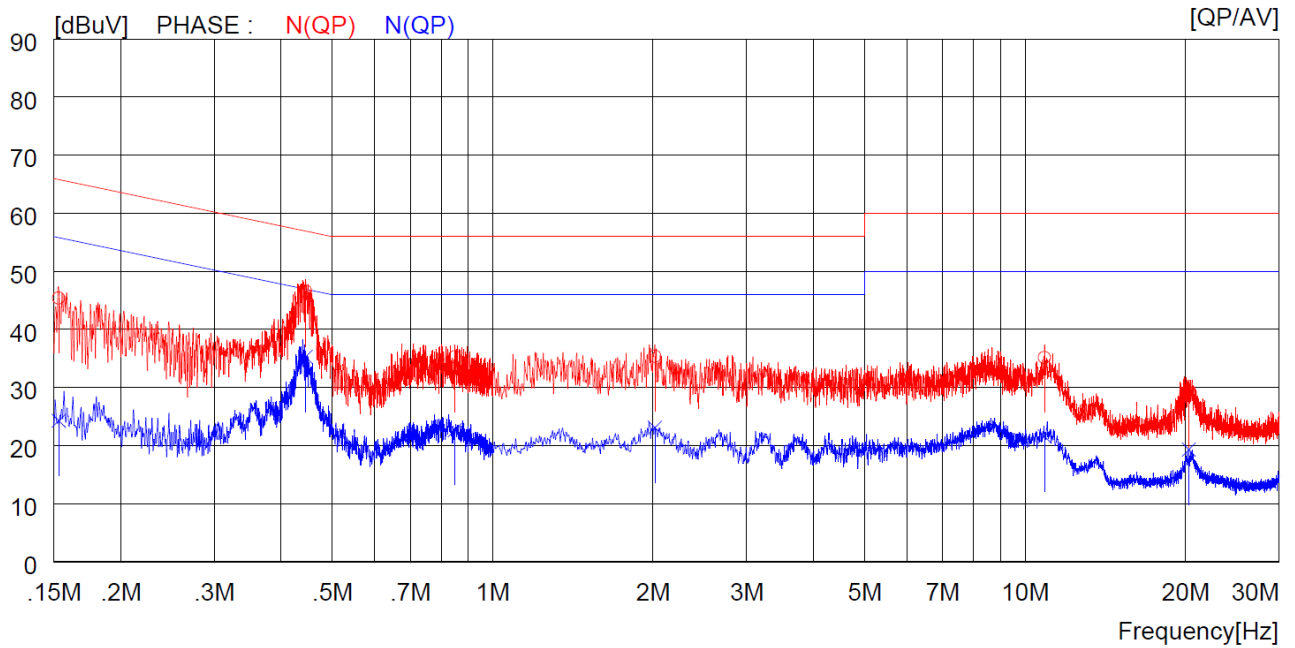

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15300	35.4	----	10.0	45.4	----	65.8	----	20.4	----	N(QP)
2	0.44500	36.6	----	10.0	46.6	----	57.0	----	10.4	----	N(QP)
3	0.84900	25.3	----	10.0	35.3	----	56.0	----	20.7	----	N(QP)
4	2.01600	25.3	----	10.1	35.4	----	56.0	----	20.6	----	N(QP)
5	10.88000	25.0	----	10.2	35.2	----	60.0	----	24.8	----	N(QP)
6	20.30000	18.6	----	10.5	29.1	----	60.0	----	30.9	----	N(QP)
7	0.15300	----	14.3	10.0	----	24.3	----	55.8	----	31.5	N(CAV)
8	0.44500	----	25.3	10.0	----	35.3	----	47.0	----	11.7	N(CAV)
9	0.84900	----	12.7	10.0	----	22.7	----	46.0	----	23.3	N(CAV)
10	2.01600	----	13.0	10.1	----	23.1	----	46.0	----	22.9	N(CAV)
11	10.88000	----	11.4	10.2	----	21.6	----	50.0	----	28.4	N(CAV)
12	20.30000	----	8.8	10.5	----	19.3	----	50.0	----	30.7	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

**9. LIST OF TEST EQUIPMENT**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>	<b>Last Cal.(Interval)</b>
ESR	R/S	Spectrum analyzer	101470	Oct. 18, 2021 (1Y)
ESCI	R/S	Test Receiver	101012	Oct. 20, 2021 (1Y)
FSVA40	Rohda&Schwarz	Signal Analyzer	101586	Apr. 21, 2022 (1Y)
310N	Sonoma Instrument	Amplifier	312544	Mar. 15, 2022 (1Y)
HLP-2008	TDK	Hybrid Antenna	131313	Feb. 21, 2022 (1Y)
FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	Mar. 24, 2022 (1Y)
CO3000	Innco Systems GmbH	Controller	N/A	N/A
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
NSLK8128	Schwarzbeck	V - LISN ( 4*32/50A)	8128216	Mar. 14, 2022 (1Y)
ESH3-Z2	R/S	Pulse Limiter	100655	Mar. 14, 2022 (1Y)
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A