



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctest.com>



## MEASUREMENT REPORT FCC PART 15.247 WLAN 802.11b/g/n/ac

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
5/9-6/13/2018  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M1805080100-02.A3L

<b>FCC ID:</b>	<b>A3LETWV525</b>
<b>IC:</b>	<b>649E-ETWV525</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

<b>Application Type:</b>	Certification
<b>Model/HVIN:</b>	ET-WV525
<b>EUT Type:</b>	Indoor Access Point
<b>Frequency Range:</b>	2412 – 2462MHz
<b>FCC Classification:</b>	Digital Transmission System (DTS)
<b>FCC Rule Part(s):</b>	Part 15 Subpart C (15.247)
<b>ISED Specification:</b>	RSS-247 Issue 2
<b>Test Procedure(s):</b>	ANSI C63.10-2013, KDB 558074 D01 v04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 1 of 104	


# TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Test Configuration .....	7
2.4	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	AC Line Conducted Emissions .....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA .....	12
7.0	TEST RESULTS.....	13
7.1	Summary .....	13
7.2	6dB Bandwidth Measurement .....	14
7.3	Output Power Measurement.....	33
7.4	Power Spectral Density .....	39
7.5	Conducted Emissions at the Band Edge .....	59
7.6	Conducted Spurious Emissions.....	70
7.7	Radiated Spurious Emission Measurements – Above 1 GHz.....	78
7.7.1	SISO Antenna-1 Radiated Spurious Emission Measurements .....	81
7.7.2	SISO Antenna-2 Radiated Spurious Emission Measurements .....	85
7.7.3	SISO Antenna-1 Radiated Restricted Band Edge Measurements (20MHz BW) .....	89
7.7.4	SISO Antenna-1 Radiated Restricted Band Edge Measurements (40MHz BW) .....	90
7.7.5	SISO Antenna-2 Radiated Restricted Band Edge Measurements (20MHz BW) .....	91
7.7.6	SISO Antenna-2 Radiated Restricted Band Edge Measurements (40MHz BW) .....	91
7.7.7	MIMO Radiated Restricted Band Edge Measurements (20MHz BW).....	93
7.7.8	MIMO Radiated Restricted Band Edge Measurements (40MHz BW).....	94
7.7.9	CDD Radiated Restricted Band Edge Measurements (20MHz BW).....	95
7.8	Radiated Spurious Emissions Measurements – Below 1GHz .....	96
7.9	Line-Conducted Test Data.....	100
8.0	CONCLUSION .....	104

FCC ID: A3LETWV525 IC: 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 2 of 104	



# MEASUREMENT REPORT



Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO/CDD			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2462	243.220	23.86	327.341	25.15	248.886	23.96	332.660	25.22	N/A			
802.11g (20MHz)	2412 - 2462	218.776	23.40	695.024	28.42	216.272	23.35	682.339	28.34	434.545	26.38	1377.363	31.39
802.11n (20MHz)	2412 - 2462	220.800	23.44	674.528	28.29	212.324	23.27	683.912	28.35	433.125	26.37	1344.605	31.29
802.11n (40MHz)	2412 - 2462	24.660	13.92	164.816	22.17	23.659	13.74	158.125	21.99	48.306	16.84	322.849	25.09
802.11ac (40MHz)	2412 - 2462	24.547	13.90	158.125	21.99	24.099	13.82	152.405	21.83	48.641	16.87	310.456	24.92

## EUT Overview

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point			Page 3 of 104

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 4 of 104

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Access Point FCC ID: A3LETWV525**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** 5HX3S, 79YX3S, 1VX3S, AWX3S, BNX3S, 6PX3S, 5HX3S

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (LE), Zigbee, Zwave

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

**Table 2-1. Frequency/ Channel Operations**

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO / CDD
2.4GHz	b	98.8	98.8	N/A
	g	97.4	97.0	97.9
	n	97.4	97.0	97.9
	ac	98.7	98.4	95.9

**Table 2-2. Measured Duty Cycles**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 5 of 104	

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ac	✓	✓	✓	✓	✓	✓

**Table 2-3. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)  
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,  
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

**Configuration 1:** ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode



Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	40
Operating Frequency (MHz)	2437	5200
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)**

**Configuration 2:** ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	40
Operating Frequency (MHz)	2437	5200
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-5. Config-2 (ANT1 5GHz & ANT2 2.4GHz)**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 6 of 104	

**Configuration 3:** ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	40
Operating Frequency (MHz)	2437	5200
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-6. Config-3 (ANT1 MIMO & ANT2 MIMO)**

### 2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 7 of 104	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

**Deviation from measurement procedure.....None**


### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 8 of 104	



### 3.3 Radiated Emissions


The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 9 of 104

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

**Conclusion:**

The EUT unit complies with the requirement of §15.203.

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 10 of 104	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09


<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 11 of 104	

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	6/14/2017	Annual	6/14/2018	WL25-1
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Keysight Technologies	N9038A	MXE EMI Receiver (3Hz-44GHz)	4/30/2018	Annual	4/30/2019	MY5640070
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/23/2018	Annual	1/23/2019	NMLC-2
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Rohde & Schwarz	TS-PR8	Preamplifier (30MHz-8GHz)	10/19/2017	Annual	10/19/2018	102324
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100040
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	1/22/2018	Annual	1/22/2019	N/A
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	8/14/2017	Biennial	8/14/2019	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

**Table 6-1. Annual Test Equipment Calibration Schedule**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 12 of 104	

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LETWV525  
 IC: 649E-ETWV525  
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.9

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation,” Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 0.2.8.

FCC ID: A3LETWV525 IC: 649E-ETWV525	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 13 of 104

## 7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2  
KDB 558074 D01 v04 – Section 8.2 Option 2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 14 of 104	

## SISO Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	8.033	0.500
2437	6	b	1	8.123	0.500
2462	11	b	1	8.069	0.500
2412	1	g (20MHz)	6	16.33	0.500
2437	6	g (20MHz)	6	16.35	0.500
2462	11	g (20MHz)	6	16.34	0.500
2412	1	n (20MHz)	6.5/7.2 (MCS0)	17.34	0.500
2437	6	n (20MHz)	6.5/7.2 (MCS0)	17.13	0.500
2462	11	n (20MHz)	6.5/7.2 (MCS0)	17.19	0.500
2422	3	n (40MHz)	13.5/15 (MCS0)	35.28	0.500
2437	6	n (40MHz)	13.5/15 (MCS0)	35.13	0.500
2457	10	n (40MHz)	13.5/15 (MCS0)	35.24	0.500
2422	3	ac (40MHz)	13.5/15 (MCS0)	36.09	0.500
2437	6	ac (40MHz)	13.5/15 (MCS0)	36.15	0.500
2457	10	ac (40MHz)	13.5/15 (MCS0)	36.15	0.500

**Table 7-2. Conducted Bandwidth Measurements SISO ANT1**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 15 of 104	

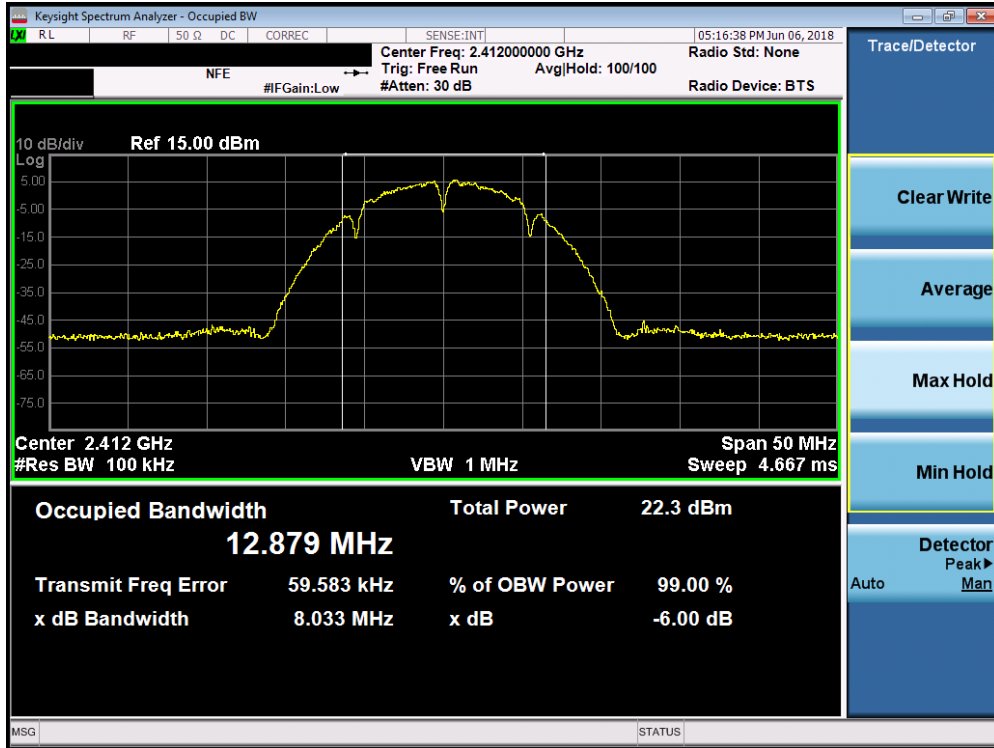


Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 1)

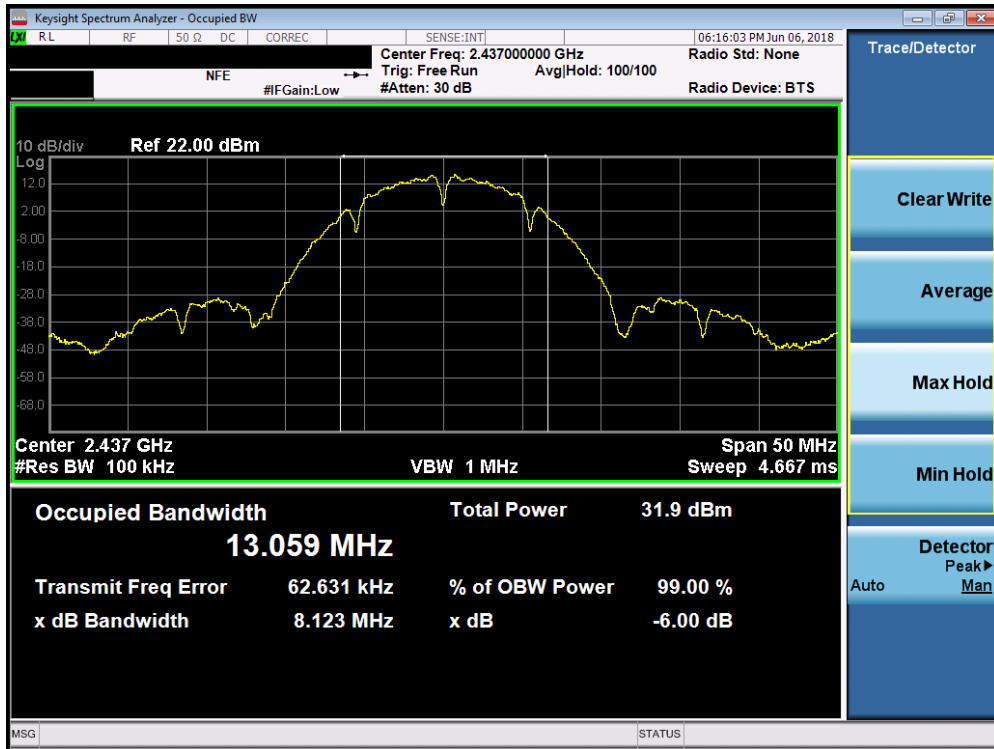


Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 16 of 104



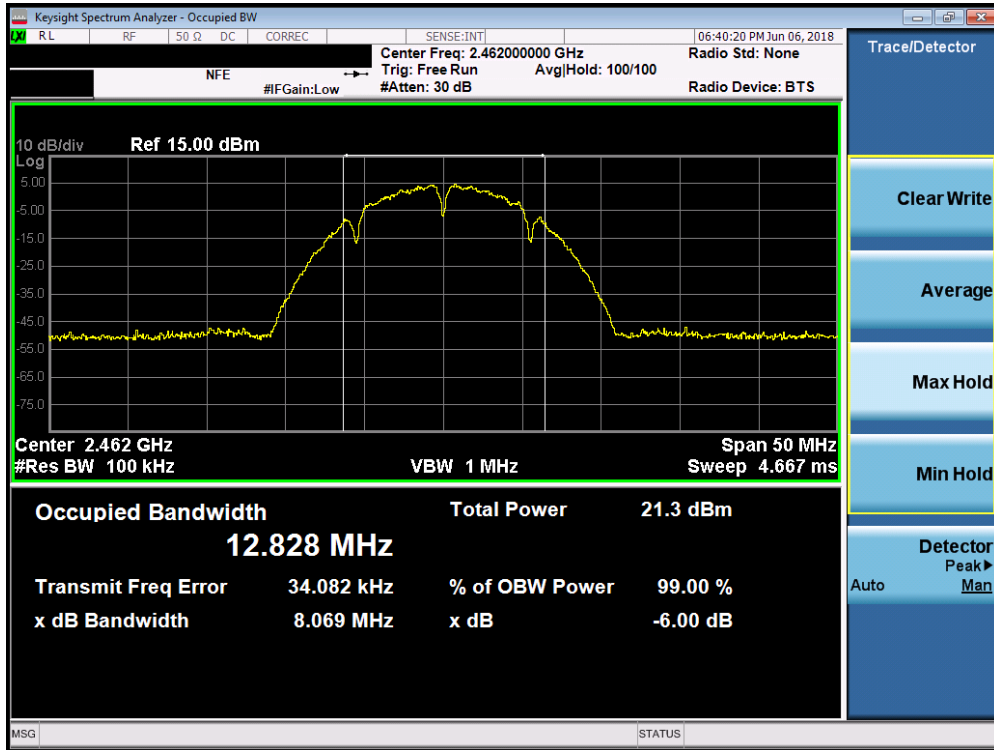


Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 11)

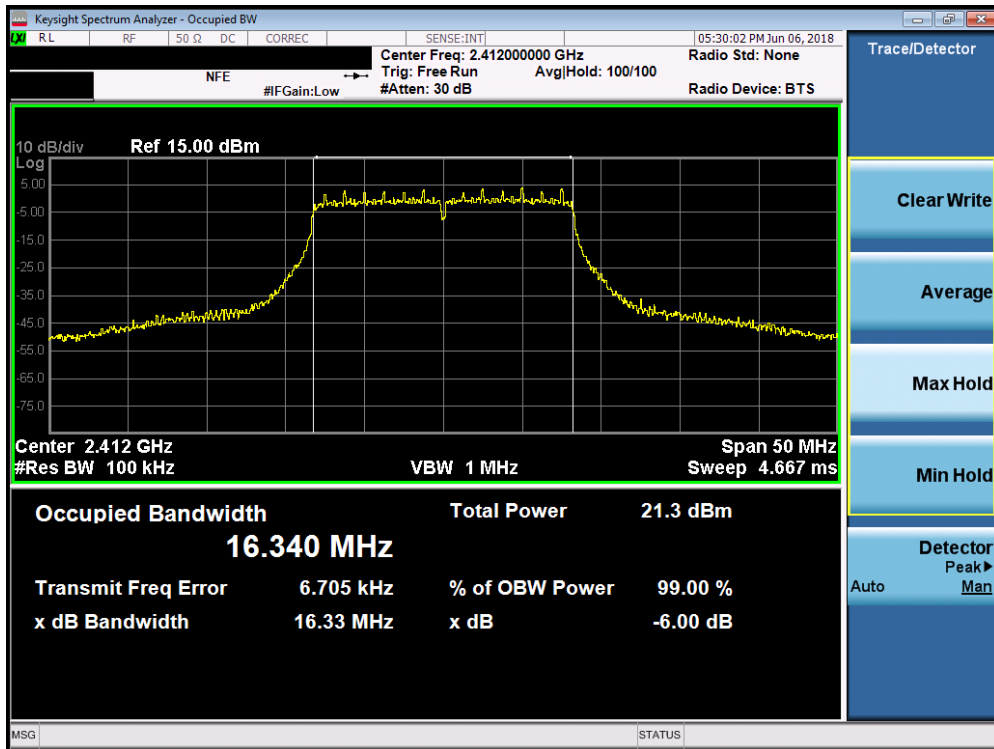


Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11g – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 17 of 104

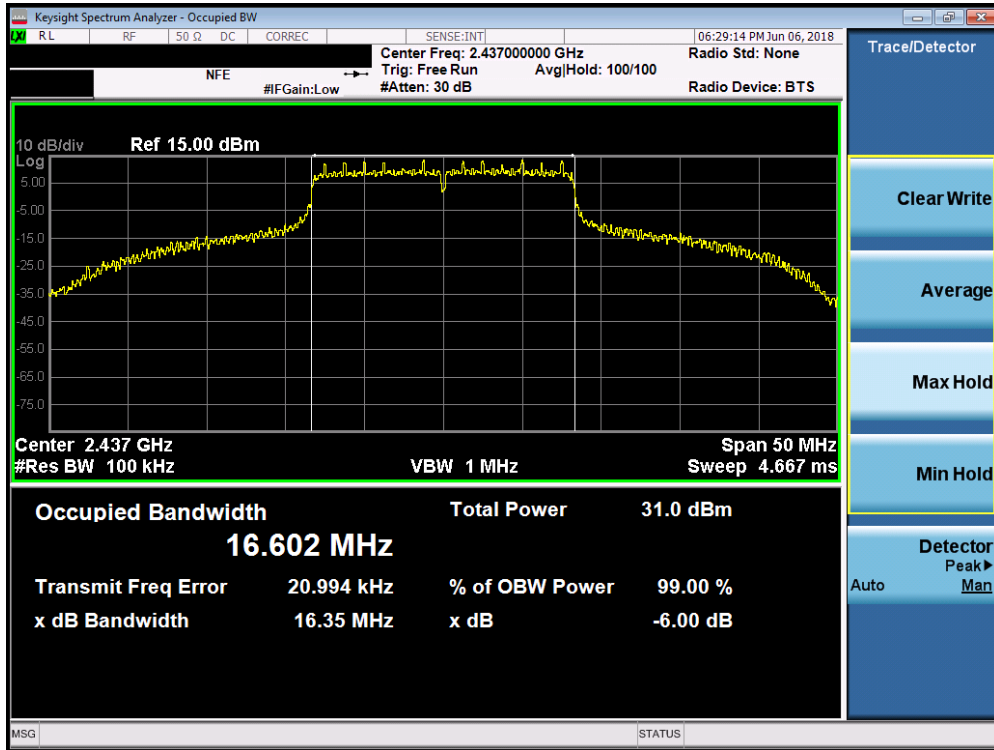


Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11g – Ch. 6)

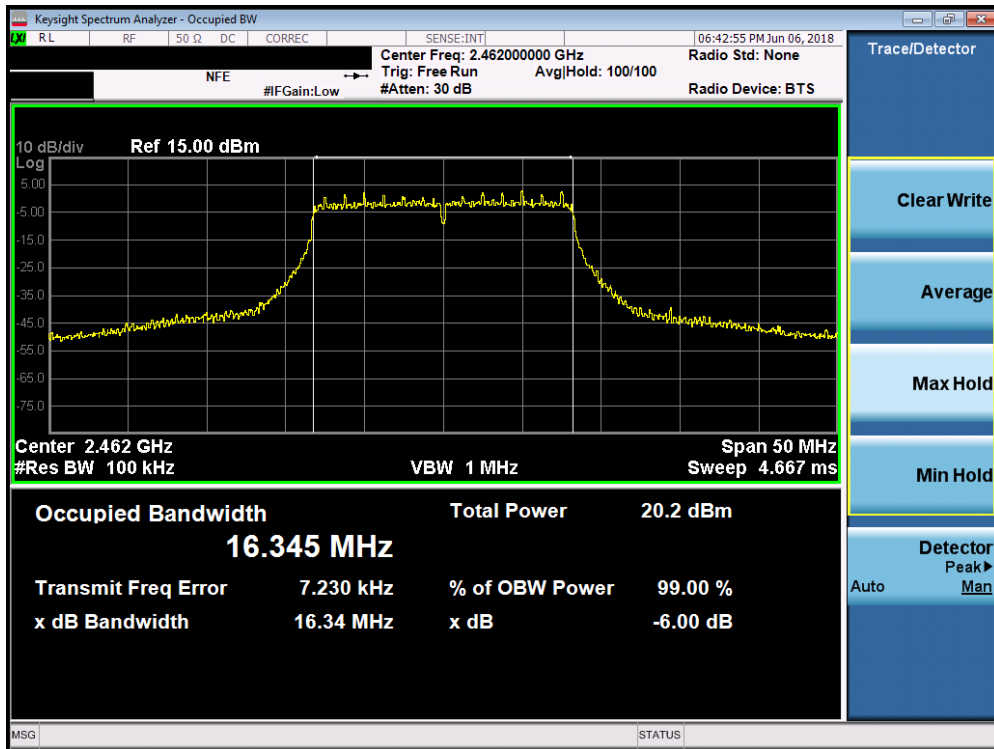


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11g – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 18 of 104

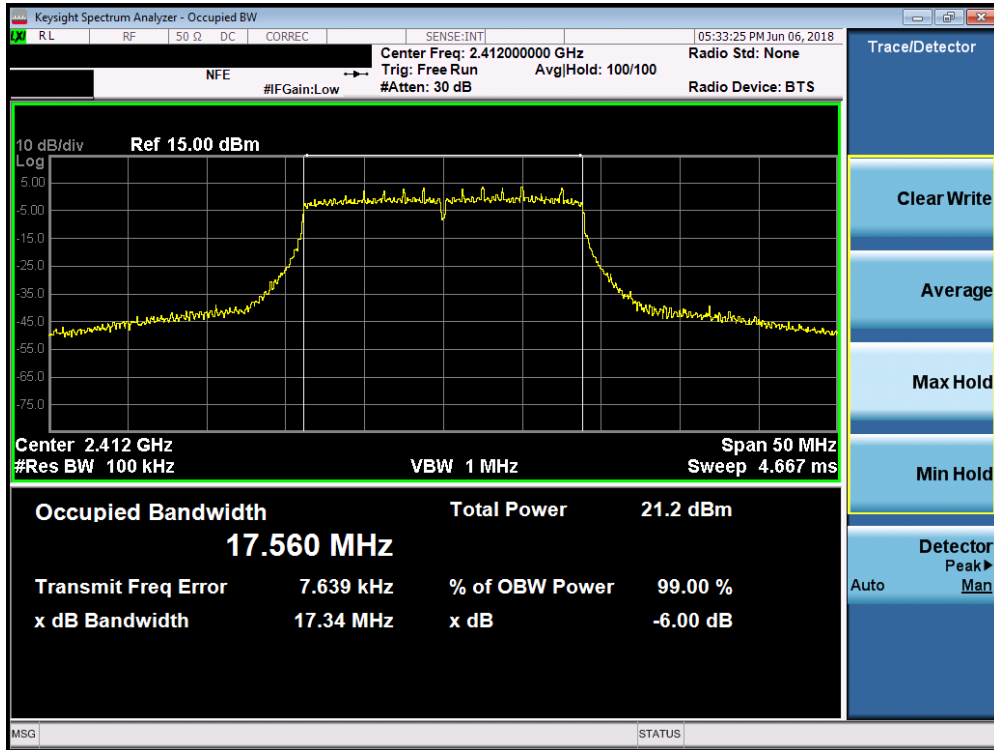


Plot 7-7. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 1)

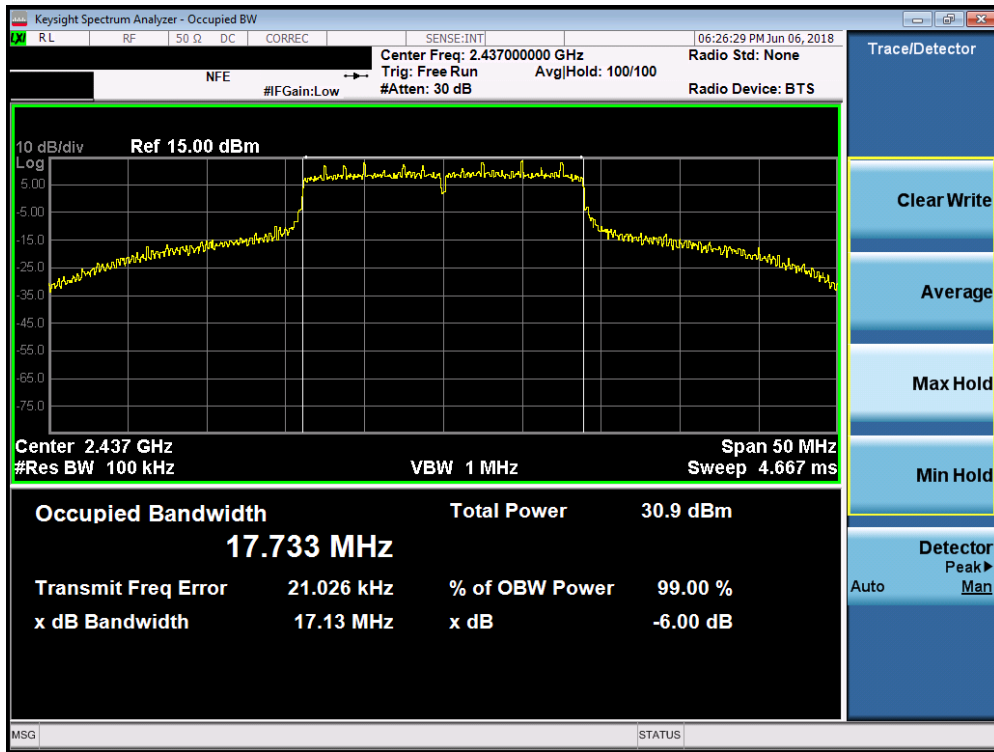


Plot 7-8. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 19 of 104

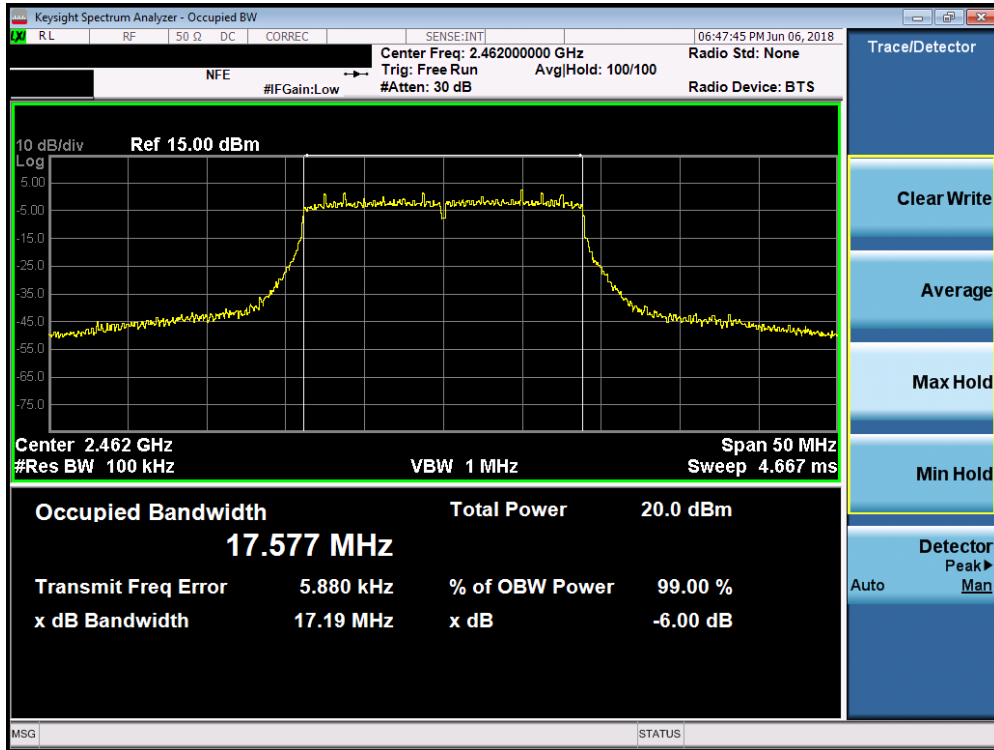


Plot 7-9. 6dB Bandwidth Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 11)

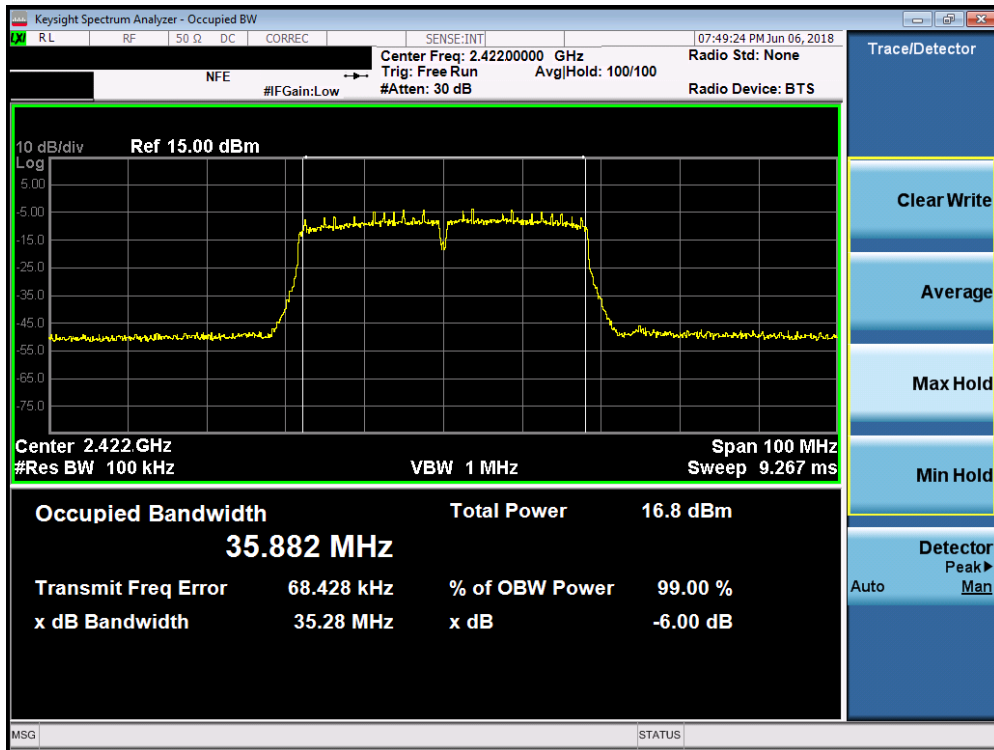


Plot 7-10. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 3)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 20 of 104

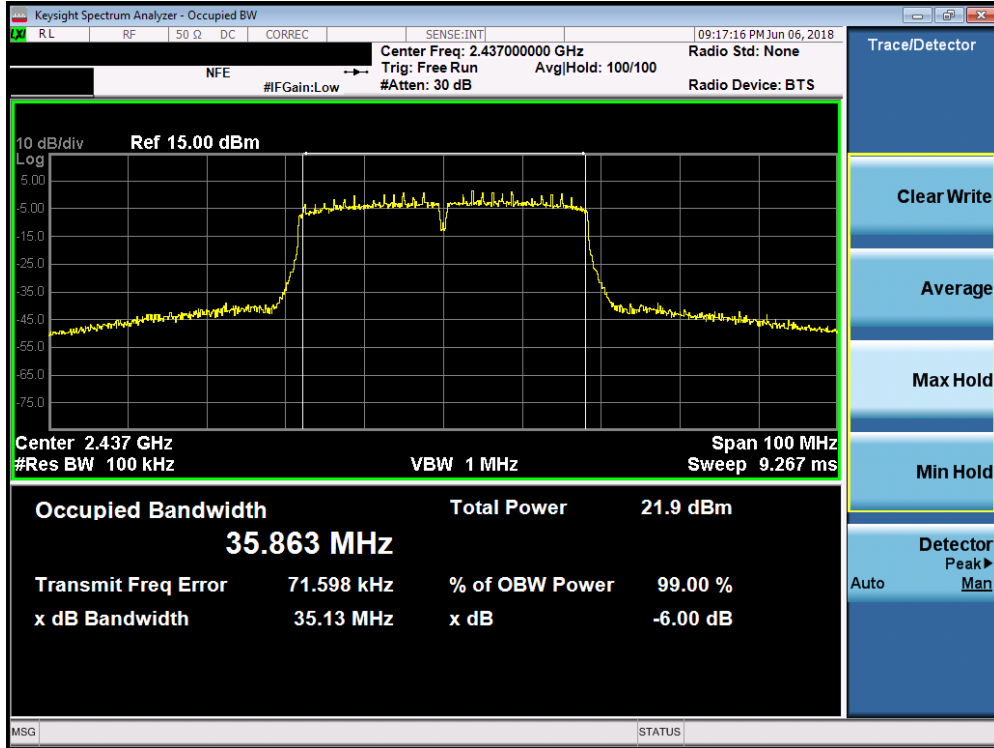


Plot 7-11. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 6)

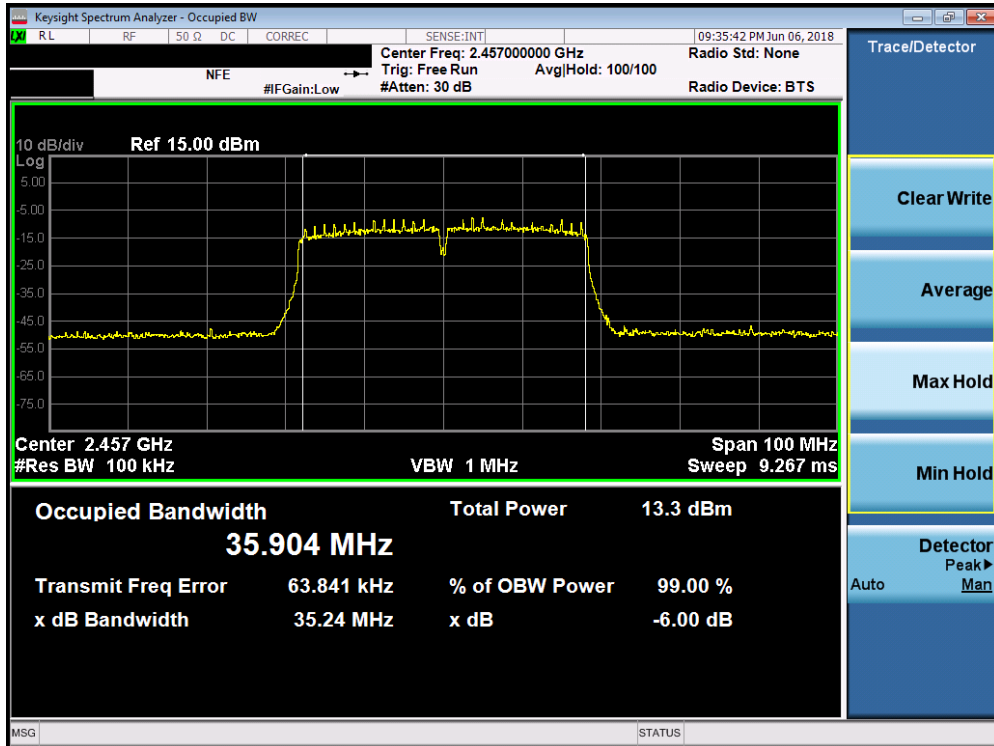


Plot 7-12. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 21 of 104

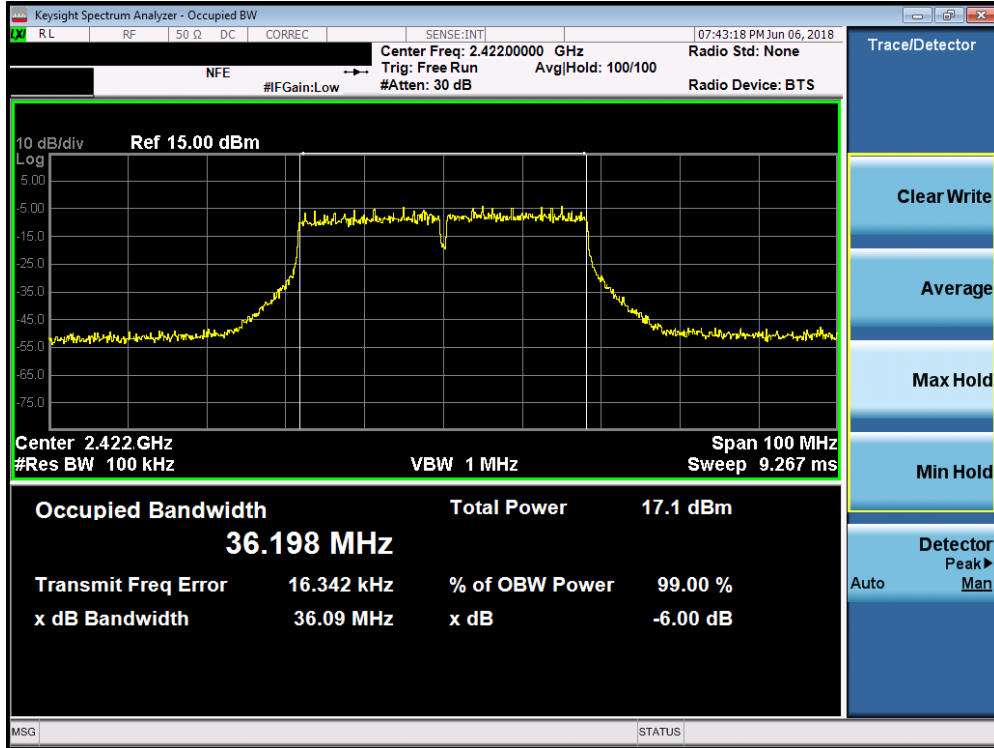


Plot 7-13. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 3)

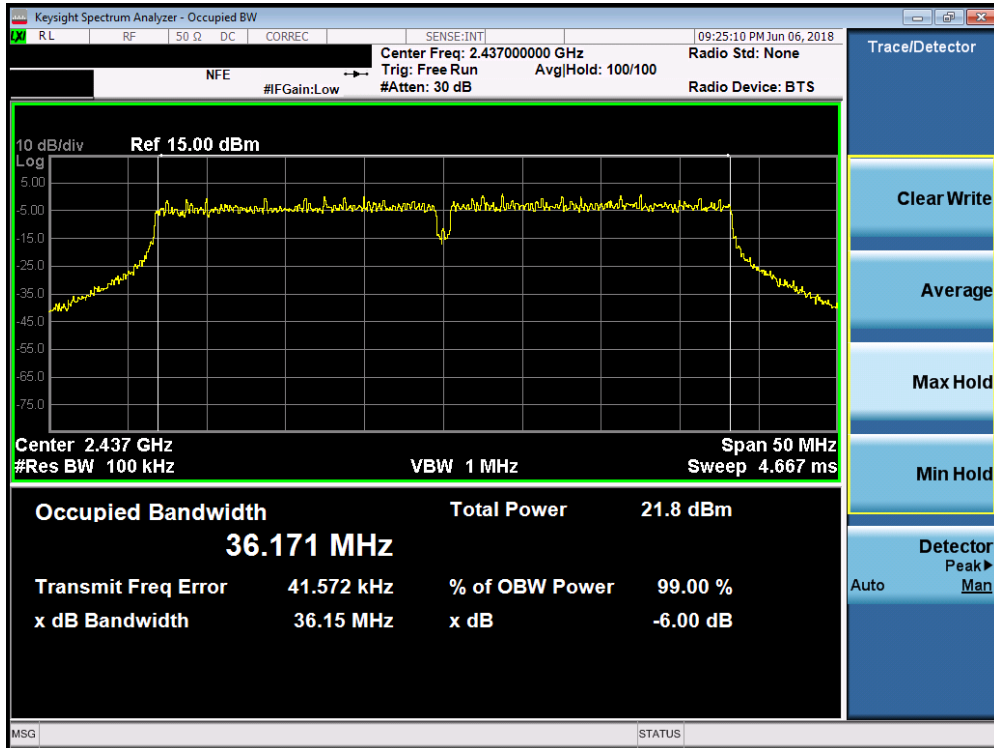

Plot 7-14. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 22 of 104

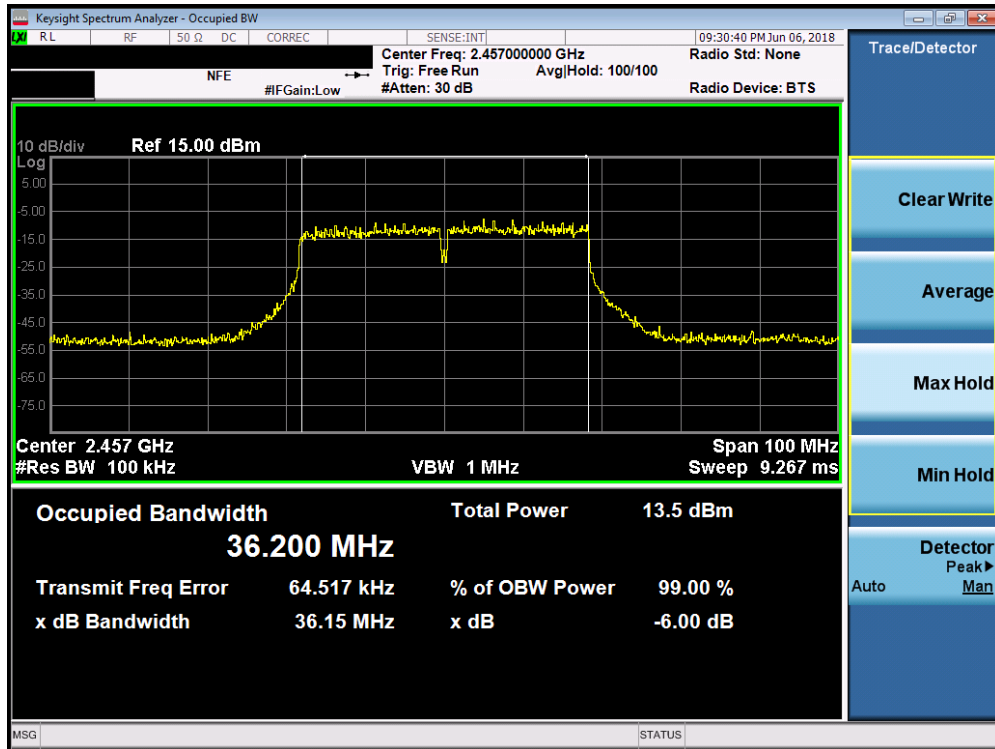

Plot 7-15. 6dB Bandwidth Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 23 of 104




## SISO Antenna-2 6 dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	7.718	0.500
2437	6	b	1	7.963	0.500
2462	11	b	1	7.907	0.500
2412	1	g (20MHz)	6	16.34	0.500
2437	6	g (20MHz)	6	16.34	0.500
2462	11	g (20MHz)	6	16.35	0.500
2412	1	n (20MHz)	6.5/7.2 (MCS0)	17.56	0.500
2437	6	n (20MHz)	6.5/7.2 (MCS0)	16.94	0.500
2462	11	n (20MHz)	6.5/7.2 (MCS0)	17.54	0.500
2422	3	n (40MHz)	13.5/15 (MCS0)	35.22	0.500
2437	6	n (40MHz)	13.5/15 (MCS0)	34.37	0.500
2457	10	n (40MHz)	13.5/15 (MCS0)	35.39	0.500
2422	3	ac (40MHz)	13.5/15 (MCS0)	36.11	0.500
2437	6	ac (40MHz)	13.5/15 (MCS0)	36.11	0.500
2457	10	ac (40MHz)	13.5/15 (MCS0)	36.08	0.500


**Table 7-3. Conducted Bandwidth Measurements SISO ANT2**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 24 of 104	



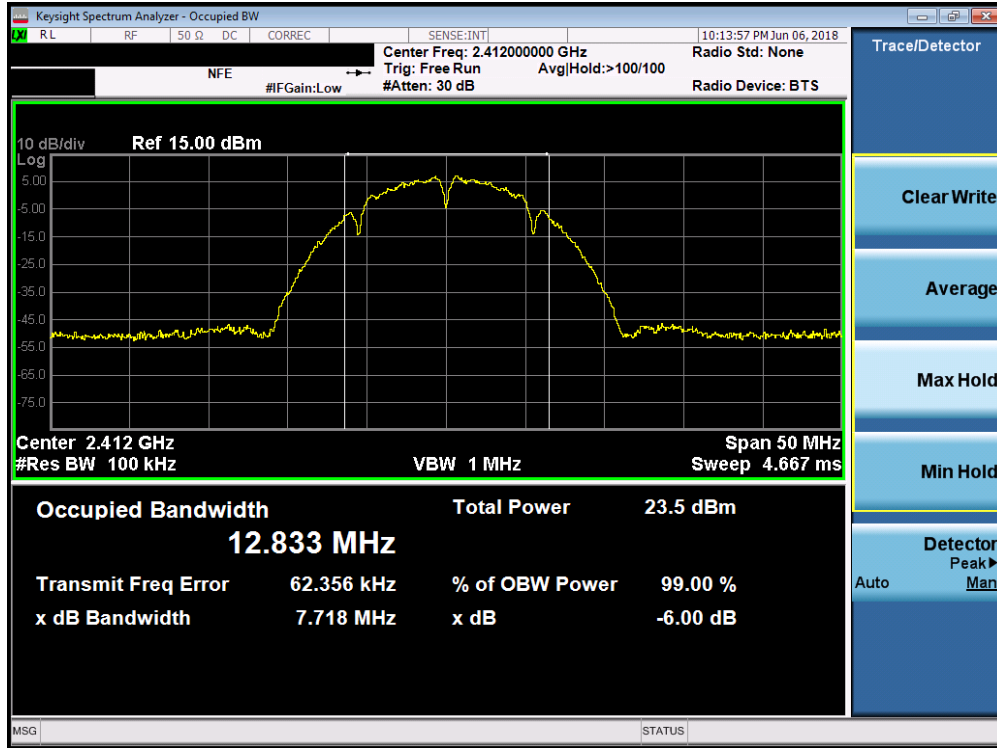


Plot 7-16. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)

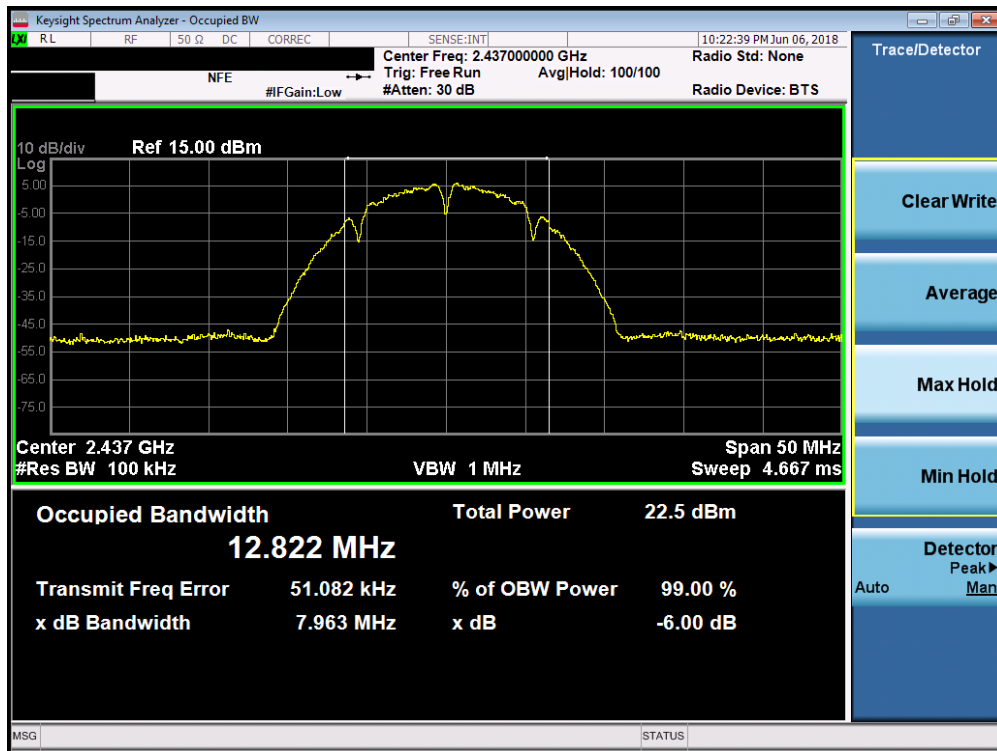


Plot 7-17. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 25 of 104

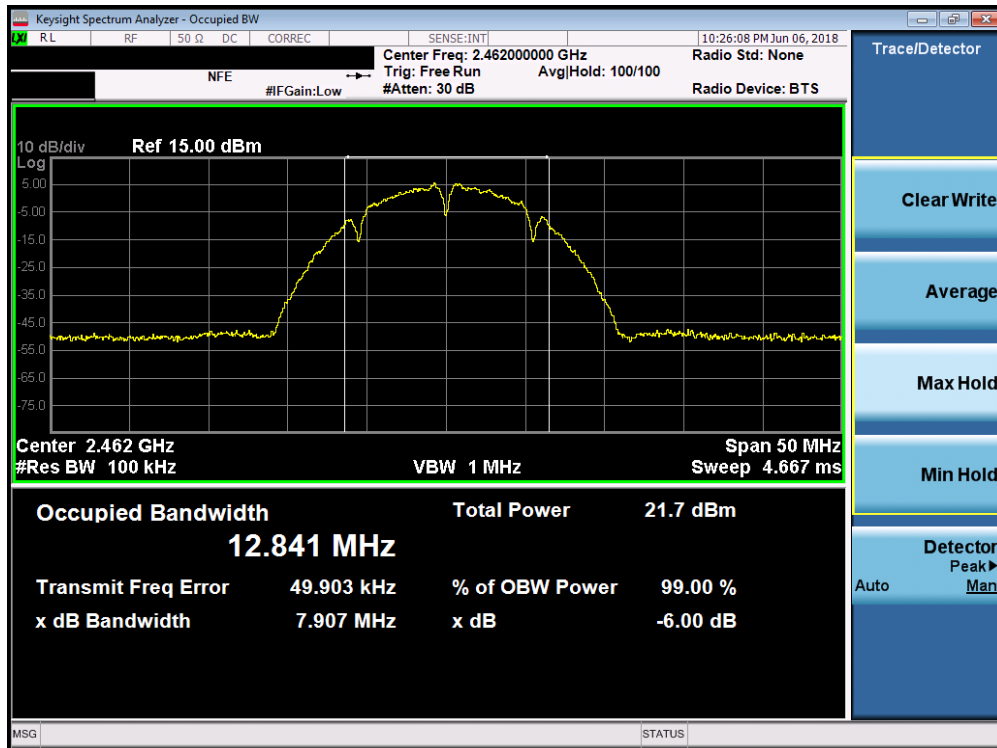


Plot 7-18. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 11)

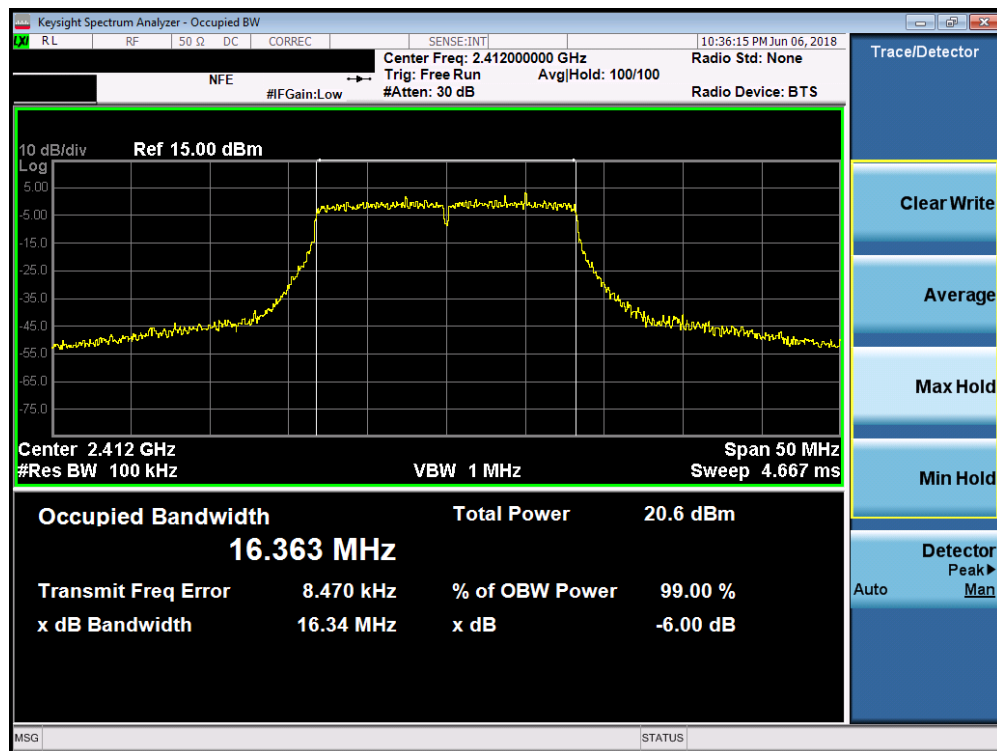


Plot 7-19. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11g – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 26 of 104

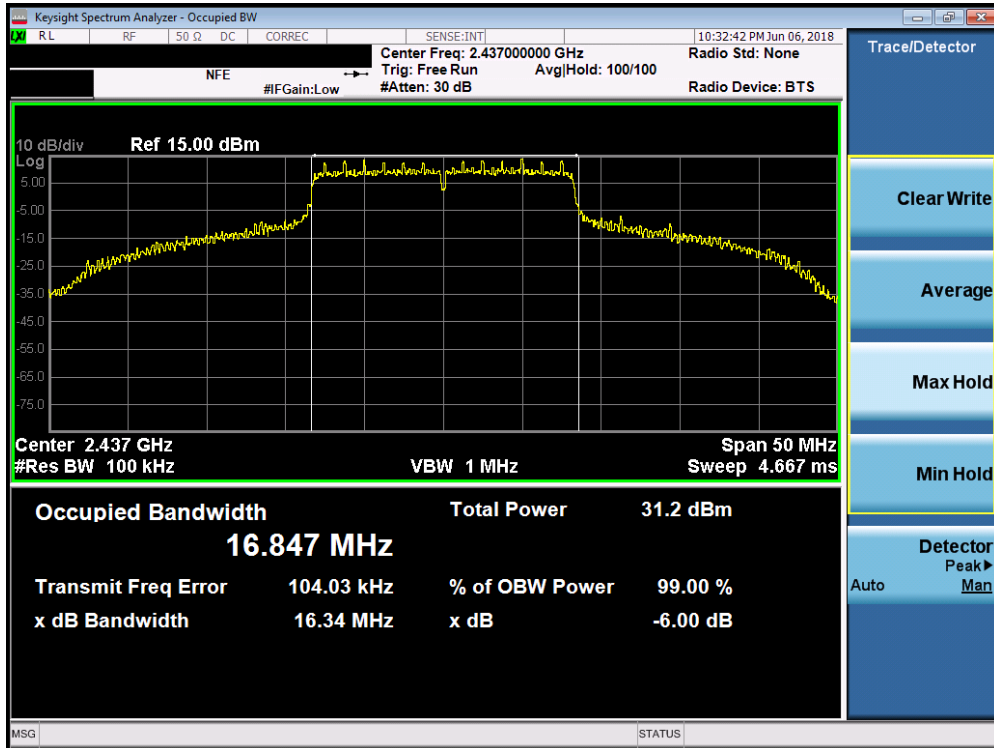


Plot 7-20. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11g – Ch. 6)

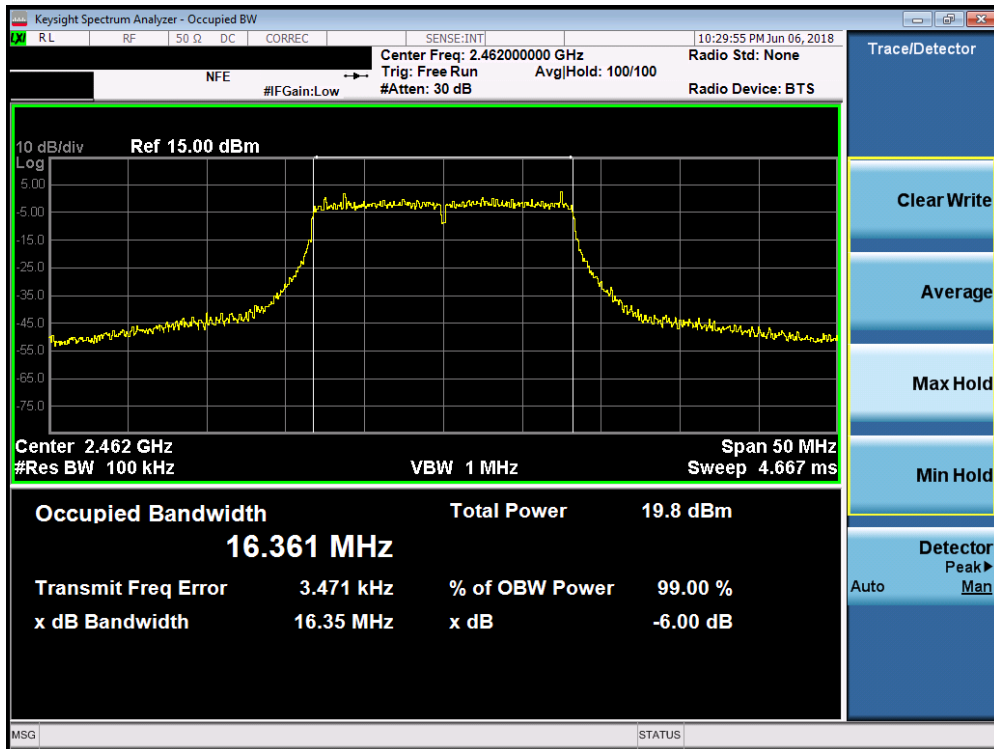


Plot 7-21. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11g – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 27 of 104

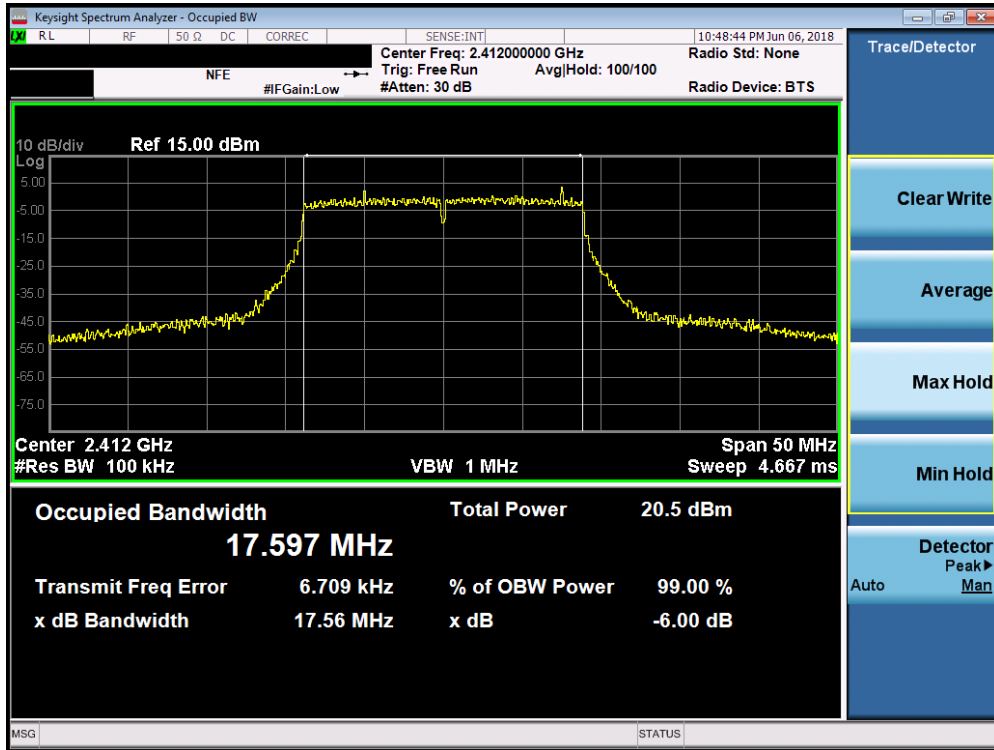


Plot 7-22. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 1)

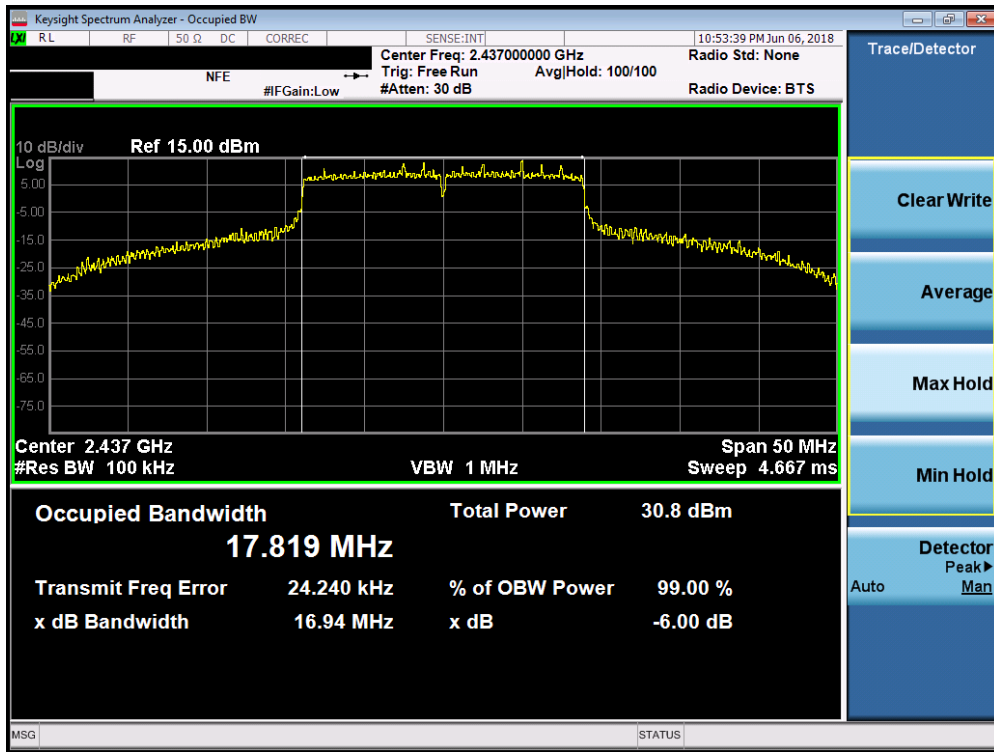


Plot 7-23. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 28 of 104

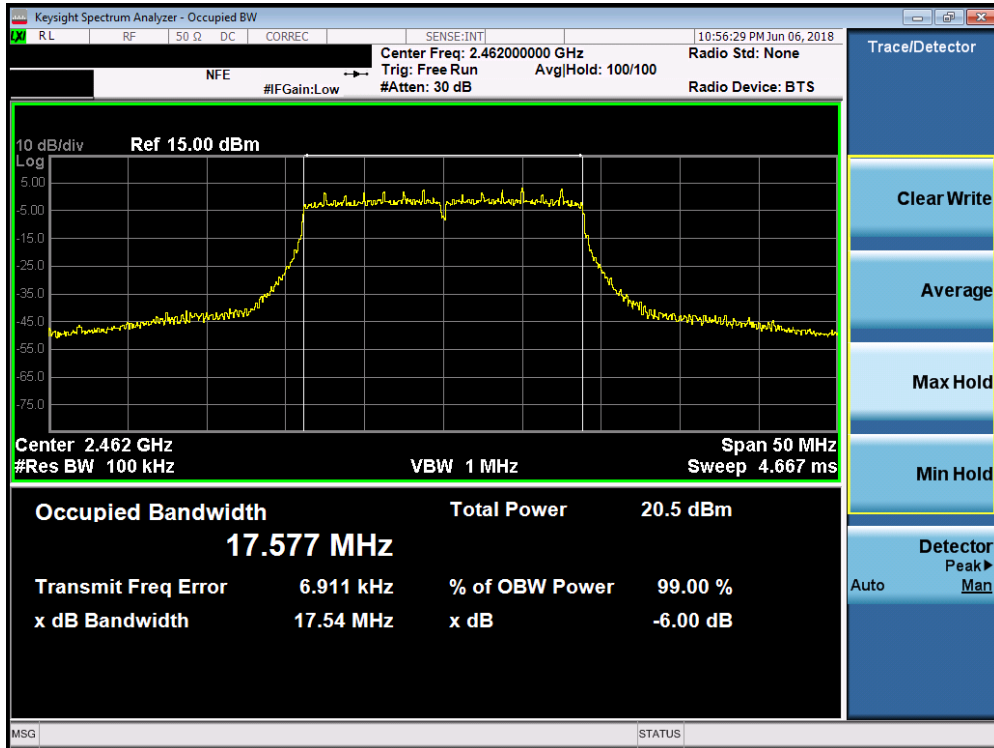


Plot 7-24. 6dB Bandwidth Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 11)

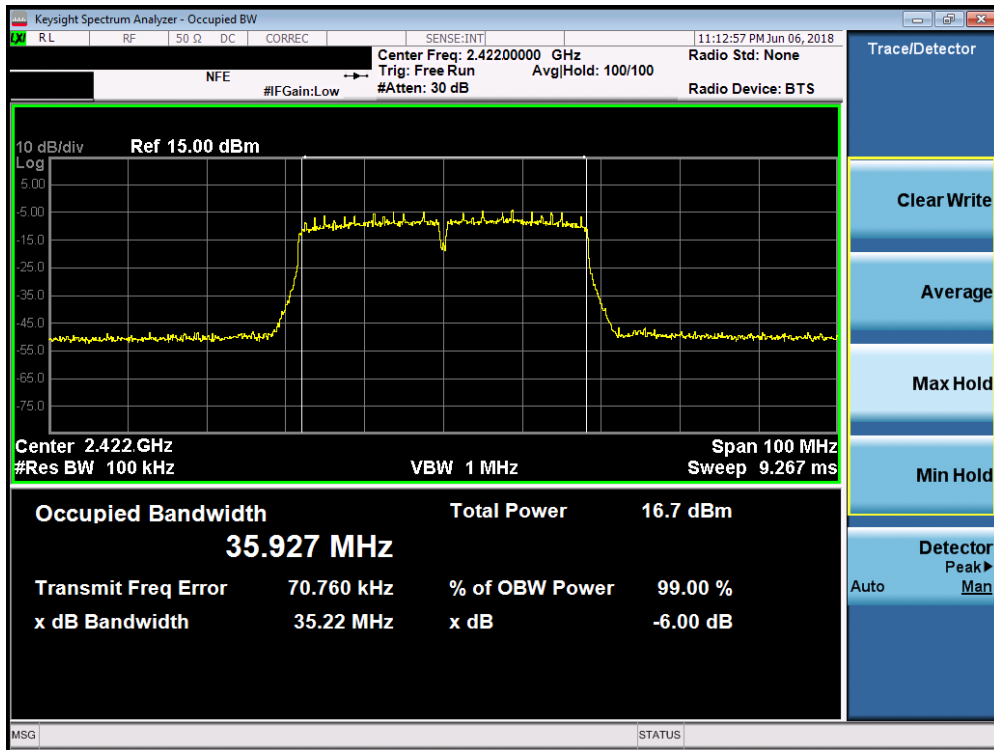


Plot 7-25. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 3)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 29 of 104

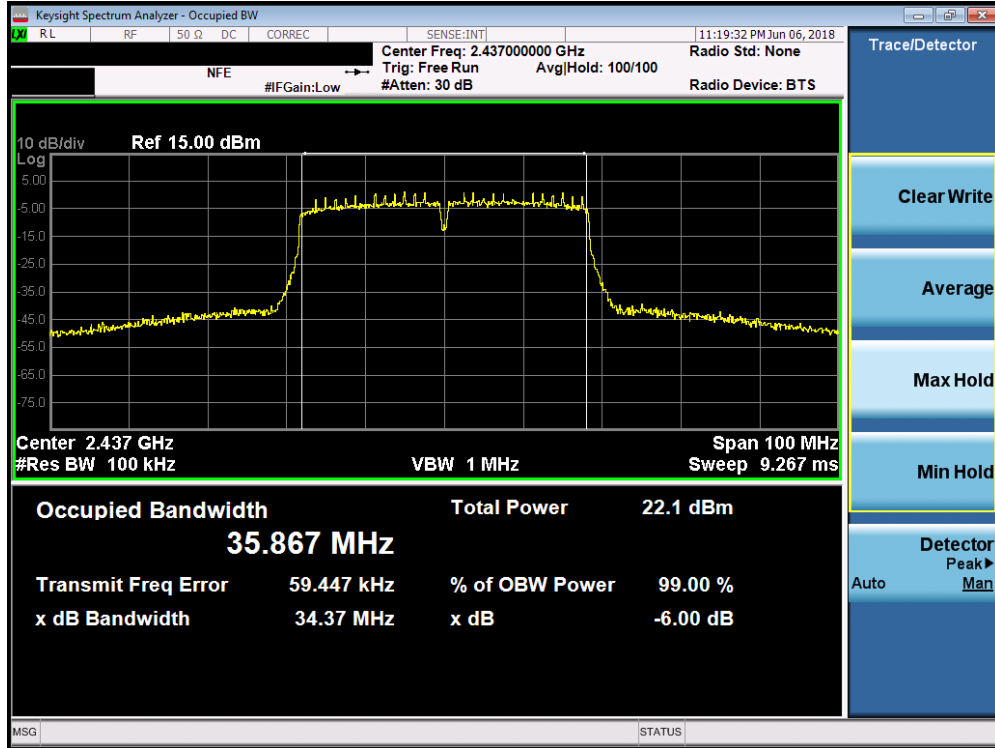


Plot 7-26. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 6)

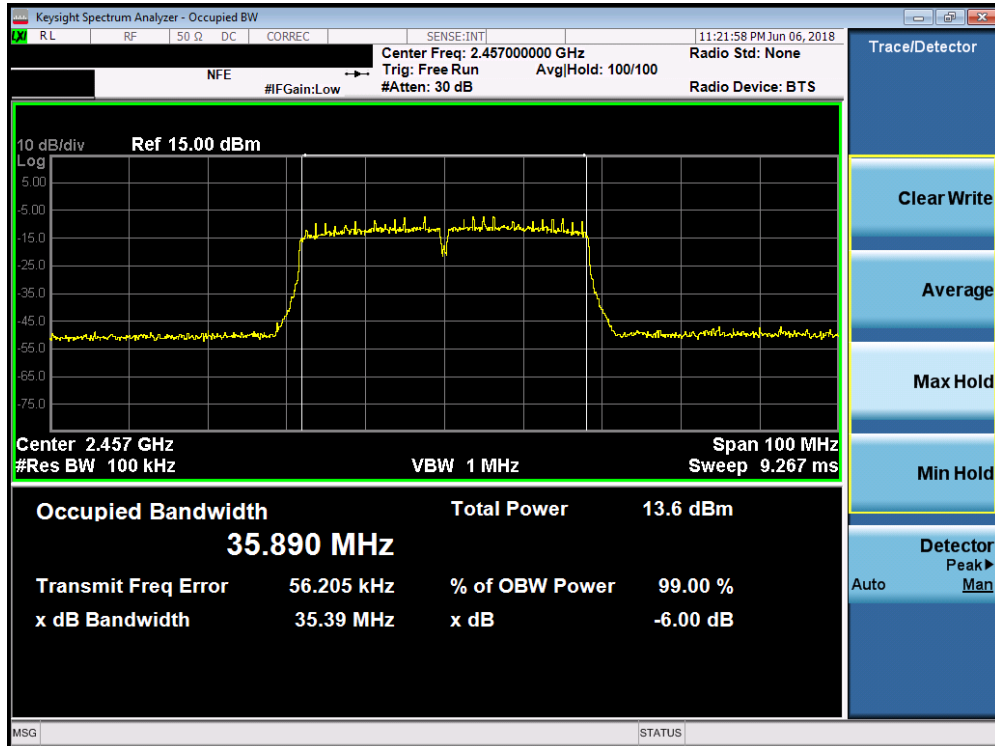


Plot 7-27. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 30 of 104

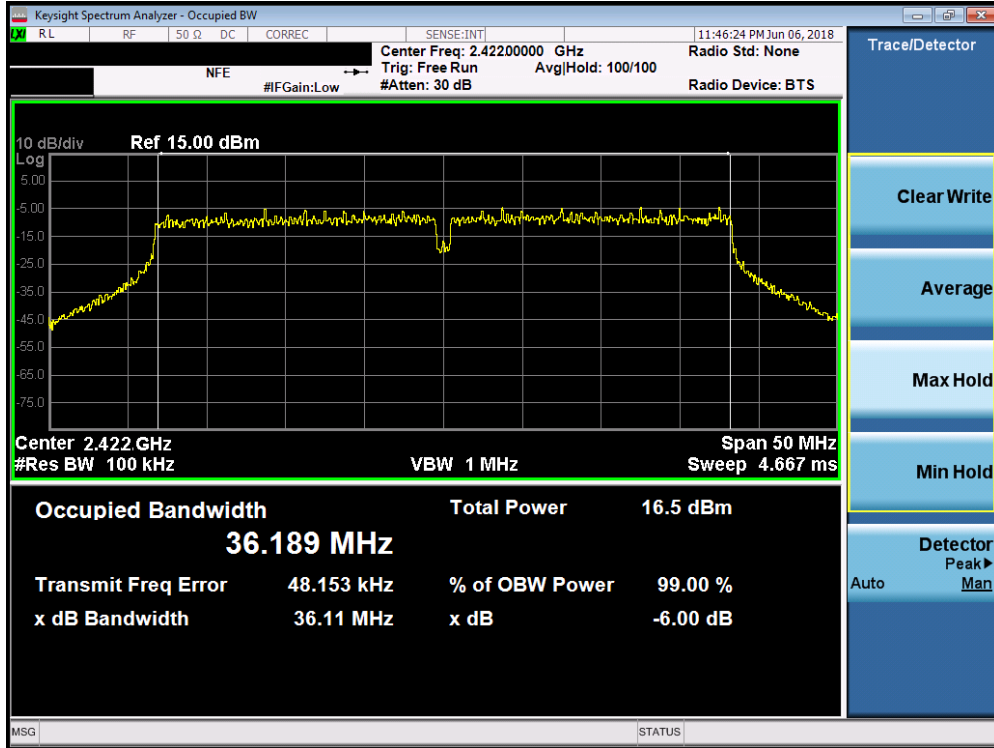


Plot 7-28. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 3)

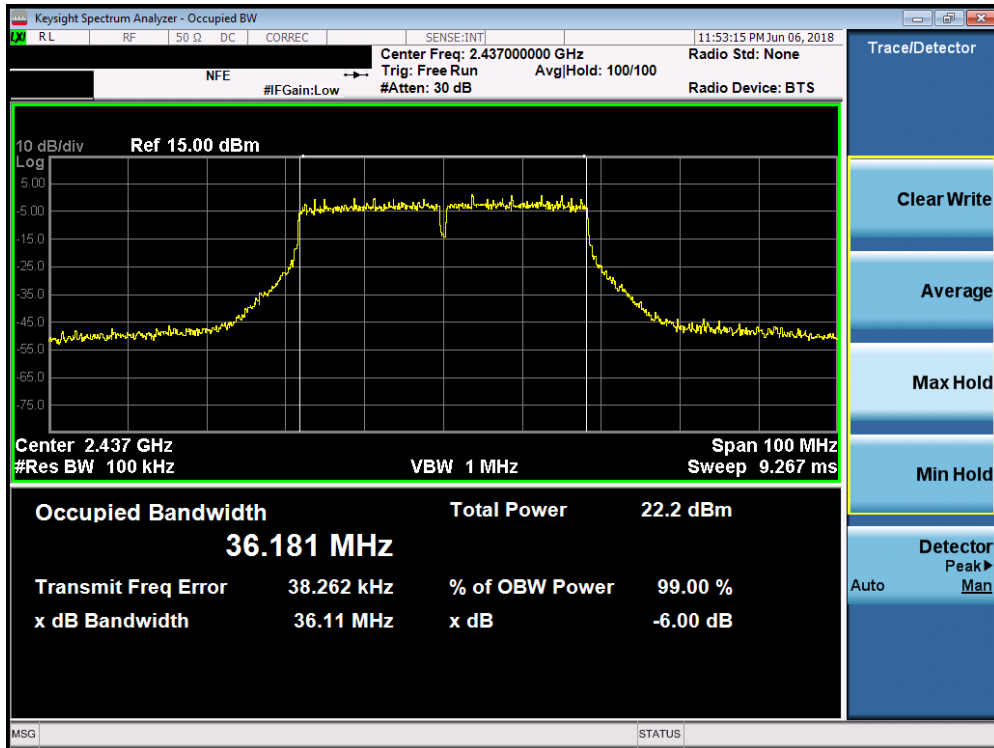

Plot 7-29. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 31 of 104



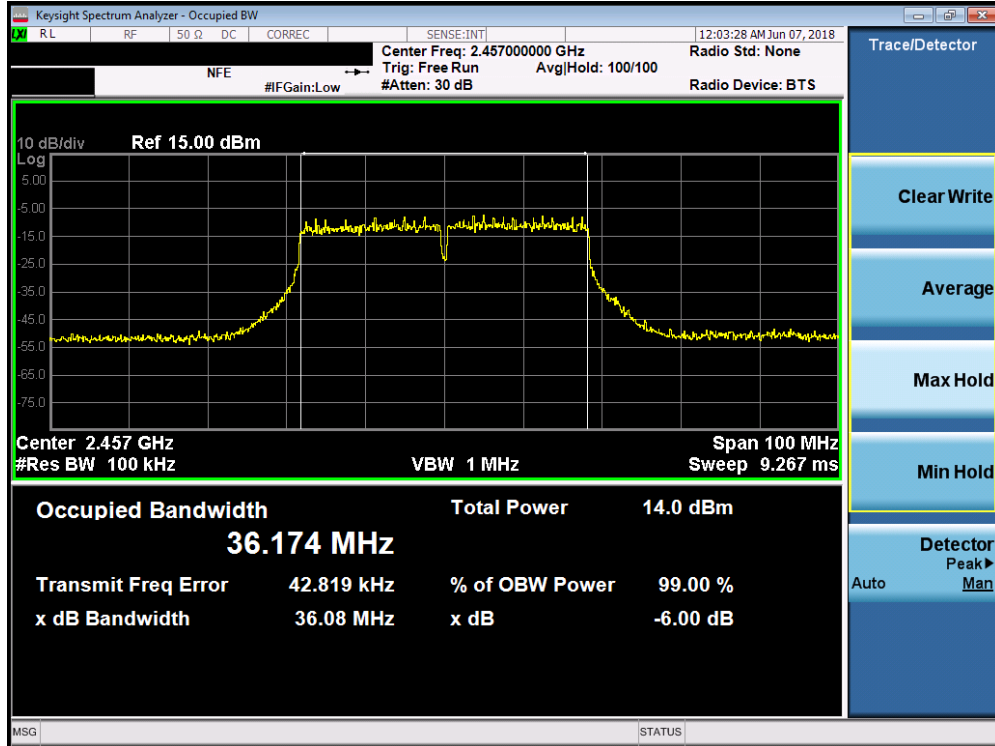

Plot 7-30. 6dB Bandwidth Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 32 of 104



### 7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

#### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt. The maximum permissible e.i.r.p is 4Watt.**

#### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method  
 KDB 558074 D01 v04 – Section 9.1.3 PKPM1 Peak Power Method  
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G  
 KDB 558074 D01 v04 – Section 9.2.3.2 Method AVGPM-G  
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique  
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

#### Test Settings

##### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

##### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### Test Setup


The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

#### Test Notes

None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 33 of 104	

2.4GHz (20MHz)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11b	802.11g	802.11n						
		2412	1	AVG	14.30	14.30	14.22	30.00	-15.70	-0.80	13.50	36.02
			PEAK	15.66	19.97	20.07	-	-	-0.80	19.27	36.02	-16.75
	2417	2	AVG	19.22	19.20	19.11	30.00	-10.78	-0.50	18.72	36.02	-17.30
			PEAK	20.62	24.78	24.34	-	-	-0.50	24.28	36.02	-11.74
	2422	3	AVG	20.05	19.98	19.92	30.00	-9.95	-0.50	19.55	36.02	-16.47
			PEAK	21.44	25.15	25.37	-	-	-0.50	24.87	36.02	-11.15
	2427	4	AVG	21.10	21.04	20.91	30.00	-8.90	-0.50	20.60	36.02	-15.42
			PEAK	22.49	27.31	27.07	-	-	-0.50	26.81	36.02	-9.21
	2432	5	AVG	23.10	23.38	23.28	30.00	-6.62	-0.50	22.88	36.02	-13.14
			PEAK	24.38	28.33	28.29	-	-	-0.50	27.83	36.02	-8.19
	2437	6	AVG	23.04	23.40	23.34	30.00	-6.60	-0.50	22.90	36.02	-13.12
			PEAK	24.39	28.42	28.28	-	-	-0.50	27.92	36.02	-8.10
	2442	7	AVG	23.86	23.39	23.44	30.00	-6.14	-0.50	23.36	36.02	-12.66
			PEAK	25.15	28.28	28.20	-	-	-0.50	27.78	36.02	-8.24
	2447	8	AVG	20.81	20.75	20.70	30.00	-9.19	-0.50	20.31	36.02	-15.71
			PEAK	22.23	26.97	26.86	-	-	-0.50	26.47	36.02	-9.55
	2452	9	AVG	20.01	19.99	19.89	30.00	-9.99	-1.00	19.01	36.02	-17.01
			PEAK	21.41	25.48	25.57	-	-	-1.00	24.57	36.02	-11.45
	2457	10	AVG	17.94	17.93	17.86	30.00	-12.06	-1.00	16.94	36.02	-19.08
			PEAK	19.35	23.67	23.84	-	-	-1.00	22.84	36.02	-13.18
	2462	11	AVG	12.89	12.94	12.79	30.00	-17.06	-1.00	11.94	36.02	-24.08
			PEAK	14.27	18.65	18.86	-	-	-1.00	17.86	36.02	-18.16

Table 7-4. Conducted Output Power Measurements SISO ANT1 (20MHz)

2.4GHz (40MHz)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ac						
		2422	3	AVG	11.86	11.77	30.00	-18.14	-0.50	11.36	36.02
			PEAK	20.02	19.89	-	-	-0.50	19.52	36.02	-16.50
	2427	4	AVG	11.77	11.75	30.00	-18.23	-0.50	11.27	36.02	-24.75
			PEAK	20.03	20.03	-	-	-0.50	19.53	36.02	-16.49
	2432	5	AVG	11.85	11.80	30.00	-18.15	-0.50	11.35	36.02	-24.67
			PEAK	20.96	20.96	-	-	-0.50	20.46	36.02	-15.56
	2437	6	AVG	13.92	13.90	30.00	-16.08	-0.50	13.42	36.02	-22.60
			PEAK	22.17	21.99	-	-	-0.50	21.67	36.02	-14.35
	2442	7	AVG	11.59	11.53	30.00	-18.41	-0.50	11.09	36.02	-24.93
			PEAK	19.76	19.67	-	-	-0.50	19.26	36.02	-16.76
	2447	8	AVG	10.59	10.51	30.00	-19.41	-0.50	10.09	36.02	-25.93
			PEAK	18.79	18.64	-	-	-0.50	18.29	36.02	-17.73
	2452	9	AVG	9.60	9.68	30.00	-20.32	-1.00	8.68	36.02	-27.34
			PEAK	17.91	17.71	-	-	-1.00	16.91	36.02	-19.11
	2457	10	AVG	5.31	5.27	30.00	-24.69	-1.00	4.31	36.02	-31.71
			PEAK	13.48	13.48	-	-	-1.00	12.48	36.02	-23.54

Table 7-5. Conducted Output Power Measurements SISO ANT1 (40MHz)


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 34 of 104

2.4GHz (20MHz)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11b	802.11g	802.11n						
				2412	1	AVG						
		PEAK	16.30	19.75	20.22	-	-	-0.60	19.62	36.02	-16.40	
2417	2	AVG	18.84	18.90	18.75	30.00	-11.10	-0.50	18.40	36.02	-17.62	
		PEAK	20.23	24.45	24.76	-	-	-0.50	24.26	36.02	-11.76	
2422	3	AVG	19.86	19.92	19.75	30.00	-10.08	-0.50	19.42	36.02	-16.60	
		PEAK	21.27	25.28	25.55	-	-	-0.50	25.05	36.02	-10.97	
2427	4	AVG	20.99	20.90	20.78	30.00	-9.01	-0.50	20.49	36.02	-15.53	
		PEAK	22.36	27.06	26.86	-	-	-0.50	26.56	36.02	-9.46	
2432	5	AVG	23.94	23.30	23.26	30.00	-6.06	-0.40	23.54	36.02	-12.48	
		PEAK	25.18	28.27	28.22	-	-	-0.40	27.87	36.02	-8.15	
2437	6	AVG	23.94	23.33	23.17	30.00	-6.06	-0.40	23.54	36.02	-12.48	
		PEAK	25.19	28.34	28.20	-	-	-0.40	27.94	36.02	-8.08	
2442	7	AVG	23.96	23.35	23.27	30.00	-6.04	-0.40	23.56	36.02	-12.46	
		PEAK	25.22	28.33	28.35	-	-	-0.40	27.95	36.02	-8.07	
2447	8	AVG	21.00	20.85	20.83	30.00	-9.00	-0.40	20.60	36.02	-15.42	
		PEAK	22.34	27.10	26.90	-	-	-0.40	26.70	36.02	-9.32	
2452	9	AVG	19.99	19.94	19.89	30.00	-10.01	-1.20	18.79	36.02	-17.23	
		PEAK	21.33	25.51	25.47	-	-	-1.20	24.31	36.02	-11.71	
2457	10	AVG	17.90	17.92	17.90	30.00	-12.08	-1.20	16.72	36.02	-19.30	
		PEAK	19.29	23.66	23.72	-	-	-1.20	22.52	36.02	-13.50	
2462	11	AVG	12.99	13.04	13.03	30.00	-16.96	-1.20	11.84	36.02	-24.18	
		PEAK	14.36	18.79	19.05	-	-	-1.20	17.85	36.02	-18.17	

Table 7-6. Conducted Output Power Measurements SISO ANT2 (20MHz)

2.4GHz (40MHz)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ac						
				2422	3						
		PEAK	19.92	19.96	-	-	-0.50	19.46	36.02	-16.56	
2427	4	AVG	11.79	11.84	30.00	-18.16	-0.50	11.34	36.02	-24.68	
		PEAK	19.98	20.01	-	-	-0.50	19.51	36.02	-16.51	
2432	5	AVG	11.83	12.24	30.00	-17.76	-0.40	11.84	36.02	-24.18	
		PEAK	20.11	20.96	-	-	-0.40	20.56	36.02	-15.46	
2437	6	AVG	13.74	13.82	30.00	-16.18	-0.40	13.42	36.02	-22.60	
		PEAK	21.99	21.83	-	-	-0.40	21.59	36.02	-14.43	
2442	7	AVG	11.74	11.79	30.00	-18.21	-0.40	11.39	36.02	-24.63	
		PEAK	19.97	19.98	-	-	-0.40	19.58	36.02	-16.44	
2447	8	AVG	10.85	10.79	30.00	-19.15	-0.40	10.45	36.02	-25.57	
		PEAK	19.02	18.93	-	-	-0.40	18.62	36.02	-17.40	
2452	9	AVG	9.80	9.82	30.00	-20.18	-1.20	8.62	36.02	-27.40	
		PEAK	18.02	17.96	-	-	-1.20	16.82	36.02	-19.20	
2457	10	AVG	5.48	5.49	30.00	-24.51	-1.20	4.29	36.02	-31.73	
		PEAK	13.53	13.54	-	-	-1.20	12.34	36.02	-23.68	

Table 7-7. Conducted Output Power Measurements SISO ANT2 (40MHz)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 35 of 104

2.4GHz (20MHz)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
		2412	1	AVG	14.30	14.10	17.21	30.00	-12.79	2.31	19.52	36.02
			PEAK	19.97	19.75	22.87	-	-	2.31	25.18	36.02	-10.84
	2417	2	AVG	19.20	18.90	22.06	30.00	-7.94	2.51	24.57	36.02	-11.45
			PEAK	24.78	24.45	27.63	-	-	2.51	30.14	36.02	-5.88
	2422	3	AVG	19.98	19.92	22.96	30.00	-7.04	2.51	25.47	36.02	-10.55
			PEAK	25.15	25.28	28.23	-	-	2.51	30.74	36.02	-5.28
	2427	4	AVG	21.04	20.90	23.98	30.00	-6.02	2.51	26.49	36.02	-9.53
			PEAK	27.31	27.06	30.20	-	-	2.51	32.71	36.02	-3.31
	2432	5	AVG	23.38	23.30	26.35	30.00	-3.65	2.56	28.91	36.02	-7.11
			PEAK	28.33	28.27	31.31	-	-	2.56	33.87	36.02	-2.15
	2437	6	AVG	23.40	23.33	26.38	30.00	-3.62	2.56	28.94	36.02	-7.09
			PEAK	28.42	28.34	31.39	-	-	2.56	33.95	36.02	-2.07
	2442	7	AVG	23.39	23.35	26.38	30.00	-3.62	2.56	28.94	36.02	-7.08
			PEAK	28.28	28.33	31.32	-	-	2.56	33.88	36.02	-2.15
	2447	8	AVG	20.75	20.85	23.81	30.00	-6.19	2.56	26.37	36.02	-9.65
			PEAK	26.97	27.10	30.05	-	-	2.56	32.61	36.02	-3.41
	2452	9	AVG	19.99	19.94	22.98	30.00	-7.02	1.91	24.89	36.02	-11.14
			PEAK	25.48	25.51	28.51	-	-	1.91	30.42	36.02	-5.61
	2457	10	AVG	17.93	17.92	20.94	30.00	-9.06	1.91	22.85	36.02	-13.18
			PEAK	23.67	23.66	26.68	-	-	1.91	28.59	36.02	-7.44
	2462	11	AVG	12.94	13.04	16.00	30.00	-14.00	1.91	17.91	36.02	-18.11
			PEAK	18.65	18.79	21.73	-	-	1.91	23.64	36.02	-12.38

Table 7-8. Conducted Output Power Measurements CDD (802.11g - 20MHz)

2.4GHz (20MHz)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
		2412	1	AVG	14.22	14.02	17.13	30.00	-12.87	2.31	19.44	36.02
			PEAK	20.07	20.22	23.16	-	-	2.31	25.47	36.02	-10.55
	2417	2	AVG	19.11	18.75	21.94	30.00	-8.06	2.51	24.45	36.02	-11.57
			PEAK	24.34	24.76	27.57	-	-	2.51	30.08	36.02	-5.95
	2422	3	AVG	19.92	19.75	22.85	30.00	-7.15	2.51	25.36	36.02	-10.66
			PEAK	25.37	25.55	28.47	-	-	2.51	30.98	36.02	-5.04
	2427	4	AVG	20.91	20.78	23.86	30.00	-6.14	2.51	26.37	36.02	-9.65
			PEAK	27.07	26.86	29.98	-	-	2.51	32.49	36.02	-3.53
	2432	5	AVG	23.28	23.26	26.28	30.00	-3.72	2.56	28.84	36.02	-7.18
			PEAK	28.29	28.22	31.27	-	-	2.56	33.83	36.02	-2.20
	2437	6	AVG	23.34	23.17	26.27	30.00	-3.73	2.56	28.83	36.02	-7.19
			PEAK	28.28	28.20	31.25	-	-	2.56	33.81	36.02	-2.21
	2442	7	AVG	23.44	23.27	26.37	30.00	-3.63	2.56	28.93	36.02	-7.09
			PEAK	28.20	28.35	31.29	-	-	2.56	33.85	36.02	-2.17
	2447	8	AVG	20.70	20.83	23.78	30.00	-6.22	2.56	26.34	36.02	-9.68
			PEAK	26.86	26.90	29.89	-	-	2.56	32.45	36.02	-3.57
	2452	9	AVG	19.89	19.89	22.90	30.00	-7.10	1.91	24.81	36.02	-11.21
			PEAK	25.57	25.47	28.53	-	-	1.91	30.44	36.02	-5.58
	2457	10	AVG	17.86	17.90	20.89	30.00	-9.11	1.91	22.80	36.02	-13.22
			PEAK	23.84	23.72	26.79	-	-	1.91	28.70	36.02	-7.32
	2462	11	AVG	12.79	13.03	15.92	30.00	-14.08	1.91	17.83	36.02	-18.19
			PEAK	18.86	19.05	21.97	-	-	1.91	23.88	36.02	-12.14

Table 7-9. Conducted Output Power Measurements MIMO (802.11n - 20MHz)


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 36 of 104

2.4GHz (40MHz)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
		2422	3	AVG	11.86	11.77	14.83	30.00	-15.17	2.51	17.34	36.02
			PEAK	20.02	19.92	22.98	-	-	2.51	25.49	36.02	-10.53
	2427	4	AVG	11.77	11.79	14.79	30.00	-15.21	2.51	17.30	36.02	-18.72
			PEAK	20.03	19.98	23.02	-	-	2.51	25.53	36.02	-10.50
	2432	5	AVG	11.85	11.83	14.85	30.00	-15.15	2.56	17.41	36.02	-18.61
			PEAK	20.96	20.11	23.57	-	-	2.56	26.13	36.02	-9.89
	2437	6	AVG	13.92	13.74	16.84	30.00	-13.16	2.56	19.40	36.02	-16.62
			PEAK	22.17	21.99	25.09	-	-	2.56	27.65	36.02	-8.37
	2442	7	AVG	11.59	11.74	14.68	30.00	-15.32	2.56	17.24	36.02	-18.78
			PEAK	19.76	19.97	22.88	-	-	2.56	25.44	36.02	-10.58
	2447	8	AVG	10.59	10.85	13.73	30.00	-16.27	2.56	16.29	36.02	-19.73
			PEAK	18.79	19.02	21.92	-	-	2.56	24.48	36.02	-11.54
	2452	9	AVG	9.60	9.80	12.71	30.00	-17.29	1.91	14.62	36.02	-21.40
			PEAK	17.91	18.02	20.98	-	-	1.91	22.89	36.02	-13.13
	2457	10	AVG	5.31	5.48	8.41	30.00	-21.59	1.91	10.32	36.02	-25.70
			PEAK	13.48	13.53	16.52	-	-	1.91	18.43	36.02	-17.60

Table 7-10. Conducted Output Power Measurements MIMO (802.11n - 40MHz)

2.4GHz (40MHz)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
		2422	3	AVG	11.77	11.74	14.77	30.00	-15.23	2.51	17.28	36.02
			PEAK	19.89	19.96	22.94	30.00	-7.06	2.51	25.45	36.02	-10.58
	2427	4	AVG	11.75	11.84	14.81	30.00	-15.19	2.51	17.32	36.02	-18.71
			PEAK	20.03	20.01	23.03	30.00	-6.97	2.51	25.54	36.02	-10.48
	2432	5	AVG	11.80	12.24	15.04	30.00	-14.96	2.56	17.60	36.02	-18.42
			PEAK	20.96	20.96	23.97	30.00	-6.03	2.56	26.53	36.02	-9.49
	2437	6	AVG	13.90	13.82	16.87	30.00	-13.13	2.56	19.43	36.02	-16.59
			PEAK	21.99	21.83	24.92	30.00	-5.08	2.56	27.48	36.02	-8.54
	2442	7	AVG	11.53	11.79	14.67	30.00	-15.33	2.56	17.23	36.02	-18.79
			PEAK	19.67	19.98	22.84	30.00	-7.16	2.56	25.40	36.02	-10.62
	2447	8	AVG	10.51	10.79	13.66	30.00	-16.34	2.56	16.22	36.02	-19.80
			PEAK	18.64	18.93	21.80	30.00	-8.20	2.56	24.36	36.02	-11.66
	2452	9	AVG	9.68	9.82	12.76	30.00	-17.24	1.91	14.67	36.02	-21.35
			PEAK	17.71	17.96	20.85	30.00	-9.15	1.91	22.76	36.02	-13.26
	2457	10	AVG	5.27	5.49	8.39	30.00	-21.61	1.91	10.30	36.02	-25.72
			PEAK	13.48	13.54	16.52	30.00	-13.48	1.91	18.43	36.02	-17.59

Table 7-11. Conducted Output Power Measurements MIMO (802.11ac - 40MHz)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 37 of 104

**Note:**

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_n$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log\left[\frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}}\right] \text{ dBi}$$

**Sample MIMO Calculation:**

At 2412MHz in 802.11n (20MHz BW), the average conducted output power was measured to be 14.22 dBm for Antenna-1 and 14.02 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(14.22 \text{ dBm} + 14.02 \text{ dBm}) = (26.42\text{mW} + 25.23 \text{ mW}) = 51.65 \text{ mW} = 17.13 \text{ dBm}$$

**Sample EIRP Calculation:**

At 2412MHz in 802.11n MIMO (20MHz BW) mode, the average MIMO conducted output power was calculated to be 17.13 dBm with directional gain of 2.31 dBi.

EIRP (dBm) = Conducted Output Power (dBm) + Ant gain (dBi)

$$= 17.13 \text{ dBm} + 2.31 \text{ dBi}$$

$$= 19.44 \text{ dBm}$$

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 38 of 104

## 7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD  
 KDB 558074 D01 v04 – Section 10.2 Method PKPSD  
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique  
 KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 39 of 104	


## SISO Antenna-1 Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.97	8.00	-8.97	Pass
2437	6	b	1	6.67	8.00	-1.33	Pass
2462	11	b	1	-2.76	8.00	-10.76	Pass
2412	1	g	6	-4.86	8.00	-12.86	Pass
2437	6	g	6	4.23	8.00	-3.77	Pass
2462	11	g	6	-5.35	8.00	-13.35	Pass
2412	1	7.472	6.5/7.2 (MCS0)	-5.51	8.00	-13.51	Pass
2437	6	7.147	6.5/7.2 (MCS0)	3.41	8.00	-4.59	Pass
2462	11	7.021	6.5/7.2 (MCS0)	-6.56	8.00	-14.56	Pass
2422	3	n (40MHz)	6.5/7.2 (MCS0)	-13.16	8.00	-21.16	Pass
2437	6	n (40MHz)	6.5/7.2 (MCS0)	-7.97	8.00	-15.97	Pass
2457	10	n (40MHz)	6.5/7.2 (MCS0)	-16.43	8.00	-24.43	Pass
2422	3	ac (40MHz)	6.5/7.2 (MCS0)	-13.45	8.00	-21.45	Pass
2437	6	ac (40MHz)	6.5/7.2 (MCS0)	-8.47	8.00	-16.47	Pass
2457	10	ac (40MHz)	6.5/7.2 (MCS0)	-17.11	8.00	-25.11	Pass


**Table 7-12. Conducted Power Density Measurements SISO ANT1**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 40 of 104	



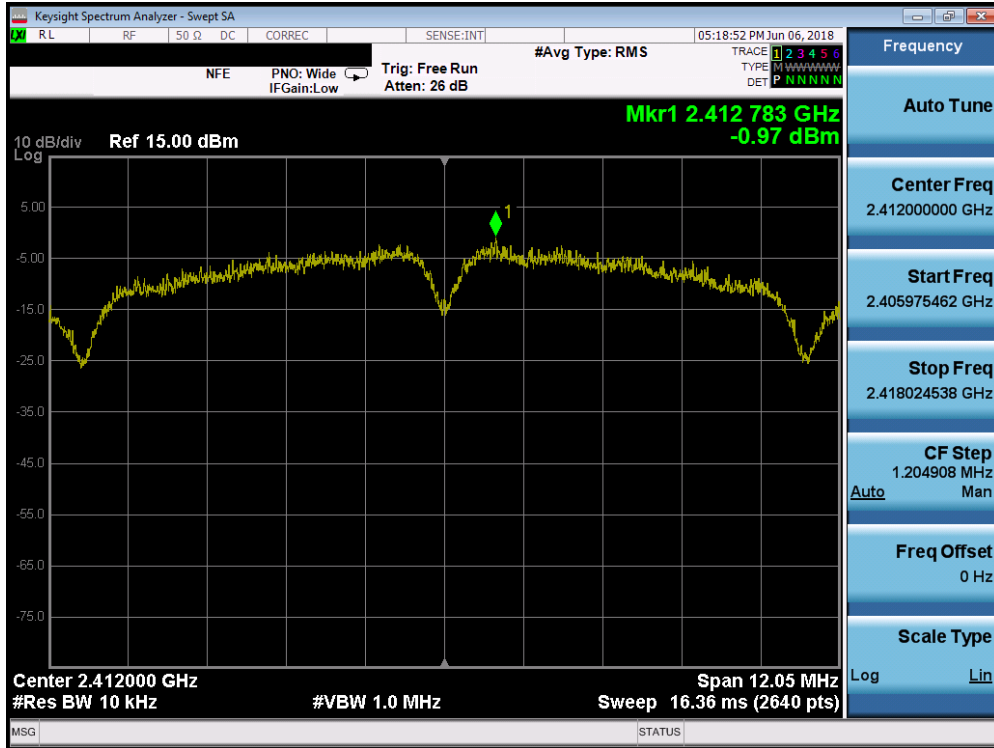


Plot 7-31. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 1)

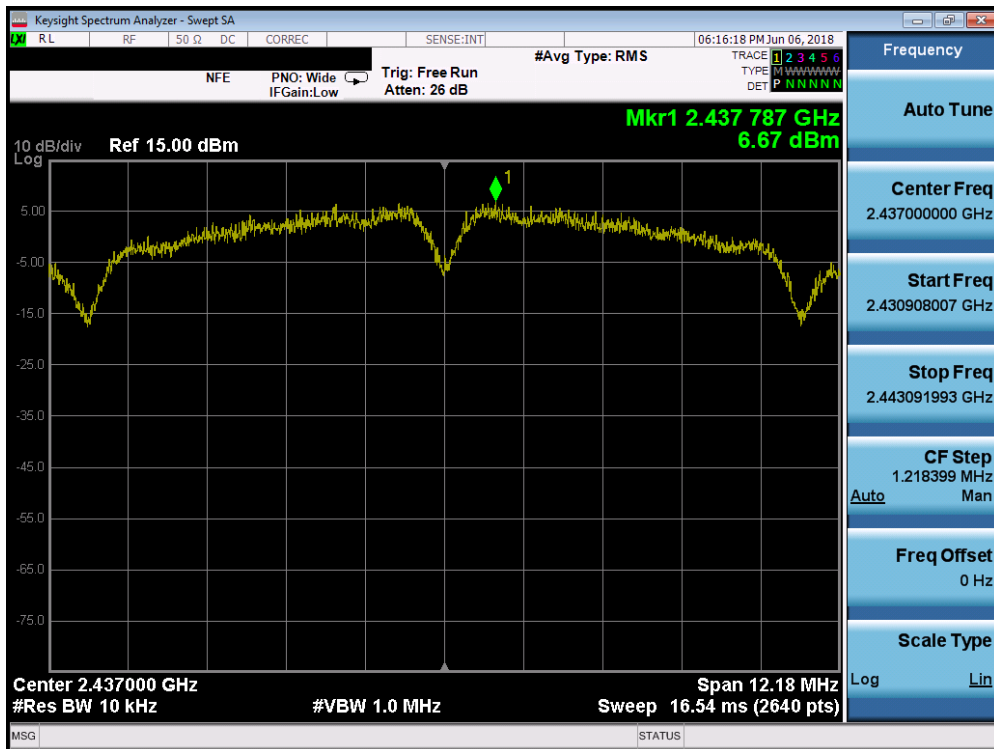


Plot 7-32. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 41 of 104

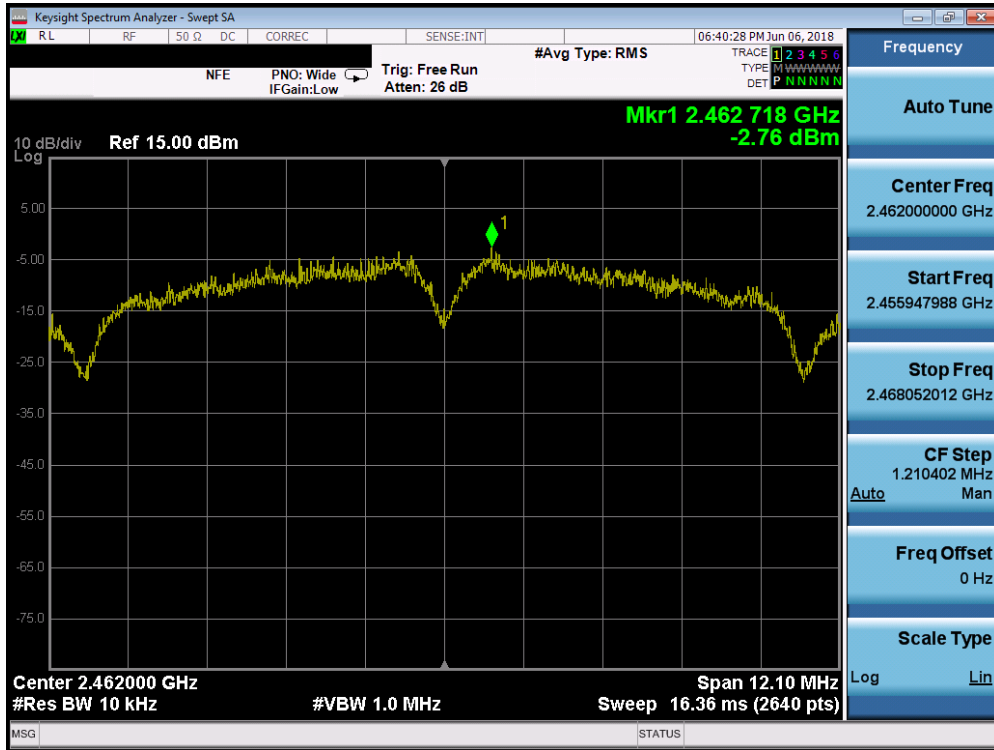


Plot 7-33. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)

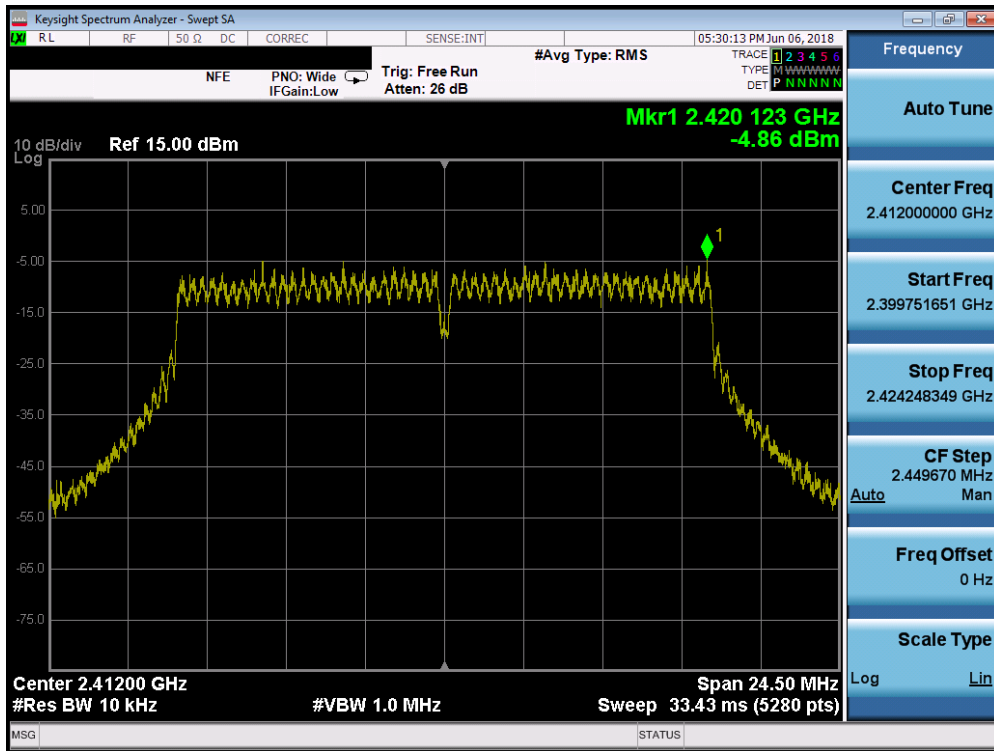


Plot 7-34. Power Spectral Density Plot SISO ANT1 (20MHz 802.11g – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 42 of 104

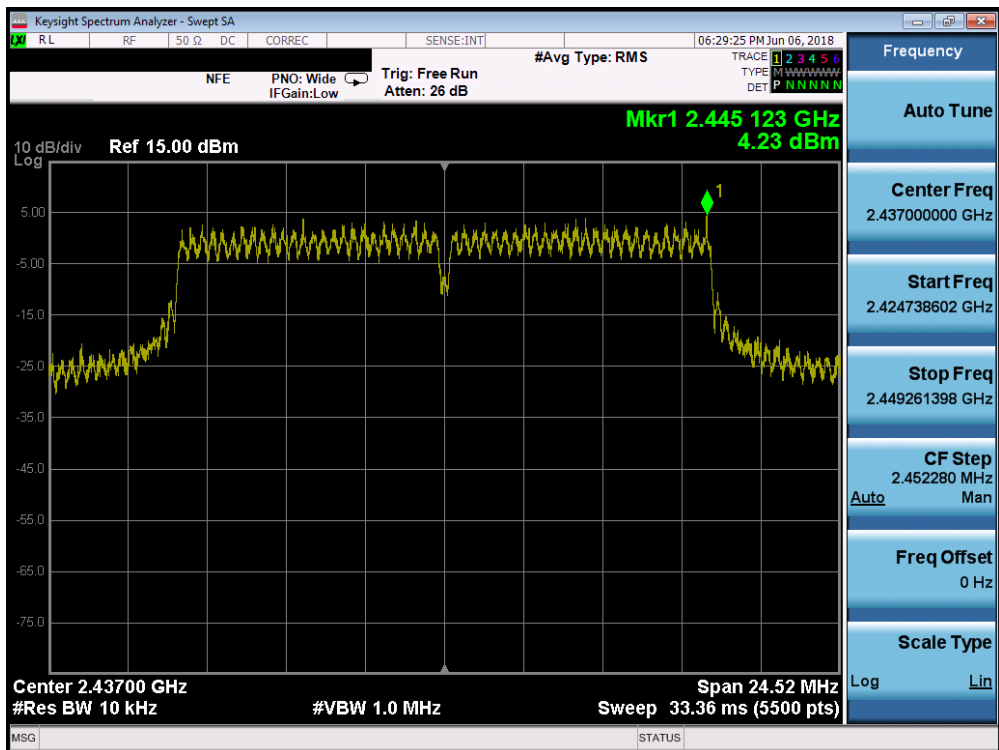


**Plot 7-35. Power Spectral Density Plot SISO ANT1 (20MHz 802.11g – Ch. 6)**

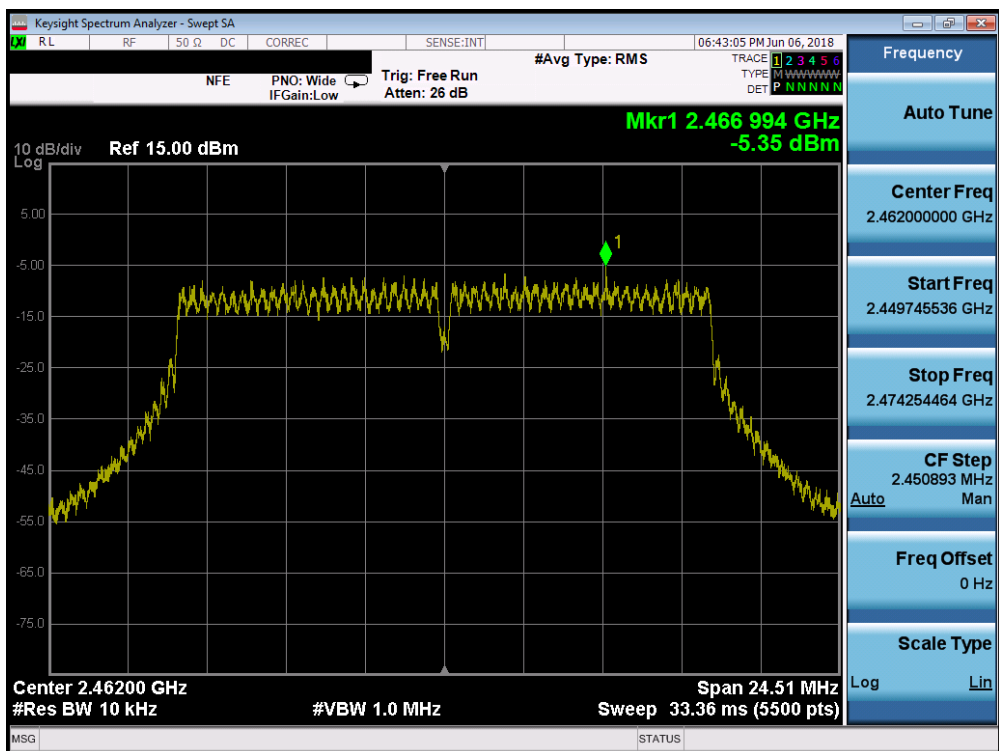


**Plot 7-36. Power Spectral Density Plot SISO ANT1 (20MHz 802.11g – Ch. 11)**

FCC ID: A3LETWV525 IC: 649E-ETWV525			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 43 of 104			

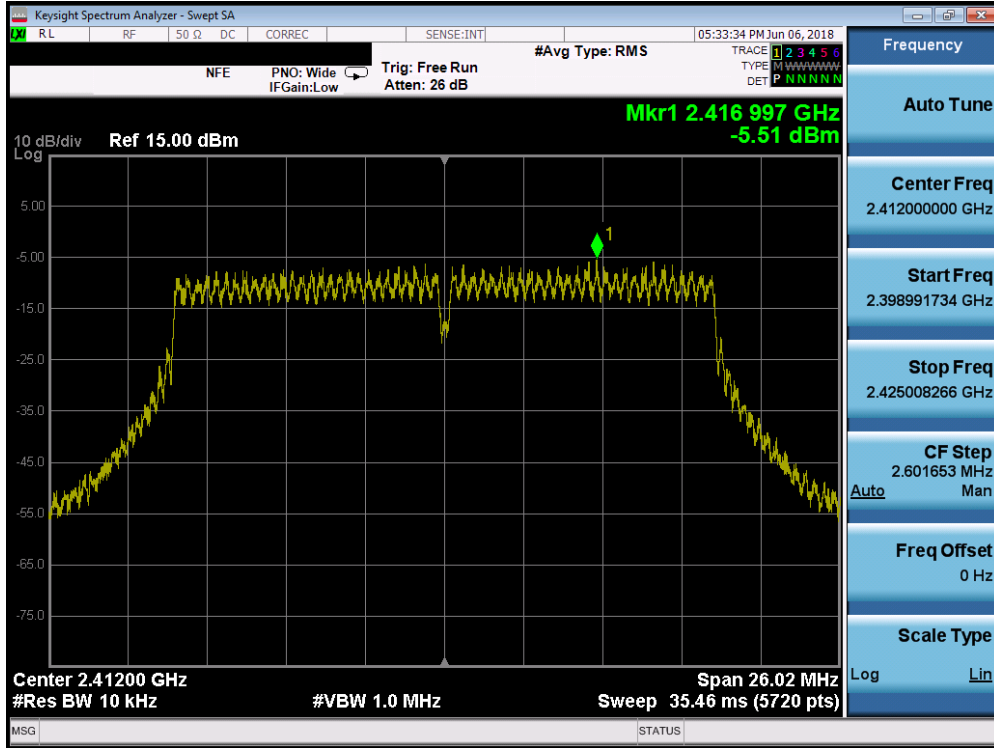


Plot 7-37. Power Spectral Density Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 1)

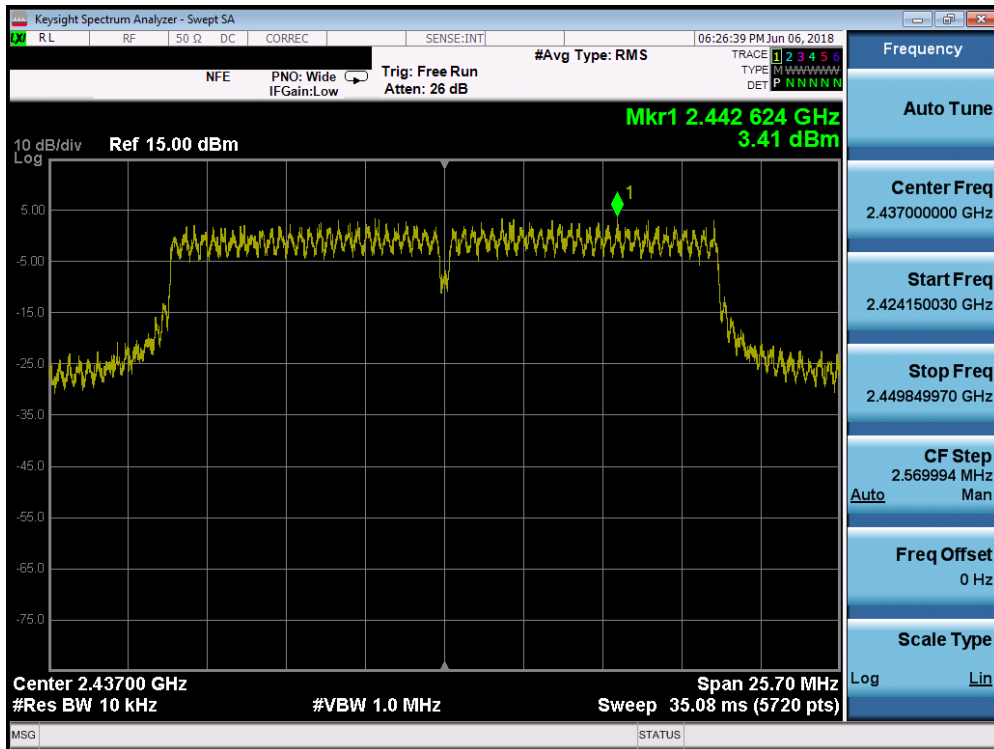


Plot 7-38. Power Spectral Density Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 44 of 104

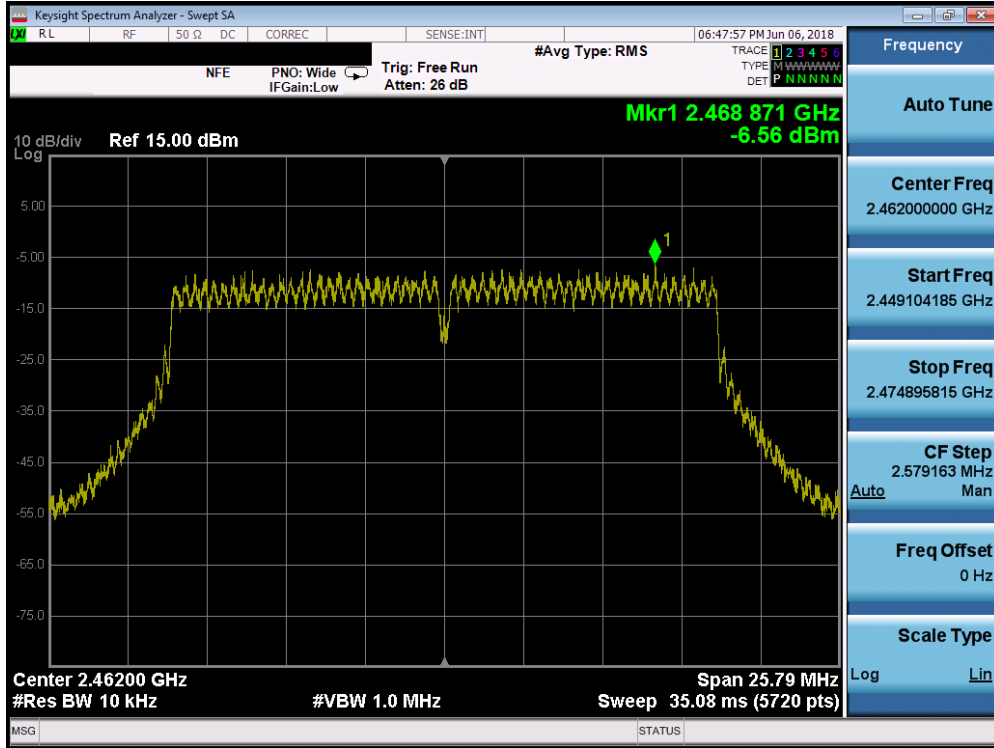


Plot 7-39. Power Spectral Density Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 11)

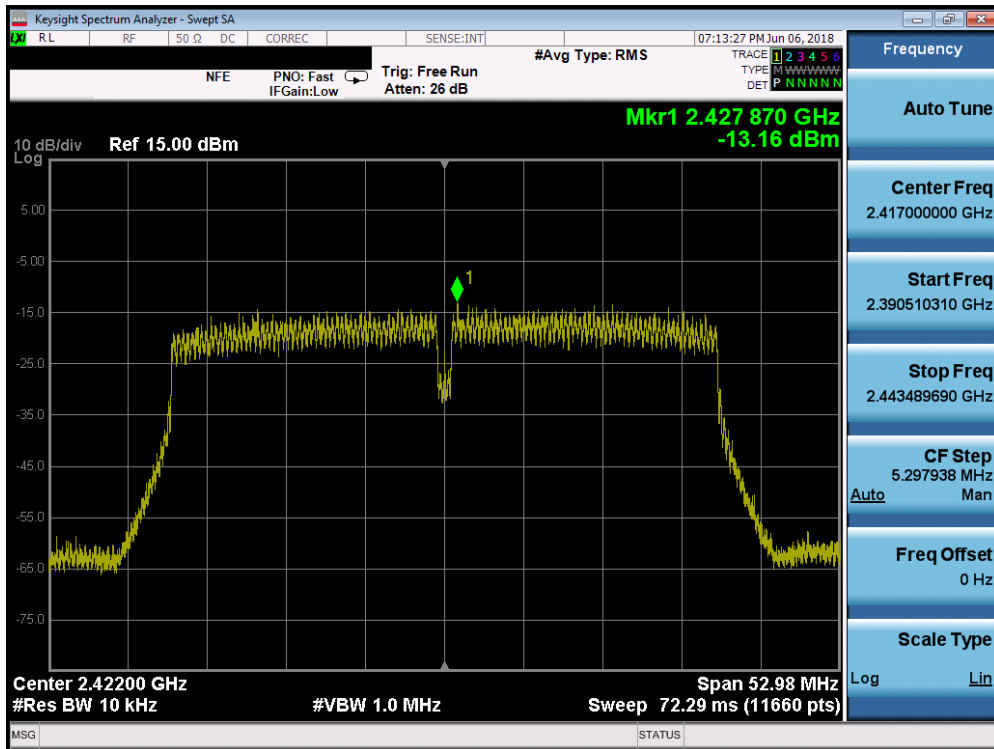


Plot 7-40. Power Spectral Density Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 3)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 45 of 104

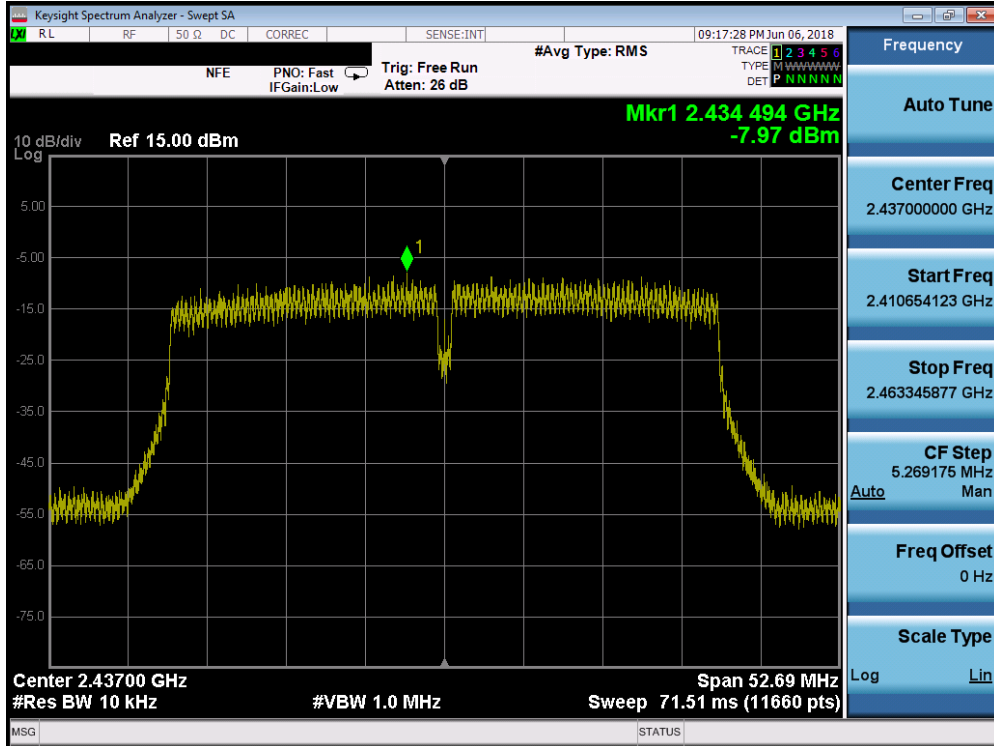


Plot 7-41. Power Spectral Density Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 6)

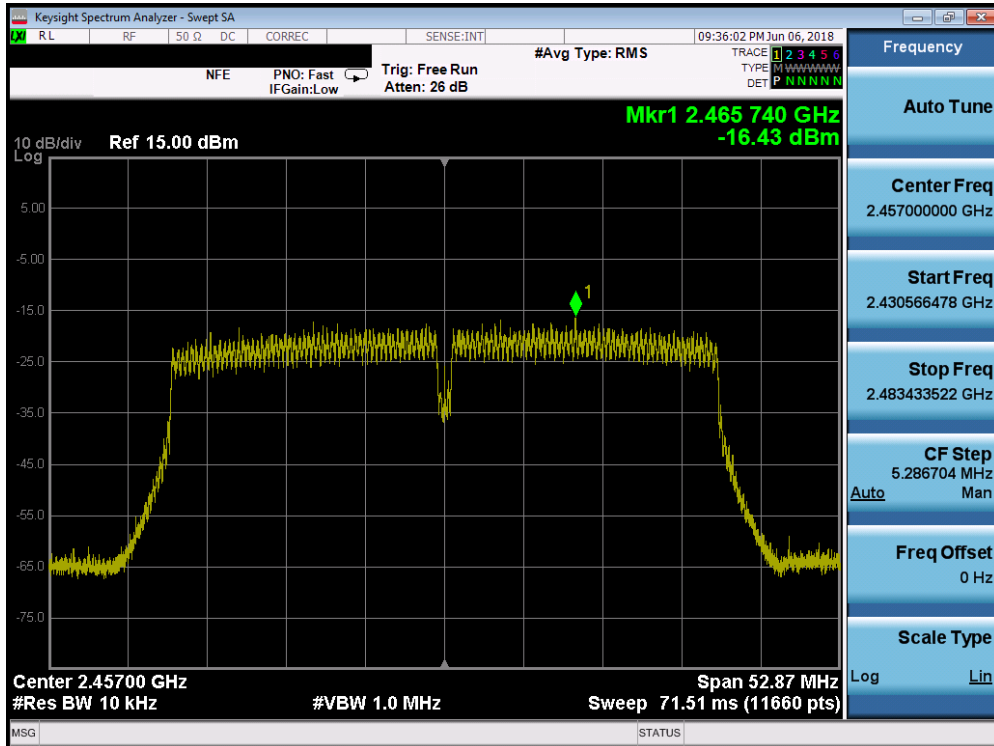


Plot 7-42. Power Spectral Density Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 46 of 104

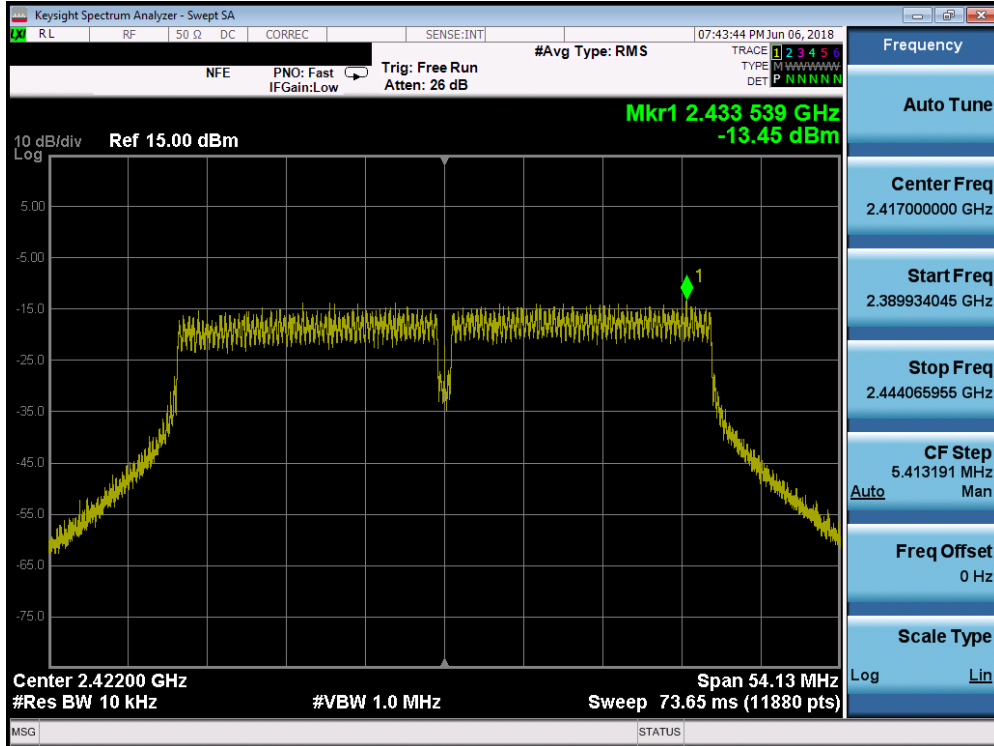


Plot 7-43. Power Spectral Density Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 3)

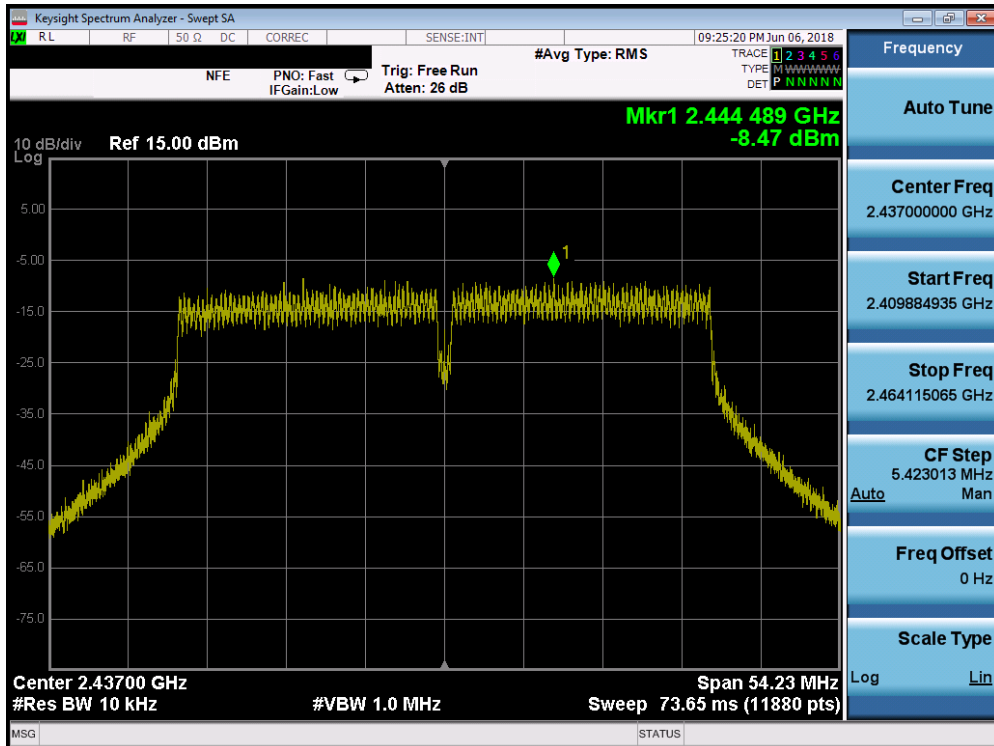

Plot 7-44. Power Spectral Density Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 47 of 104



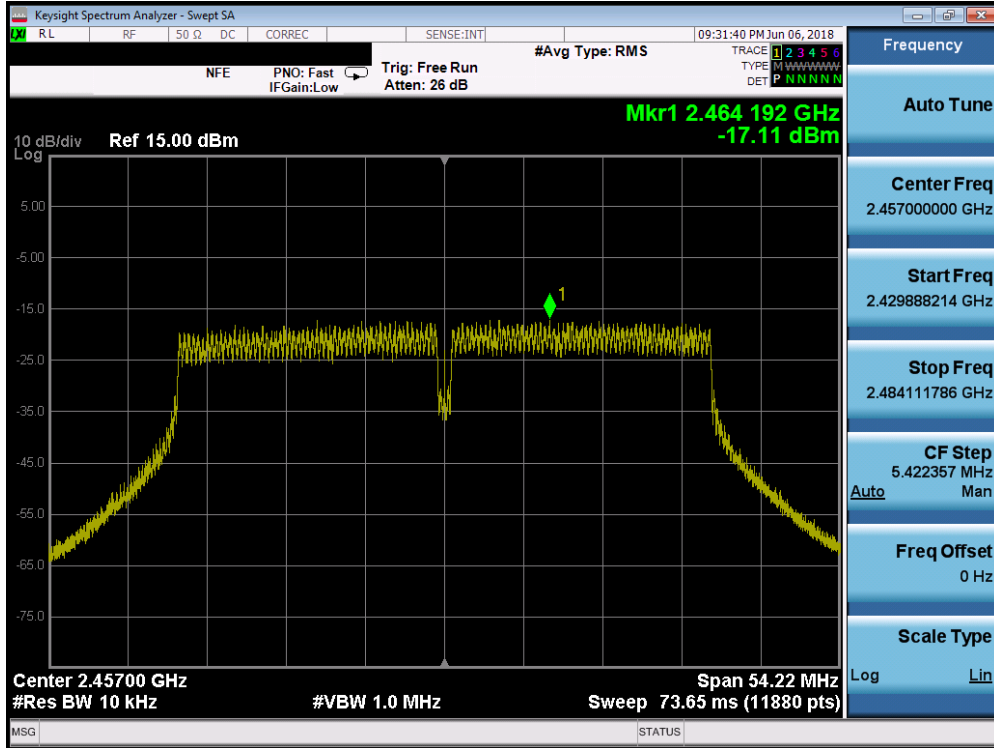

Plot 7-45. Power Spectral Density Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 10)



FCC ID: A3LETWV525 IC: 649E-ETWV525	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 48 of 104	



## SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.14	8.00	-8.14	Pass
2437	6	b	1	-1.46	8.00	-9.46	Pass
2462	11	b	1	-2.85	8.00	-10.85	Pass
2412	1	g	6	-13.45	8.00	-21.45	Pass
2437	6	g	6	4.69	8.00	-3.31	Pass
2462	11	g	6	-6.44	8.00	-14.44	Pass
2412	1	n	6.5/7.2 (MCS0)	-4.05	8.00	-12.05	Pass
2437	6	n	6.5/7.2 (MCS0)	4.62	8.00	-3.39	Pass
2462	11	n	6.5/7.2 (MCS0)	-5.96	8.00	-13.96	Pass
2422	3	n (40MHz)	6.5/7.2 (MCS0)	-13.56	8.00	-21.56	Pass
2437	6	n (40MHz)	6.5/7.2 (MCS0)	-7.99	8.00	-15.99	Pass
2457	10	n (40MHz)	6.5/7.2 (MCS0)	-16.60	8.00	-24.60	Pass
2422	3	ac (40MHz)	6.5/7.2 (MCS0)	-13.86	8.00	-21.86	Pass
2437	6	ac (40MHz)	6.5/7.2 (MCS0)	-13.56	8.00	-21.56	Pass
2457	10	ac (40MHz)	6.5/7.2 (MCS0)	-16.60	8.00	-24.60	Pass

**Table 7-13. Conducted Power Density Measurements SISO ANT2**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 49 of 104	




Plot 7-46. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

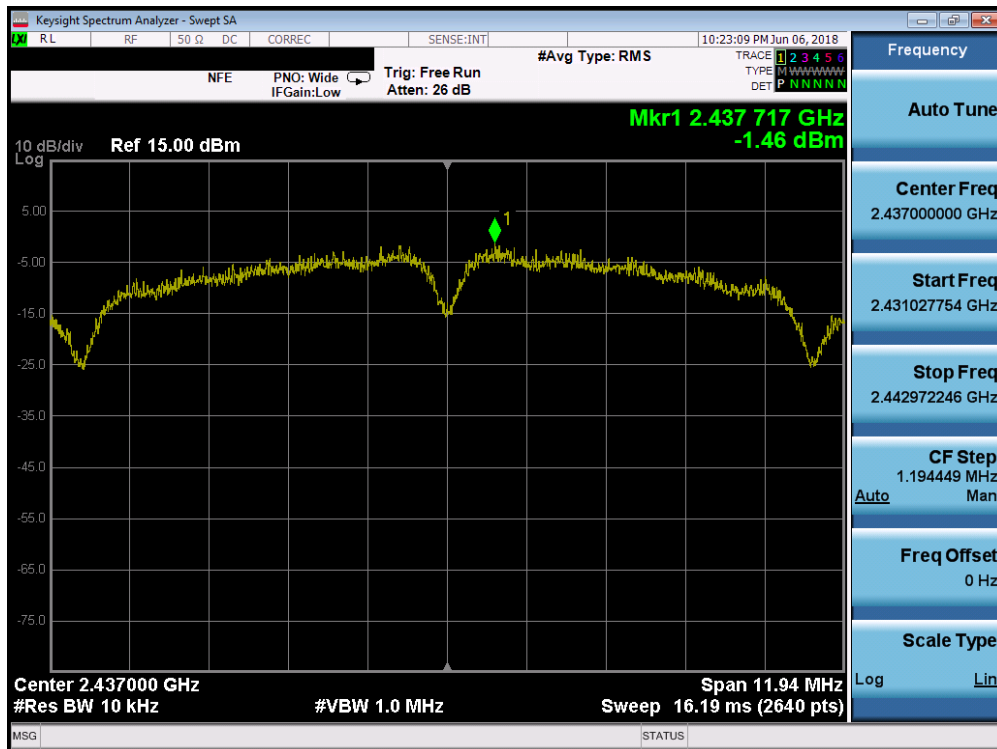


Plot 7-47. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 50 of 104

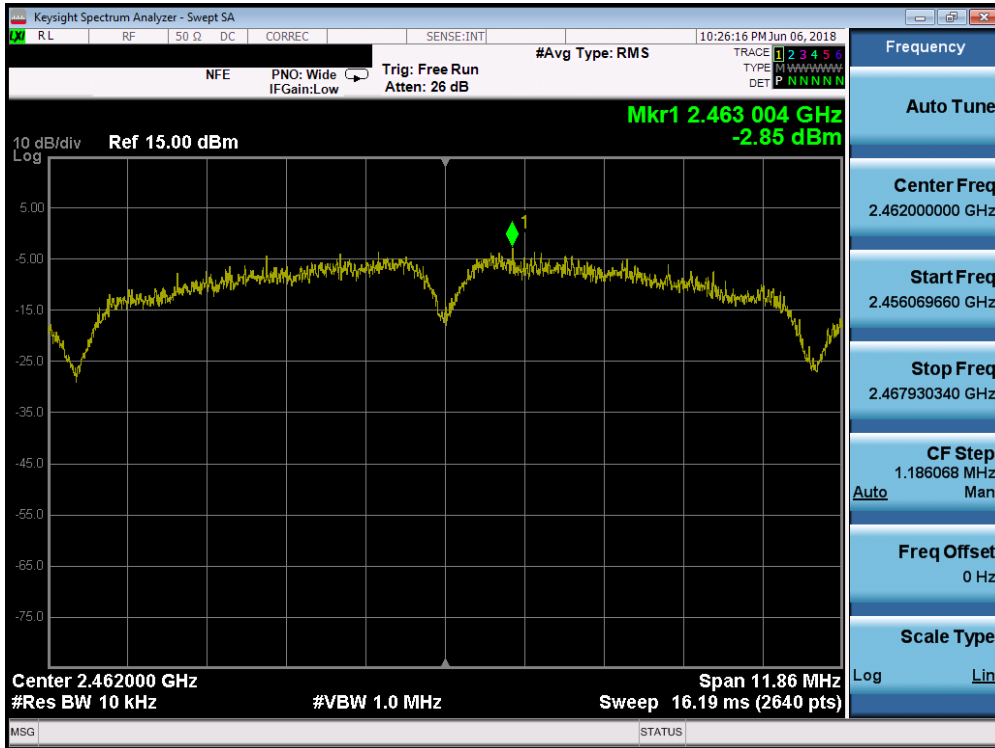


Plot 7-48. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

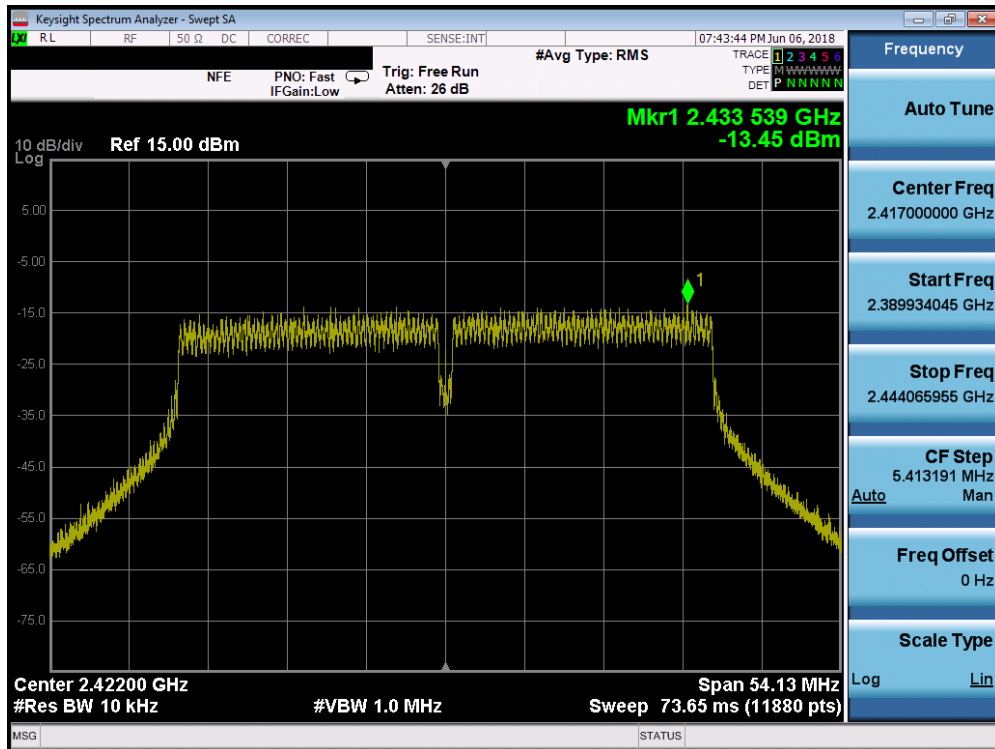


Plot 7-49. Power Spectral Density Plot SISO ANT2 (20MHz 802.11g – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 51 of 104

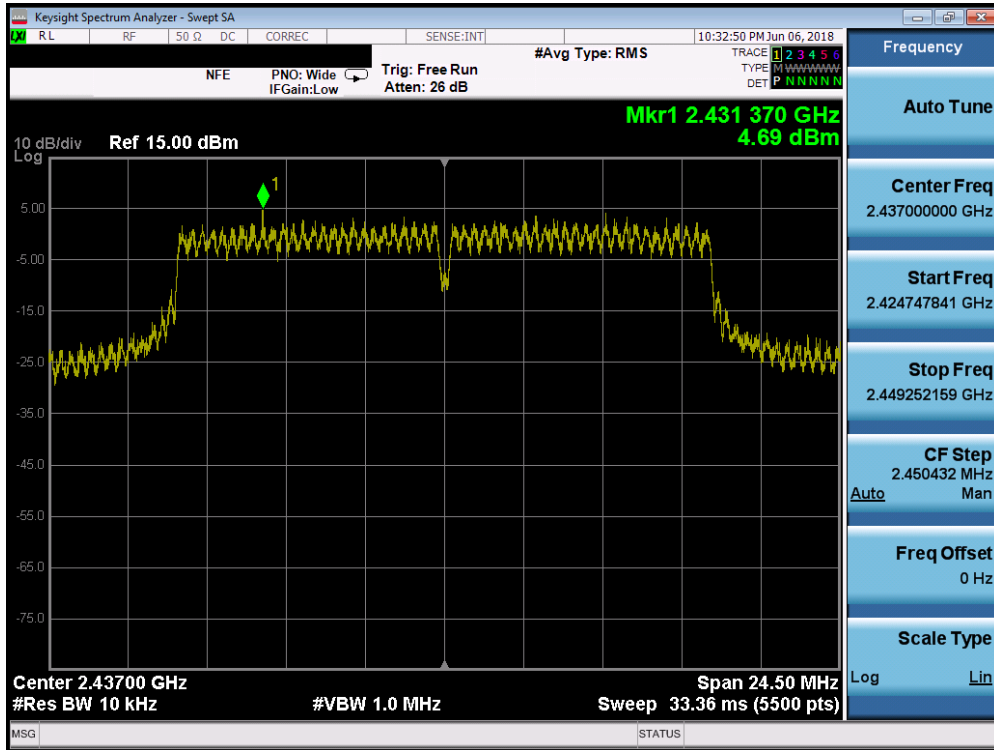


Plot 7-50. Power Spectral Density Plot SISO ANT2 (20MHz 802.11g – Ch. 6)

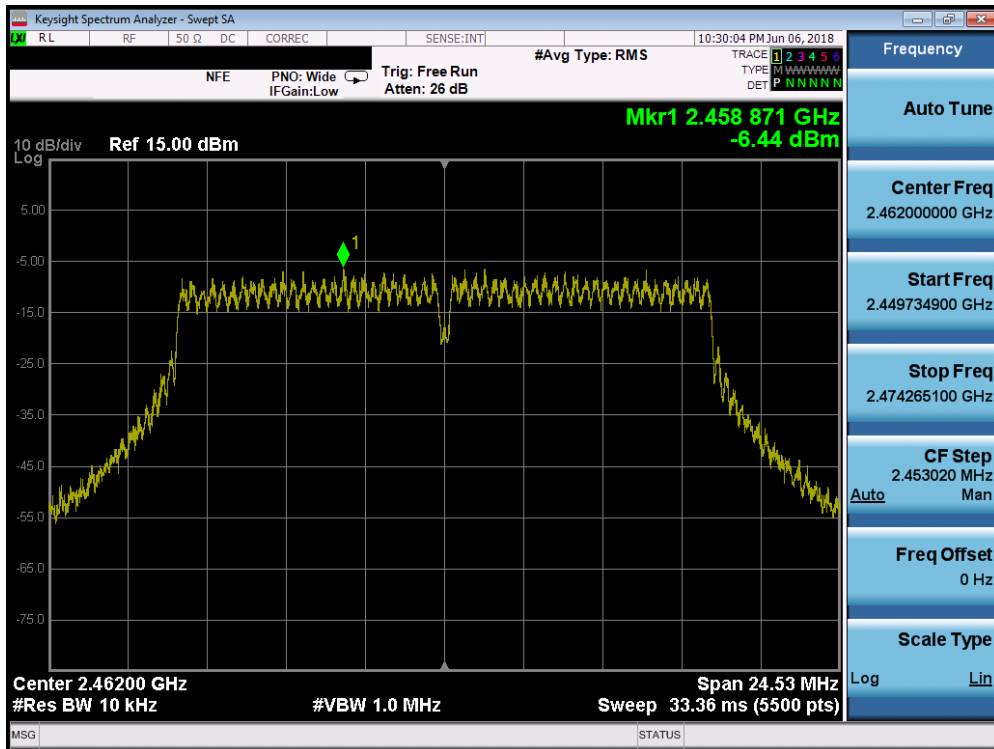


Plot 7-51. Power Spectral Density Plot SISO ANT2 (20MHz 802.11g – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 52 of 104

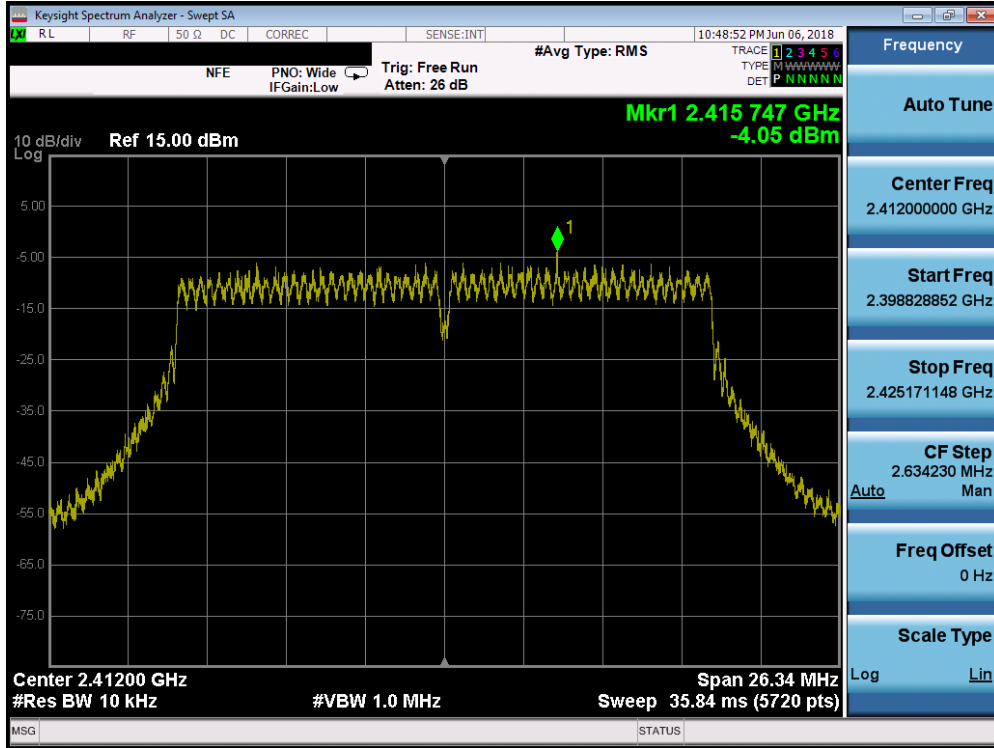


Plot 7-52. Power Spectral Density Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 1)

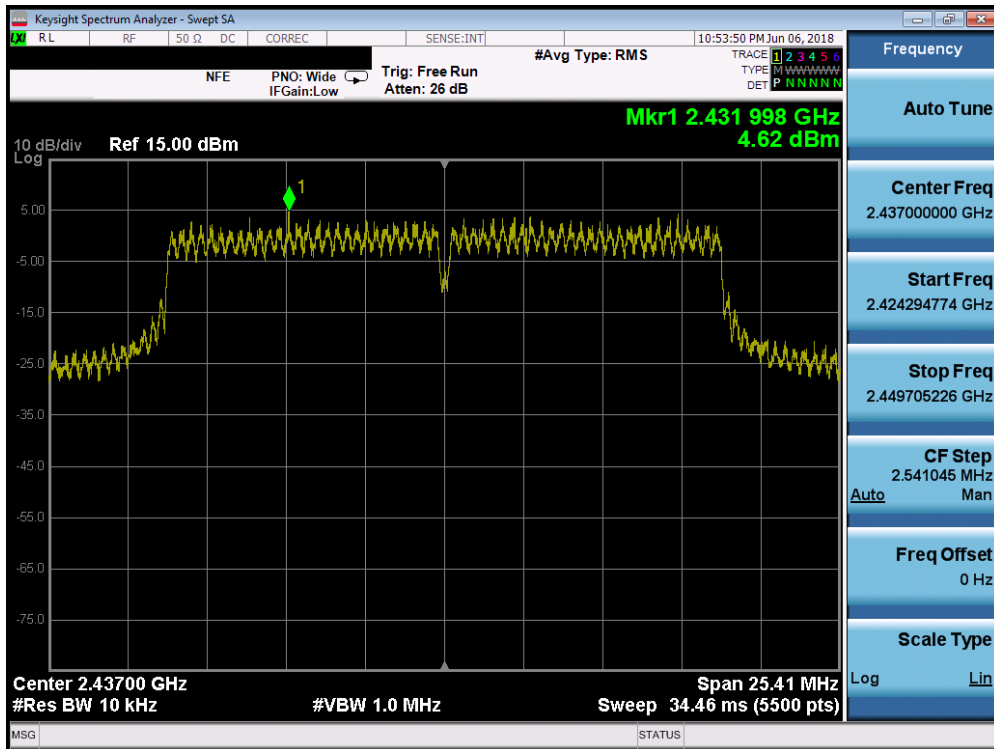


Plot 7-53. Power Spectral Density Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 6)


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 53 of 104

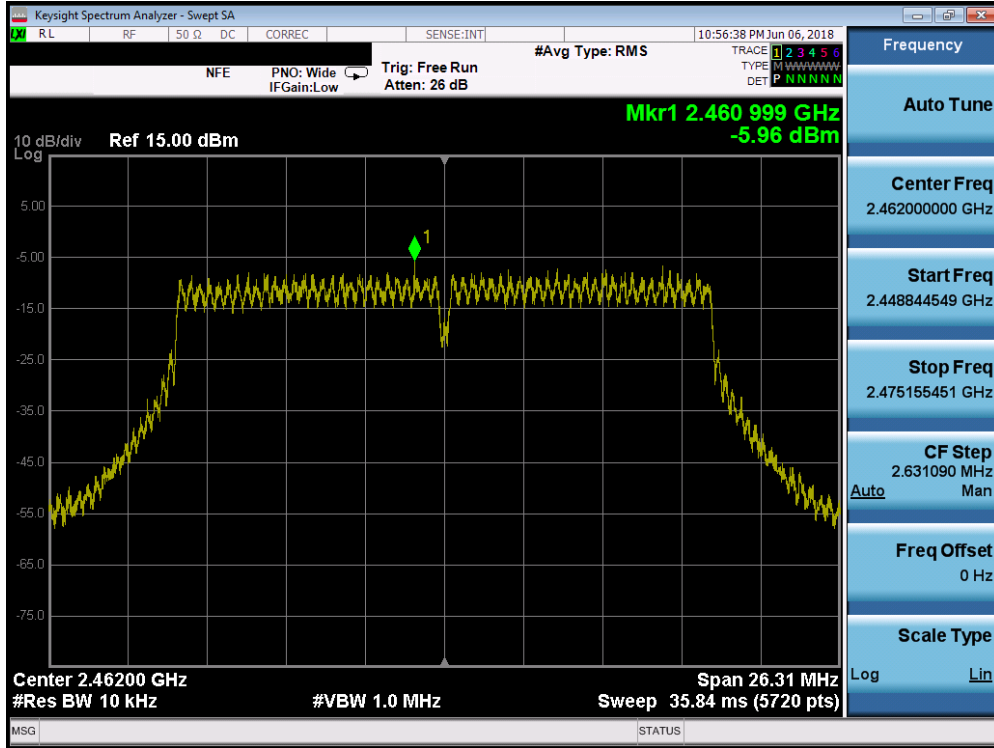


Plot 7-54. Power Spectral Density Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 11)

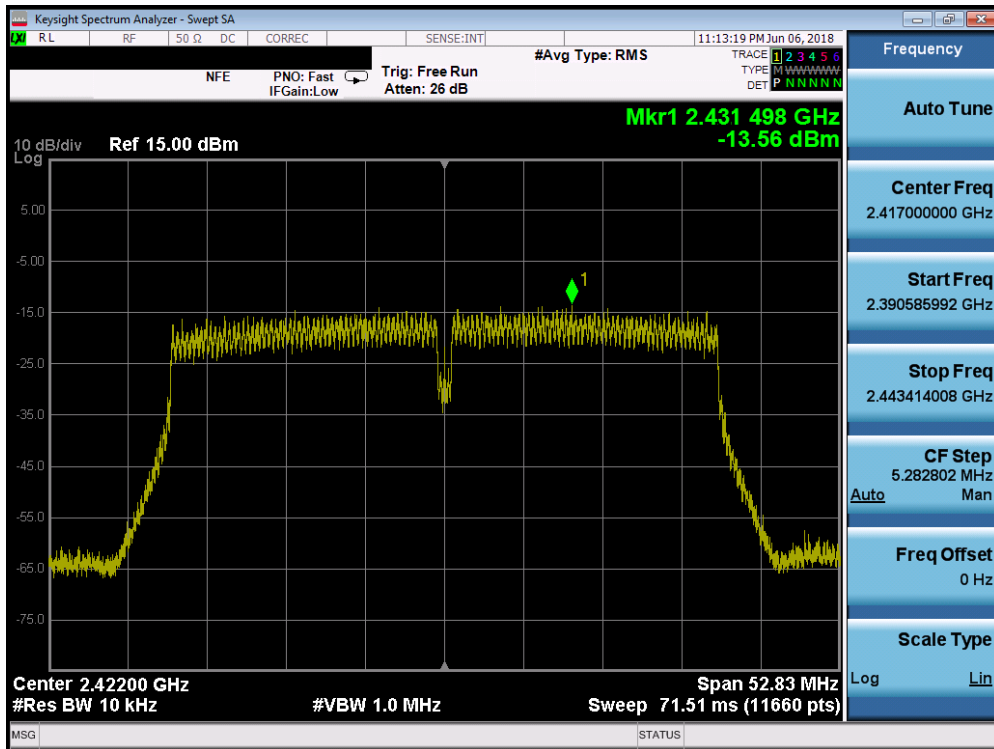


Plot 7-55. Power Spectral Density Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 3)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 54 of 104

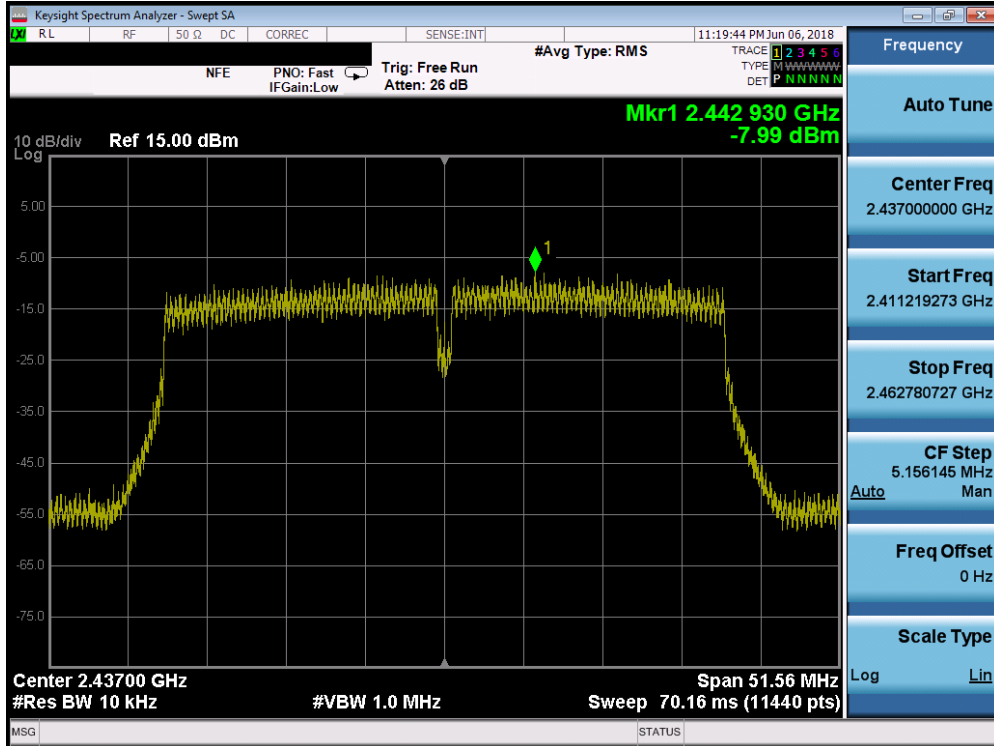


Plot 7-56. Power Spectral Density Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 6)

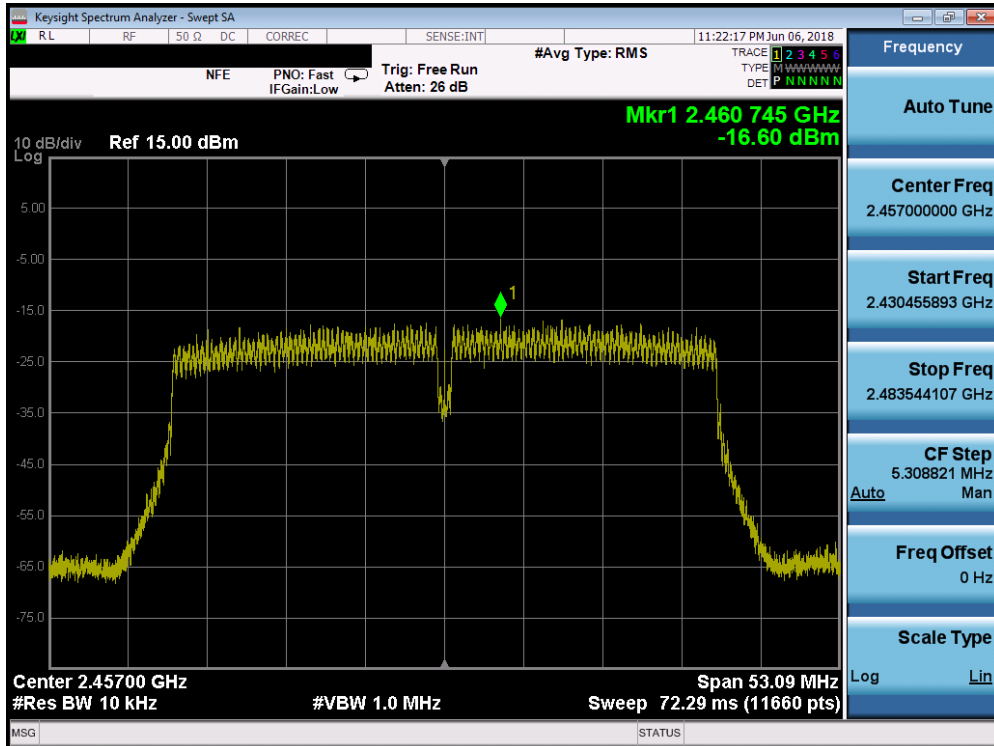


Plot 7-57. Power Spectral Density Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 55 of 104



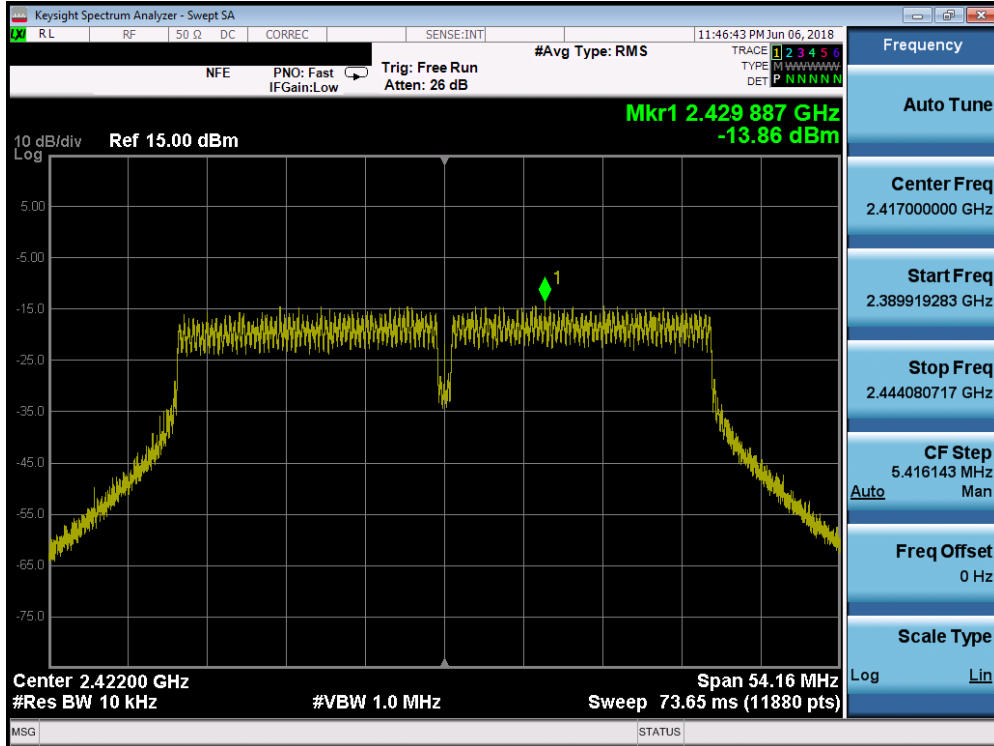


Plot 7-58. Power Spectral Density Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 3)

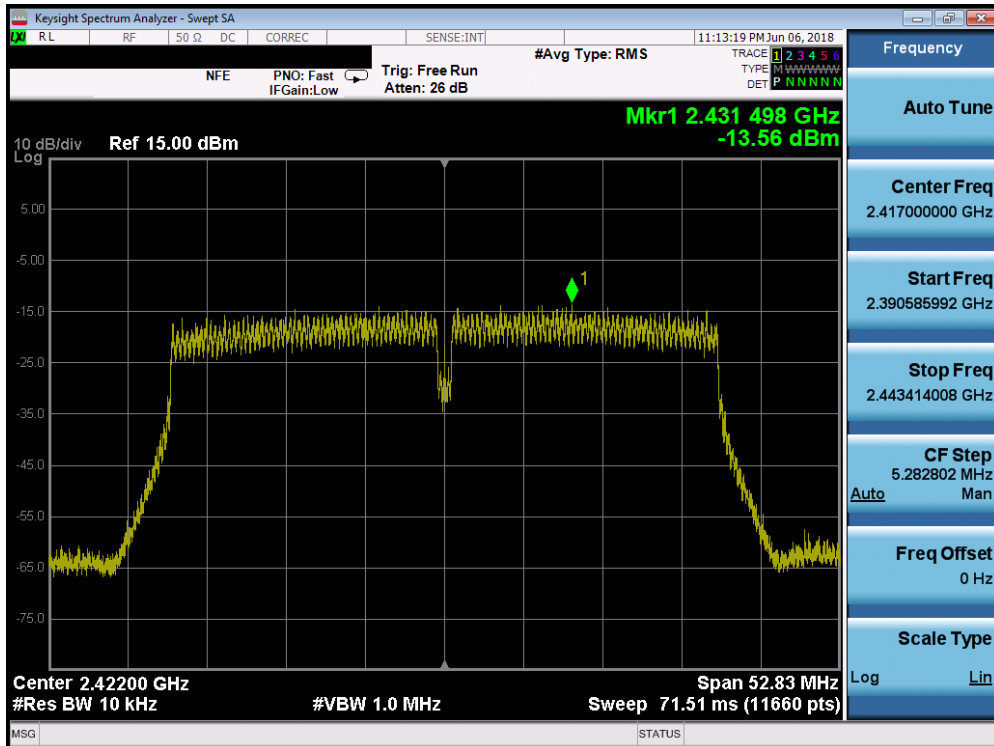


Plot 7-59. Power Spectral Density Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 56 of 104



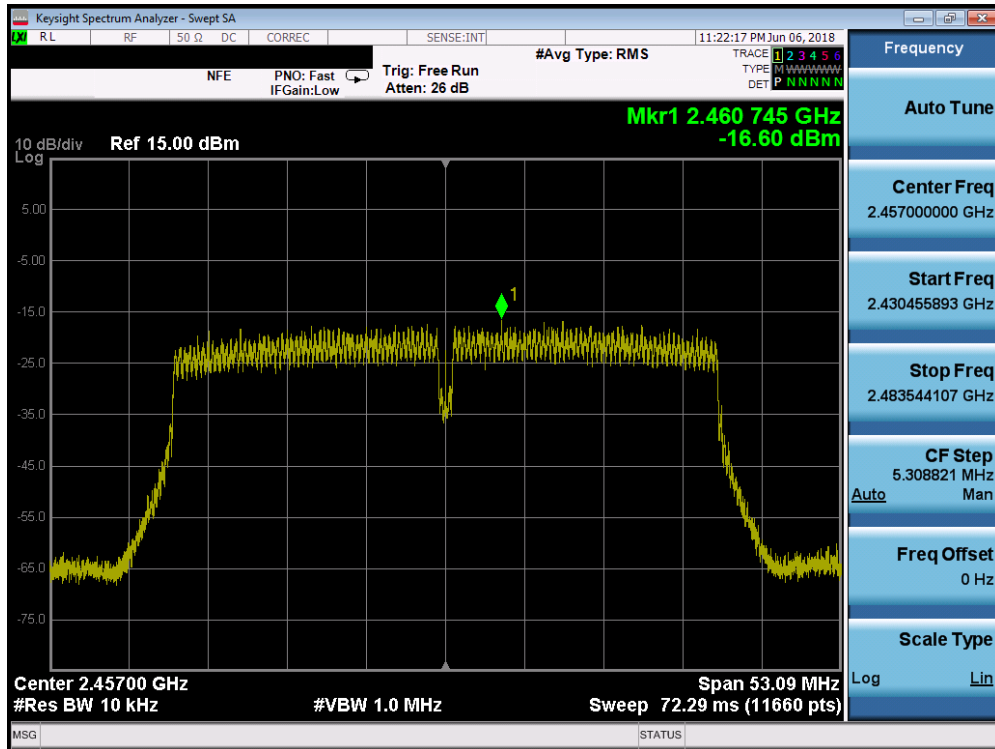

Plot 7-60. Power Spectral Density Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 57 of 104

## MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	6.5/7.2 (MCS0)	-4.86	-13.45	-4.30	8.00	-12.30	Pass
2437	6	g	6.5/7.2 (MCS0)	4.23	4.69	7.47	8.00	-0.53	Pass
2462	11	g	6.5/7.2 (MCS0)	-5.35	-6.44	-2.85	8.00	-10.85	Pass
2412	1	n	6.5/7.2 (MCS0)	-5.51	-4.05	-1.71	8.00	-9.71	Pass
2437	6	n	6.5/7.2 (MCS0)	3.41	4.62	7.06	8.00	-0.94	Pass
2462	11	n	6.5/7.2 (MCS0)	-6.56	-5.96	-3.24	8.00	-11.24	Pass
2422	3	n (40MHz)	13.5/15 (MCS0)	-13.16	-13.56	-10.35	8.00	-18.35	Pass
2437	6	n (40MHz)	13.5/15 (MCS0)	-7.97	-7.99	-4.97	8.00	-12.97	Pass
2457	10	n (40MHz)	13.5/15 (MCS0)	-16.43	-16.60	-13.50	8.00	-21.50	Pass
2422	3	ac (40MHz)	13.5/15 (MCS0)	-13.45	-13.86	-10.64	8.00	-18.64	Pass
2437	6	ac (40MHz)	13.5/15 (MCS0)	-8.47	-13.56	-7.30	8.00	-15.30	Pass
2457	10	ac (40MHz)	13.5/15 (MCS0)	-17.11	-16.60	-13.84	8.00	-21.84	Pass

**Table 7-14.MIMO/CDD Conducted Power Density Measurements**

**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz in 802.11n (20MHz BW), the average conducted power spectral density was measured to be -5.51 dBm for Antenna-1 and -4.05 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-5.51 \text{ dBm} + -4.05 \text{ dBm}) = (0.28 \text{ mW} + 0.39 \text{ mW}) = 0.67 \text{ mW} = -1.71 \text{ dBm}$$

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 58 of 104	

## 7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v04 – Section 11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 59 of 104	

# SISO Antenna-1 Conducted Emissions at the Band Edge

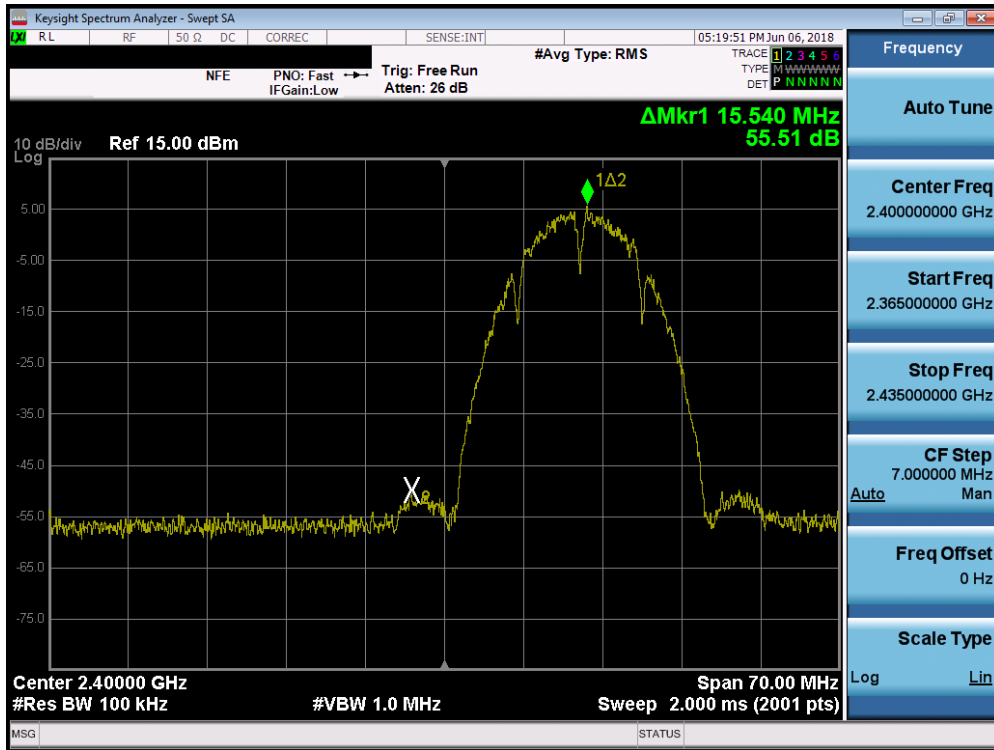


Plot 7-61. Band Edge Plot SISO ANT1 (802.11b – Ch. 1)

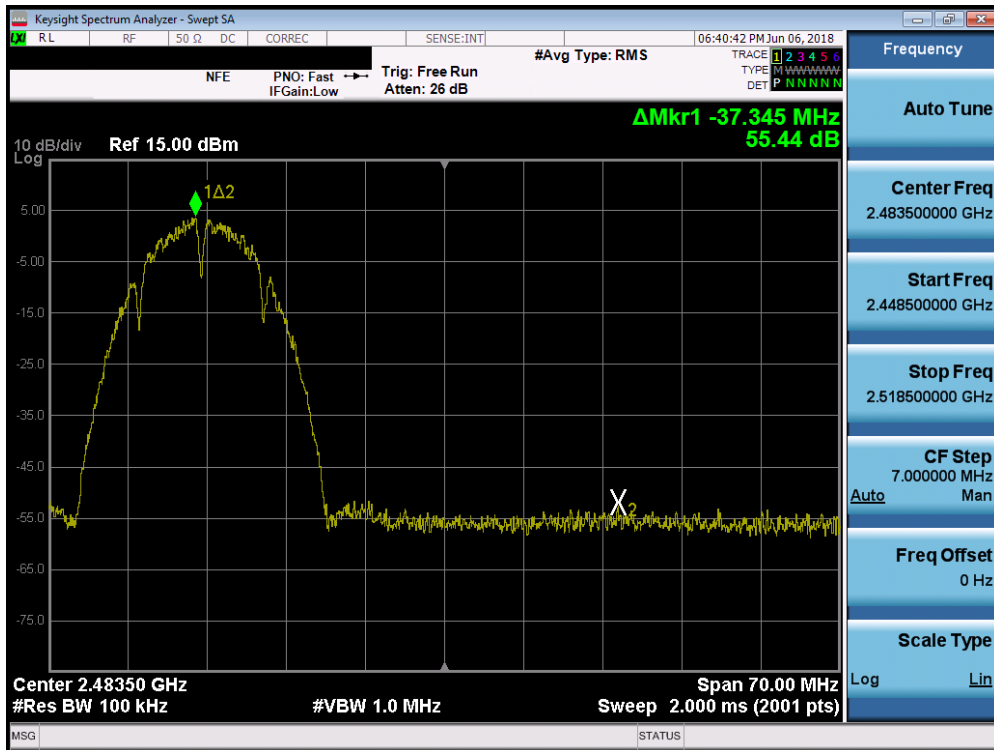


Plot 7-62. Band Edge Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 60 of 104

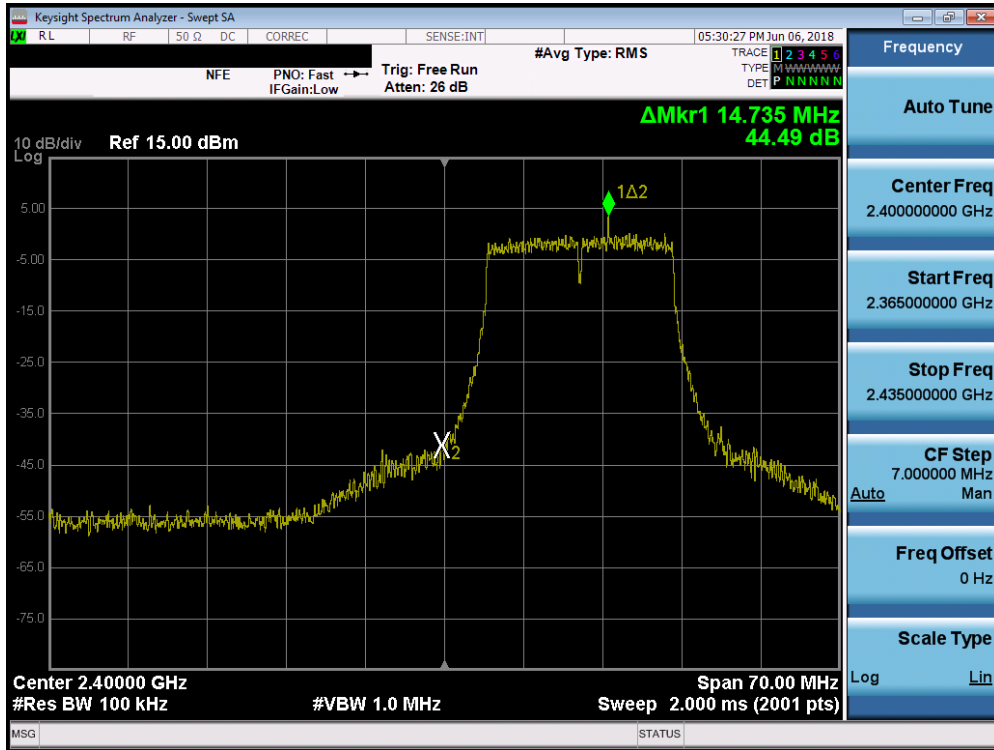


Plot 7-63. Band Edge Plot SISO ANT1 (20MHz 802.11g– Ch. 1)

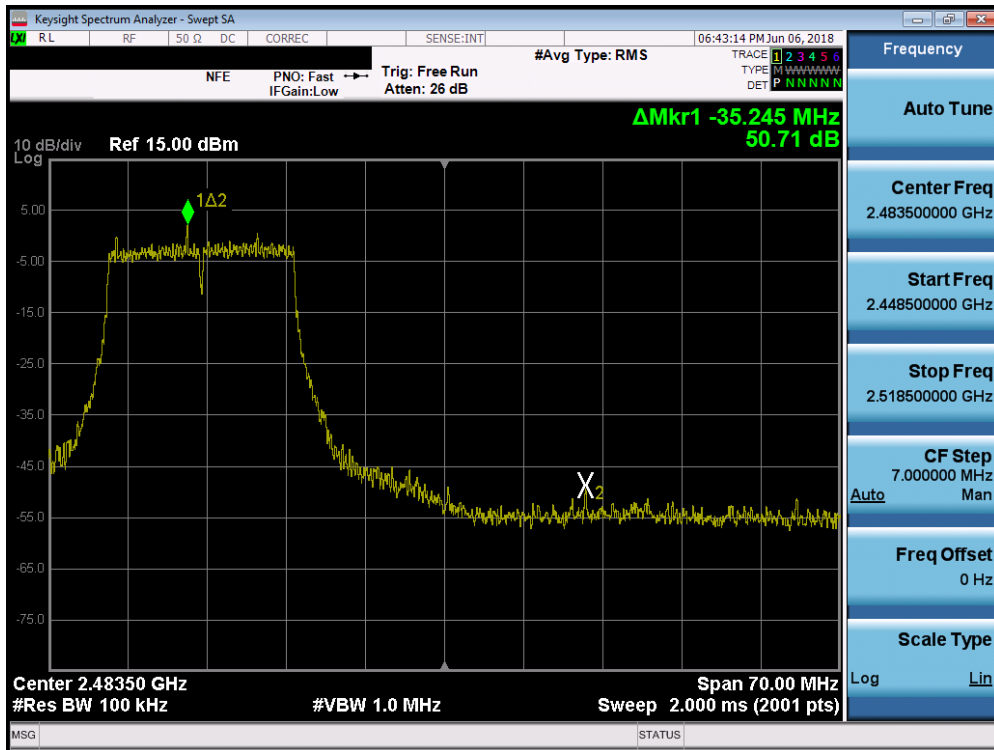


Plot 7-64. Band Edge Plot SISO ANT1 (20MHz 802.11g – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 61 of 104

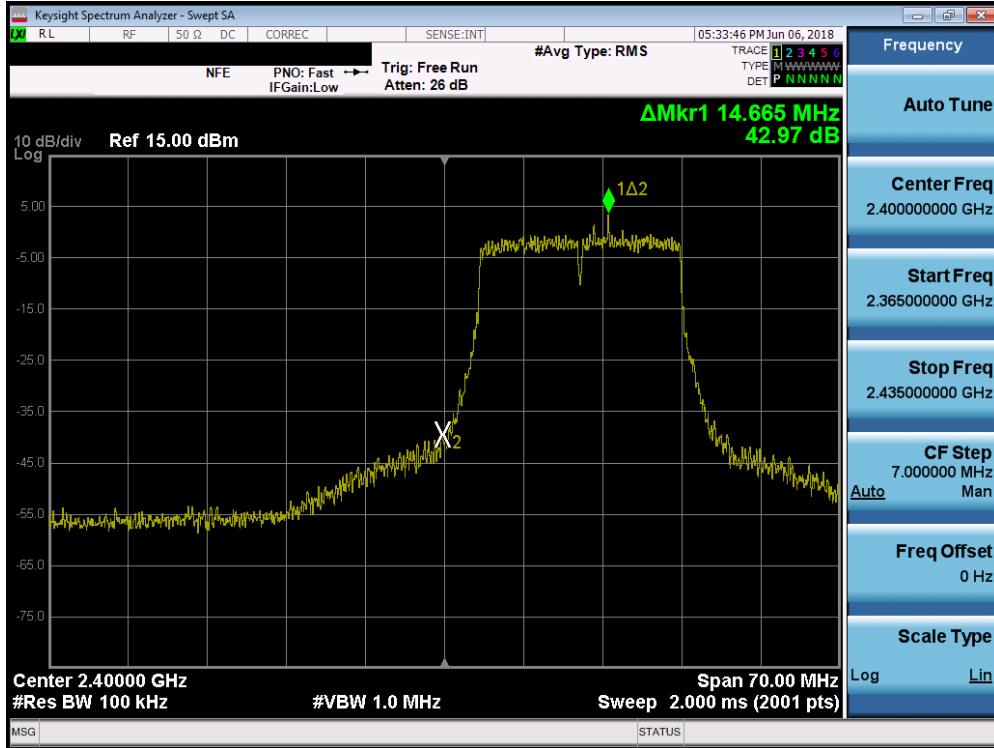


Plot 7-65. Band Edge Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 1)

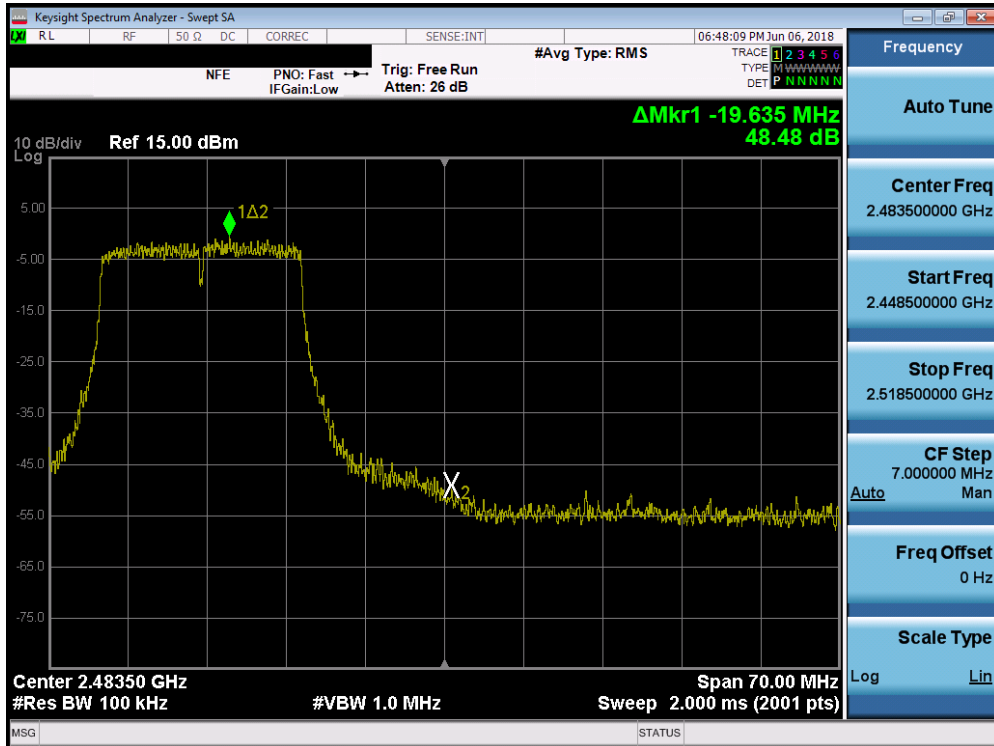


Plot 7-66. Band Edge Plot SISO ANT1 (20MHz 802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 62 of 104

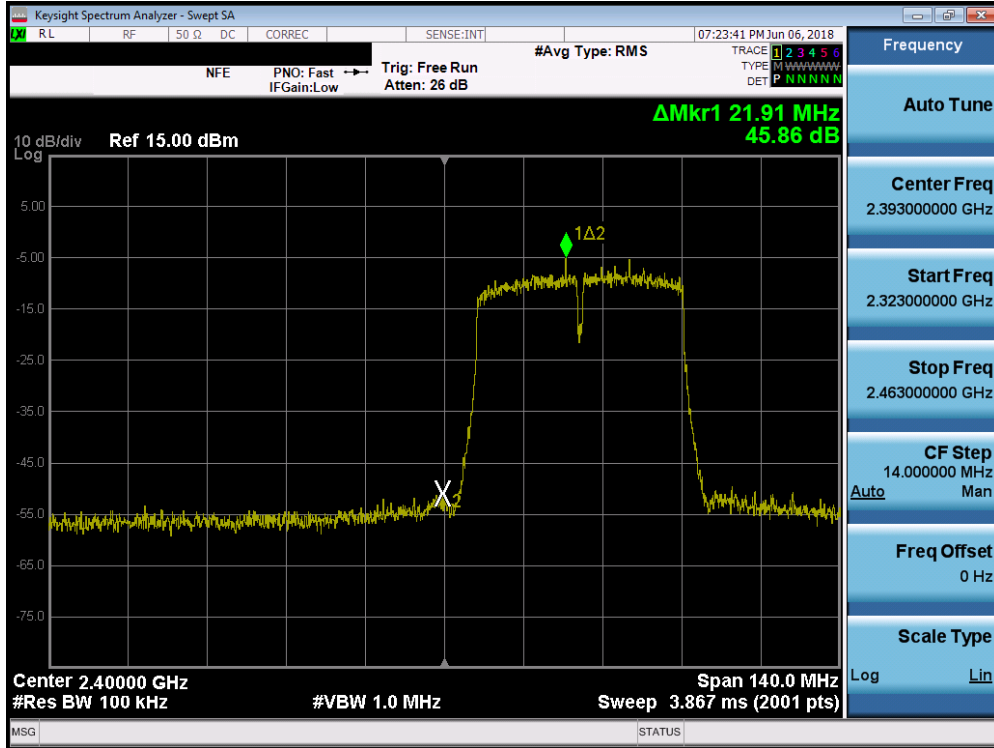


Plot 7-67. Band Edge Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 3)

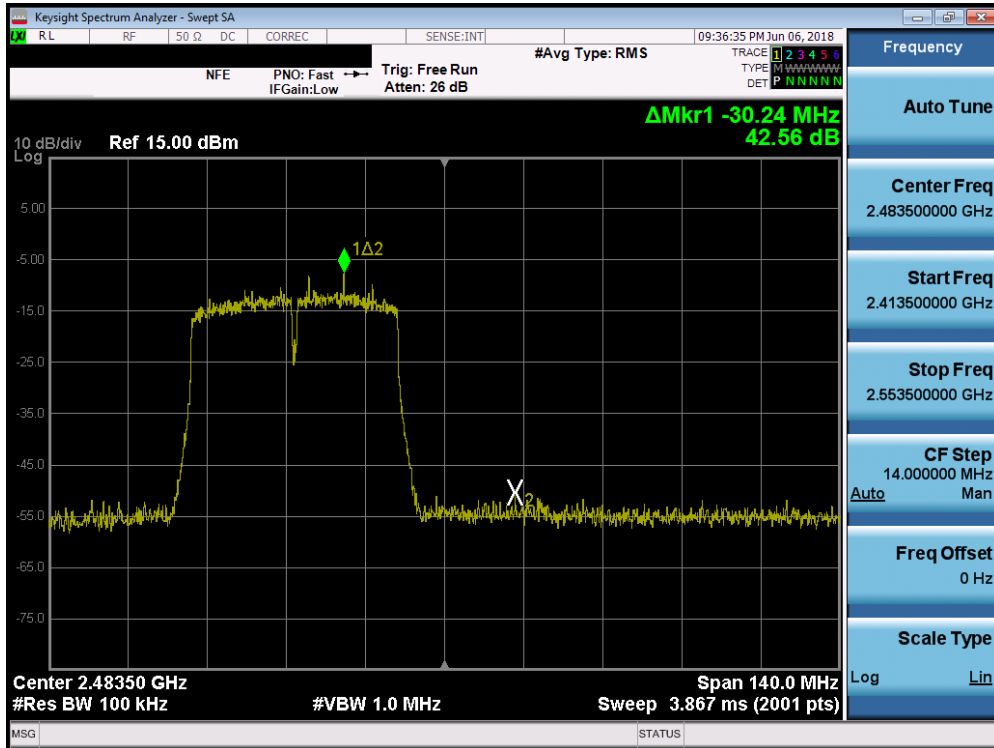


Plot 7-68. Band Edge Plot SISO ANT1 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 63 of 104



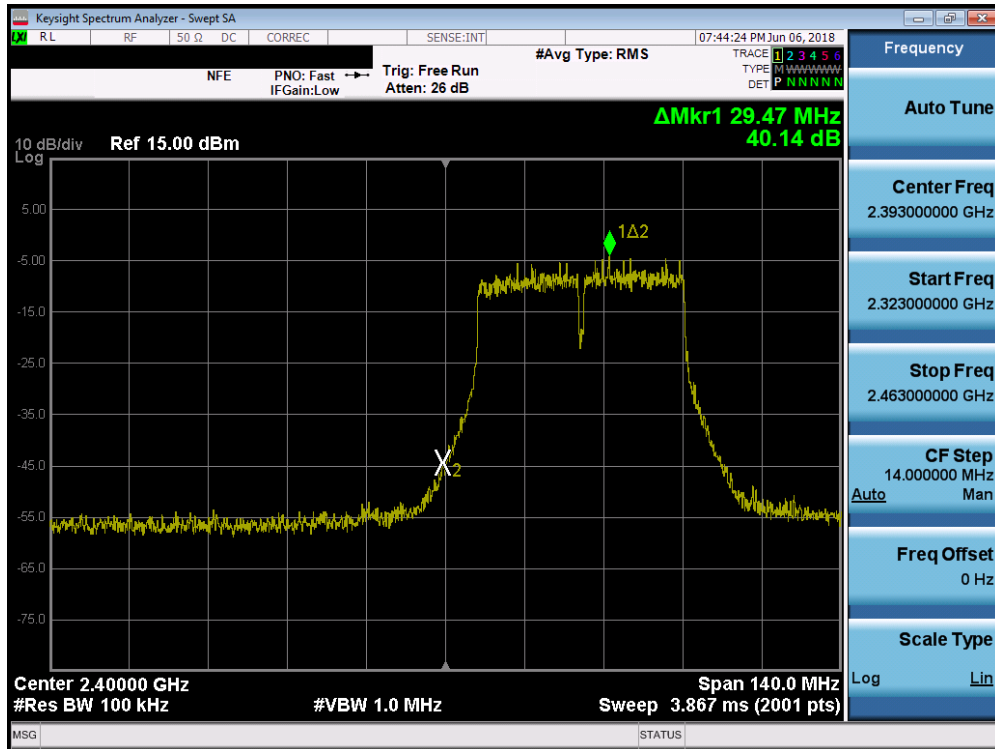

Plot 7-69. Band Edge Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 3)

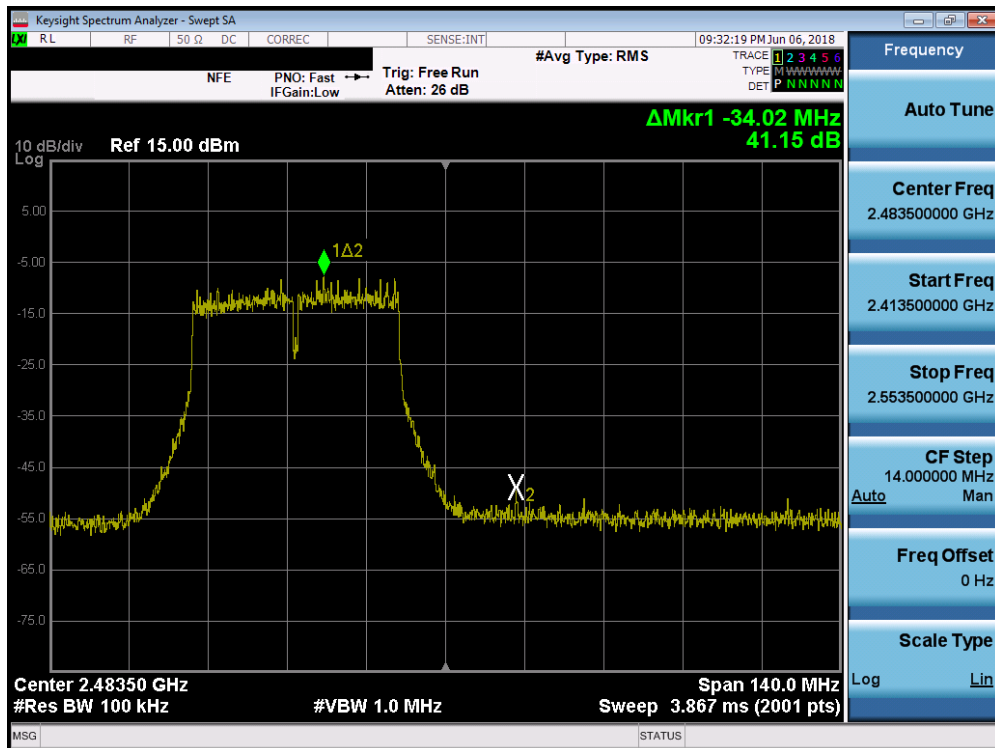


Plot 7-70. Band Edge Plot SISO ANT1 (40MHz 802.11ac (2.4GHz) – Ch. 10)


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 64 of 104




## SISO Antenna-2 Conducted Emissions at the Band Edge

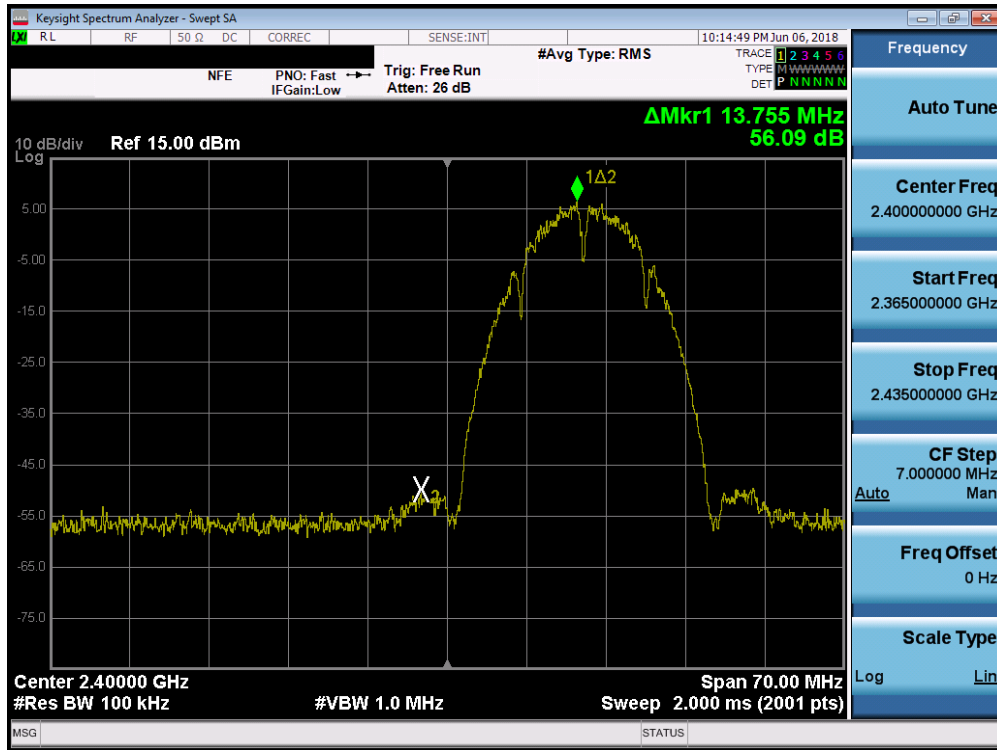


Plot 7-71. Band Edge Plot SISO ANT2 (802.11b – Ch. 1)

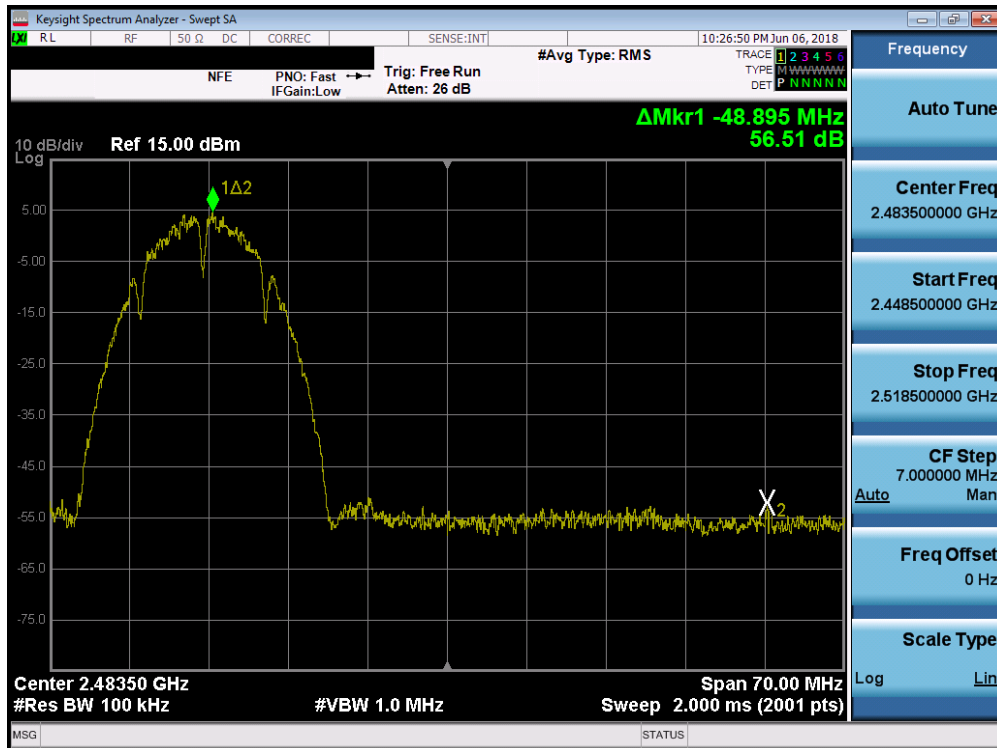


Plot 7-72. Band Edge Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 65 of 104

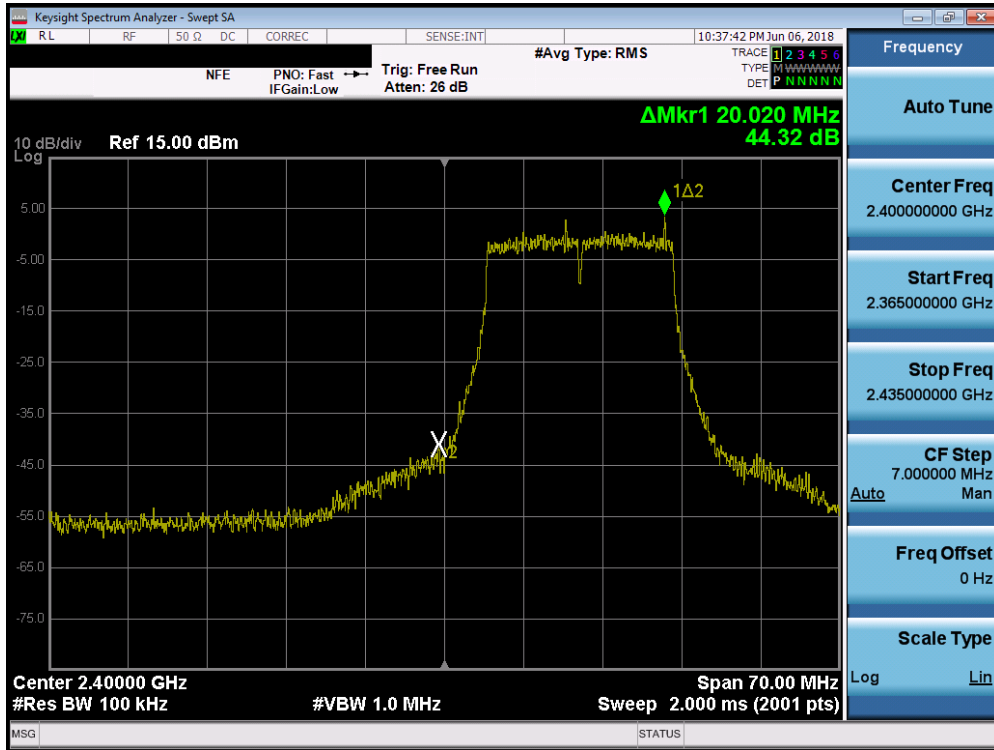


Plot 7-73. Band Edge Plot SISO ANT2 (20MHz 802.11g– Ch. 1)

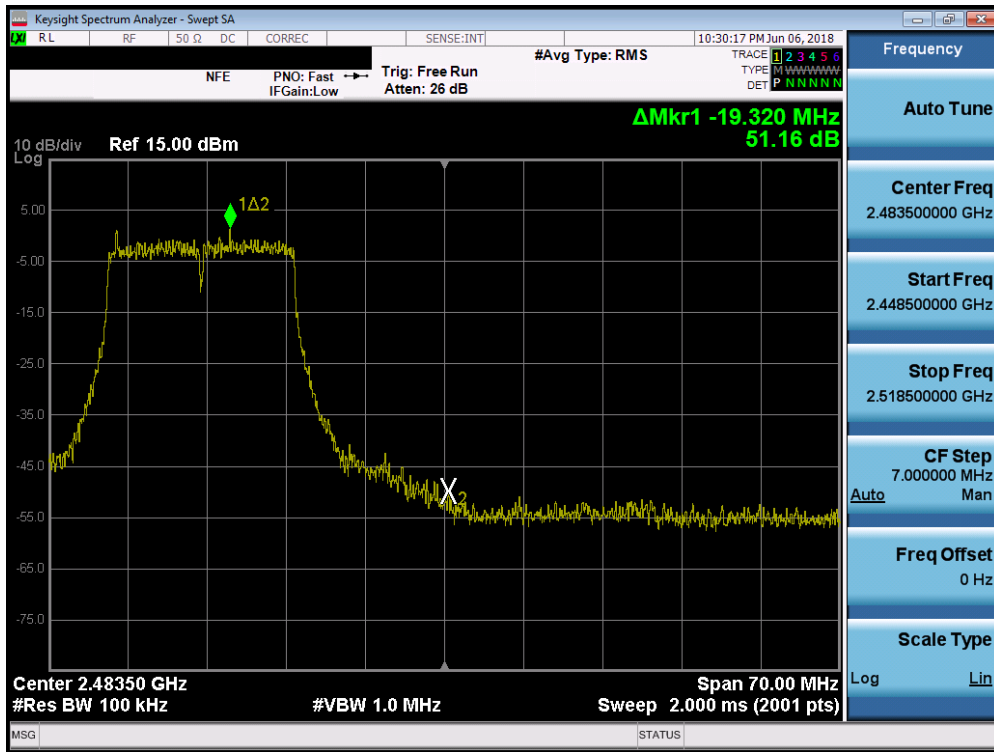


Plot 7-74. Band Edge Plot SISO ANT2 (20MHz 802.11g – Ch. 11)


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 66 of 104

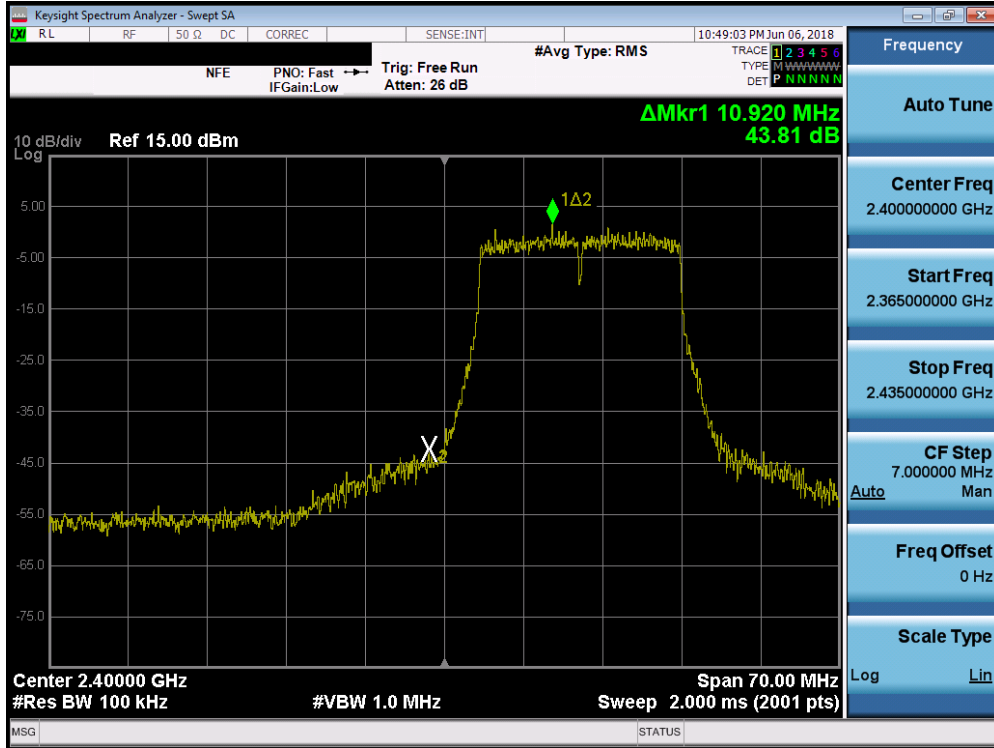


Plot 7-75. Band Edge Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 1)

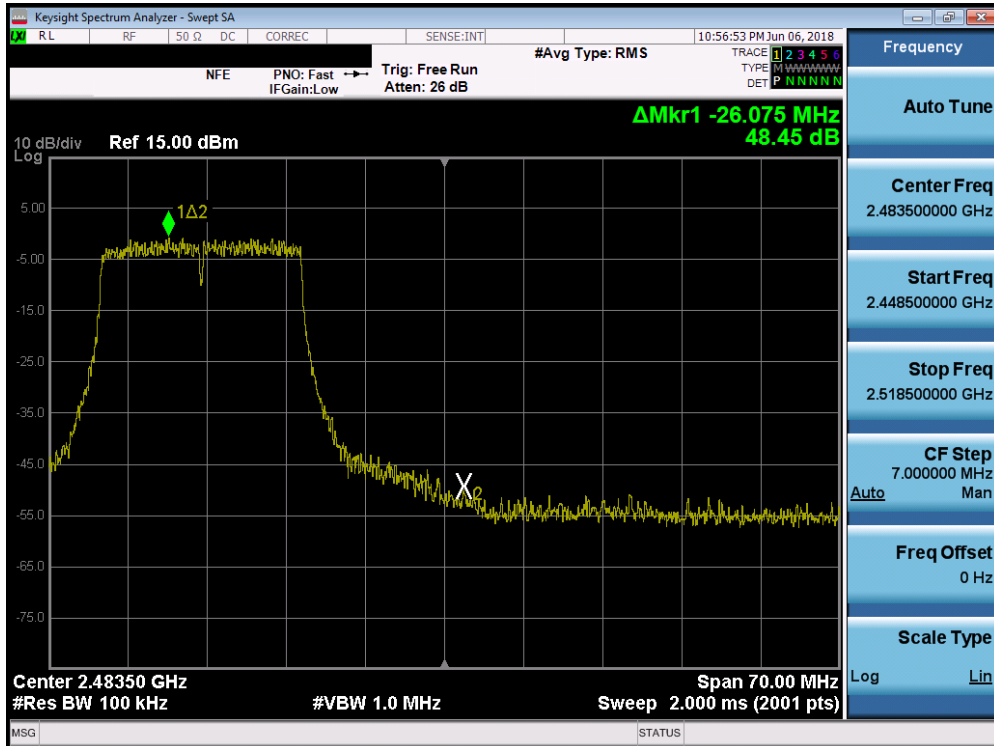


Plot 7-76. Band Edge Plot SISO ANT2 (20MHz 802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 67 of 104

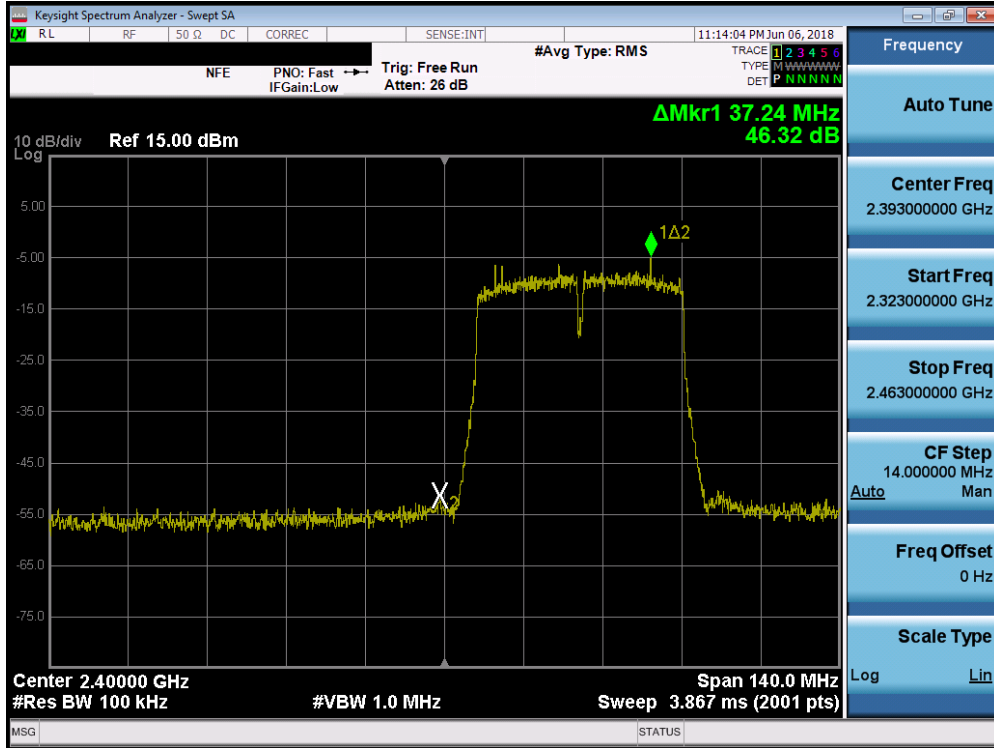


Plot 7-77. Band Edge Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 3)

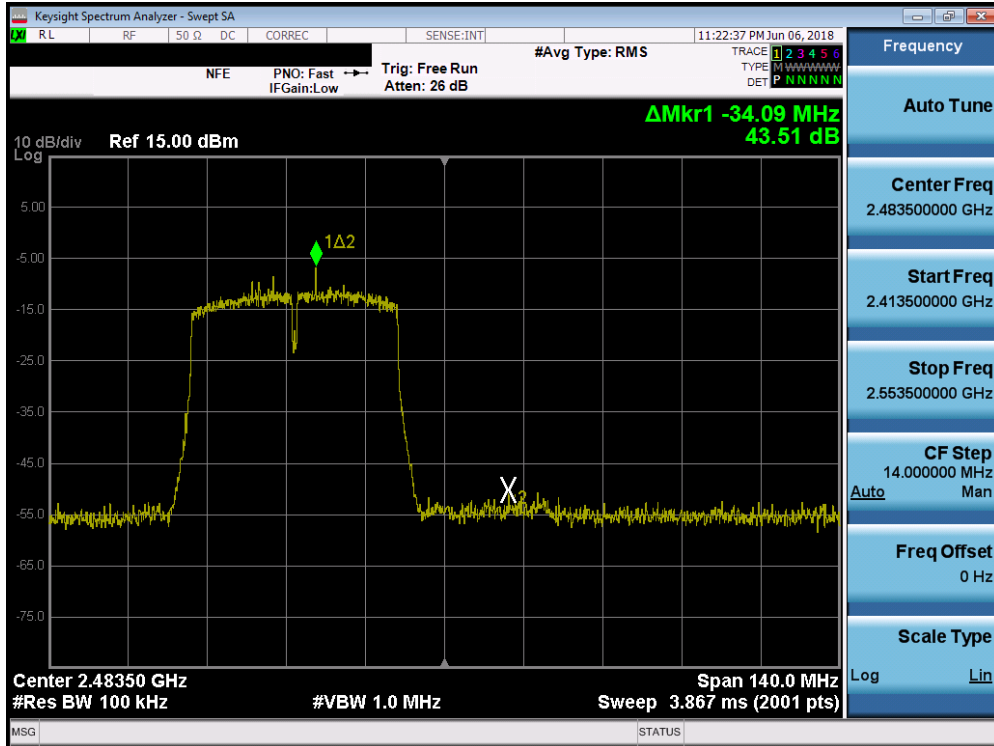


Plot 7-78. Band Edge Plot SISO ANT2 (40MHz 802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 68 of 104

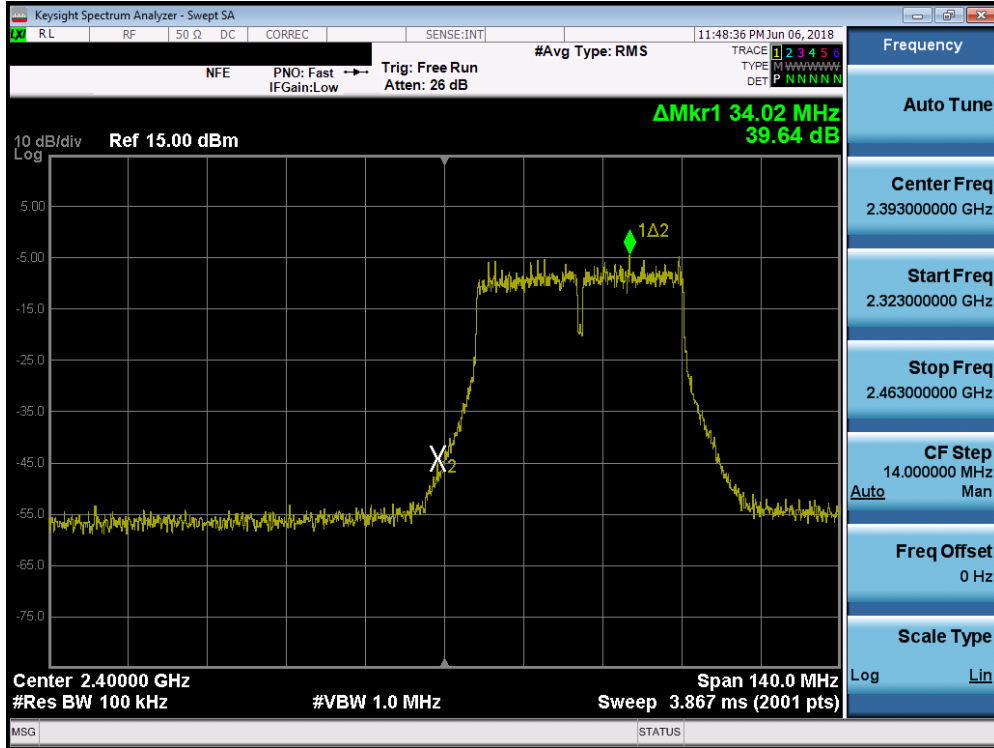

Plot 7-79. Band Edge Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 3)

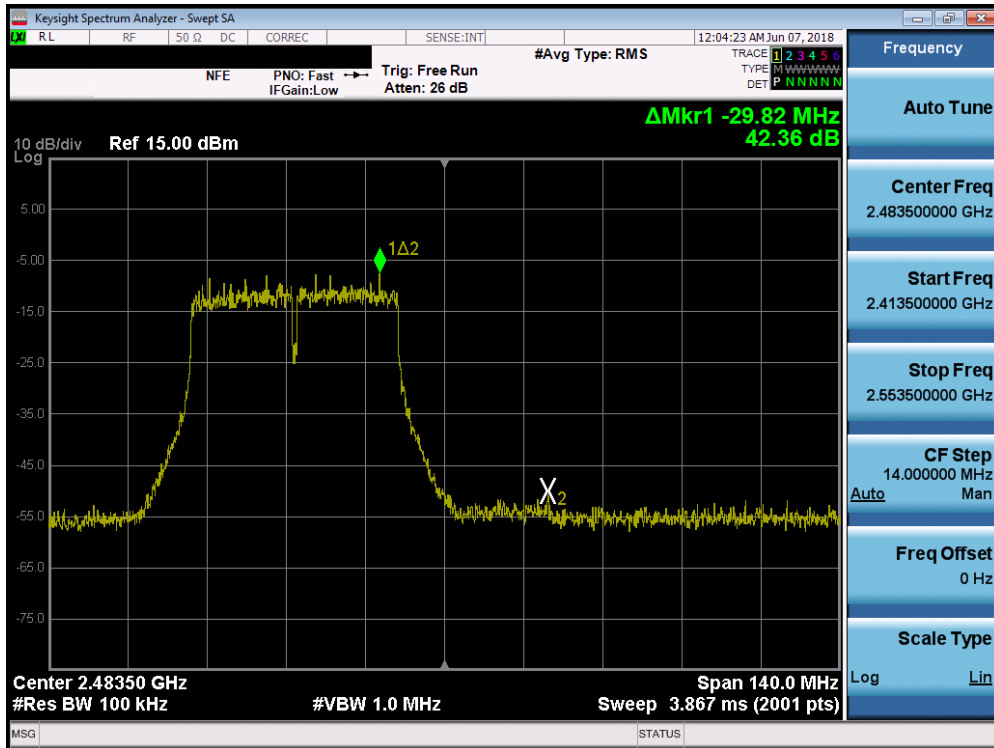

Plot 7-80. Band Edge Plot SISO ANT2 (40MHz 802.11ac (2.4GHz) – Ch. 10)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 69 of 104

## 7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, and “n” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v04.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
 KDB 558074 D01 v04 – Section 11.3  
 ANSI C63.10-2013 – Section 14.3.3  
 KDB 662911 D01 v02r01 – Section E)3)b)

### Test Settings


1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-5. Test Instrument & Measurement Setup**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 70 of 104	


**Test Notes**

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.


<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 71 of 104	



# SISO Antenna-1 Conducted Spurious Emission

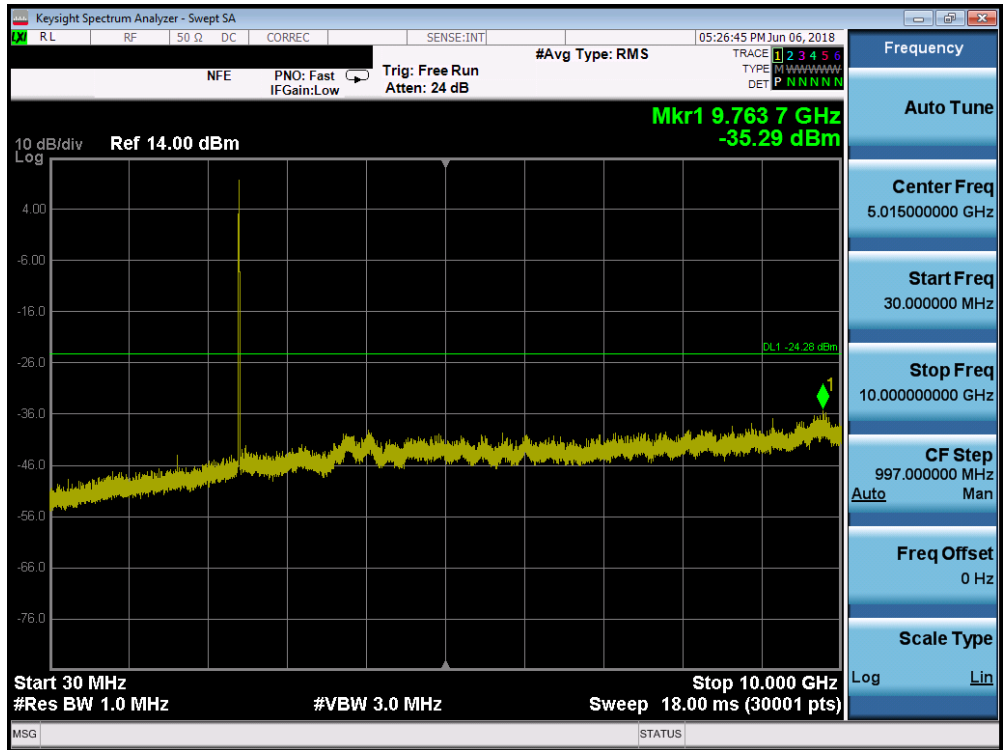


Plot 7-81. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)

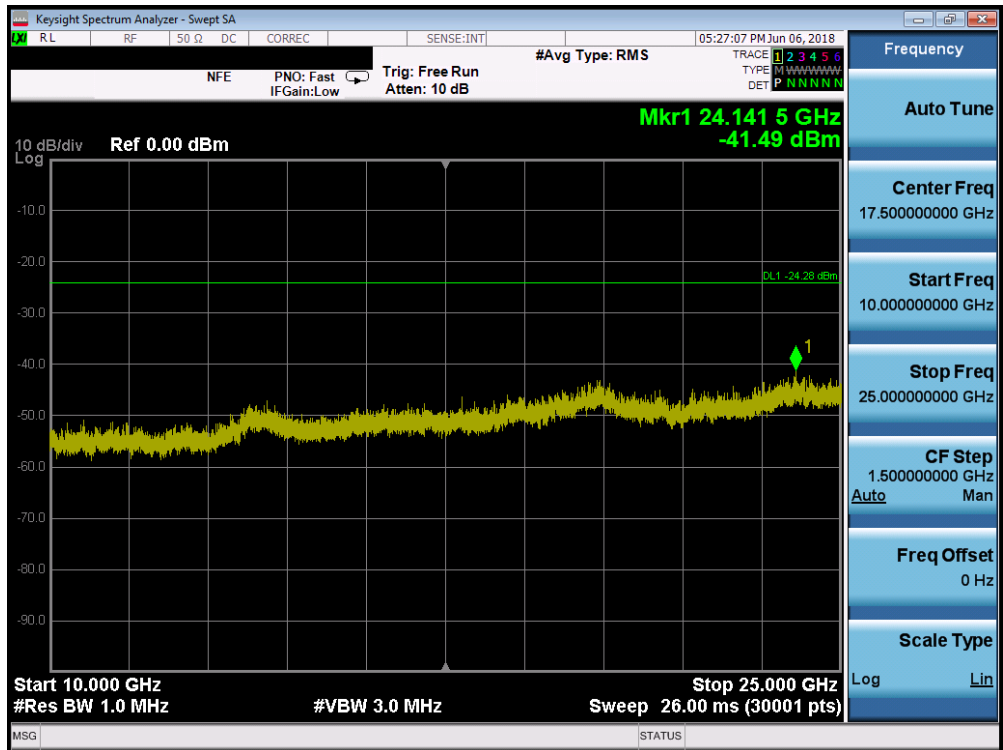


Plot 7-82. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 72 of 104



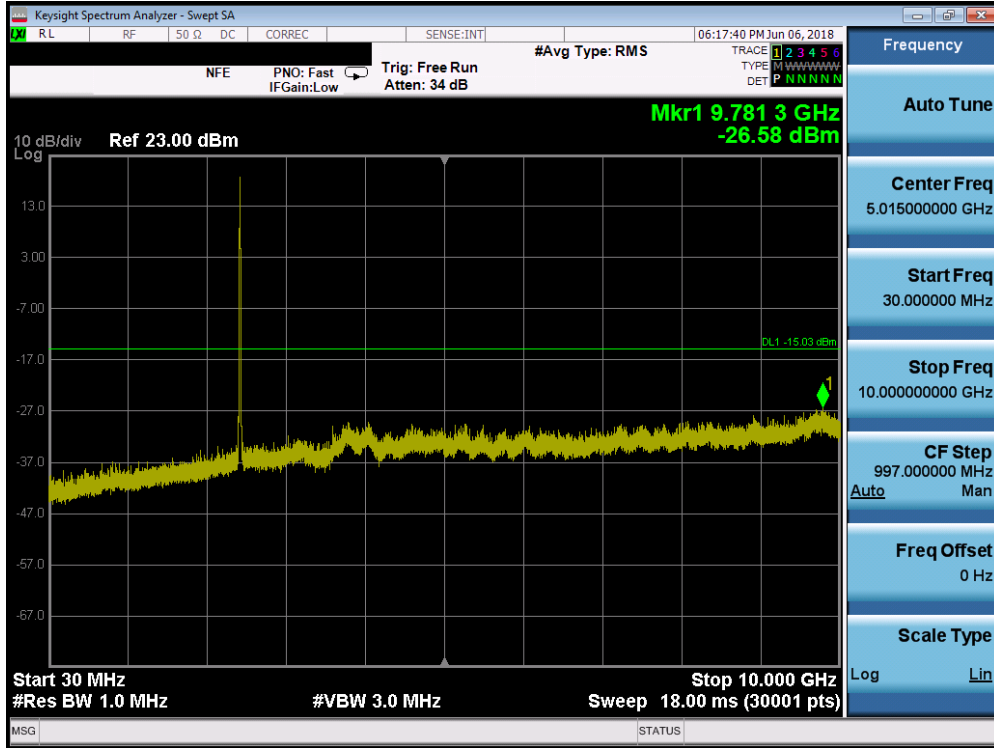


Plot 7-83. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

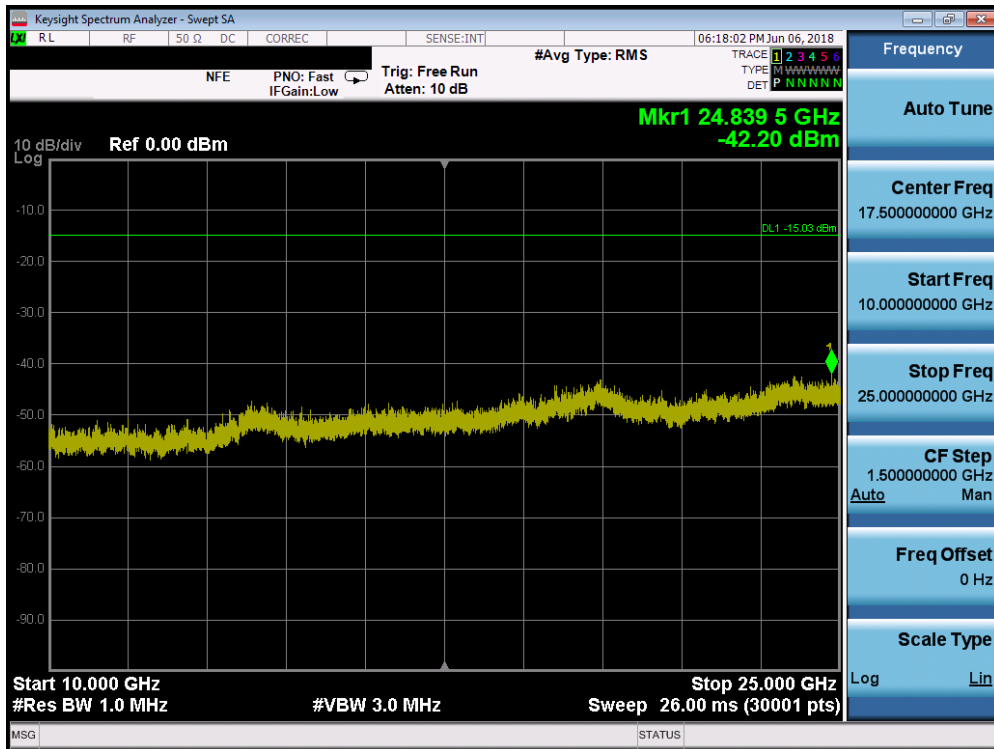


Plot 7-84. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 73 of 104

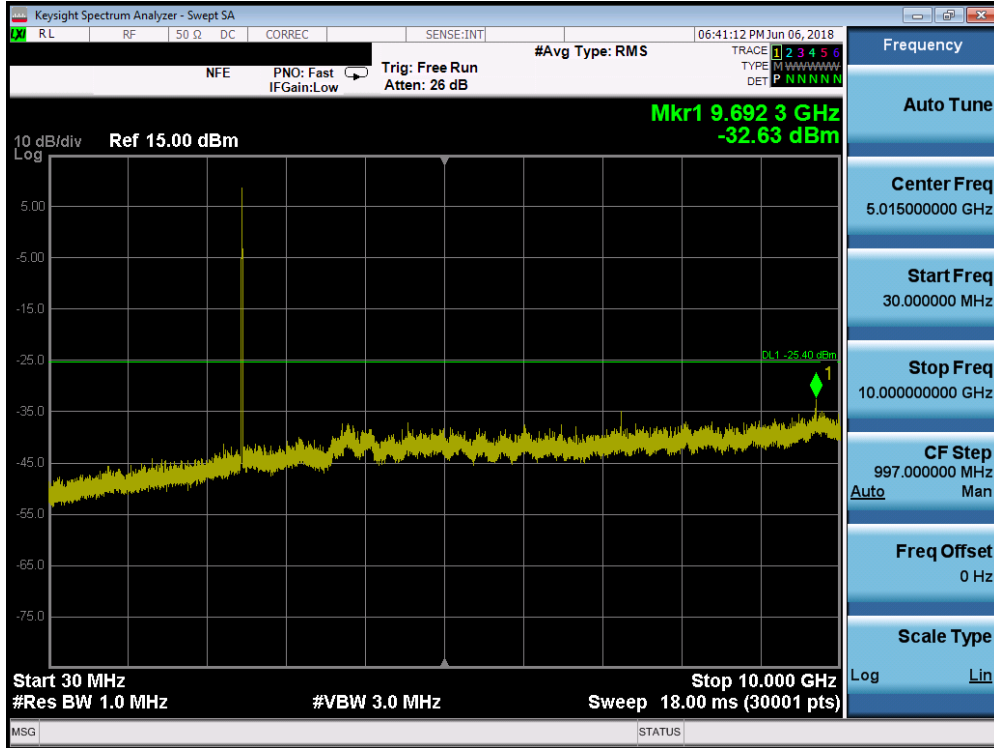


Plot 7-85. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

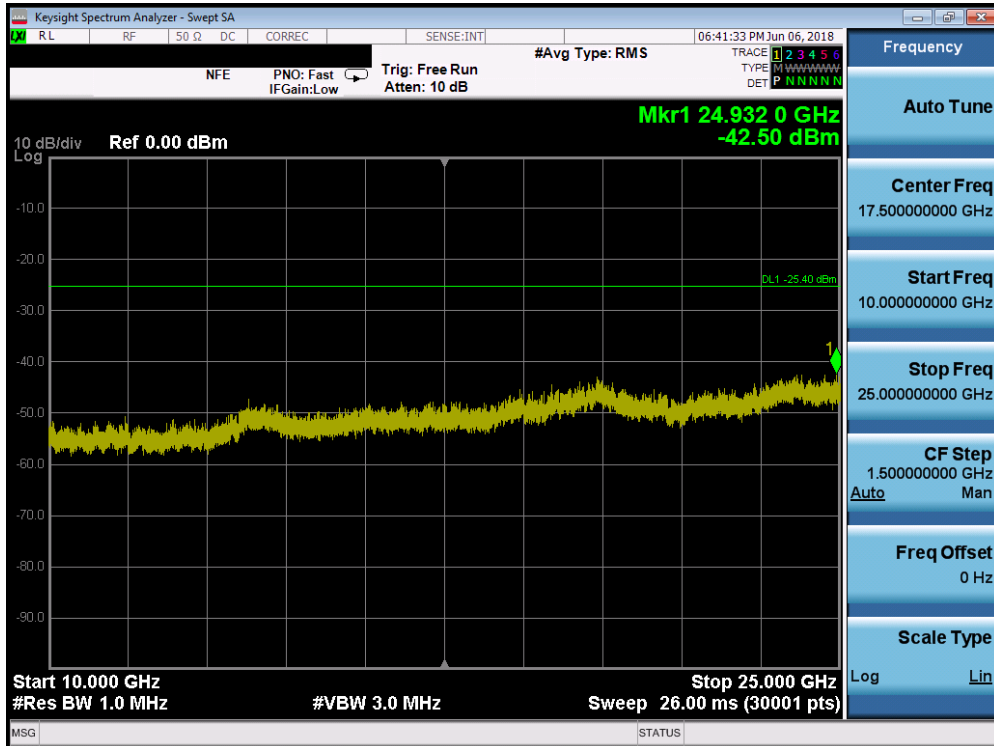


Plot 7-86. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 74 of 104

## SISO Antenna-2 Conducted Spurious Emissions

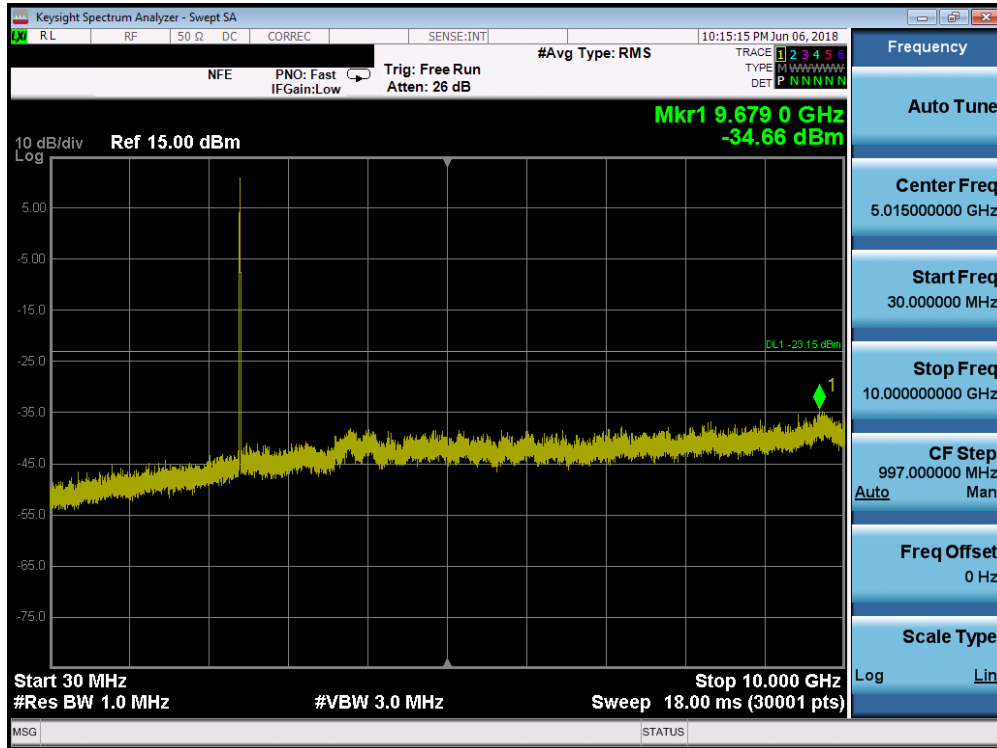


Plot 7-87. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

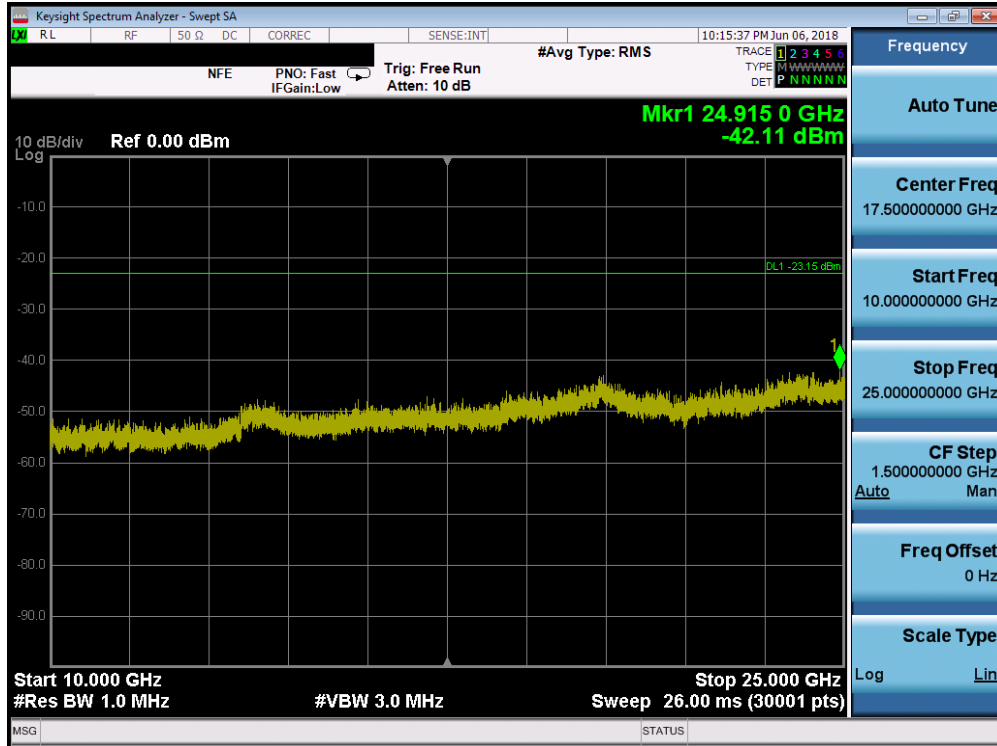


Plot 7-88. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 75 of 104

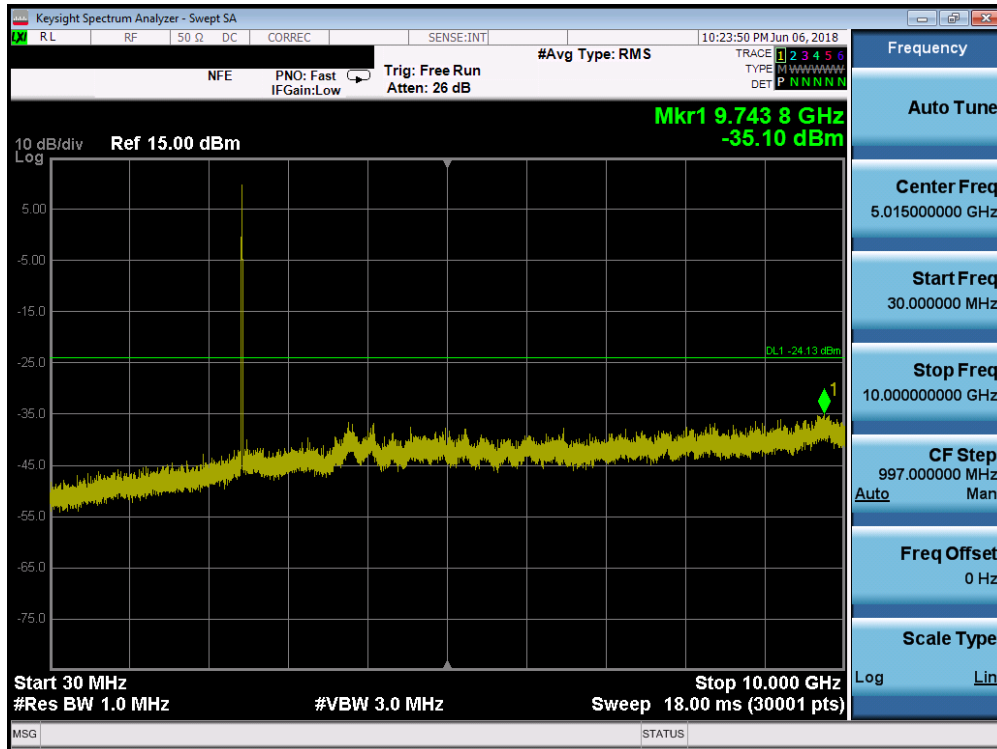


**Plot 7-89. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)**

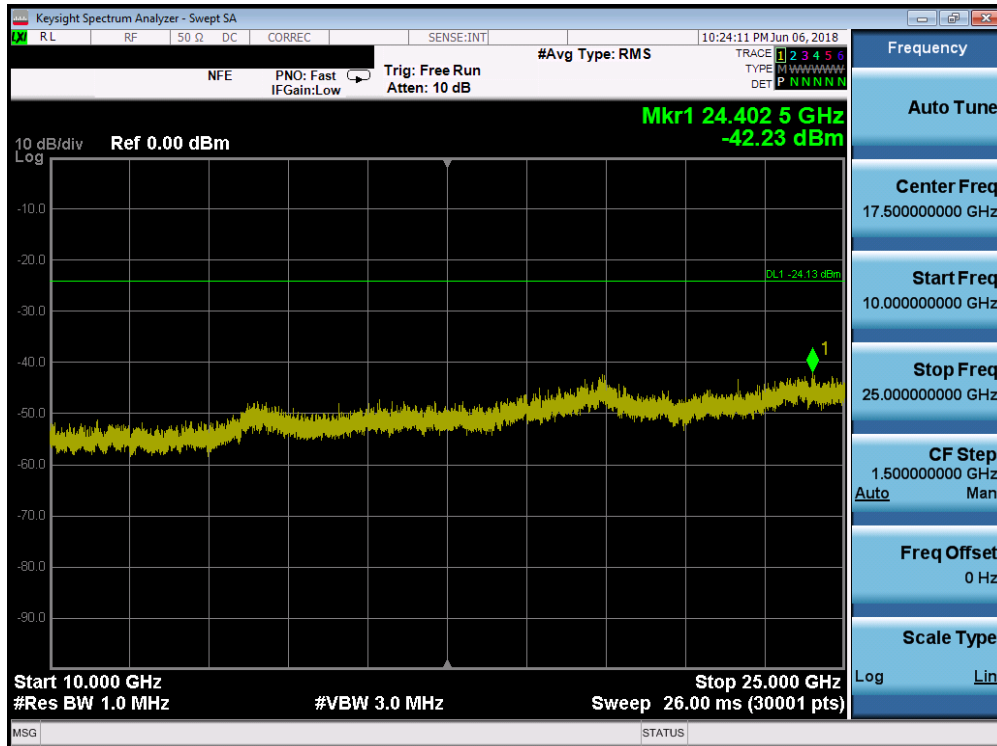


**Plot 7-90. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 76 of 104

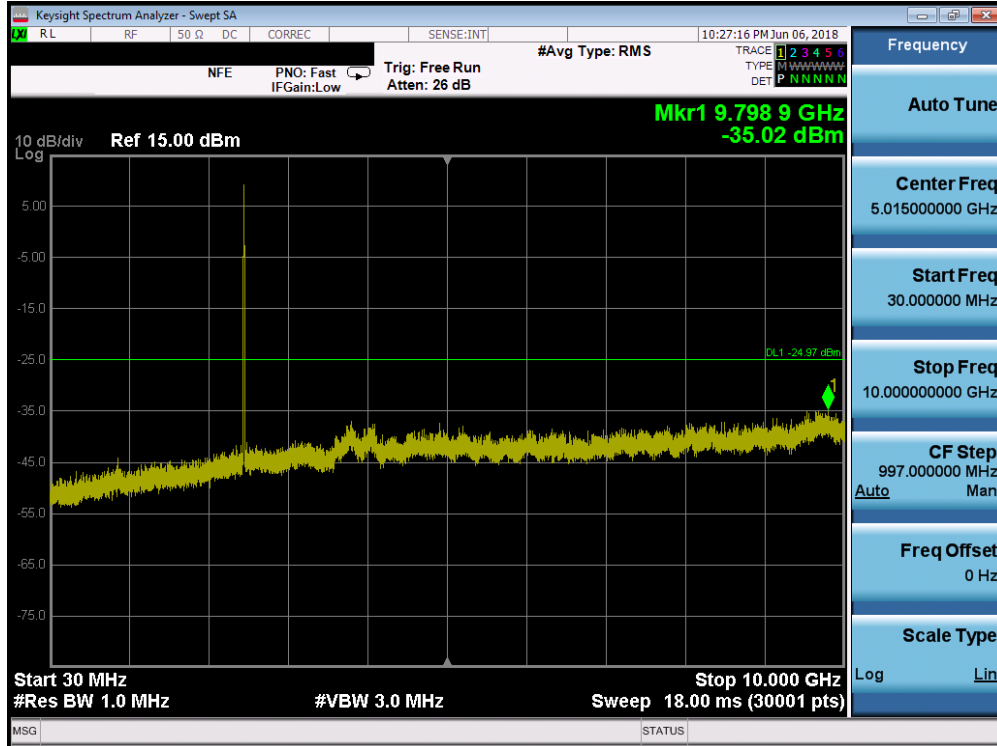

Plot 7-91. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

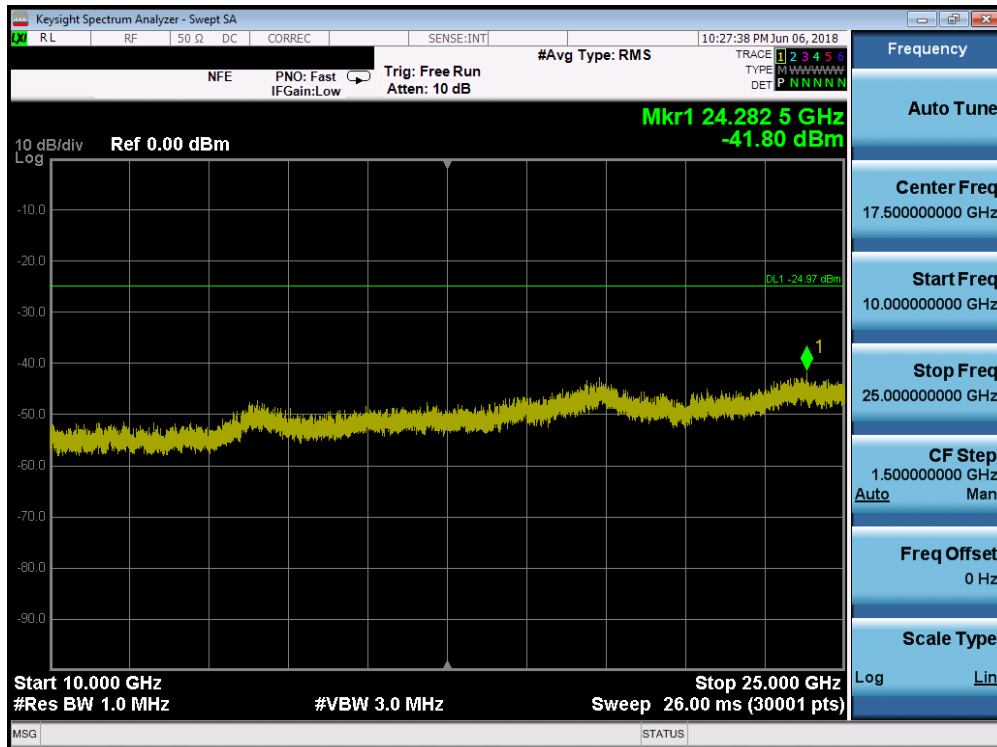

Plot 7-92. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 77 of 104

## 7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-15 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-15. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3  
KDB 558074 D01 v04 – Section 12.1, 12.2.7



### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 78 of 104	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

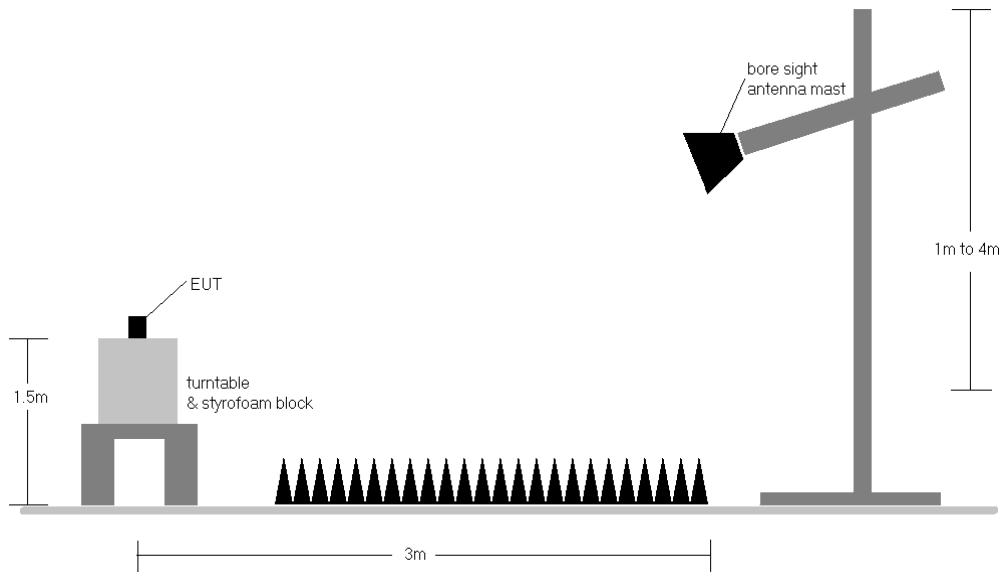

**Figure 7-6. Test Instrument & Measurement Setup**

### Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v04 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-15.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested while powered by an AC power source.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 79 of 104	

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

## **Sample Calculations**


### **Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### **Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:  


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 80 of 104




### 7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

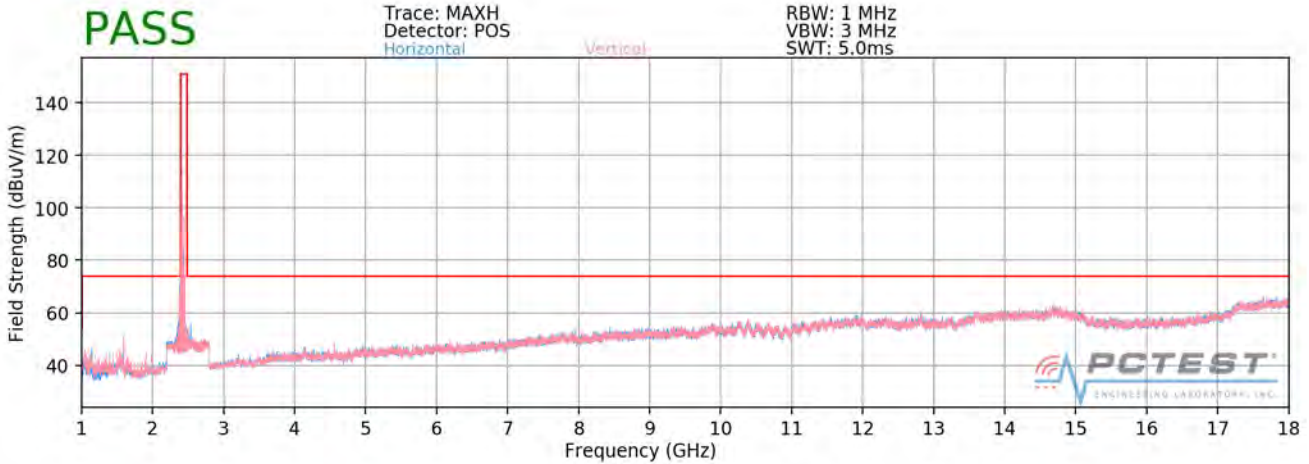

Plot 7-93. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1)

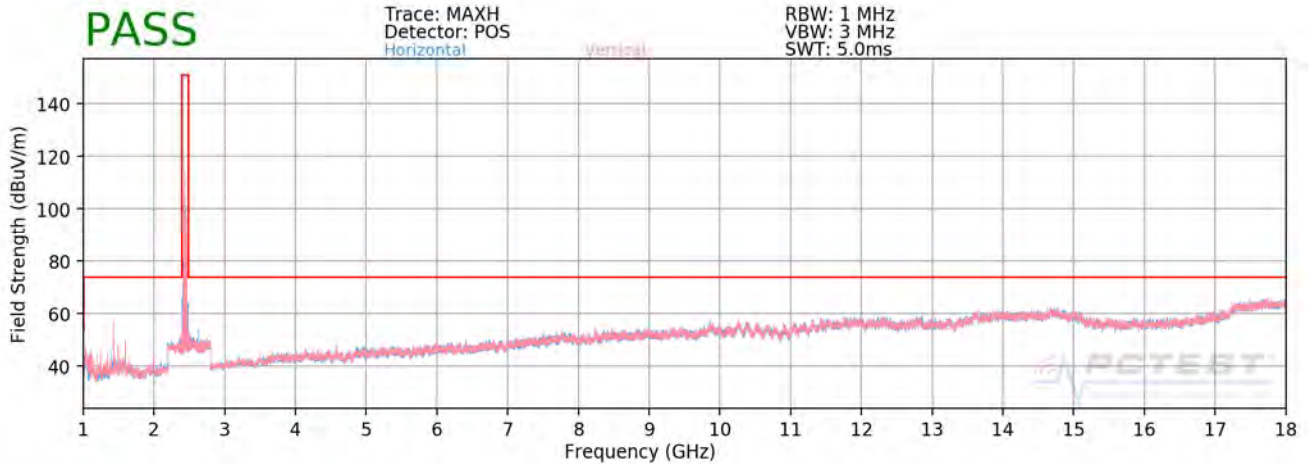


Plot 7-94. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6)

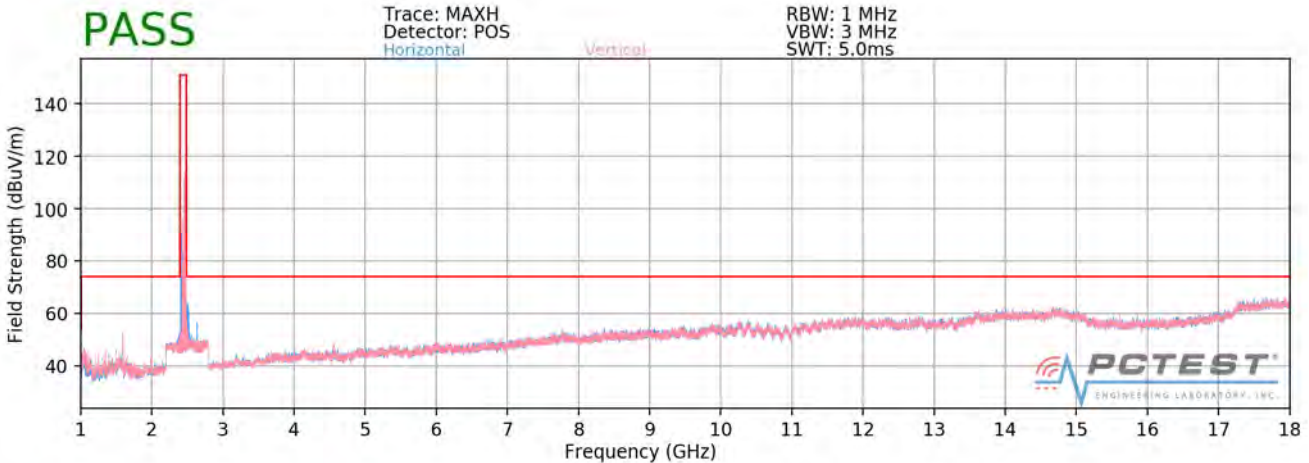

Plot 7-95. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 81 of 104

**SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)**  
§15.209; RSS-Gen [8.9]

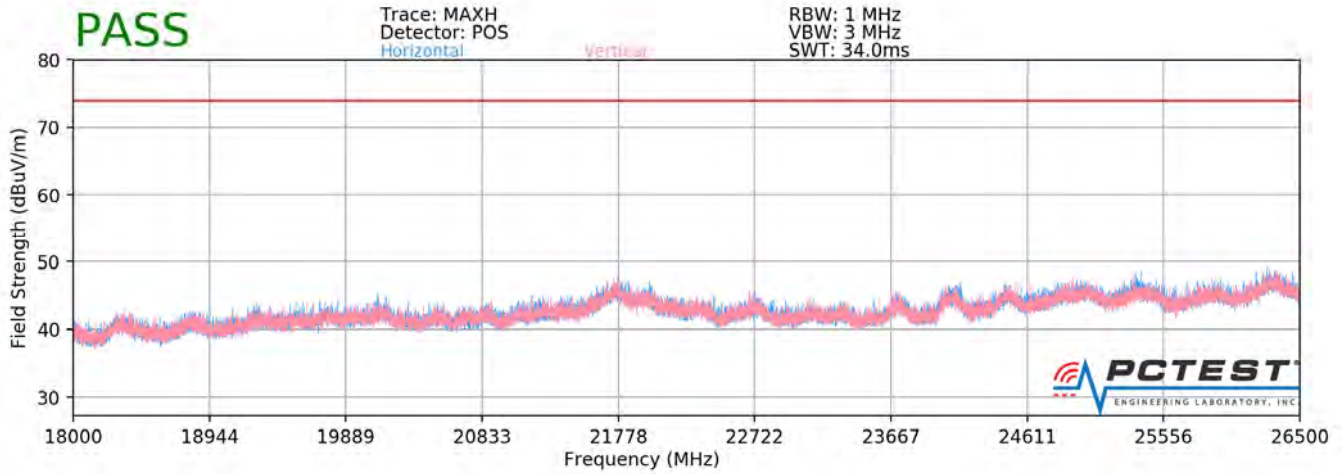

**Plot 7-96. Radiated Spurious Plot above 18GHz SISO ANT1**

FCC ID: A3LETWV525 IC: 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point		Page 82 of 104

## SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	250	303	-76.48	3.41	33.93	53.98	-20.05
4824.00	Peak	H	250	303	-64.59	3.41	45.82	73.98	-28.16
12060.00	Avg	H	-	-	-79.47	15.90	43.43	53.98	-10.55
12060.00	Peak	H	-	-	-67.76	15.90	55.14	73.98	-18.84

**Table 7-16. Radiated Measurements SISO ANT1**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	175	8	-71.20	4.71	40.51	53.98	-13.47
4874.00	Peak	H	175	8	-63.84	4.71	47.87	73.98	-26.11
7311.00	Avg	H	387	289	-77.95	9.16	38.21	53.98	-15.77
7311.00	Peak	H	387	289	-66.84	9.16	49.32	73.98	-24.66
12185.00	Avg	H	-	-	-79.45	15.31	42.86	53.98	-11.12
12185.00	Peak	H	-	-	-67.72	15.31	54.59	73.98	-19.39

**Table 7-17. Radiated Measurements SISO ANT1**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 83 of 104	


Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	272	207	-76.13	4.07	34.94	53.98	-19.03
4924.00	Peak	H	272	207	-65.72	4.07	45.35	73.98	-28.62
7386.00	Avg	H	-	-	-78.28	9.11	37.83	53.98	-16.15
7386.00	Peak	H	-	-	-66.81	9.11	49.30	73.98	-24.68
12310.00	Avg	H	-	-	-79.53	15.55	43.02	53.98	-10.96
12310.00	Peak	H	-	-	-67.96	15.55	54.59	73.98	-19.39


**Table 7-18. Radiated Measurements SISO ANT1**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 84 of 104


**7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements**  
§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

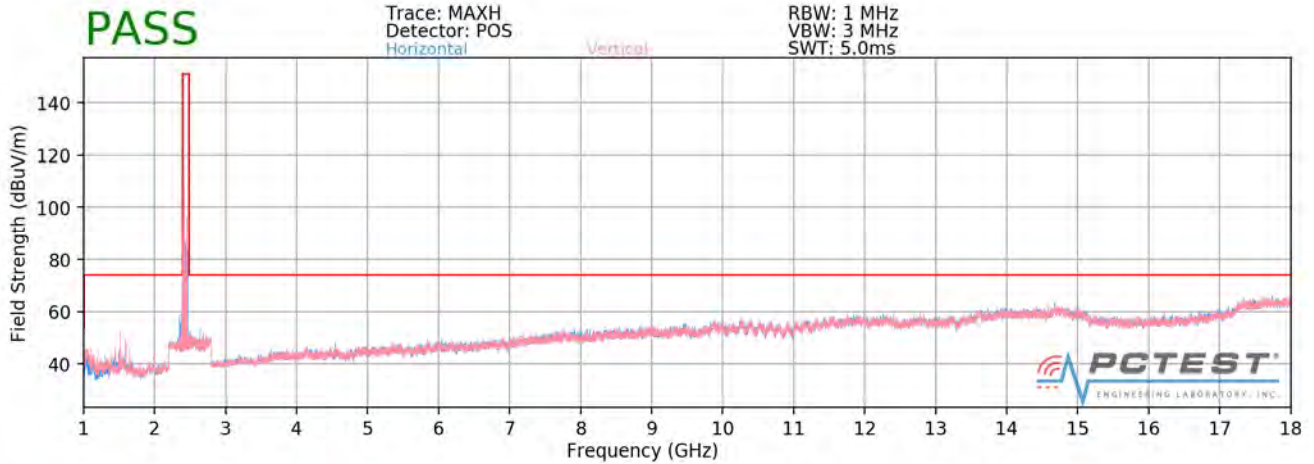


**Plot 7-97. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)**

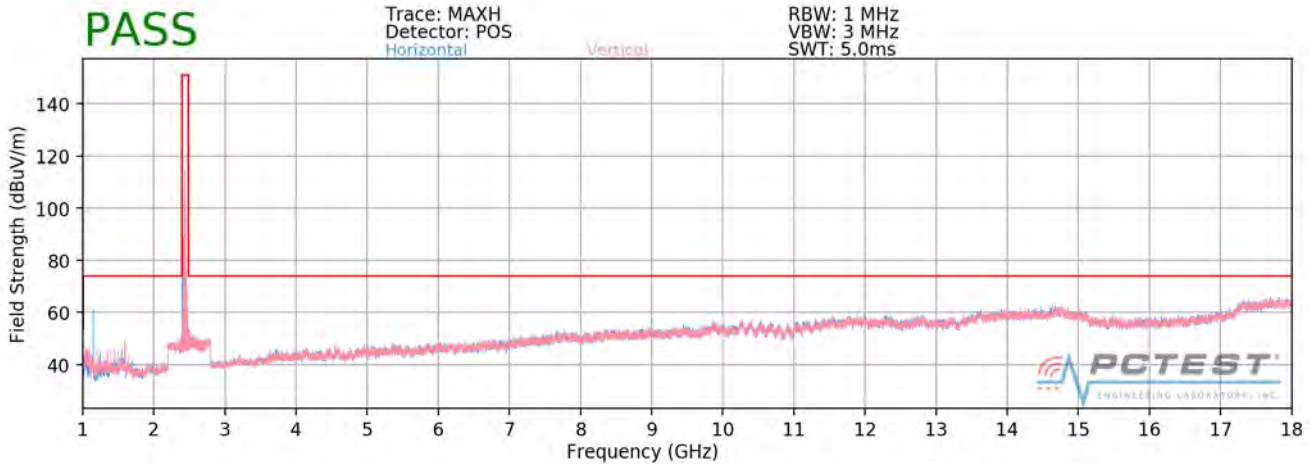

**Plot 7-98. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)**

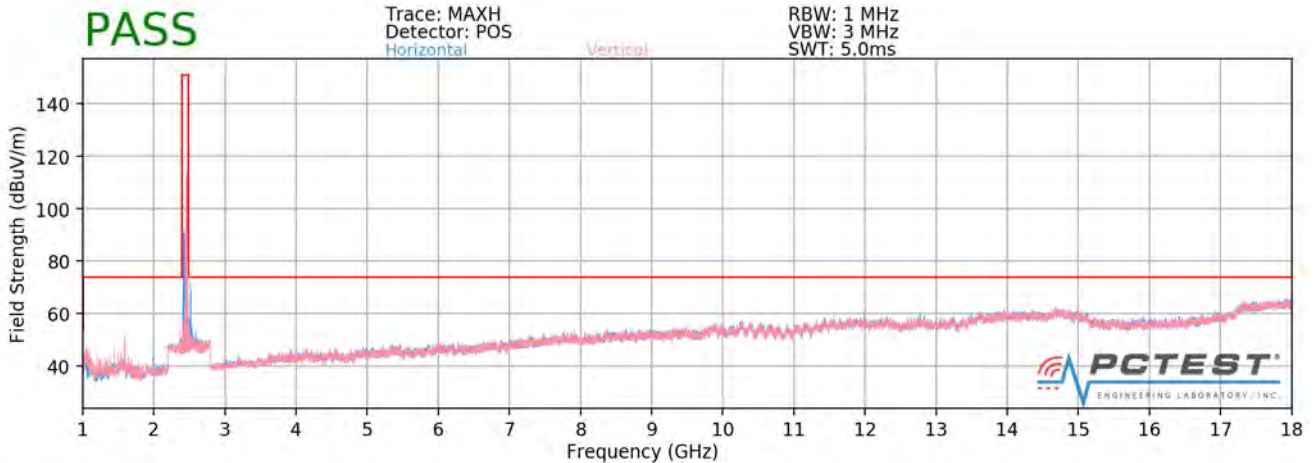


**Plot 7-99. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)**


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 85 of 104



**SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)**  
§15.209; RSS-Gen [8.9]

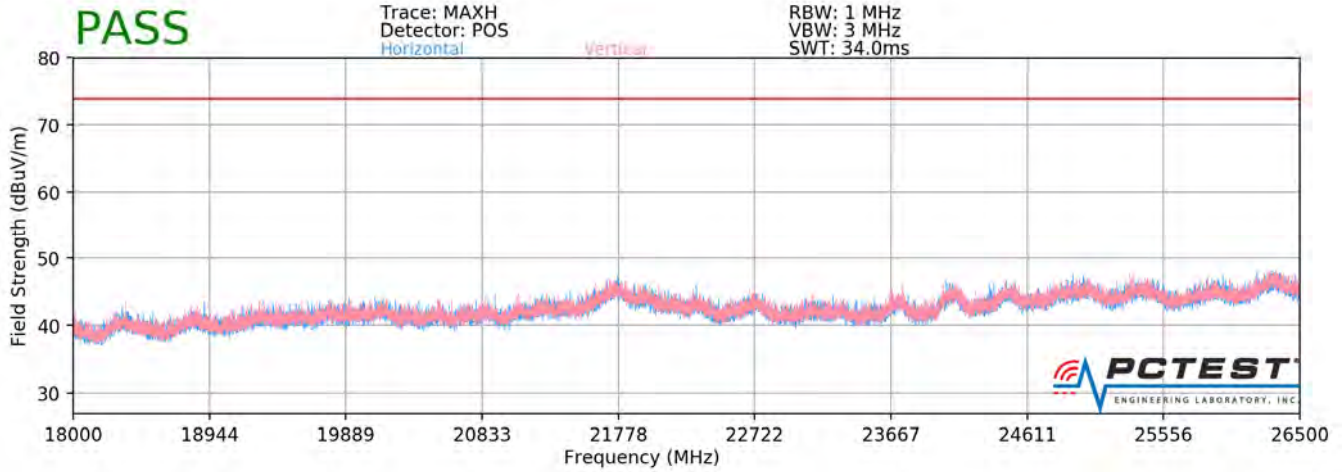

**Plot 7-100. Radiated Spurious Plot above 18GHz SISO ANT2**

FCC ID: A3LETWV525 IC: 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point		Page 86 of 104

## SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	281	221	-73.93	3.41	36.48	53.98	-17.50
4824.00	Peak	H	281	221	-64.59	3.41	45.82	73.98	-28.16
12060.00	Avg	H	-	-	-79.48	15.90	43.42	53.98	-10.56
12060.00	Peak	H	-	-	-68.01	15.90	54.89	73.98	-19.09

**Table 7-19. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	385	210	-73.05	4.71	38.66	53.98	-15.32
4874.00	Peak	H	385	210	-64.37	4.71	47.34	73.98	-26.64
7311.00	Avg	H	-	-	-78.29	9.16	37.87	53.98	-16.11
7311.00	Peak	H	-	-	-66.34	9.16	49.82	73.98	-24.16
12185.00	Avg	H	-	-	-79.52	15.31	42.79	53.98	-11.19
12185.00	Peak	H	-	-	-67.04	15.31	55.27	73.98	-18.71

**Table 7-20. Radiated Measurements SISO ANT2**

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 87 of 104

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	318	236	-73.70	4.07	37.37	53.98	-16.60
4924.00	Peak	H	318	236	-64.32	4.07	46.75	73.98	-27.22
7386.00	Avg	H	-	-	-78.44	9.11	37.67	53.98	-16.31
7386.00	Peak	H	-	-	-67.07	9.11	49.04	73.98	-24.94
12310.00	Avg	H	-	-	-79.62	15.55	42.93	53.98	-11.05
12310.00	Peak	H	-	-	-68.08	15.55	54.47	73.98	-19.51

**Table 7-21. Radiated Measurements SISO ANT2**


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 88 of 104	




### 7.7.3 SISO Antenna-1 Radiated Restricted Band Edge Measurements (20MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

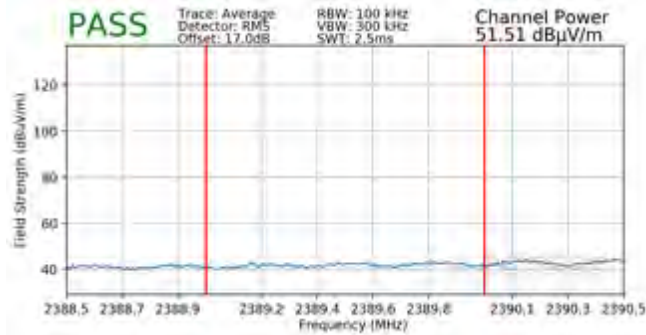

**Plot 7-101. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**

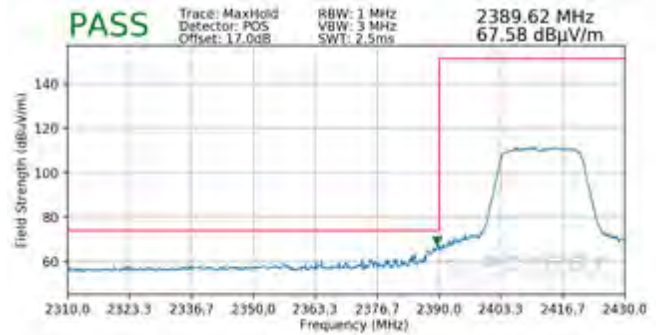


**Plot 7-102. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11



**Plot 7-103. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

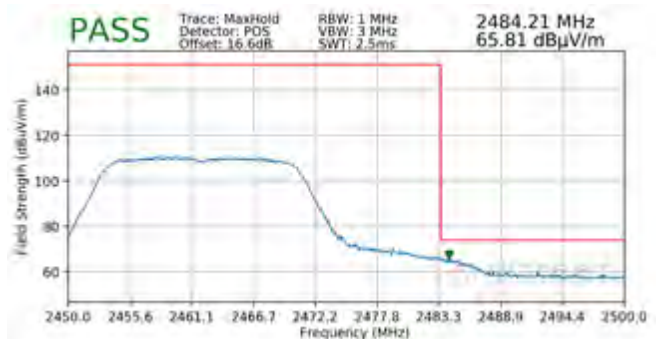

**Plot 7-104. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

**Note:**


A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 89 of 104


### 7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements (40MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2422MHz
Channel:	3

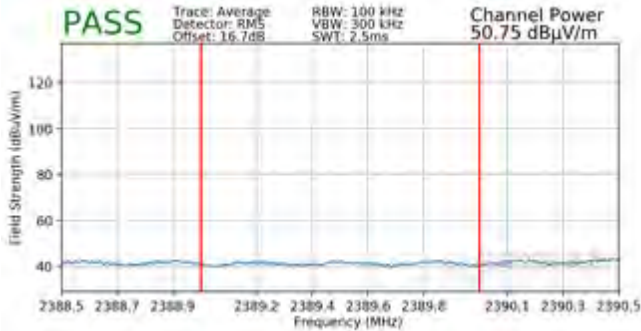

**Plot 7-105. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**

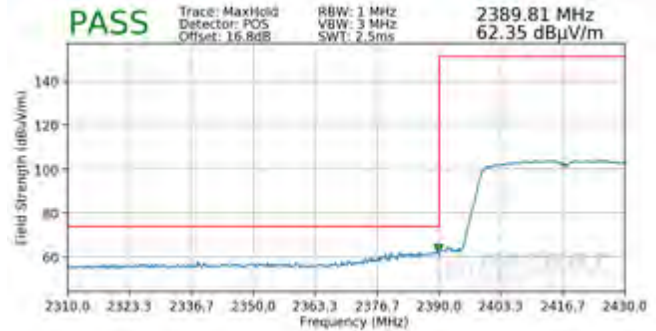

**Plot 7-106. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10



**Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**



**Plot 7-108. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

**Note:**

A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 90 of 104

### 7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements (20MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1



**Plot 7-109. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)**



**Plot 7-110. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)**

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11



**Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**



**Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

**Note:**

A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 91 of 104



### 7.7.6 SISO Antenna-2 Radiated Restricted Band Edge Measurements (40MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2422MHz
Channel:	3




**Plot 7-113. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)**




**Plot 7-114. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)**

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

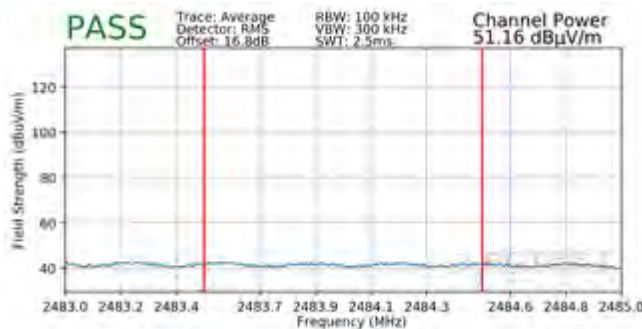

**Plot 7-115. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

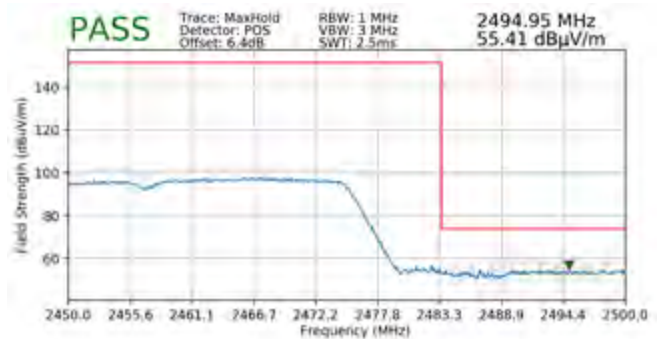

**Plot 7-116. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

**Note:**


A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 92 of 104


### 7.7.7 MIMO Radiated Restricted Band Edge Measurements (20MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

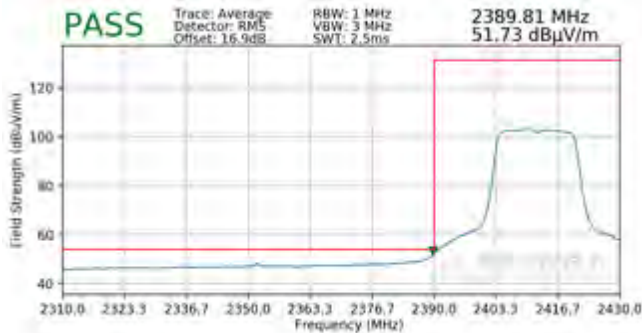


**Plot 7-117. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

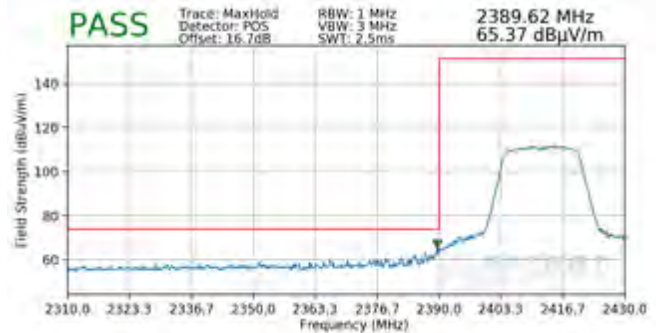


**Plot 7-118. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

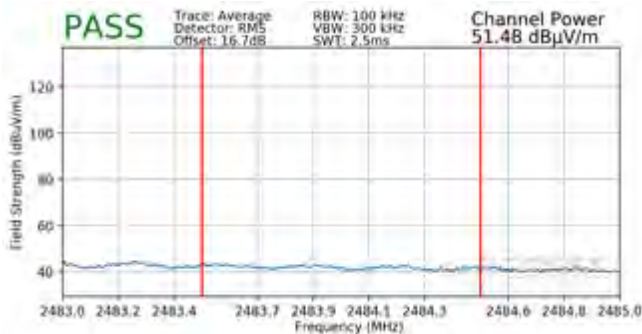

**Plot 7-119. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

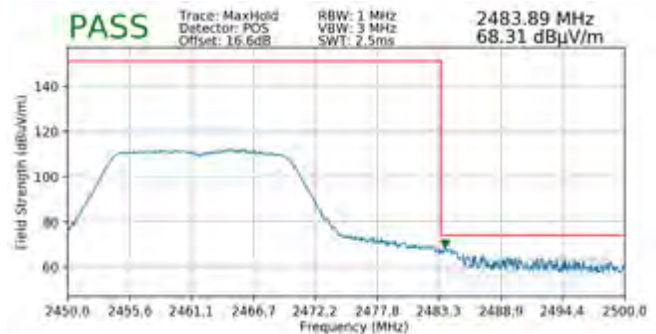

**Plot 7-120. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

**Note:**


A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 93 of 104


### 7.7.8 MIMO Radiated Restricted Band Edge Measurements (40MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

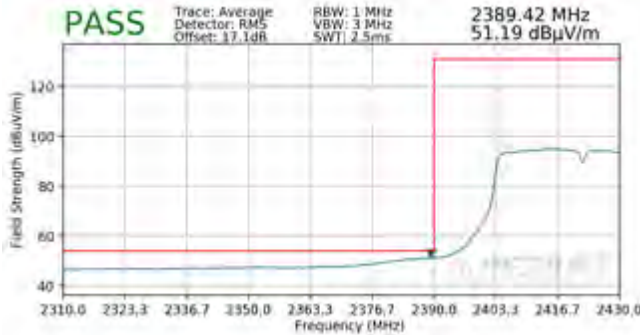

**Plot 7-121. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

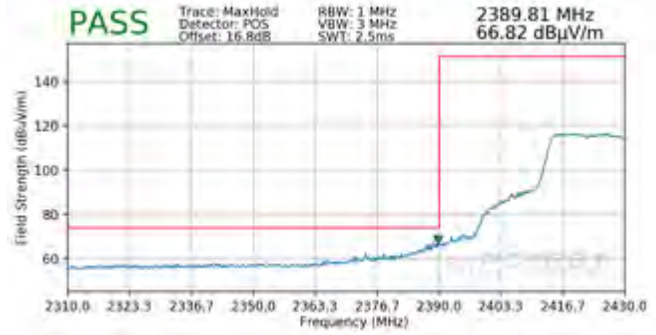


**Plot 7-122. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10



**Plot 7-123. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

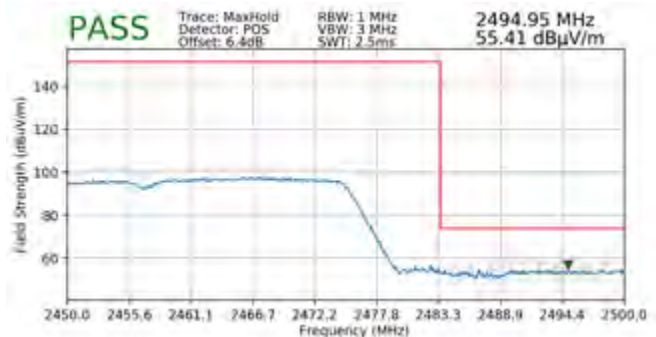

**Plot 7-124. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

**Note:**

A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 94 of 104



### 7.7.9 CDD Radiated Restricted Band Edge Measurements (20MHz BW) §15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11g (20MHz)
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1




**Plot 7-125. Radiated Restricted Lower Band Edge Measurement CDD (Average)**



**Plot 7-126. Radiated Restricted Lower Band Edge Measurement CDD (Peak)**

Worst Case Mode:	802.11g (20MHz)
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

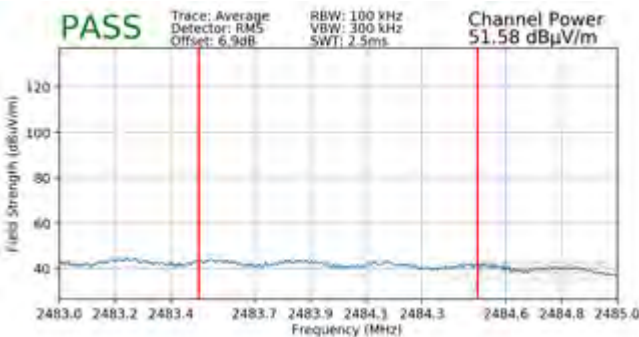

**Plot 7-127. Radiated Restricted Lower Band Edge Measurement CDD (Average)**



**Plot 7-128. Radiated Restricted Lower Band Edge Measurement CDD (Peak)**

**Note:**

A channel integration method was used to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v03r05 Section 13.3.3, a measurement was performed using a RBW of 100kHz at the 2483.5MHz band edge. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz. The worst case emission at 2483.5-2484.5MHz is reported.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02-A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 95 of 104

## 7.8 Radiated Spurious Emissions Measurements – Below 1GHz §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-22 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-22. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 96 of 104	




**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

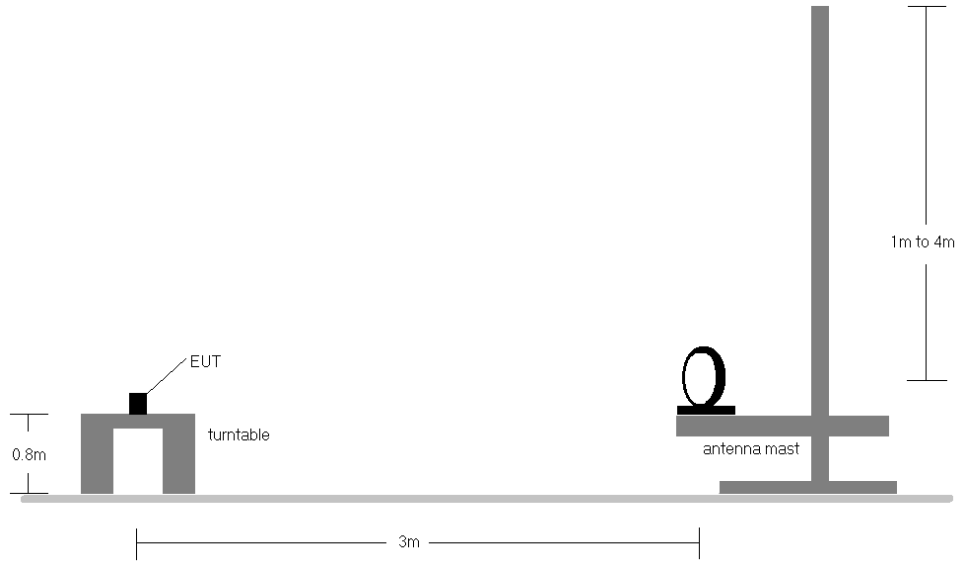

**Figure 7-7. Radiated Test Setup < 30Mhz**

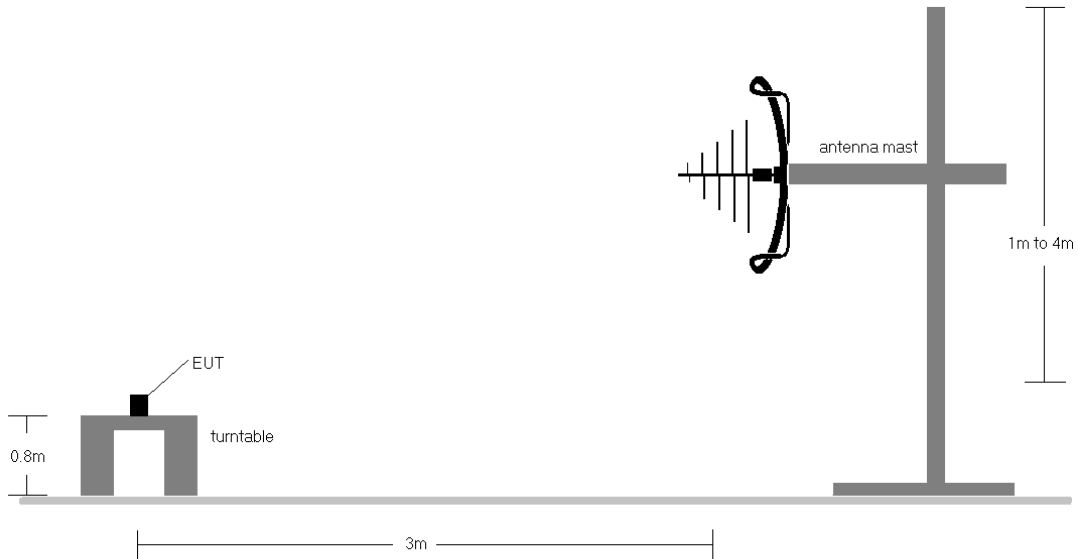


**Figure 7-8. Radiated Test Setup < 1GHz**


FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 97 of 104

**Test Notes**


1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-22.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested while powered by an AC power source.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point	Page 98 of 104

**Radiated Spurious Emissions Measurements (Below 1GHz)**  
**§15.209; RSS-Gen [8.9]**

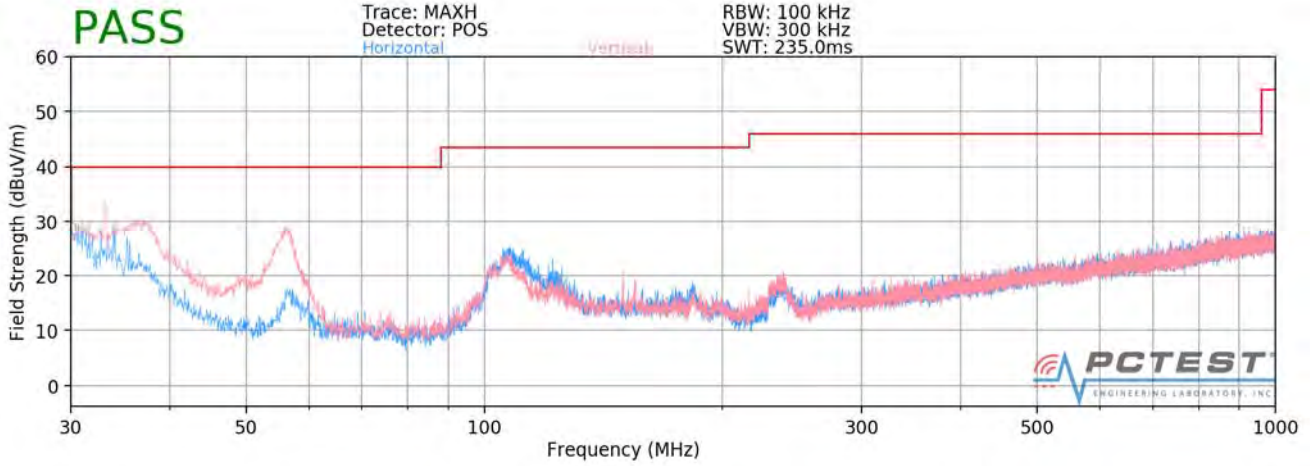

**Plot 7-129. Radiated Spurious Plot below 1GHz SISO ANT1**

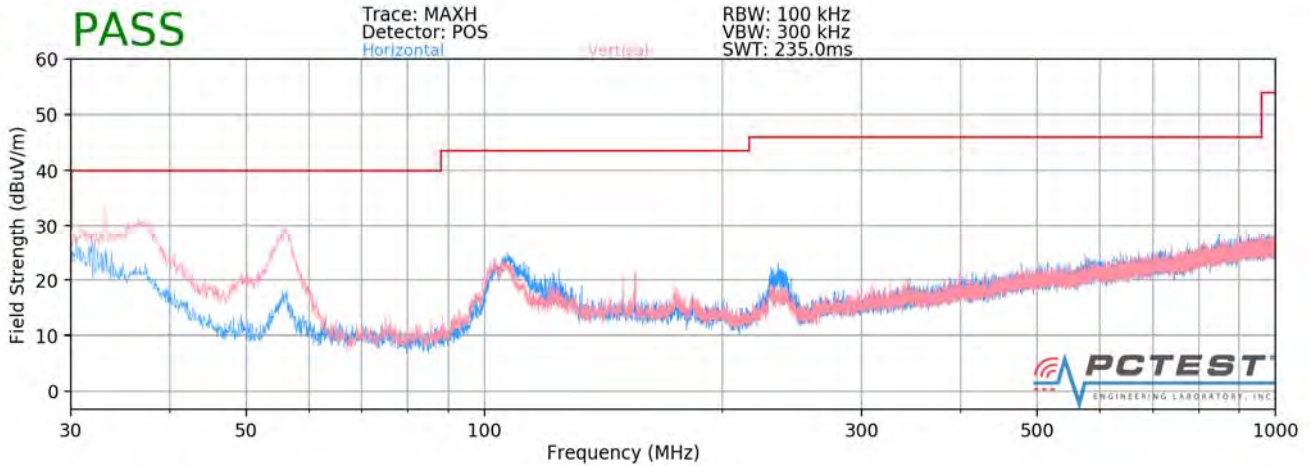

**Plot 7-130. Radiated Spurious Plot below 1GHz SISO ANT2**

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 99 of 104

## 7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-23. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2


### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 100 of 104	

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

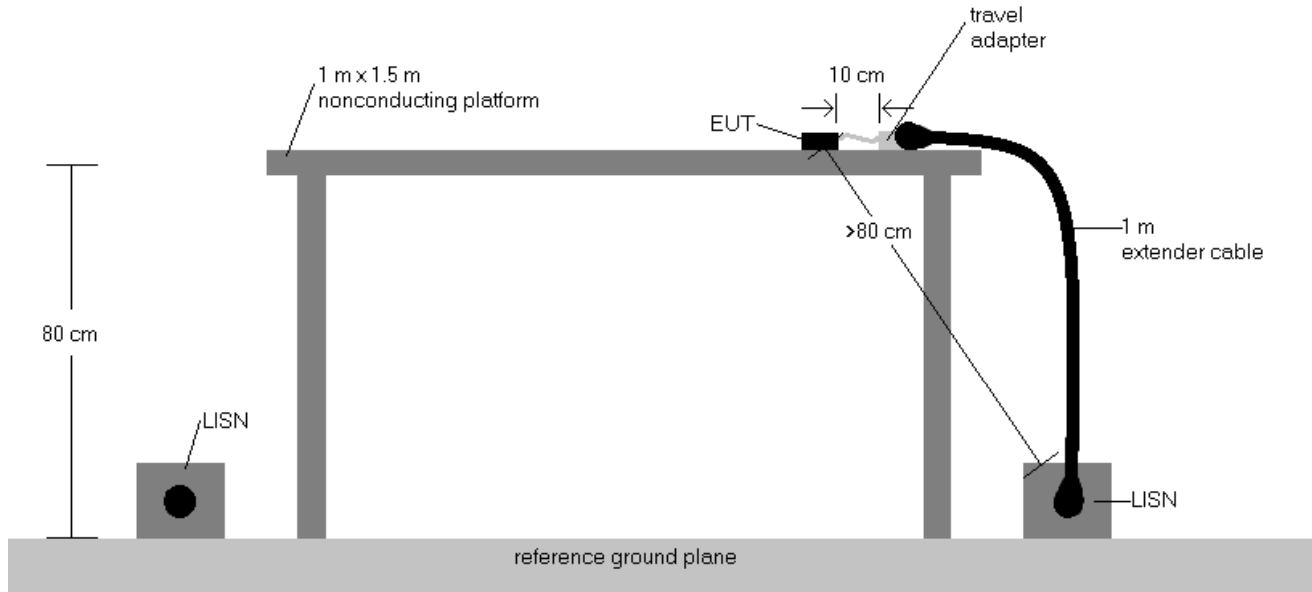


**Figure 7-9. Test Instrument & Measurement Setup**

### Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3.  $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4.  $QP/AV\ Level (dB\mu V) = QP/AV\ Analyzer/Receiver\ Level (dB\mu V) + Corr. (dB)$
5.  $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point	Page 101 of 104	

### SISO Antenna-1 Line Conducted Test Data

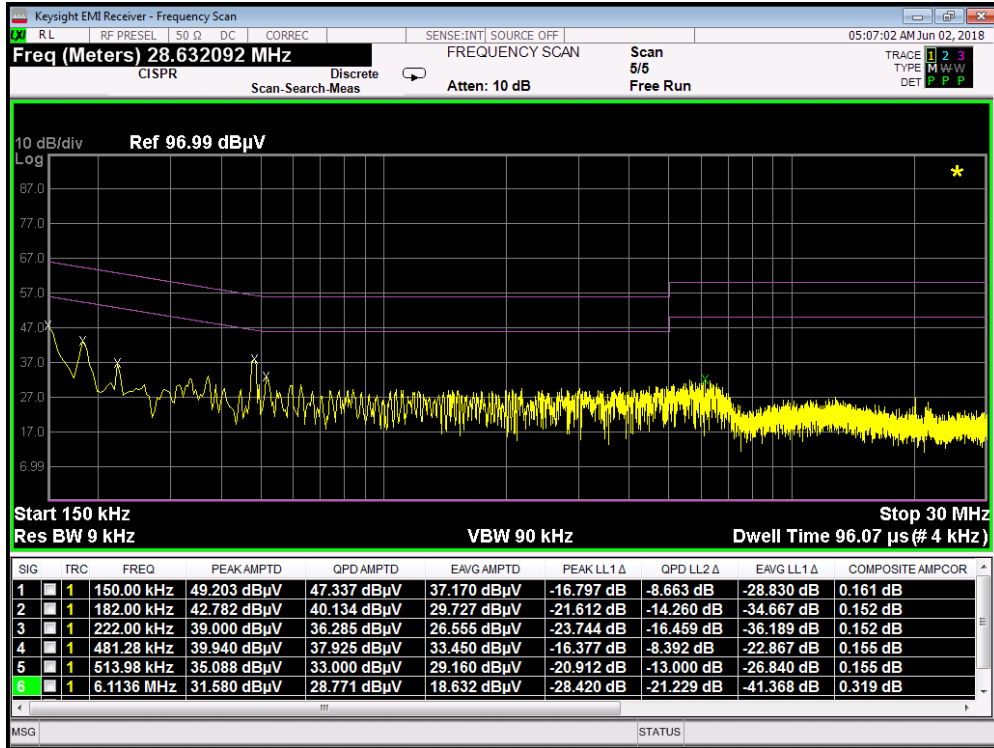


Plot 7-131. Line Conducted Plot with 802.11b (L1)

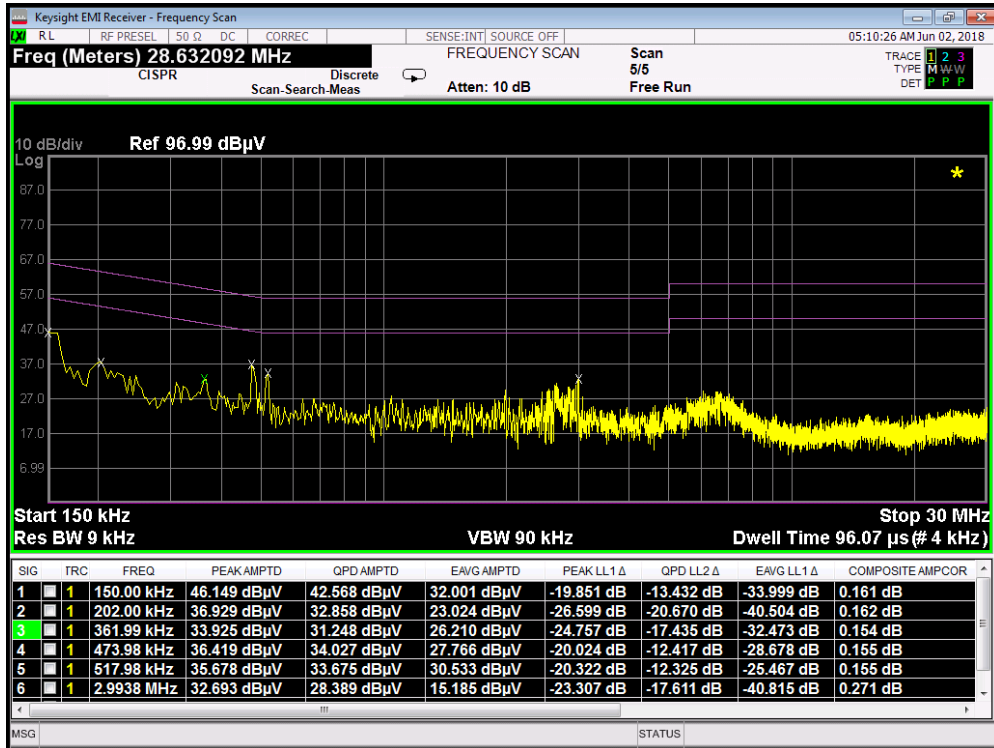


Plot 7-132. Line Conducted Plot with 802.11b (N)

FCC ID: A3LETWV525 IC: 649E-ETWV525	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 102 of 104

## SISO Antenna-2 Line Conducted Test Data

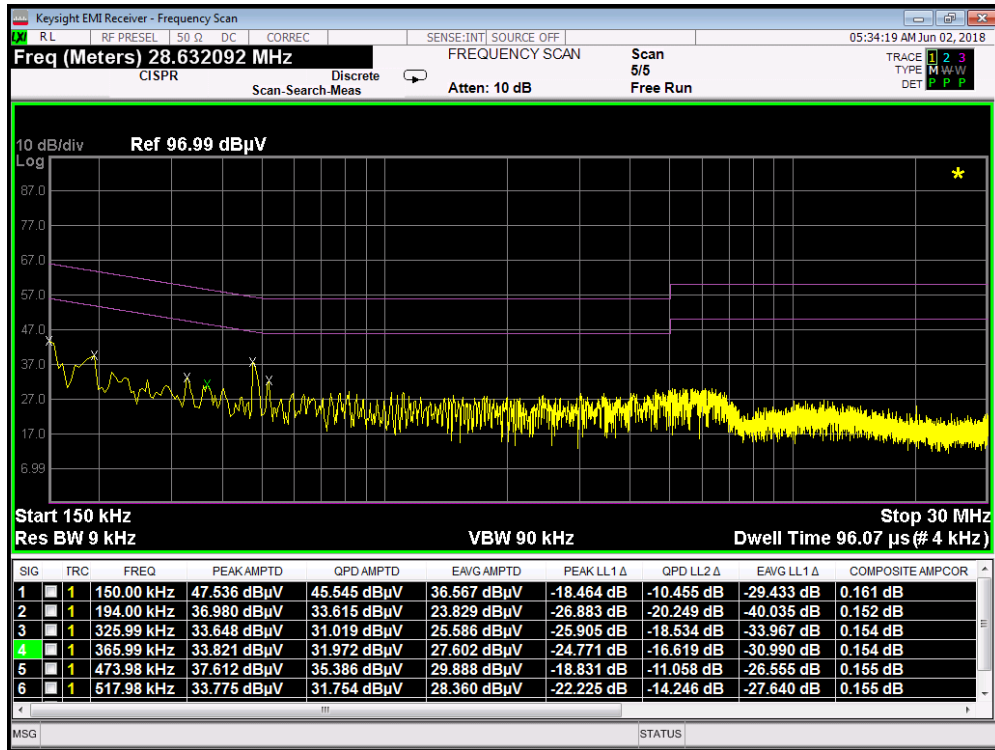

Plot 7-133. Line Conducted Plot with 802.11b (L1)

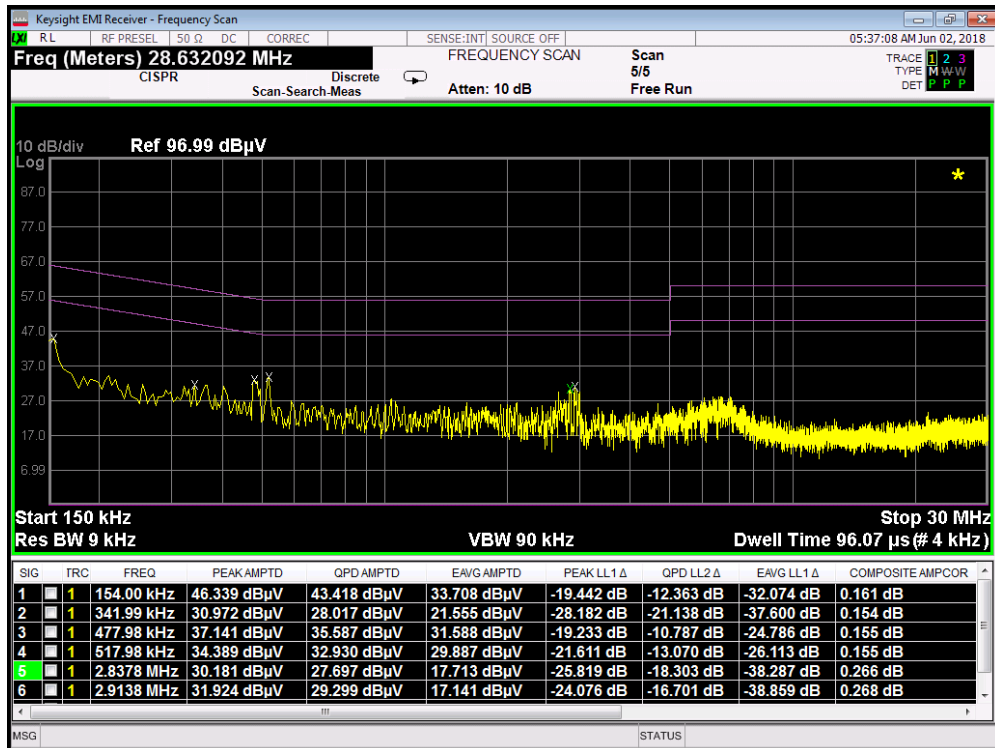


Plot 7-134. Line Conducted Plot with 802.11b (N)

FCC ID: A3LETWV525 IC: 649E-ETWV525		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805080100-02.A3L	Test Dates: 5/9-6/13/2018	EUT Type: Indoor Access Point		Page 103 of 104

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Indoor Access Point FCC ID: A3LETWV525** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> A3LETWV525 <b>IC:</b> 649E-ETWV525		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1805080100-02.A3L	<b>Test Dates:</b> 5/9-6/13/2018	<b>EUT Type:</b> Indoor Access Point		Page 104 of 104