

# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
3/24 - 8/23/2017  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
1M1703270128-01-R1.A3L

<b>FCC ID:</b>	<b>A3LETWV530</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:** Class II Permissive Change  
**Model:** ET-WV530  
**EUT Type:** Indoor Access Point  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15.407  
**Test Procedure(s):** KDB 789033 D02 v01r04, KDB 662911 D01 v02r01  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant:** 02/17/2017

UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		ANT3		ANT4		MIMO/CDD	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
2A	20	5260 - 5320	121.339	20.84	106.660	20.28	111.173	20.46	105.682	20.24	70.027	18.45
2C		5500 - 5720	97.275	19.88	85.704	19.33	125.026	20.97	112.720	20.52	60.412	17.81
2A	40	5270 - 5310	101.625	20.07	99.770	19.99	106.905	20.29	107.647	20.32	103.056	20.13
2C		5510 - 5710	106.414	20.27	106.414	20.27	108.893	20.37	108.893	20.37	105.682	20.24
2A	80	5290	23.988	13.80	26.363	14.21	26.792	14.28	26.546	14.24	104.027	20.17
2C		5530 - 5690	24.378	13.87	26.485	14.23	27.353	14.37	27.416	14.38	108.664	20.36

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01r04. Test results reported herein relate only to the item(s) tested.

This test report S/N: 1M1703270128-01-R1.A3L supersedes and replaces the previous test report S/N: 1M1703270128-01.A3L. Please discard the previous test report accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortaez  
President



<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 1 of 227	



© 2017 PCTEST Engineering Laboratory, Inc.

V 6.2  
01/09/2016



© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

# TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		5
1.1 Scope .....		5
1.2 PCTEST Test Location .....		5
2.0 PRODUCT INFORMATION .....		6
2.1 Equipment Description .....		6
2.2 Device Capabilities .....		6
2.3 Test Configuration .....		8
2.4 EMI Suppression Device(s)/Modifications .....		8
3.0 DESCRIPTION OF TESTS .....		9
3.1 Evaluation Procedure .....		9
3.2 AC Line Conducted Emissions .....		9
3.3 Radiated Emissions .....		10
3.4 Environmental Conditions .....		10
4.0 ANTENNA REQUIREMENTS .....		11
5.0 MEASUREMENT UNCERTAINTY .....		12
6.0 TEST EQUIPMENT CALIBRATION DATA .....		13
7.0 TEST RESULTS .....		14
7.1 Summary .....		14
7.2 26dB Bandwidth Measurement – 802.11a/n/ac .....		15
7.3 UNII Output Power Measurement – 802.11a/n/ac .....		64
7.4 Maximum Power Spectral Density – 802.11a/n/ac .....		71
7.5 Frequency Stability .....		121
7.6 Radiated Spurious Emission Measurements – Above 1GHz .....		123
7.6.1 Antenna-1 Radiated Spurious Emission Measurements .....		127
7.6.2 Antenna-2 Radiated Spurious Emission Measurements .....		133
7.6.3 Antenna-3 Radiated Spurious Emission Measurements .....		139
7.6.4 Antenna-4 Radiated Spurious Emission Measurements .....		145
7.6.4 Antenna-1 Radiated Band Edge Measurements (20MHz BW) .....		151
7.6.5 Antenna-1 Radiated Band Edge Measurements (40MHz BW) .....		155
7.6.6 Antenna-1 Radiated Band Edge Measurements (80MHz BW) .....		159
7.6.7 Antenna-2 Radiated Band Edge Measurements (20MHz BW) .....		163
7.6.8 Antenna-2 Radiated Band Edge Measurements (40MHz BW) .....		167
7.6.9 Antenna-2 Radiated Band Edge Measurements (80MHz BW) .....		171
7.6.10 Antenna-3 Radiated Band Edge Measurements (20MHz BW) .....		175
7.6.11 Antenna-3 Radiated Band Edge Measurements (40MHz BW) .....		179
7.6.12 Antenna-3 Radiated Band Edge Measurements (80MHz BW) .....		183
7.6.13 Antenna-4 Radiated Band Edge Measurements (20MHz BW) .....		187
7.6.14 Antenna-4 Radiated Band Edge Measurements (40MHz BW) .....		191

<b>FCC ID:</b> A3LETWV530	 PCTEST ENGINEERING LABORATORY, INC.	<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT</b> <b>(CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 2 of 227	

7.6.15	Antenna-4 Radiated Band Edge Measurements (80MHz BW).....	195
7.6.16	Radiated Band Edge Measurements (20MHz BW) .....	199
7.6.17	MIMO Radiated Band Edge Measurements (40MHz BW).....	203
7.6.18	MIMO Radiated Band Edge Measurements (80MHz BW).....	207
7.7	Line-Conducted Test Data .....	211
8.0	CONCLUSION .....	217
Appendix A.	802.11a Dual Tx .....	218
A.1	Summary.....	218
A.2	Output Power Measurement .....	219
A.3	Power Spectral Density.....	220
A.4	Dual Tx Radiated Restricted Band Edge Measurements .....	221
Appendix B.	80+80MHz Tx .....	223

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 3 of 227	



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** Samsung Electronics Co., Ltd.

**APPLICANT ADDRESS:** 129, Samsung-ro,  
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.407

**BASE MODEL:** ET-WV530

**FCC ID:** A3LETWV530

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**Test Device Serial No.:** 13JAN-1, 4       Production     Pre-Production     Engineering

**DATE(S) OF TEST:** 3/24 - 8/23/2017



**TEST REPORT S/N:** 1M1703270128-01-R1.A3L

### Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 4 of 227	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

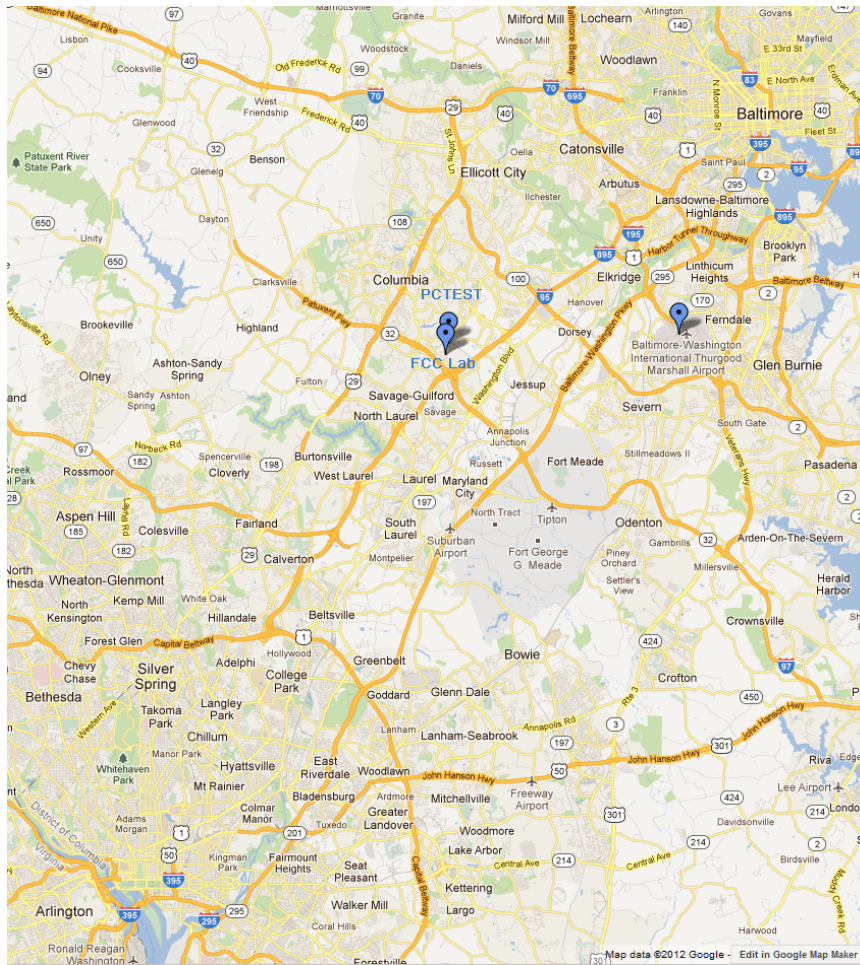


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point		Page 5 of 227	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Access Point FCC ID: A3LETWV530**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN, 802.11a/n/ac UNII, BT (LE), Zigbee, Zwave

Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
52	5260	100	5500
:	:	:	:
56	5280	120	5600
:	:	:	:
64	5320	144	5720



Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
54	5270	102	5510
:	:	:	:
62	5310	120	5600
:	:	:	:
		142	5710

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
58	5290	106	5530
:	:	:	:
		138	5690

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 6 of 227	

**Notes:**

- 5GHz NII operation is possible in 20MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v01r04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles						
802.11 Mode/Band		Duty Cycle [%]				
		ANT1	ANT2	ANT3	ANT4	MIMO
5GHz	a	97.1	96.7	97.1	97.1	97.2
	n (HT20)	95.7	96.6	97.2	97.2	97.1
	ac (HT20)	95.7	95.0	95.1	95.2	95.1
	n (HT40)	97.9	98.0	97.3	96.8	97.2
	ac (HT40)	96.6	98.0	96.0	95.5	96.1
	ac (HT80)	95.3	95.0	94.0	95.6	94.8



- The device employs MIMO technology using four 2.4GHz outputs and 5GHz outputs. Below are the possible configurations.

WiFi Configurations	SISO				SDM				CDD			
	ANT1	ANT2	ANT3	ANT4	ANT1	ANT2	ANT3	ANT4	ANT1	ANT2	ANT3	ANT4
5GHz 11a	✓	✓	✓	✓	✗	✗	✗	✗	✓	✓	✓	✓
5GHz 11n/ac (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5GHz 11n/ac (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5GHz 11ac (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**Table 2-4. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support  
**SISO** = Single Input Single Output  
**SDM** = Spatial Diversity Multiplexing – MIMO function  
**CDD** = Cyclic Delay Diversity

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)  
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)  
29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)  
13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps (MIMO n/ac – 20MHz)  
156/173Mbps (MIMO ac – 20MHz)  
27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243,270, 270/300Mbps (MIMO n/ac – 40MHz) 324/360, 360/400Mbps (MIMO ac – 40MHz)  
58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps (MIMO ac – 80MHz)



FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 7 of 227	

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v01r04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, and 7.4 for antenna port conducted emissions test setups.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 8 of 227	



## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v01r04 were used in the measurement of the EUT.

**Deviation from measurement procedure.....None**



### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LETWV530		 FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point		Page 9 of 227	

### 3.3 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 10 of 227	

## 4.0 ANTENNA REQUIREMENTS



**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**



The EUT complies with the requirement of §15.203.

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 11 of 227	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 12 of 227	

## 6.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
-	WL40-1	Conducted Cable Set (40GHz)	9/30/2016	Annual	9/30/2017	WL40-1
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/27/2017	Annual	3/27/2018	MY52350166
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	MA2411B	Pulse Power Sensor	10/14/2015	Biennial	10/14/2017	846215
Anritsu	MS46322A	Vector Analyzer	8/9/2016	Annual	8/9/2017	1521001
Anritsu	36585K-2F	Precision Autocal 2-Port	8/11/2016	Annual	8/11/2017	1628014
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/6/2016	Annual	7/6/2017	441119
Com-Power	PAM-118A	PREAMPLIFIER 500MHZ TO 18GHZ	8/9/2016	Annual	8/9/2017	551079
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
EMCO	3160-10	Small Horn (26.5 - 40GHz)	8/23/2016	Biennial	8/23/2018	130993
Espec	ESX-2CA	Environmental Chamber	4/11/2017	Annual	4/11/2018	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	12/27/2016	Biennial	12/27/2018	114451
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/3/2016	Annual	10/3/2017	251425001
K & L	11SH10-6000/T18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-6000/T18000-1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	10/5/2016	Annual	10/5/2017	NMLC-1
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	7/6/2016	Annual	7/6/2017	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	7/11/2016	Annual	7/11/2017	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LETWV530		 <b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point		Page 13 of 227	

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LETWV530  
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407 (a.2)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)		PASS	Section 7.3
15.407 (a.2), (5)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.4
15.407(g)	Frequency Stability	N/A		PASS	Section 7.5
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407 (2), (3)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)	RADIATED	PASS	Section 7.6
15.205, 15.407(5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.6
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: A3LETWV530		 <b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 14 of 227	

## 7.2 26dB Bandwidth Measurement – 802.11a/n/ac

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r04, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

*The 26dB bandwidth is used to determine the conducted power limits.*

### Test Procedure Used


KDB 789033 D02 v01r04 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

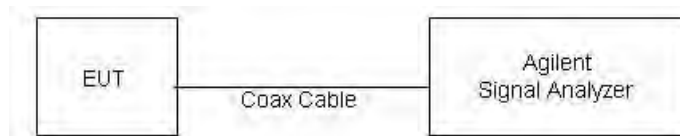

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes



None.

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 15 of 227	


## Antenna-1 26 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 2A	5260	52	a	6	21.38
	5280	56	a	6	21.08
	5320	64	a	6	21.04
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.41
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.87
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.32
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.33
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.19
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	82.64
Band 2C	5500	100	a	6	20.90
	5600	120	a	6	20.32
	5720	144	a	6	21.48
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.24
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.08
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.02
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.64
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.75
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.44
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	83.47
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	82.84
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	83.07


**Table 7-2. Conducted Bandwidth Measurements**

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 16 of 227	



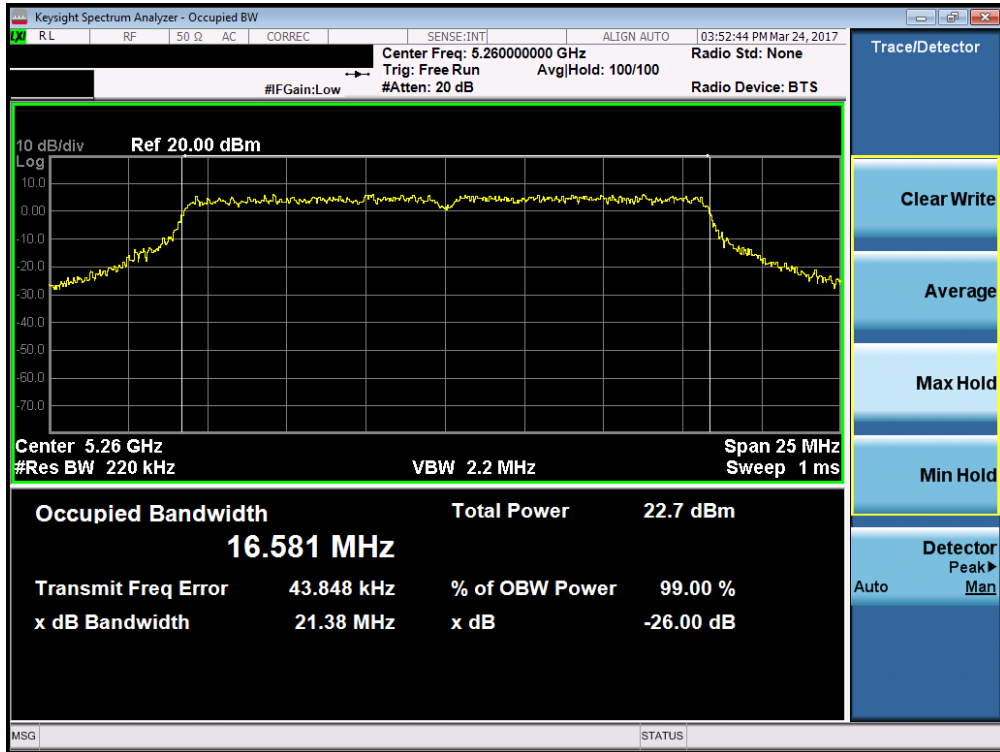


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

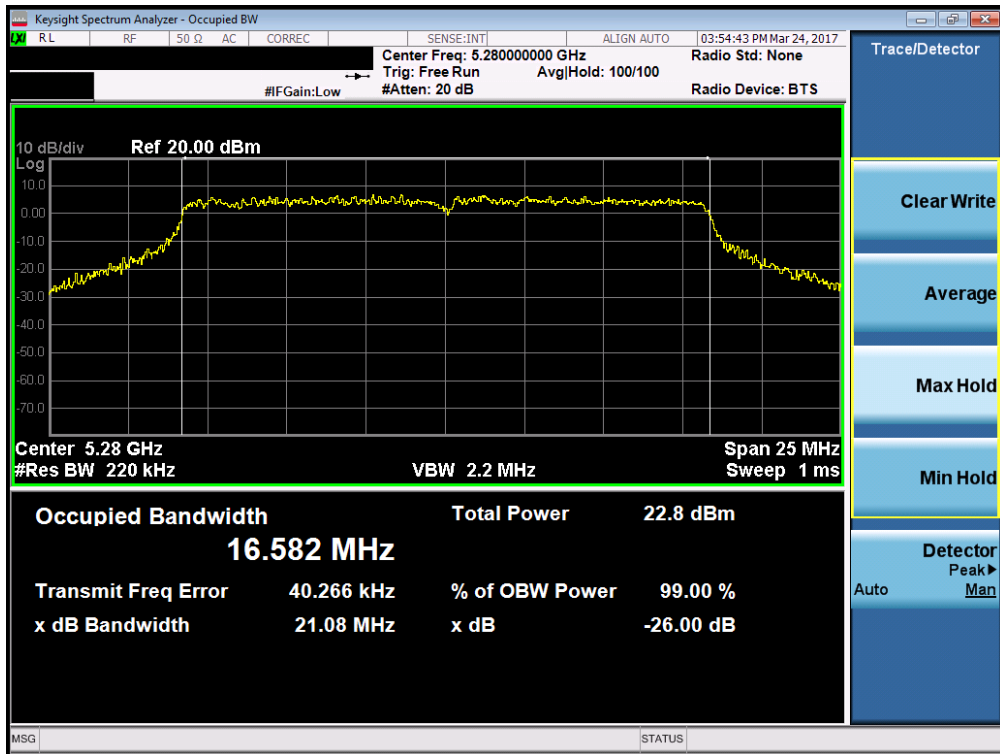


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 17 of 227

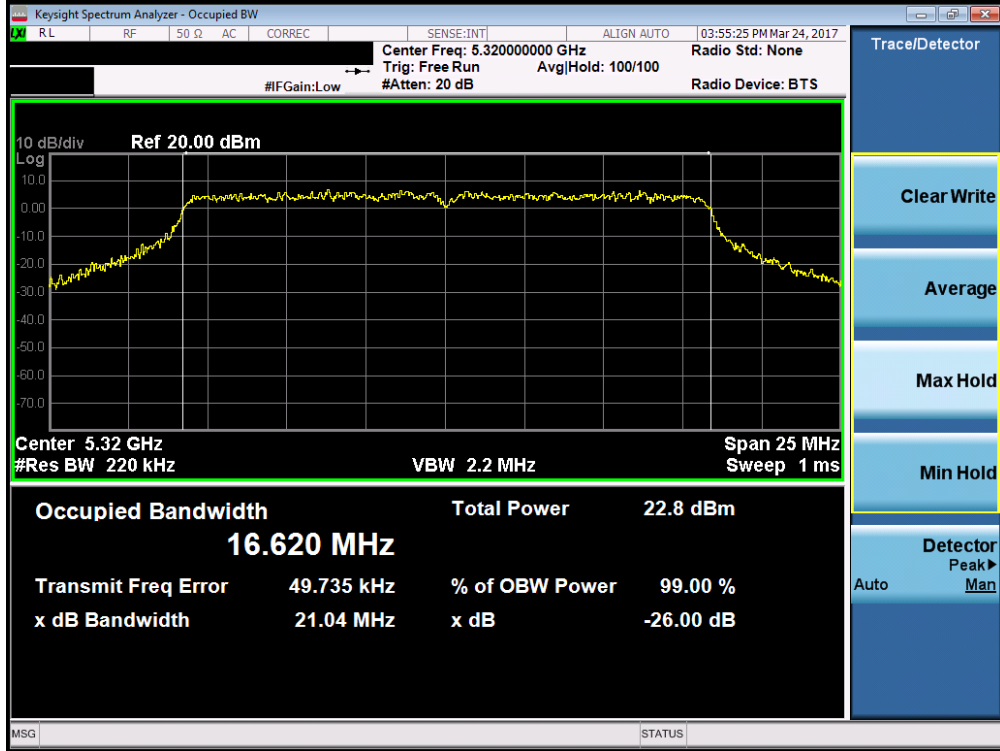


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

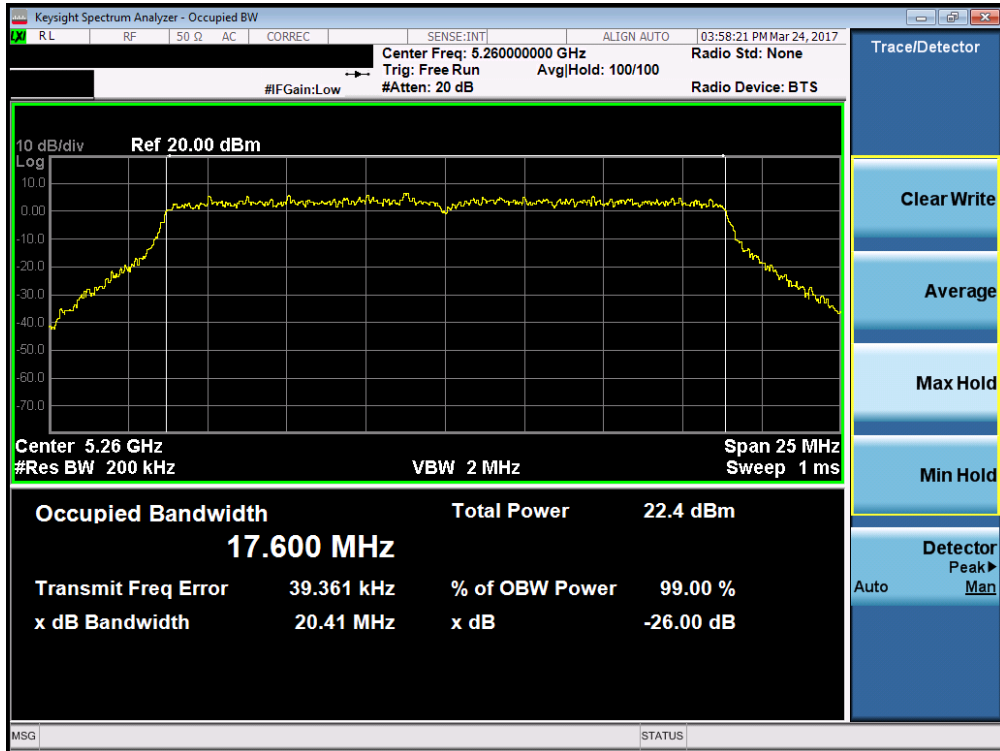


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 18 of 227

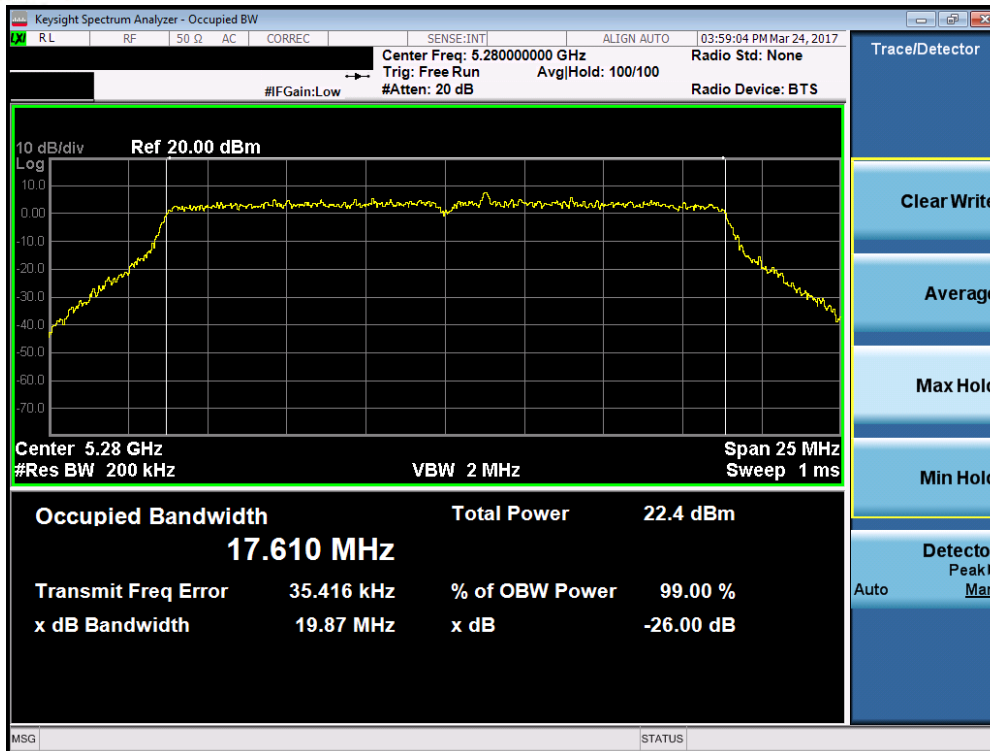


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

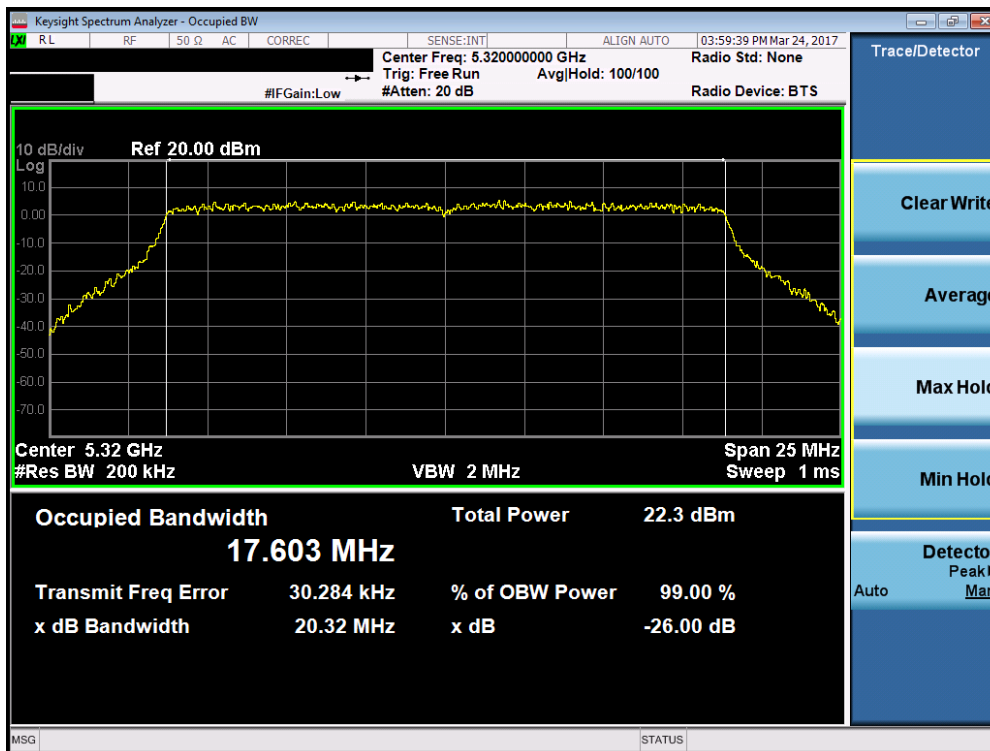


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 19 of 227

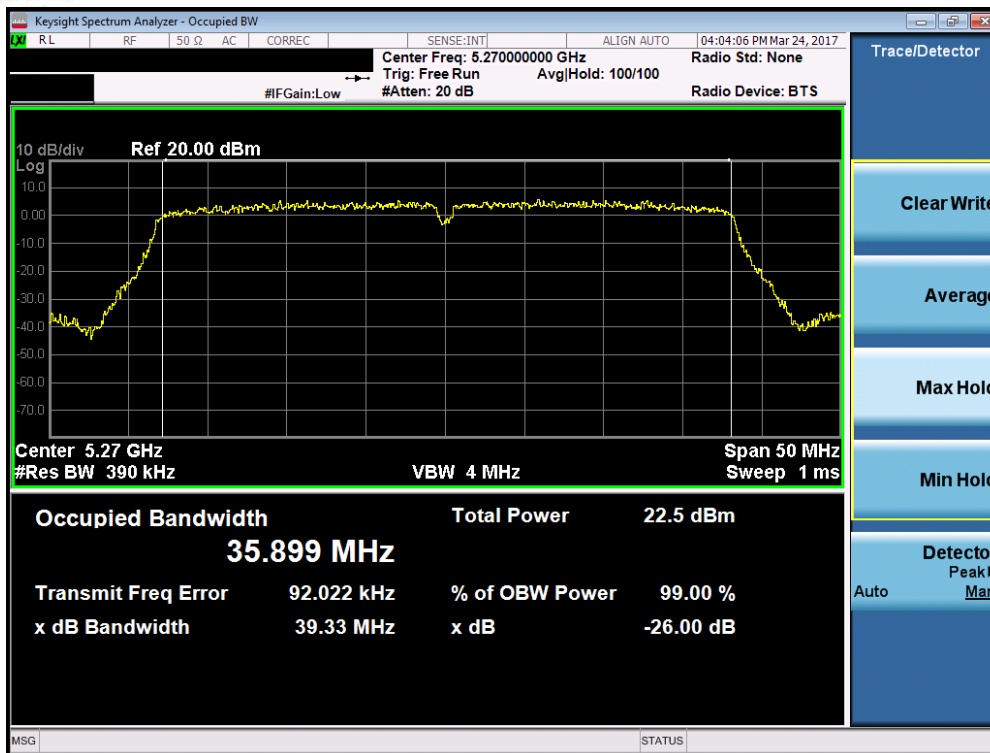


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

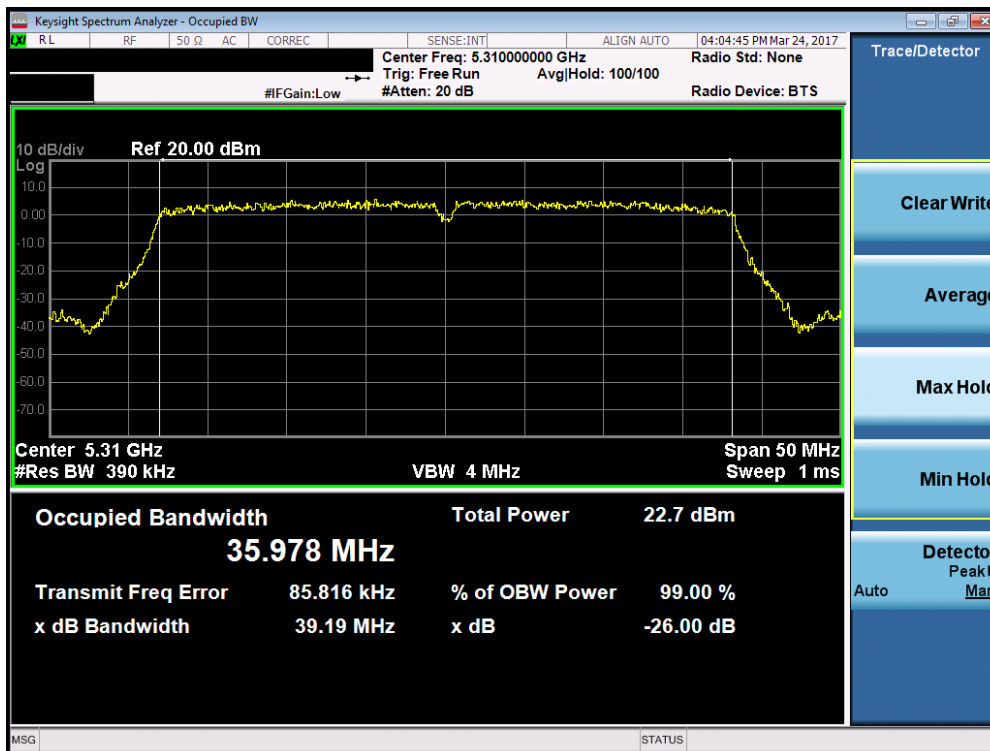


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 20 of 227

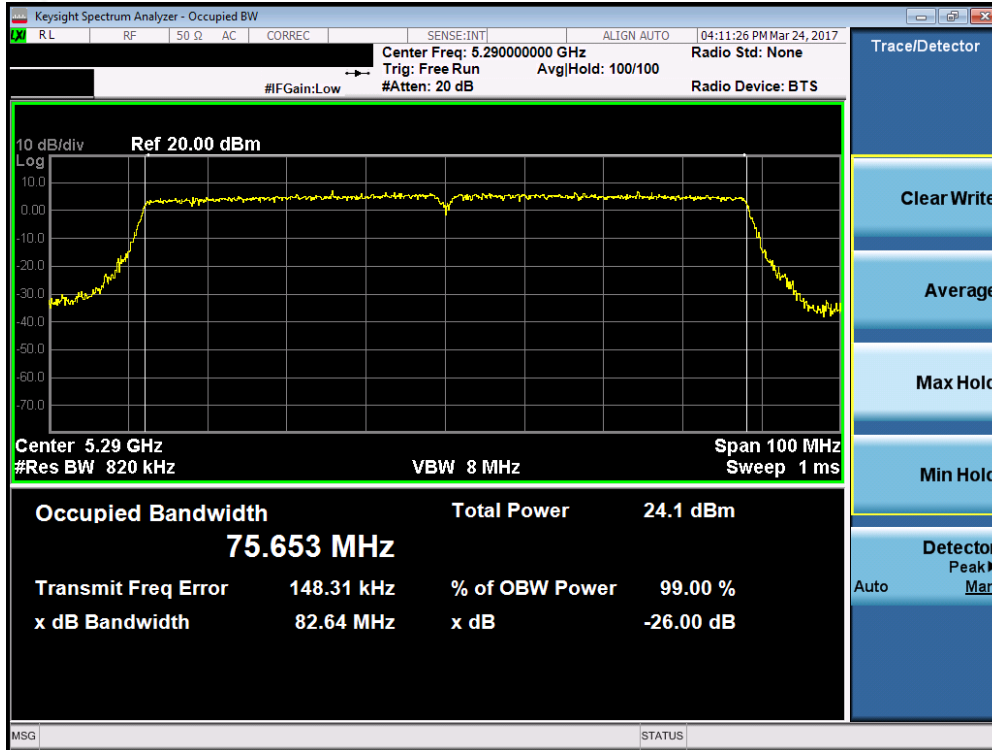


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

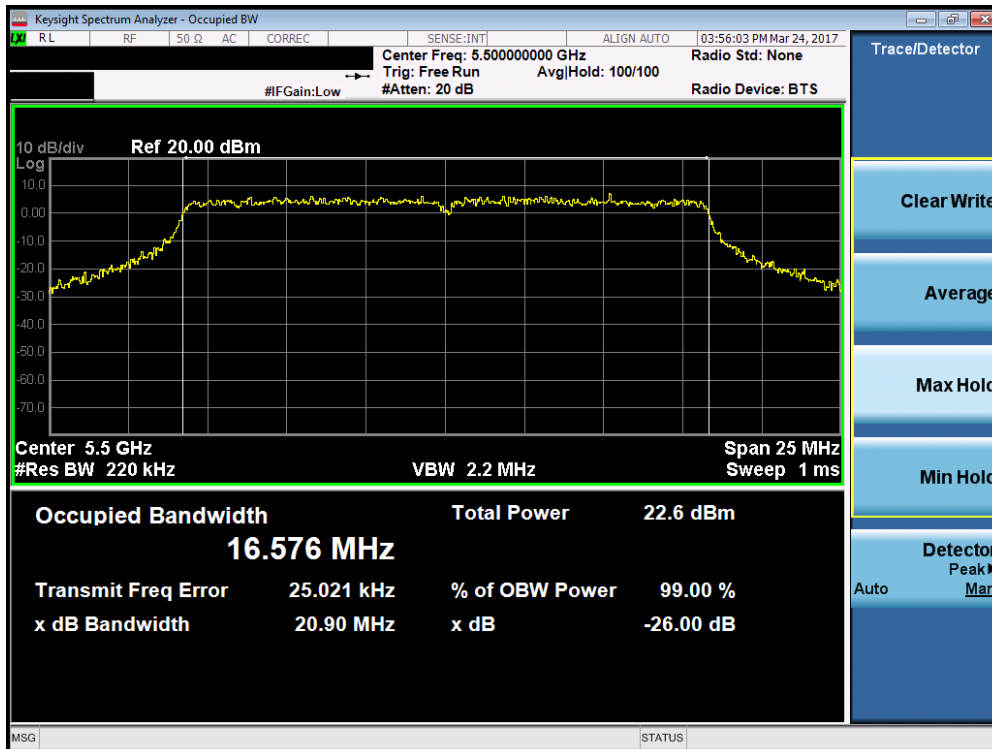


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 21 of 227

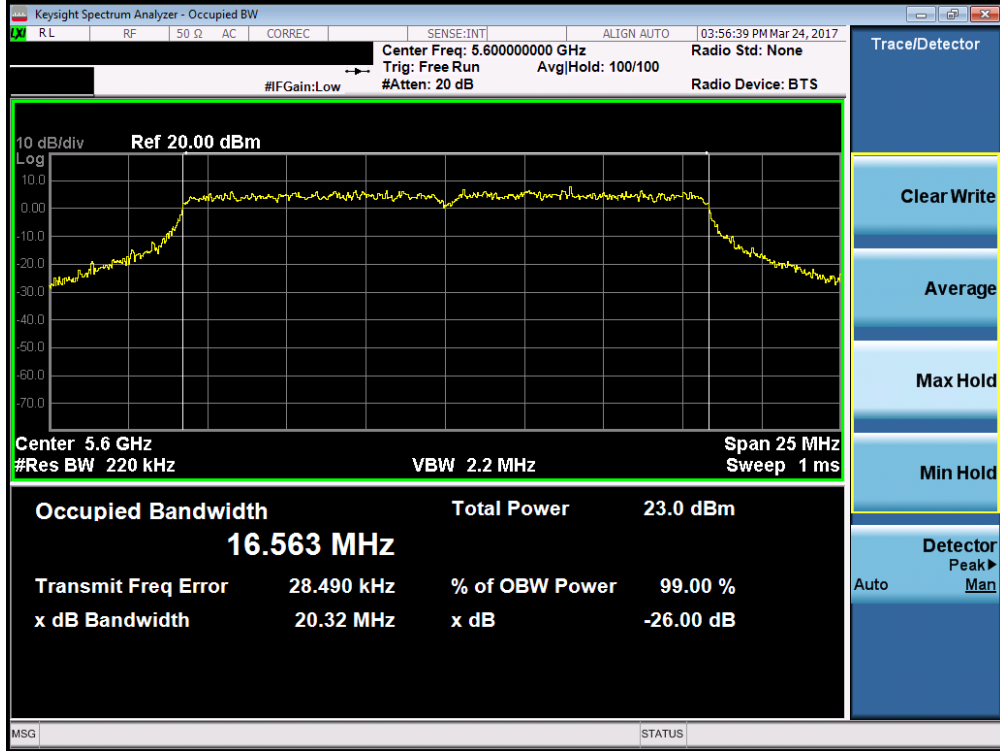


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

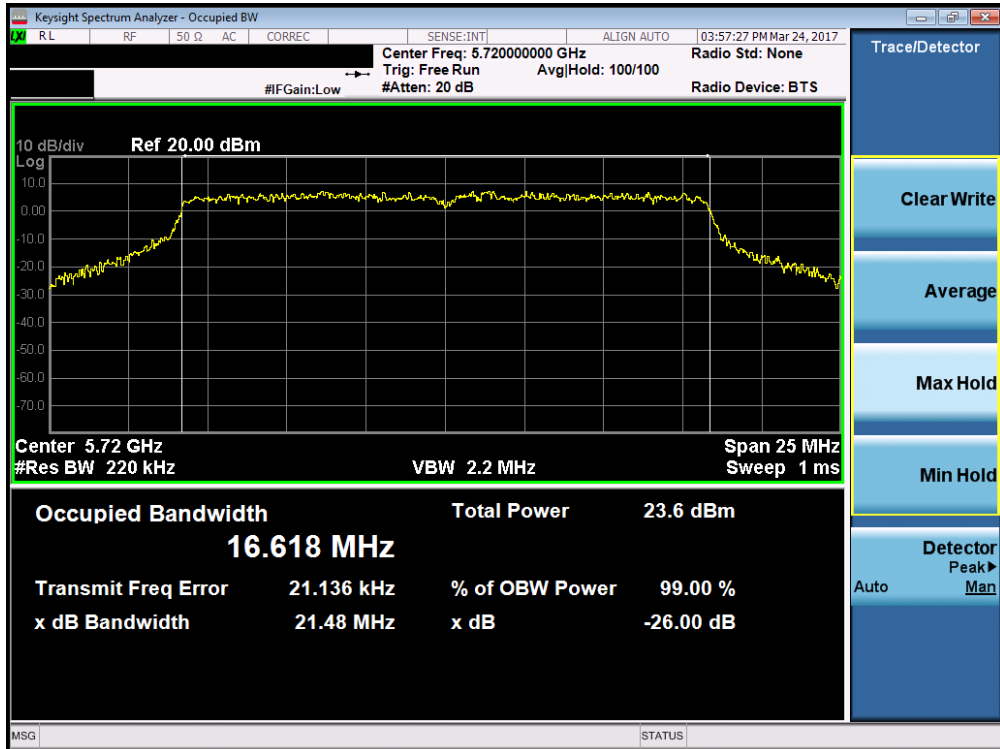


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 22 of 227

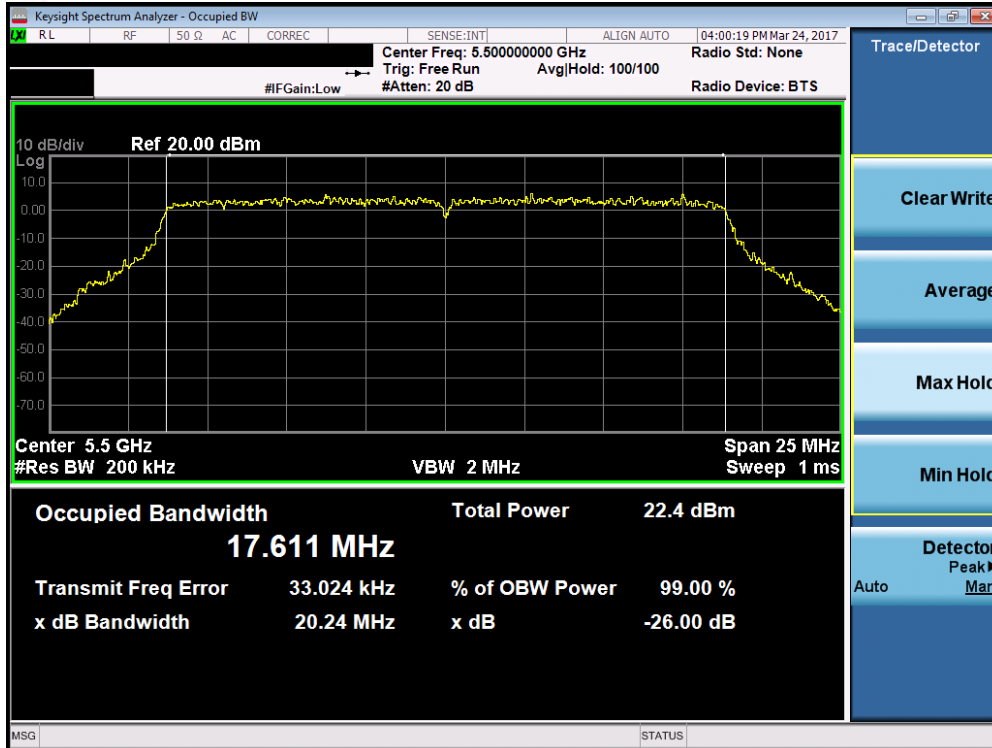


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

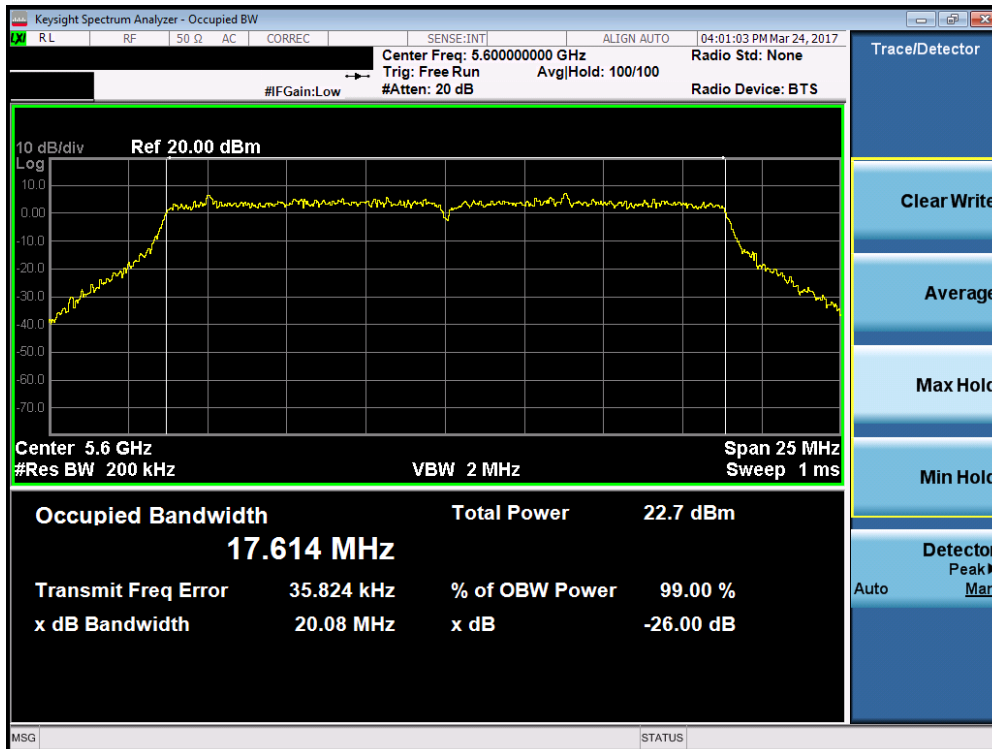


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 23 of 227

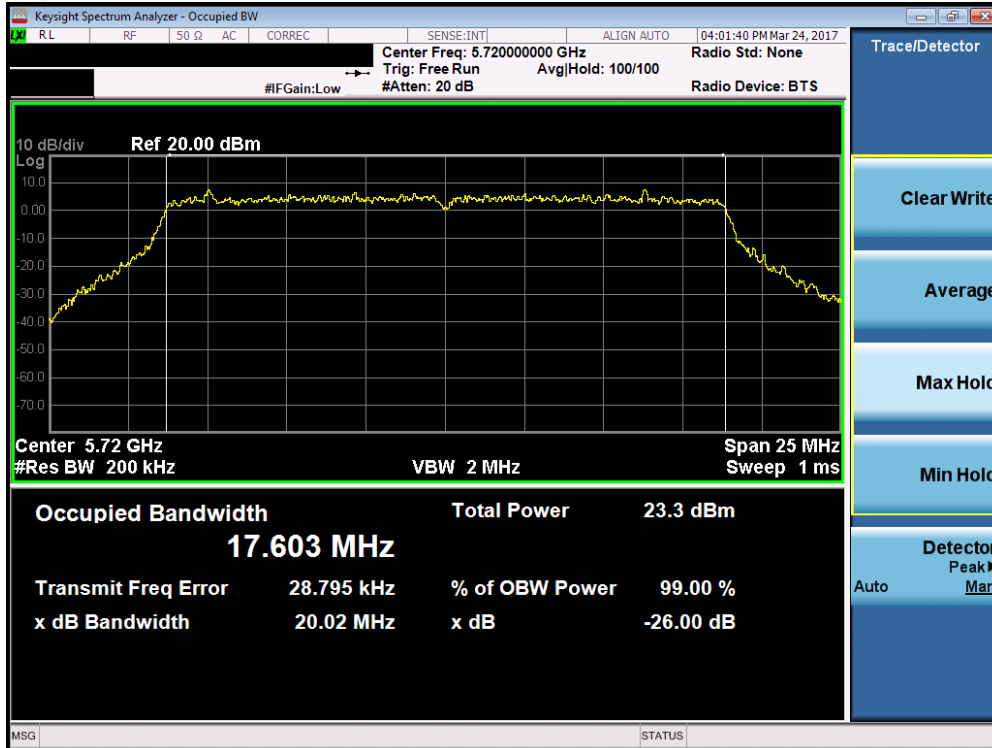


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

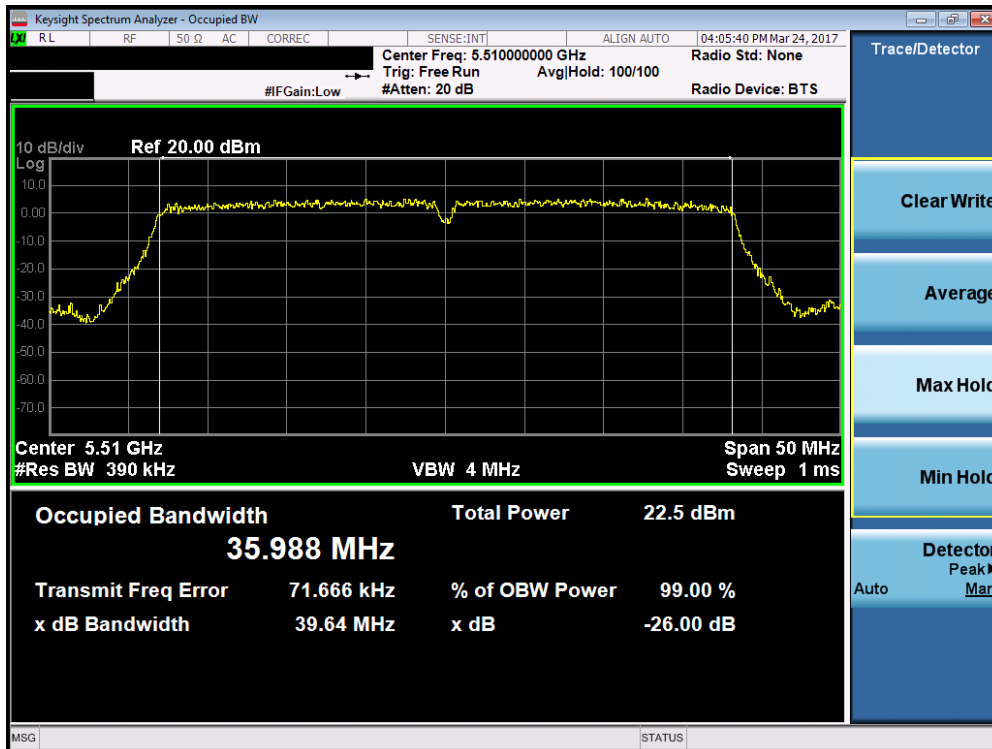


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 24 of 227



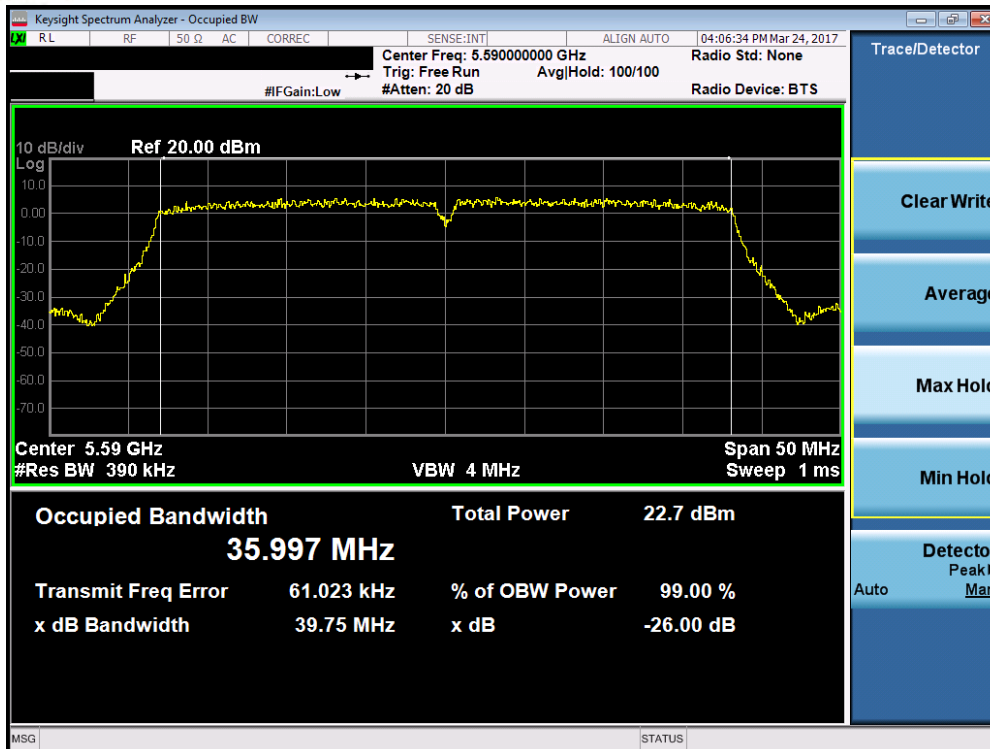


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

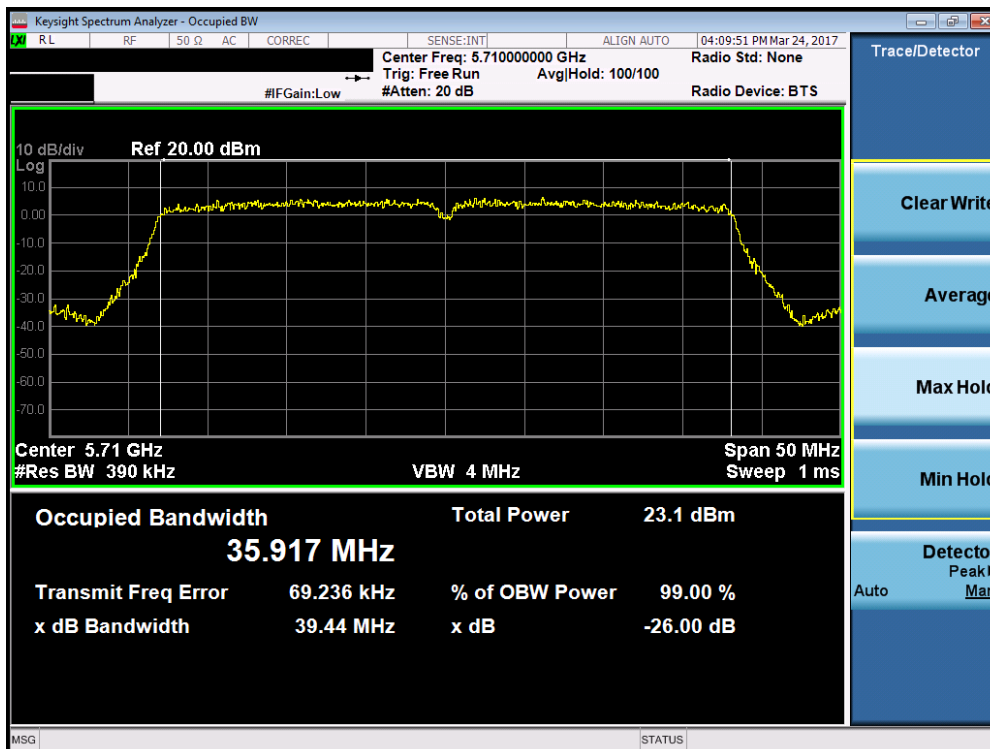


Plot 7-18. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 25 of 227

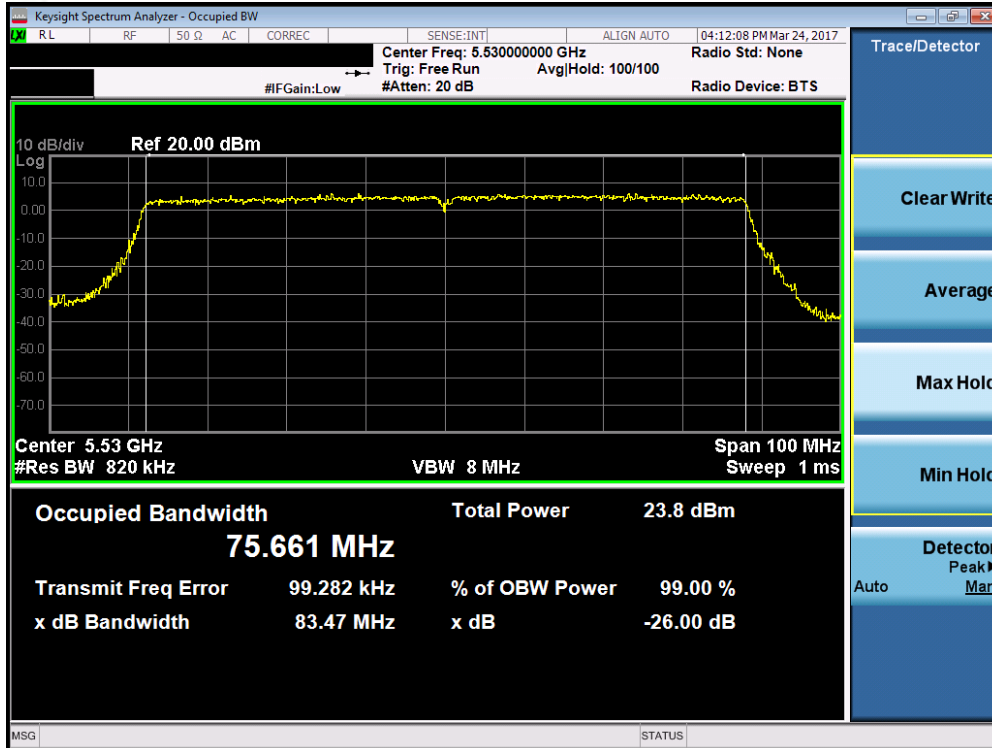


Plot 7-19. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

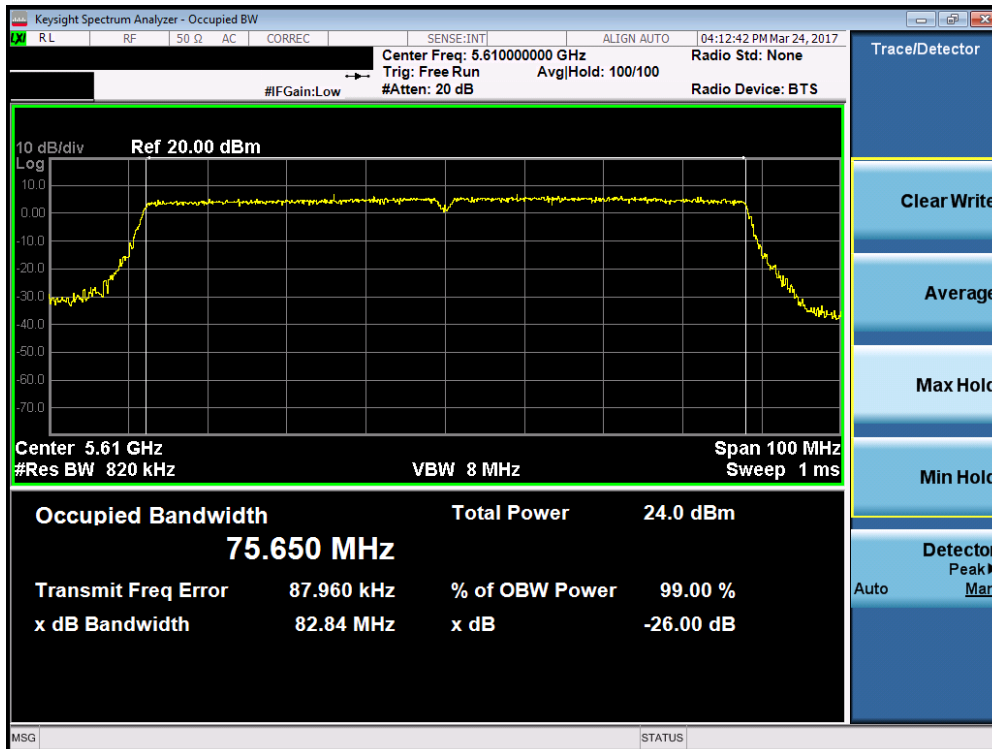

Plot 7-20. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 26 of 227

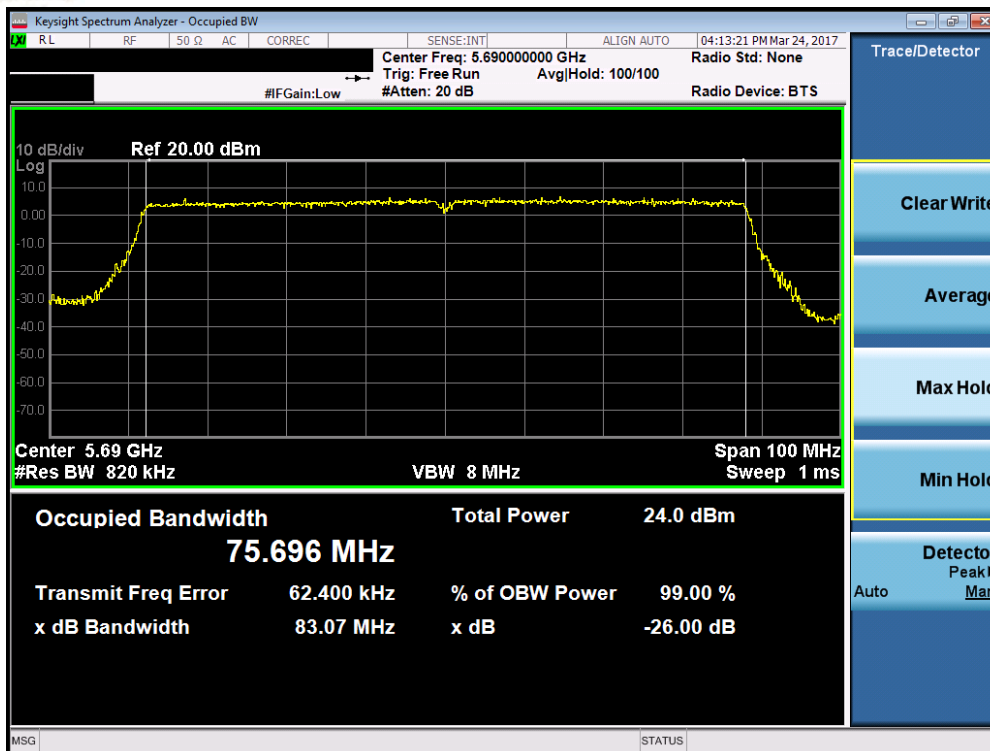



Plot 7-21. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 27 of 227

## Antenna-2 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 2A	5260	52	a	6	21.08
	5280	56	a	6	21.07
	5320	64	a	6	21.68
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.07
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.48
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.04
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.54
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.77
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	87.96
	5500	100	a	6	21.95
	5600	120	a	6	21.23
	5720	144	a	6	22.33
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.25
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.49
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.12
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.38
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.61
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.74
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	88.61
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	87.78
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	87.89

**Table 7-3. Conducted Bandwidth Measurements**

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 28 of 227	

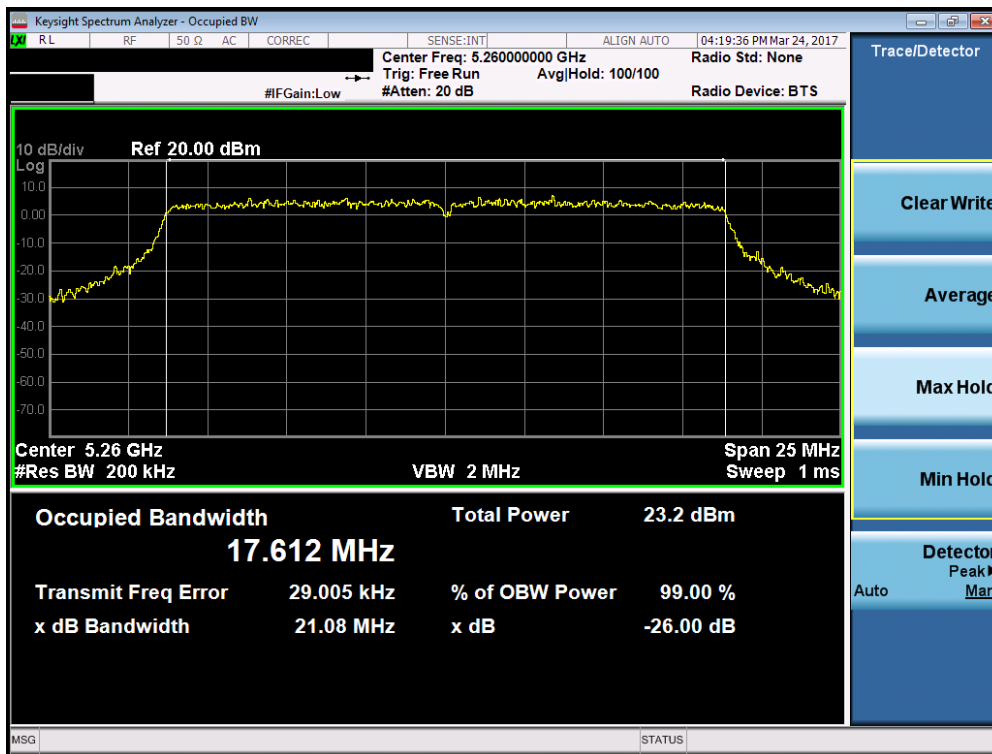


Plot 7-22. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

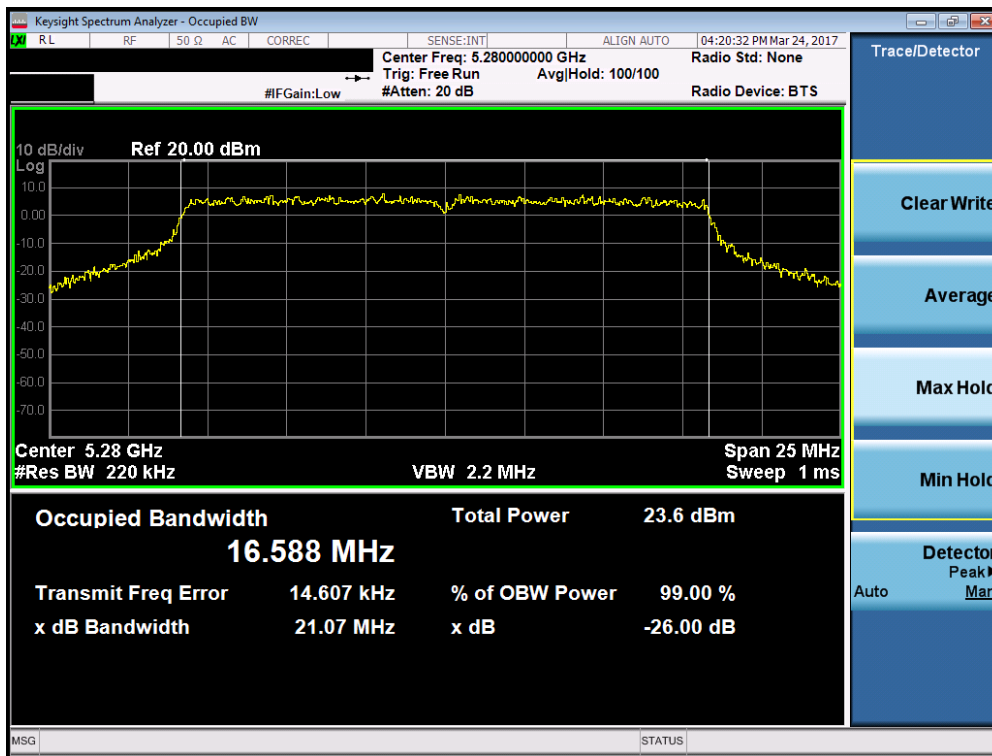


Plot 7-23. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 29 of 227

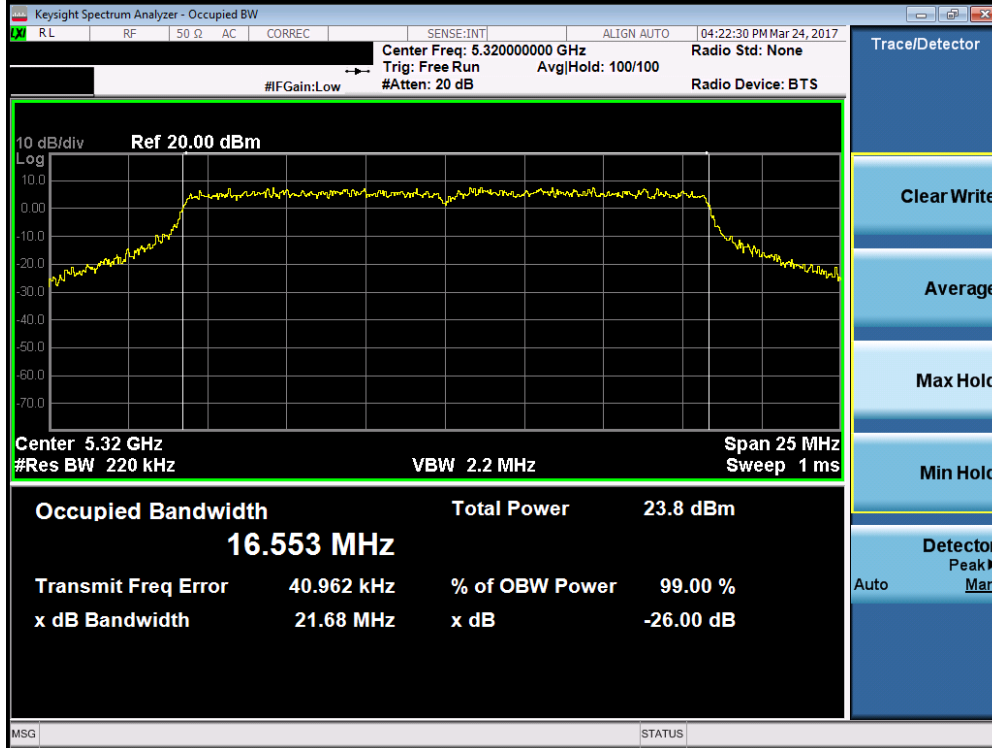


Plot 7-24. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

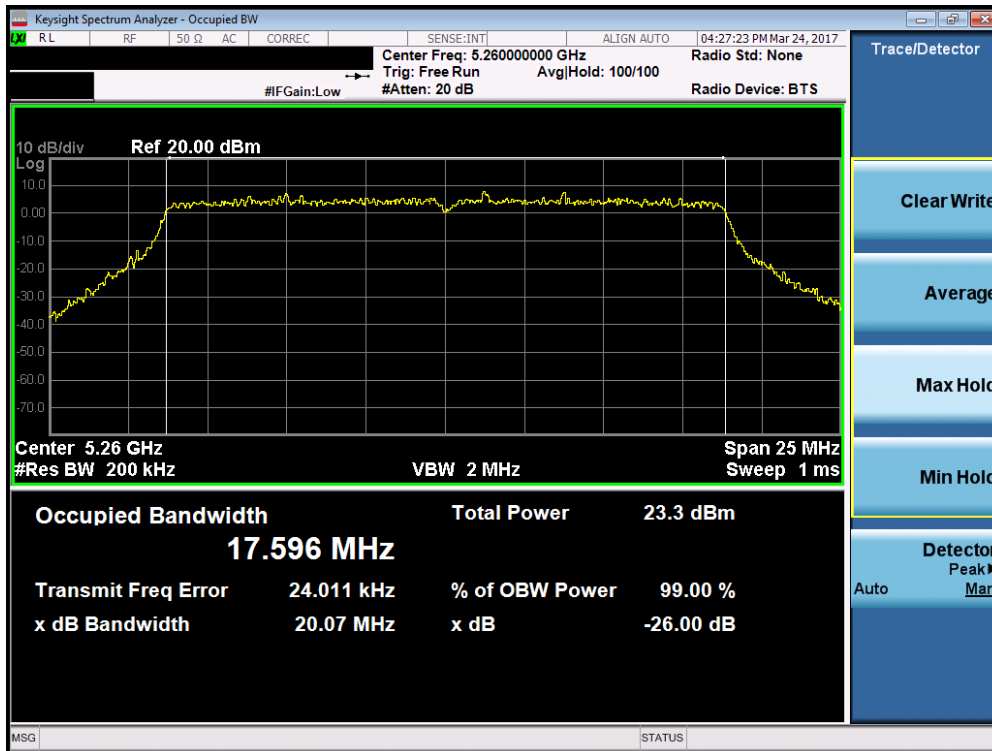


Plot 7-25. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 30 of 227

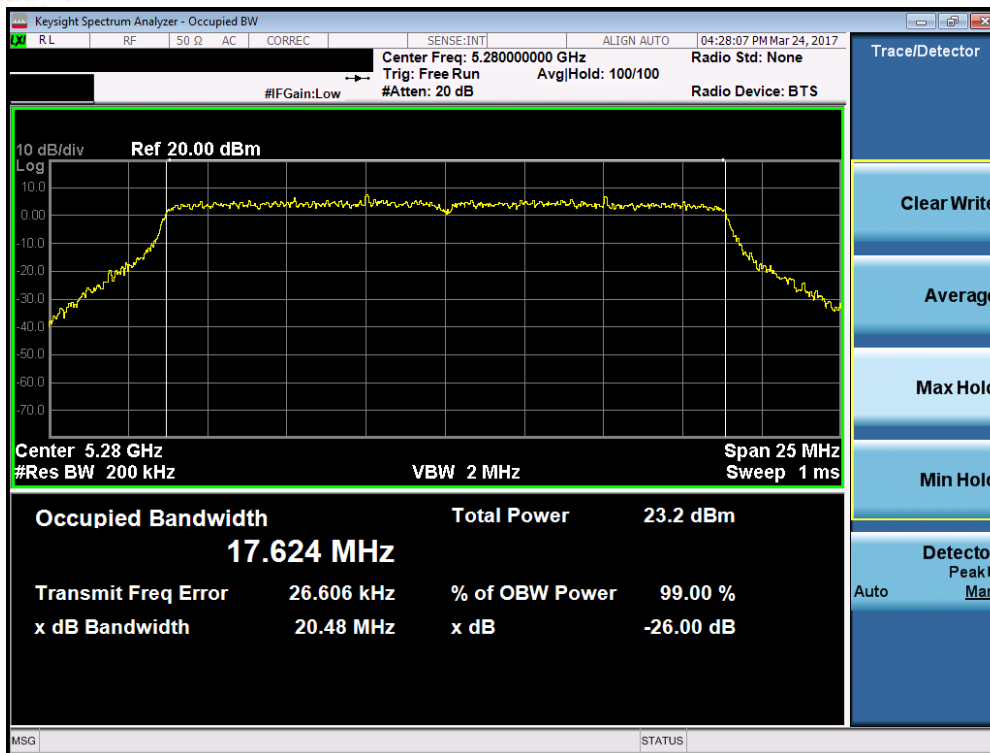


Plot 7-26. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

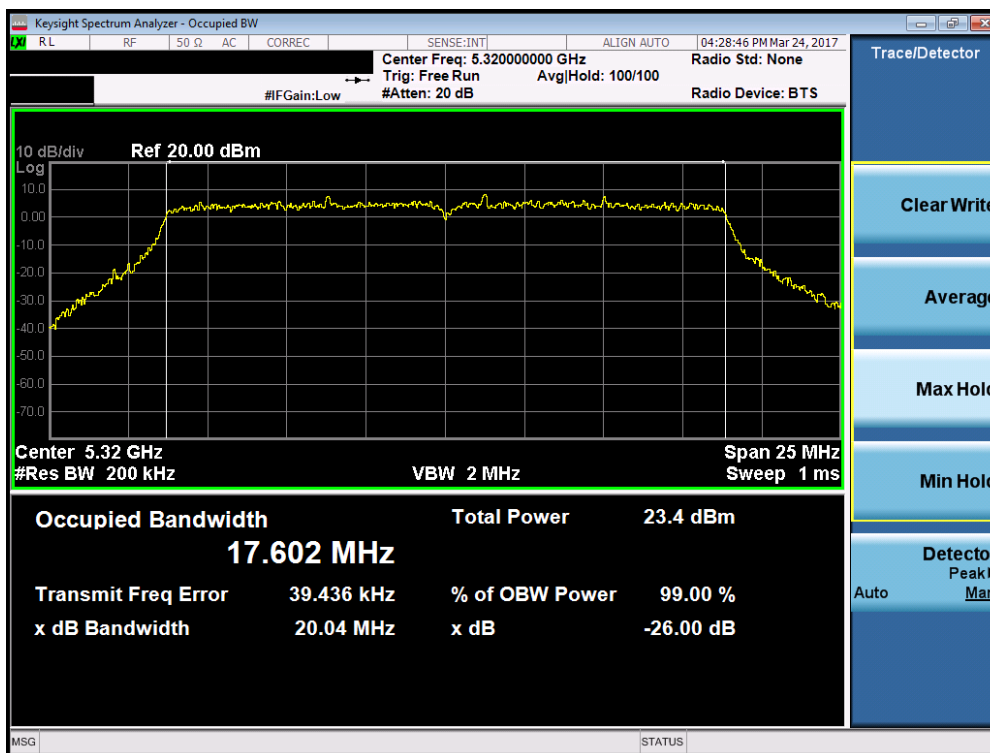


Plot 7-27. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 31 of 227

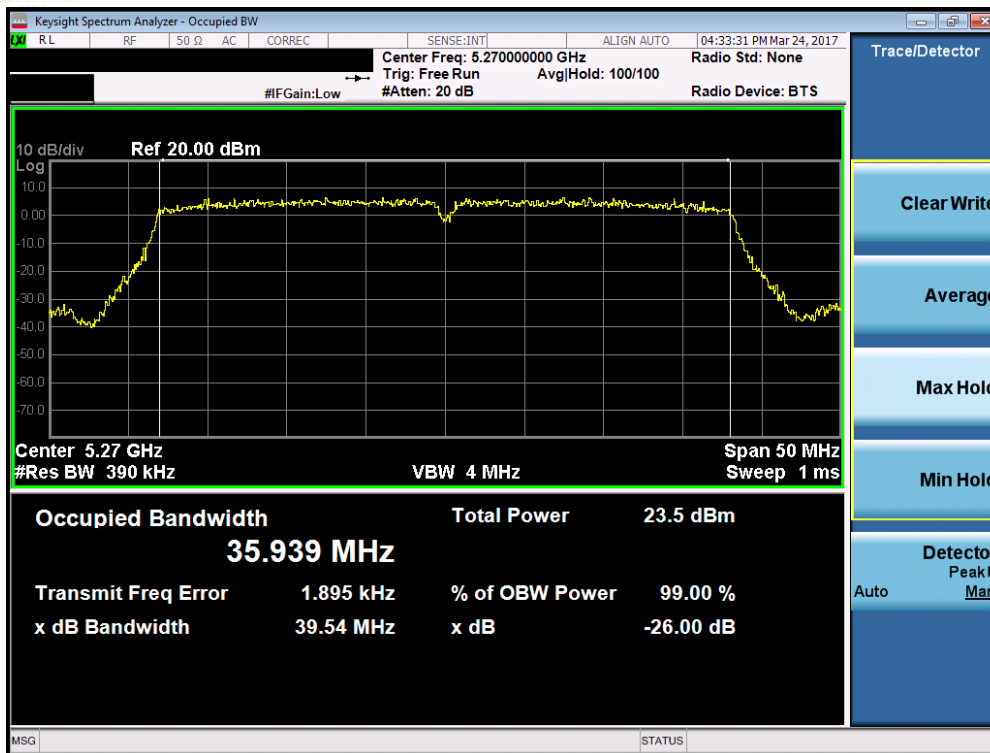


Plot 7-28. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

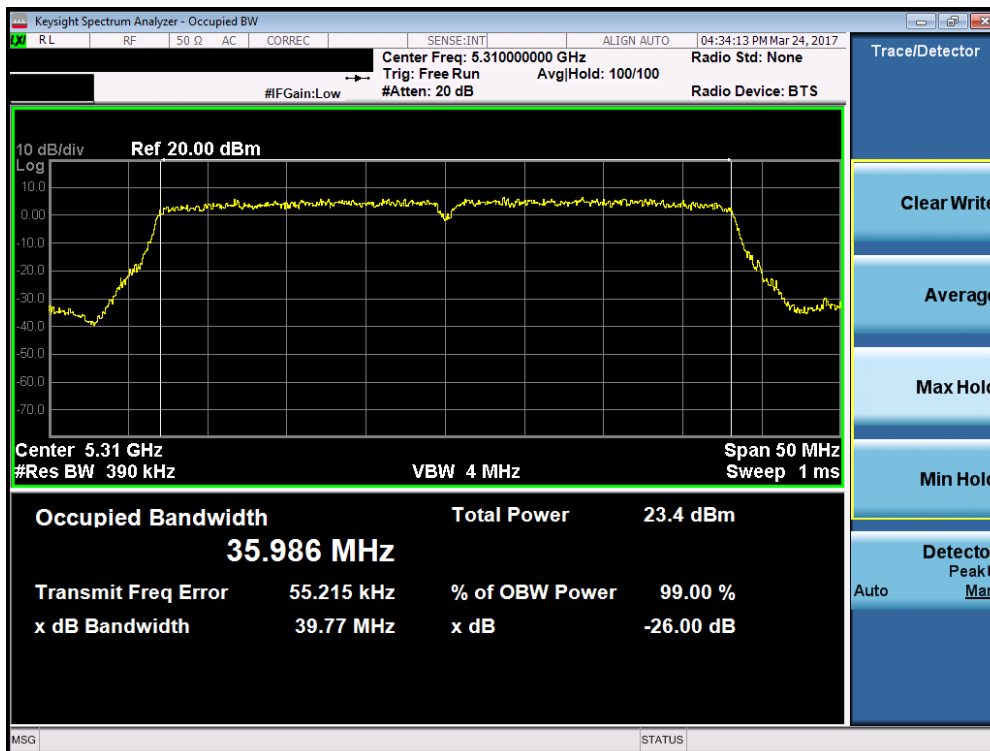


Plot 7-29. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 32 of 227



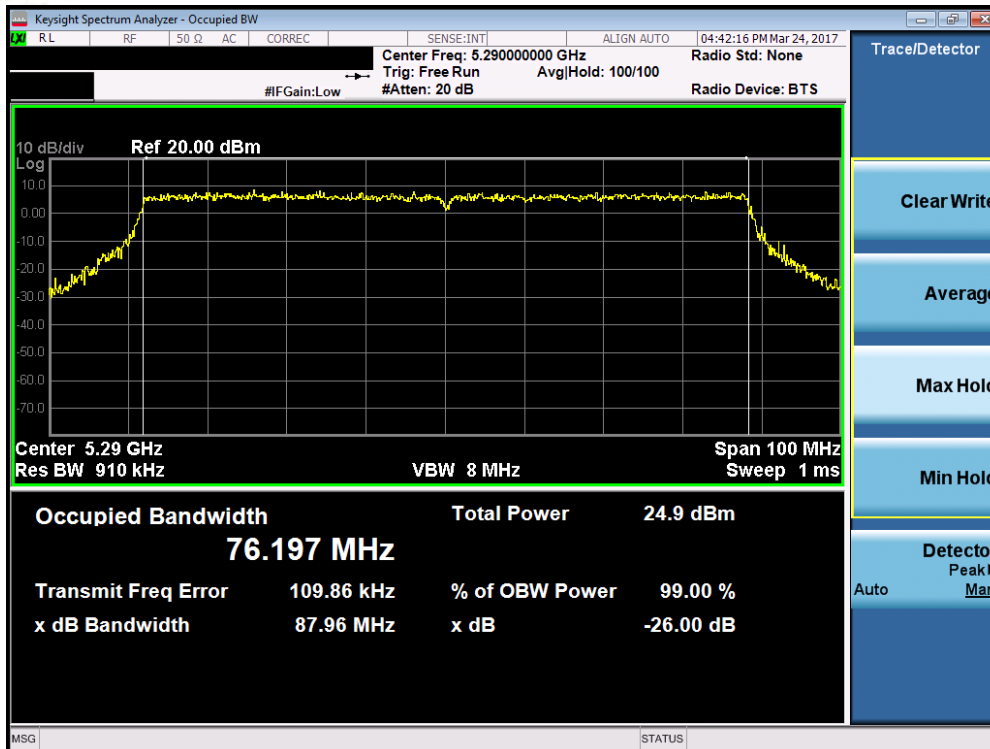


Plot 7-30. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

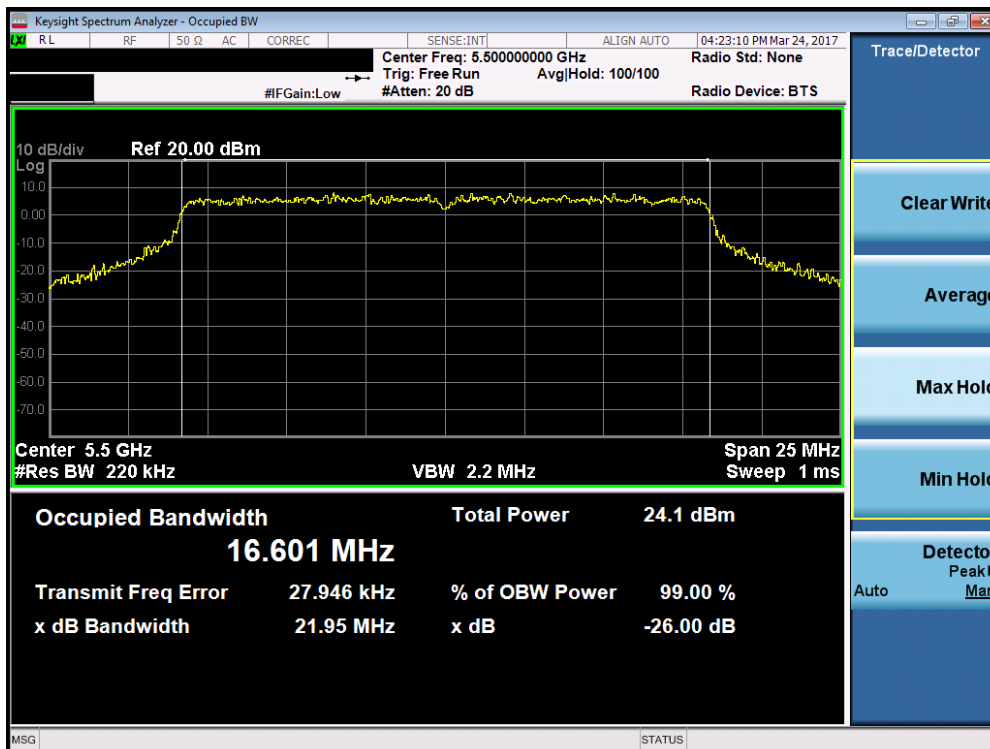


Plot 7-31. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 33 of 227

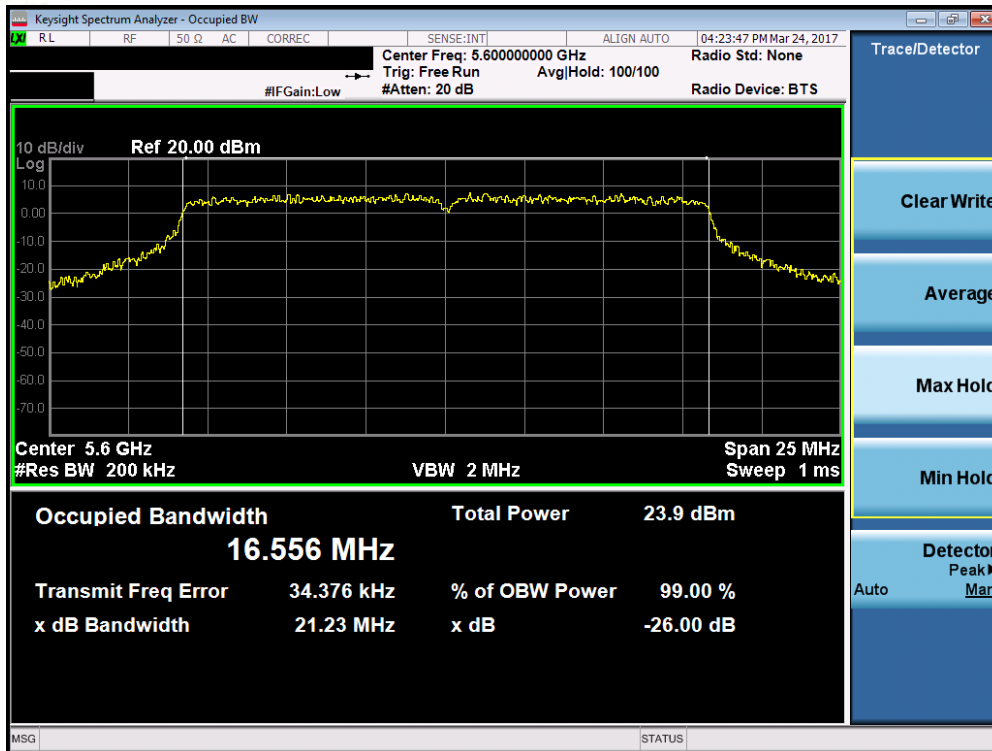


Plot 7-32. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

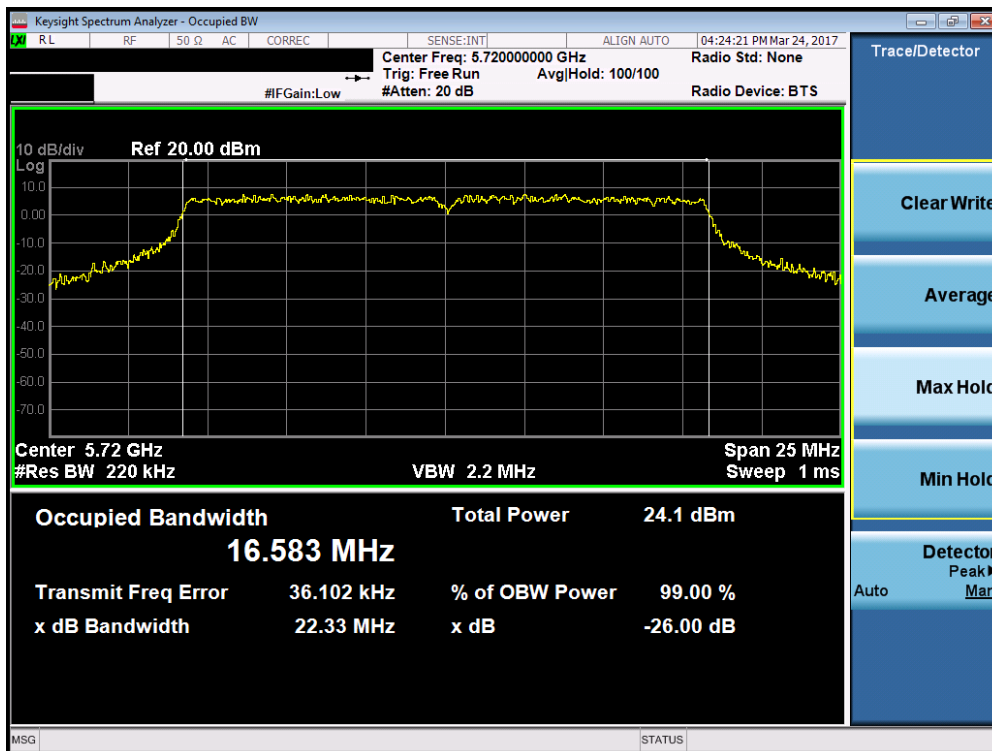


Plot 7-33. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 34 of 227

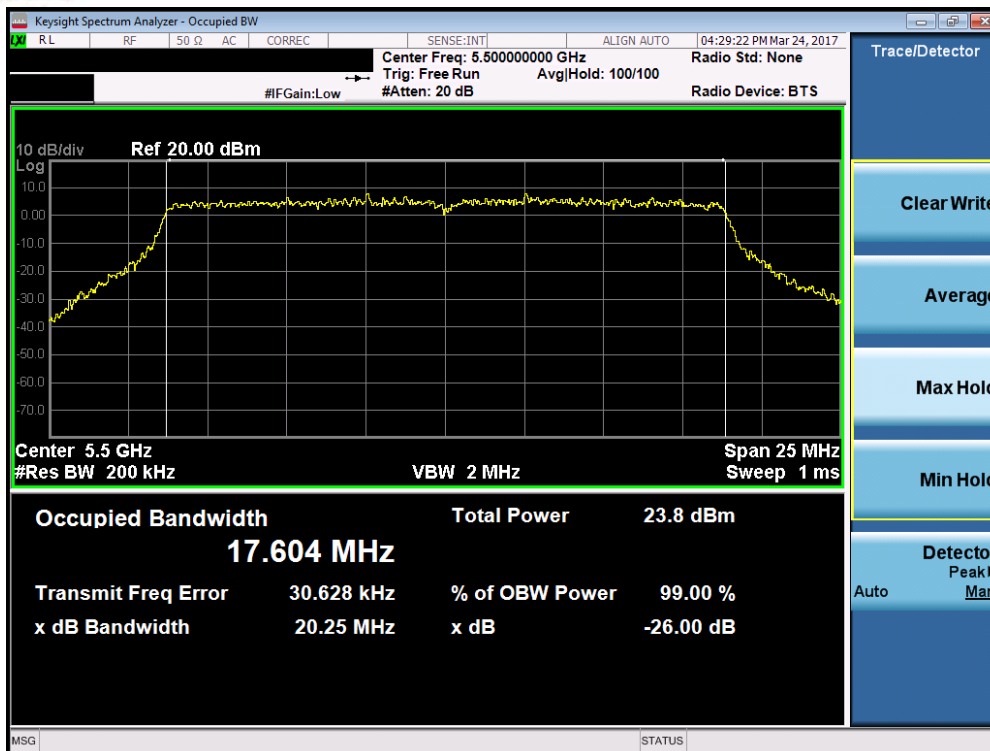


Plot 7-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

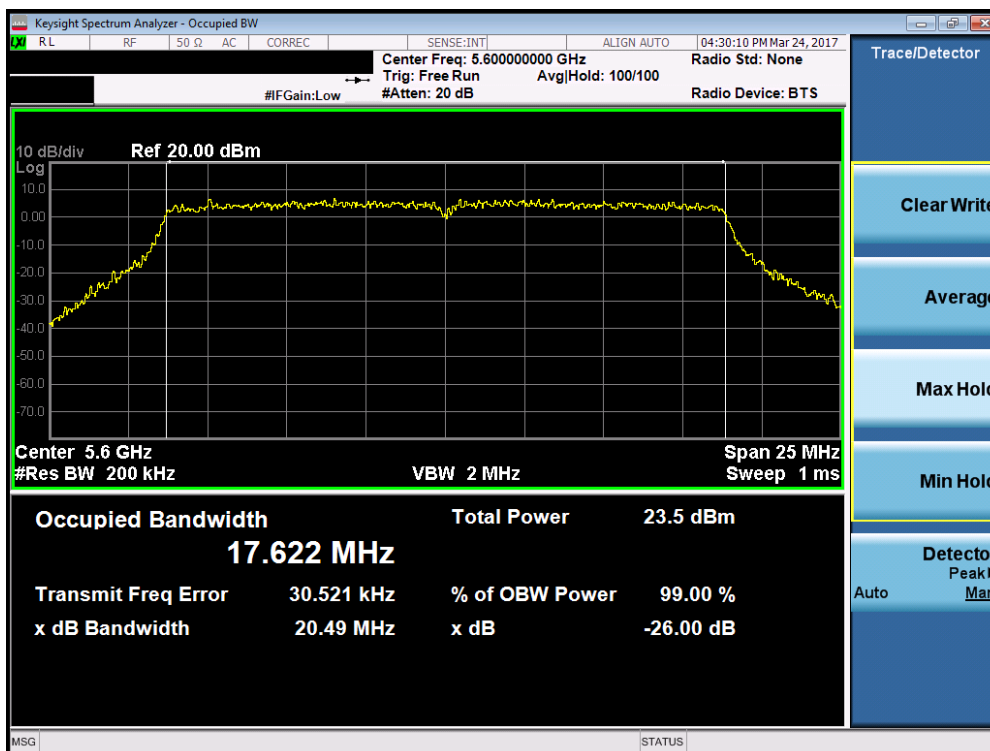


Plot 7-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 35 of 227

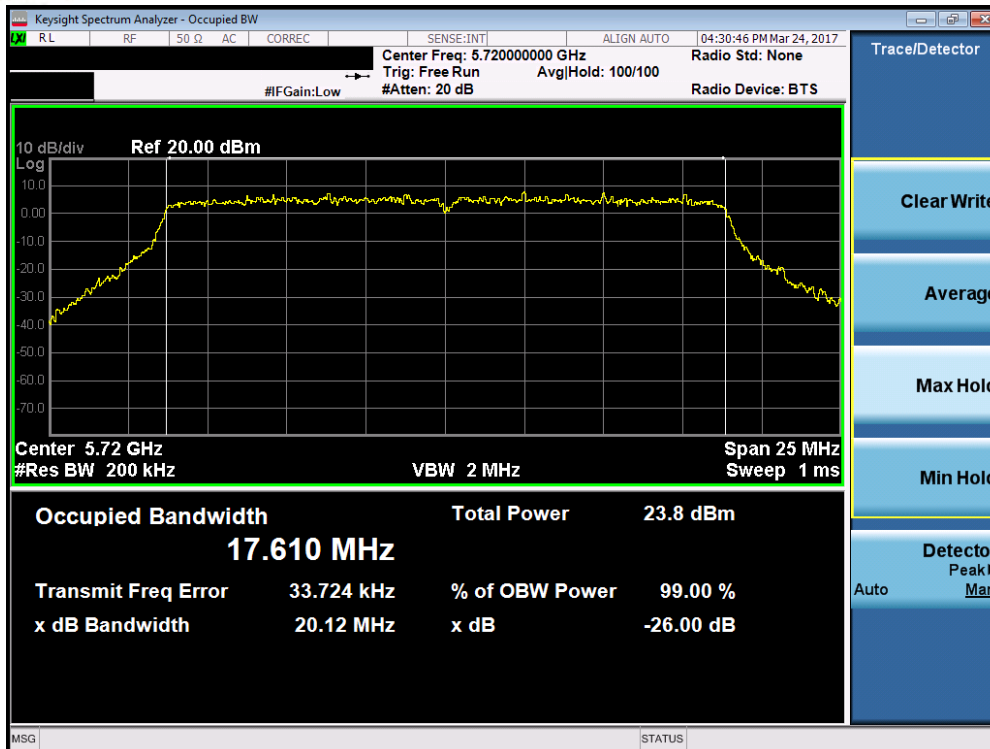


Plot 7-36. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

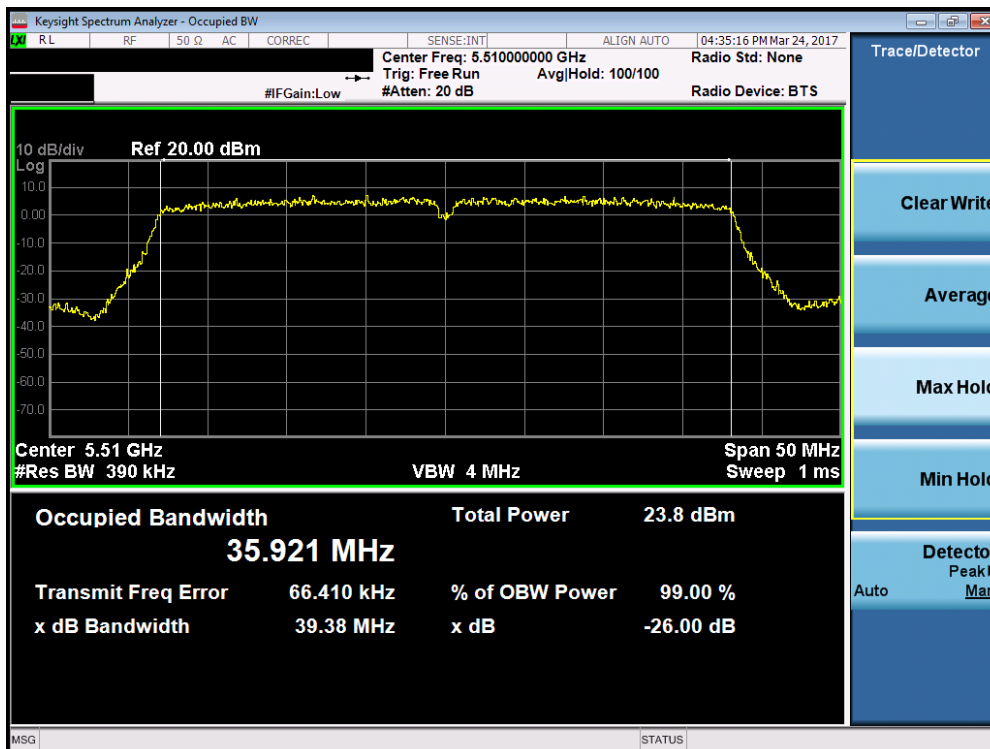


Plot 7-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 36 of 227

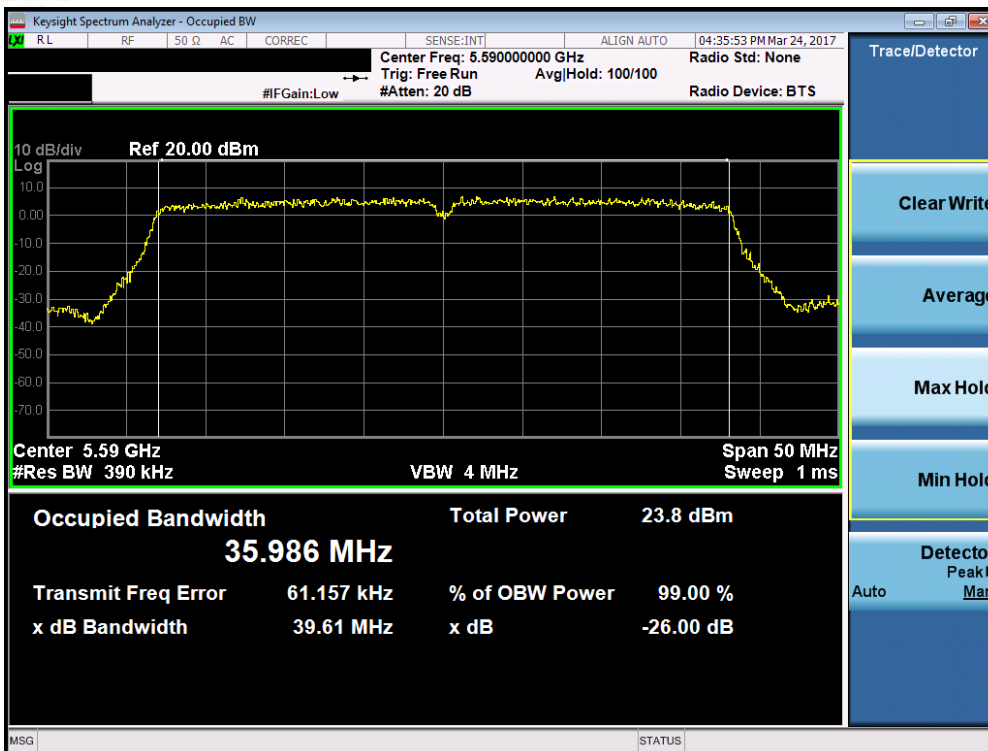


Plot 7-38. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

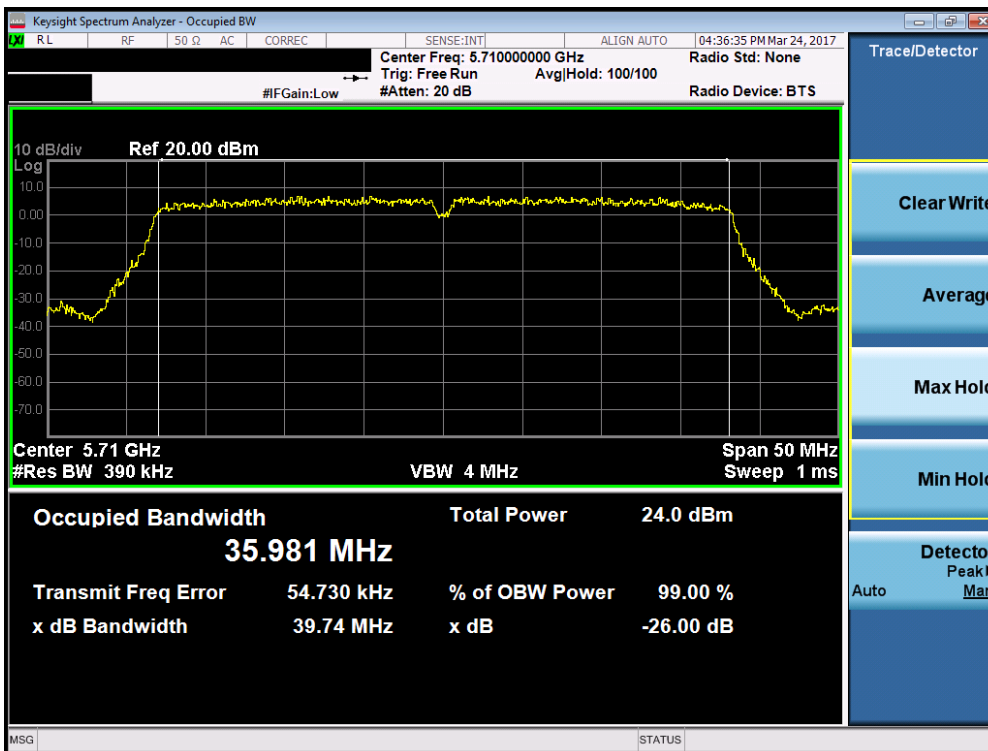


Plot 7-39. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 37 of 227

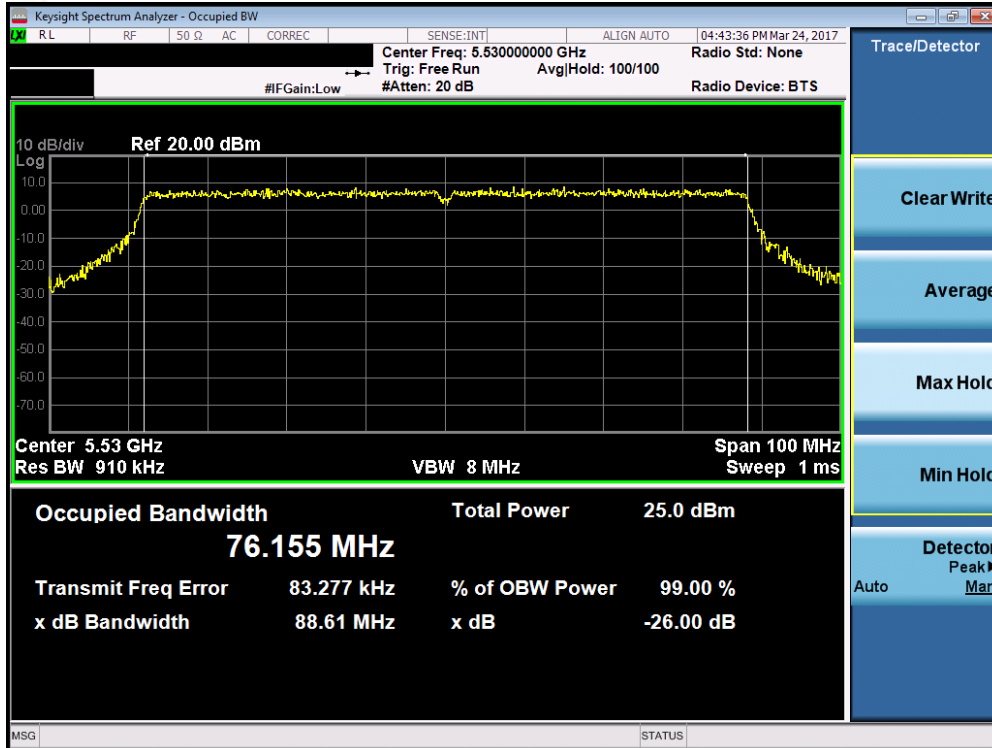


Plot 7-40. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

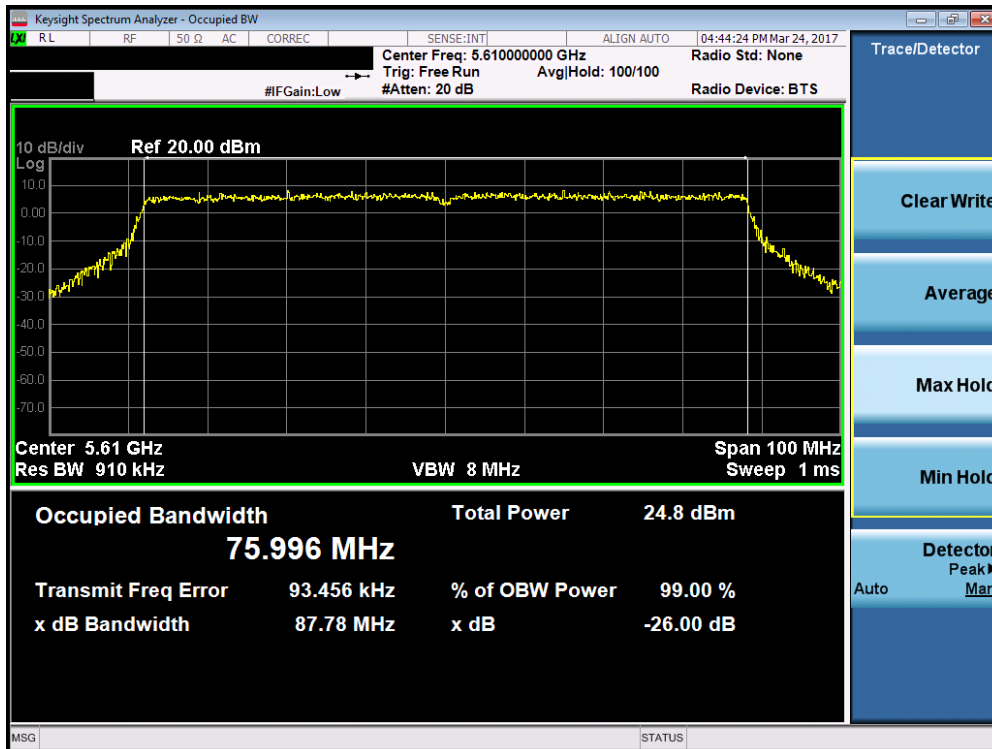

Plot 7-41. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 38 of 227

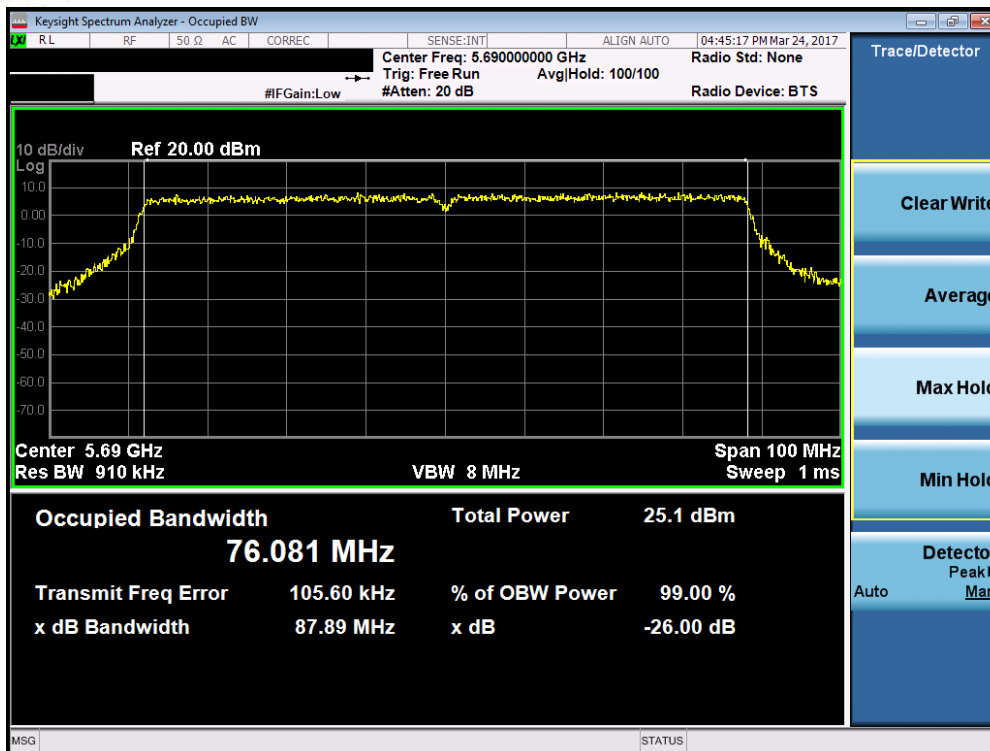



Plot 7-42. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 39 of 227

## Antenna-3 26 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 2A	5260	52	a	6	21.79
	5280	56	a	6	21.32
	5320	64	a	6	21.54
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.44
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.98
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.99
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.38
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.41
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	83.76
	5500	100	a	6	21.70
	5600	120	a	6	21.18
	5720	144	a	6	22.04
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.22
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.40
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.37
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.52
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.27
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.49
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	83.23
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	83.08
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	82.80


**Table 7-4. Conducted Bandwidth Measurements**

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 40 of 227	






Plot 7-43. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

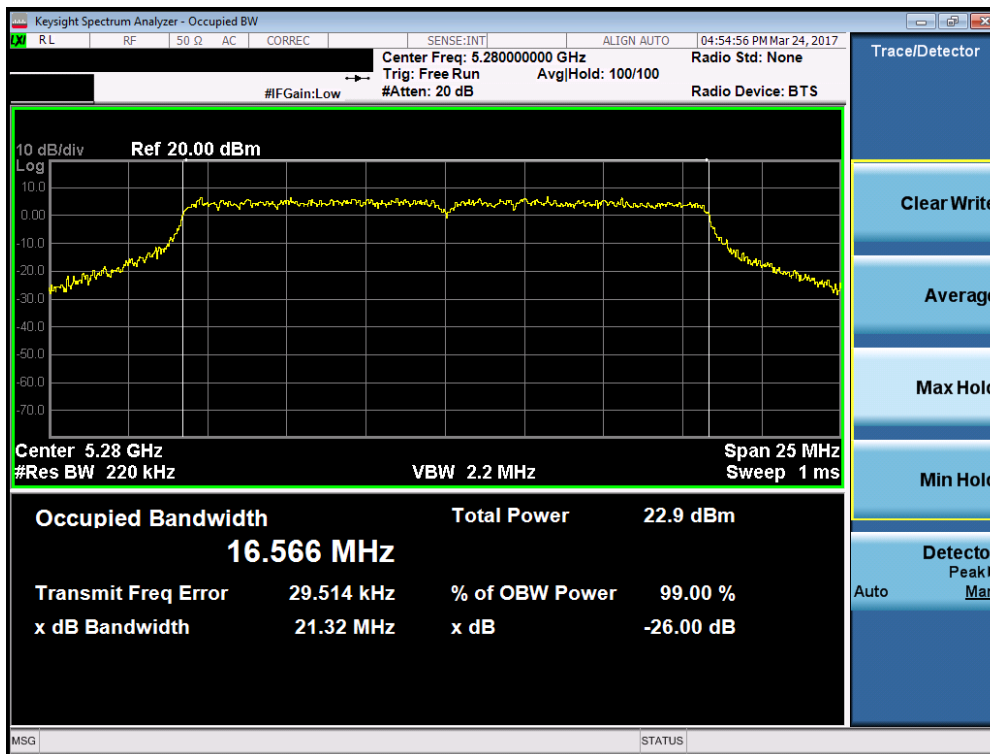


Plot 7-44. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 41 of 227

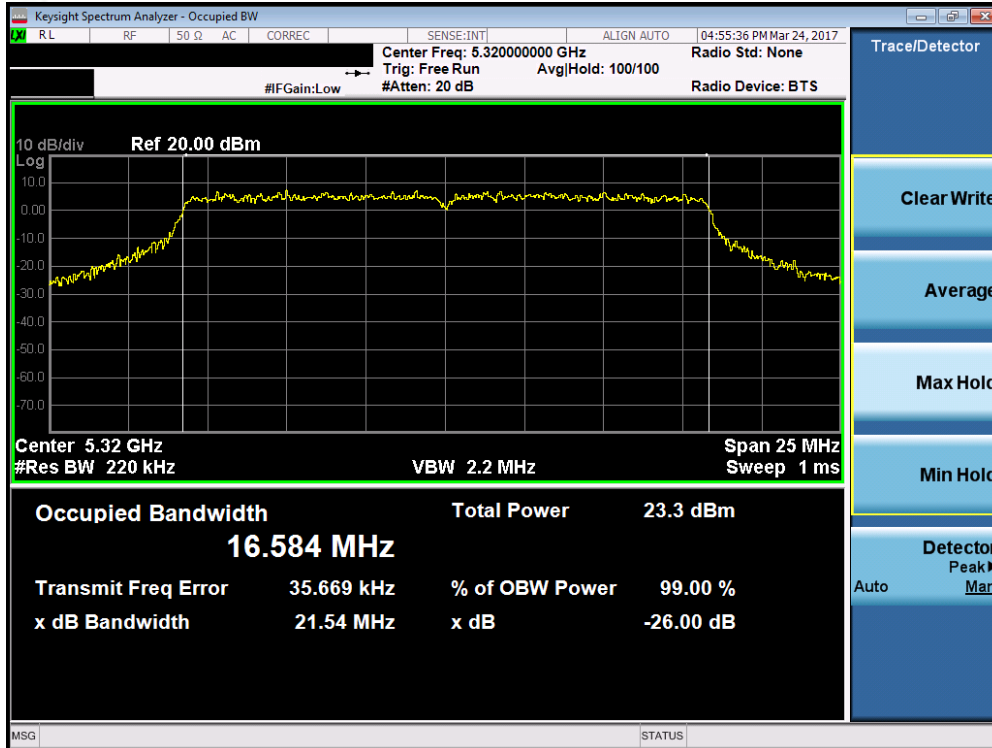


Plot 7-45. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

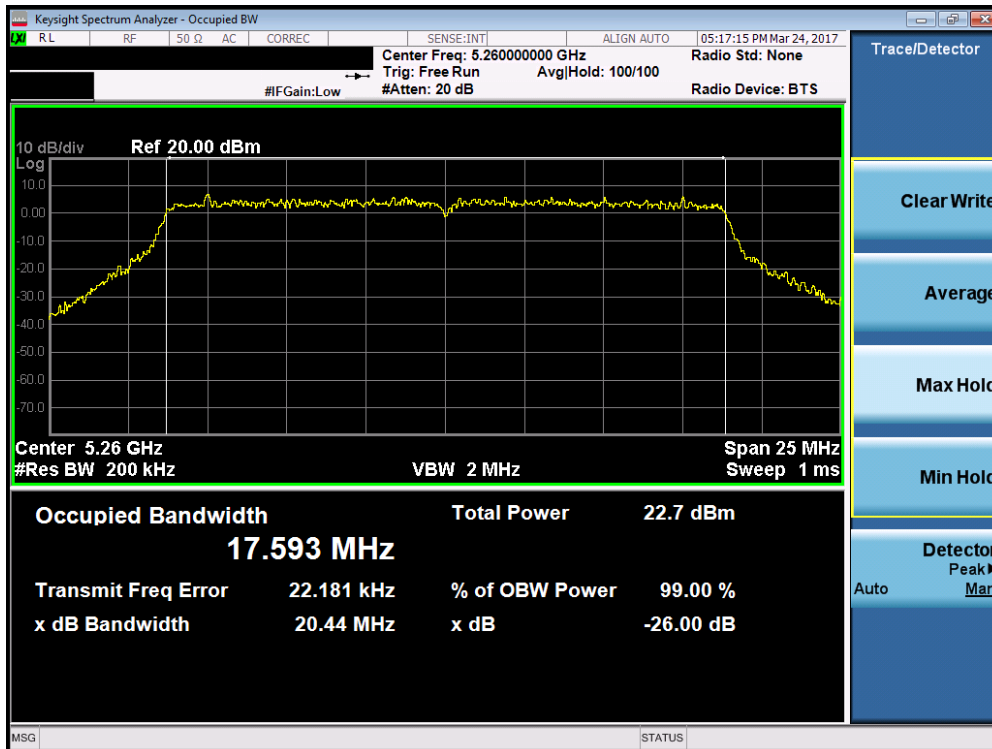


Plot 7-46. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 42 of 227

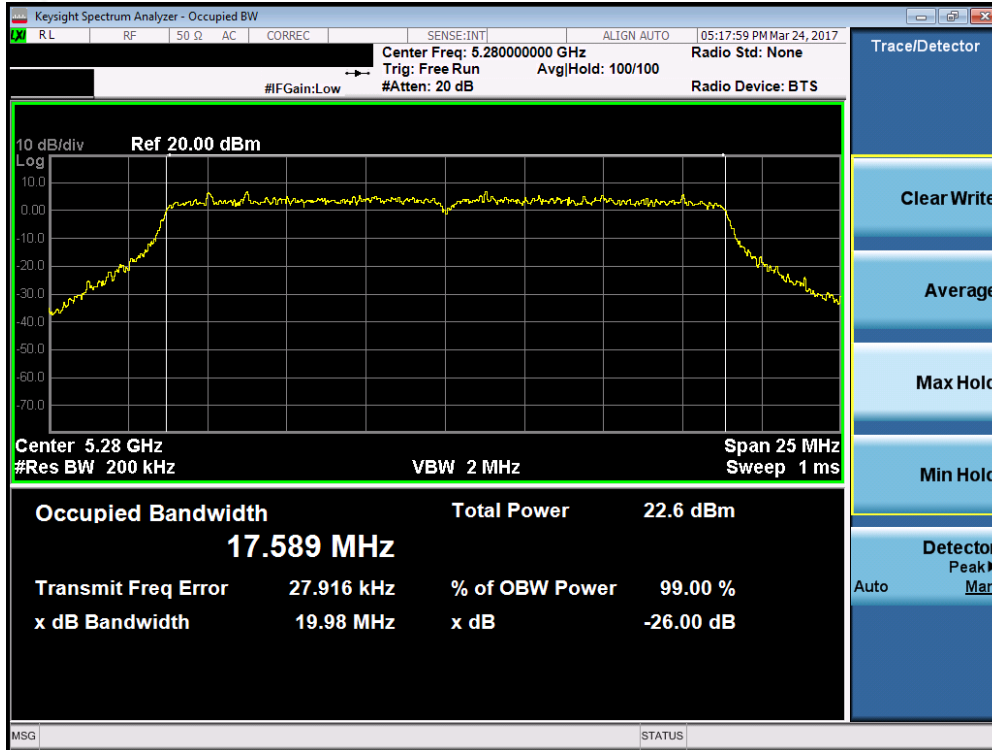


Plot 7-47. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

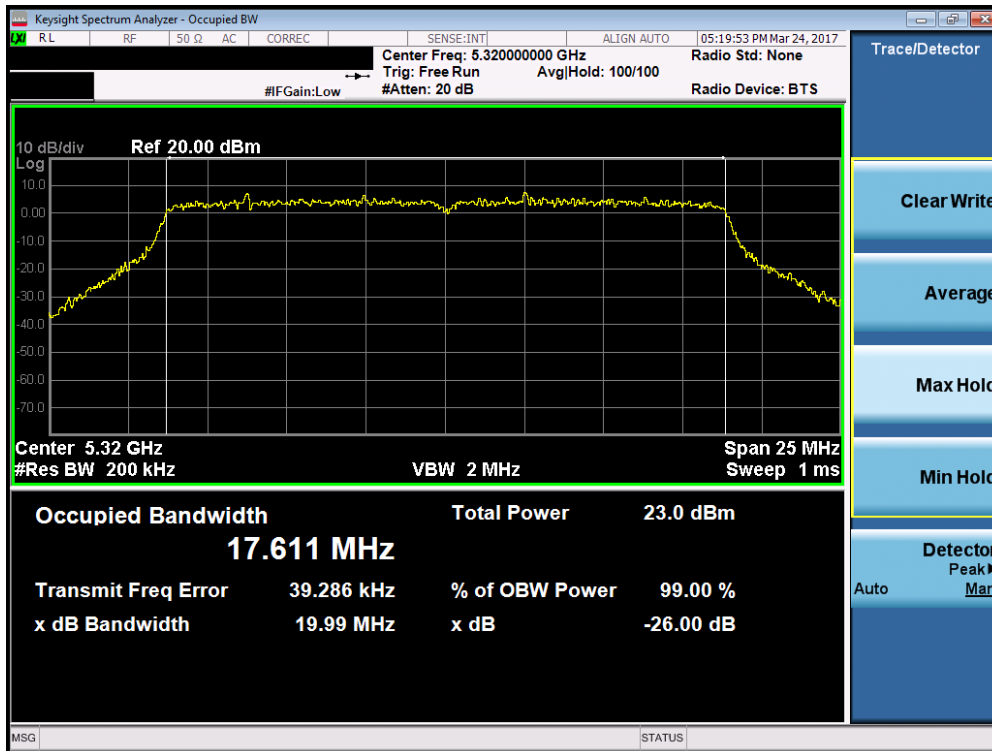


Plot 7-48. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 43 of 227

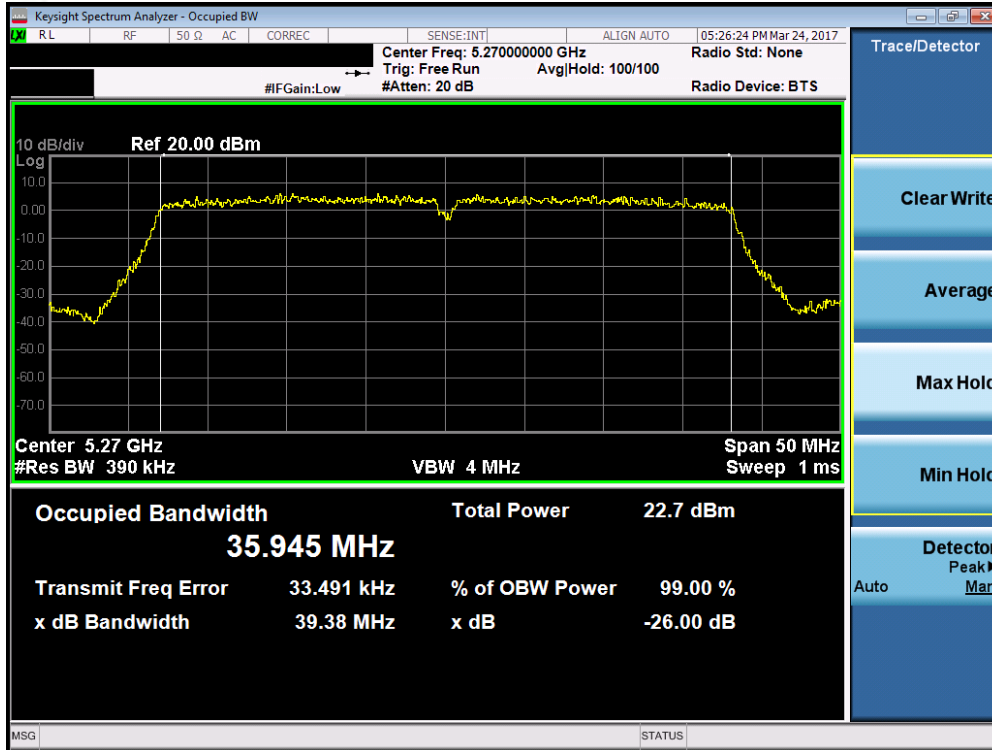


Plot 7-49. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

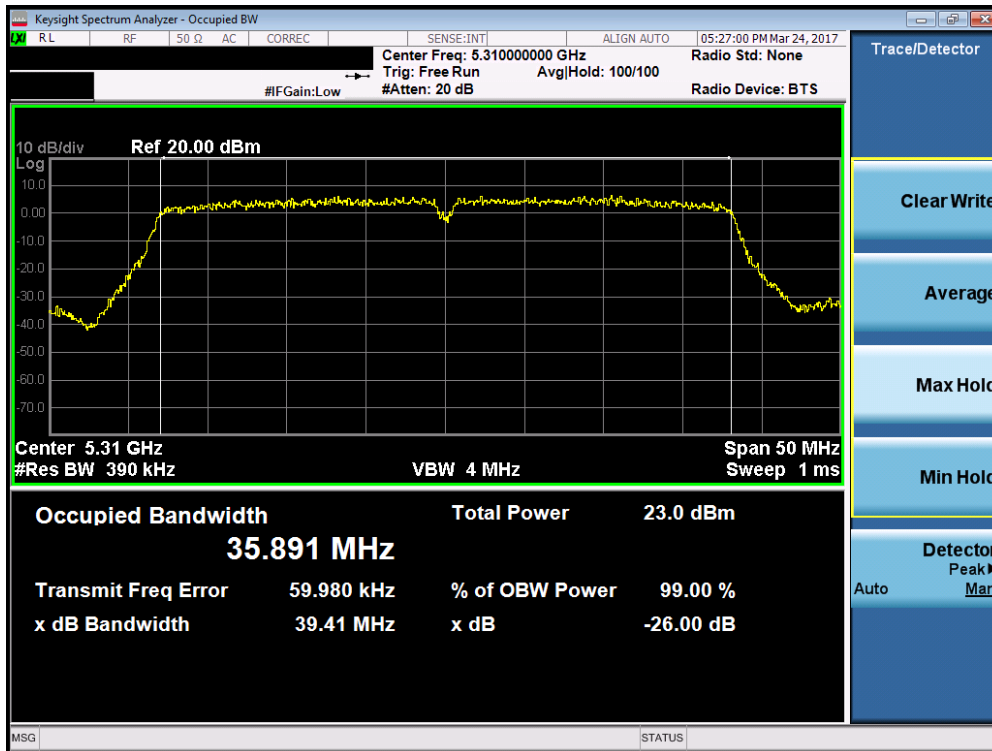


Plot 7-50. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 44 of 227

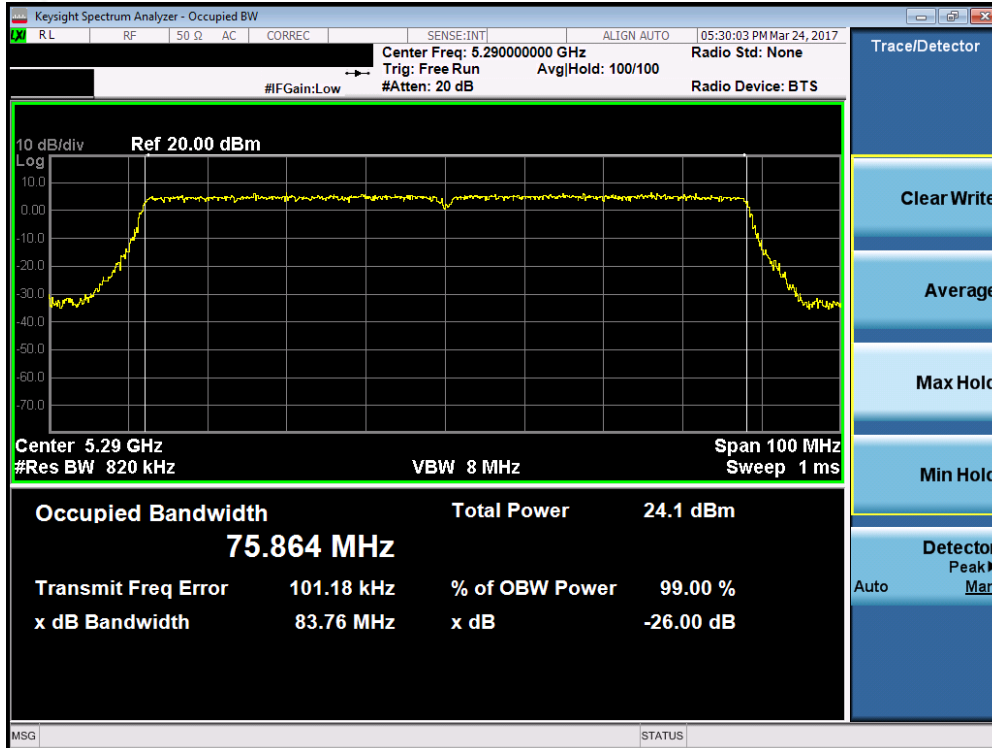


Plot 7-51. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

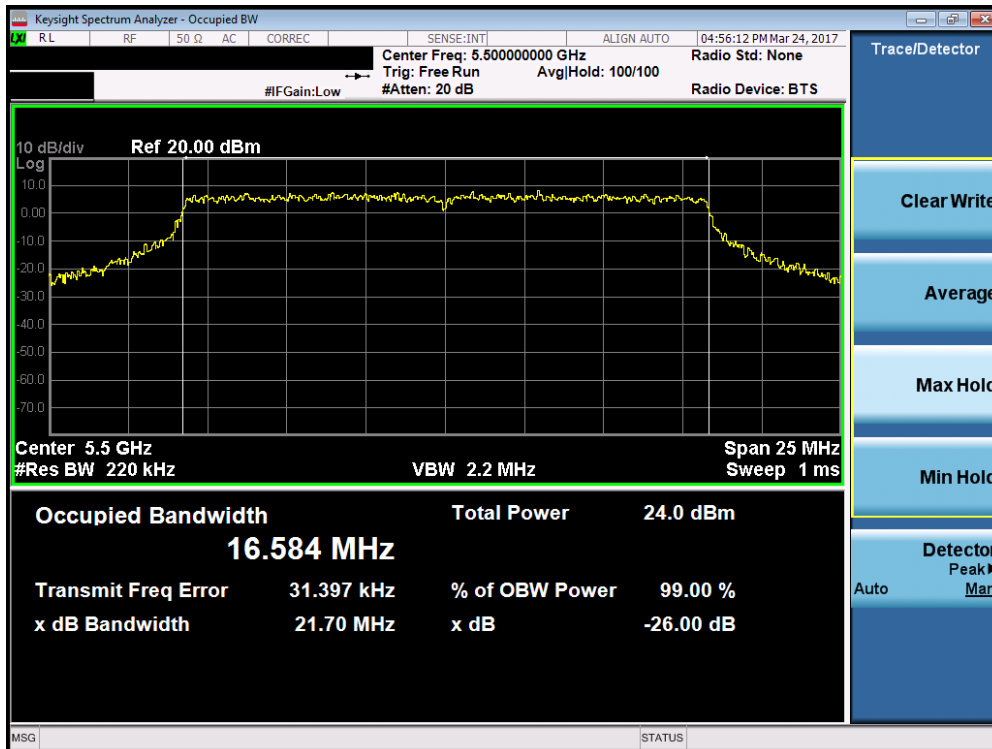


Plot 7-52. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 45 of 227

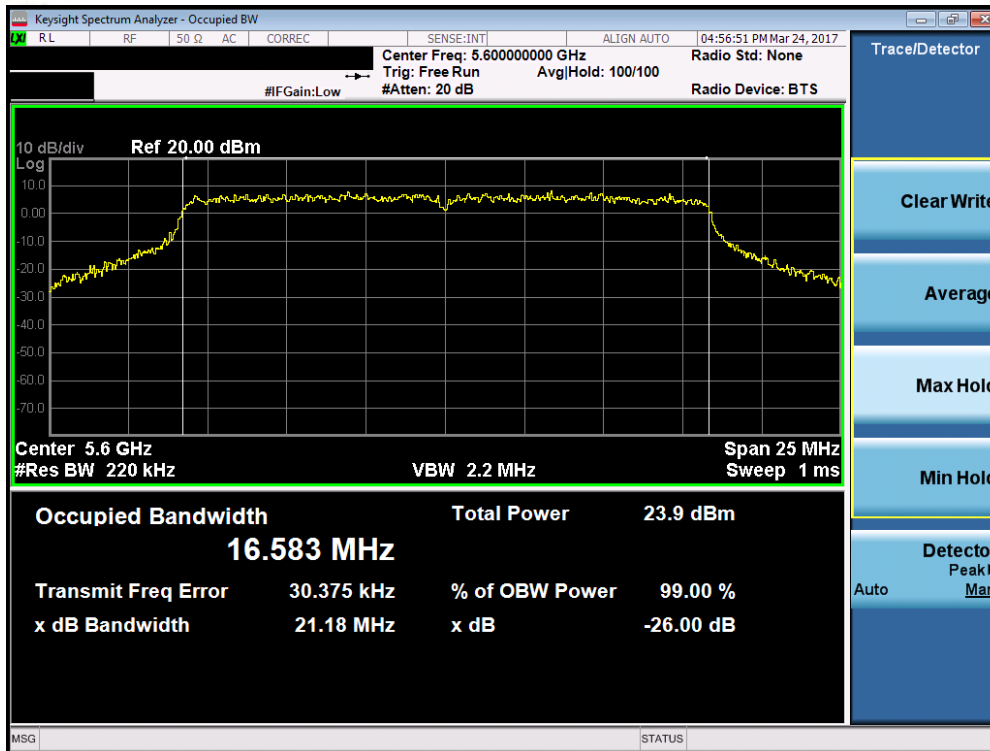


Plot 7-53. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

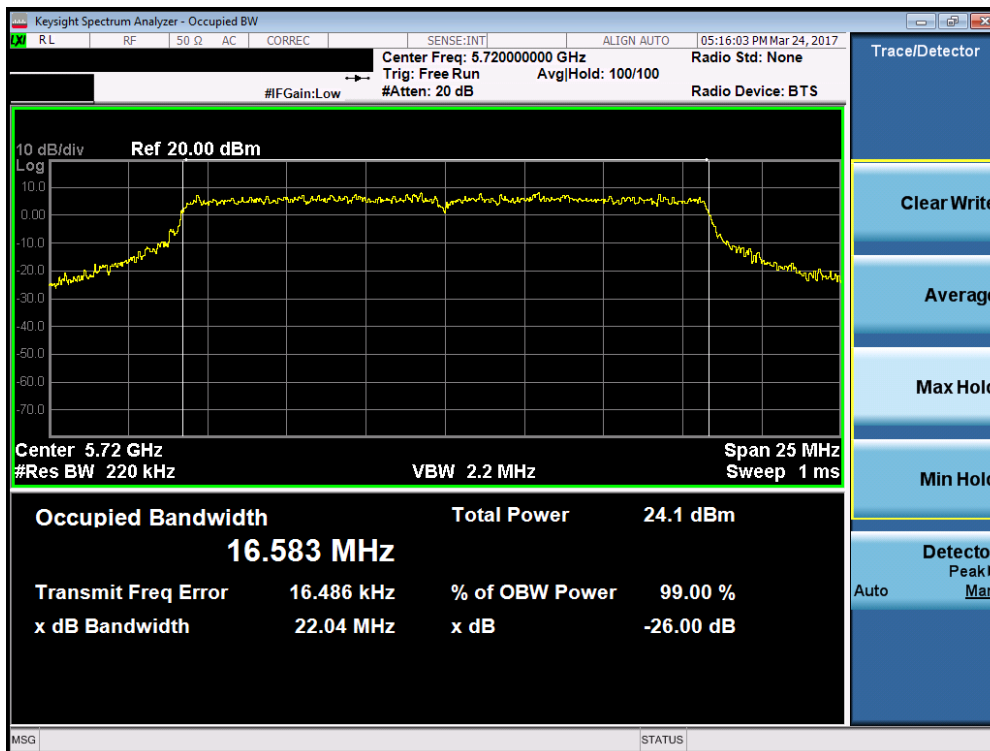


Plot 7-54. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 46 of 227

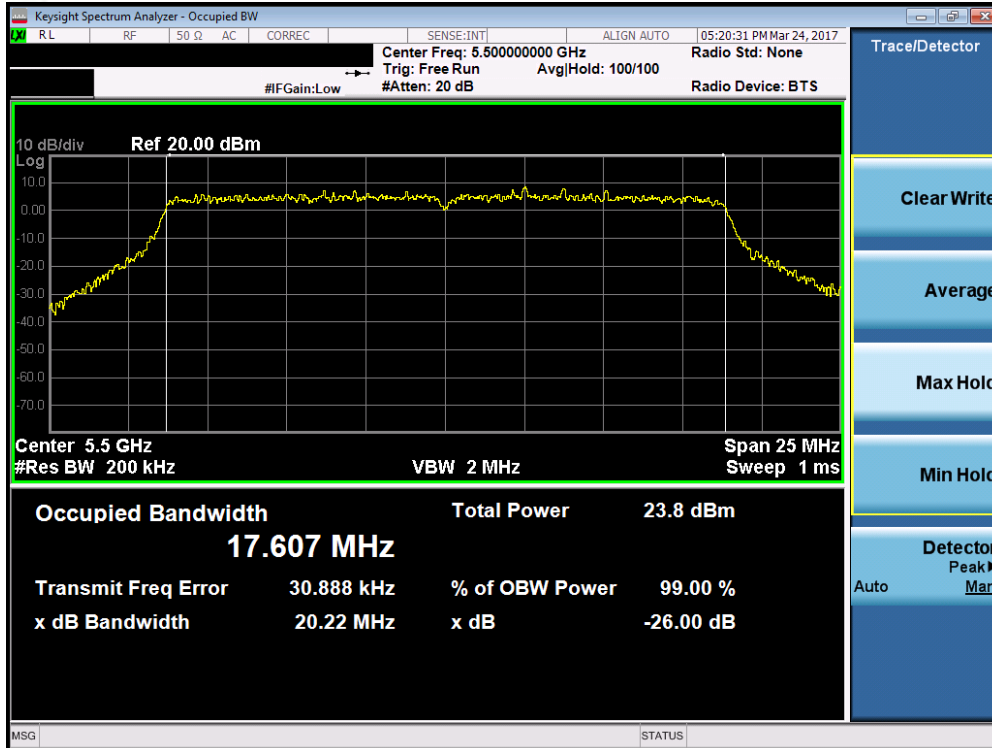


Plot 7-55. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

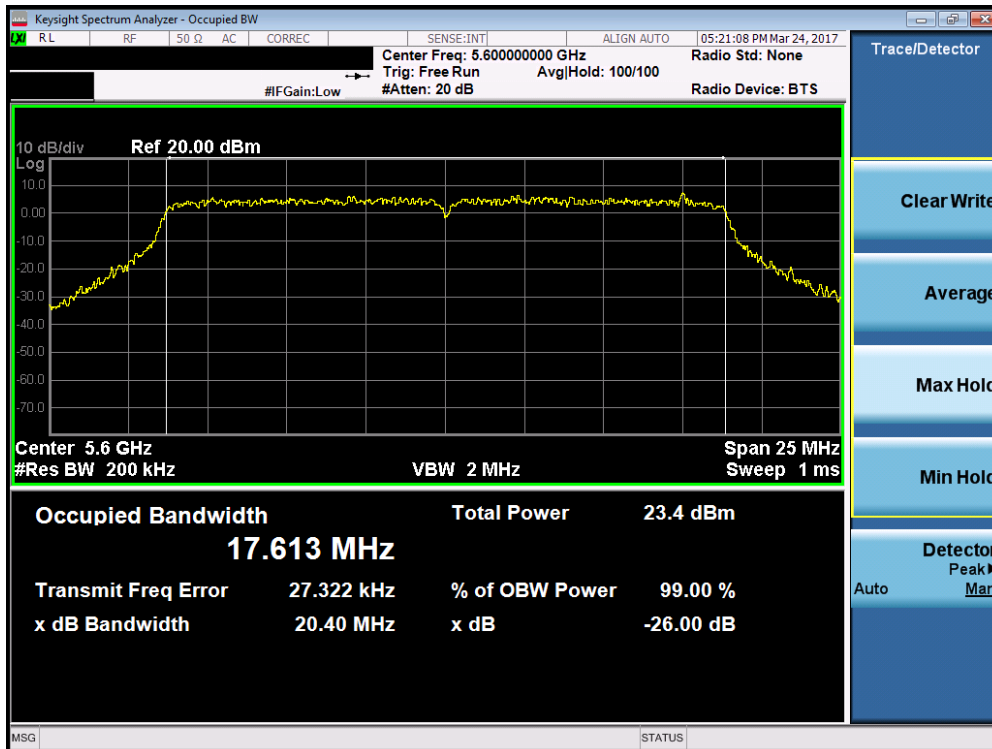


Plot 7-56. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 47 of 227

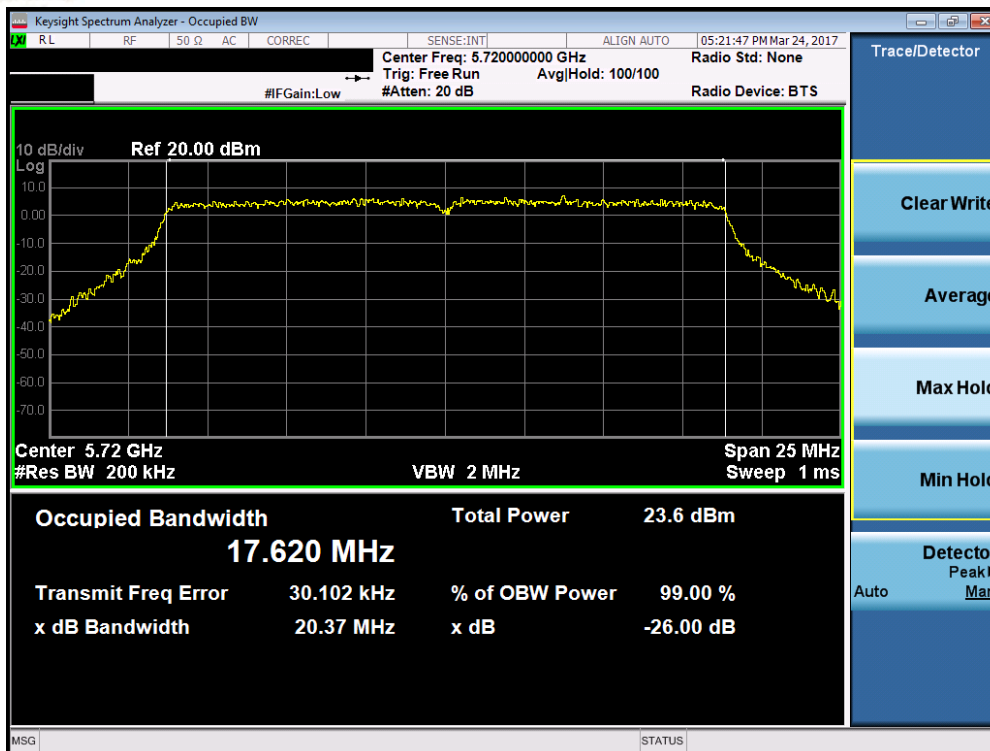


Plot 7-57. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

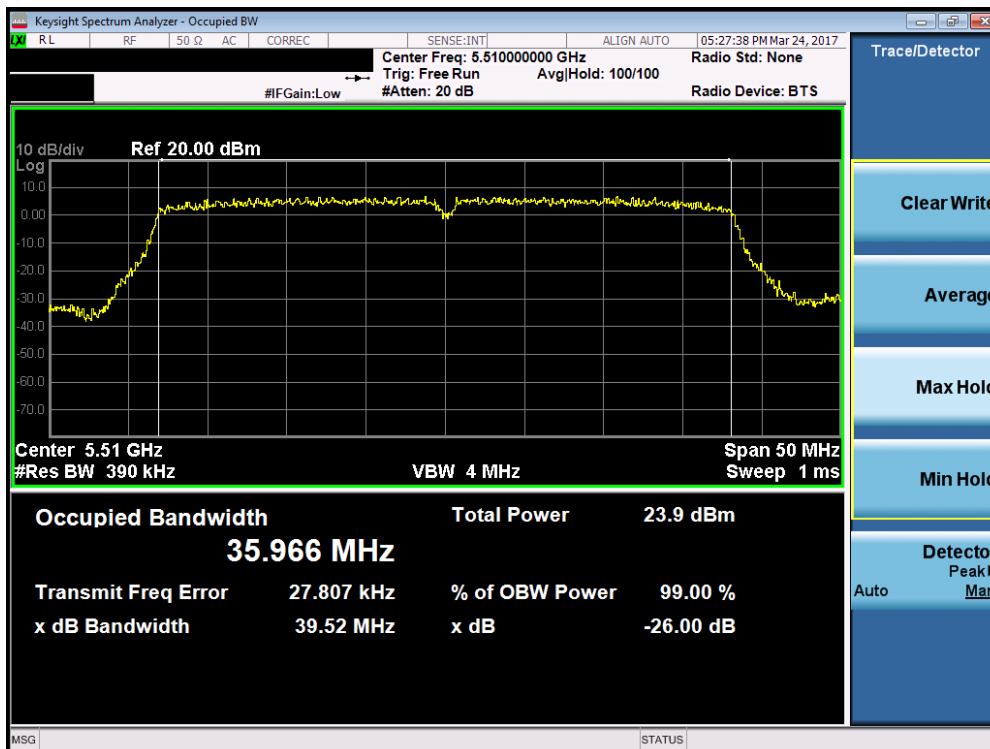


Plot 7-58. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 48 of 227



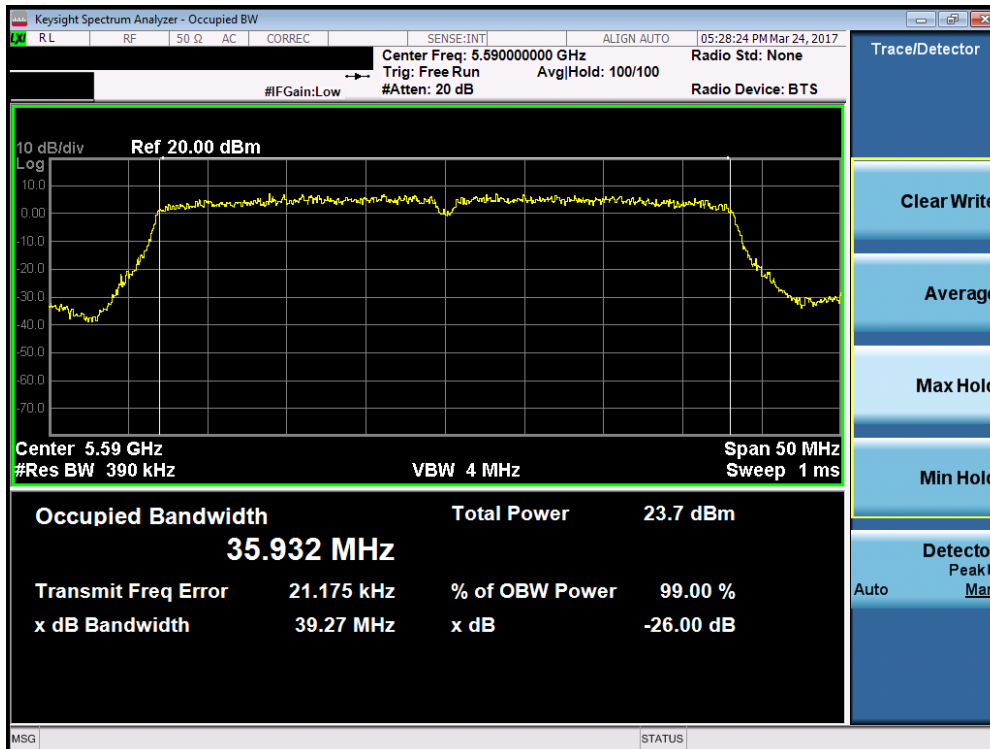


Plot 7-59. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

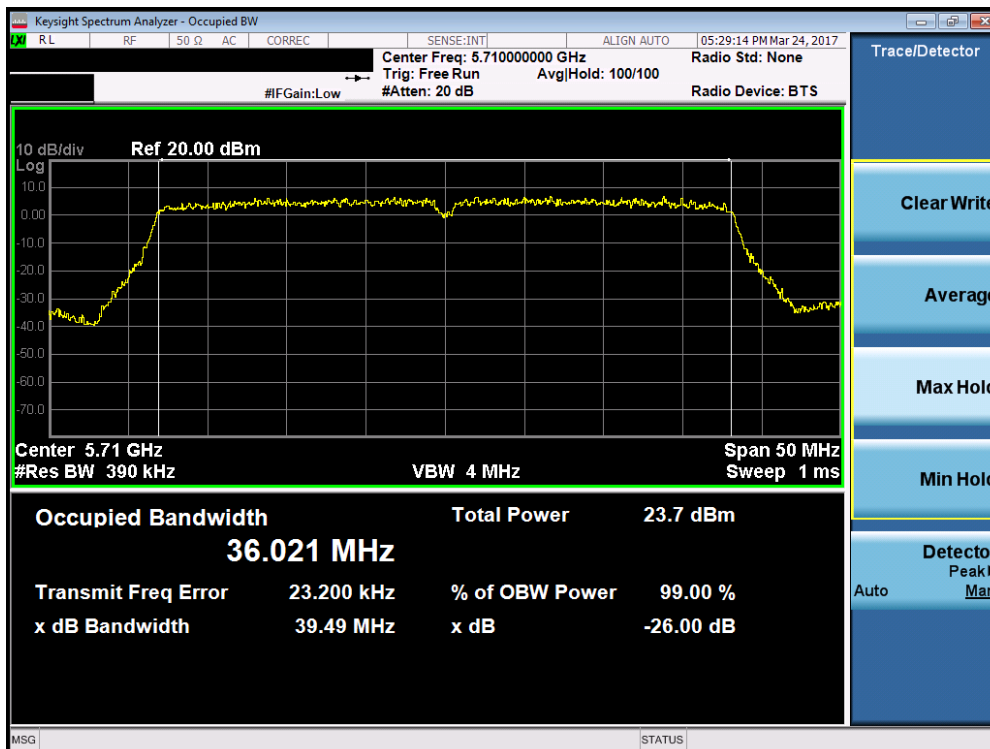


Plot 7-60. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 49 of 227

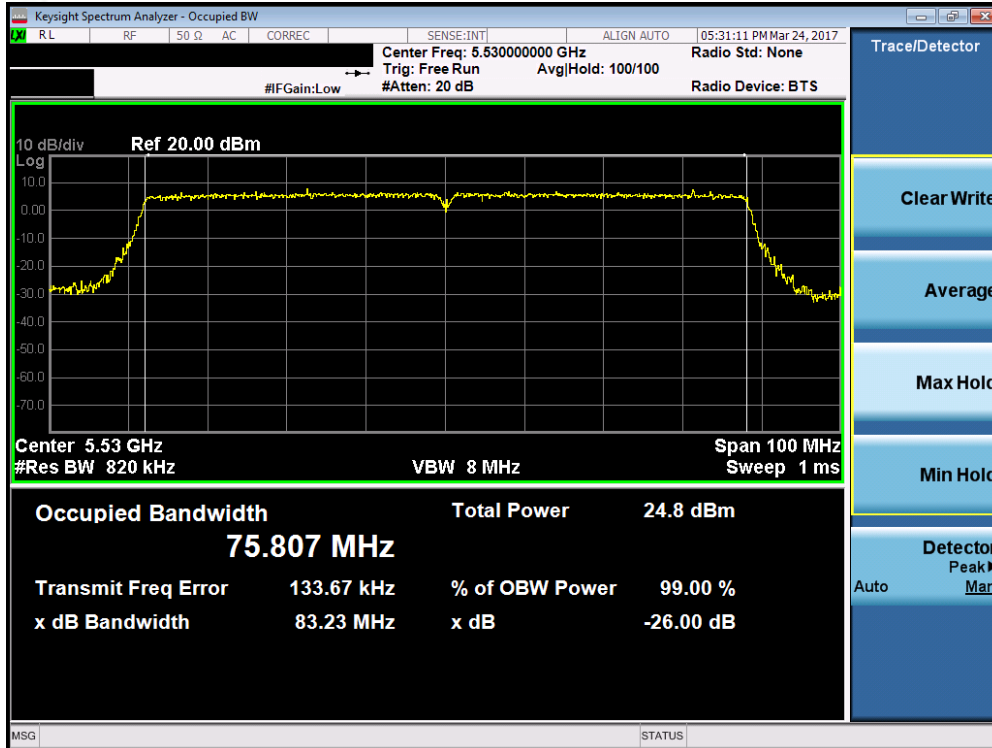


Plot 7-61. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

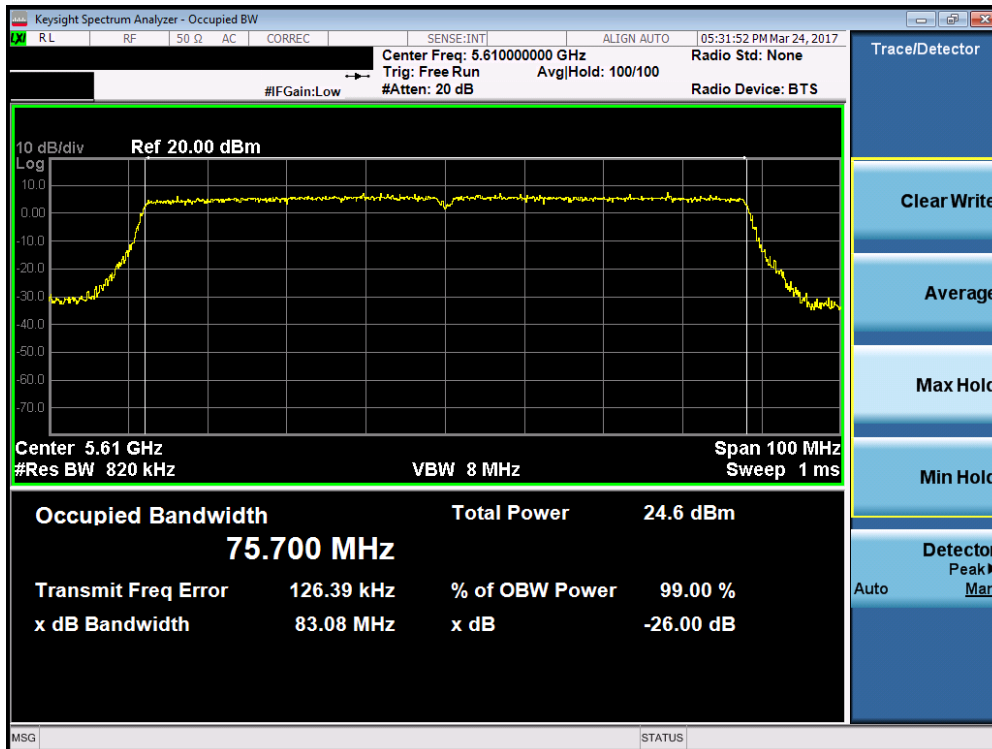

Plot 7-62. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 50 of 227

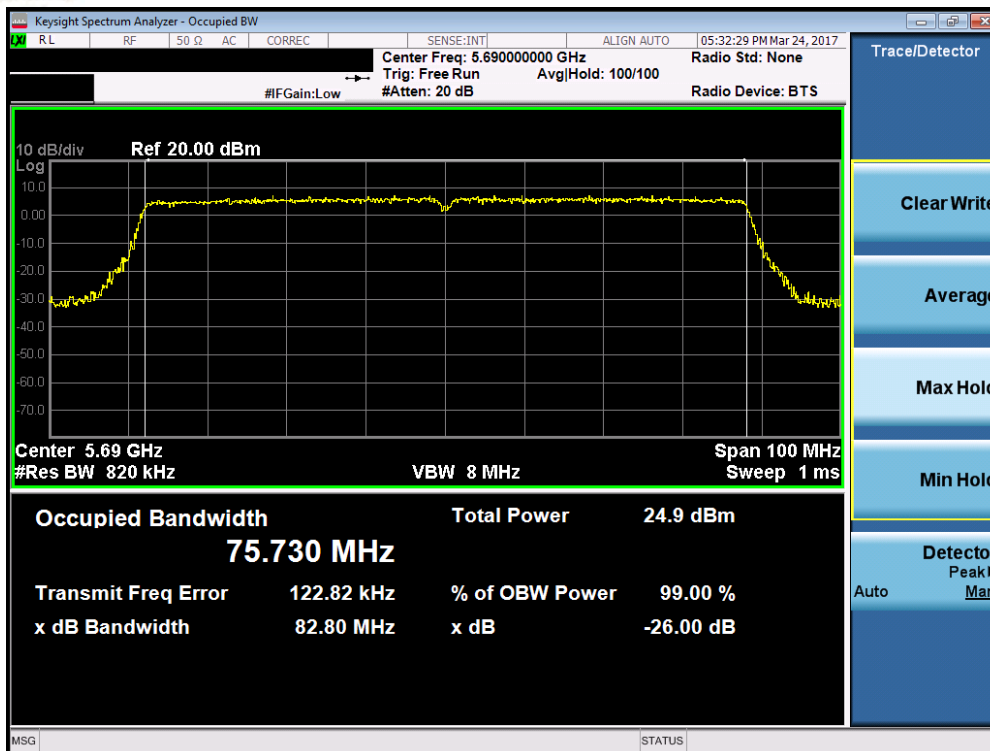



Plot 7-63. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 51 of 227

## Antenna-4 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 2A	5260	52	a	6	21.79
	5280	56	a	6	21.25
	5320	64	a	6	21.12
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.22
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.17
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.82
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.60
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.31
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	82.89
	5500	100	a	6	21.14
	5600	120	a	6	21.42
	5720	144	a	6	21.43
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.28
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.12
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.08
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.53
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.45
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.63
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	83.05
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	82.71
5690	138	ac (80MHz)	29.3/32.5 (MCS0)	83.66	

**Table 7-5. Conducted Bandwidth Measurements**

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point		Page 52 of 227

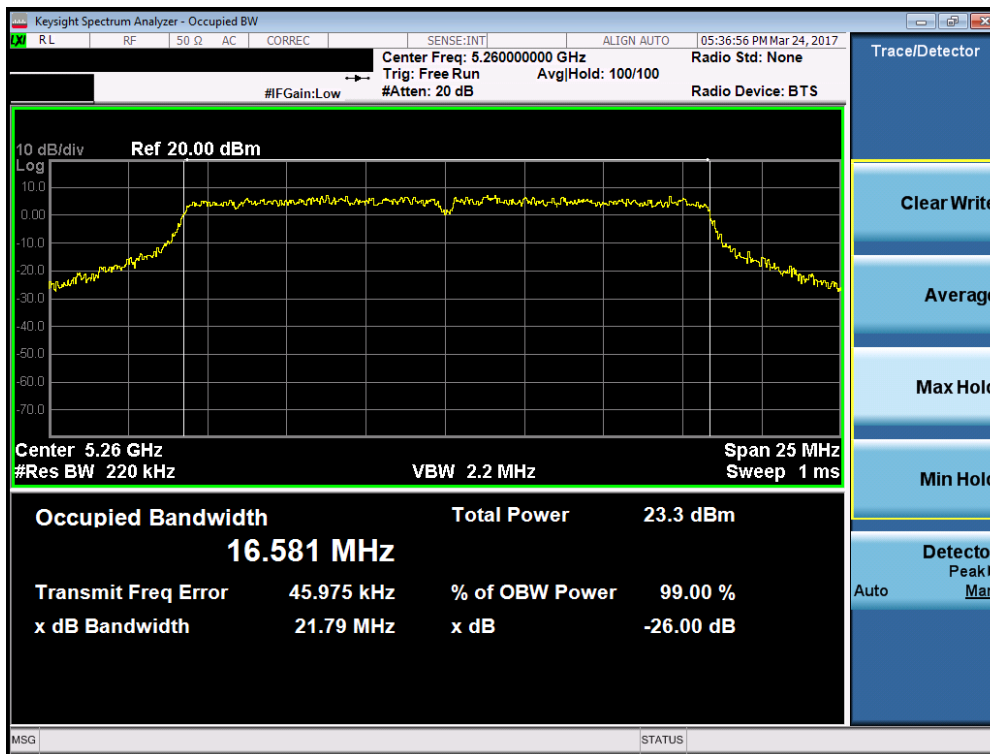

Plot 7-64. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

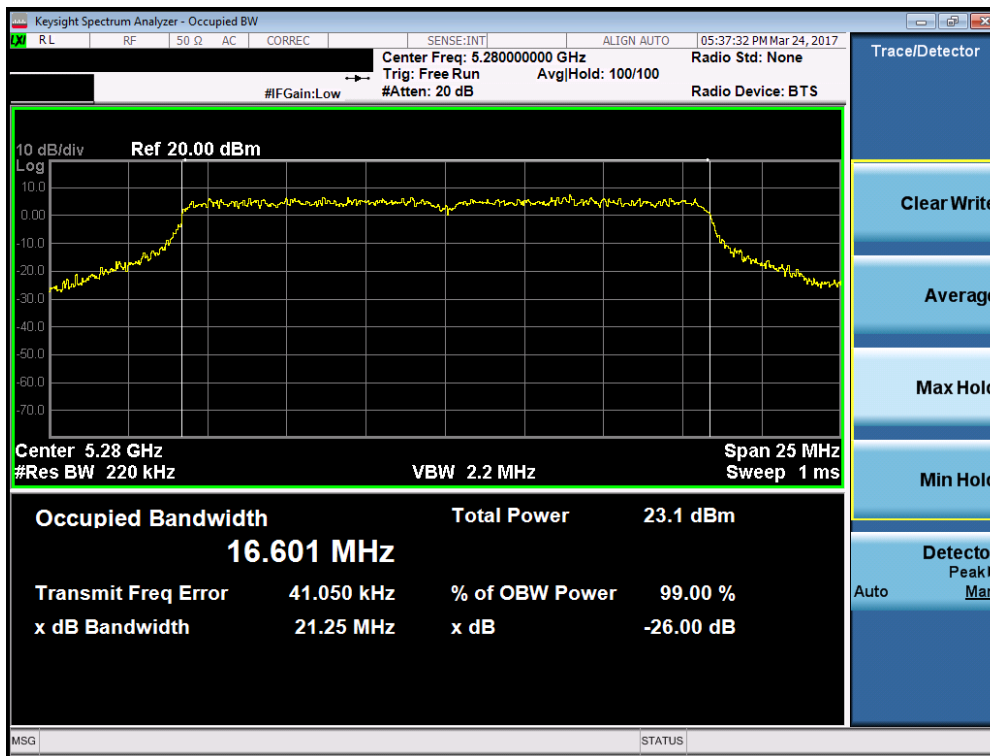


Plot 7-65. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 53 of 227	




Plot 7-66. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

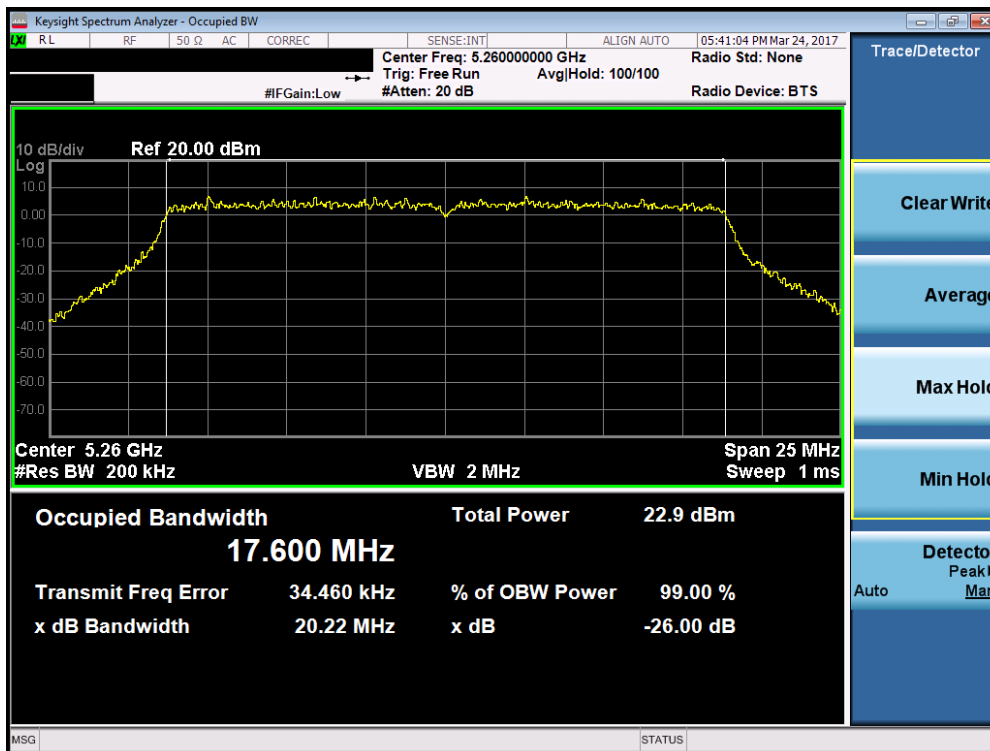


Plot 7-67. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 54 of 227

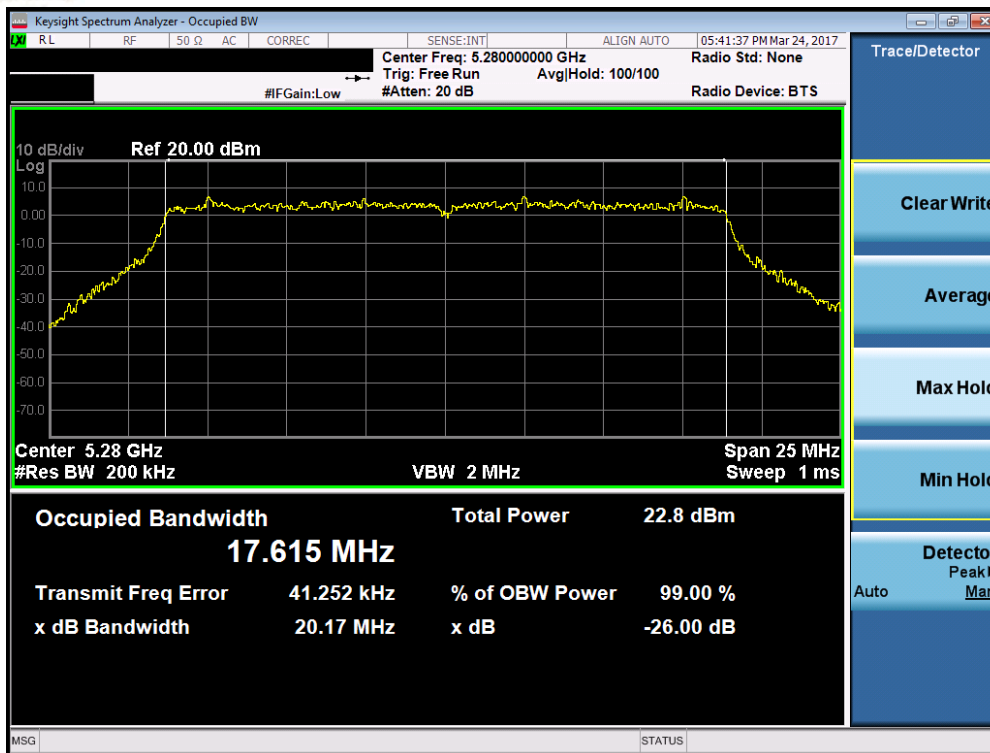


Plot 7-68. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

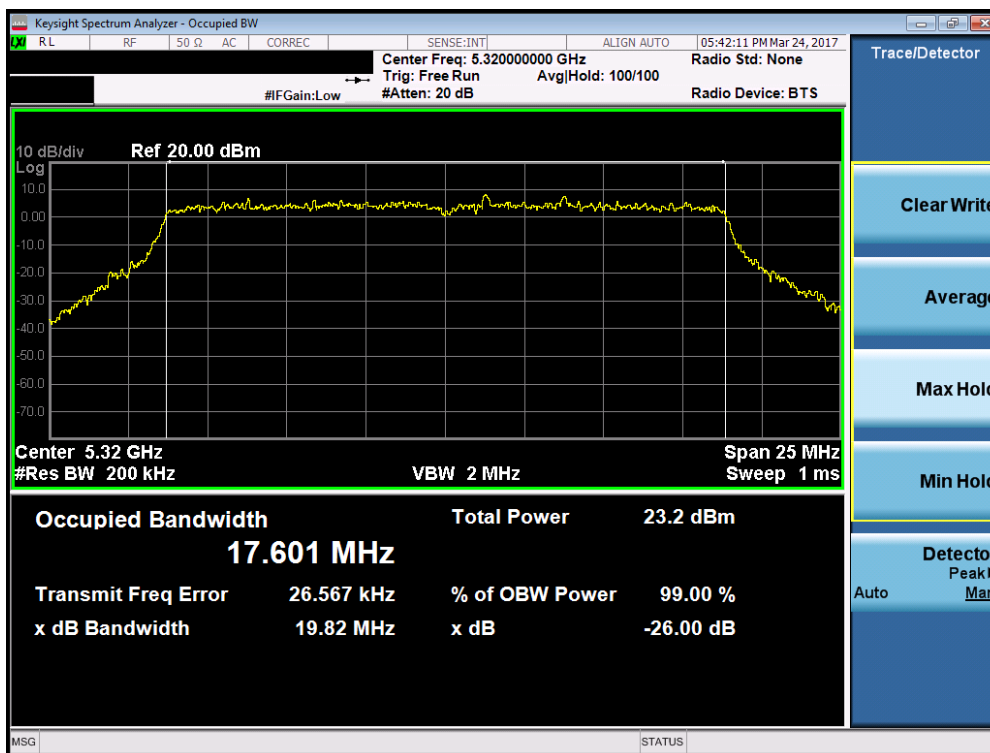


Plot 7-69. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 55 of 227

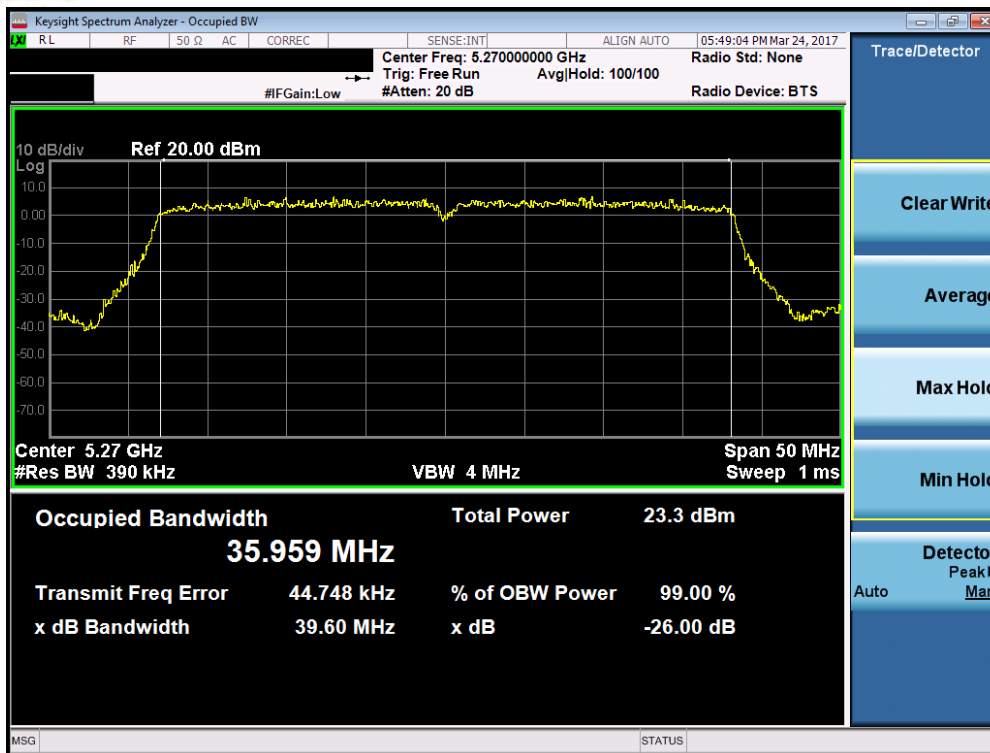


Plot 7-70. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

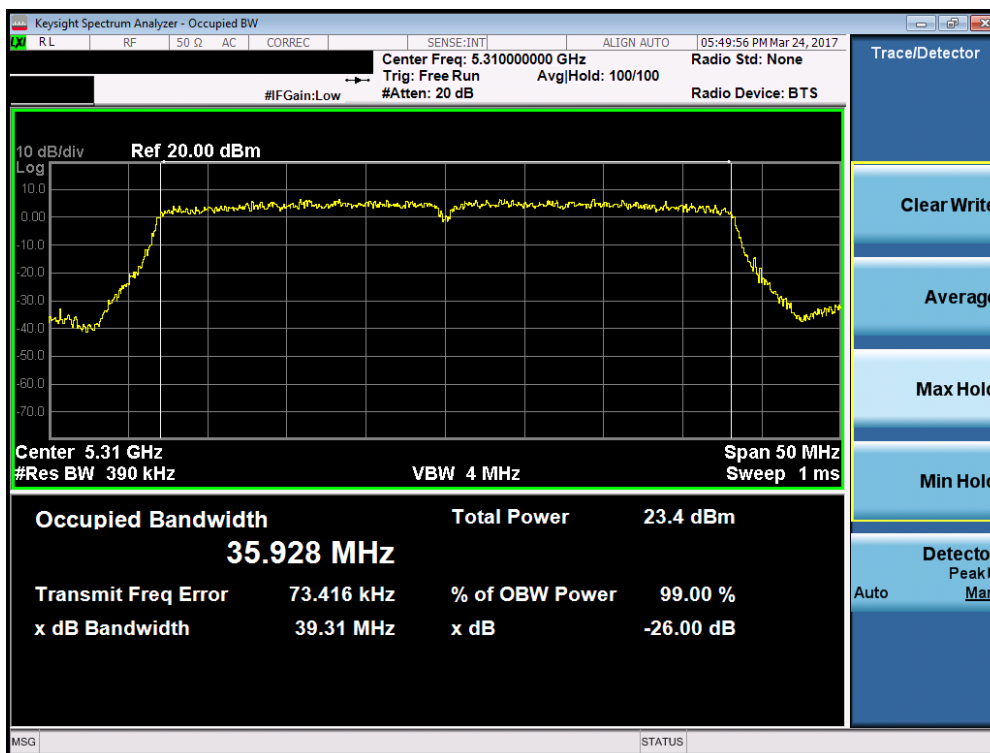


Plot 7-71. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 56 of 227



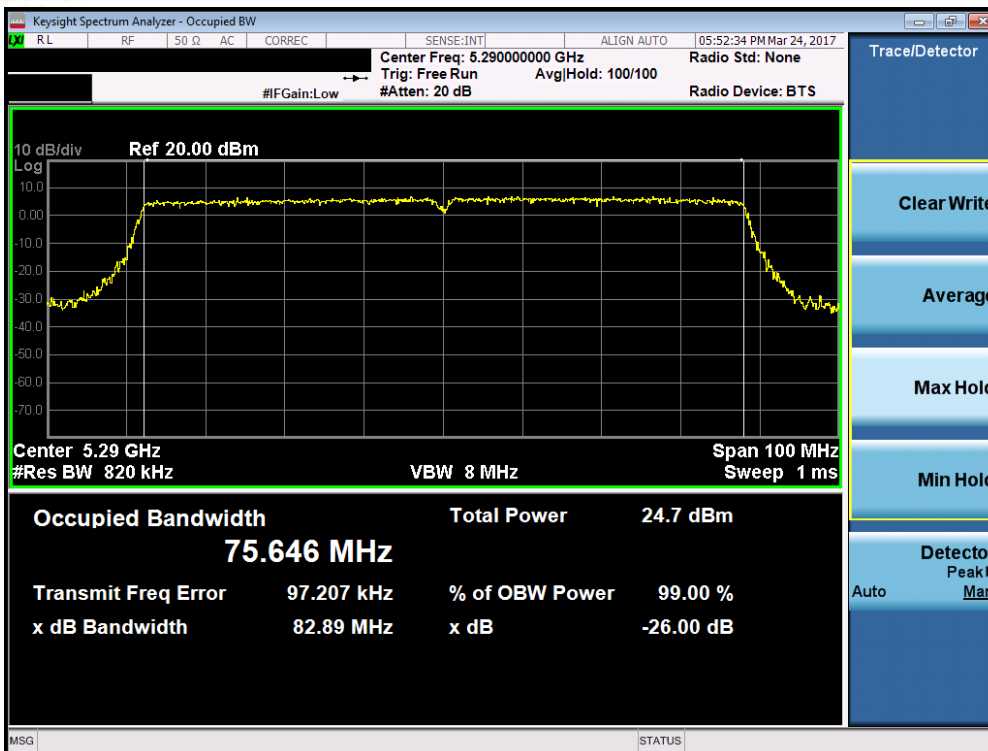


Plot 7-72. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

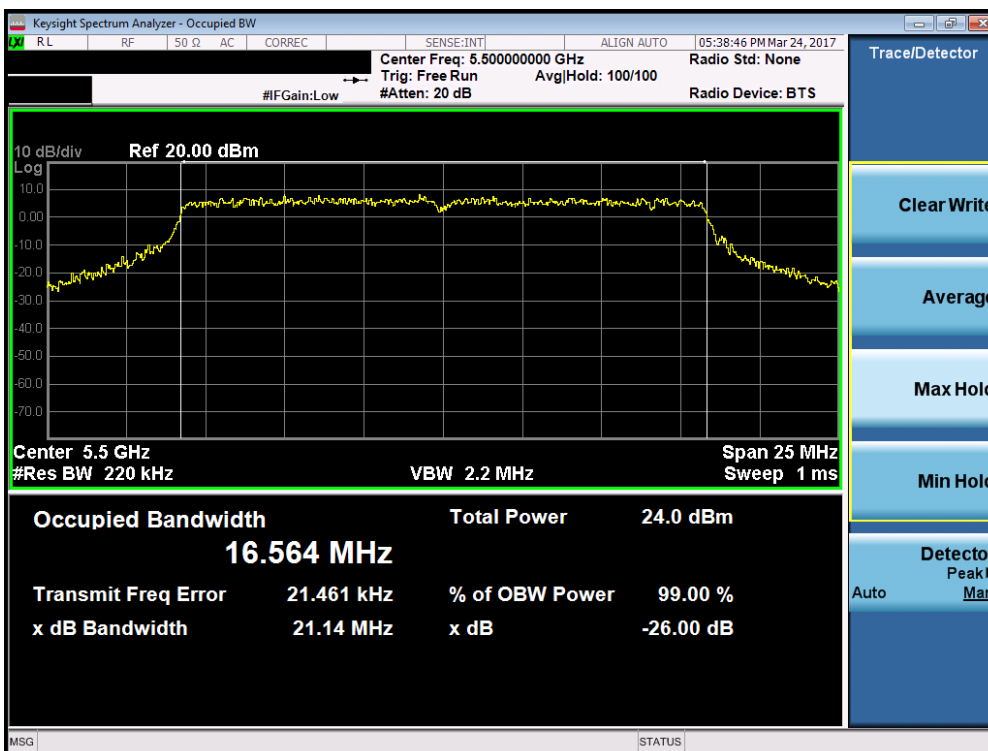


Plot 7-73. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 57 of 227

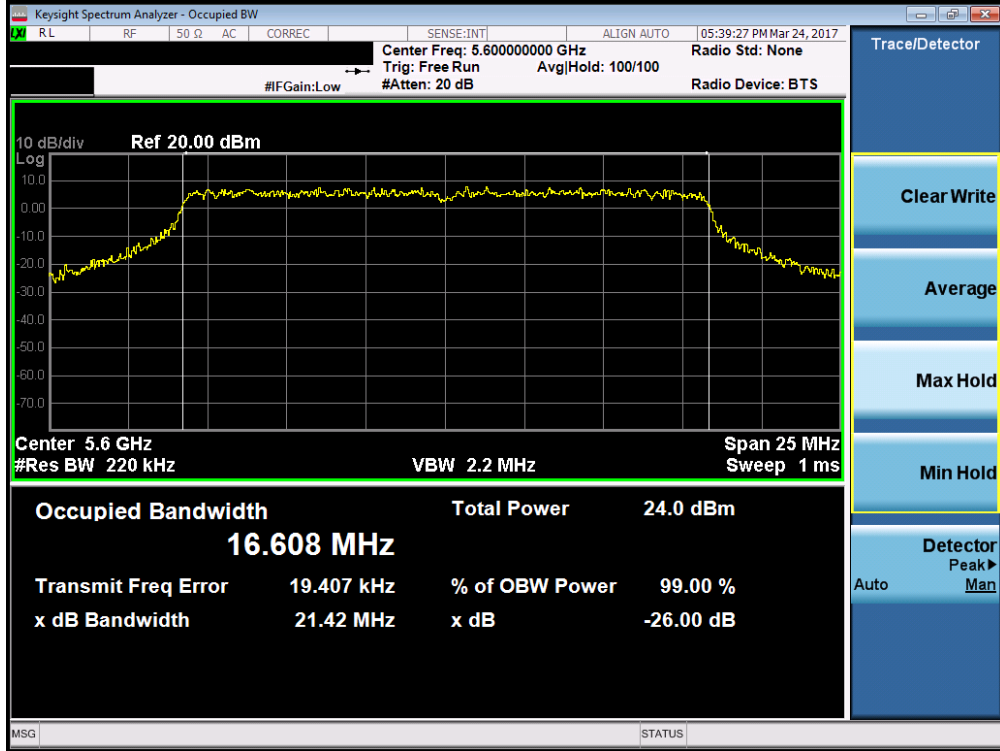


Plot 7-74. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

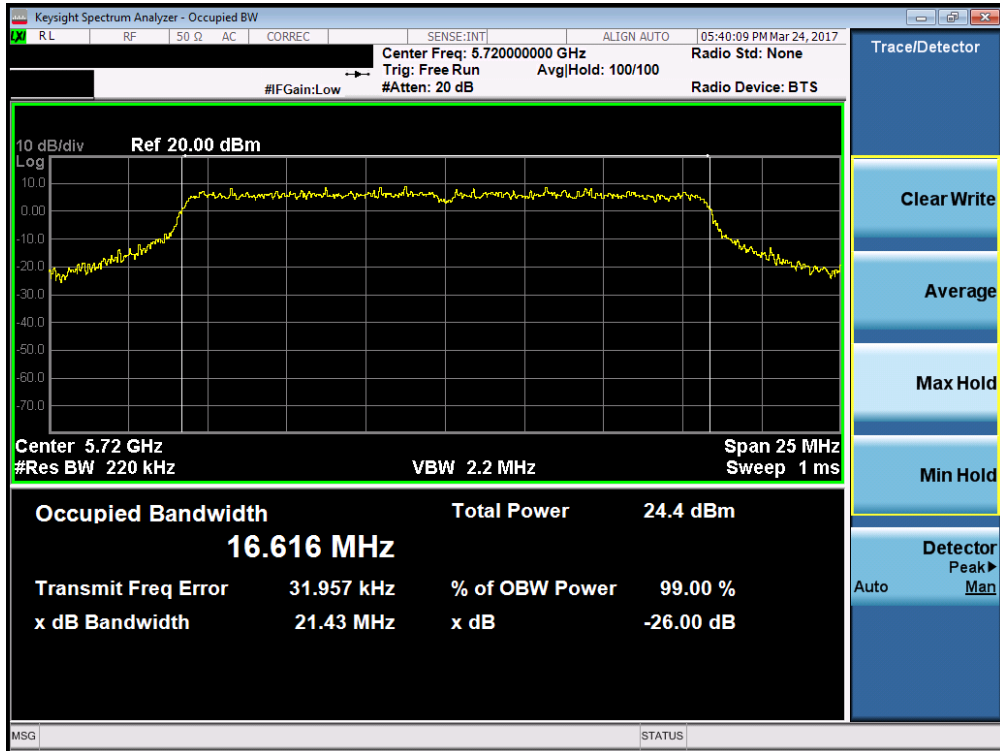


Plot 7-75. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 58 of 227

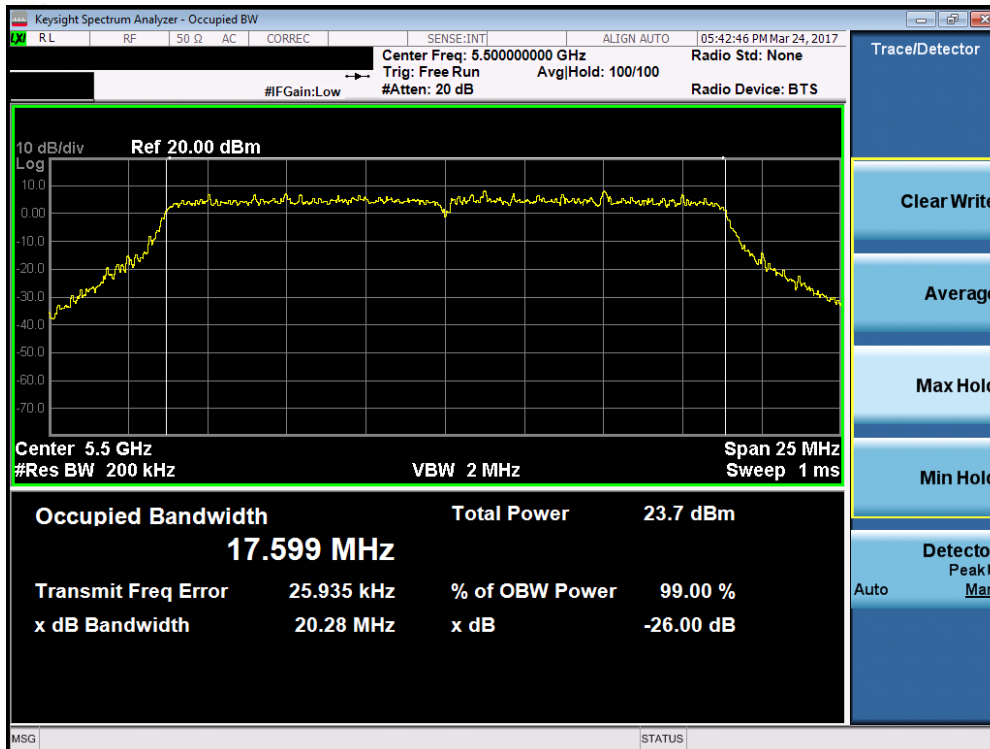


Plot 7-76. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

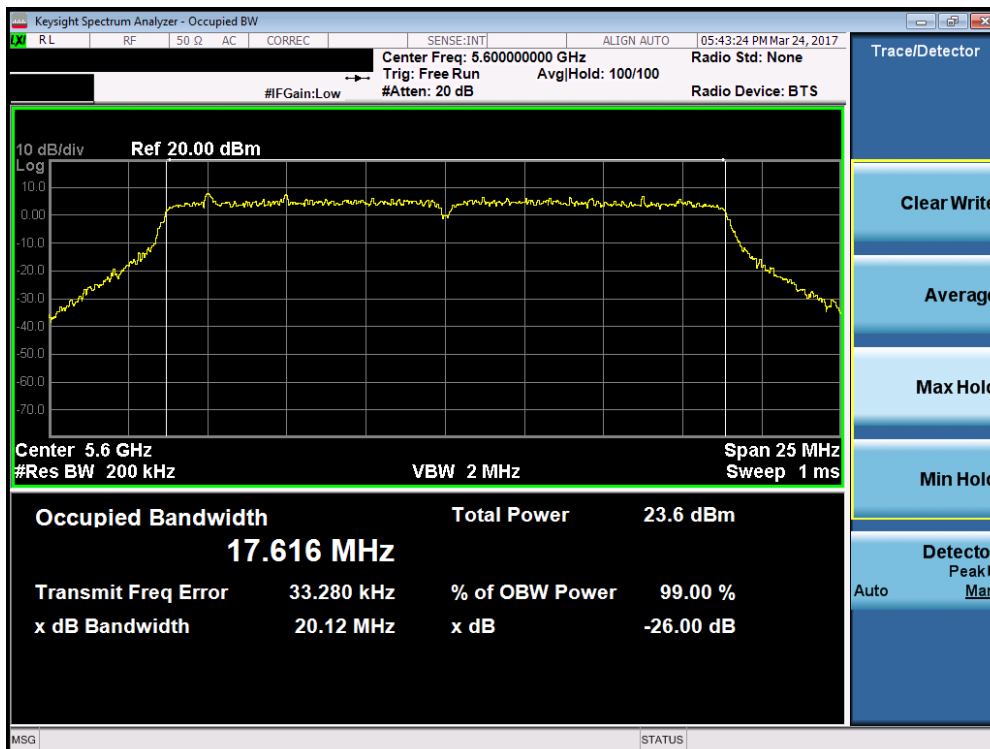


Plot 7-77. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 59 of 227

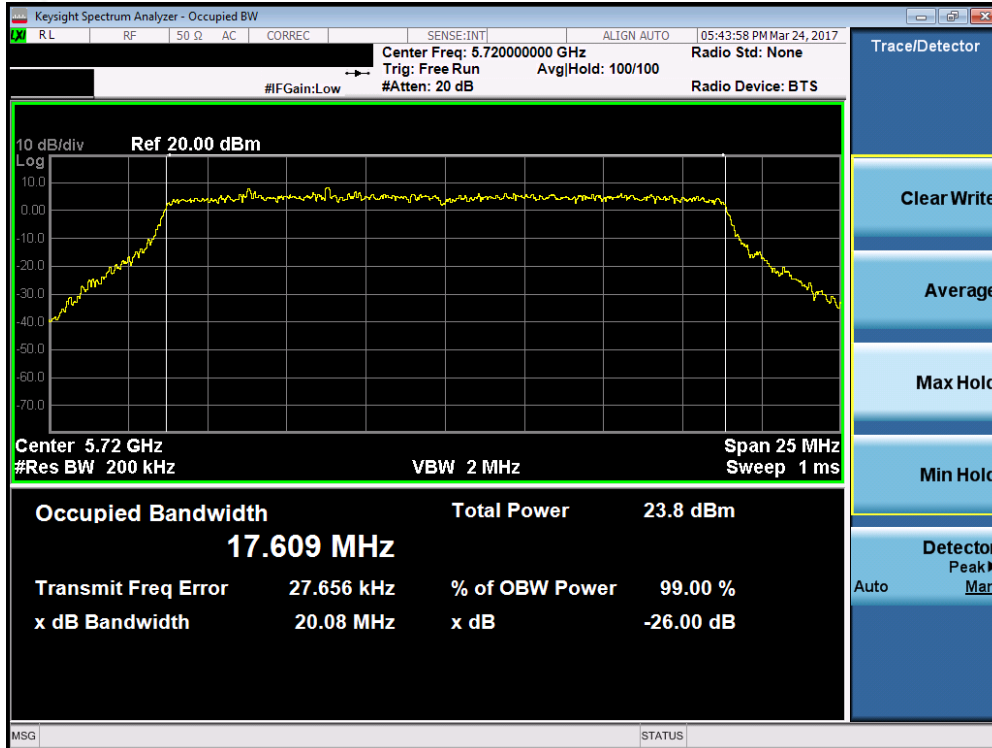


Plot 7-78. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

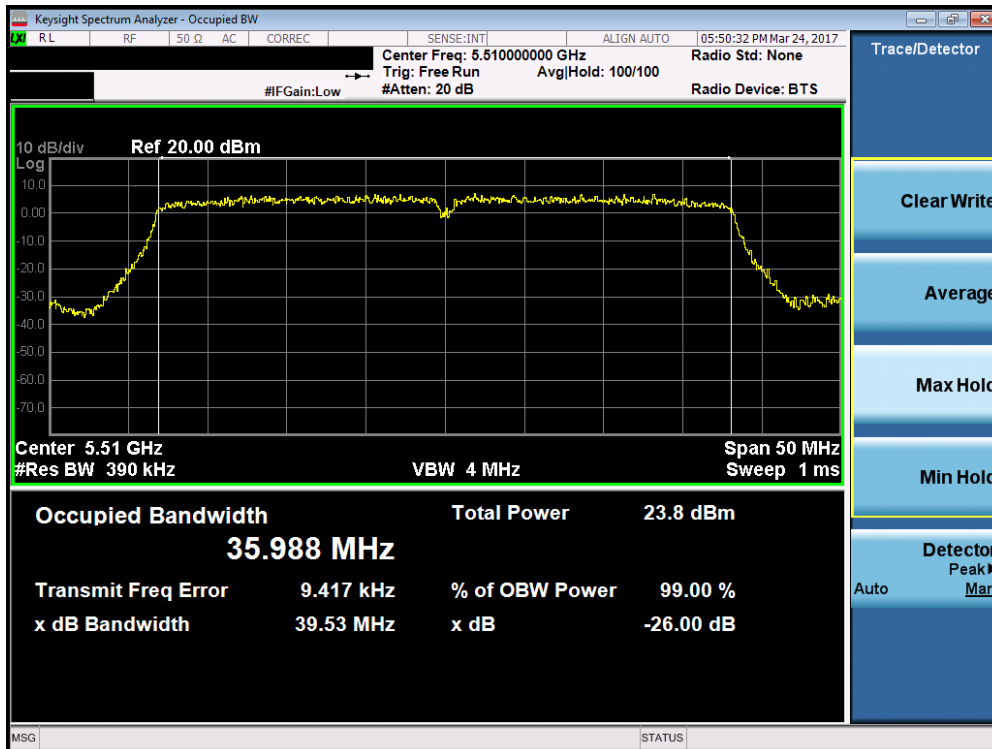


Plot 7-79. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 60 of 227

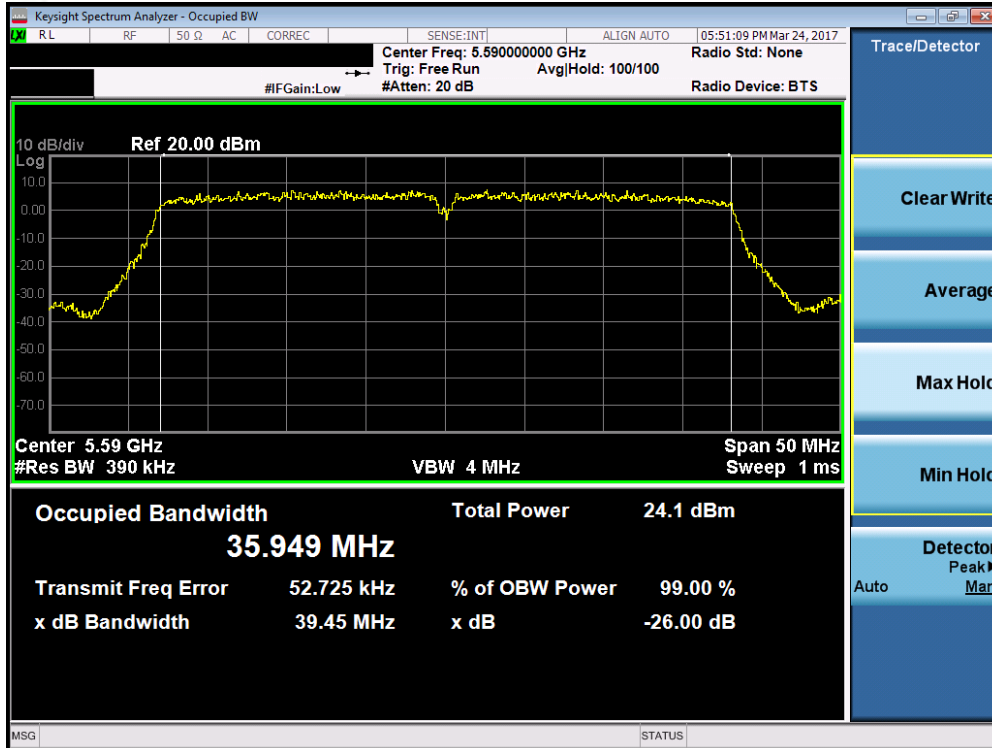


Plot 7-80. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

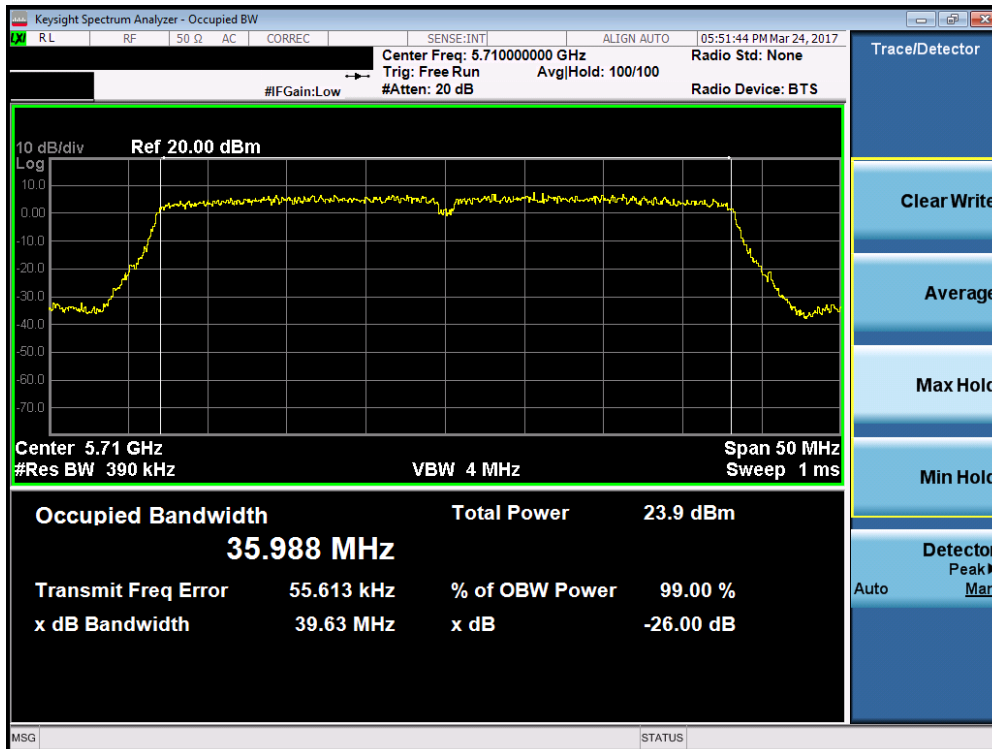


Plot 7-81. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 61 of 227

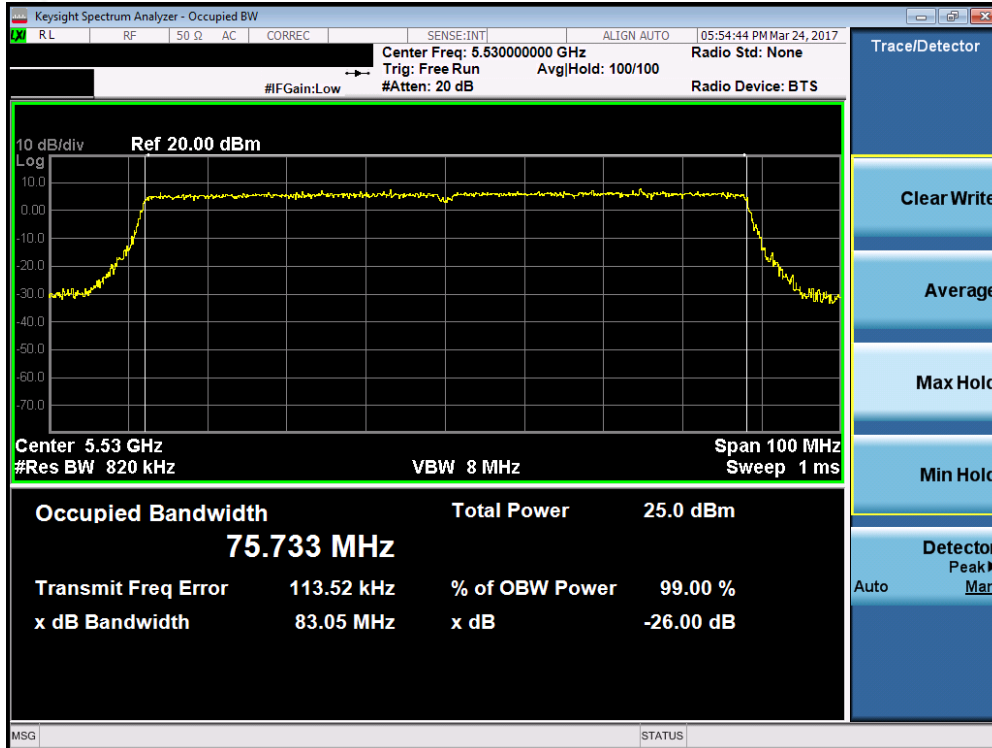


Plot 7-82. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

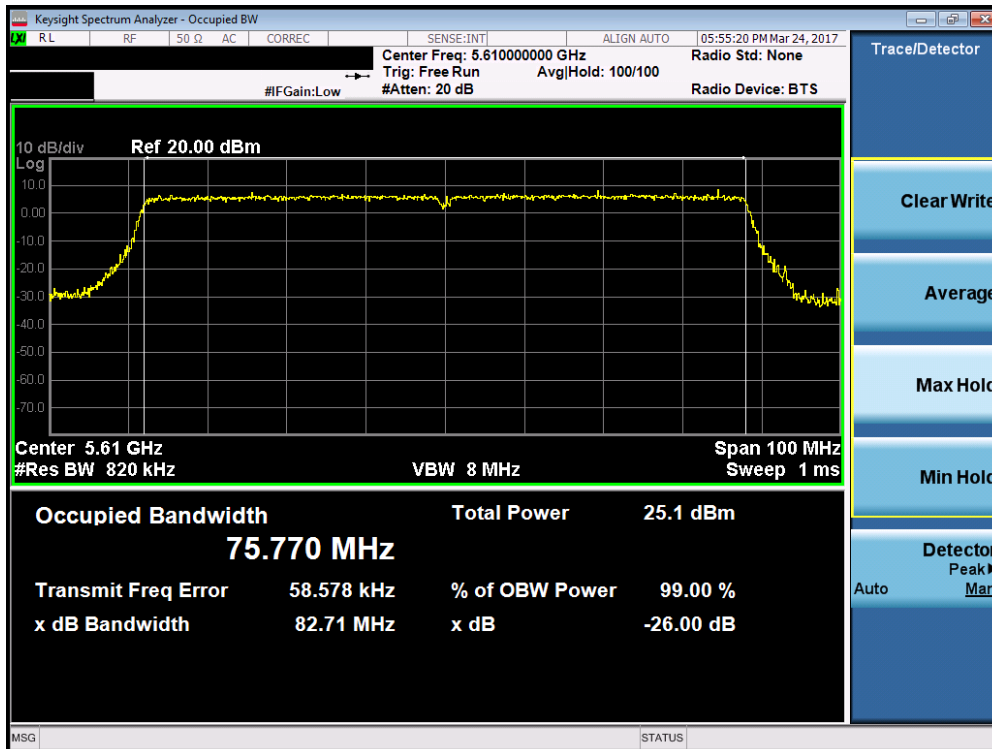

Plot 7-83. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 62 of 227

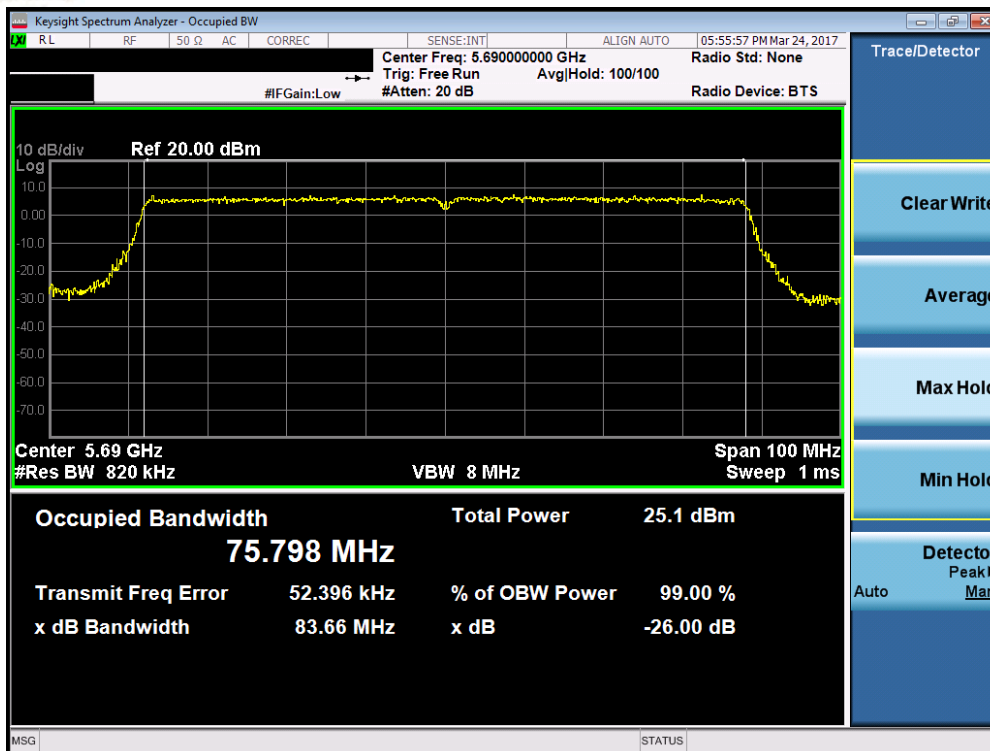

Plot 7-84. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 63 of 227

### 7.3 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.2)

#### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r04, and at the appropriate frequencies.

*In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(19.87) = 23.98\text{dBm}$ .*

*In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.02) = 24.01\text{dBm}$ .*

#### Test Procedure Used


KDB 789033 D02 v01r04 – Section E)3)b) Method PM-G  
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

#### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### Test Setup

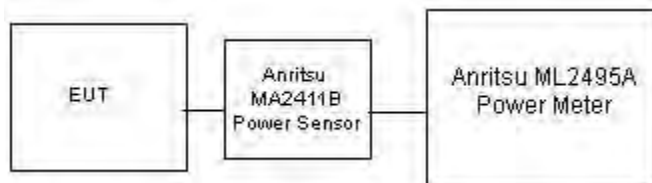

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

None

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 64 of 227	



## Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5260	52	AVG	20.84	20.57	20.24
5280	56	AVG	20.74	20.24	20.67
5300	60	AVG	20.84	20.57	20.34
5320	64	AVG	17.68	17.24	17.57
5500	100	AVG	17.36	17.37	17.28
5600	120	AVG	19.78	19.67	19.74
5620	124	AVG	19.64	19.60	19.61
5720	144	AVG	19.78	19.88	19.67



Table 7-6. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5270	54	AVG	20.07	20.05
5310	62	AVG	15.31	14.97
5510	102	AVG	16.27	15.88
5590	118	AVG	20.02	20.27
5630	126	AVG	20.01	20.11
5710	142	AVG	20.21	20.22

Table 7-7. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5290	58	AVG	13.80
5530	106	AVG	13.62
5610	122	AVG	13.81
5690	138	AVG	13.87

Table 7-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 65 of 227	

## Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5260	52	AVG	20.12	20.27	20.11
5280	56	AVG	20.20	20.27	20.28
5300	60	AVG	20.21	20.22	20.27
5320	64	AVG	18.40	18.29	18.27
5500	100	AVG	17.47	17.44	17.28
5600	120	AVG	19.33	19.21	19.19
5620	124	AVG	19.04	19.02	19.01
5720	144	AVG	19.33	19.31	19.21



Table 7-9. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5270	54	AVG	19.99	19.99
5310	62	AVG	15.02	15.12
5510	102	AVG	15.99	16.21
5590	118	AVG	20.01	20.26
5630	126	AVG	19.99	20.27
5710	142	AVG	19.78	20.21

Table 7-10. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5290	58	AVG	14.21
5530	106	AVG	14.23
5610	122	AVG	14.19
5690	138	AVG	14.18

Table 7-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 66 of 227	

## Antenna-3 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5260	52	AVG	20.46	20.42	20.26
5280	56	AVG	20.36	20.30	20.16
5300	60	AVG	20.31	20.24	20.21
5320	64	AVG	17.87	17.84	17.82
5500	100	AVG	17.45	17.44	17.22
5600	120	AVG	20.32	20.31	20.27
5620	124	AVG	20.33	20.37	20.26
5720	144	AVG	20.97	20.96	20.88



Table 7-12. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5270	54	AVG	20.22	20.29
5310	62	AVG	14.98	15.11
5510	102	AVG	15.88	15.89
5590	118	AVG	20.00	20.27
5630	126	AVG	20.37	20.26
5710	142	AVG	20.27	20.26

Table 7-13. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5290	58	AVG	14.28
5530	106	AVG	14.37
5610	122	AVG	14.21
5690	138	AVG	14.10

Table 7-14. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 67 of 227	

## Antenna-4 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5260	52	AVG	20.11	20.09	20.14
5280	56	AVG	20.00	19.85	20.24
5300	60	AVG	20.10	20.15	20.17
5320	64	AVG	18.29	18.27	18.29
5500	100	AVG	17.43	17.42	17.37
5600	120	AVG	20.12	20.17	20.14
5620	124	AVG	20.49	20.47	20.49
5720	144	AVG	20.52	20.44	20.38



Table 7-15. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5270	54	AVG	20.31	20.32
5310	62	AVG	14.99	15.24
5510	102	AVG	16.32	16.21
5590	118	AVG	20.12	20.34
5630	126	AVG	20.36	20.37
5710	142	AVG	20.26	20.26

Table 7-16. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5290	58	AVG	14.24
5530	106	AVG	14.38
5610	122	AVG	13.88
5690	138	AVG	14.35

Table 7-17. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 68 of 227	

## MIMO Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]					Max Permissible Conducted Power [dBm]	Adjusted Limit [dBm]	Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	ANT3	ANT4	MIMO			
5260	52	AVG	9.19	12.64	12.52	11.78	12.60	18.42	23.98	20.79	-2.37
5280	56	AVG	9.19	12.61	12.57	11.80	12.56	18.42	23.98	20.79	-2.37
5300	60	AVG	9.19	12.53	12.61	11.86	12.68	18.45	23.98	20.79	-2.34
5320	64	AVG	9.19	12.23	12.46	11.92	12.59	18.33	23.98	20.79	-2.46
5500	100	AVG	9.48	11.23	11.40	11.27	11.79	17.45	23.98	20.50	-3.05
5600	120	AVG	9.48	11.64	11.30	10.61	11.77	17.37	23.98	20.50	-3.13
5620	124	AVG	9.48	11.91	11.23	10.76	11.89	17.49	23.98	20.50	-3.01
5720	144	AVG	9.48	12.07	11.64	11.23	12.16	17.81	23.98	20.50	-2.69

**Table 7-18. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power**

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]					Max Permissible Conducted Power [dBm]	Adjusted Limit [dBm]	Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	ANT3	ANT4	MIMO			
5260	52	AVG	9.19	12.67	12.42	11.74	12.64	18.40	23.98	20.79	-2.39
5280	56	AVG	9.19	12.58	12.54	11.78	12.54	18.39	23.98	20.79	-2.40
5300	60	AVG	9.19	12.63	12.52	11.84	12.62	18.44	23.98	20.79	-2.35
5320	64	AVG	9.19	12.27	12.71	11.97	12.61	18.42	23.98	20.79	-2.37
5500	100	AVG	9.48	11.56	11.81	11.26	11.72	17.61	23.98	20.50	-2.89
5600	120	AVG	9.48	11.86	11.26	10.54	11.74	17.40	23.98	20.50	-3.10
5620	124	AVG	9.48	11.99	11.10	10.71	12.07	17.53	23.98	20.50	-2.97
5720	144	AVG	9.48	11.82	11.85	11.23	12.07	17.77	23.98	20.50	-2.73

**Table 7-19. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power**

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]					Max Permissible Conducted Power [dBm]	Adjusted Limit [dBm]	Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	ANT3	ANT4	MIMO			
5270	54	AVG	9.19	14.35	14.11	13.77	14.19	20.13	23.98	20.79	-0.66
5310	62	AVG	9.19	14.29	14.13	13.77	14.08	20.09	23.98	20.79	-0.70
5510	102	AVG	9.48	13.95	14.01	14.43	14.18	20.17	23.98	20.50	-0.33
5590	118	AVG	9.48	14.12	14.12	13.89	14.51	20.19	23.98	20.50	-0.31
5630	126	AVG	9.48	14.43	13.63	13.83	14.31	20.08	23.98	20.50	-0.42
5710	142	AVG	9.48	14.44	13.99	13.89	14.52	20.24	23.98	20.50	-0.26

**Table 7-20. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power**

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]					Max Permissible Conducted Power [dBm]	Adjusted Limit [dBm]	Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	ANT3	ANT4	MIMO			
5270	54	AVG	9.19	14.33	14.22	13.66	13.65	20.00	23.98	20.79	-0.79
5310	62	AVG	9.19	14.29	14.13	13.77	14.08	20.09	23.98	20.79	-0.70
5510	102	AVG	9.48	13.95	14.01	14.43	14.18	20.17	23.98	20.50	-0.33
5590	118	AVG	9.48	14.20	14.27	13.87	13.67	20.03	23.98	20.50	-0.47
5630	126	AVG	9.48	14.23	13.94	13.84	13.84	19.99	23.98	20.50	-0.51
5710	142	AVG	9.48	14.40	13.96	13.87	13.86	20.05	23.98	20.50	-0.45

**Table 7-21. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power**

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (80MHz) Conducted Power [dBm]					Max Permissible Conducted Power [dBm]	Adjusted Limit [dBm]	Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	ANT3	ANT4	MIMO			
5290	58	AVG	9.19	14.40	14.17	13.78	14.23	20.17	23.98	20.79	-0.62
5530	106	AVG	9.48	14.37	14.36	14.37	14.26	20.36	23.98	20.50	-0.14
5610	122	AVG	9.48	14.51	13.77	13.79	14.59	20.20	23.98	20.50	-0.30
5690	138	AVG	9.48	14.56	14.02	14.15	14.51	20.34	23.98	20.50	-0.16

**Table 7-22. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power**

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 69 of 227	

**Note:**

Per KDB 662911 v02r01 Section E)1), the conducted powers at all antennas were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per KDB 662911 v02r01, Section F)2), the directional gain is calculated using the following formula, where  $G_n$  is the gain of the  $n$ th antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

The Power Density limits were then adjusted using the following formula:



$$\text{Max permissible power density} - [6 - (\text{Directional gain})]$$

**Sample MIMO Calculation:**

At 5260MHz in 802.11n (20MHz BW), the average conducted output power was measured to be 12.64 dBm for Antenna-1, 12.52 dBm for Antenna-2, 11.76 dBm for Antenna-3, and 12.60 dBm for Antenna-4.

$$\text{Antenna 1} + \text{Antenna 2} + \text{Antenna 3} + \text{Antenna 4} = \text{MIMO power (mW)}$$

$$(12.64 \text{ dBm} + 12.52 \text{ dBm} + 11.76 \text{ dBm} + 12.60 \text{ dBm}) = (18.36 \text{ mW} + 17.86 \text{ mW} + 14.99 \text{ mW} + 18.20 \text{ mW}) = 69.40 \text{ mW} = 18.42 \text{ dBm}$$

<b>FCC ID:</b> A3LETWV530		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point	Page 70 of 227	

## 7.4 Maximum Power Spectral Density – 802.11a/n/ac §15.407(a.2)

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r04, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01r04, was used to measure the power spectral density.

***In the 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

### Test Procedure Used


KDB 789033 D02 v01r04 – Section F  
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

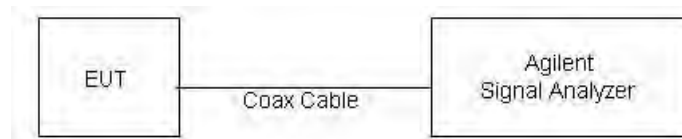

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes



None

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point	Page 71 of 227	


## Antenna-1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 2A	5260	52	a	6	5.32	11.0	-5.68	Pass
	5280	56	a	6	5.30	11.0	-5.70	Pass
	5320	64	a	6	5.27	11.0	-5.73	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	4.84	11.0	-6.16	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	5.05	11.0	-5.95	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	4.95	11.0	-6.05	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.07	11.0	-8.93	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	2.26	11.0	-8.74	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-0.39	11.0	-11.39	Pass
Band 2C	5500	100	a	6	5.16	11.0	-5.84	Pass
	5600	120	a	6	5.42	11.0	-5.58	Pass
	5720	144	a	6	5.93	11.0	-5.07	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	4.81	11.0	-6.19	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	5.25	11.0	-5.75	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	5.74	11.0	-5.26	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	1.74	11.0	-9.26	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.09	11.0	-8.91	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	2.50	11.0	-8.50	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-0.67	11.0	-11.67	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-0.50	11.0	-11.50	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-3.48	11.0	-14.48	Pass


**Table 7-23. Bands 2A & 2C Conducted Power Spectral Density Measurements**

<b>FCC ID:</b> A3LETWV530 	<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1703270128-01-R1.A3L	<b>Test Dates:</b> 3/24 - 8/23/2017	<b>EUT Type:</b> Indoor Access Point		Page 72 of 227



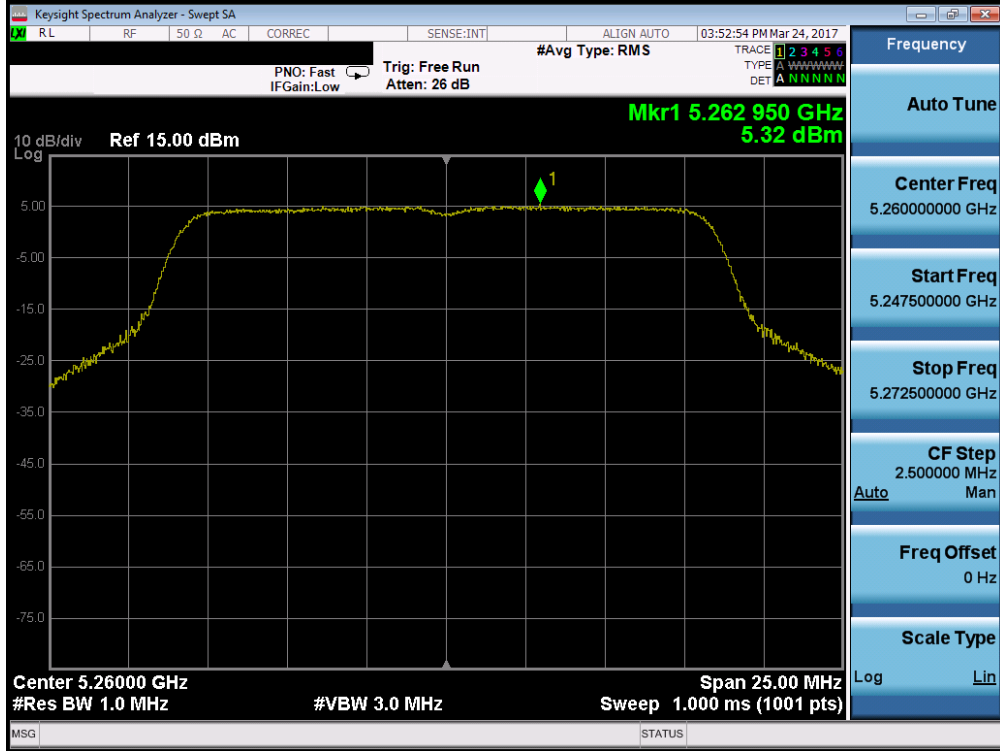


Plot 7-85. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

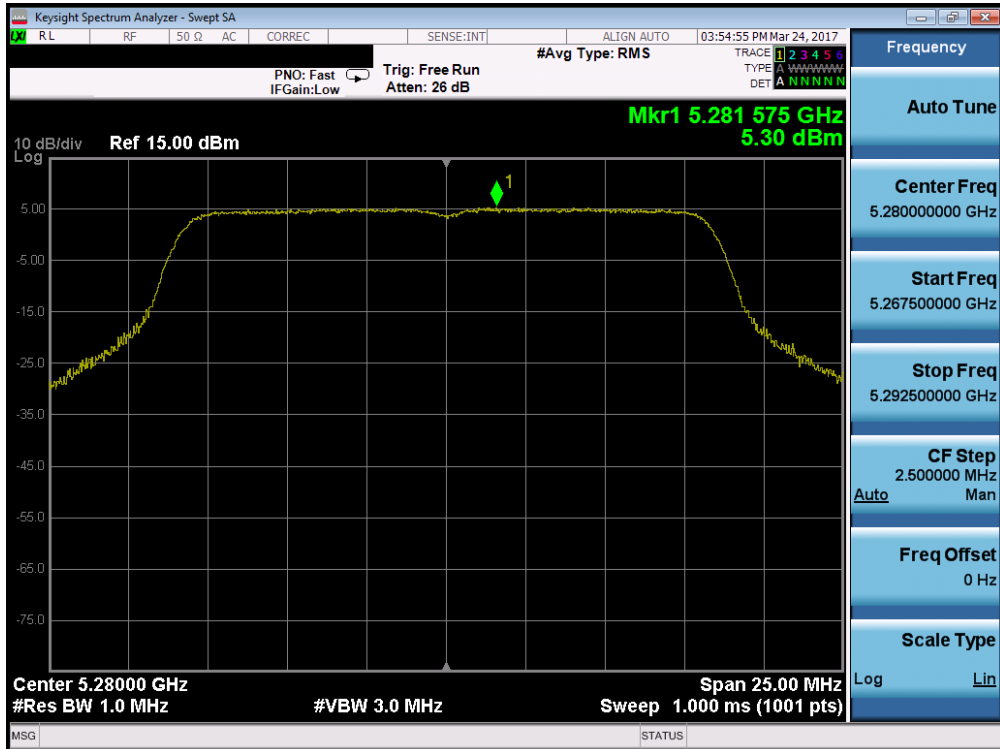


Plot 7-86. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 73 of 227

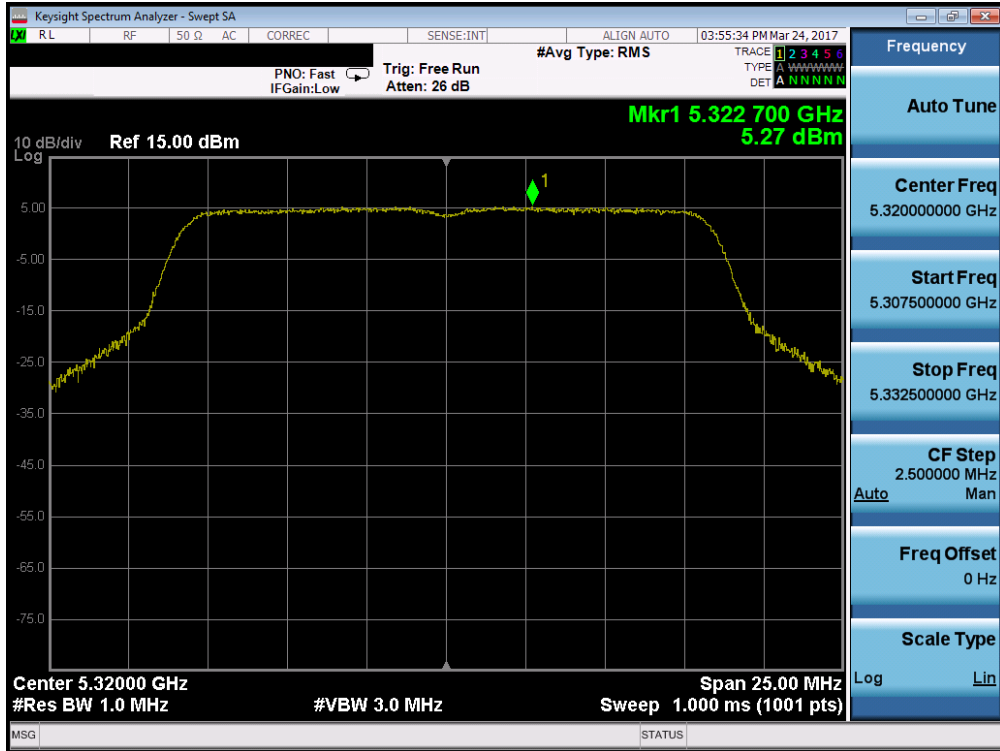


Plot 7-87. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

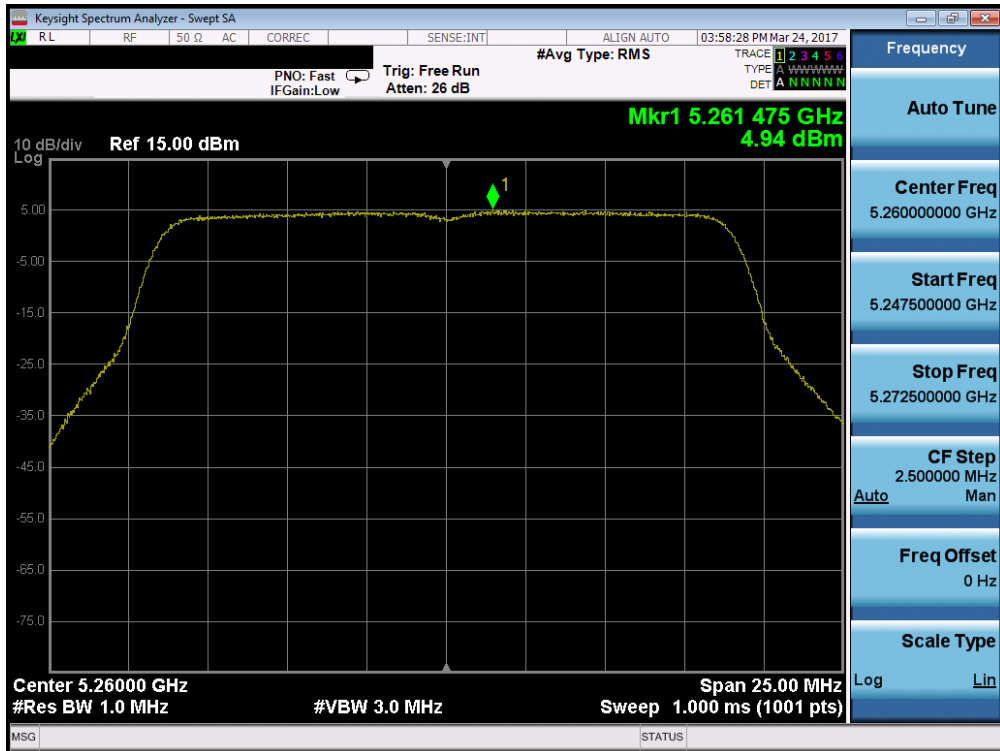


Plot 7-88. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LETWV530	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 74 of 227

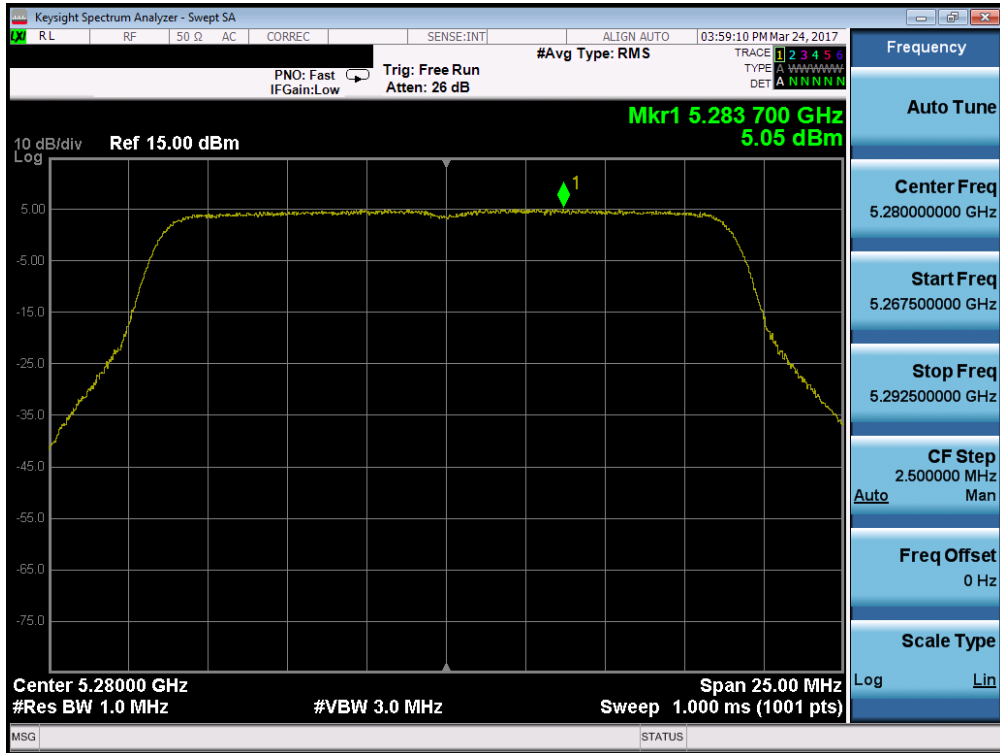


Plot 7-89. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

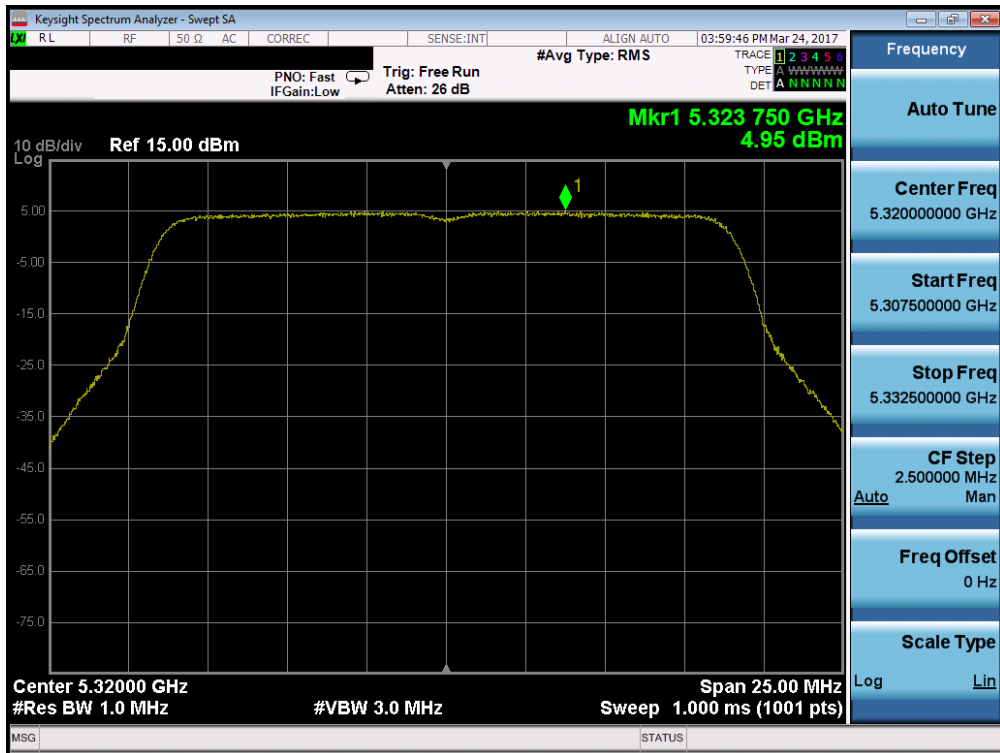


Plot 7-90. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 75 of 227

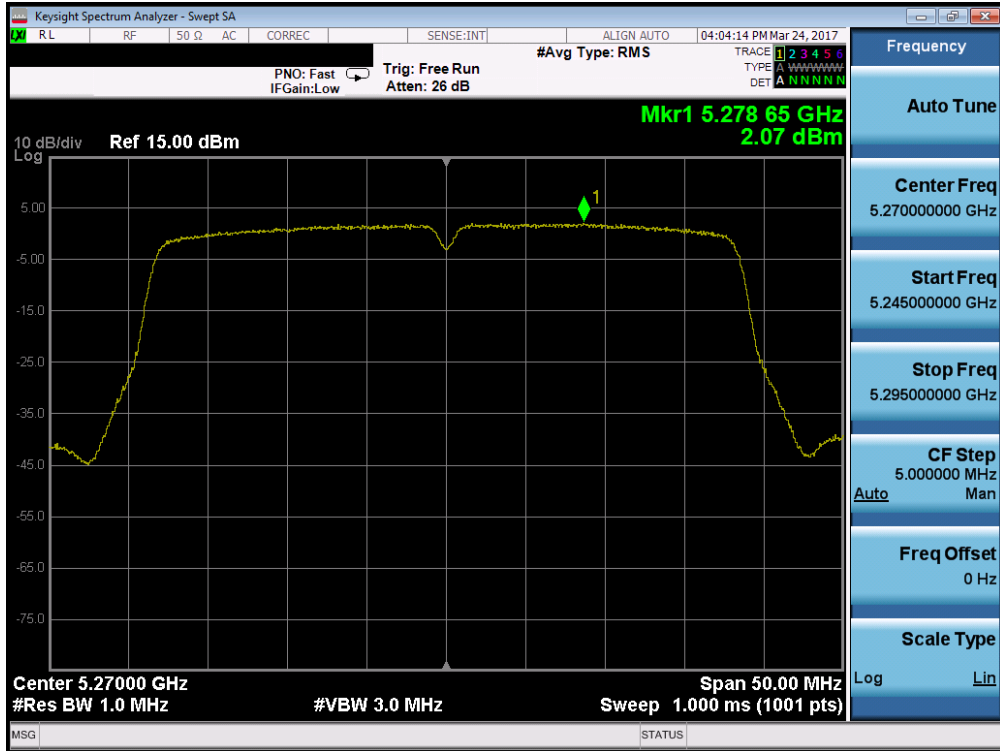


Plot 7-91. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

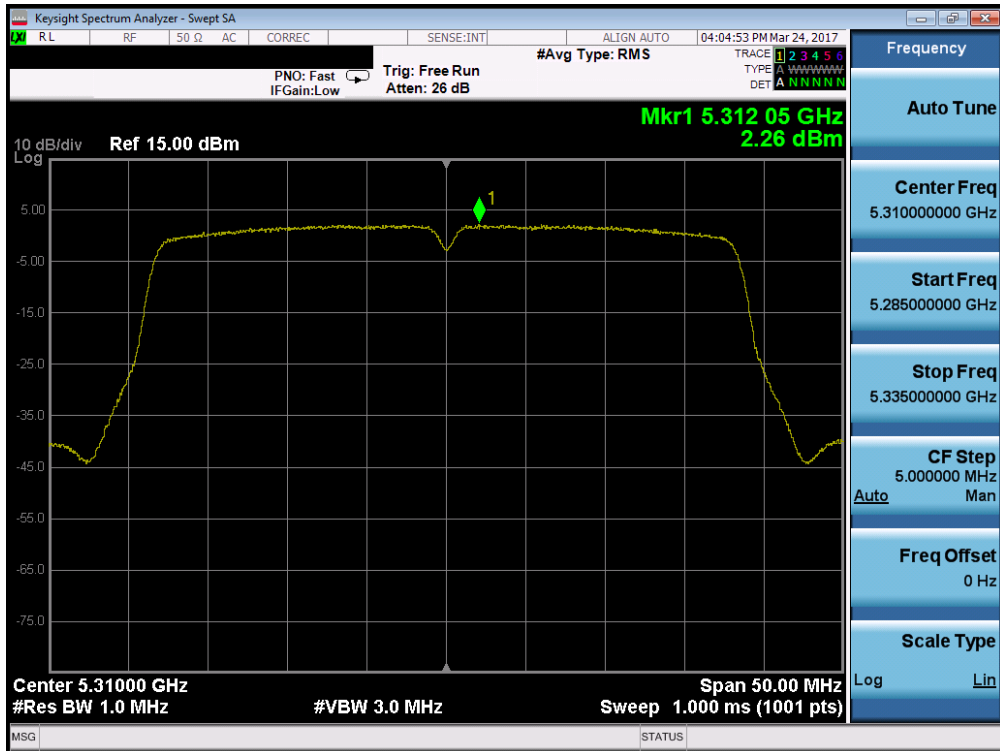


Plot 7-92. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 76 of 227



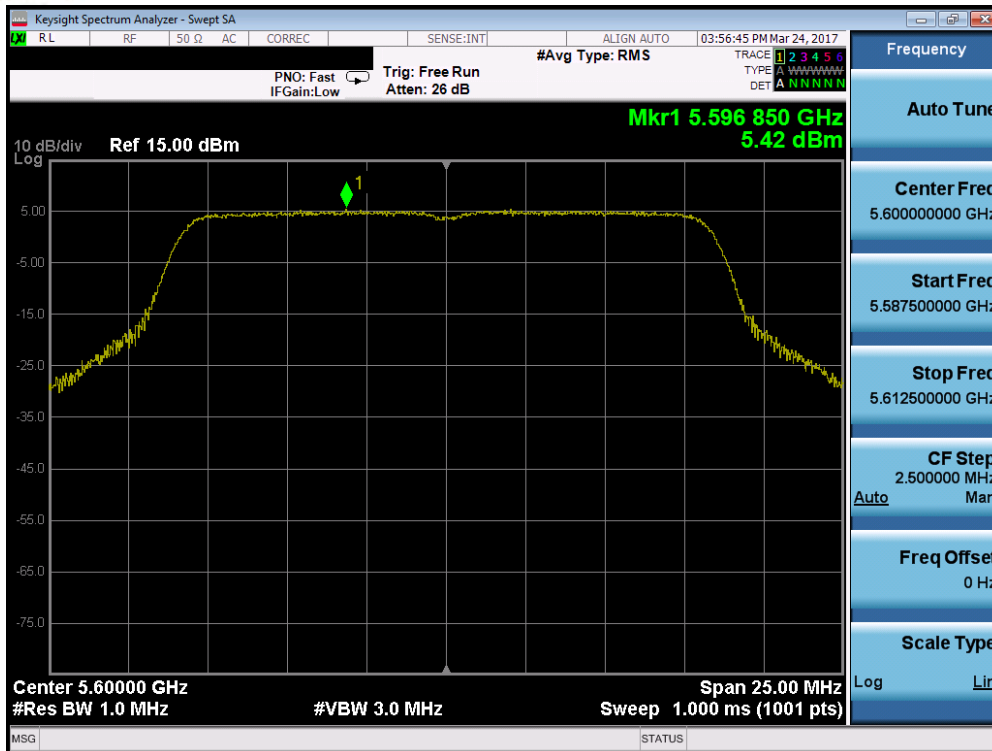


Plot 7-95. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

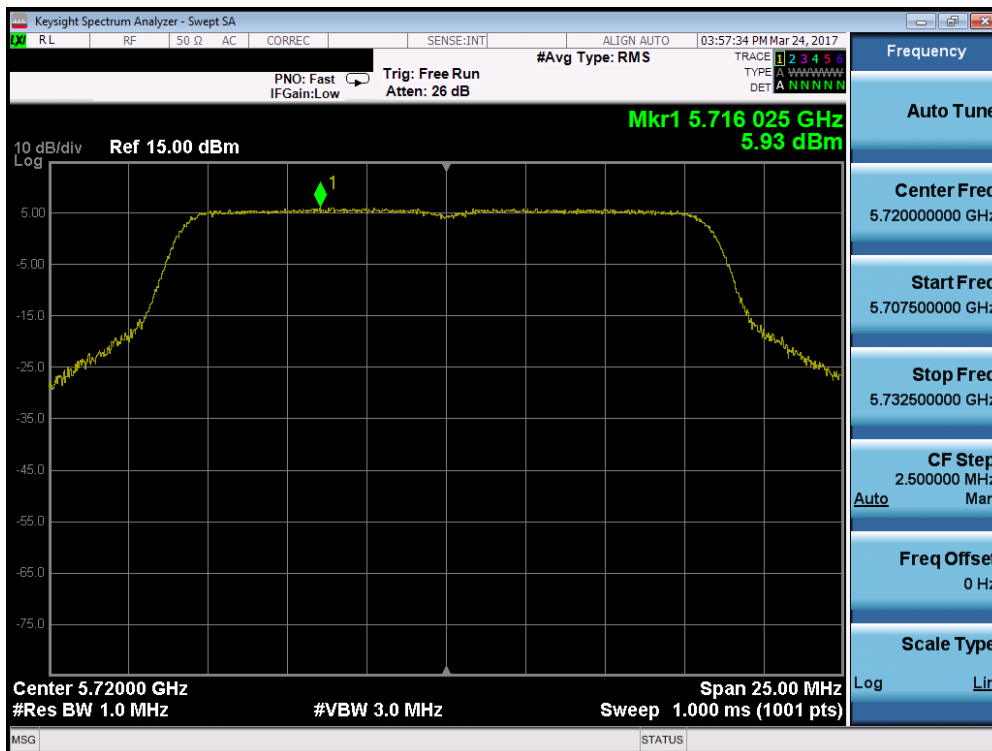


Plot 7-96. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 78 of 227

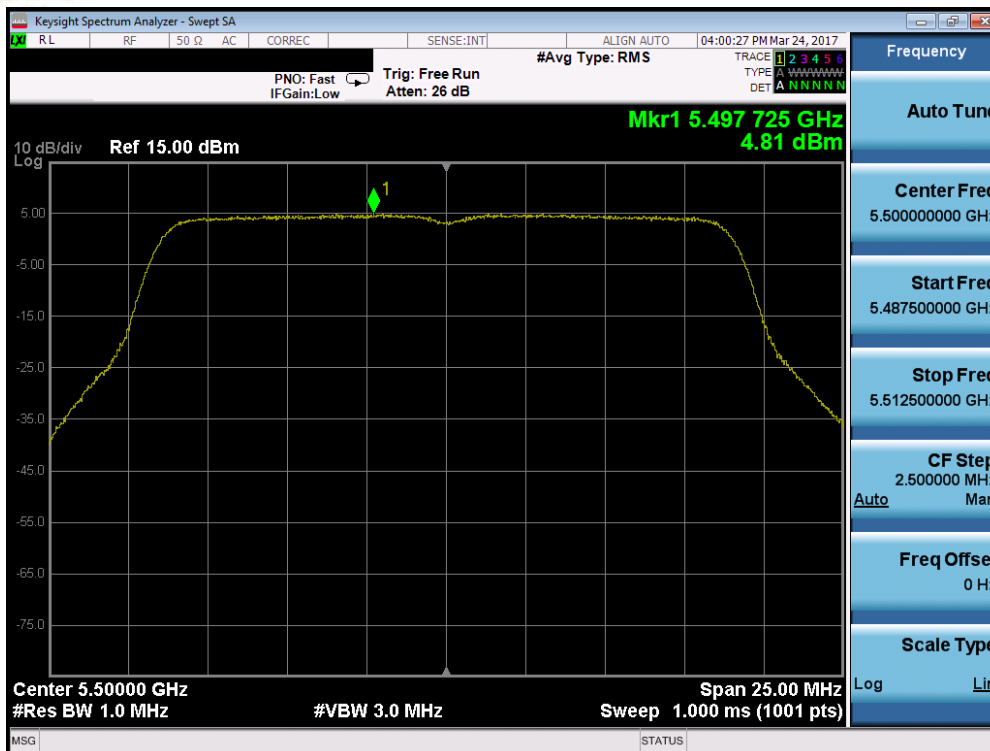


Plot 7-97. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

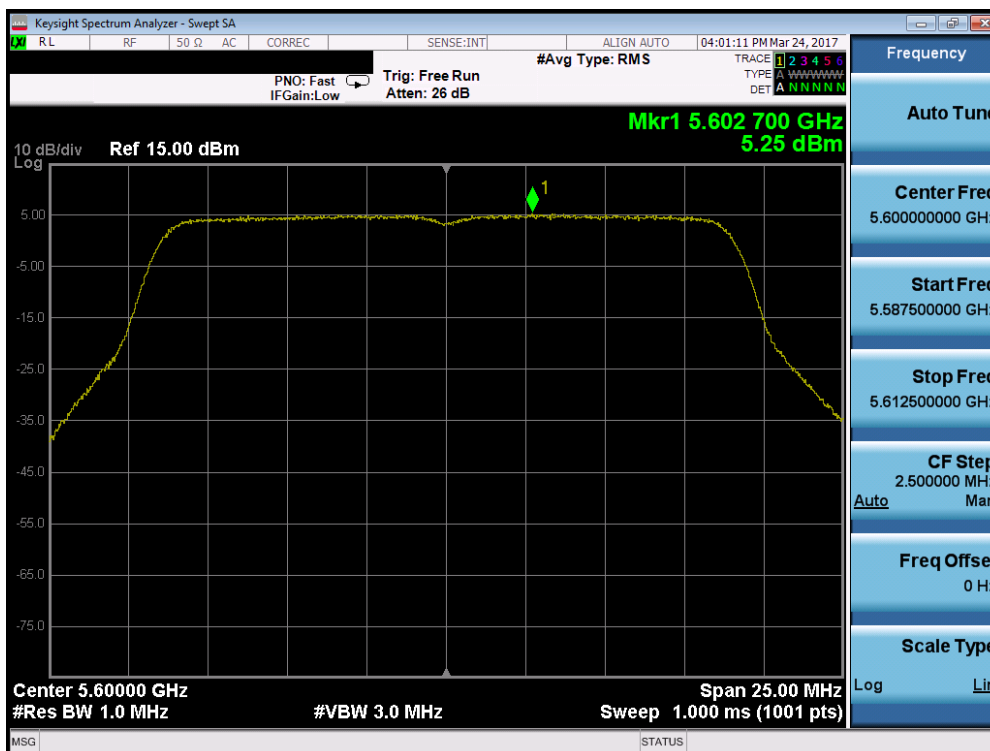


Plot 7-98. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 79 of 227

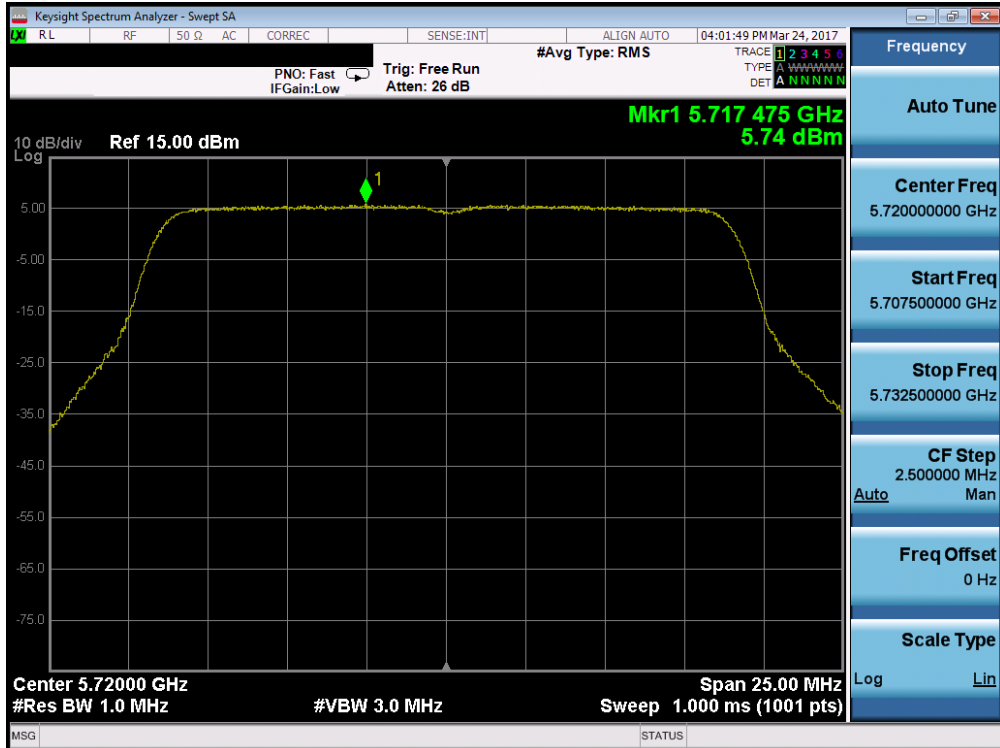


Plot 7-99. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

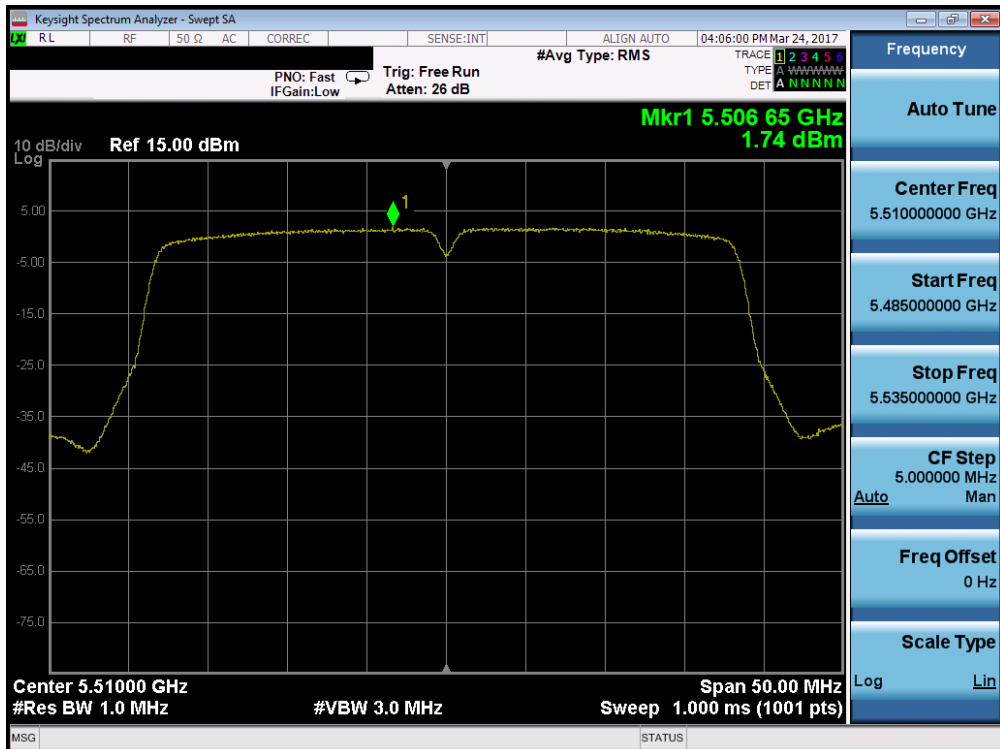


Plot 7-100. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 80 of 227



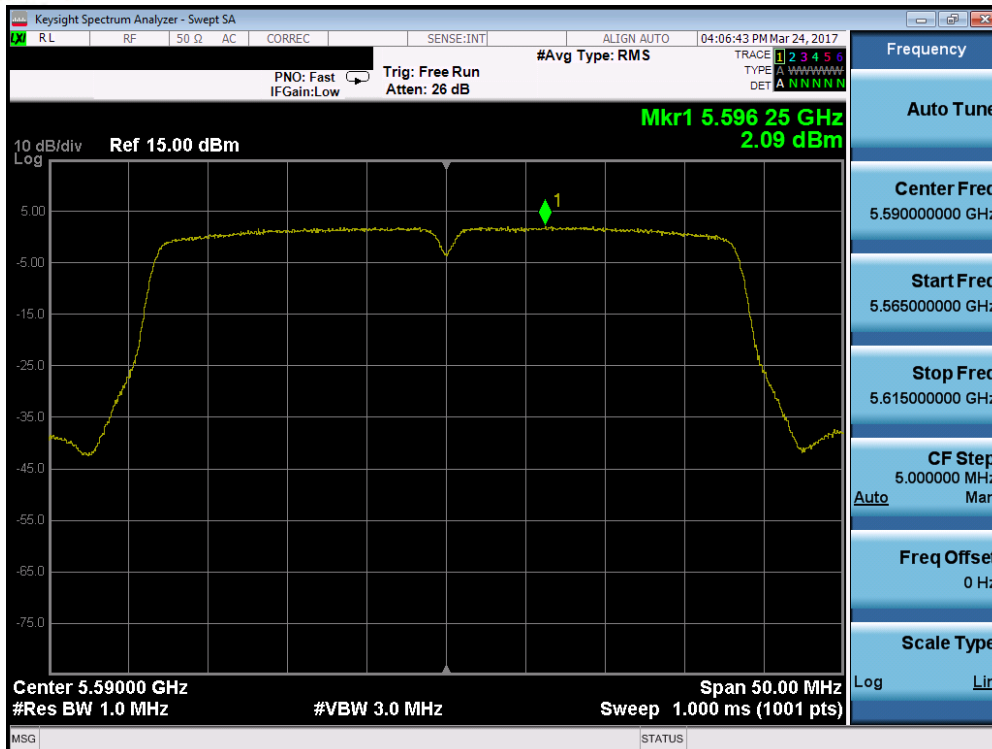


Plot 7-101. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

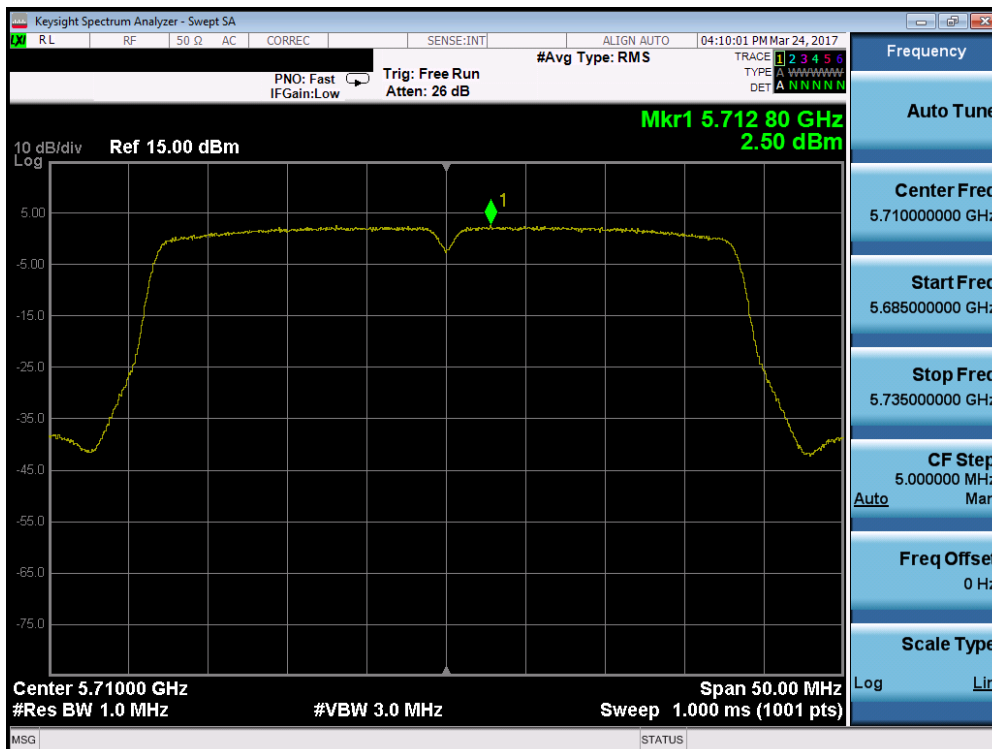


Plot 7-102. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 81 of 227

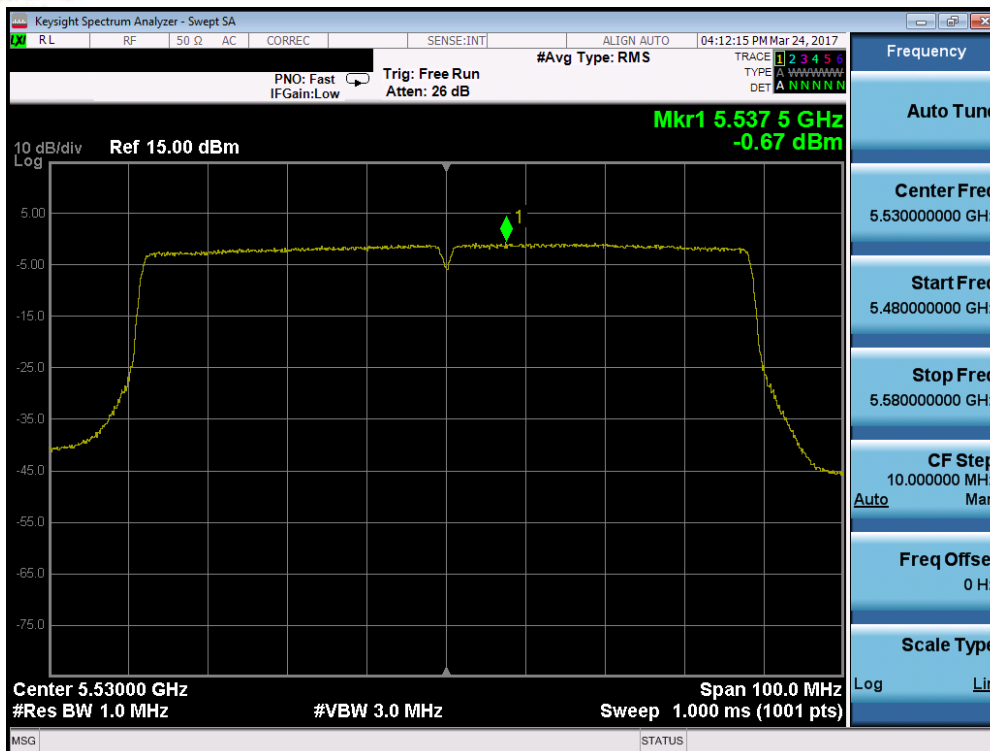


Plot 7-103. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

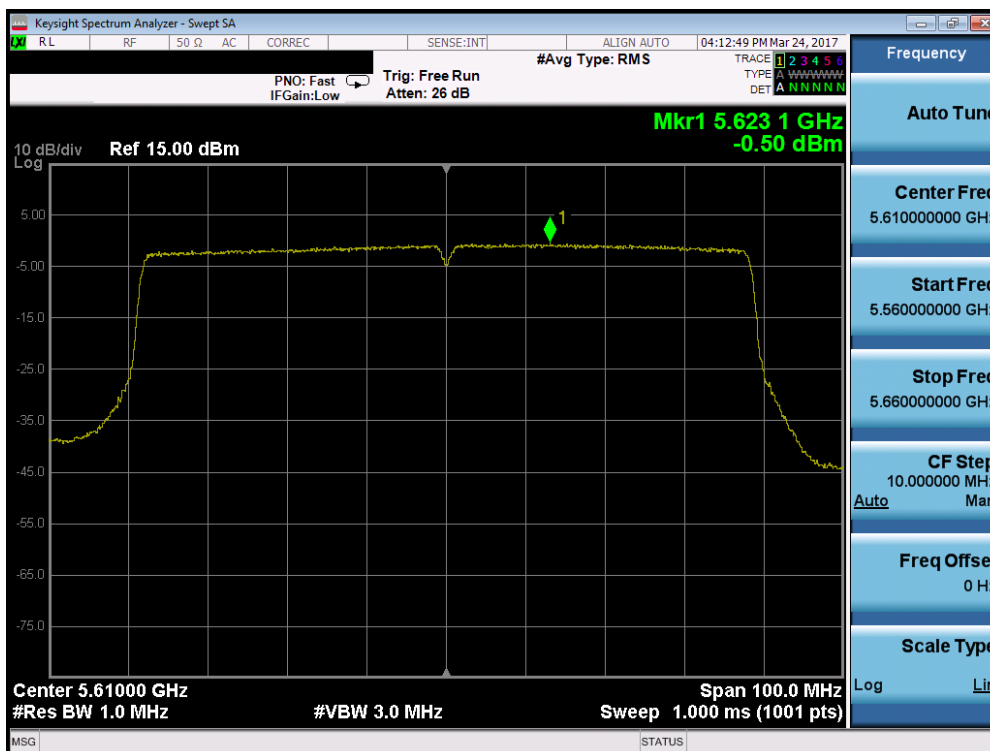

Plot 7-104. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 82 of 227

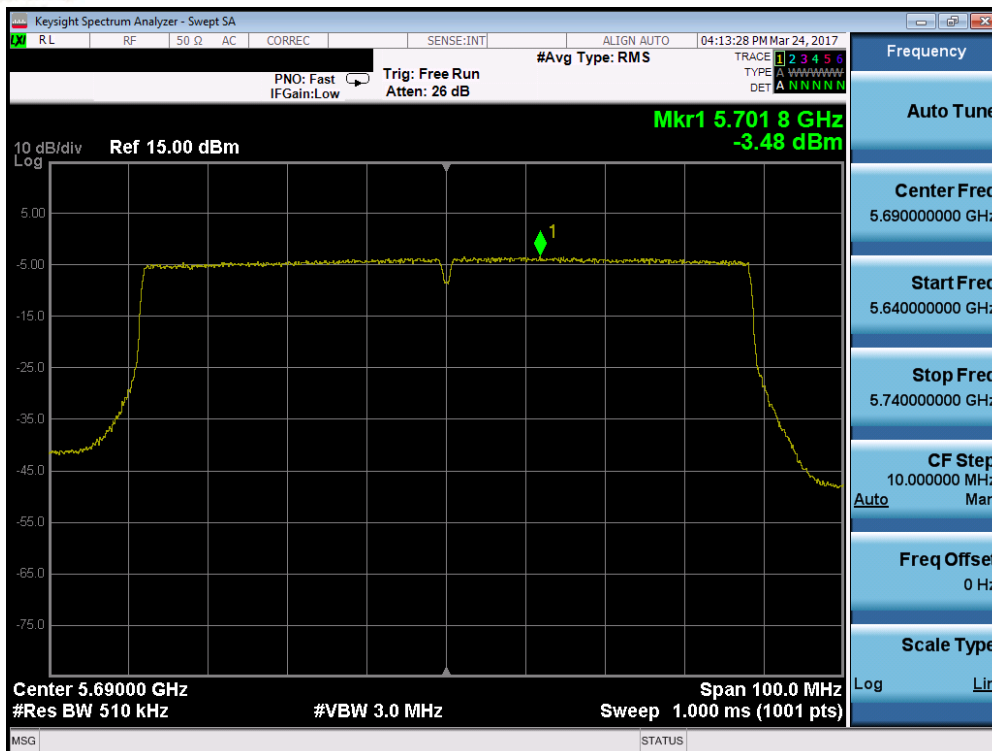

Plot 7-105. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LETWV530		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1703270128-01-R1.A3L	Test Dates: 3/24 - 8/23/2017	EUT Type: Indoor Access Point		Page 83 of 227