

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.00018; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.421 \text{ mho/m}$; $\epsilon_r = 41.507$; $\rho = 1000 \text{ kg/m}^3$
 DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

LHS/Touch_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 mW/g


LHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.587 V/m; Power Drift = -0.0036 dB

Peak SAR (extrapolated) = 0.6340

SAR(1 g) = 0.409 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

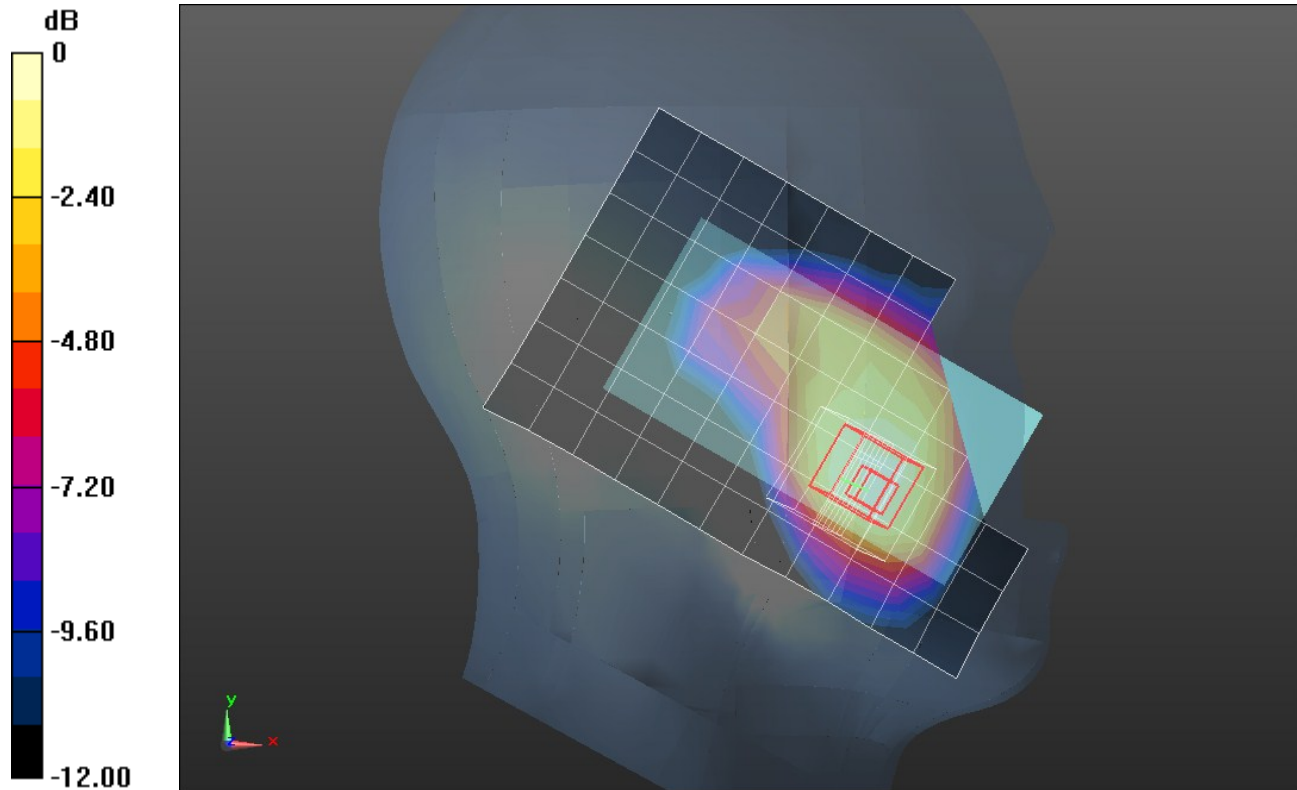

0 dB = 0.500mW/g = -6.02 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.00018; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.421 \text{ mho/m}$; $\epsilon_r = 41.507$; $\rho = 1000 \text{ kg/m}^3$
 DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

LHS/Tilt_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.252 mW/g


LHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.366 V/m; Power Drift = 0.0062 dB

Peak SAR (extrapolated) = 0.3230

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.258 mW/g

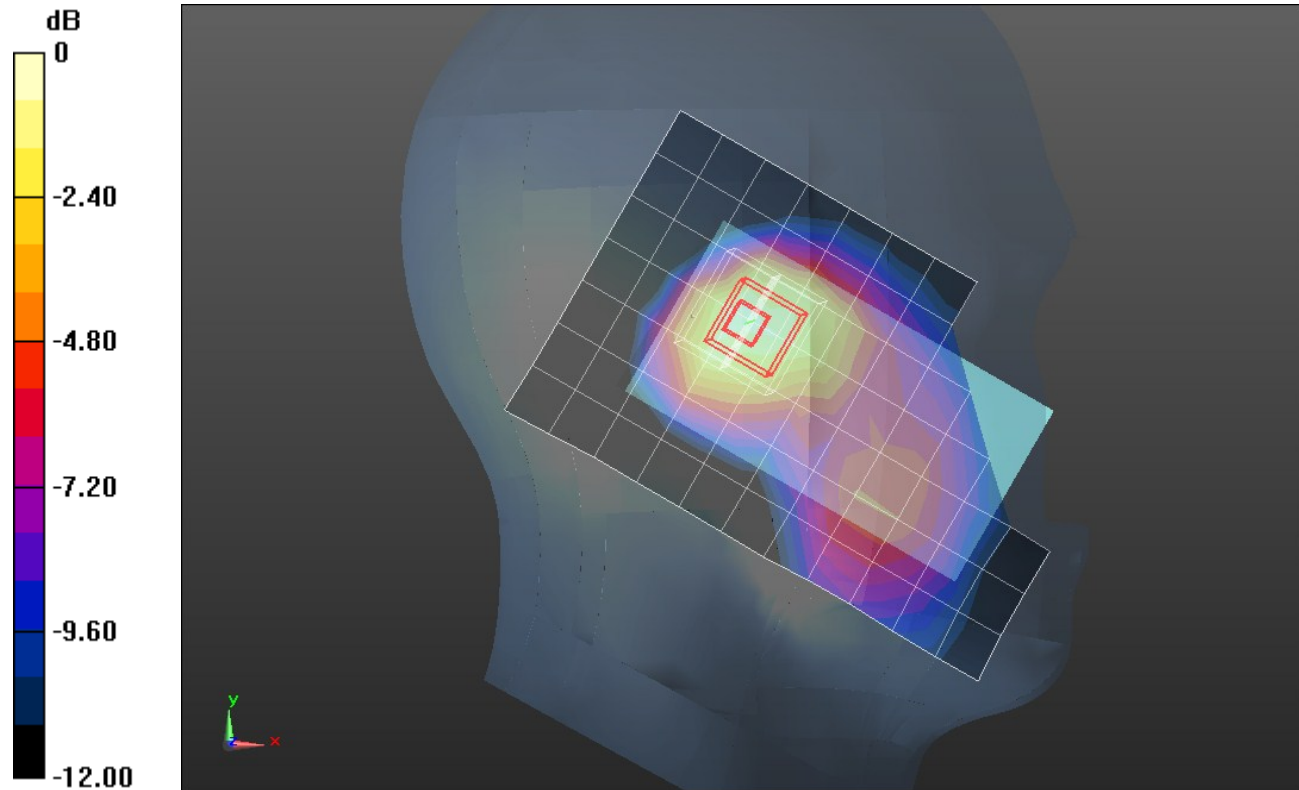

0 dB = 0.260mW/g = -11.70 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.00018; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 41.507$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

RHS/Touch_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.481 mW/g


RHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.522 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.6440

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

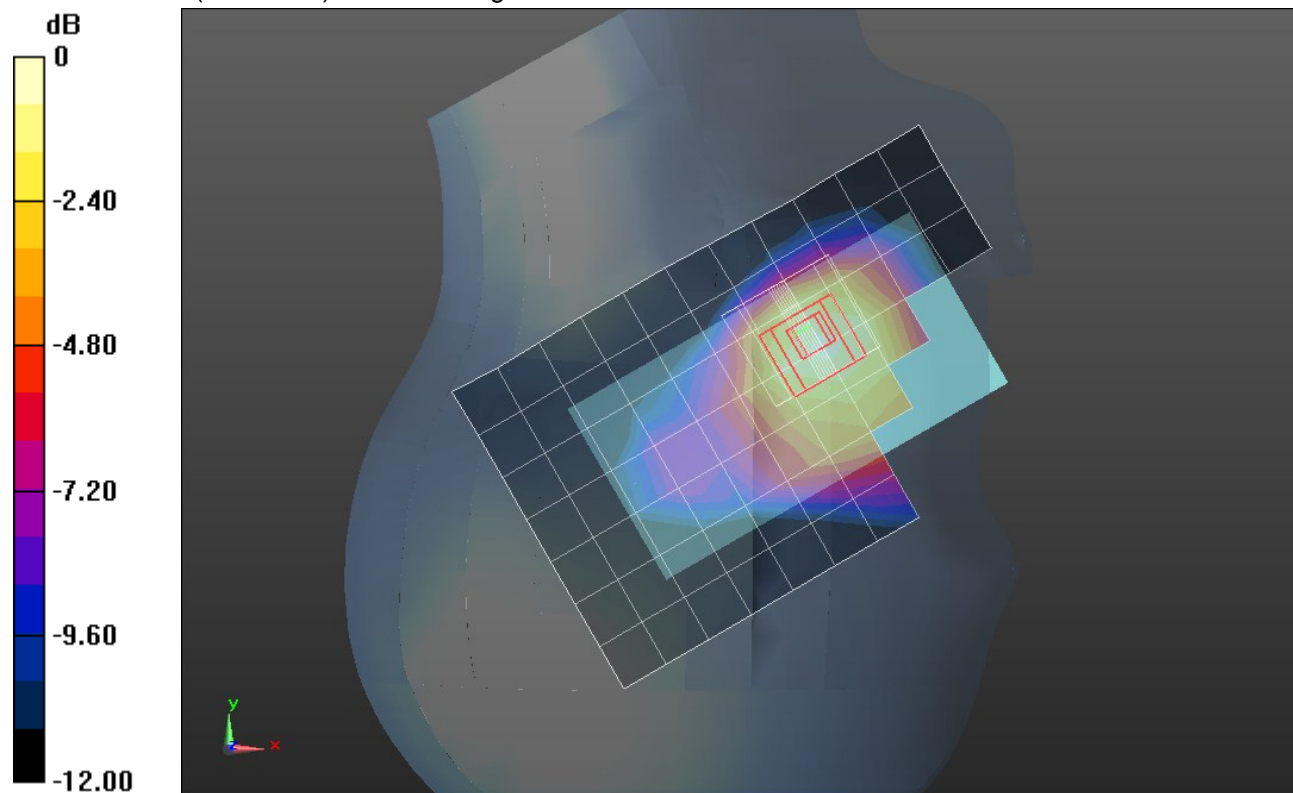


0 dB = 0.520mW/g = -5.68 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.00018

RHS/Touch_M ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.484 mW/g

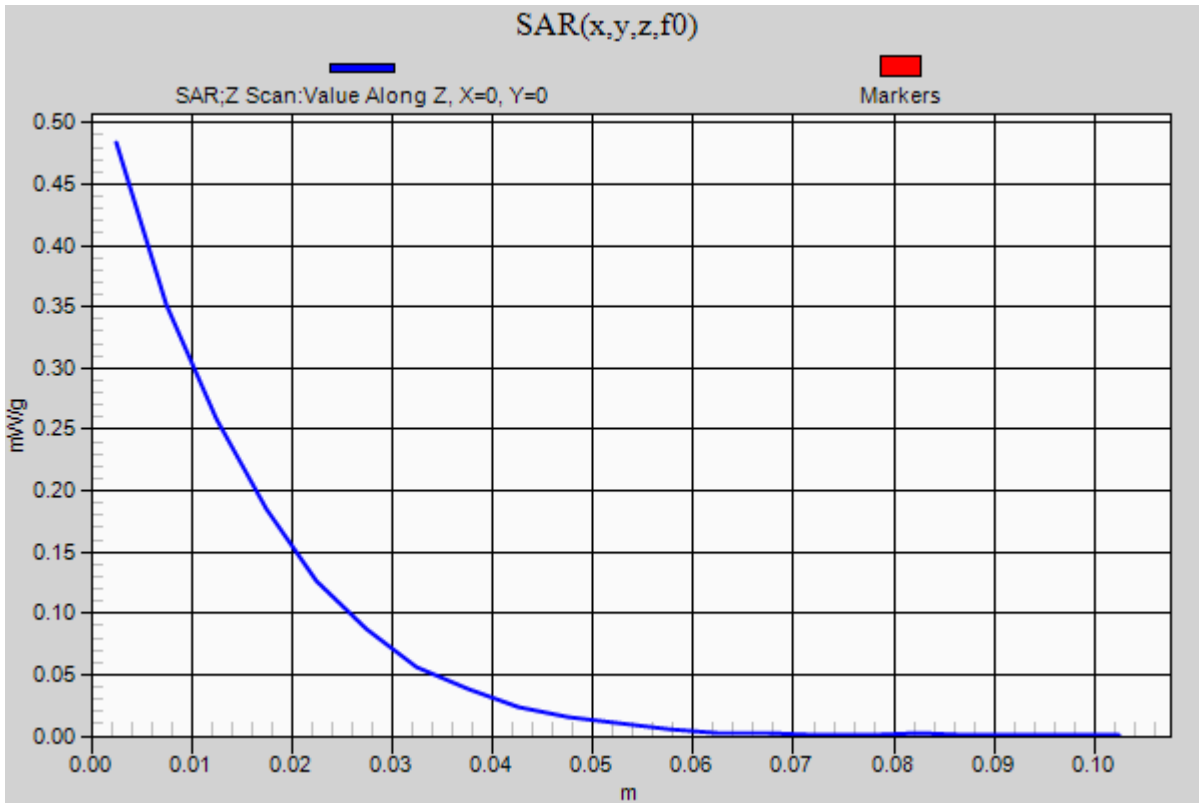

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.00018; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.421 \text{ mho/m}$; $\epsilon_r = 41.507$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

RHS/Tilt_M ch/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.219 mW/g


RHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.629 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.3230

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

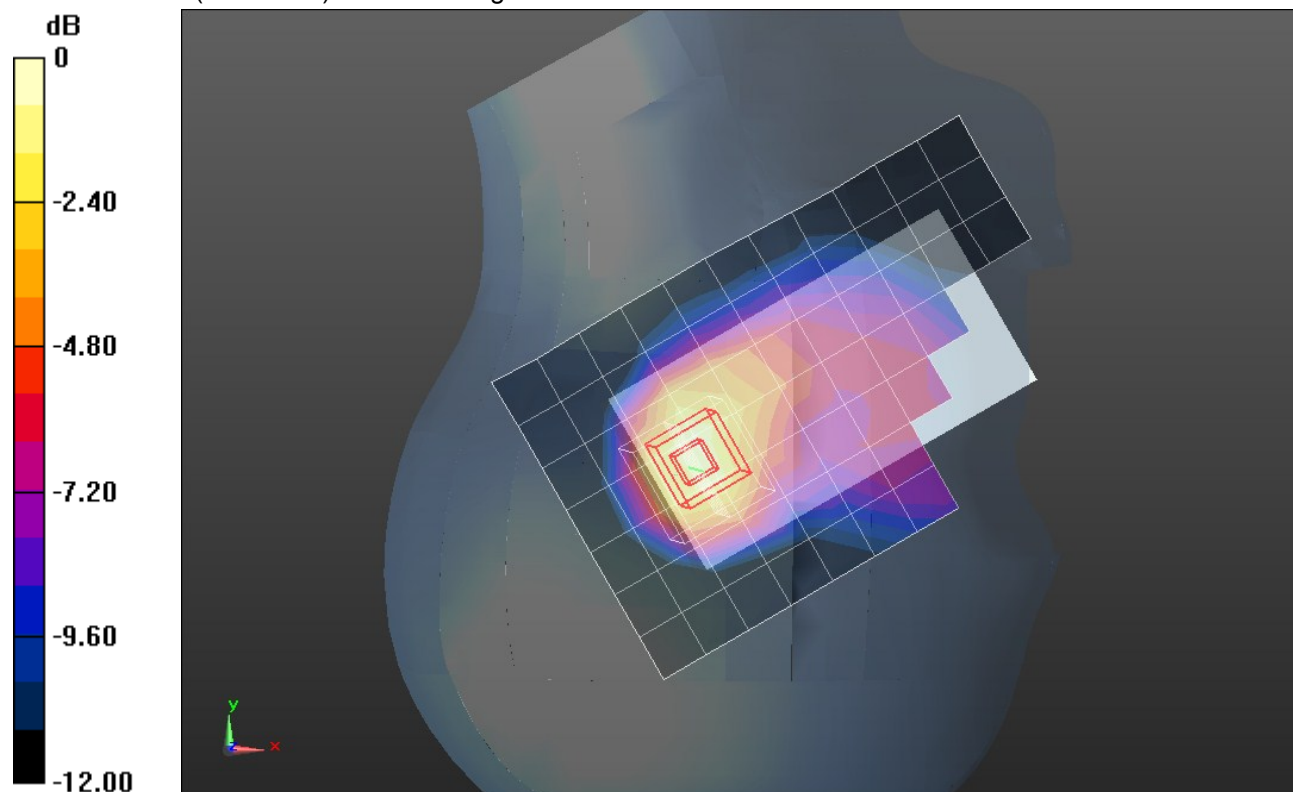

0 dB = 0.250mW/g = -12.04 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/GPRS 3 Slot_Ch 661/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.696 mW/g


Rear/GPRS 3 Slot_Ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.896 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.9120

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.693 mW/g

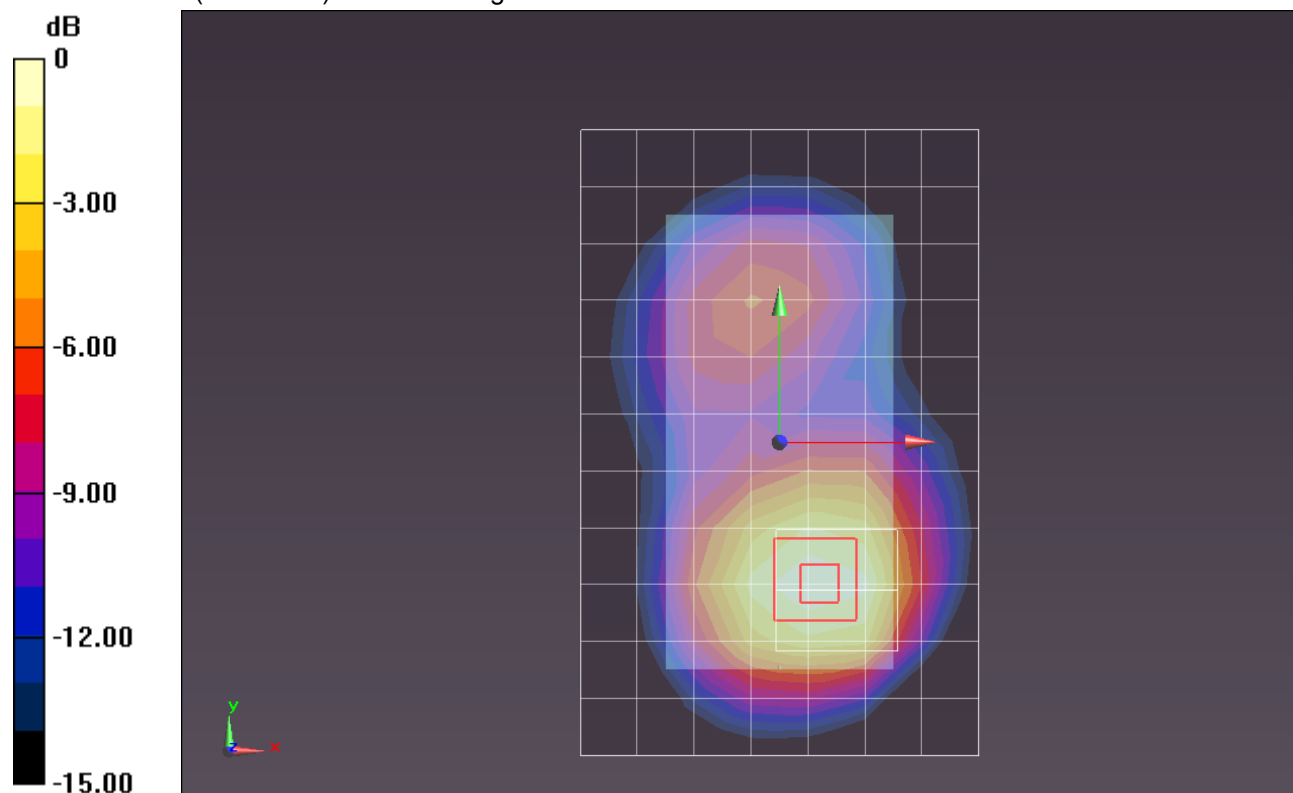


0 dB = 0.690mW/g = -3.22 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:2.60016

Rear/GPRS 3 Slot_Ch 661/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.695 mW/g

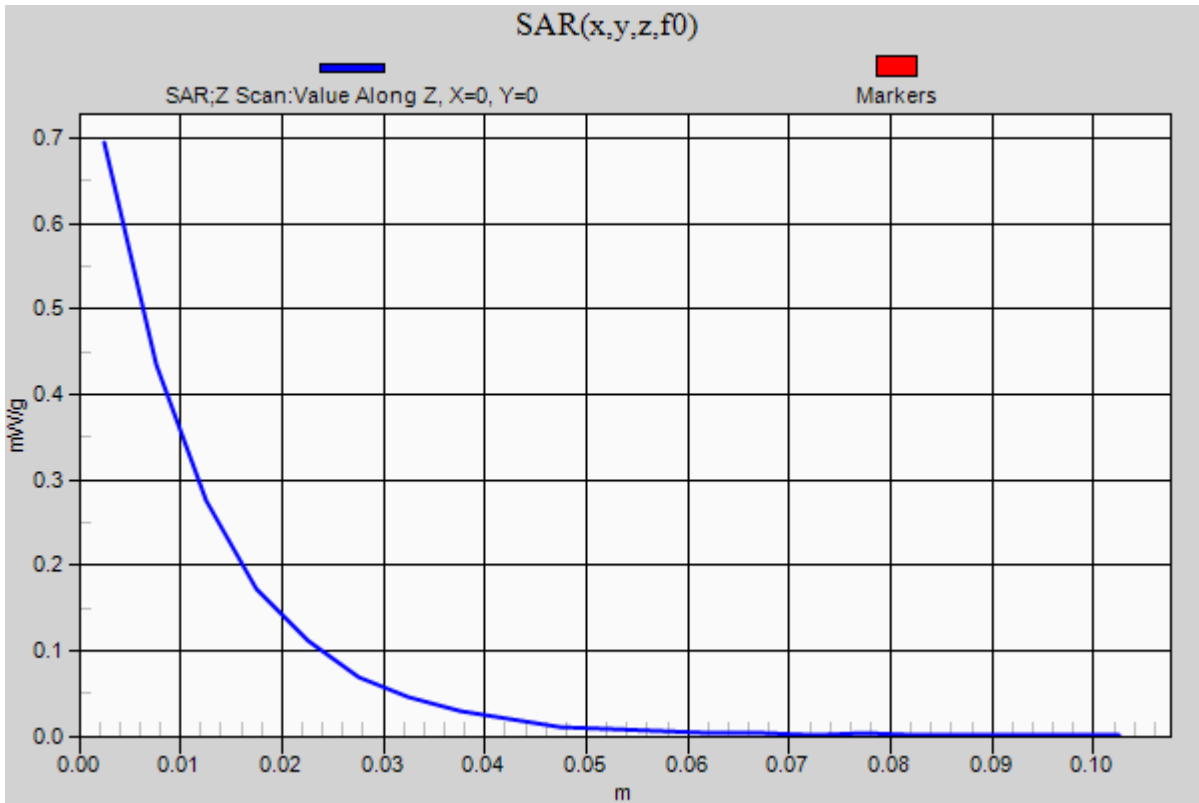

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/GPRS 3 Slot_Ch 661 w/Headset/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.546 mW/g


Rear/GPRS 3 Slot_Ch 661 w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.385 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.7100

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

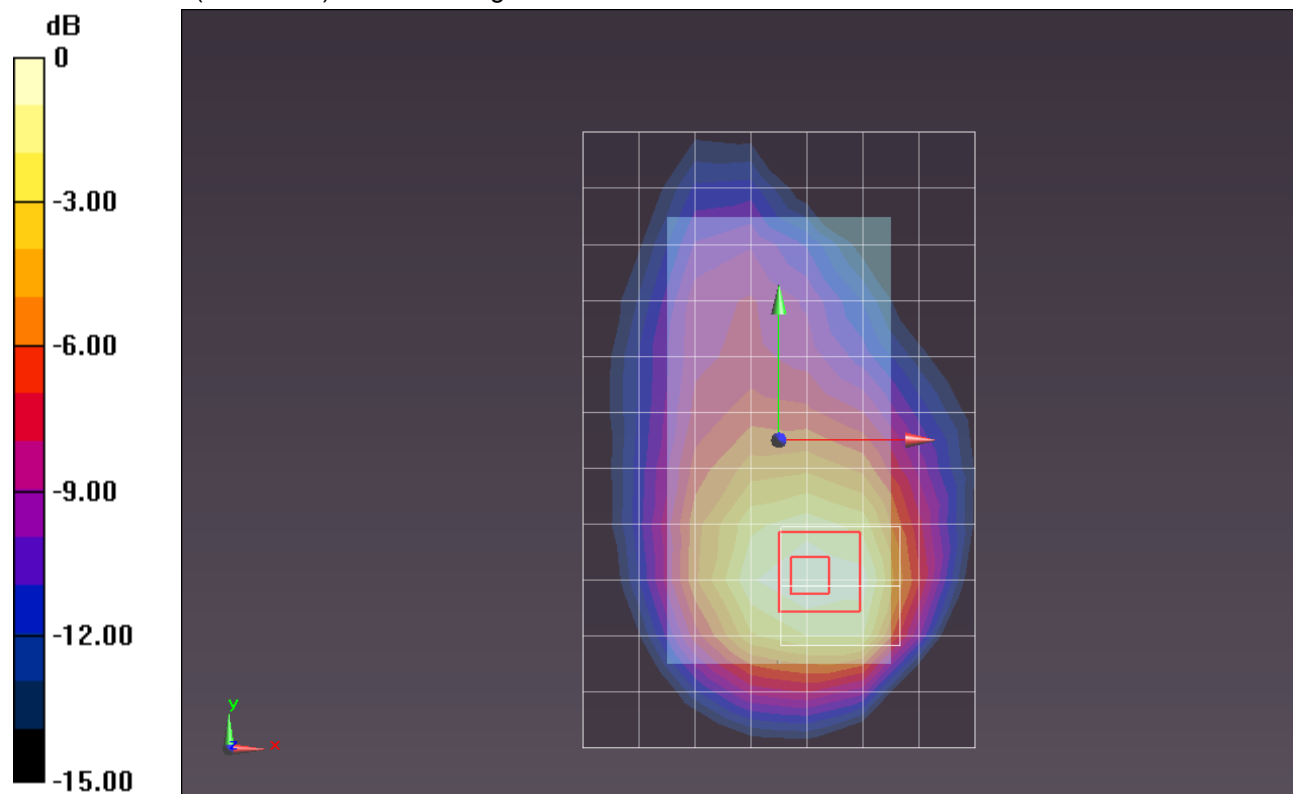

0 dB = 0.540mW/g = -5.35 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 53.124$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Front/GPRS 3 Slot_Ch 661/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.542 mW/g


Front/GPRS 3 Slot_Ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.234 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.6890

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.541 mW/g

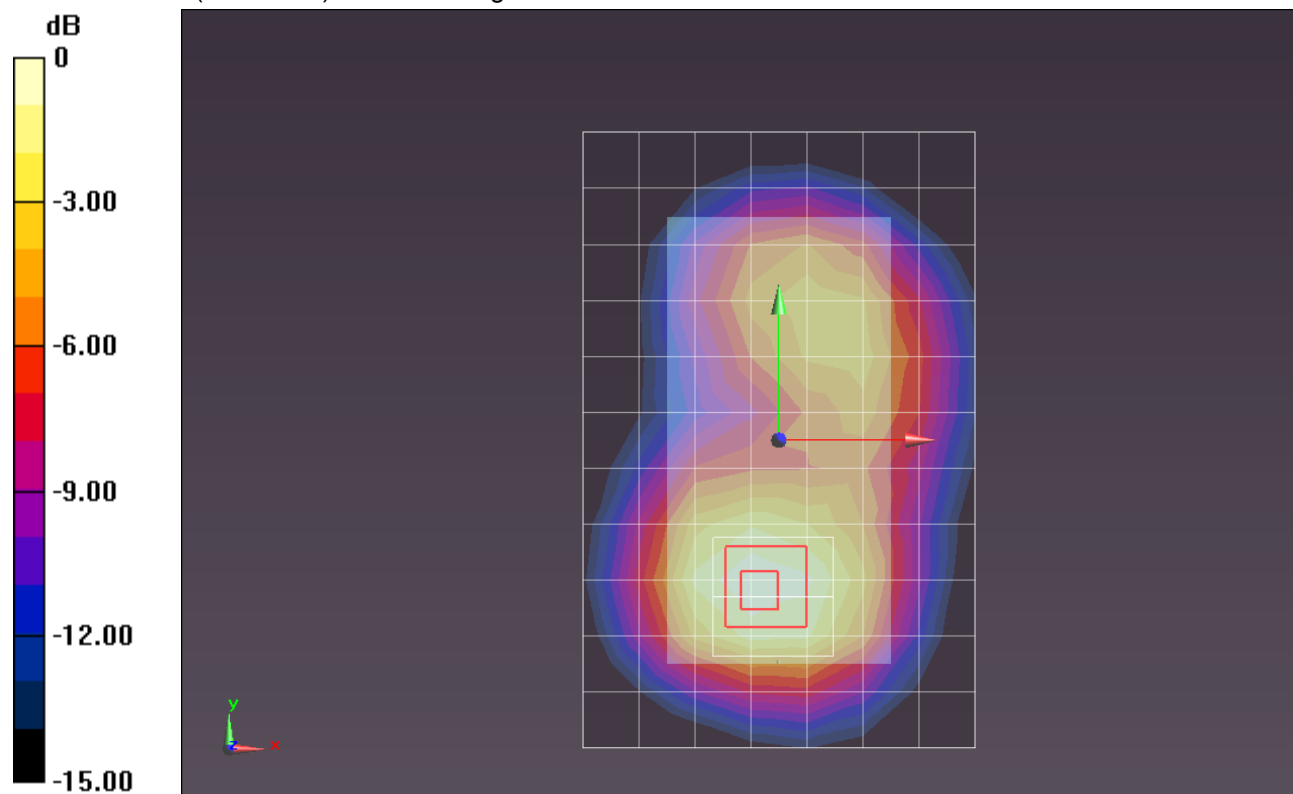

0 dB = 0.540mW/g = -5.35 dB mW/g