

UMTS band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 41.507$; $\rho = 1000$ kg/m³
 DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

LHS/Touch_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.682 mW/g


LHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.983 V/m; Power Drift = 0.0061 dB

Peak SAR (extrapolated) = 0.8600

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.685 mW/g

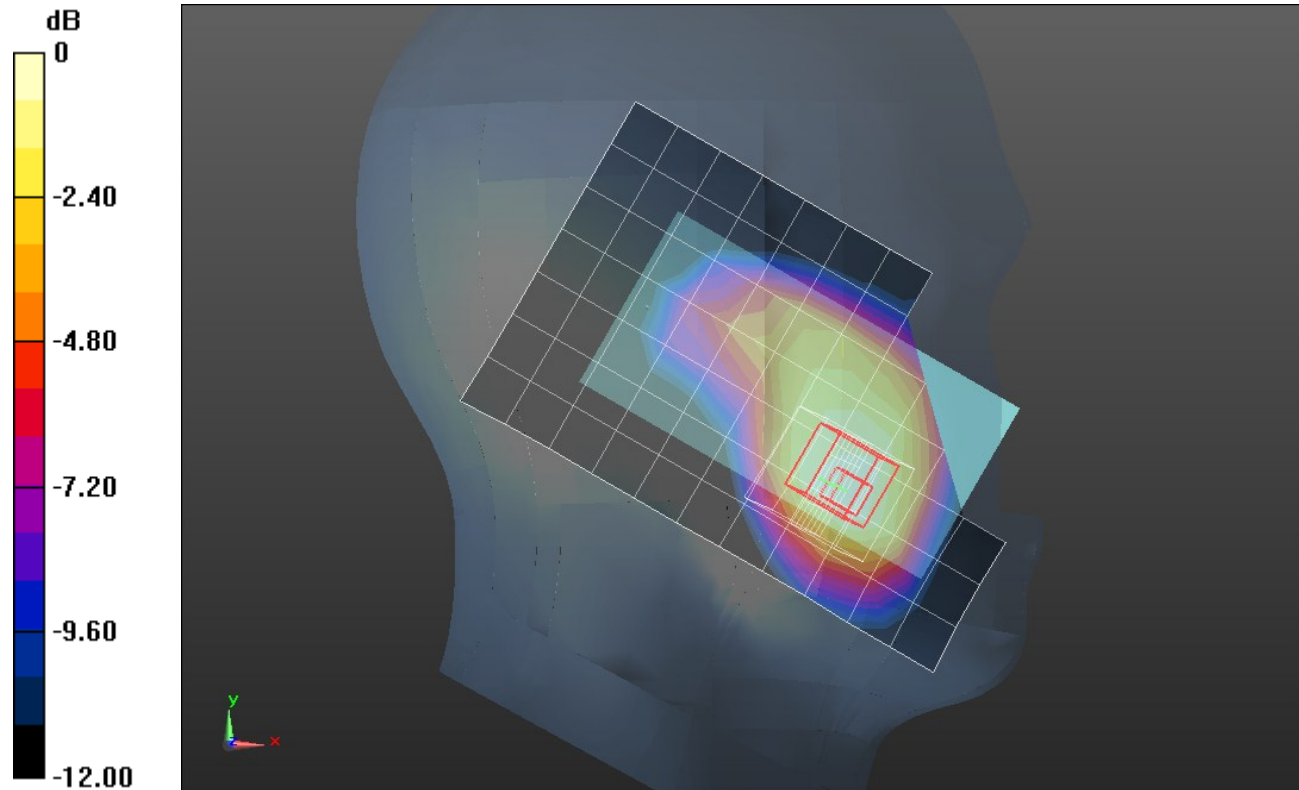

0 dB = 0.680mW/g = -3.35 dB mW/g

UMTS band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 41.507$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

LHS/Tilt_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.341 mW/g


LHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.592 V/m; Power Drift = -0.0036 dB

Peak SAR (extrapolated) = 0.4390

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

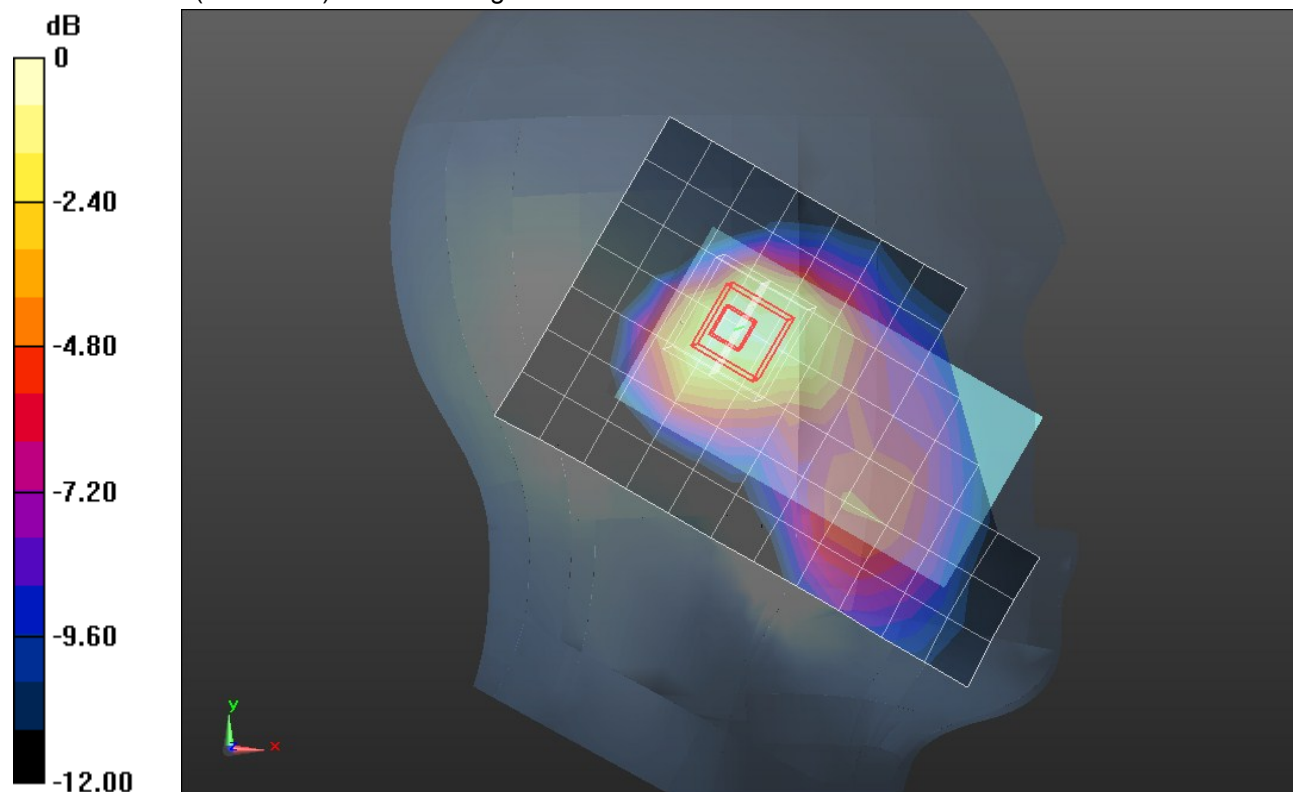

0 dB = 0.350mW/g = -9.12 dB mW/g

UMTS band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 41.507$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

RHS/Touch_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.632 mW/g


RHS/Touch_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.253 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.8190

SAR(1 g) = 0.559 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.662 mW/g

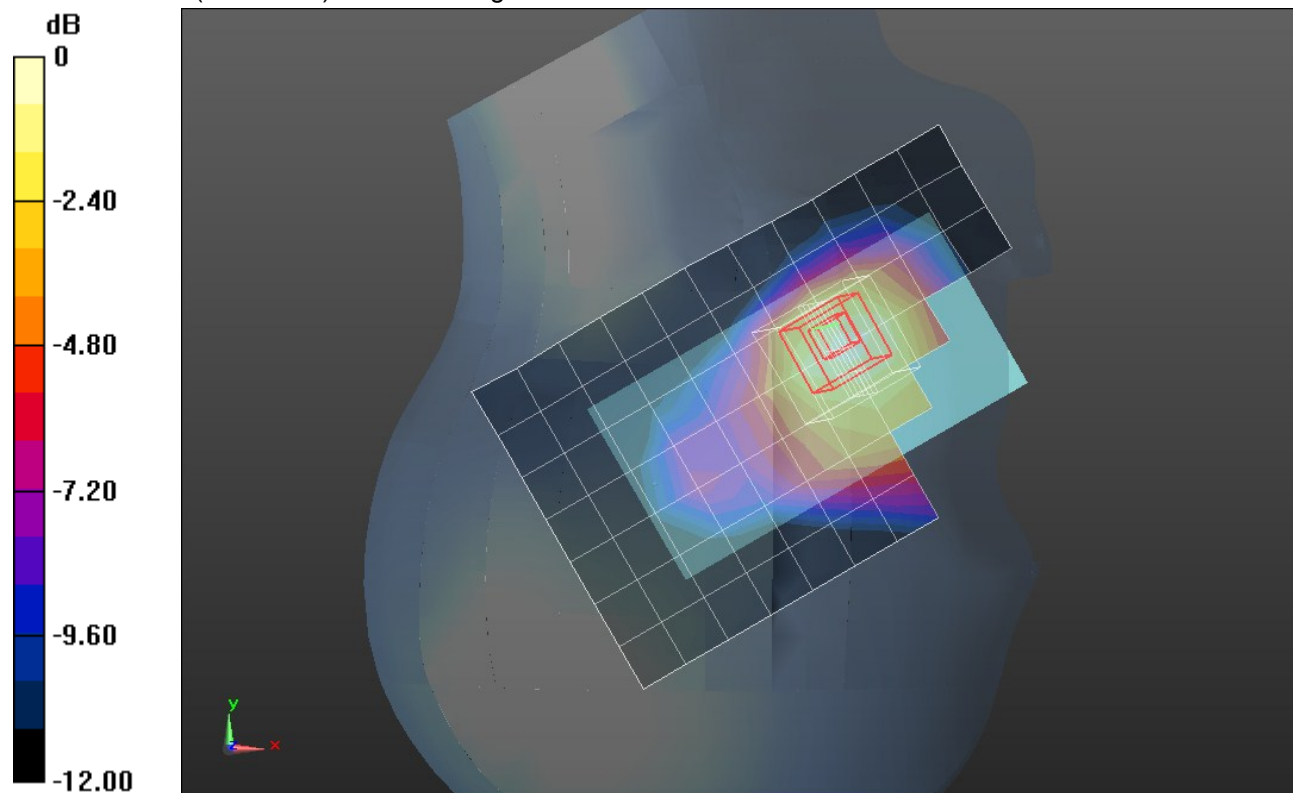


0 dB = 0.660mW/g = -3.61 dB mW/g

UMTS band II

Frequency: 1880 MHz; Duty Cycle: 1:1

RHS/Touch_M ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.635 mW/g

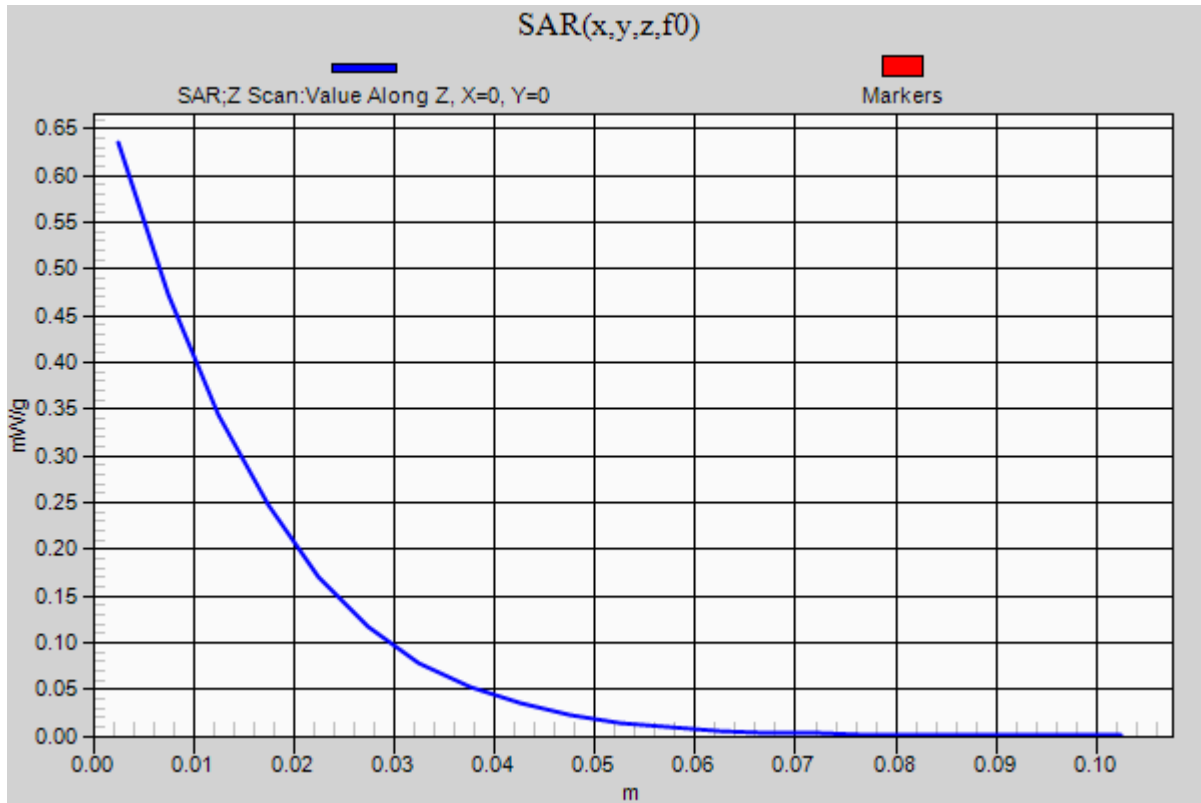

UMTS band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 41.507$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

RHS/Tilt_M ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.296 mW/g


RHS/Tilt_M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.655 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.4270

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.340 mW/g

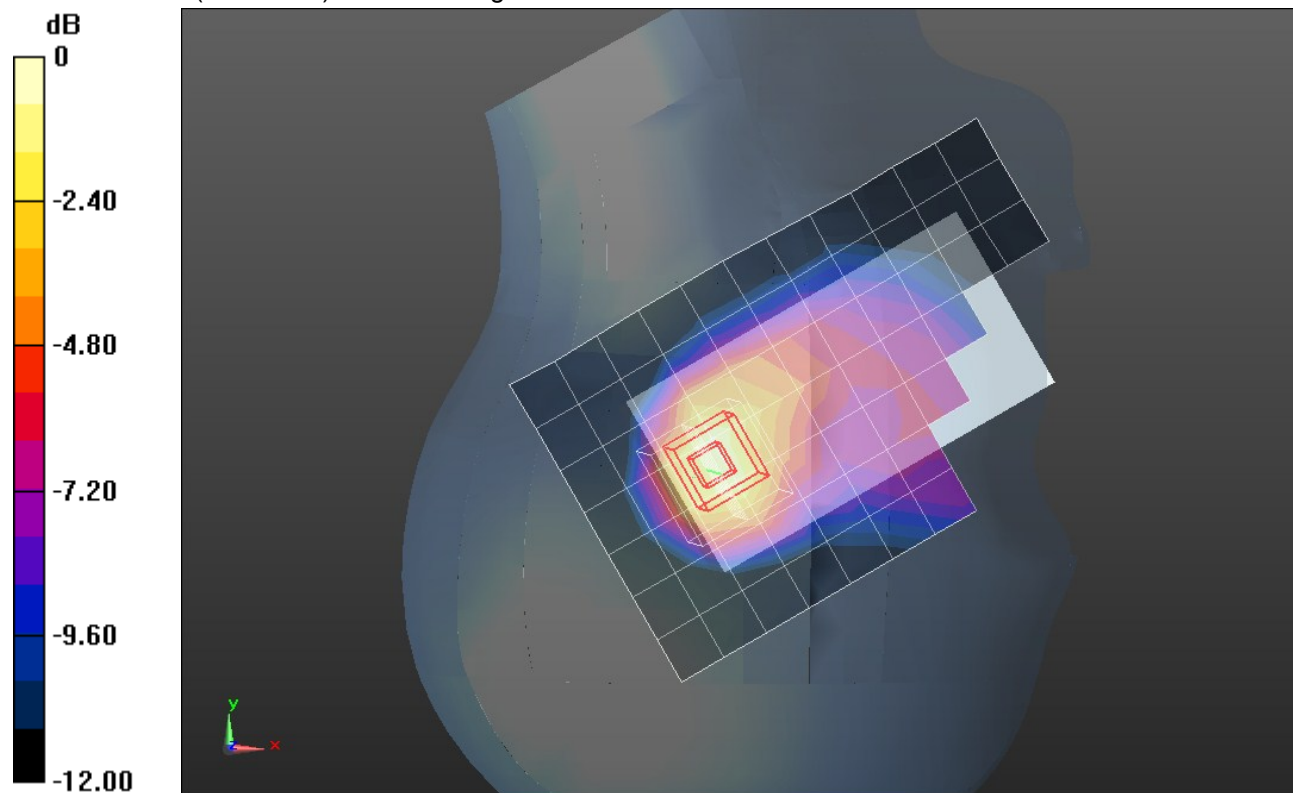

0 dB = 0.340mW/g = -9.37 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011

- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/R99_Ch 9400/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.887 mW/g


Rear/R99_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.645 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.2220

SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.429 mW/g

Maximum value of SAR (measured) = 0.867 mW/g

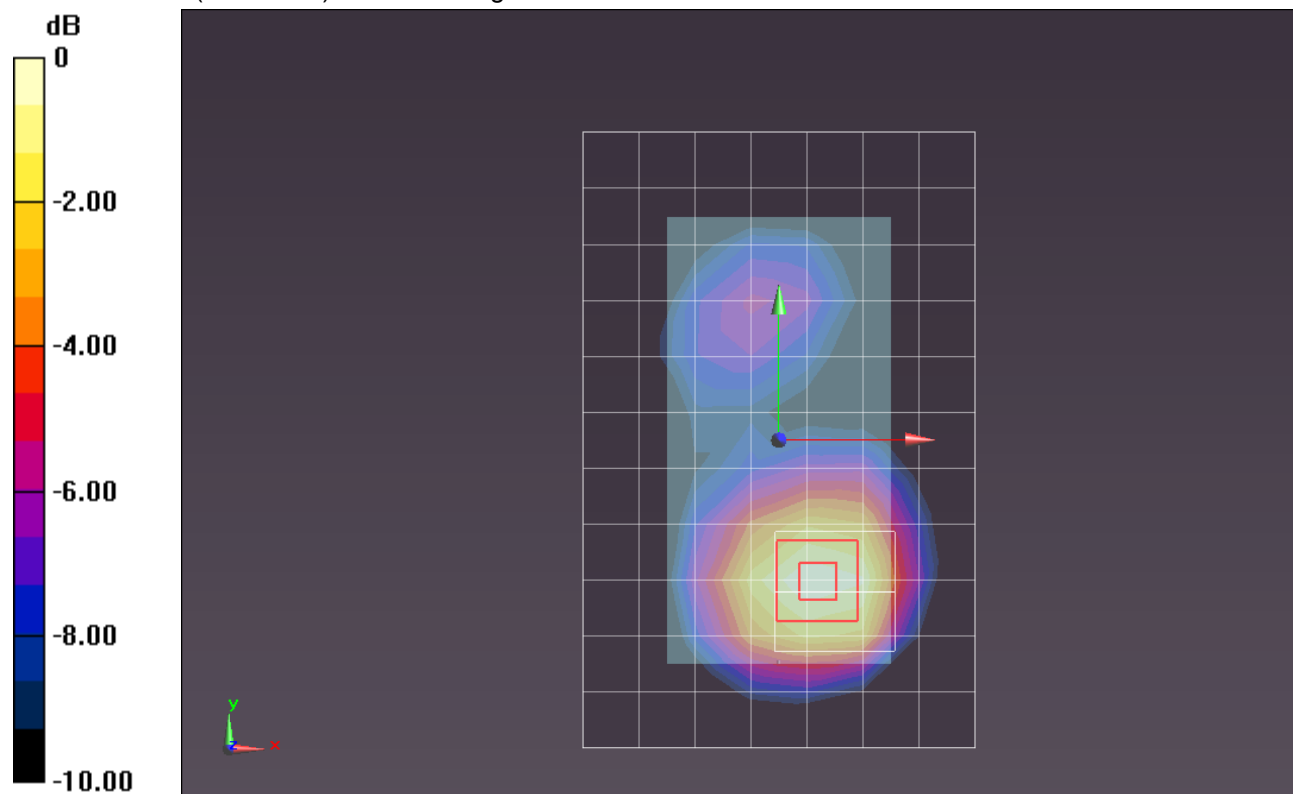


0 dB = 0.870mW/g = -1.21 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/R99_Ch 9400/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.864 mW/g

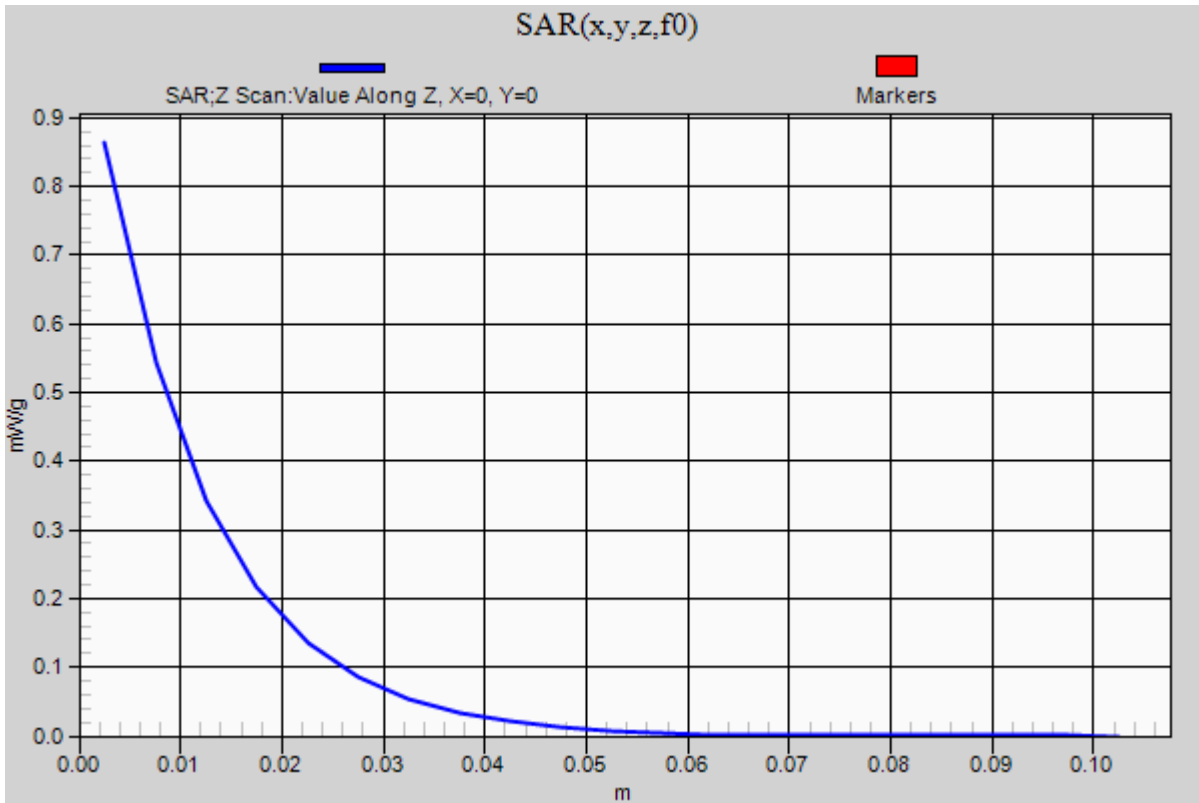

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 53.124$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Rear/R99_Ch 9400 w/Headset/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 0.754 mW/g

Rear/R99_Ch 9400 w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.783 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.9910

SAR(1 g) = 0.606 mW/g; SAR(10 g) = 0.372 mW/g

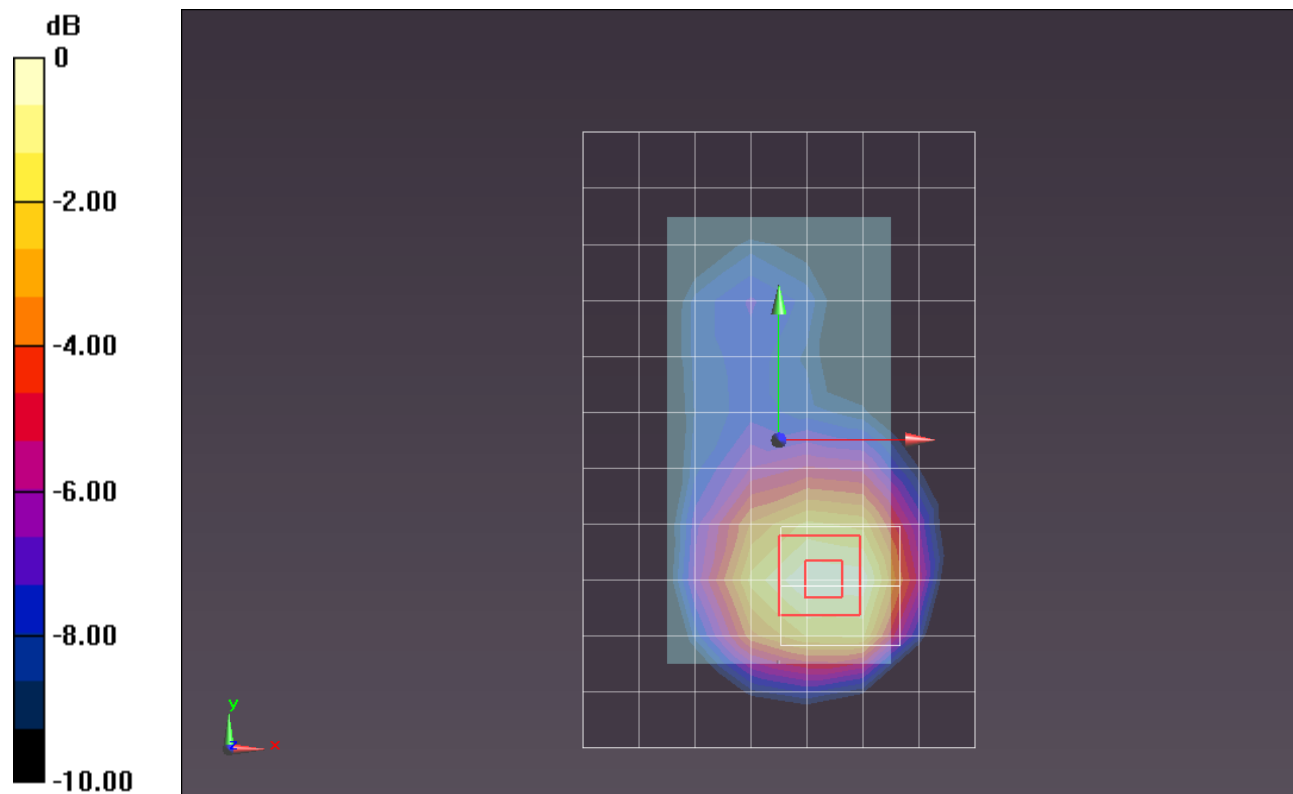

0 dB = 0.750mW/g = -2.50 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 53.124$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Front/R99_Ch 9400/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.652 mW/g


Front/R99_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.231 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.8260

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.662 mW/g

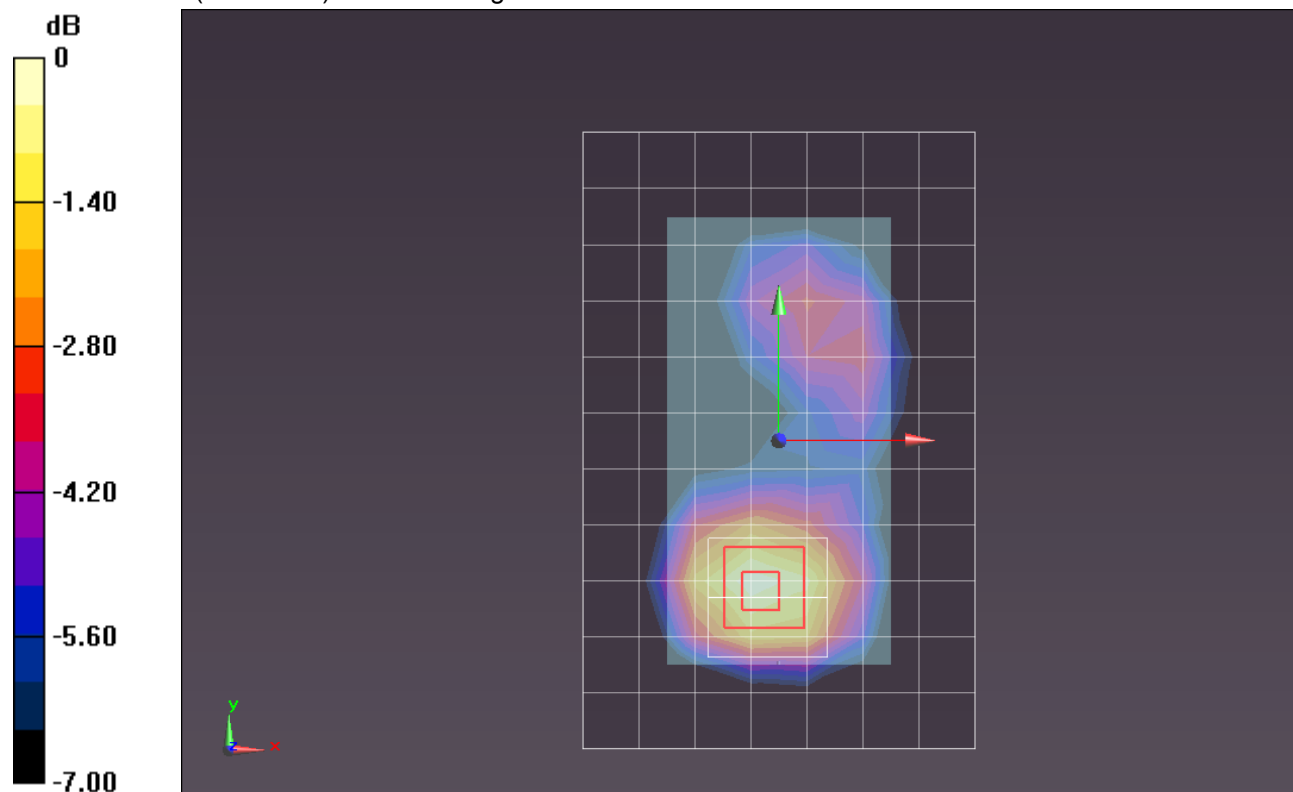

0 dB = 0.660mW/g = -3.61 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Edge 2/R99_Ch 9400/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 mW/g


Edge 2/R99_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.343 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.2010

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

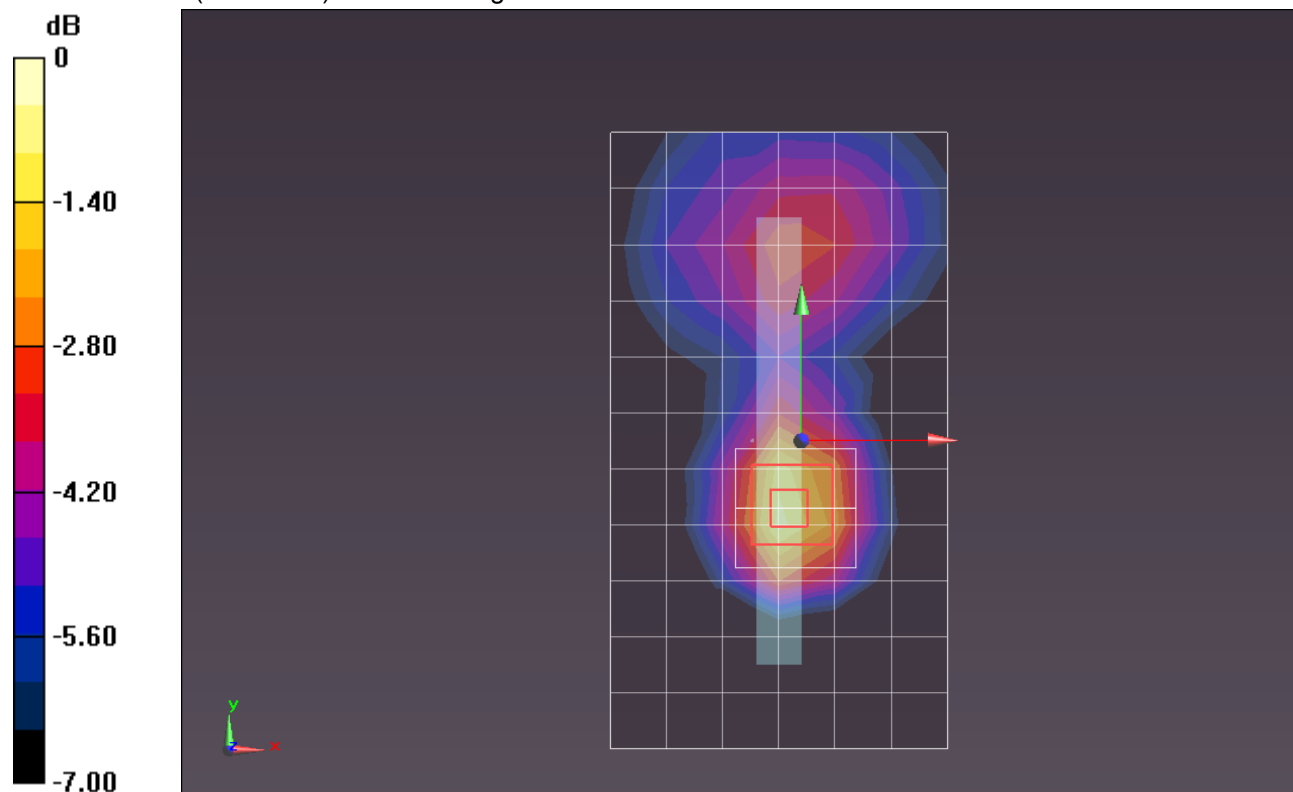

0 dB = 0.160mW/g = -15.92 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.124$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Edge 3/R99_Ch 9400/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.429 mW/g


Edge 3/R99_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.240 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.6460

SAR(1 g) = 0.403 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.510 mW/g

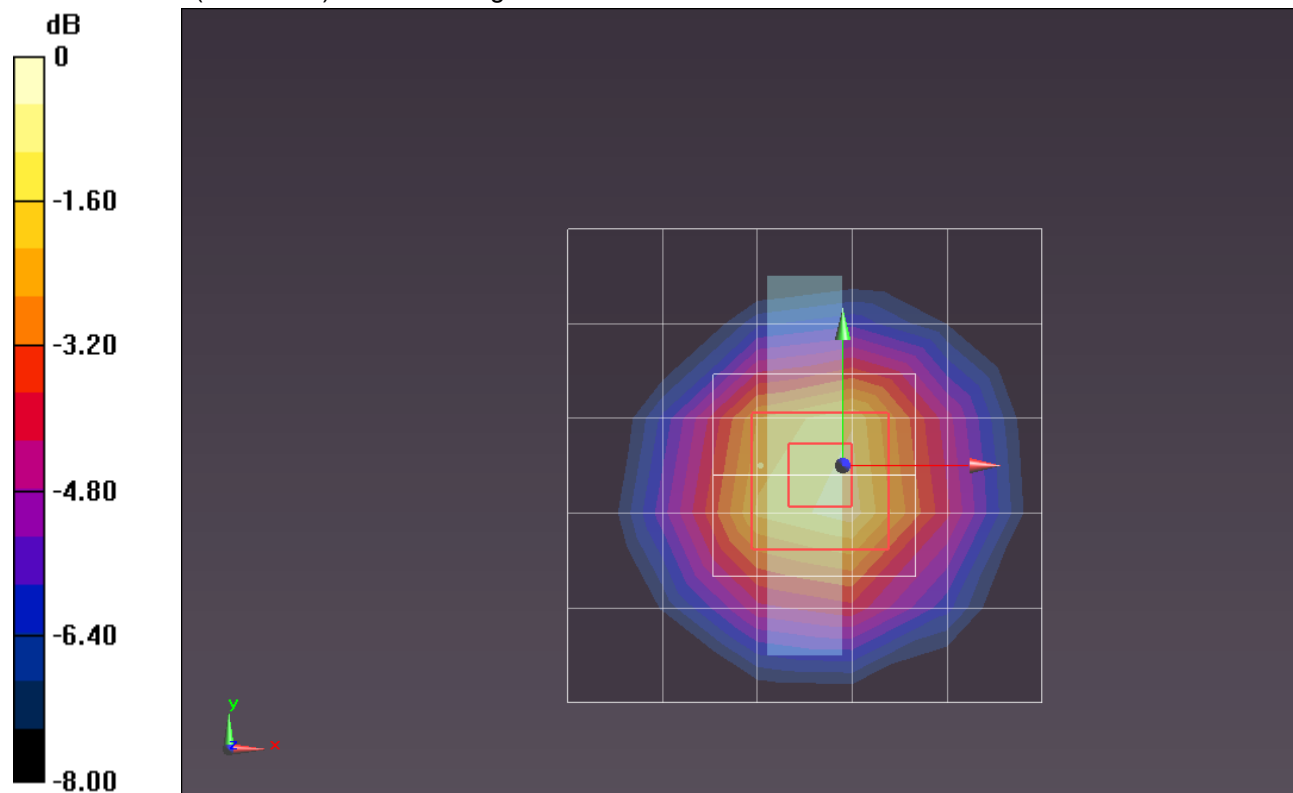

0 dB = 0.510mW/g = -5.85 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 53.124$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Edge 4/R99_Ch 9400/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.377 mW/g



Edge 4/R99_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.042 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.4980

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.395 mW/g

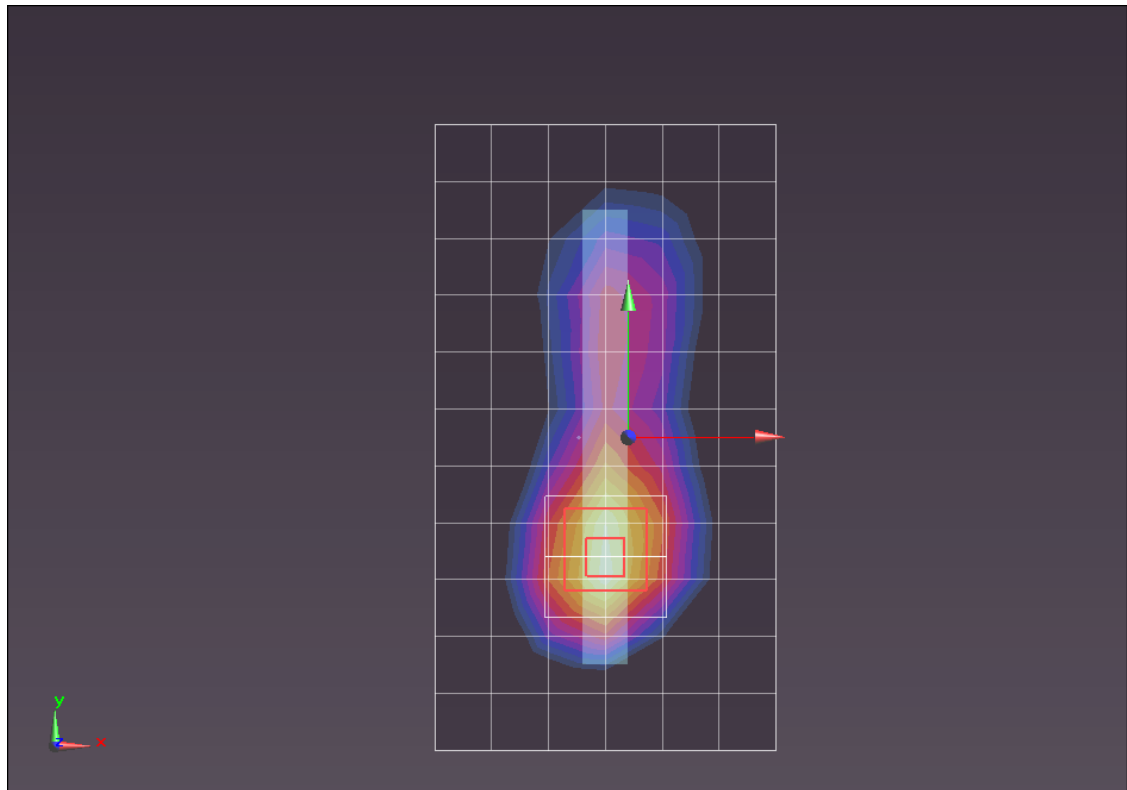

0 dB = 0.390mW/g = -8.18 dB mW/g