



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC PART 15.407 (UNII)

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803
Republic of Korea

Date of Testing:
02/28/2013 - 03/15/2013
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1302280376.A3L

FCC ID:	A3LGTB9150
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model(s): GT-B9150
EUT Type: Wireless LAN Multimedia Box
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Procedure(s): ANSI C63.10-2009, KDB 789033 v01r02, KDB 662911

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT 2		MIMO	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Summed Power (mW)	Summed Power (dBm)
802.11a	1	20	5180 - 5240	11.508	10.61	11.220	10.50	-	-
	2	20	5260 - 5320	11.220	10.50	9.120	9.60	-	-
	3	20	5500 - 5700	10.023	10.01	9.727	9.88	-	-
802.11n	1	20	5180 - 5240	9.727	9.88	11.169	10.48	20.701	13.16
	2	20	5260 - 5320	10.093	10.04	8.851	9.47	18.923	12.77
	3	20	5500 - 5700	9.484	9.77	9.817	9.92	19.011	12.79
802.11n	1	40	5190 - 5230	9.016	9.55	10.399	10.17	19.231	12.84
	2	40	5270 - 5310	8.933	9.51	7.943	9.00	16.788	12.25
	3	40	5510 - 5670	10.568	10.24	9.141	9.61	19.187	12.83

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009, KDB 789033, KDB 662911. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 1 of 159	

TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		6
2.5 LABELING REQUIREMENTS.....		6
3.0 DESCRIPTION OF TEST.....		7
3.1 EVALUATION PROCEDURE.....		7
3.2 AC LINE CONDUCTED EMISSIONS.....		7
3.3 RADIATED EMISSIONS.....		8
4.0 ANTENNA REQUIREMENTS.....		9
5.0 TEST EQUIPMENT CALIBRATION DATA.....		10
6.0 TEST RESULTS.....		11
6.1 SUMMARY.....		11
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N.....		12
6.3 UNII OUTPUT POWER MEASUREMENT – 802.11A/N.....		41
6.4 PEAK POWER SPECTRAL DENSITY – 802.11A/N.....		45
6.5 PEAK EXCURSION RATIO – 802.11A/N.....		75
6.6 FREQUENCY STABILITY: ANTENNA-1.....		80
6.7 FREQUENCY STABILITY: ANTENNA-2.....		83
6.8 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		86
6.9 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW).....		99
6.10 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW).....		106
6.11 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW).....		113
6.12 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW).....		120
6.13 MIMO RADIATED BAND EDGE MEASUREMENTS (20MHZ BW).....		127
6.14 MIMO RADIATED BAND EDGE MEASUREMENTS (40MHZ BW).....		134
6.15 ANTENNA-1 LINE-CONDUCTED TEST DATA.....		141
6.16 ANTENNA-2 LINE-CONDUCTED TEST DATA.....		147
6.17 MIMO LINE-CONDUCTED TEST DATA.....		153
7.0 CONCLUSION.....		159

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 2 of 159



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803, Republic of Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

IC SPECIFICATION(S): RSS-210 Issue 8

MODEL NAME: GT-B9150

FCC ID: A3LGTB9150

Test Device Serial No.: R32D2031DDD, Production Pre-Production Engineering
R32D20331B6J

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: 02/28/2013 - 03/15/2013



TEST REPORT S/N: 0Y1302280376.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 3 of 159	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

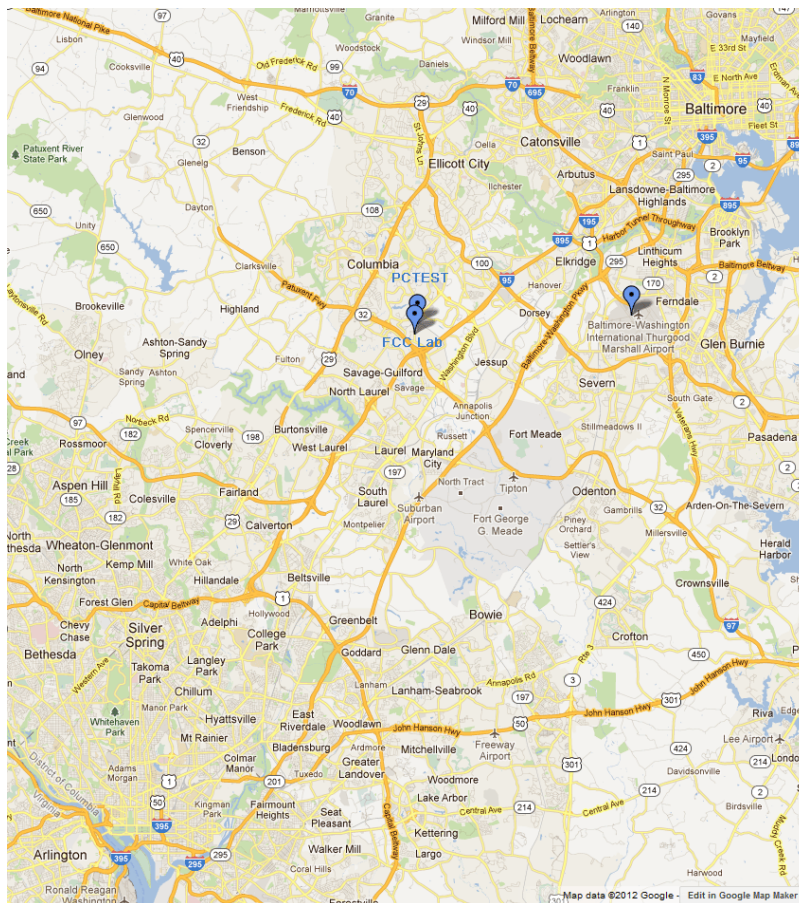




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 4 of 159	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Wireless LAN Multimedia Box FCC ID: A3LGTB9150**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

The Samsung Wireless LAN Multimedia Box employs two separate antennas capable of transmitting in DTS/NII modes. These antennas are also capable to operate in Multiple Input Multiple Output (MIMO) mode.

2.2 Device Capabilities

This device contains the following capabilities:

802.11a/b/g/n WLAN (DTS/NII), WiFi 2x2 MIMO, Bluetooth (1x,EDR, LE)

Note: 5GHz 802.11n transmission in this device supports 20MHz and 40MHz channel bandwidths. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM	
		ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✘	✓	✘	✘
	11g	✓	✓	✘	✘
	11n	✓	✓	✓	✓
5GHz	11a	✓	✓	✘	✘
	11n(HT20)	✓	✓	✓	✓
	11n(HT40)	✓	✓	✓	✓

Table 2-1 Possible EUT MIMO Configurations

✓ = Support ; ✘ = NOT Support



SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD or Cyclic Delay Diversity MIMO function is also a capability of the EUT. However, since CDD only alters the system by transmitting a phase shifted (i.e. cyclical) copy of the original signal within the same allotted bandwidth and using the same Tx power, it was determined that CDD operation was the same, in regards to matters relating to the bandwidth and powers, as SDM MIMO mode, which is addressed in the report. Thus, no further measurements were performed for CDD MIMO operation.

2.3 Test Configuration

The Samsung Wireless LAN Multimedia Box FCC ID: A3LGTB9150 was tested per the guidance of ANSI C63.10-2009, KDB 789033. and KDB 662911. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 5 of 159	

2.4 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 6 of 159

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 and KDB 662911 were used in the measurement of **Samsung Wireless LAN Multimedia Box FCC ID: A3LGTB9150**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.15. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: A3LGTB9150	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 7 of 159	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 8 of 159

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Wireless LAN Multimedia Box are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Samsung Wireless LAN Multimedia Box FCC ID: A3LGTB9150** unit complies with the requirement of §15.203.

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700



Table 4-1. 802.11a Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700

Table 4-2. 802.11n (20MHz BW) Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510
:	:	:	:	:	:
46	5230	62	5310	110	5550
:	:	:	:	:	:
				134	5670

Table 4-3. 802.11n (40MHz BW) Frequency / Channel Operations



FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 9 of 159

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	WL25-1	Conducted Cable Set (25GHz)	1/16/2013	Annual	1/16/2014	N/A
-	40G-1R	40GHz Radiated Cable Set	2/22/2013	Annual	2/22/2014	N/A
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/6/2012	Biennial	6/6/2014	130993
Mini-Circuits	VHF-8400+	3.4GHz - 9.9GHz High Pass Filter	1/17/2013	Annual	1/17/2014	31048
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	6/6/2012	Annual	6/6/2013	100037
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 10 of 159

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LGTB9150
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2, 13/14.4,
26/28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4 (n – 20MHz)
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150, 27/30, 54/60,
81/90, 108/120, 162/180, 216/240, 243/270, 270/300 (n – 40MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	< 4 + 10log ₁₀ (BW) dBm (5150-5250MHz) [FCC] < 10 + 10log ₁₀ (BW) dBm (5150-5250MHz) [IC] < 11 + 10log ₁₀ (B) dBm (5250-5350MHz, 5470 – 5725MHz)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10dBm/MHz (5150-5250) [IC] < 11dBm/MHz (5250-5350) < 11dBm/MHz (5470-5725)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.6, 6.7
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)	RADIATED	PASS	Section 6.8
15.205, 15.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.9, 6.10, 6.11, 6.12, 6.13, 6.14
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits		LINE CONDUCTED	PASS

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 1.5.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 11 of 159	

6.2 26dB Bandwidth Measurement – 802.11a/n

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 v01r02 – Section D

Test Settings

1. RBW = approximately 1% of the emission bandwidth
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. The automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-1. Test Instrument & Measurement Setup

Test Notes



Measurements were performed for both Antenna 1 and 2.


FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 12 of 159	

Antenna-1 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	19.37
	5200	40	a	6	19.18
	5240	48	a	6	19.30
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.48
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.01
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	19.54
	5190	38	n (40MHz)	13.5/15 (MCS0)	45.34
	5230	46	n (40MHz)	13.5/15 (MCS0)	45.62
Band II	5260	52	a	6	19.19
	5280	56	a	6	19.36
	5320	64	a	6	18.87
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.63
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.82
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.63
	5270	54	n (40MHz)	13.5/15 (MCS0)	45.74
	5310	62	n (40MHz)	13.5/15 (MCS0)	45.08
Band III	5500	100	a	6	19.28
	5580	116	a	6	19.37
	5700	140	a	6	19.06
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.79
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	19.71
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	19.47
	5510	102	n (40MHz)	13.5/15 (MCS0)	45.50
	5550	110	n (40MHz)	13.5/15 (MCS0)	45.31
	5670	134	n (40MHz)	13.5/15 (MCS0)	45.10

Table 6-2. Antenna-1 Conducted Bandwidth Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 13 of 159

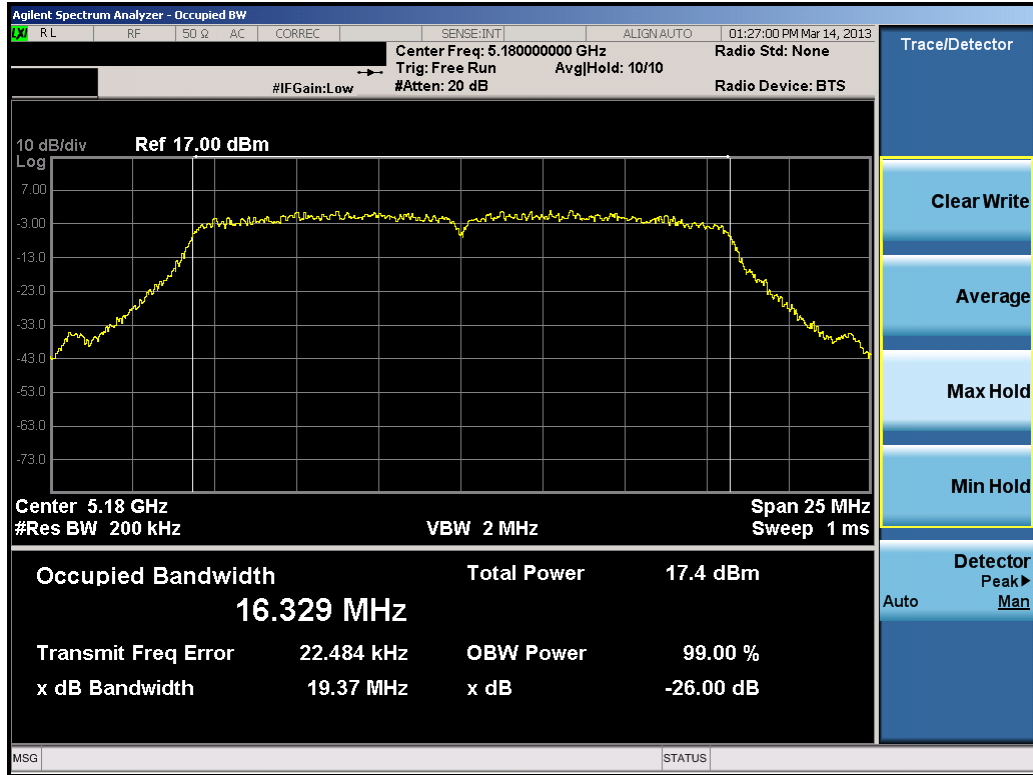


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

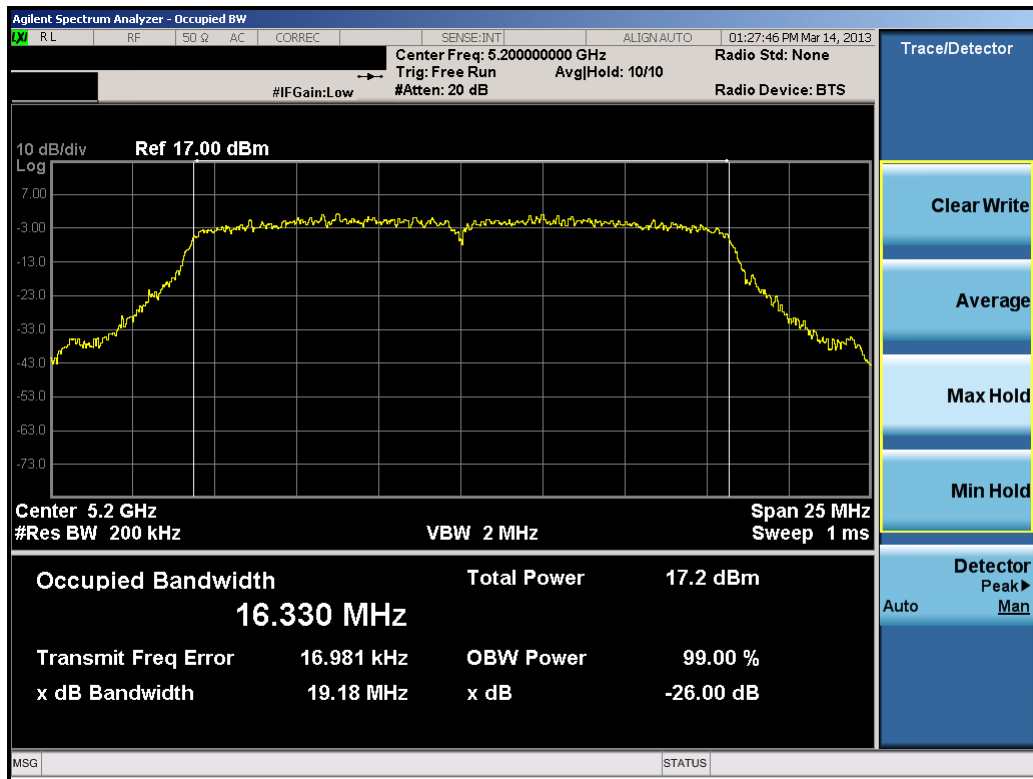


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 14 of 159

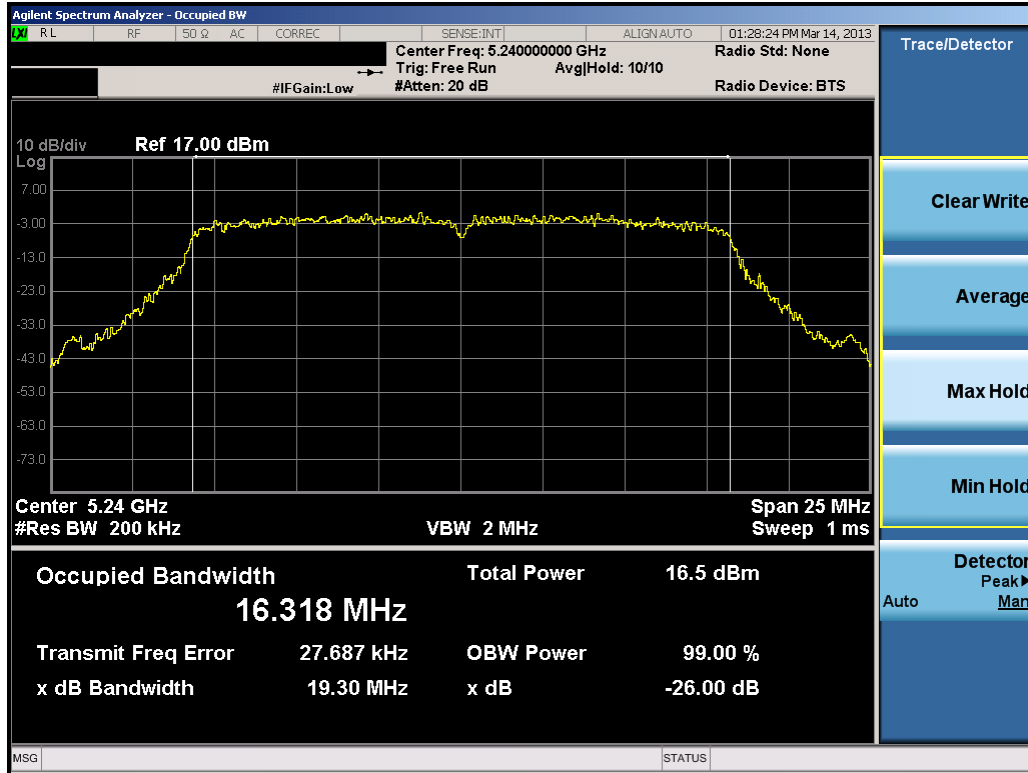


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

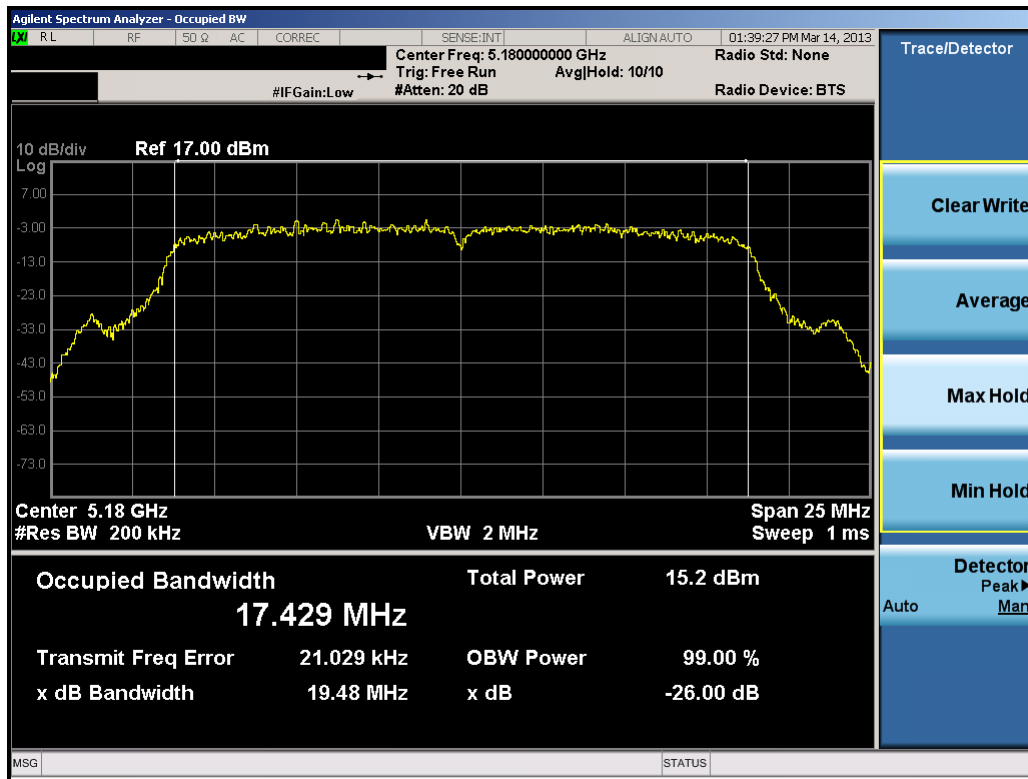


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 15 of 159

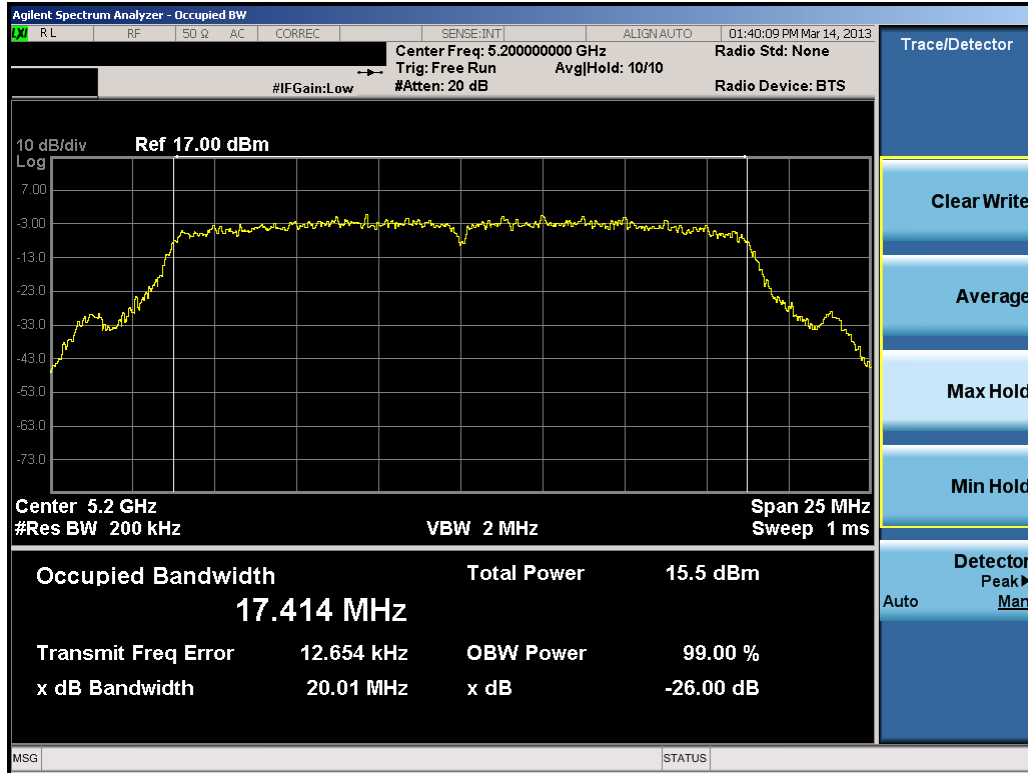


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

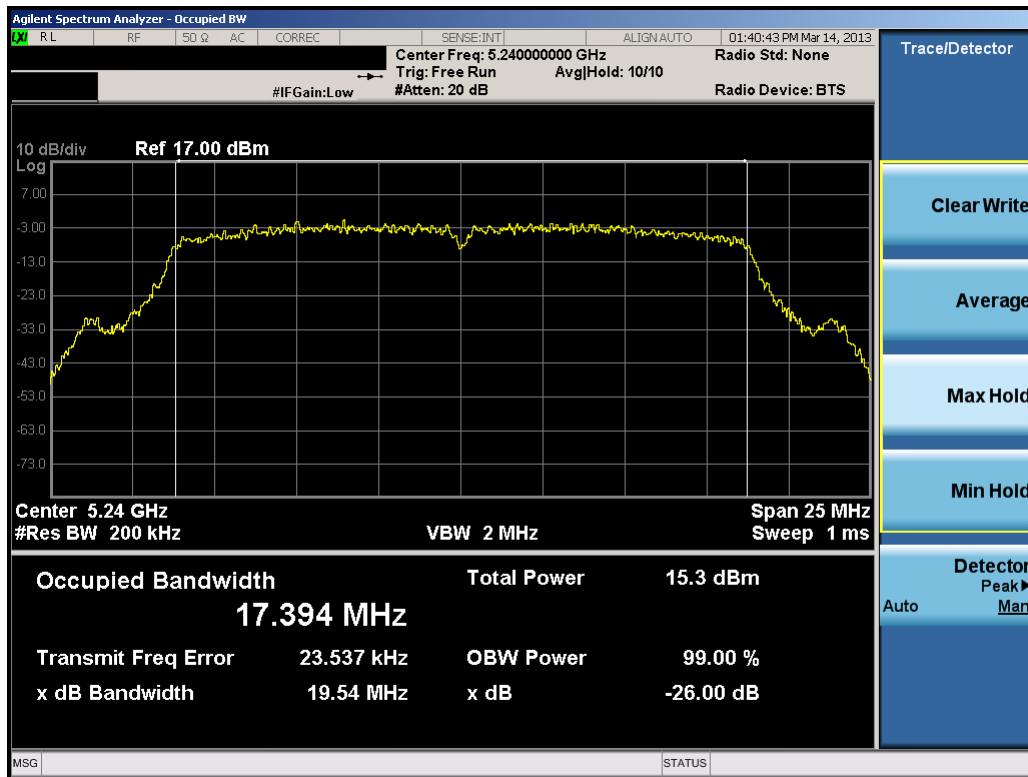


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 16 of 159

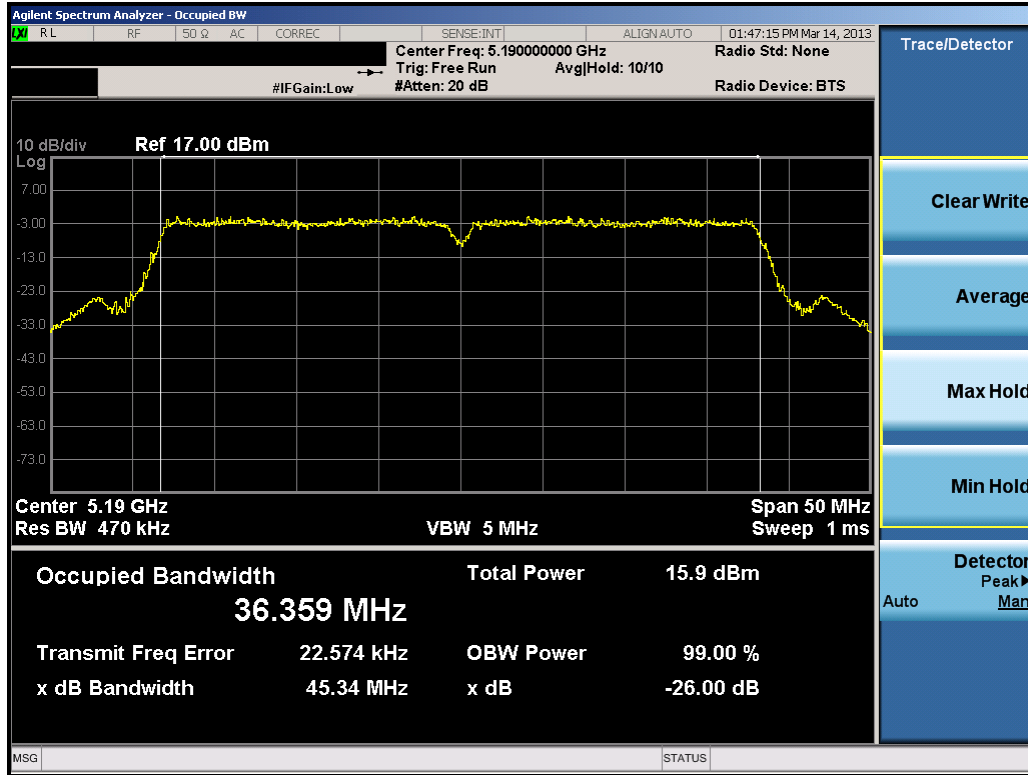


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

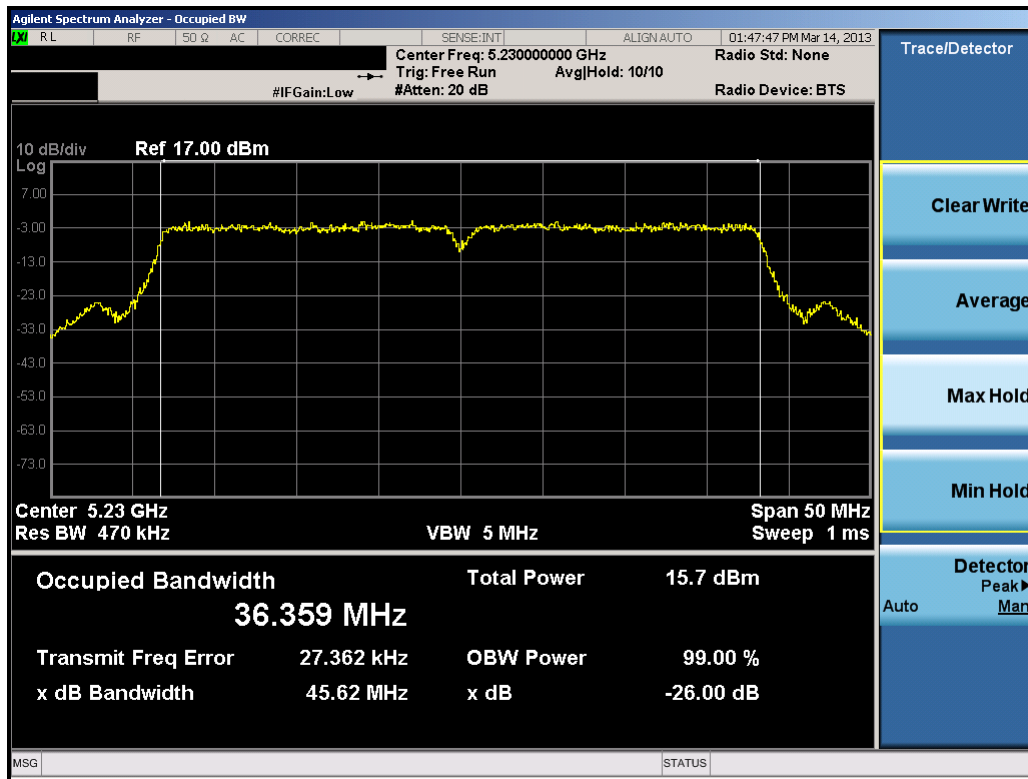


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 17 of 159

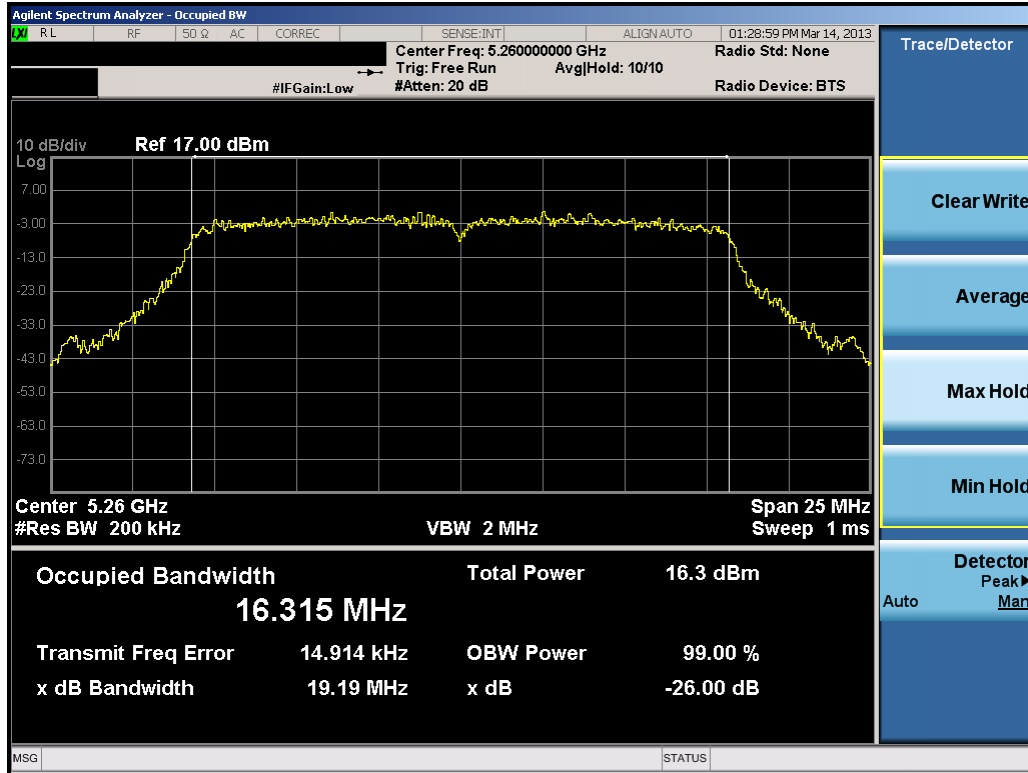


Plot 6-9. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

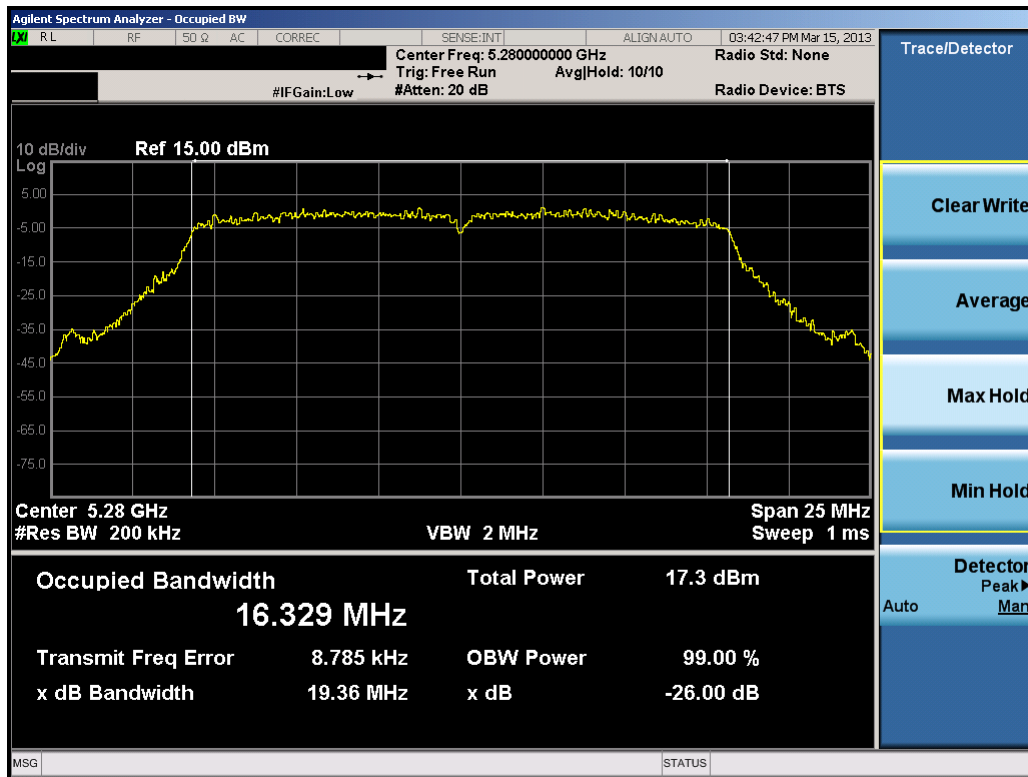


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 18 of 159	

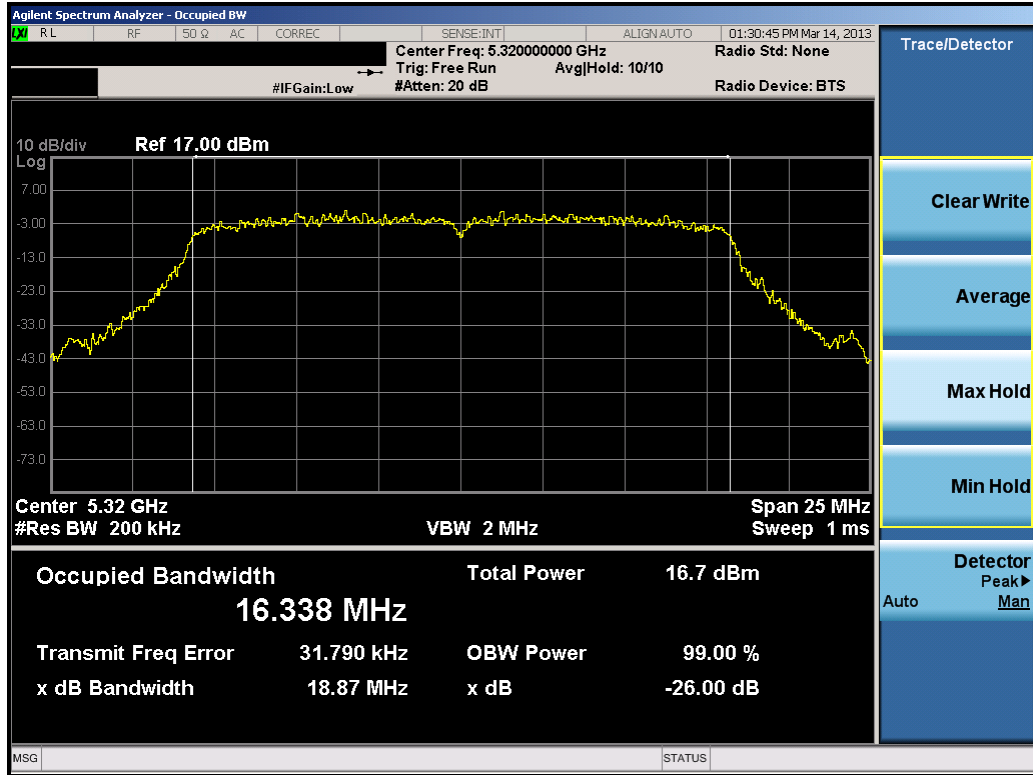


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

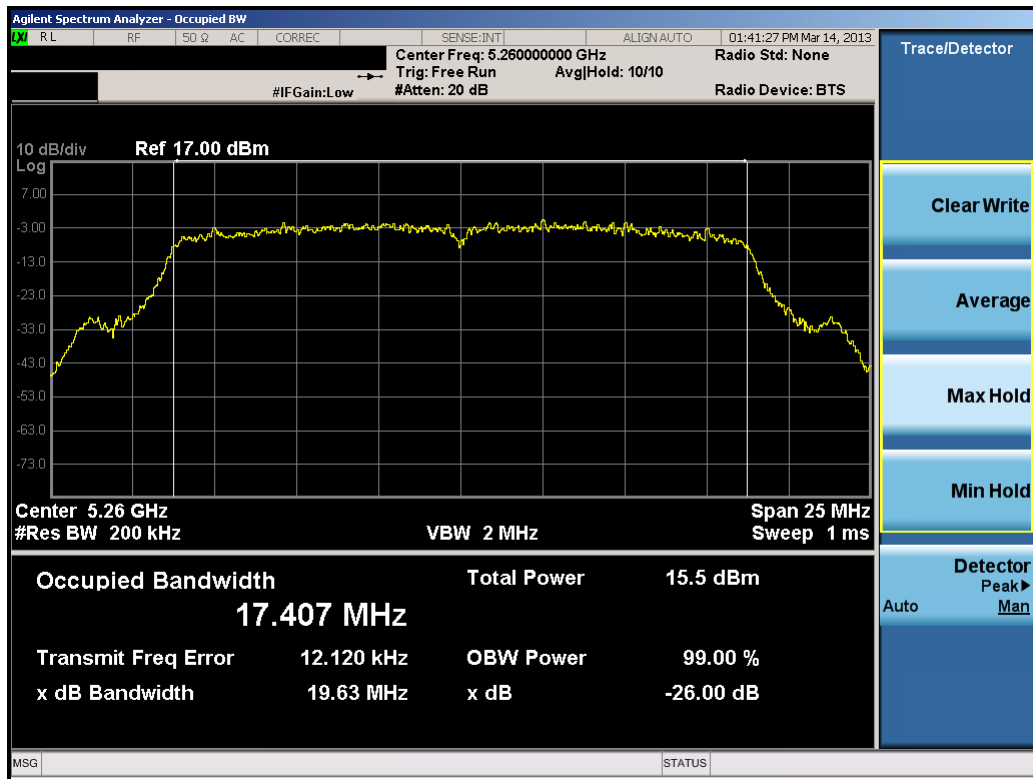


Plot 6-12. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 19 of 159

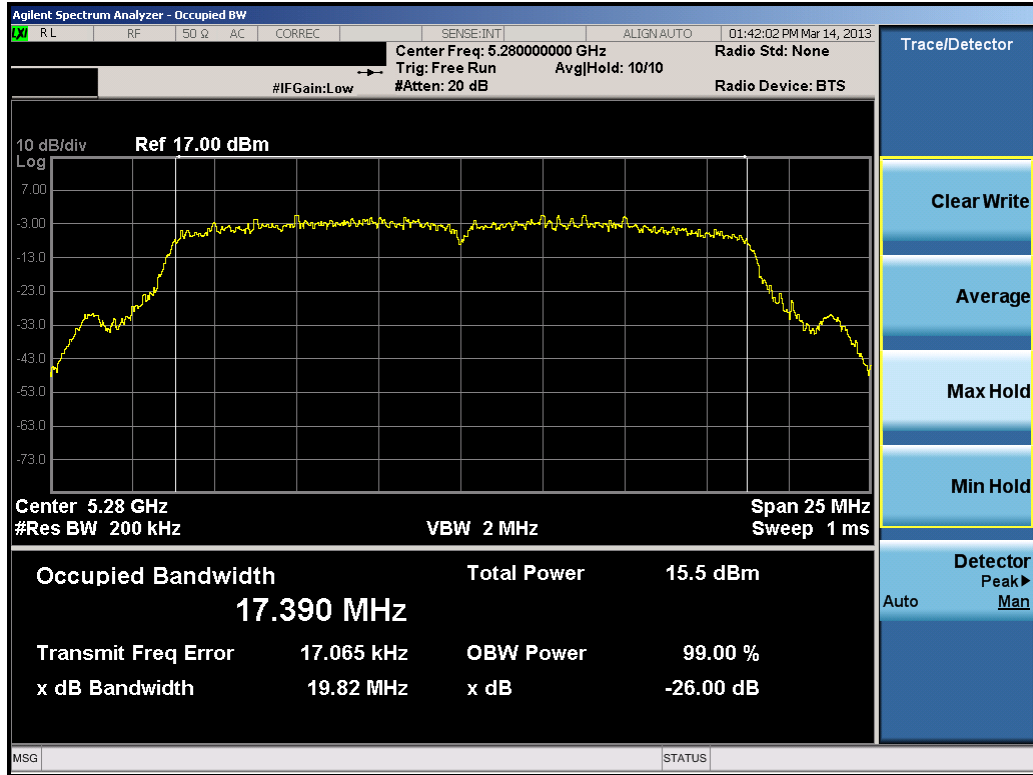


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

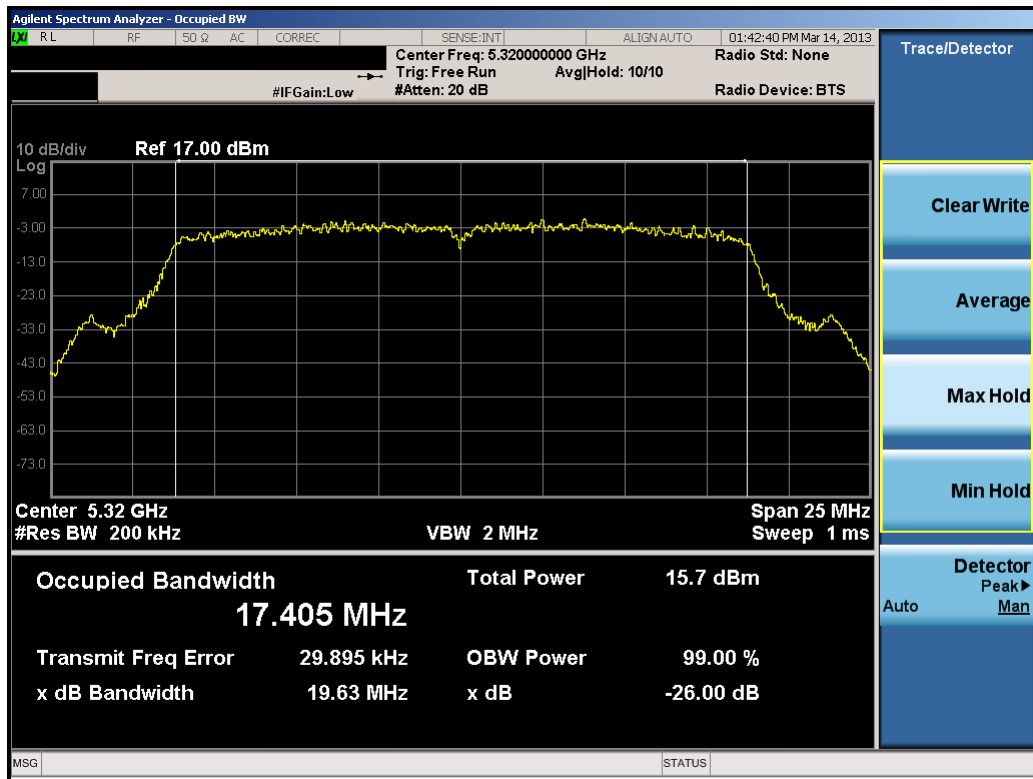


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 20 of 159

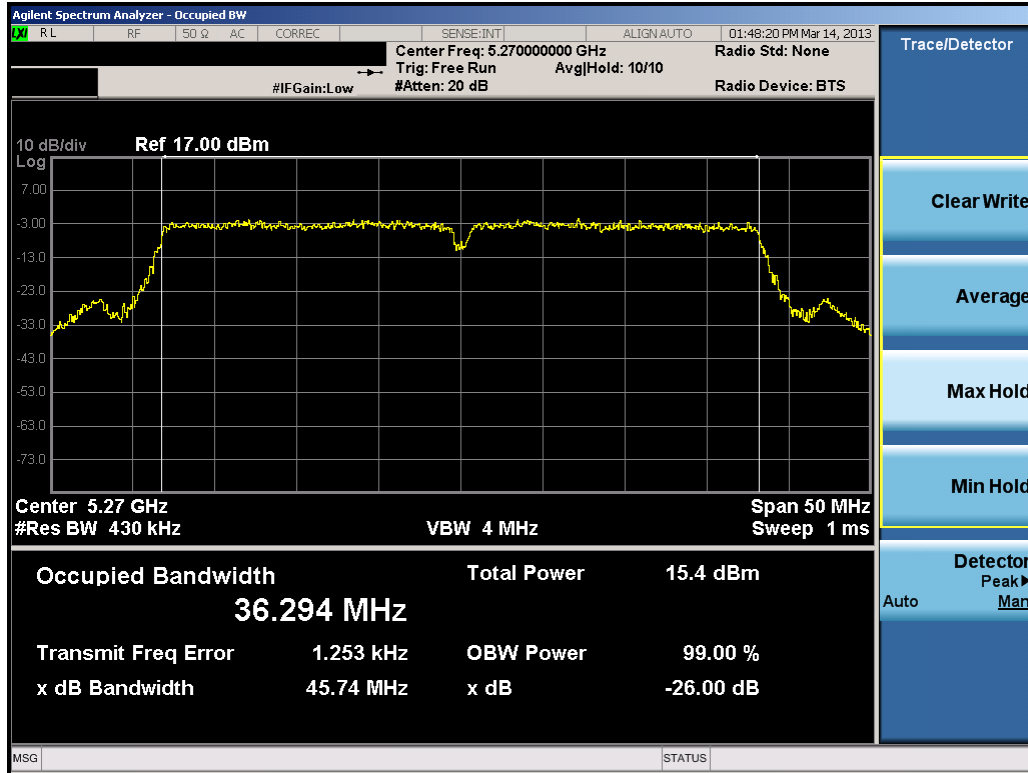


Plot 6-15. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

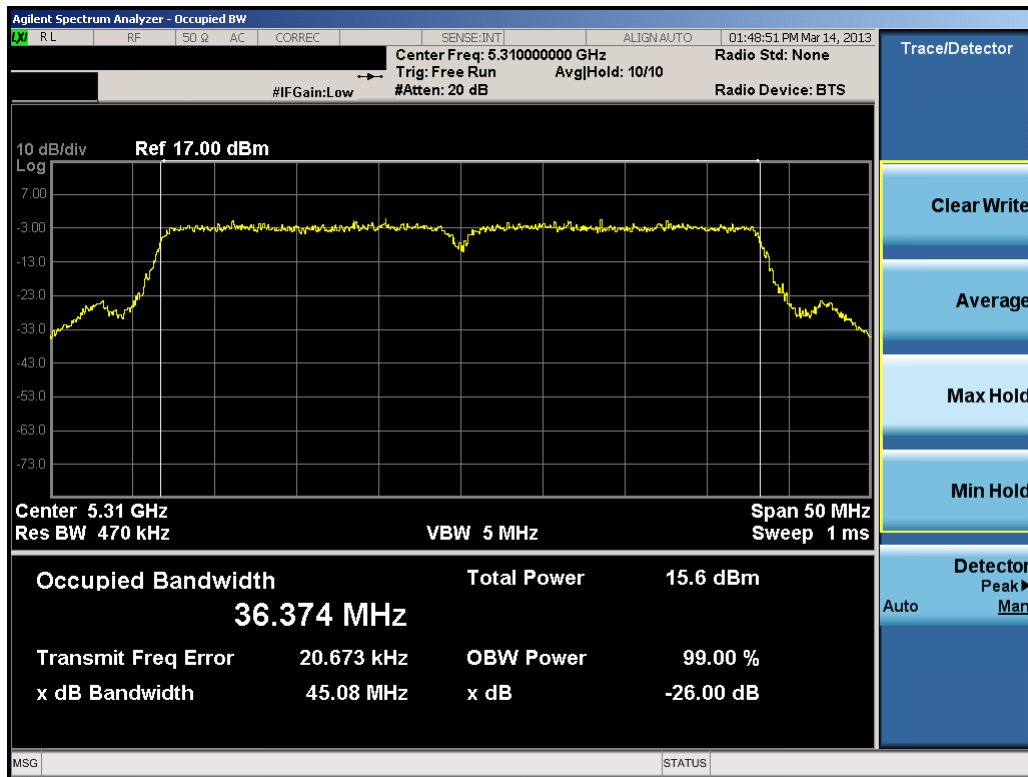


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 21 of 159

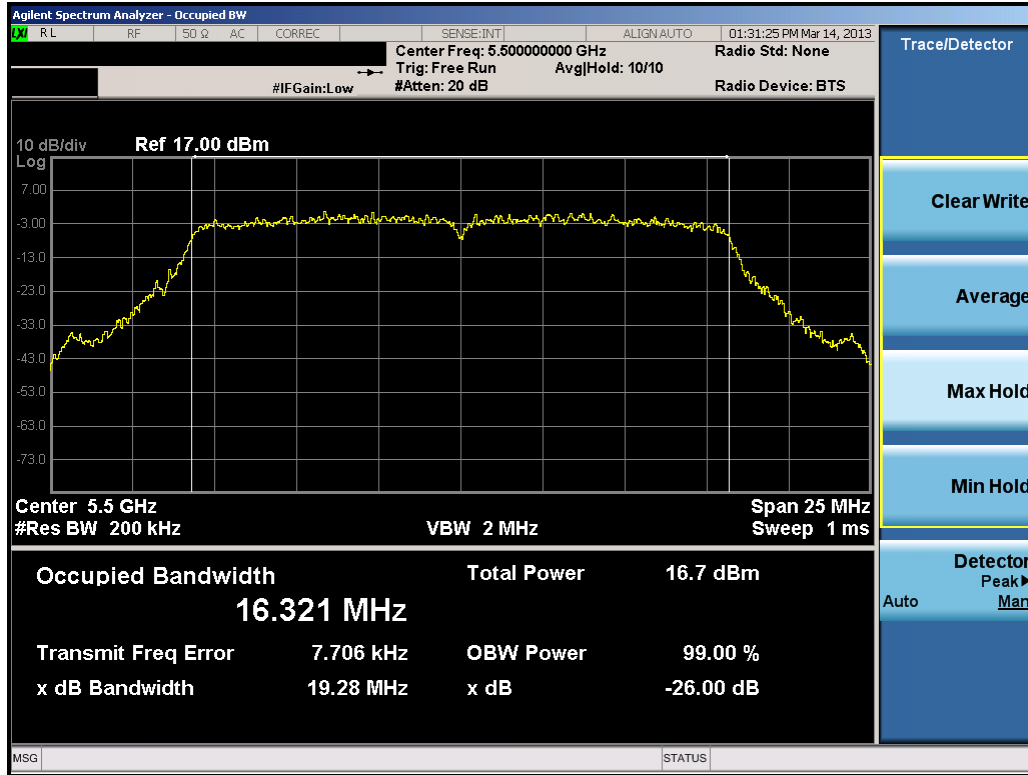


Plot 6-17. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

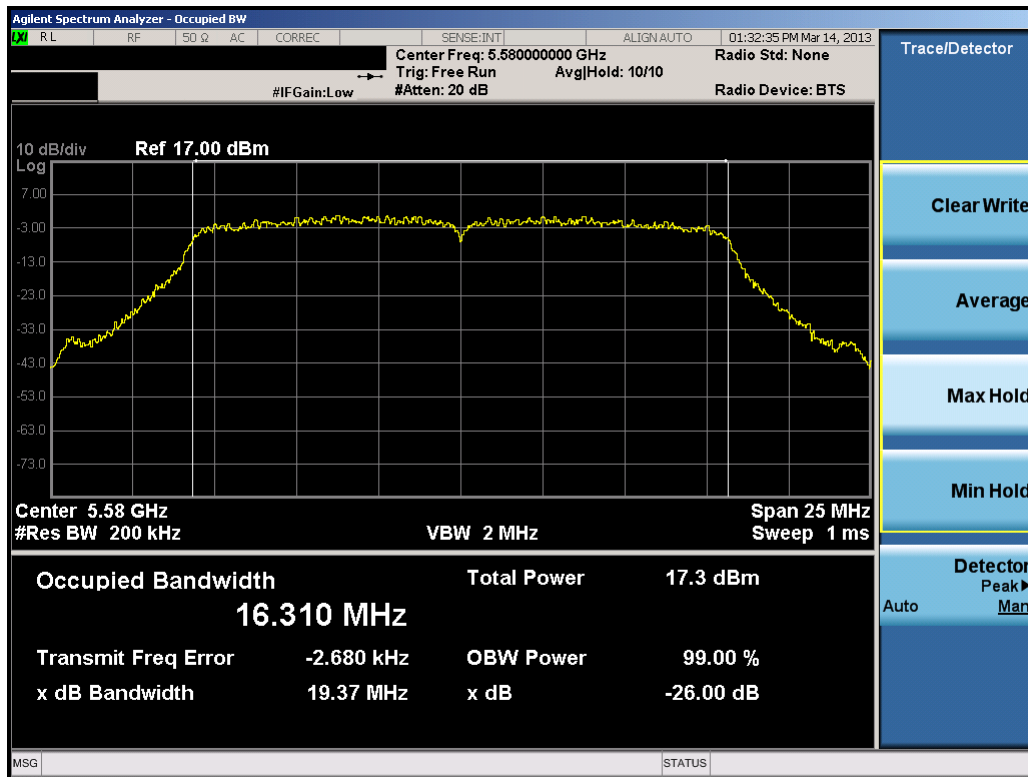


Plot 6-18. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 22 of 159

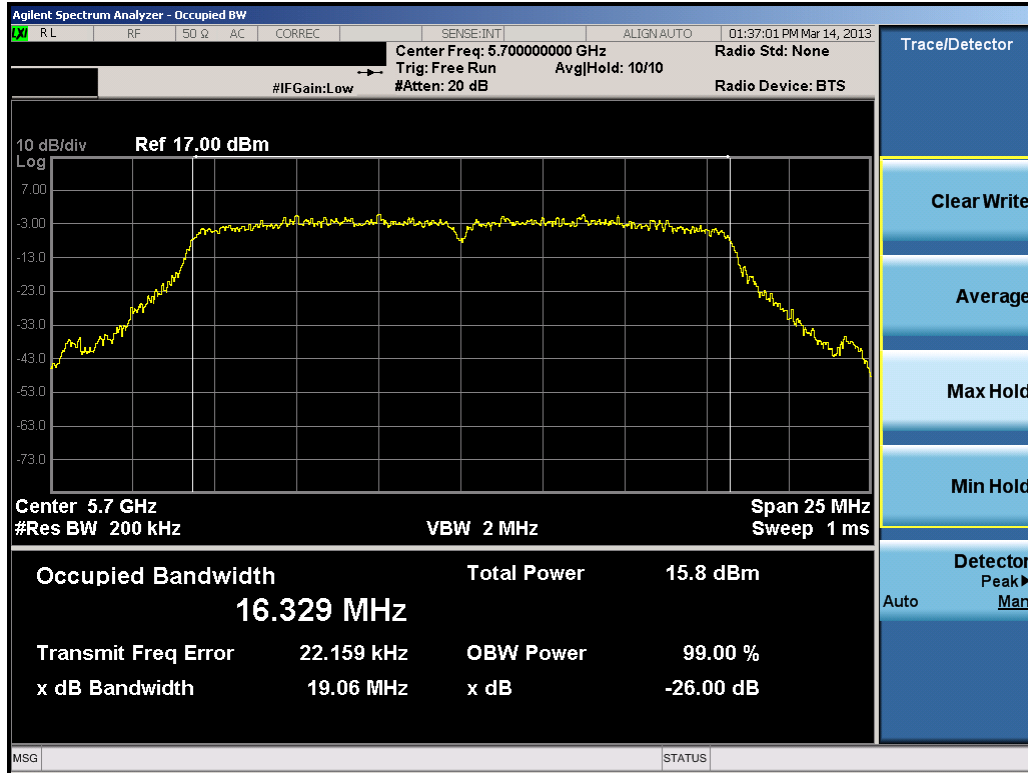


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 140)

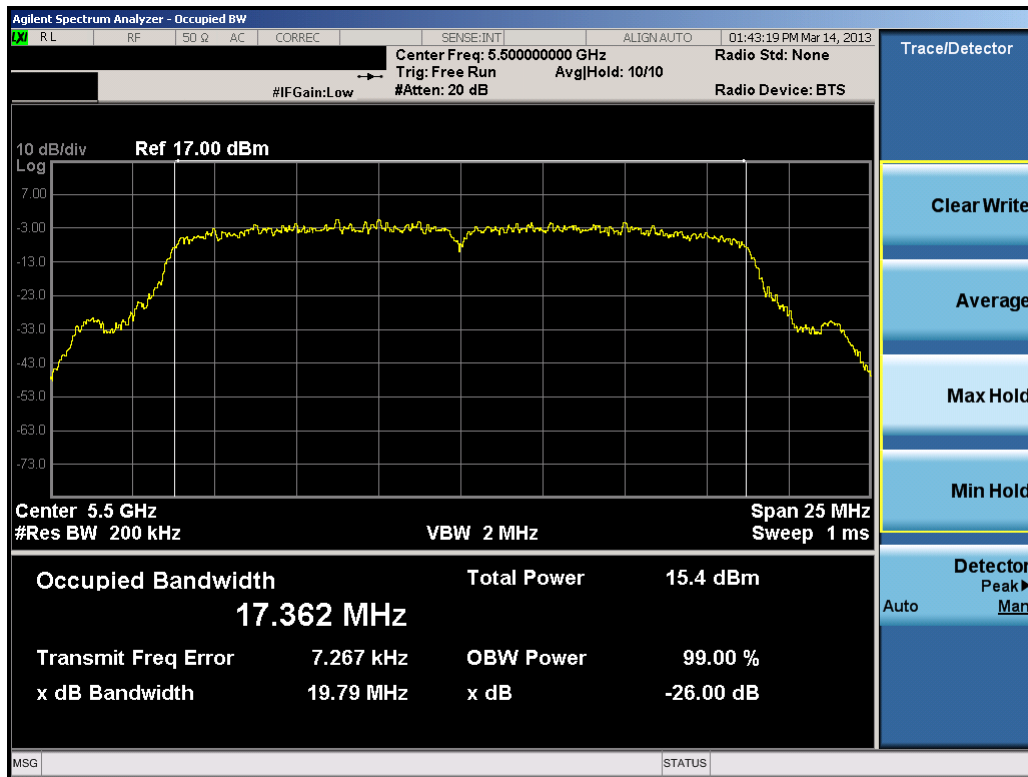


Plot 6-20. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 23 of 159

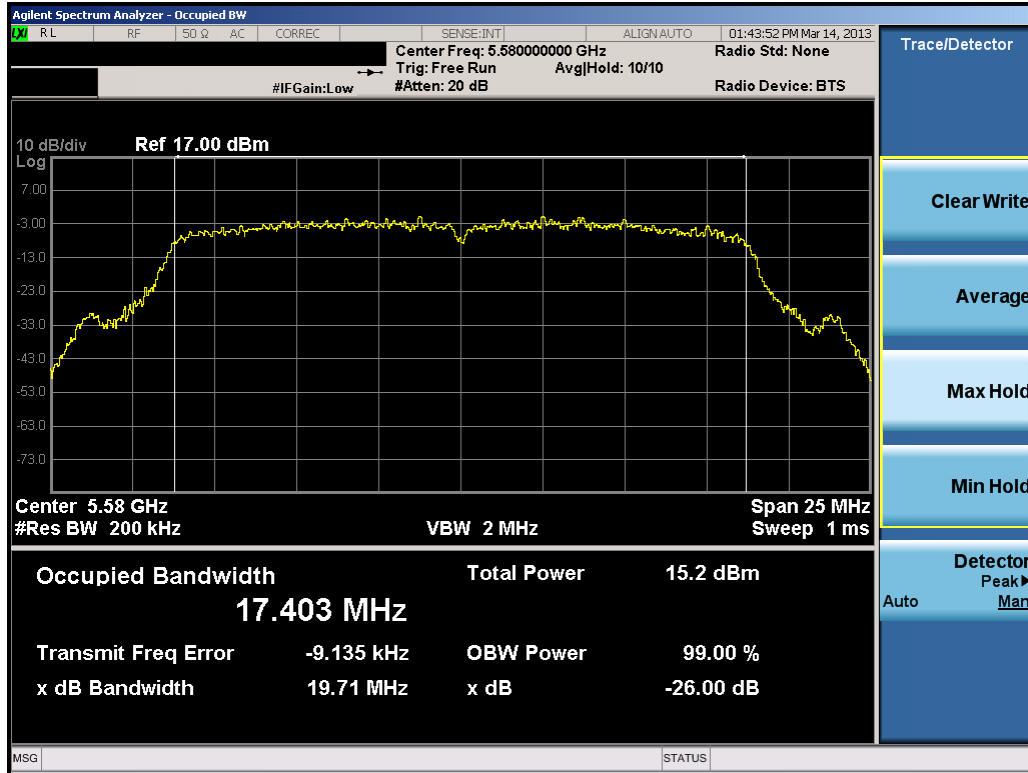


Plot 6-21. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

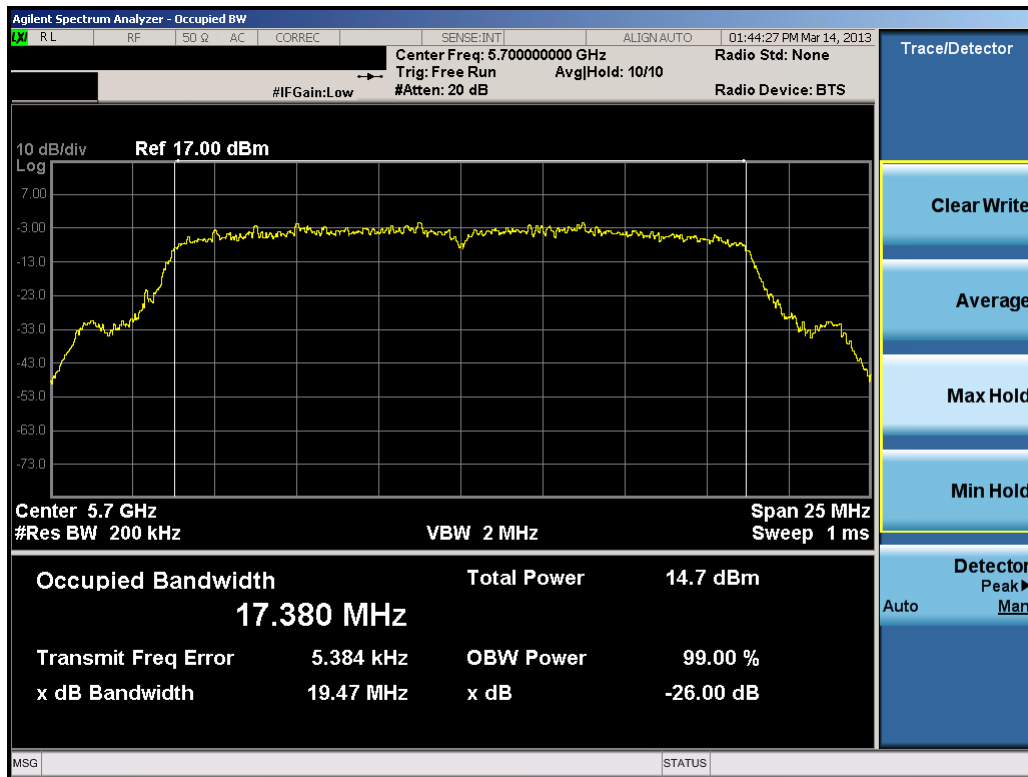


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 24 of 159

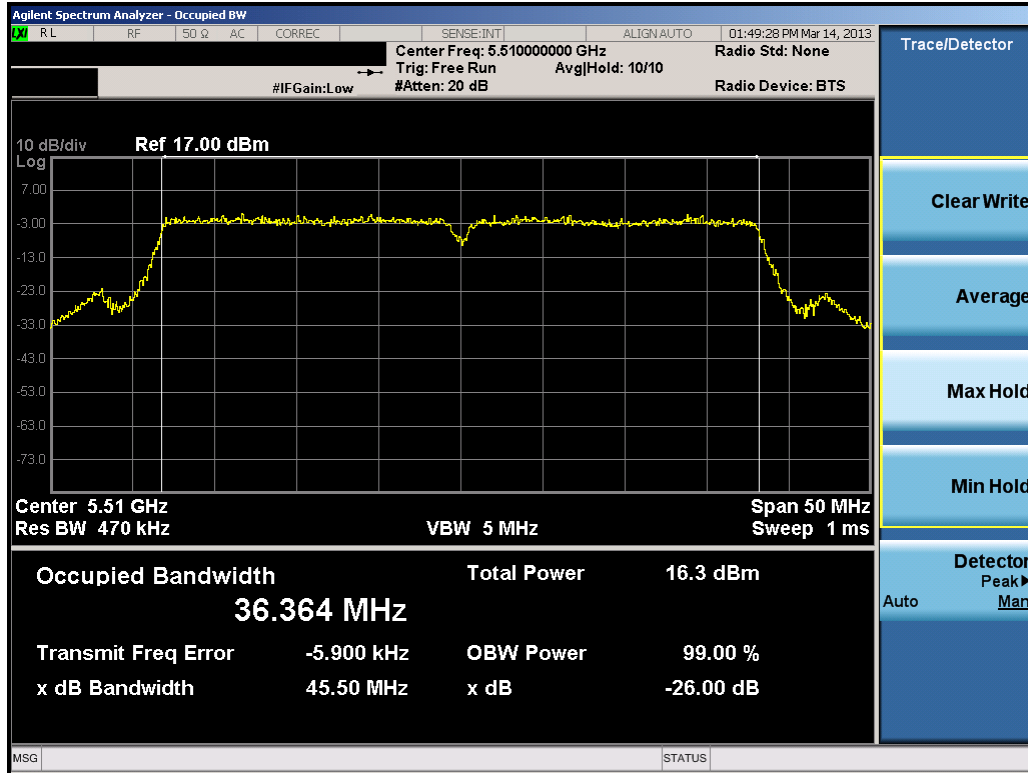


Plot 6-23. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

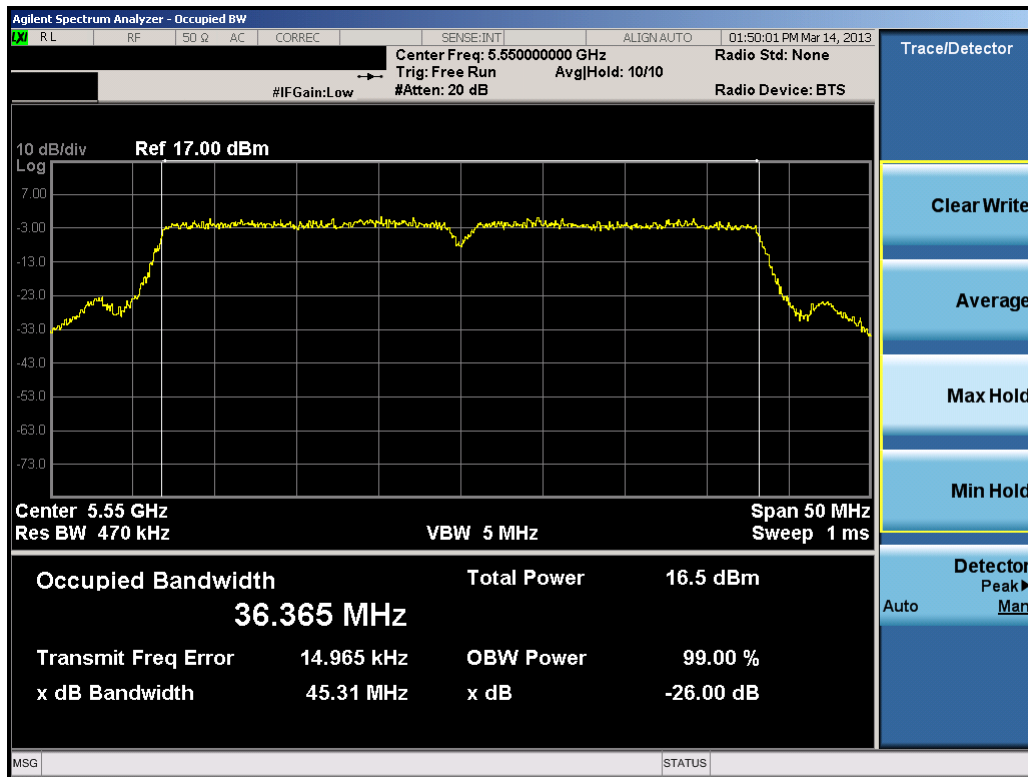

Plot 6-24. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 25 of 159

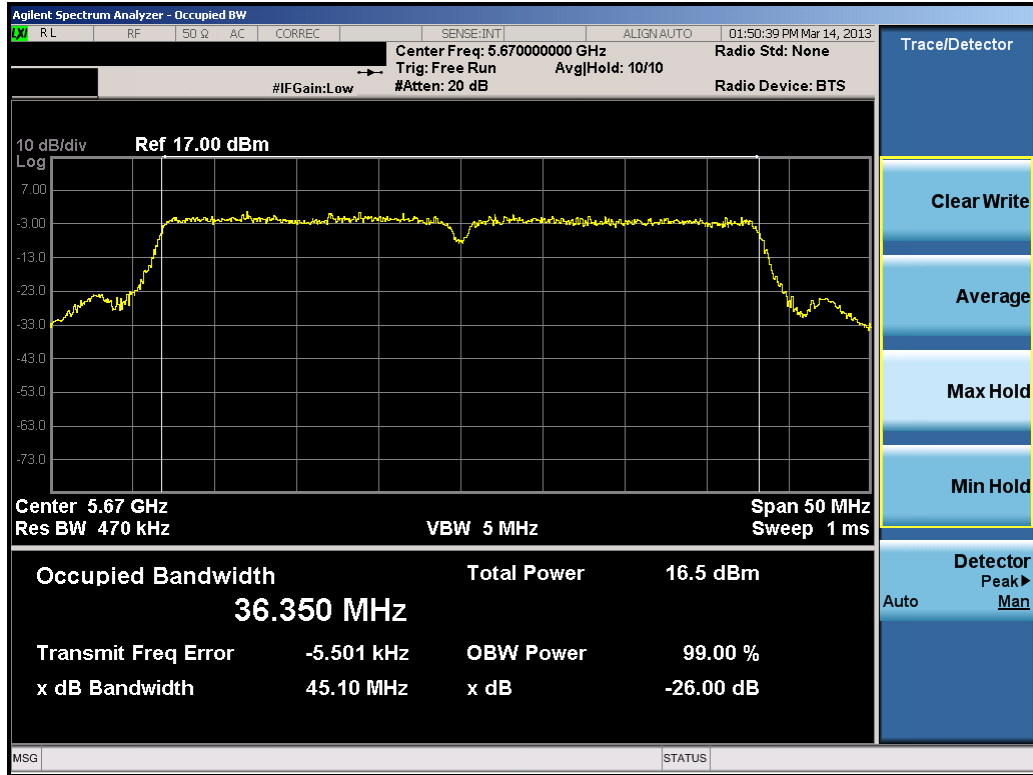



Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)


FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 26 of 159

Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	19.16
	5200	40	a	6	19.03
	5240	48	a	6	19.04
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.97
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	19.52
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	19.58
	5190	38	n (40MHz)	13.5/15 (MCS0)	45.42
	5230	46	n (40MHz)	13.5/15 (MCS0)	45.11
Band II	5260	52	a	6	19.41
	5280	56	a	6	19.15
	5320	64	a	6	19.10
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.65
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.62
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.84
	5270	54	n (40MHz)	13.5/15 (MCS0)	45.09
	5310	62	n (40MHz)	13.5/15 (MCS0)	45.25
Band III	5500	100	a	6	19.11
	5580	116	a	6	19.31
	5700	140	a	6	19.34
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.63
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	19.90
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	19.58
	5510	102	n (40MHz)	13.5/15 (MCS0)	45.17
	5550	110	n (40MHz)	13.5/15 (MCS0)	45.27
	5670	134	n (40MHz)	13.5/15 (MCS0)	45.32

Table 6-3. Antenna-2 Conducted Bandwidth Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 27 of 159	

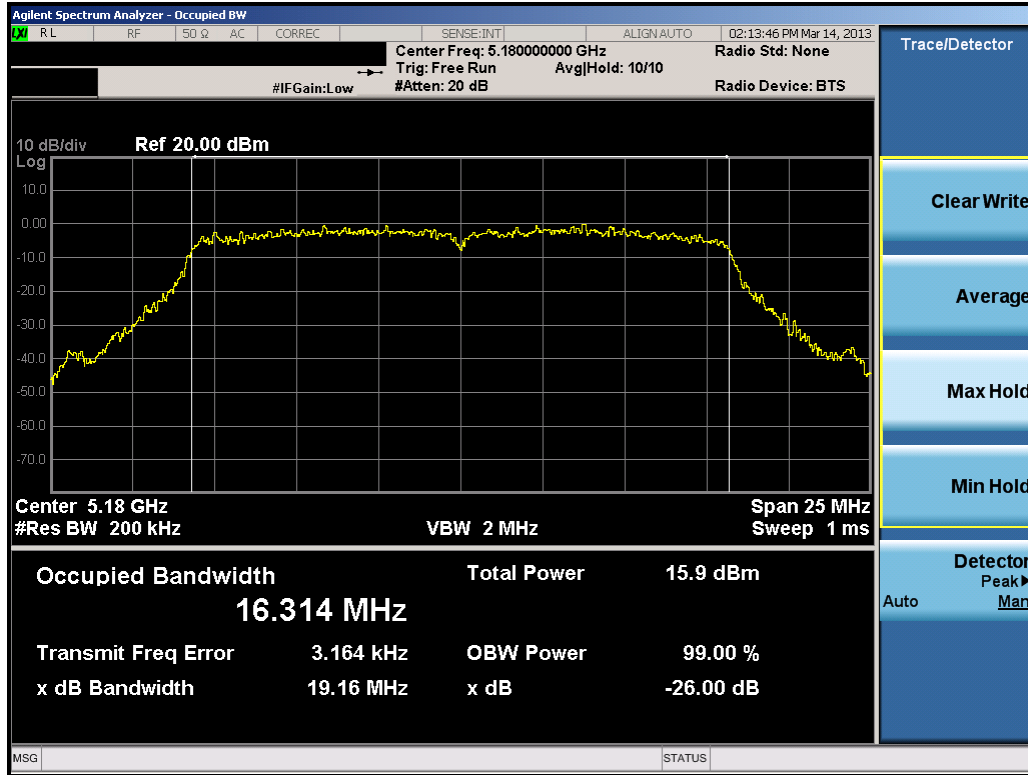


Plot 6-26. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

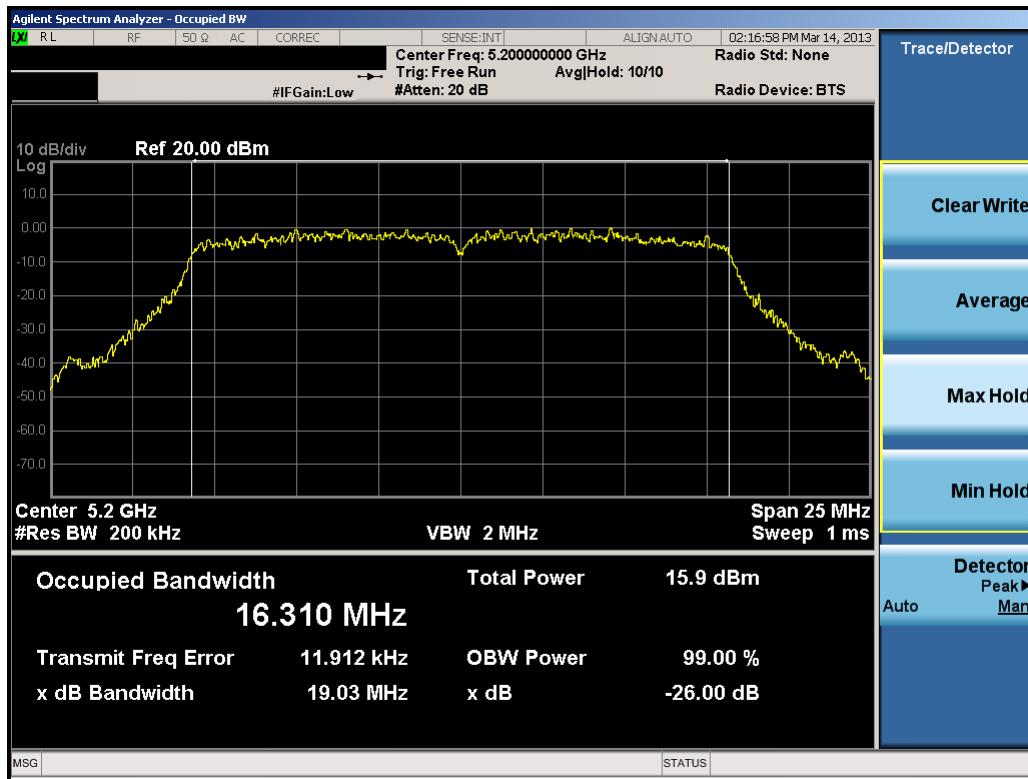


Plot 6-27. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 28 of 159

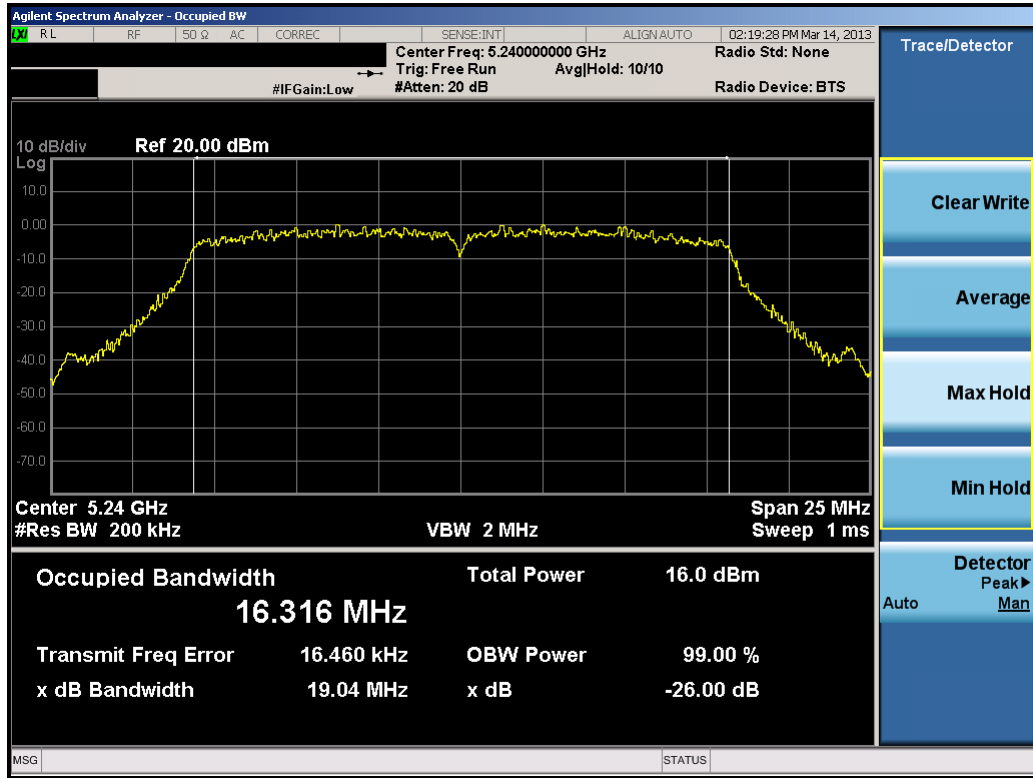


Plot 6-28. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

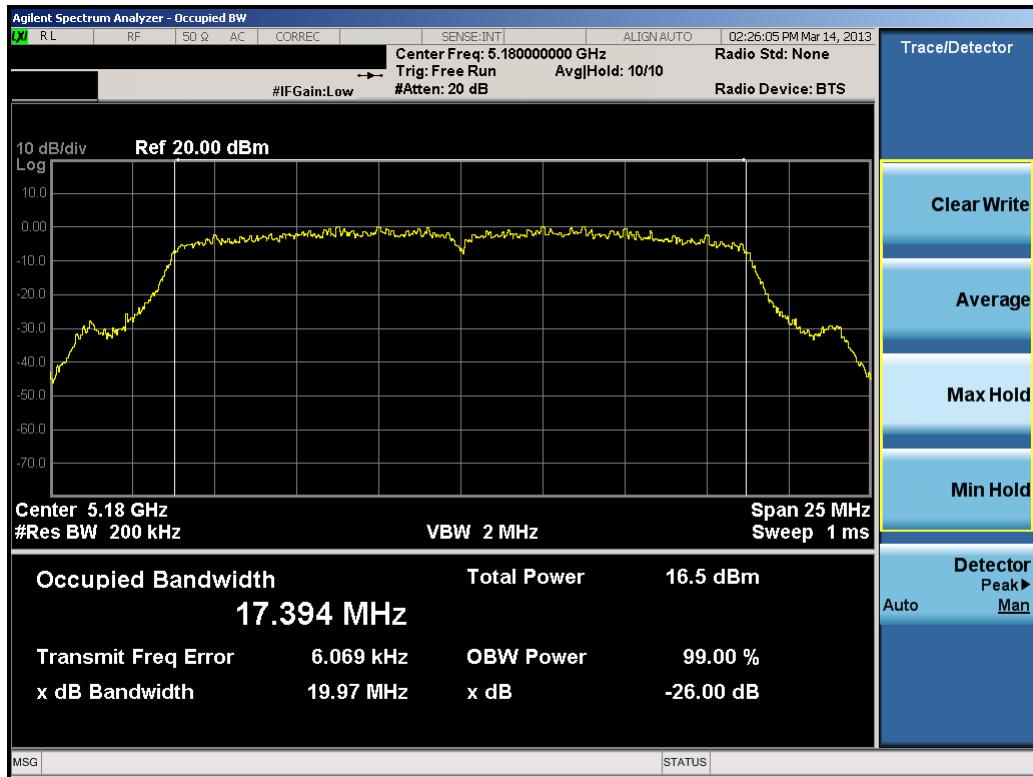


Plot 6-29. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 29 of 159

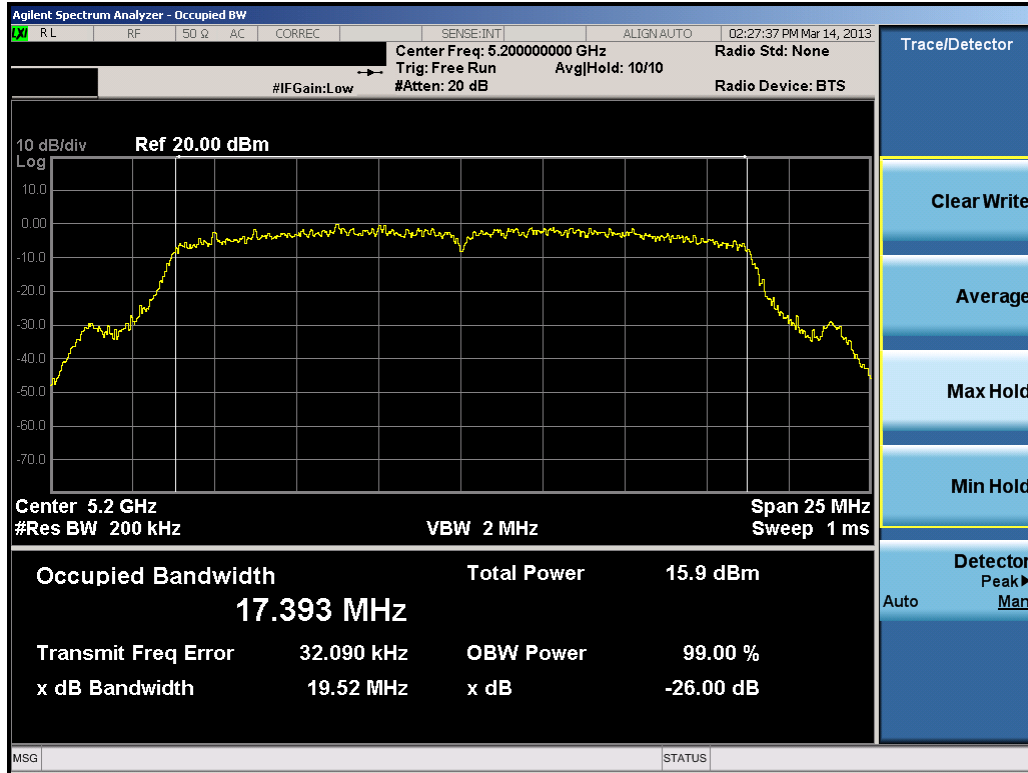


Plot 6-30. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

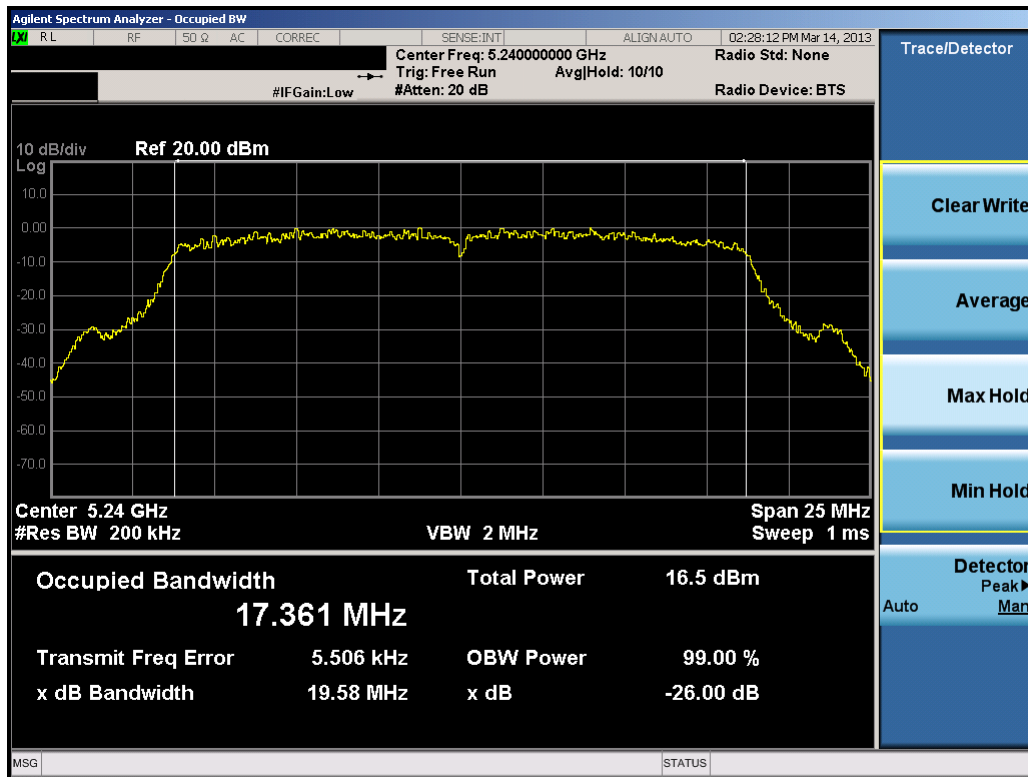


Plot 6-31. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 30 of 159

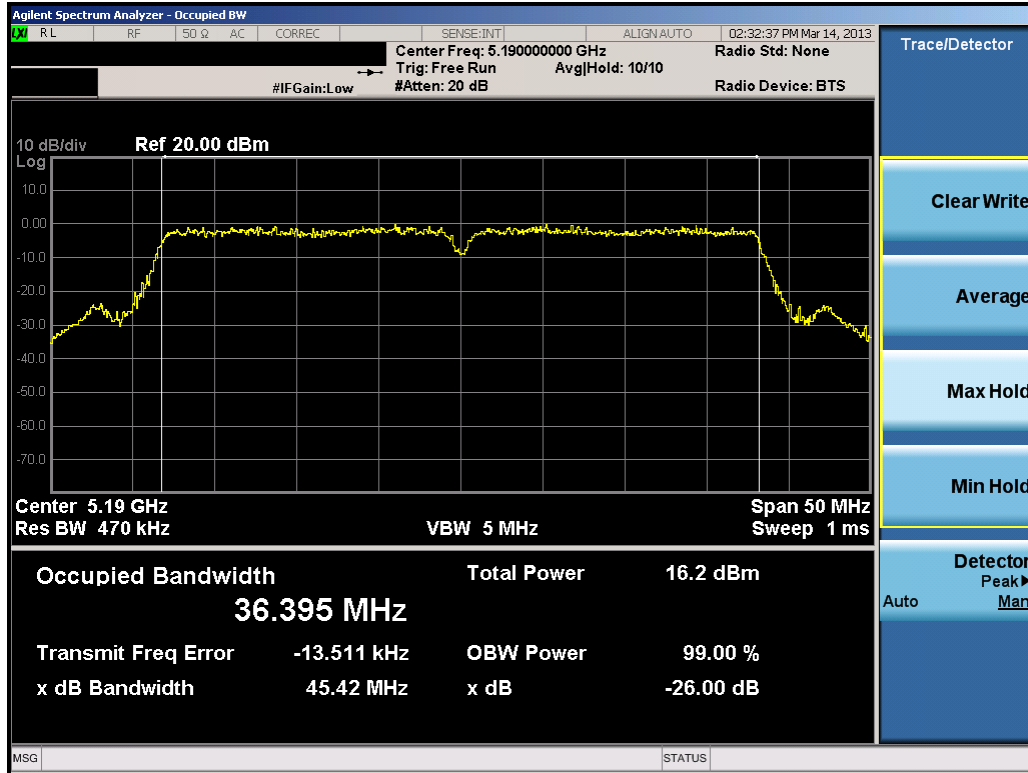


Plot 6-32. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

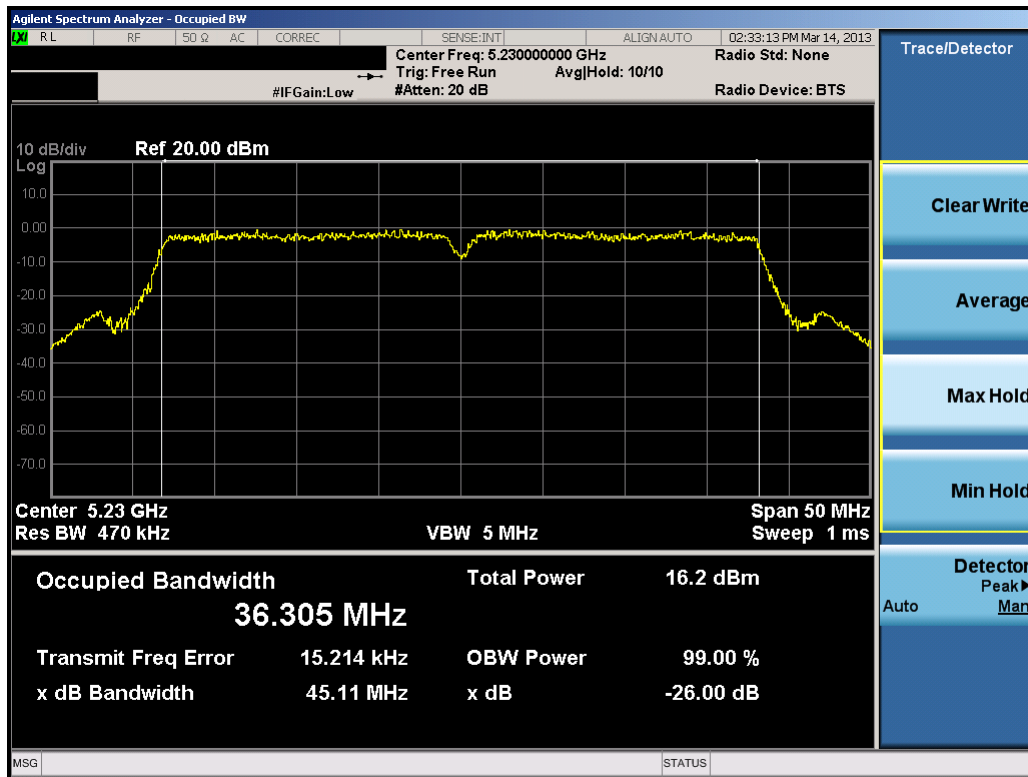


Plot 6-33. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 31 of 159

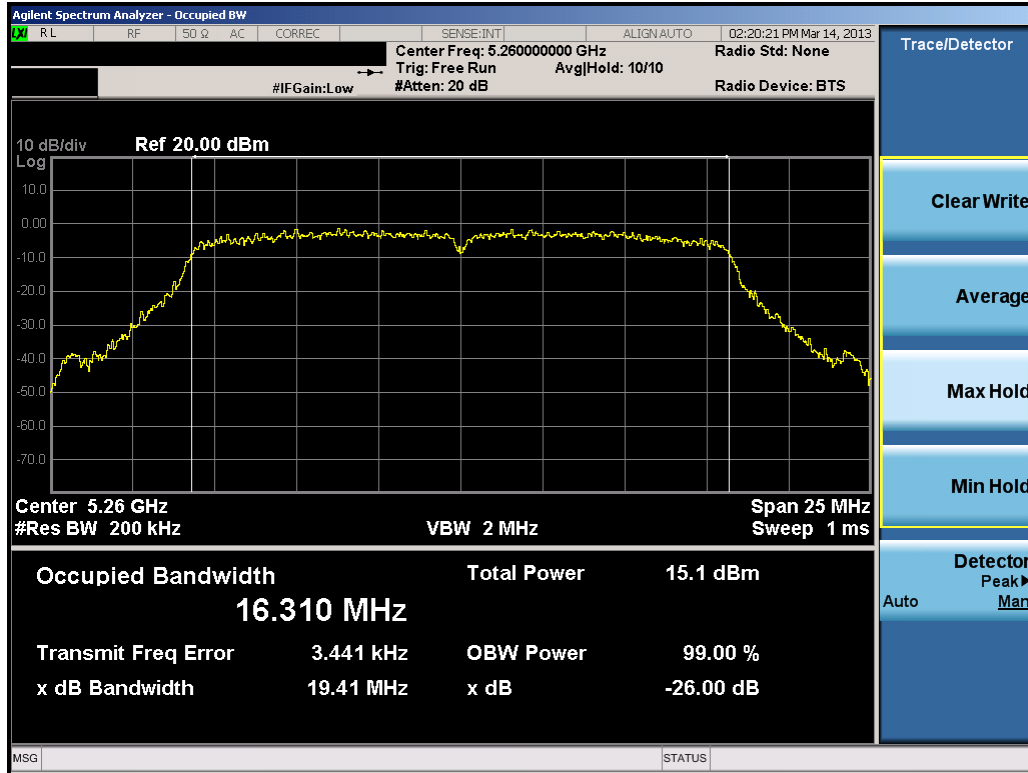


Plot 6-34. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

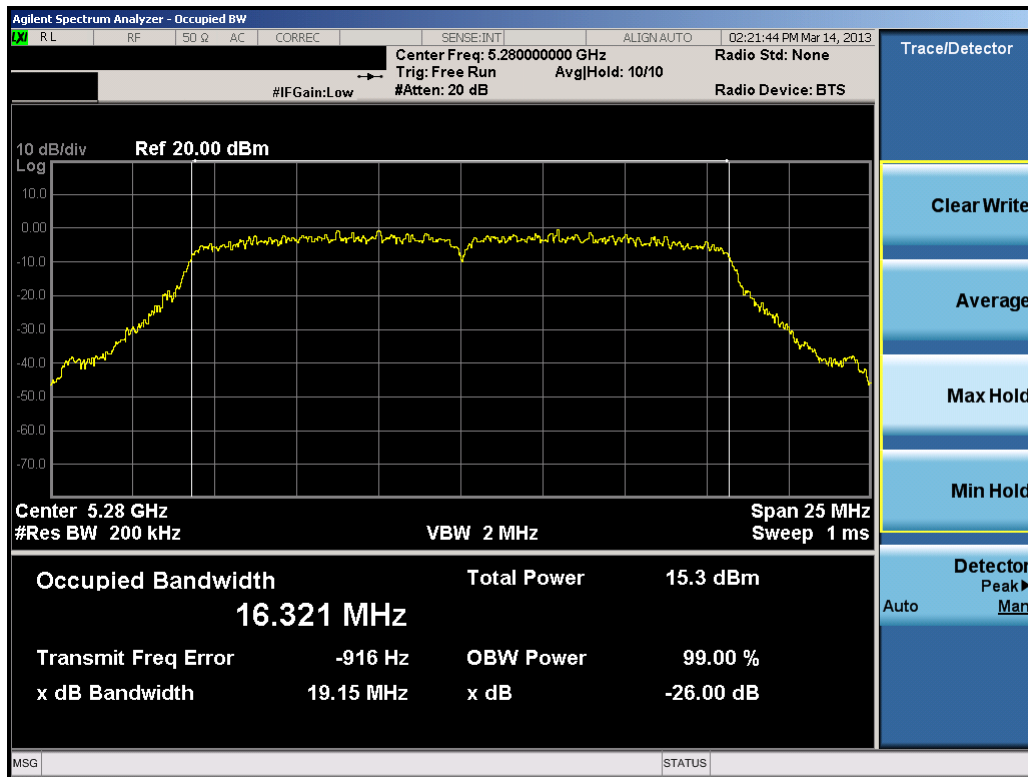


Plot 6-35. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 32 of 159

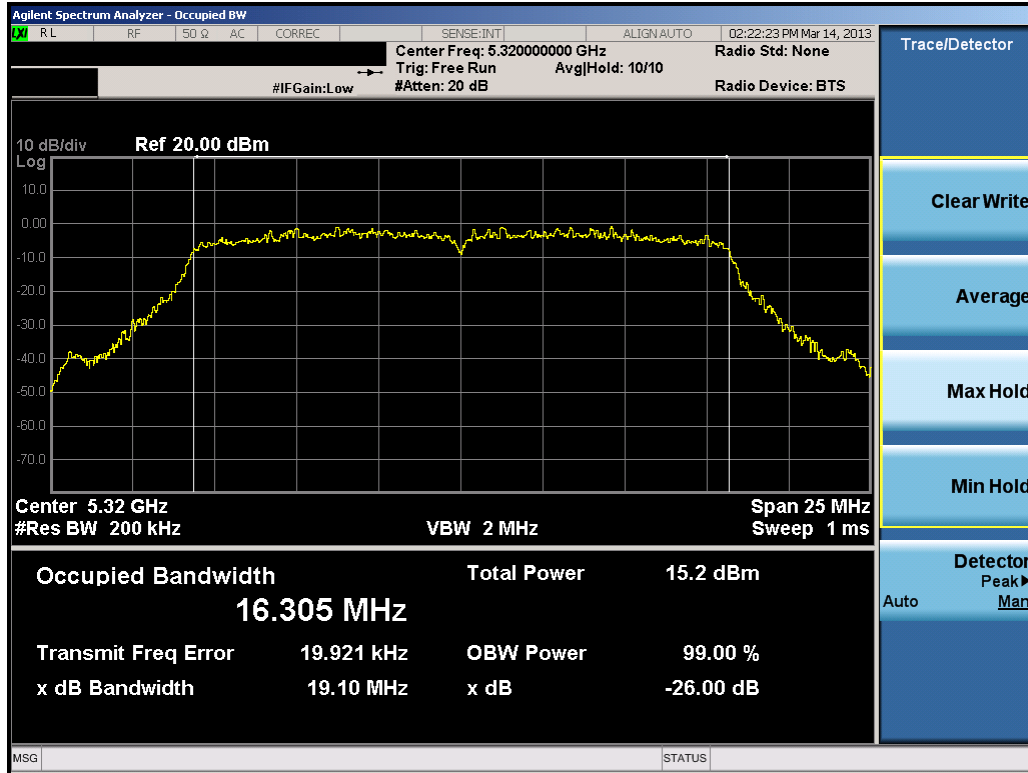


Plot 6-36. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

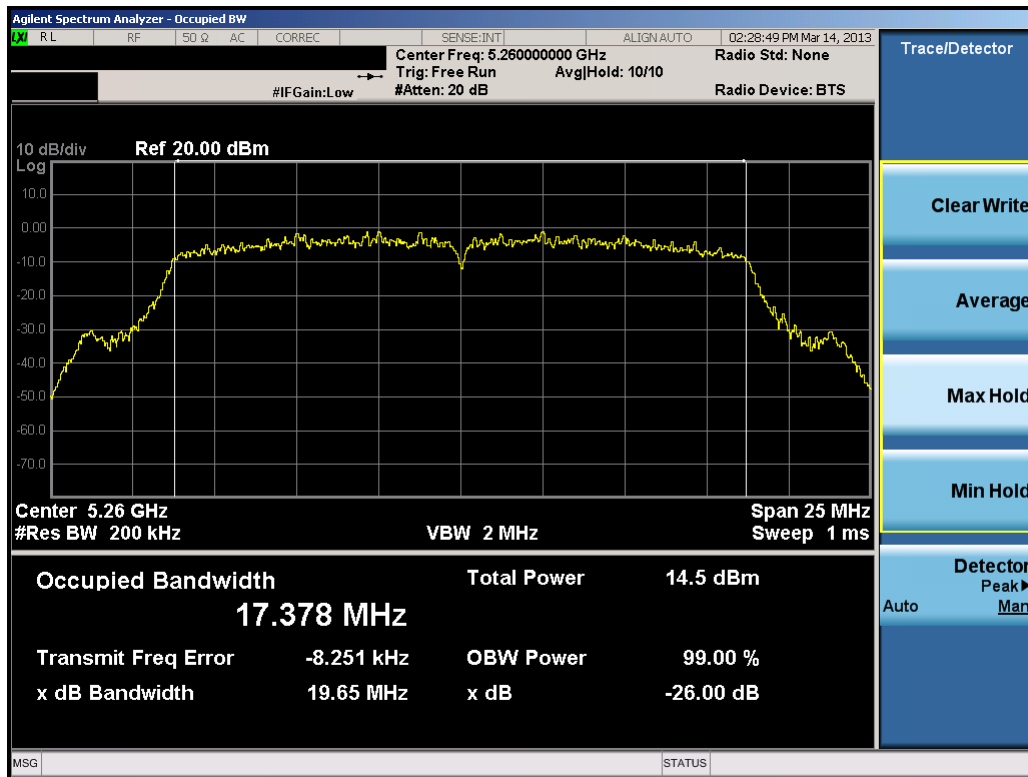


Plot 6-37. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 33 of 159

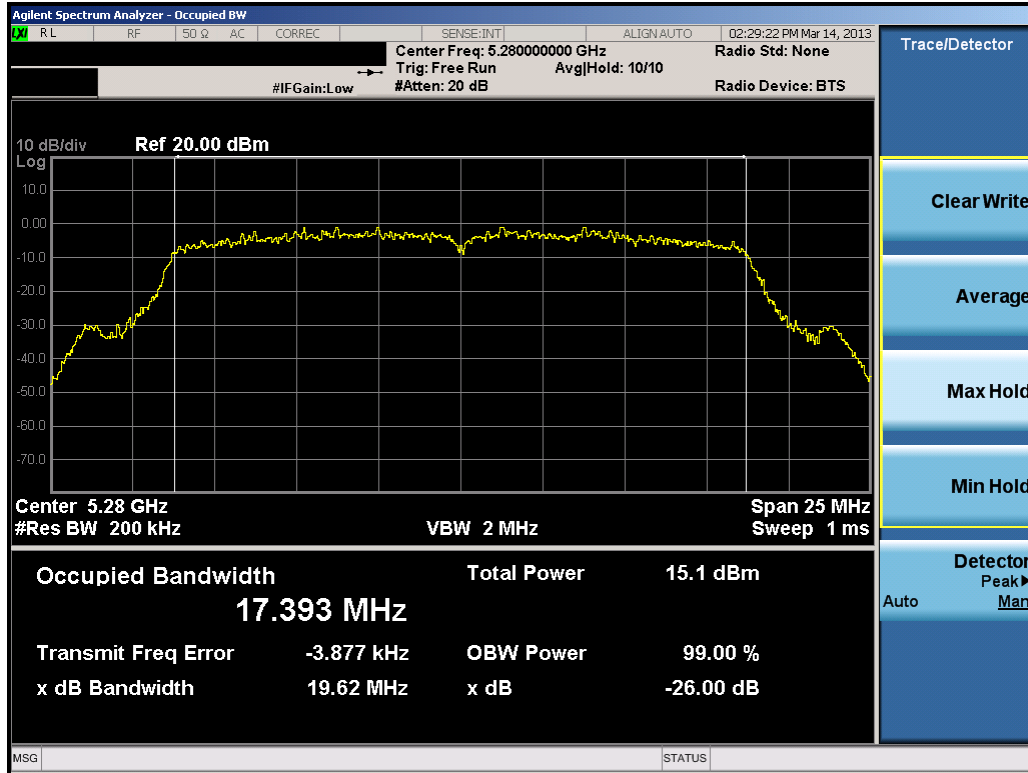


Plot 6-38. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

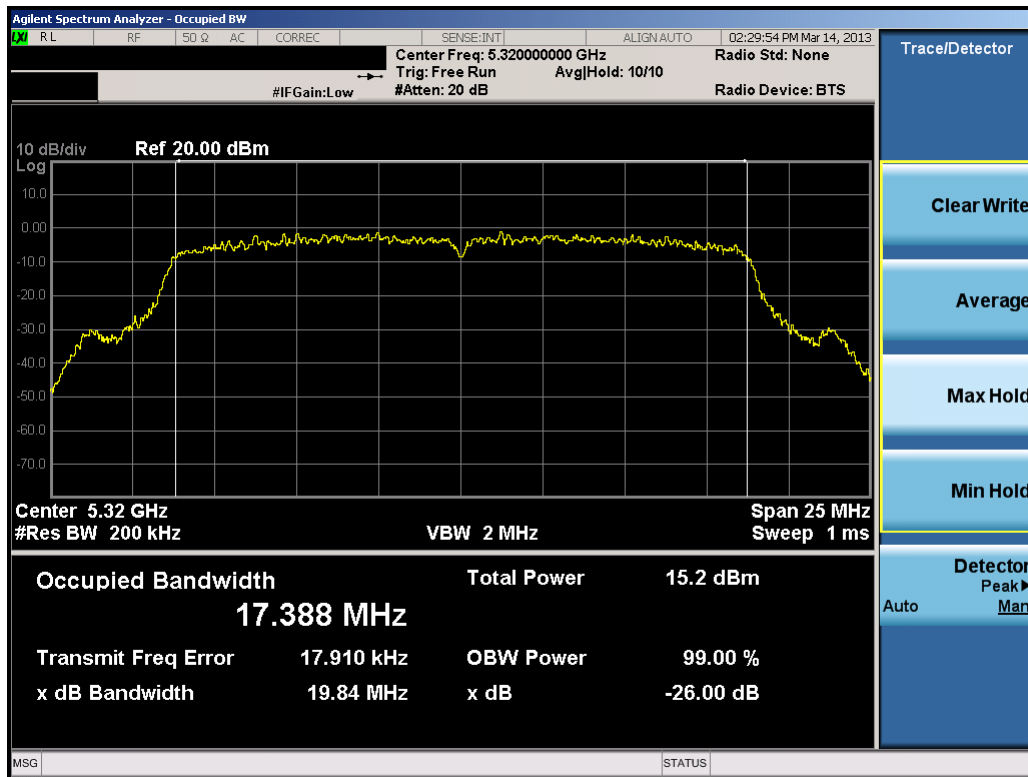


Plot 6-39. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 34 of 159

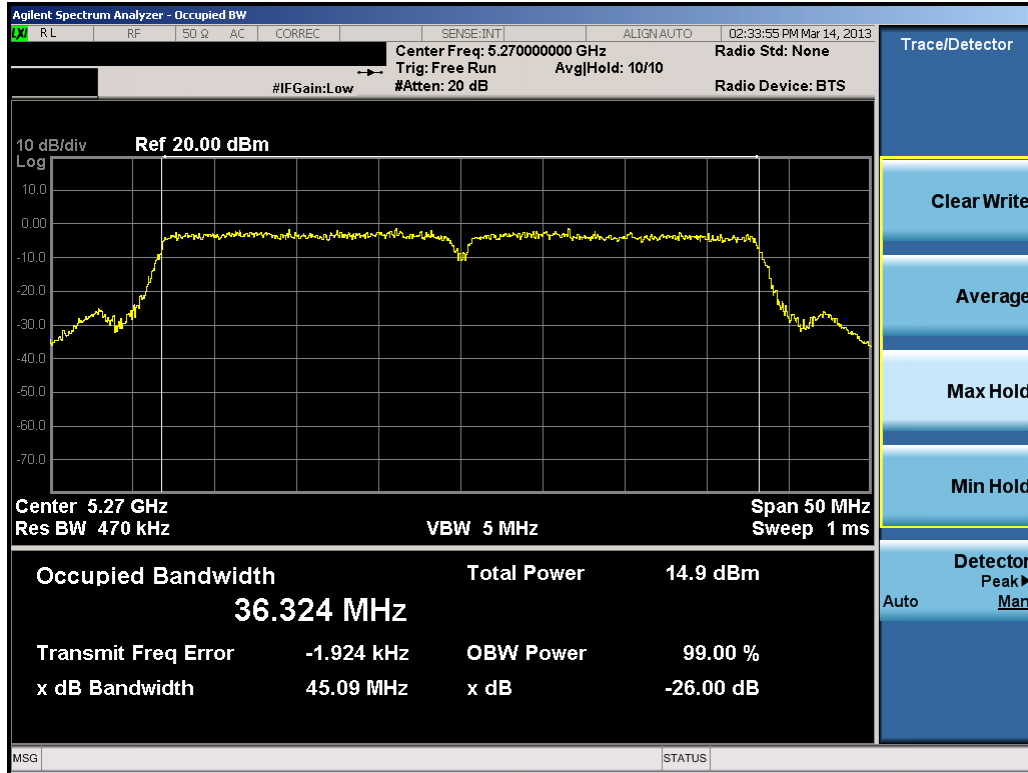


Plot 6-40. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

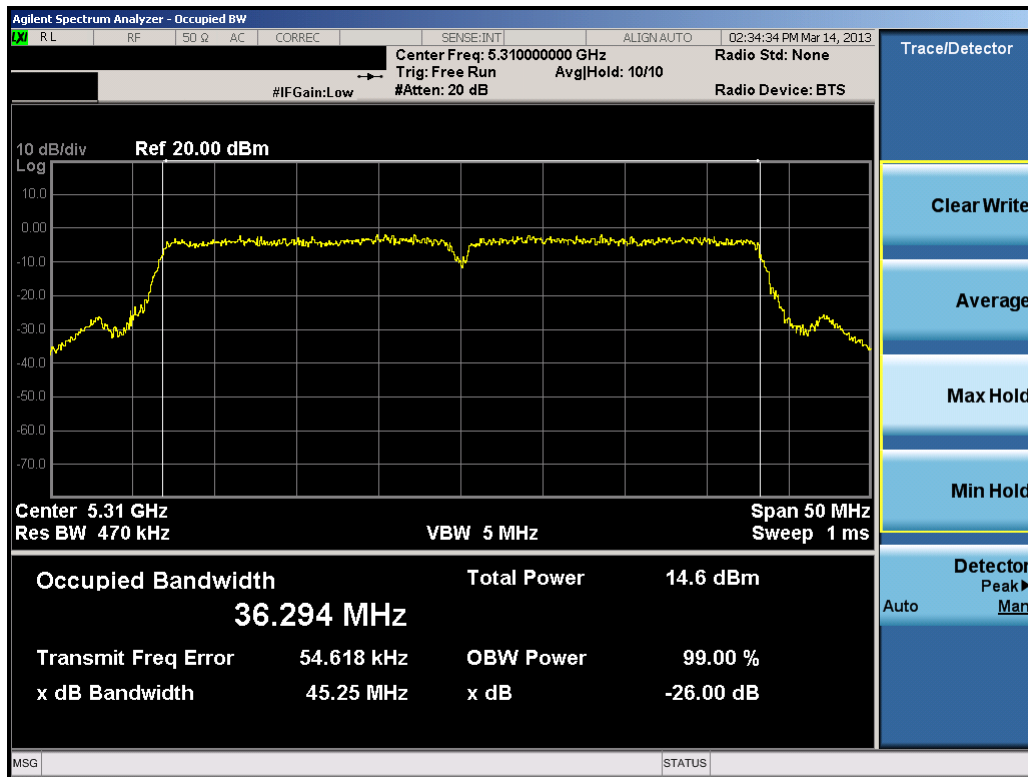


Plot 6-41. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 35 of 159

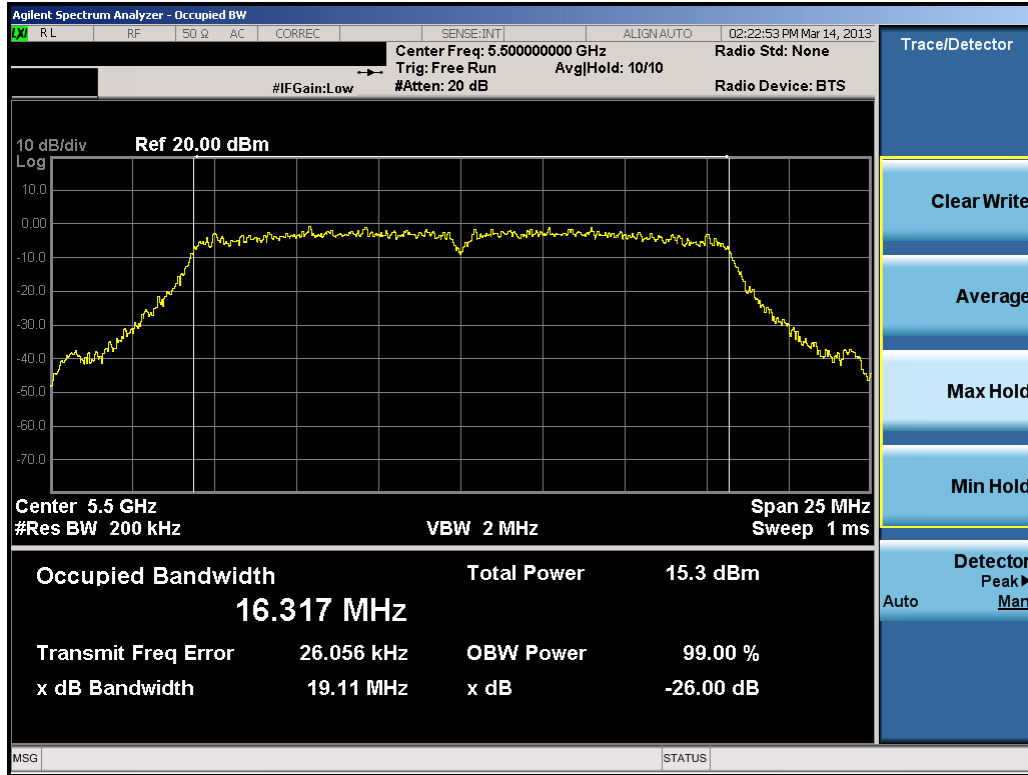


Plot 6-42. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

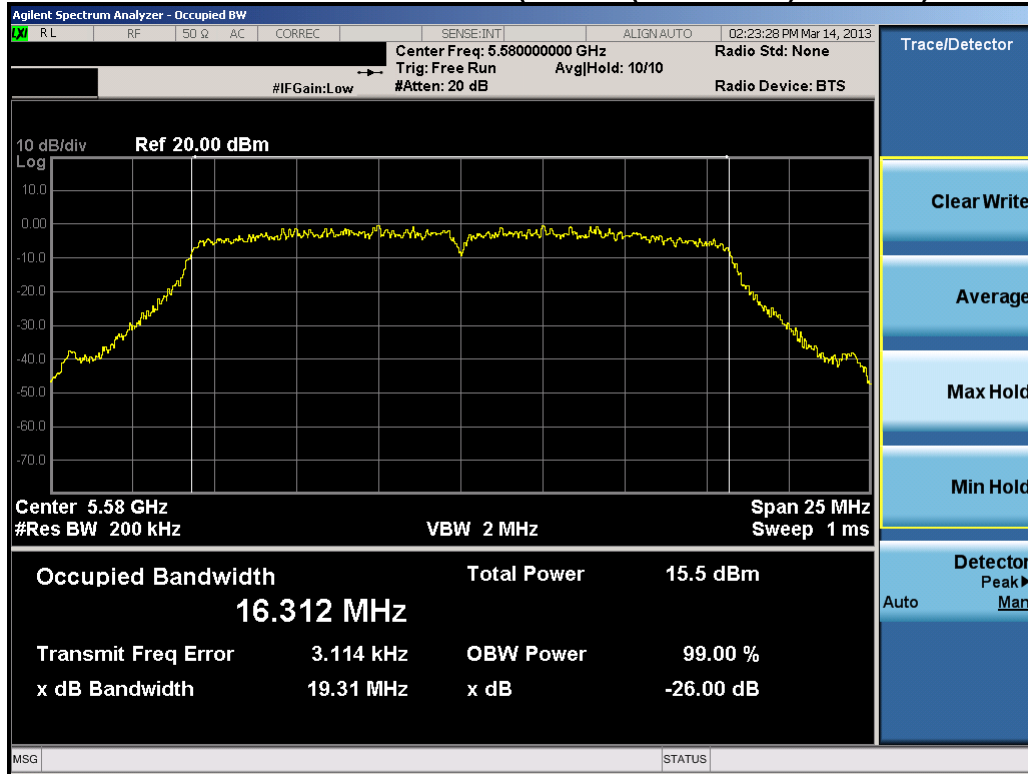


Plot 6-43. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 36 of 159

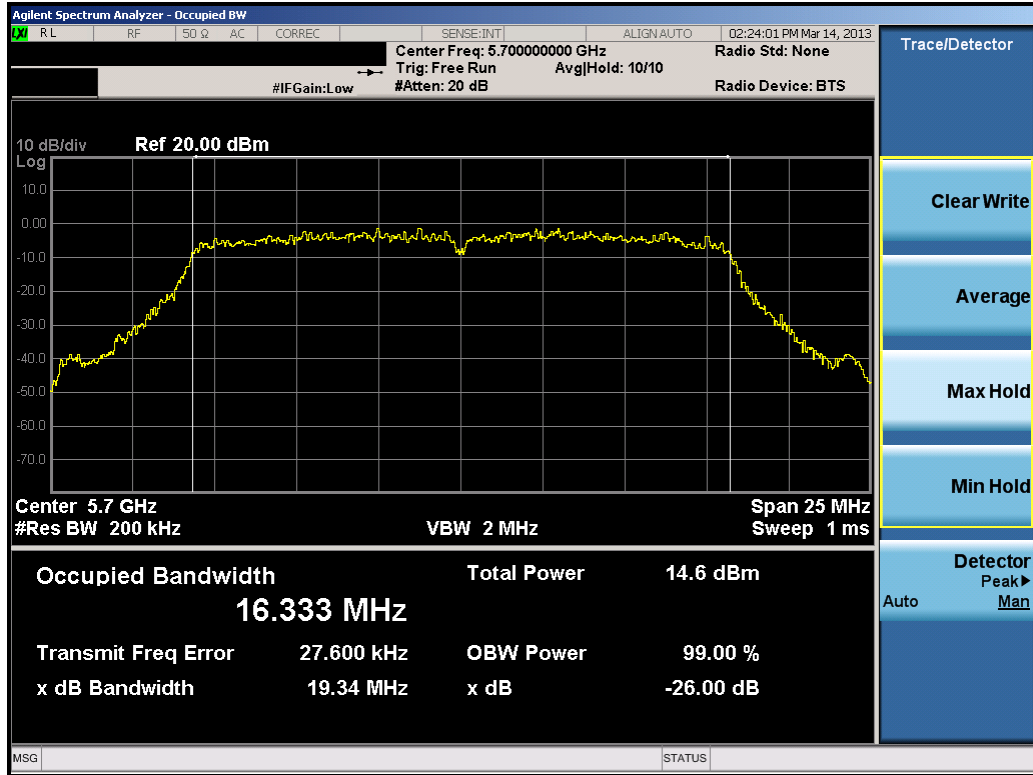


Plot 6-44. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 140)

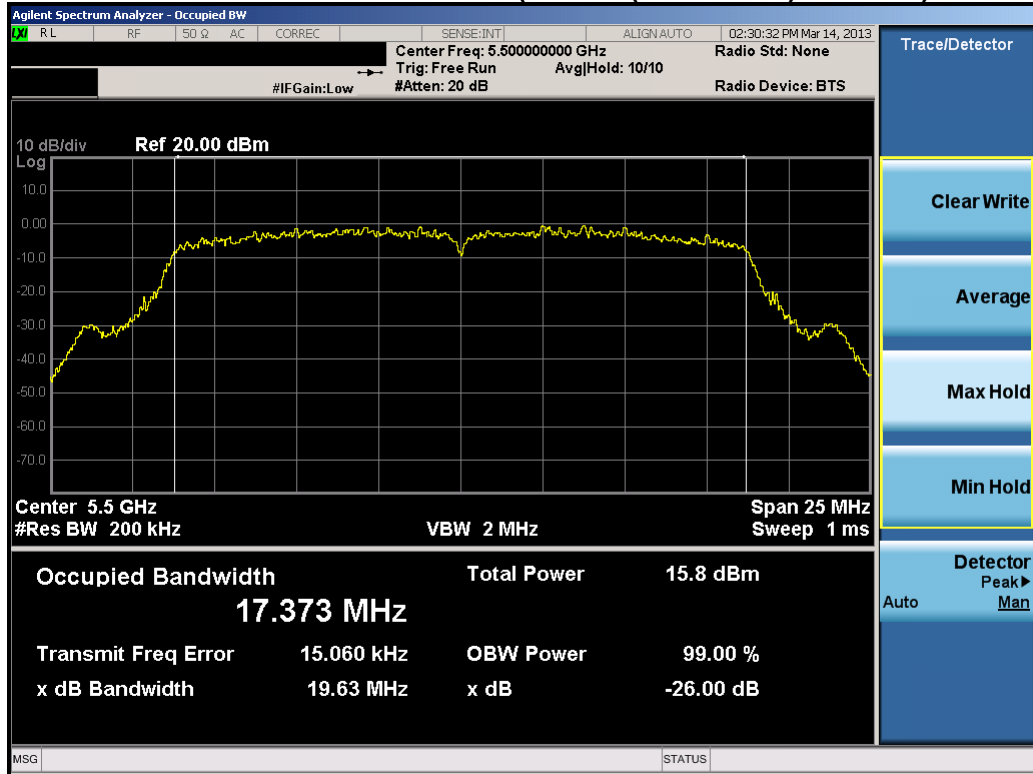


Plot 6-45. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 37 of 159

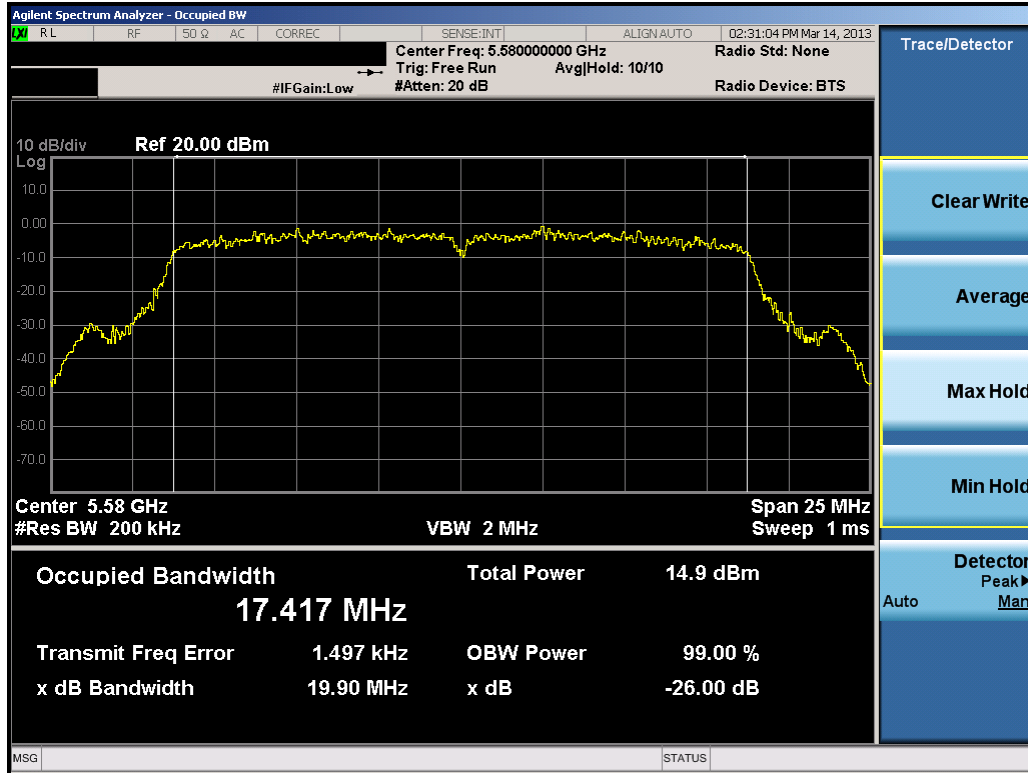


Plot 6-46. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

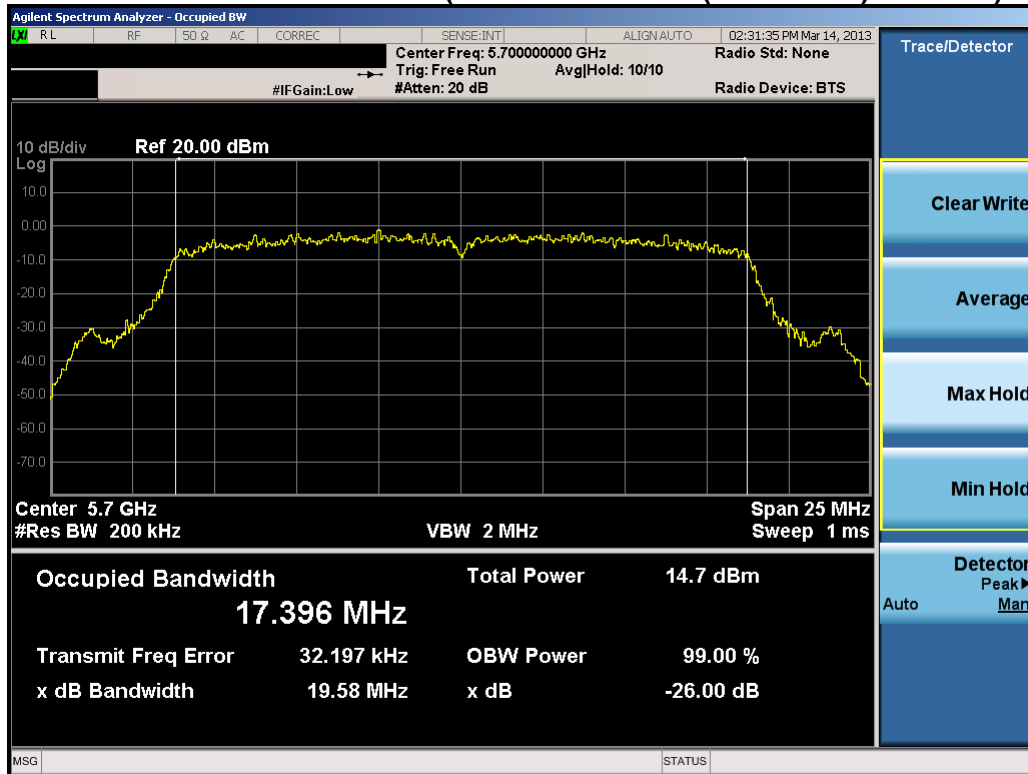


Plot 6-47. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 38 of 159	

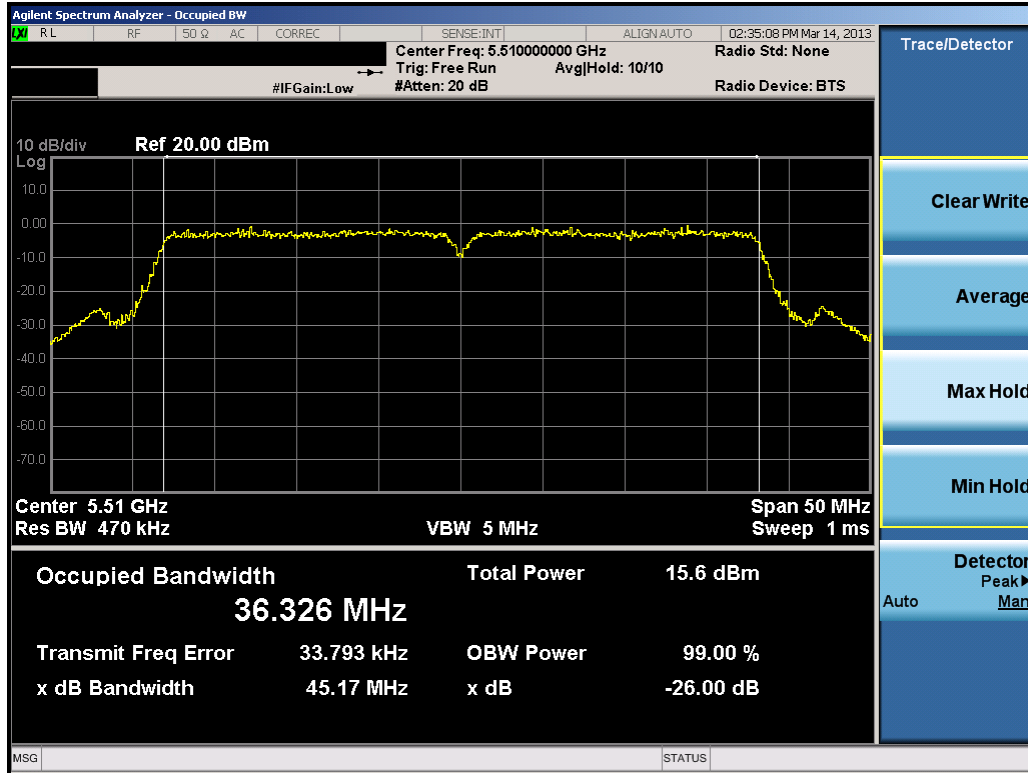


Plot 6-48. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

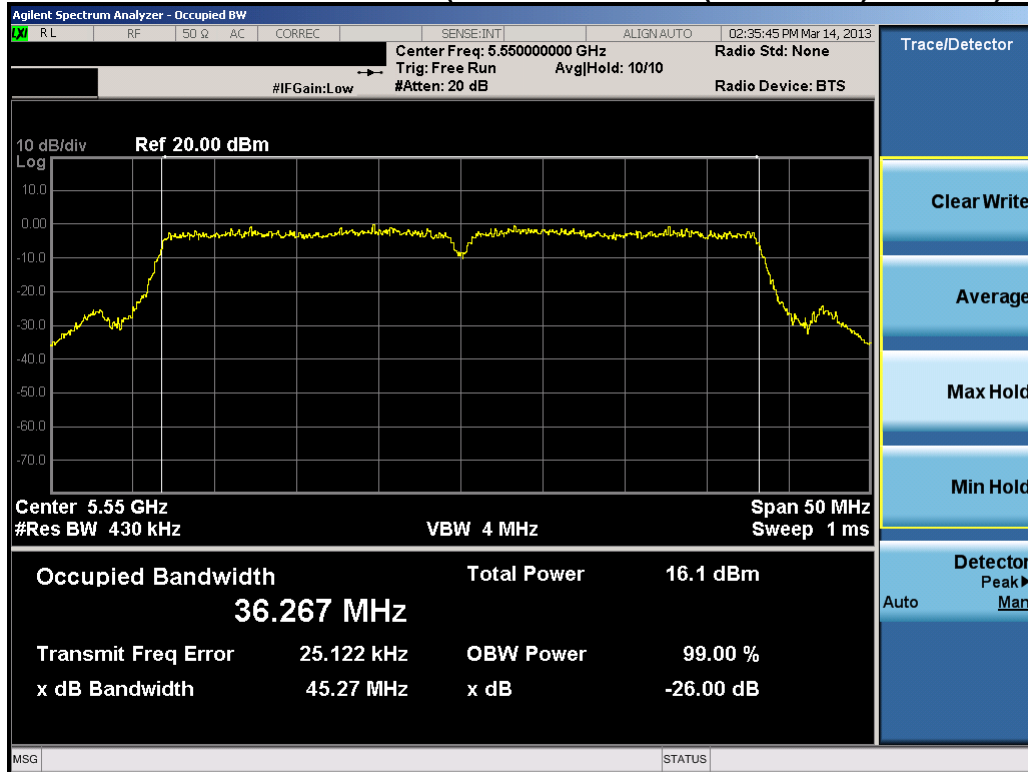

Plot 6-49. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 39 of 159

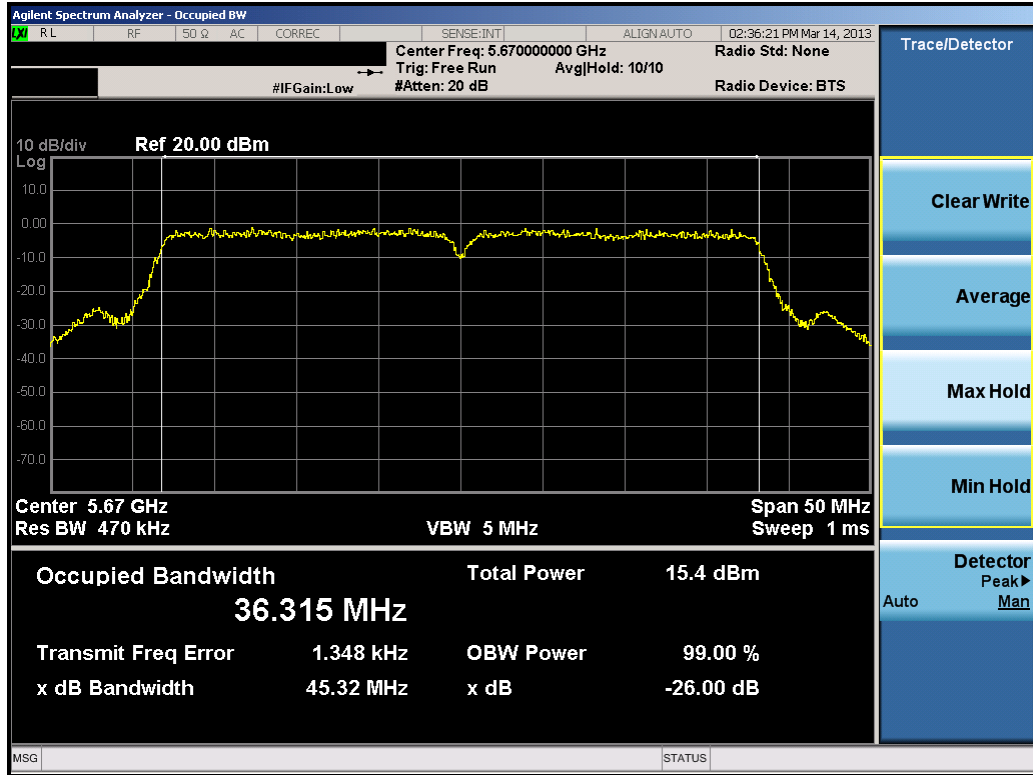

Plot 6-50. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 40 of 159

6.3 UNII Output Power Measurement – 802.11a/n §15.407 (a)(1); RSS-210 [A9.2]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4 \text{ dBm} + 10\log_{10}(19.18) = 16.83\text{dBm}$.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(18.87) = 23.76\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(19.06) = 23.8\text{dBm}$.

Test Procedure Used

KDB 789033 v01r02 – Section C) 4) (Method PM)

KDB 662911

Test Settings

1. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter and power sensor with a thermocouple detector.
2. The trace was averaged over 100 traces to obtain the final measured average power.
3. The integration period of the power meter was more than five times the repetition period of the transmitted signal.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

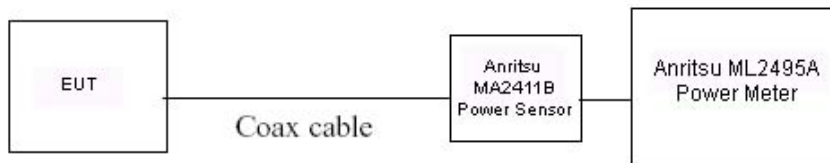




Figure 6-2. Test Instrument & Measurement Setup

Test Notes

Per KDB 662911 the MIMO Output Power Measurements were calculated by summing the power measurements from Antenna-1 and 2 in linear power units.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 41 of 159	

Antenna-1 Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	10.42	10.53	10.53	10.54	10.48	10.40	10.30	10.29
802.11a	5200	40	AVG	10.24	10.31	10.31	10.27	10.40	10.46	10.49	10.51
802.11a	5220	44	AVG	10.12	10.10	10.47	10.61	10.54	10.35	10.29	10.38
802.11a	5240	48	AVG	10.39	10.32	10.50	10.48	10.50	10.44	10.22	10.23
802.11a	5260	52	AVG	10.21	10.31	10.26	10.33	10.38	10.44	10.45	10.40
802.11a	5280	56	AVG	10.23	10.19	10.32	10.39	10.16	10.23	10.47	10.47
802.11a	5300	60	AVG	10.27	10.22	10.44	10.29	10.42	10.48	10.44	10.48
802.11a	5320	64	AVG	10.49	10.33	10.50	10.32	10.32	10.40	10.24	10.24
802.11a	5500	100	AVG	10.01	9.74	9.81	9.91	9.79	9.73	9.87	9.72
802.11a	5520	104	AVG	9.71	9.71	9.66	9.82	9.51	9.58	9.60	9.55
802.11a	5540	108	AVG	9.42	9.46	9.50	9.60	9.57	9.54	9.72	9.67
802.11a	5560	112	AVG	9.69	9.64	9.60	9.67	9.38	9.31	9.48	9.44
802.11a	5580	116	AVG	9.25	9.34	9.44	9.34	9.21	9.56	9.46	9.43
802.11a	5660	132	AVG	9.05	9.09	9.35	9.15	9.17	9.22	9.16	9.30
802.11a	5680	136	AVG	9.17	9.35	9.36	9.22	9.45	9.37	9.43	9.43
802.11a	5700	140	AVG	9.32	9.35	9.22	9.29	9.42	9.40	9.33	9.42



Table 6-4. 802.11a (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5180	36	AVG	9.55	9.66	9.64	9.60	9.77	9.65	9.72	9.76
802.11n	5200	40	AVG	9.76	9.71	9.82	9.66	9.59	9.62	9.56	9.63
802.11n	5220	44	AVG	9.48	9.62	9.63	9.73	9.68	9.76	9.85	9.88
802.11n	5240	48	AVG	9.69	9.74	9.71	9.66	9.46	9.68	9.53	9.54
802.11n	5260	52	AVG	9.92	9.99	9.95	9.92	9.96	10.04	9.84	9.86
802.11n	5280	56	AVG	9.68	9.70	9.70	9.73	9.70	9.77	9.72	9.66
802.11n	5300	60	AVG	9.75	9.76	9.71	9.82	9.77	9.80	9.89	9.77
802.11n	5320	64	AVG	9.80	9.86	9.78	9.72	9.75	9.79	9.71	9.61
802.11n	5500	100	AVG	9.51	9.77	9.47	9.56	9.56	9.50	9.54	9.53
802.11n	5520	104	AVG	9.71	9.61	9.69	9.56	9.60	9.47	9.69	9.34
802.11n	5540	108	AVG	9.10	9.63	9.61	9.65	9.33	9.54	9.59	9.34
802.11n	5560	112	AVG	9.00	9.56	9.56	9.54	9.56	9.32	9.31	9.30
802.11n	5580	116	AVG	9.12	9.24	9.15	9.51	9.20	9.21	9.29	9.29
802.11n	5660	132	AVG	9.04	9.04	9.14	9.19	9.26	9.15	9.19	9.20
802.11n	5680	136	AVG	8.80	8.77	9.08	9.05	8.78	9.00	8.73	9.04
802.11n	5700	140	AVG	8.83	8.86	8.90	8.92	8.78	8.92	8.88	8.86

Table 6-5. 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5190	38	AVG	9.37	9.55	9.50	9.48	9.54	9.28	9.27	9.28
802.11n	5230	46	AVG	9.32	9.38	9.48	9.44	9.50	9.18	9.15	9.15
802.11n	5270	54	AVG	9.48	9.17	9.22	9.27	9.27	9.38	9.41	9.51
802.11n	5310	62	AVG	9.20	9.26	9.37	9.35	9.36	9.02	9.02	9.10
802.11n	5510	102	AVG	9.86	9.93	10.01	10.08	10.13	10.20	10.23	10.18
802.11n	5550	110	AVG	9.96	9.98	10.10	10.17	10.24	10.23	9.84	9.81
802.11n	5670	134	AVG	9.62	9.69	9.72	9.78	9.89	9.79	9.84	9.76

Table 6-6. 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 42 of 159	

Antenna-2 Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	10.28	10.23	10.50	10.49	10.39	10.42	10.38	10.48
802.11a	5200	40	AVG	10.37	10.39	10.48	10.45	10.40	10.32	10.50	10.48
802.11a	5220	44	AVG	10.31	10.26	10.37	10.37	10.40	10.49	10.50	10.49
802.11a	5240	48	AVG	10.42	10.50	10.48	10.47	10.50	10.49	10.45	10.35
802.11a	5260	52	AVG	9.34	9.33	9.34	9.38	9.42	9.36	9.46	9.46
802.11a	5280	56	AVG	9.47	9.47	9.50	9.55	9.39	9.60	9.38	9.41
802.11a	5300	60	AVG	9.24	9.36	9.37	9.35	9.45	9.43	9.53	9.35
802.11a	5320	64	AVG	9.29	9.32	9.28	9.37	9.33	9.36	9.54	9.28
802.11a	5500	100	AVG	9.73	9.66	9.64	9.73	9.87	9.81	9.84	9.88
802.11a	5520	104	AVG	9.69	9.73	9.72	9.67	9.72	9.76	9.73	9.85
802.11a	5540	108	AVG	9.71	9.65	9.73	9.68	9.67	9.68	9.65	9.66
802.11a	5560	112	AVG	9.39	9.51	9.72	9.54	9.57	9.61	9.62	9.55
802.11a	5580	116	AVG	9.38	9.45	9.47	9.56	9.44	9.50	9.50	9.46
802.11a	5660	132	AVG	9.01	9.03	9.09	9.05	9.20	9.12	9.14	9.18
802.11a	5680	136	AVG	8.93	9.09	9.03	9.17	9.10	9.17	9.17	9.21
802.11a	5700	140	AVG	8.77	8.80	9.13	8.89	8.91	8.99	8.93	9.05



Table 6-7. 802.11a (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5180	36	AVG	10.18	10.35	10.33	10.26	10.47	10.15	10.42	10.21
802.11n	5200	40	AVG	10.08	10.40	10.46	10.17	10.24	10.32	10.30	10.26
802.11n	5220	44	AVG	10.40	10.41	10.36	10.42	10.34	10.38	10.39	10.21
802.11n	5240	48	AVG	10.19	10.24	10.25	10.30	10.33	10.37	10.48	10.42
802.11n	5260	52	AVG	9.40	9.47	9.30	9.09	9.28	9.46	9.41	9.41
802.11n	5280	56	AVG	9.24	9.32	9.35	9.38	9.29	9.27	9.44	9.10
802.11n	5300	60	AVG	9.25	9.28	9.36	9.29	9.35	9.35	9.47	9.38
802.11n	5320	64	AVG	9.26	9.27	9.27	9.46	9.32	9.38	9.26	9.46
802.11n	5500	100	AVG	9.67	9.78	9.77	9.82	9.79	9.67	9.92	9.75
802.11n	5520	104	AVG	9.76	9.80	9.77	9.70	9.67	9.63	9.54	9.62
802.11n	5540	108	AVG	9.36	9.40	9.59	9.55	9.54	9.67	9.64	9.65
802.11n	5560	112	AVG	9.52	9.52	9.50	9.42	9.39	9.36	9.43	9.59
802.11n	5580	116	AVG	9.37	9.50	9.43	9.24	9.24	9.47	9.34	9.39
802.11n	5660	132	AVG	9.12	9.15	9.20	9.21	9.30	9.05	8.98	9.10
802.11n	5680	136	AVG	8.80	9.04	8.87	8.94	8.98	8.91	9.15	8.99
802.11n	5700	140	AVG	8.93	9.00	8.91	8.92	8.83	8.73	8.99	8.88

Table 6-8. 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5190	38	AVG	9.98	10.00	10.14	9.99	10.01	10.11	10.02	10.00
802.11n	5230	46	AVG	10.17	9.79	9.87	9.88	9.98	10.07	10.04	10.05
802.11n	5270	54	AVG	8.99	8.88	8.83	8.85	8.92	9.00	8.95	8.90
802.11n	5310	62	AVG	8.75	8.83	8.76	8.78	8.79	8.89	8.87	8.77
802.11n	5510	102	AVG	9.12	9.38	9.61	9.53	9.34	9.37	9.37	9.36
802.11n	5550	110	AVG	9.02	9.10	9.21	9.26	9.32	9.29	9.15	9.34
802.11n	5670	134	AVG	8.83	8.55	8.67	8.69	8.76	8.66	8.83	8.91

Table 6-9. 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 43 of 159	

MIMO Maximum Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5180	36	AVG	12.89	13.03	13.01	12.95	13.14	12.92	13.09	13.00
802.11n	5200	40	AVG	12.93	13.08	13.16	12.93	12.94	12.99	12.96	12.97
802.11n	5220	44	AVG	12.97	13.04	13.02	13.10	13.03	13.09	13.14	13.06
802.11n	5240	48	AVG	12.96	13.01	13.00	13.00	12.93	13.05	13.04	13.01
802.11n	5260	52	AVG	12.68	12.75	12.65	12.54	12.64	12.77	12.64	12.65
802.11n	5280	56	AVG	12.48	12.52	12.54	12.57	12.51	12.54	12.59	12.40
802.11n	5300	60	AVG	12.52	12.54	12.55	12.57	12.58	12.59	12.70	12.59
802.11n	5320	64	AVG	12.55	12.59	12.54	12.60	12.55	12.60	12.50	12.55
802.11n	5500	100	AVG	12.60	12.79	12.63	12.70	12.69	12.60	12.74	12.65
802.11n	5520	104	AVG	12.75	12.72	12.74	12.64	12.65	12.56	12.63	12.49
802.11n	5540	108	AVG	12.24	12.53	12.61	12.61	12.45	12.62	12.63	12.51
802.11n	5560	112	AVG	12.28	12.55	12.54	12.49	12.49	12.35	12.38	12.46
802.11n	5580	116	AVG	12.26	12.38	12.30	12.39	12.23	12.35	12.33	12.35
802.11n	5660	132	AVG	12.09	12.11	12.18	12.21	12.29	12.11	12.10	12.16
802.11n	5680	136	AVG	11.81	11.92	11.99	12.01	11.89	11.97	11.96	12.03
802.11n	5700	140	AVG	11.89	11.94	11.92	11.93	11.82	11.84	11.95	11.88

Table 6-10. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5190	38	AVG	12.70	12.79	12.84	12.75	12.79	12.73	12.67	12.67
802.11n	5230	46	AVG	12.78	12.60	12.69	12.68	12.76	12.66	12.63	12.63
802.11n	5270	54	AVG	12.25	12.04	12.04	12.08	12.11	12.20	12.20	12.23
802.11n	5310	62	AVG	11.99	12.06	12.09	12.08	12.09	11.97	11.96	11.95
802.11n	5510	102	AVG	12.52	12.67	12.82	12.82	12.76	12.82	12.83	12.80
802.11n	5550	110	AVG	12.53	12.57	12.69	12.75	12.81	12.80	12.52	12.59
802.11n	5670	134	AVG	12.25	12.17	12.24	12.28	12.37	12.27	12.37	12.37



Table 6-11. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Sample MIMO Calculation:

At 5180MHz the average conducted output power was measured to be 9.55 dBm for Antenna-1 and 10.18 dBm for Antenna-2. The measured values were summed in linear power units then converted back to dBm:

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(9.55 \text{ dBm} + 10.18 \text{ dBm}) = (9.0157 \text{ mW} + 10.423 \text{ mW}) = 19.439 \text{ mW} = 12.89 \text{ dBm}$$

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 44 of 159	

6.4 Peak Power Spectral Density – 802.11a/n §15.407 (a)(1),(5) / RSS-210 [A9.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033, was used to measure the power spectral density.

The maximum permissible power spectral density is 4 dBm/MHz in the 5150 – 5250MHz band and 11dBm/MHz in the 5250 – 5350MHz and 5470 – 5725MHz bands.

Test Procedure Used

KDB 789033 v01r02 – Section E
KDB 662911

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run since the EUT was operating at a duty cycle $\geq 98\%$
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-3. Test Instrument & Measurement Setup

Test Notes



MIMO peak power spectral density values in Table 6-14 were calculated in linear power units.


FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 45 of 159	

Antenna-1


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	0.377	4.0	-3.62
	5200	40	a	6	0.639	4.0	-3.36
	5240	48	a	6	0.310	4.0	-3.69
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-1.256	4.0	-5.26
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-1.271	4.0	-5.27
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	-1.420	4.0	-5.42
	5190	38	n (40MHz)	13.5/15 (MCS0)	-5.122	4.0	-9.12
	5230	46	n (40MHz)	13.5/15 (MCS0)	-5.016	4.0	-9.02
Band II	5260	52	a	6	0.261	11.0	-10.74
	5280	56	a	6	0.505	11.0	-10.50
	5320	64	a	6	0.198	11.0	-10.80
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-1.429	11.0	-12.43
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-0.952	11.0	-11.95
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-1.180	11.0	-12.18
	5270	54	n (40MHz)	13.5/15 (MCS0)	-5.232	11.0	-16.23
	5310	62	n (40MHz)	13.5/15 (MCS0)	-5.519	11.0	-16.52
Band III	5500	100	a	6	-0.026	11.0	-11.03
	5580	116	a	6	0.004	11.0	-11.00
	5700	140	a	6	-0.466	11.0	-11.47
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-1.533	11.0	-12.53
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-1.501	11.0	-12.50
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	-1.830	11.0	-12.83
	5510	102	n (40MHz)	13.5/15 (MCS0)	-4.369	11.0	-15.37
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.095	11.0	-15.10
	5670	134	n (40MHz)	13.5/15 (MCS0)	-4.213	11.0	-15.21

Table 6-12. Antenna-1 Conducted Power Spectral Density Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 46 of 159	

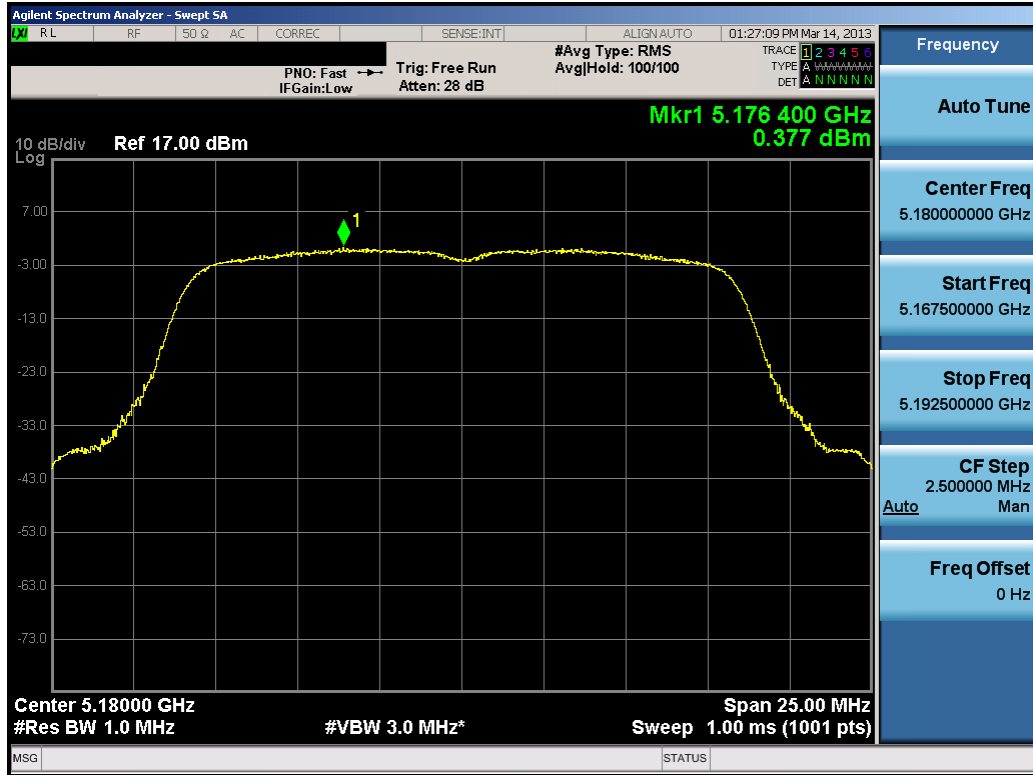


Plot 6-51. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

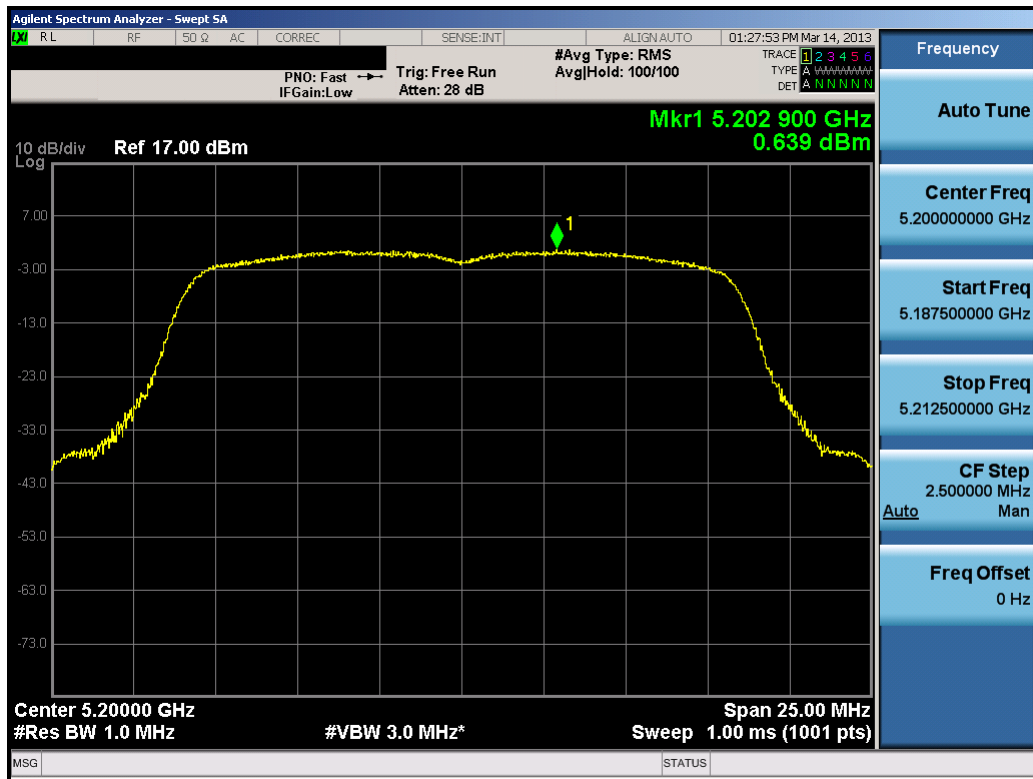


Plot 6-52. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 47 of 159

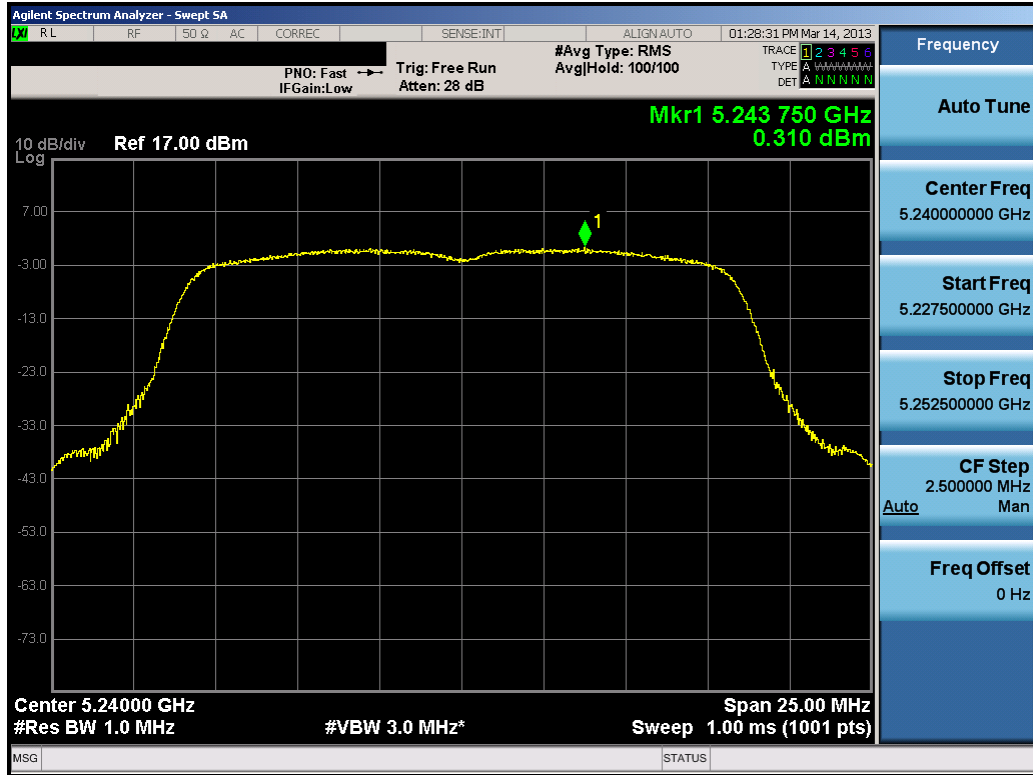


Plot 6-53. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

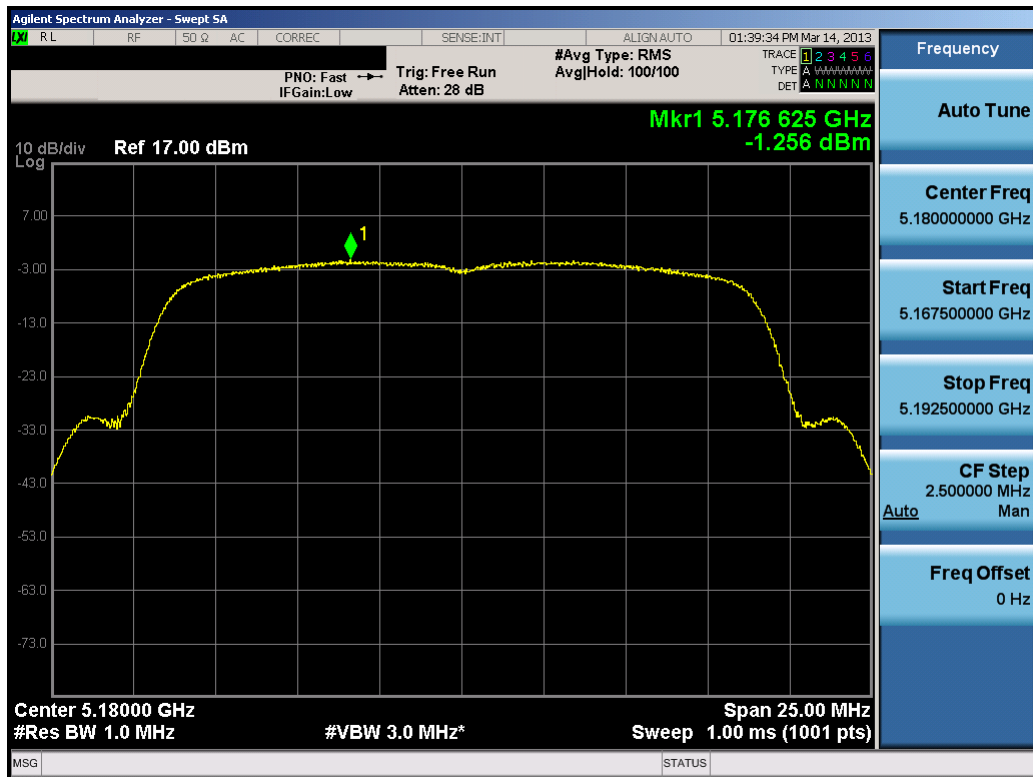


Plot 6-54. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 48 of 159

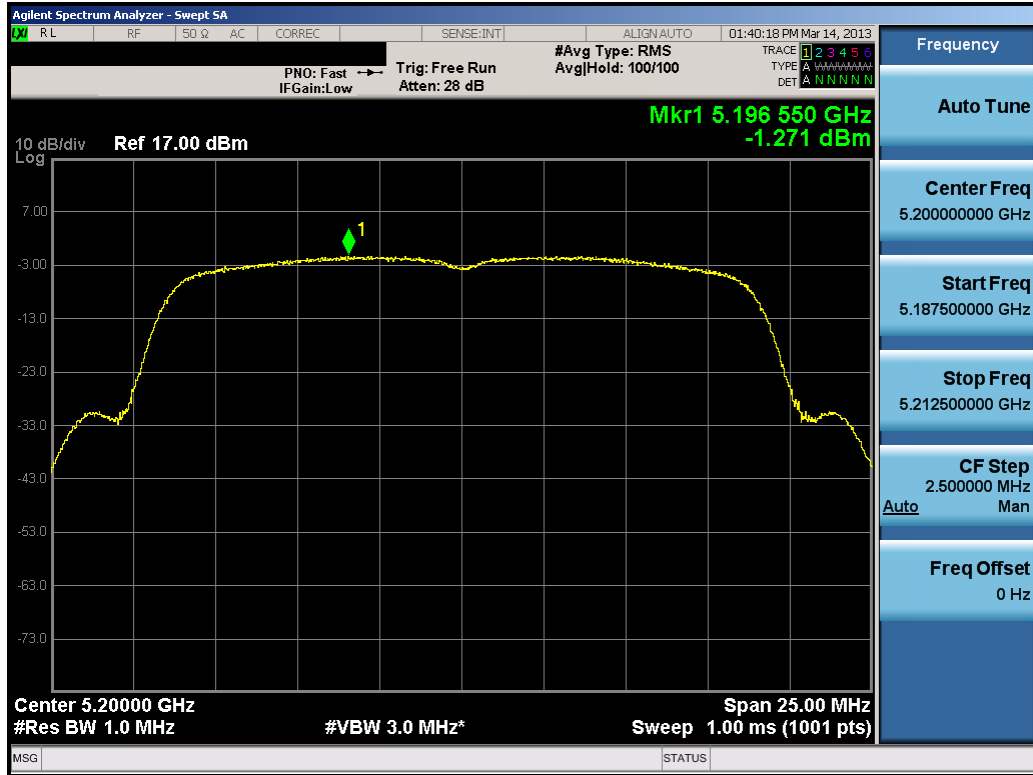


Plot 6-55. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

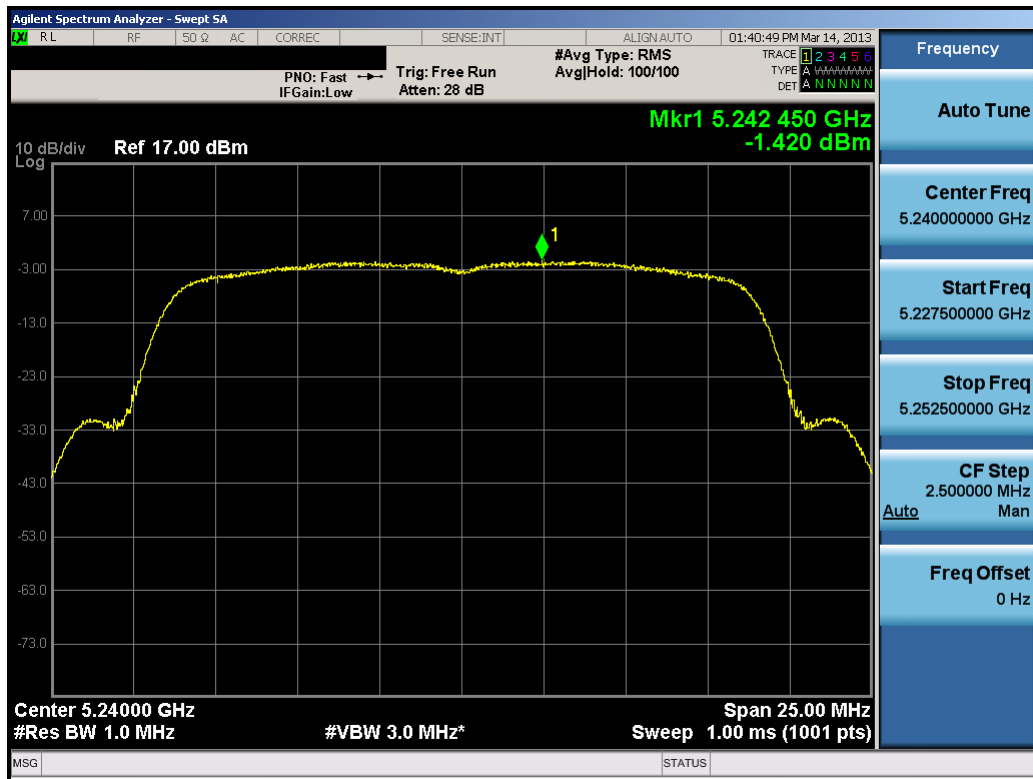


Plot 6-56. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

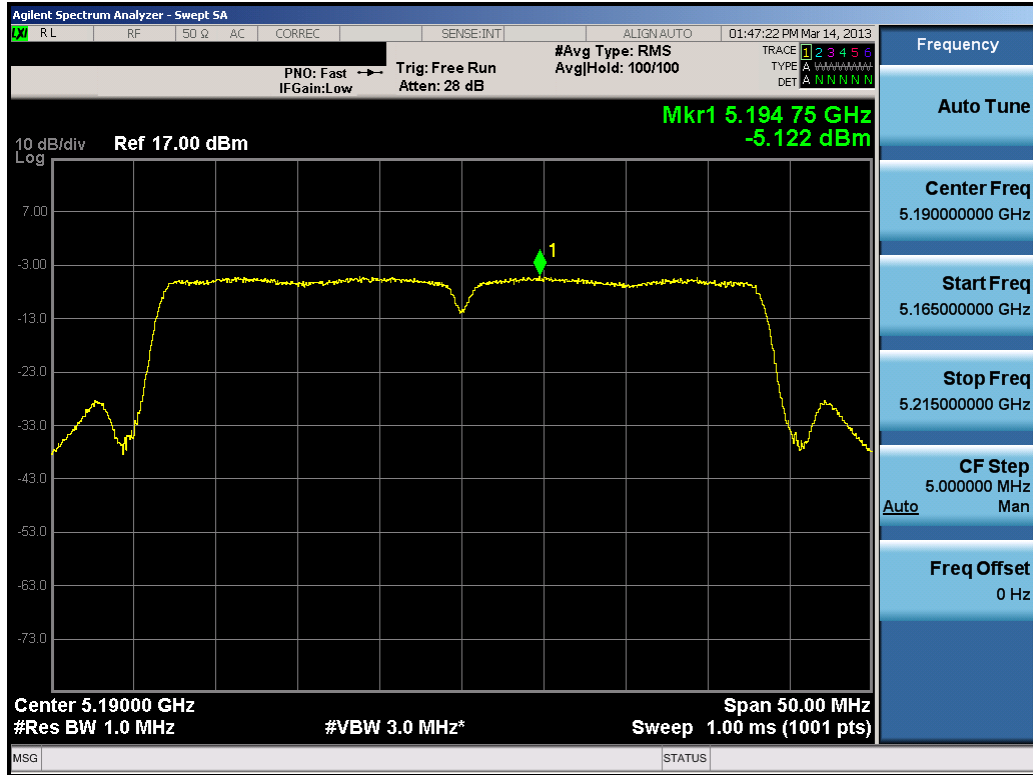

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 49 of 159

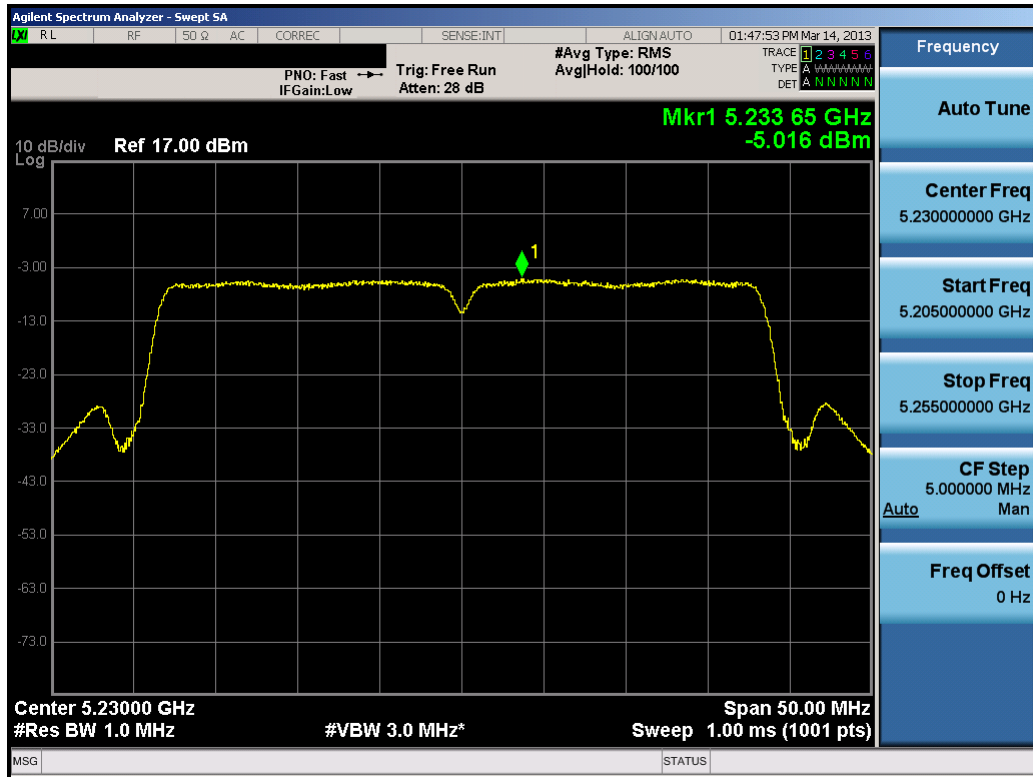


Plot 6-57. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)




Plot 6-58. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 50 of 159

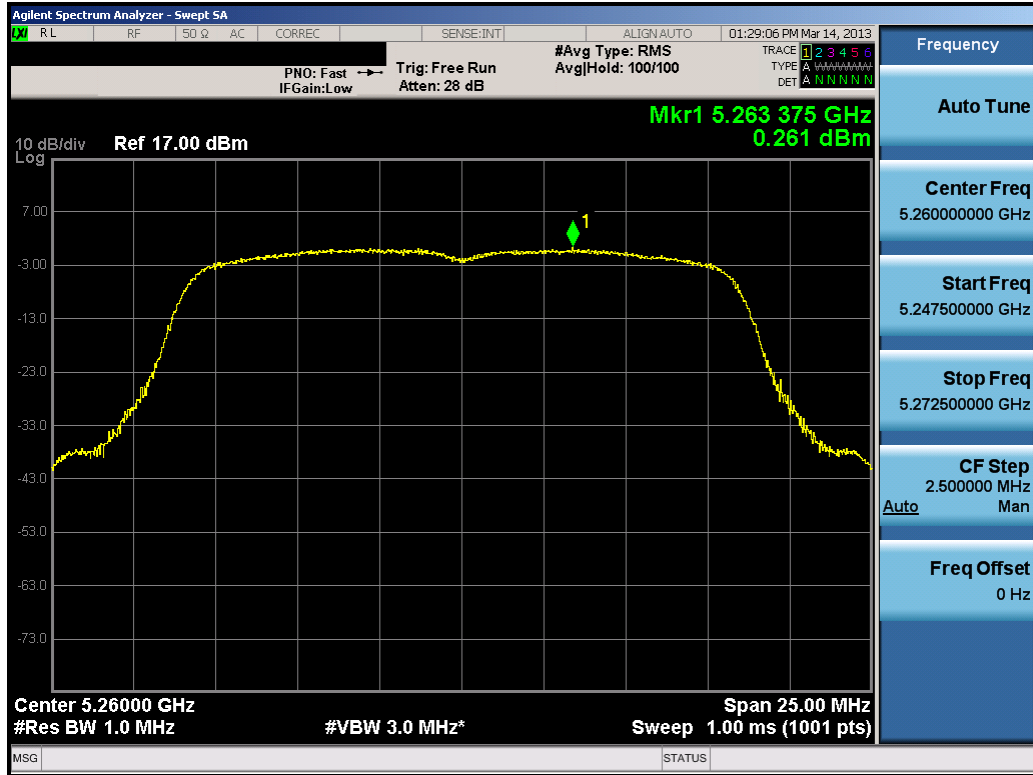


Plot 6-59. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

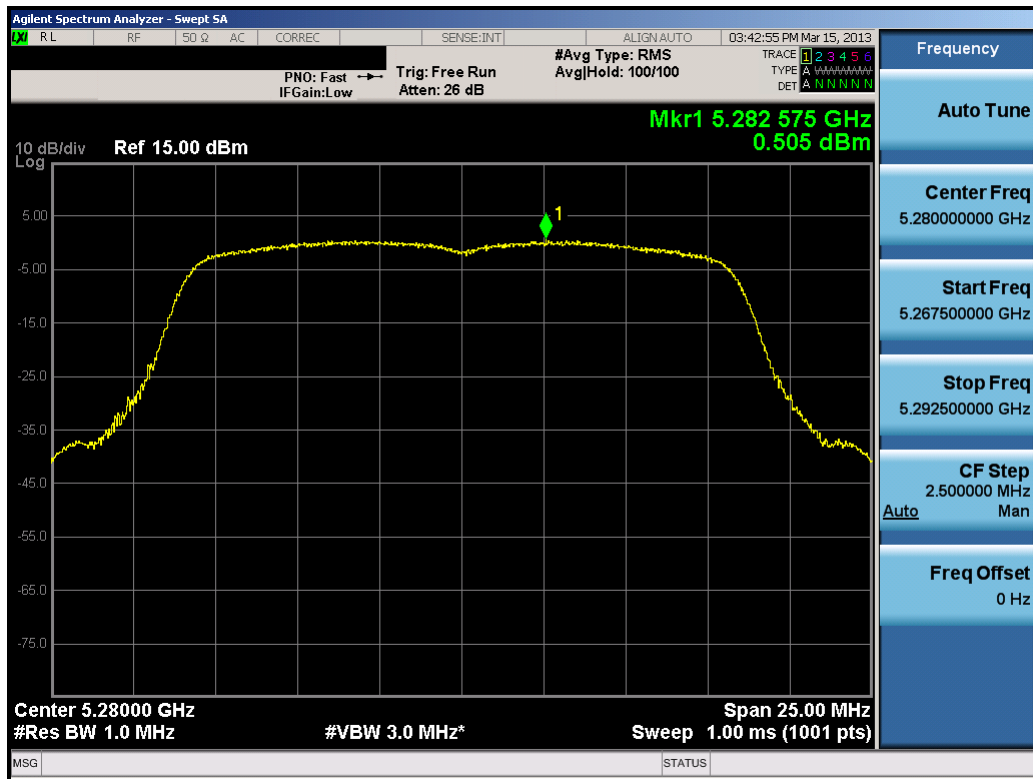


Plot 6-60. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 51 of 159

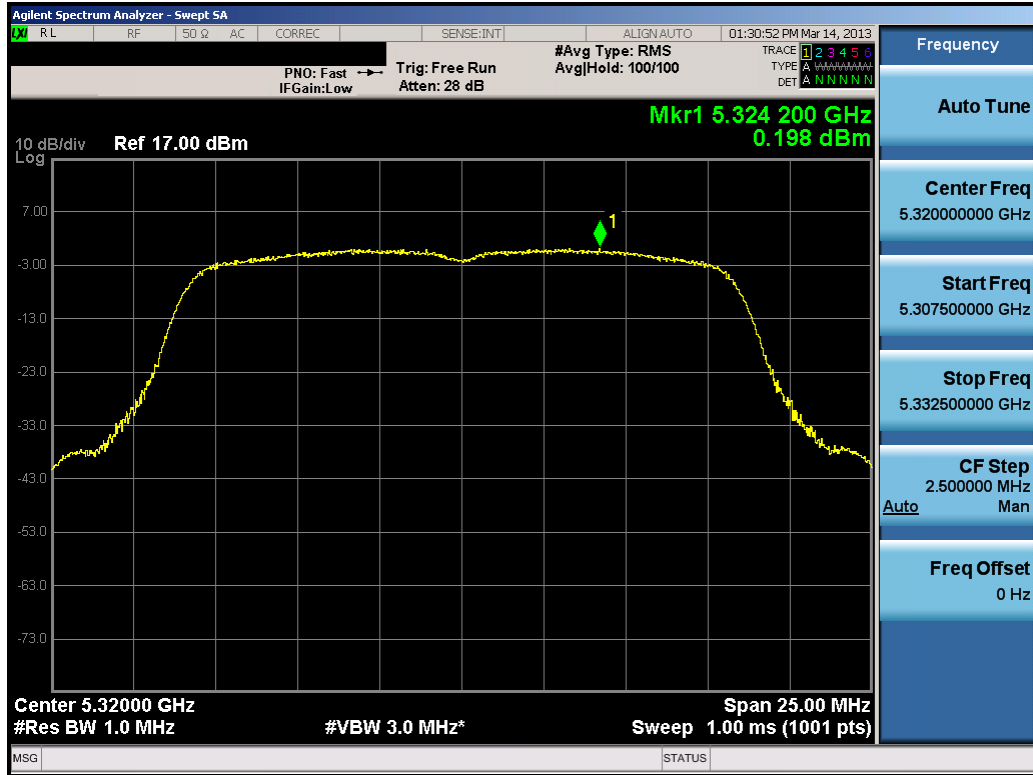


Plot 6-61. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

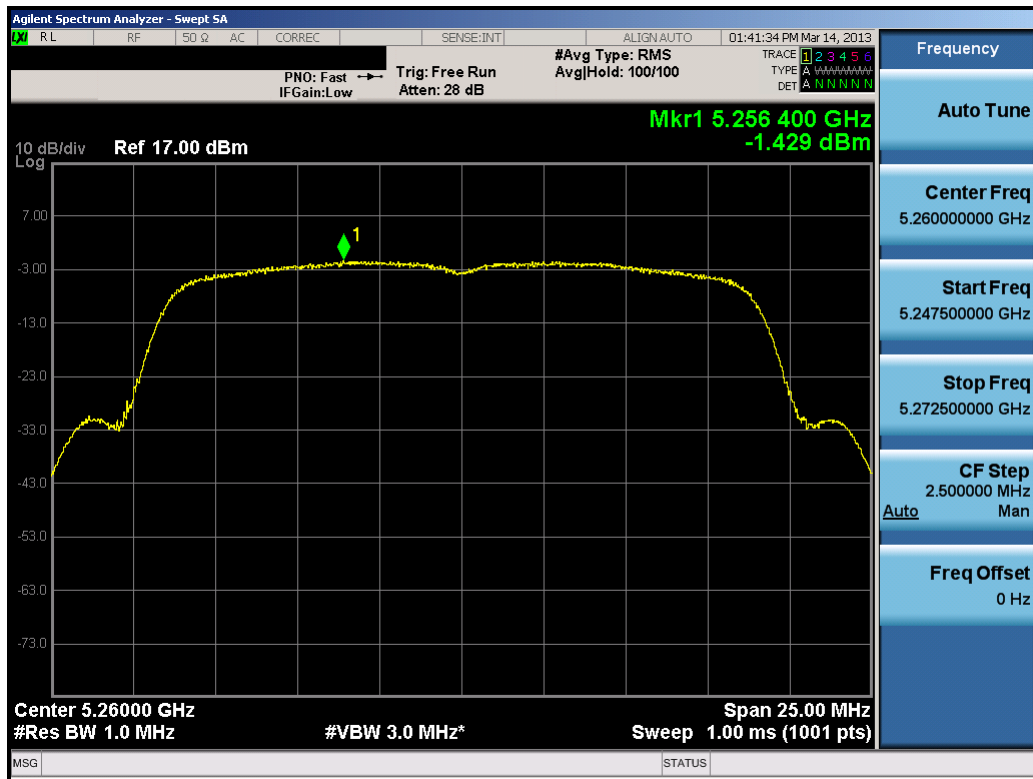


Plot 6-62. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 52 of 159

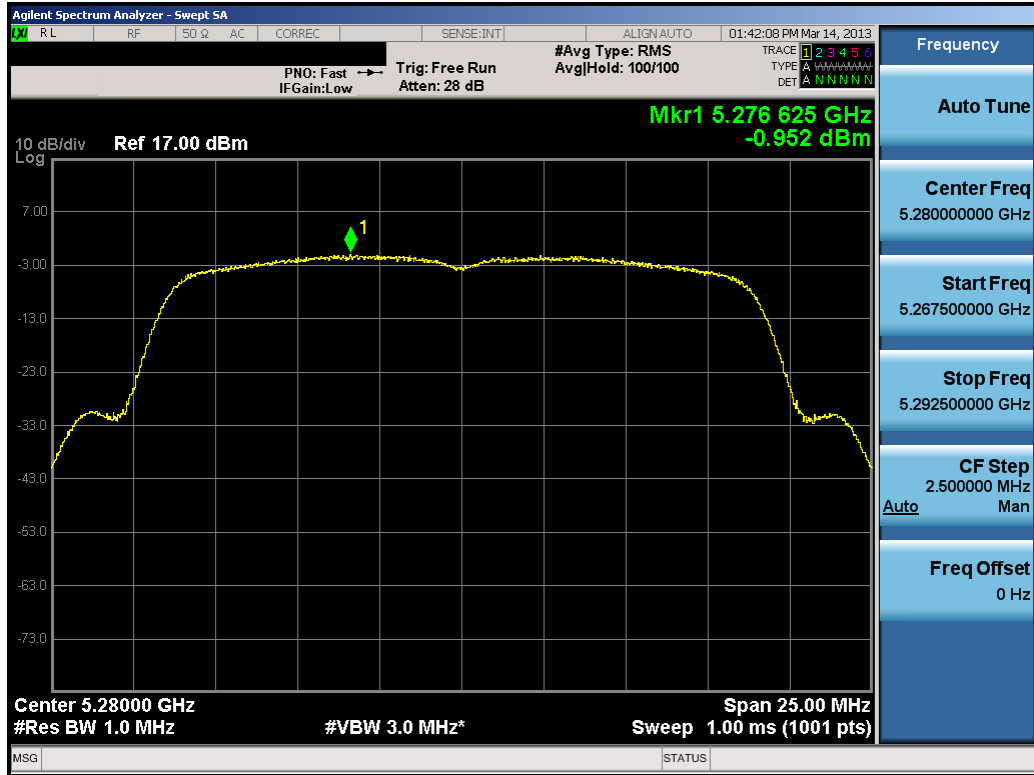


Plot 6-63. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

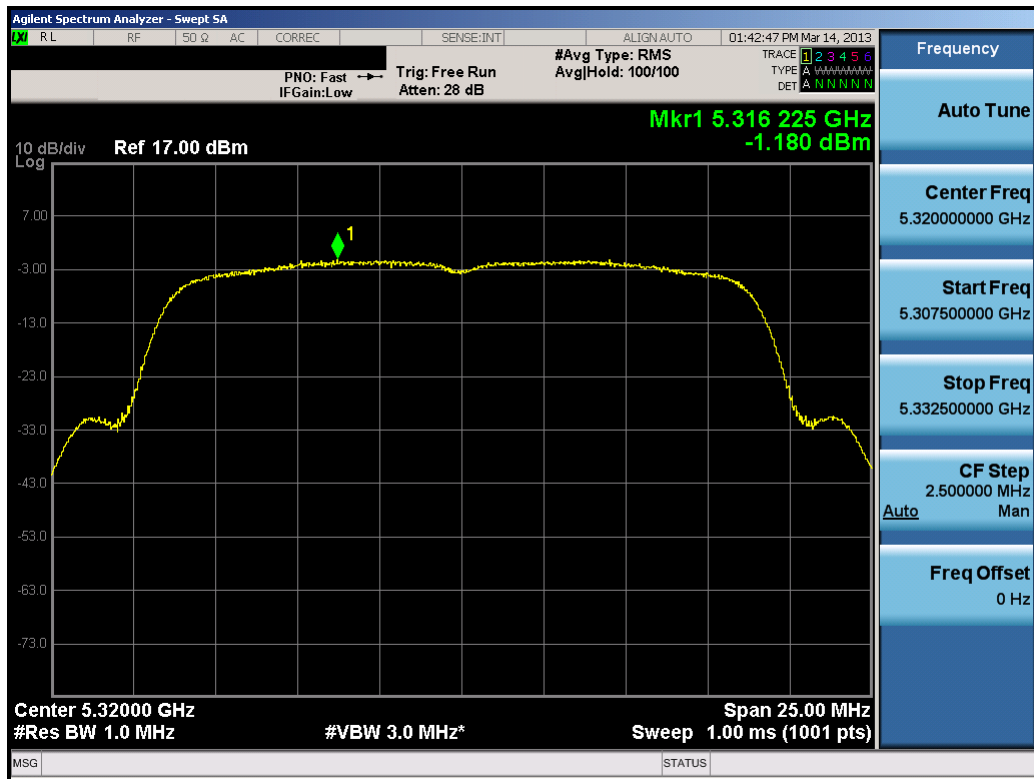


Plot 6-64. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 53 of 159

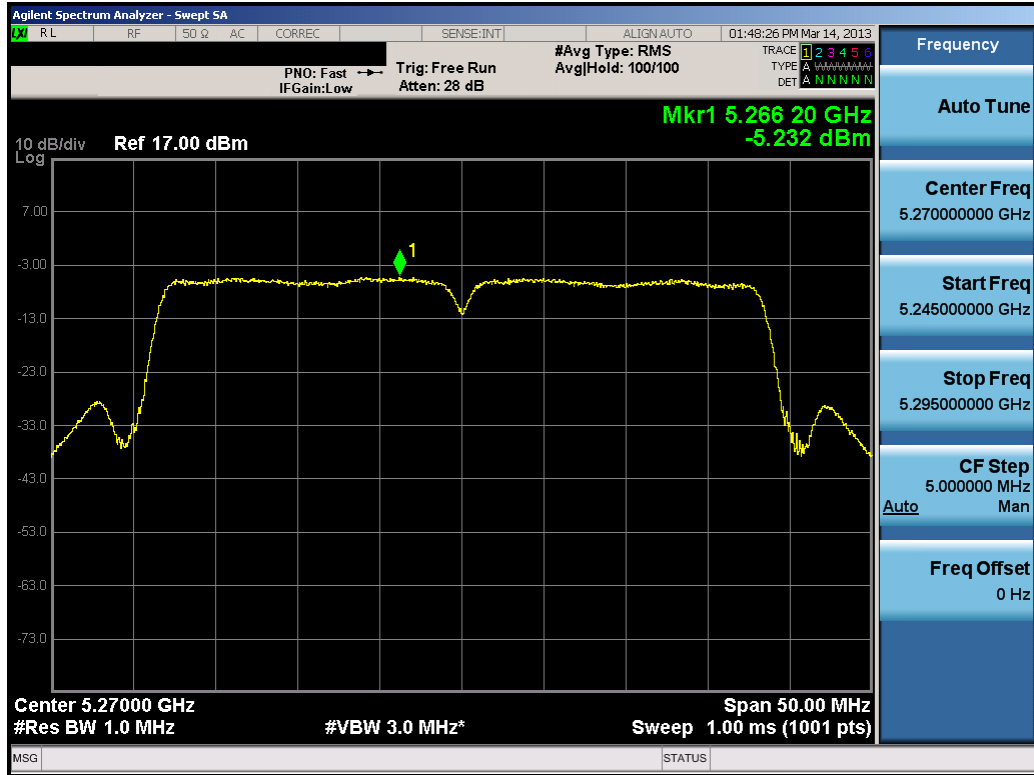


Plot 6-65. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

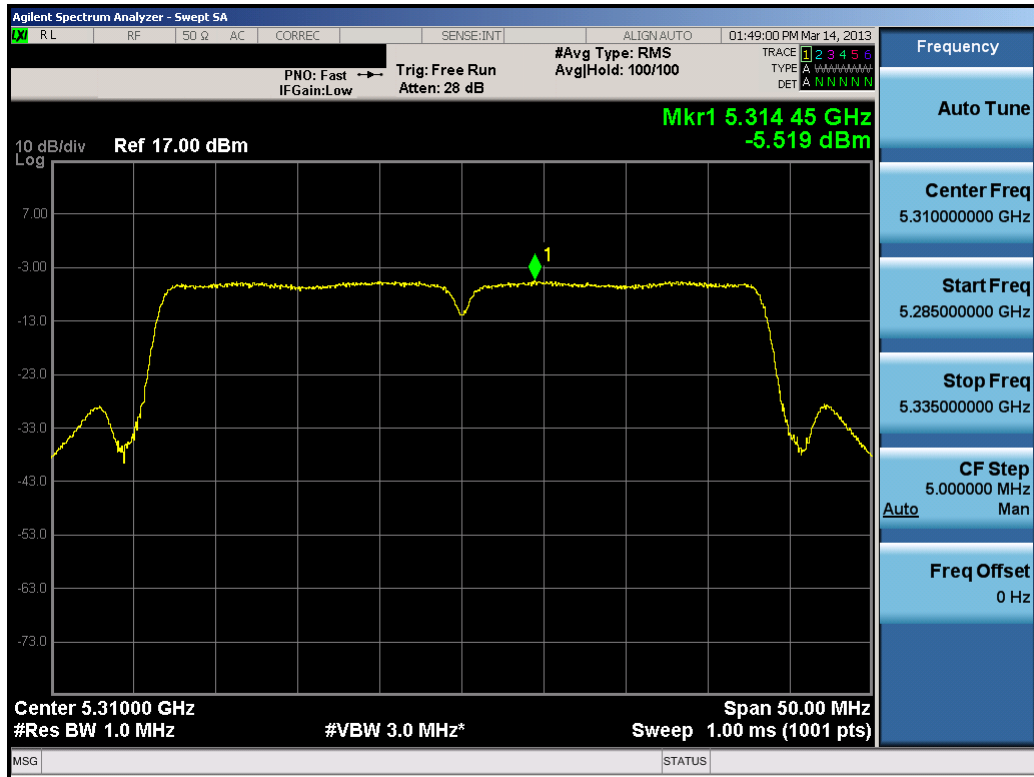


Plot 6-66. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 54 of 159

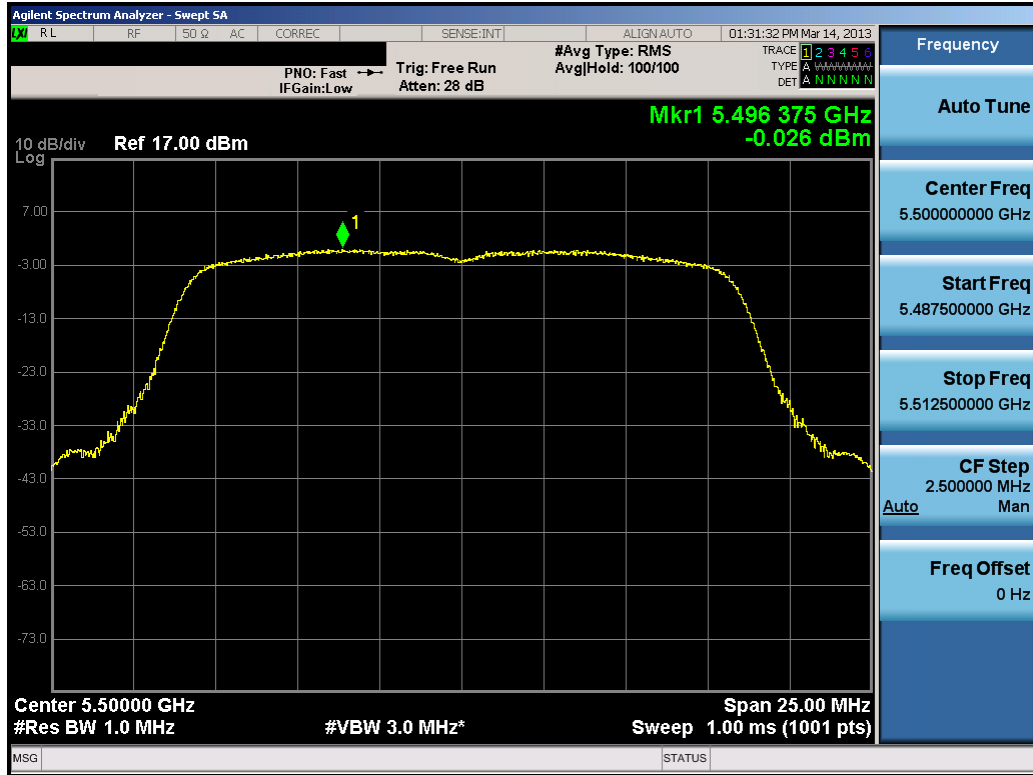


Plot 6-67. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

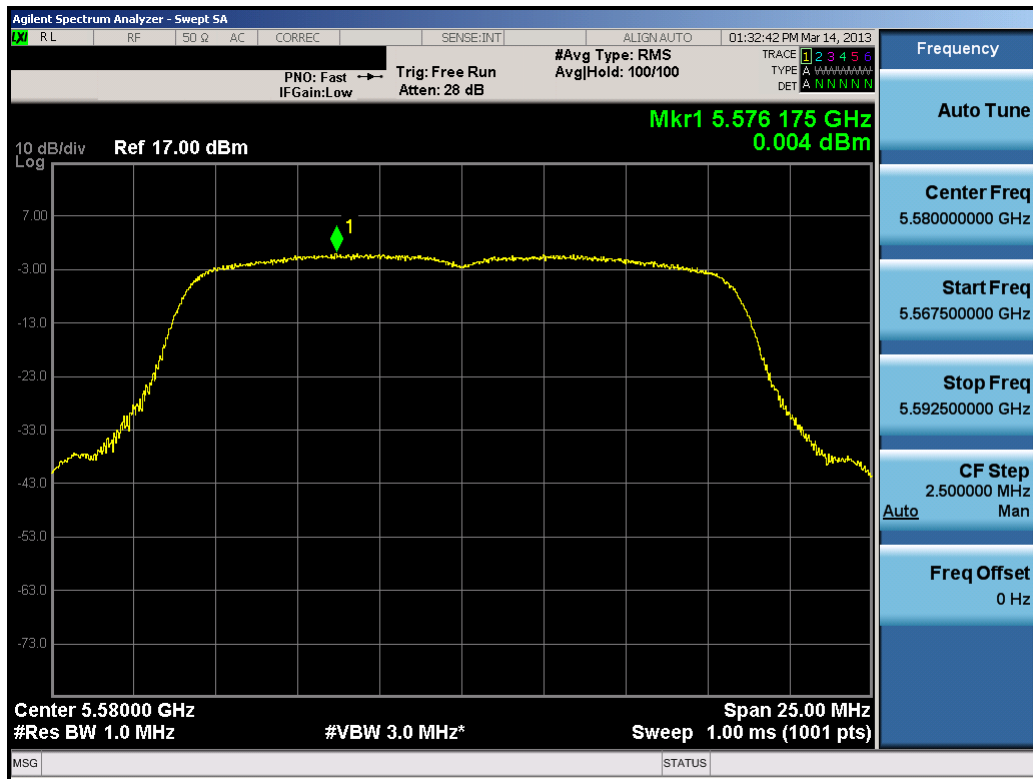


Plot 6-68. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 55 of 159

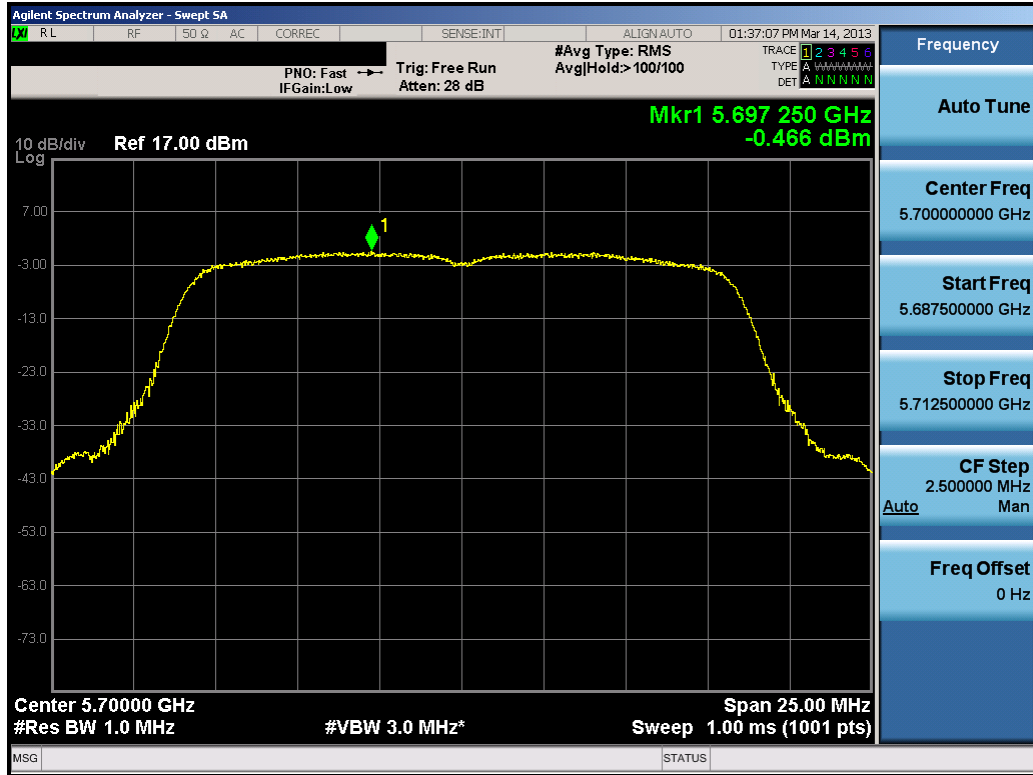


Plot 6-69. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)

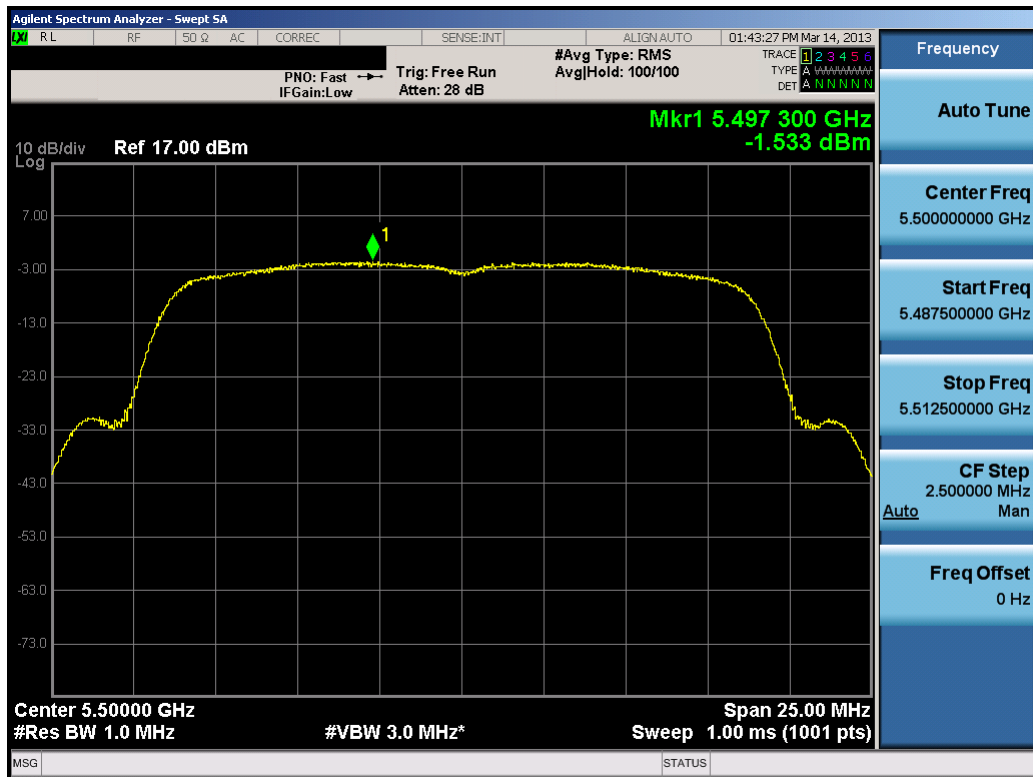


Plot 6-70. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 56 of 159

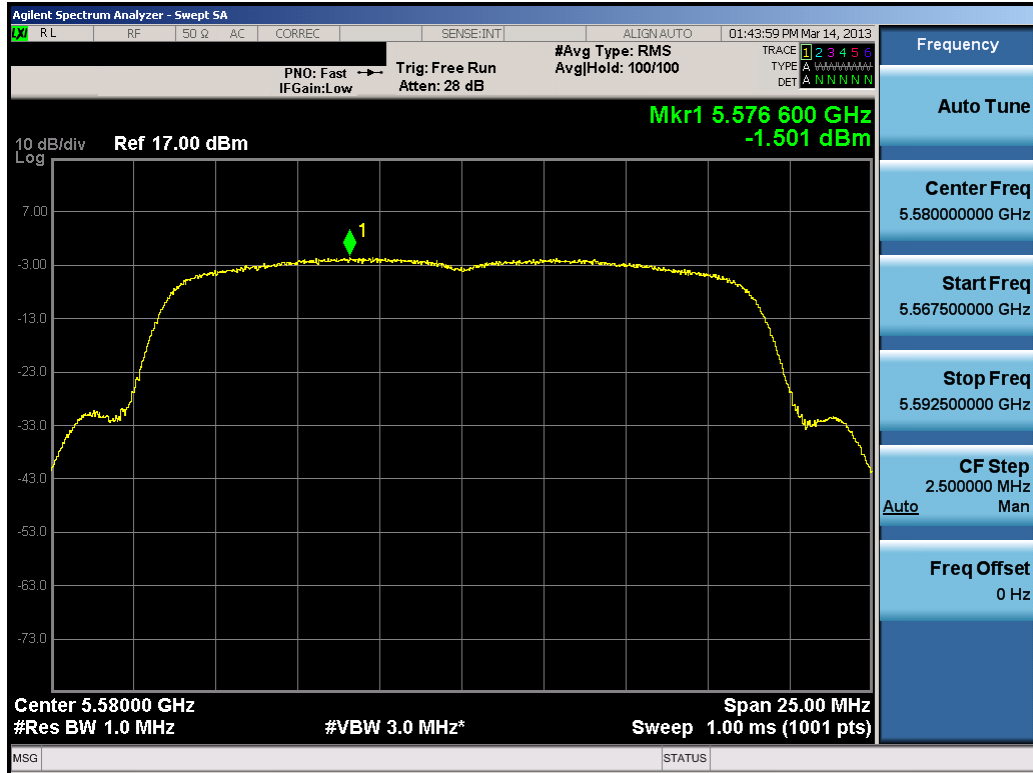


Plot 6-71. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

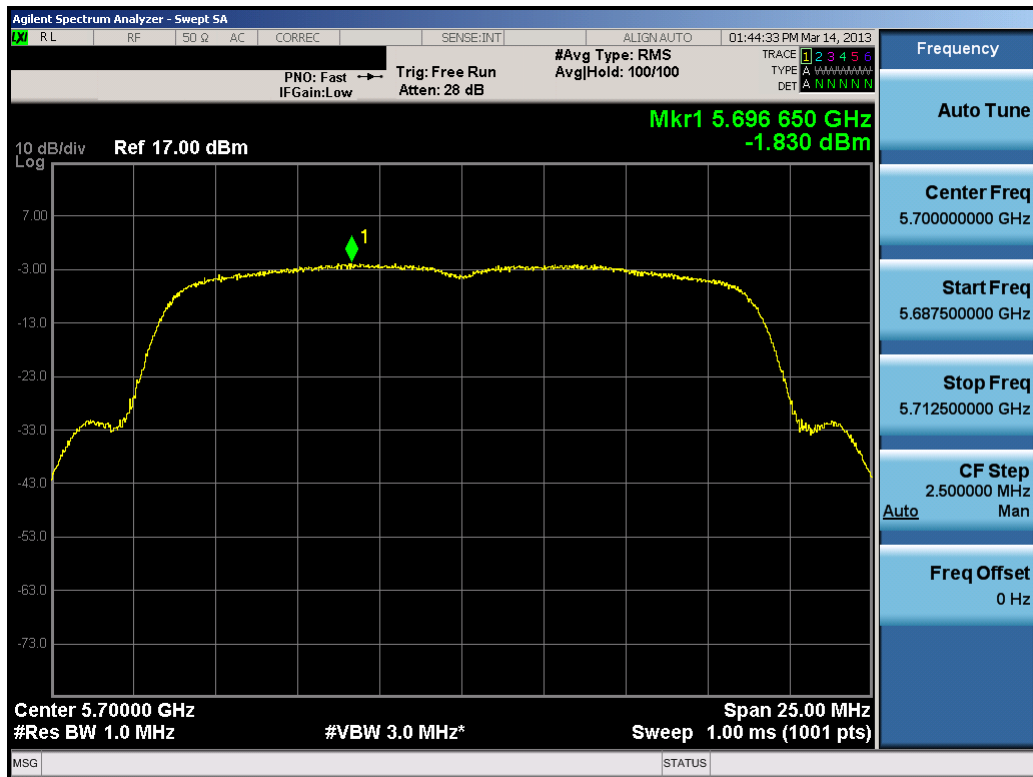


Plot 6-72. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 57 of 159

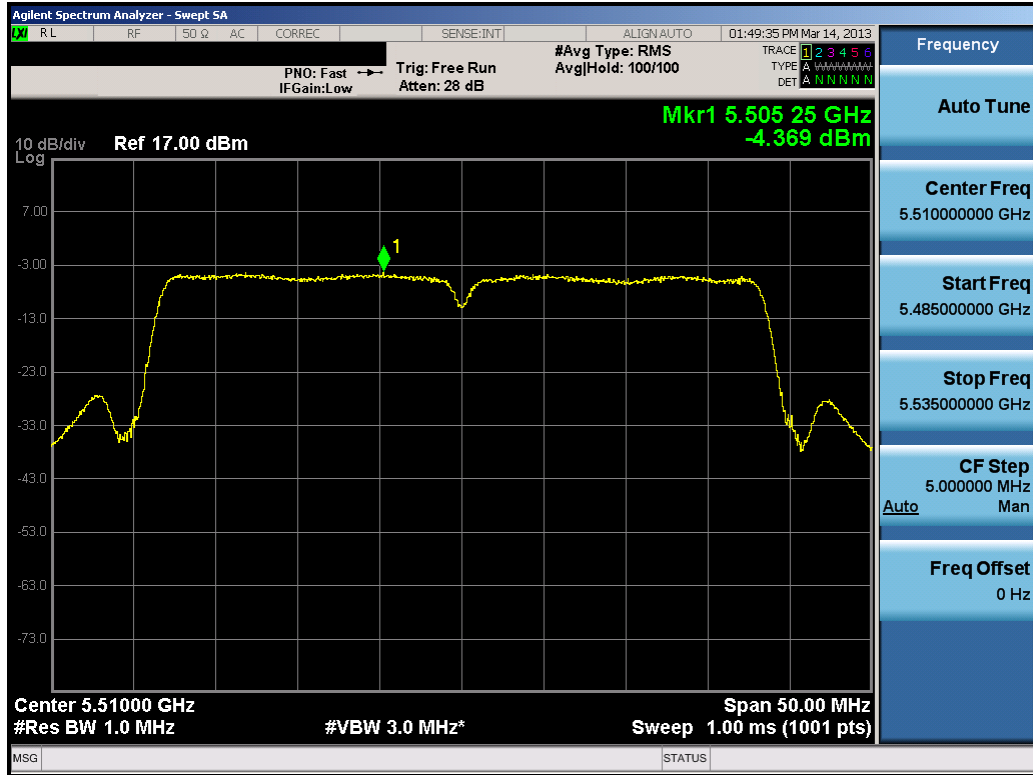


Plot 6-73. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

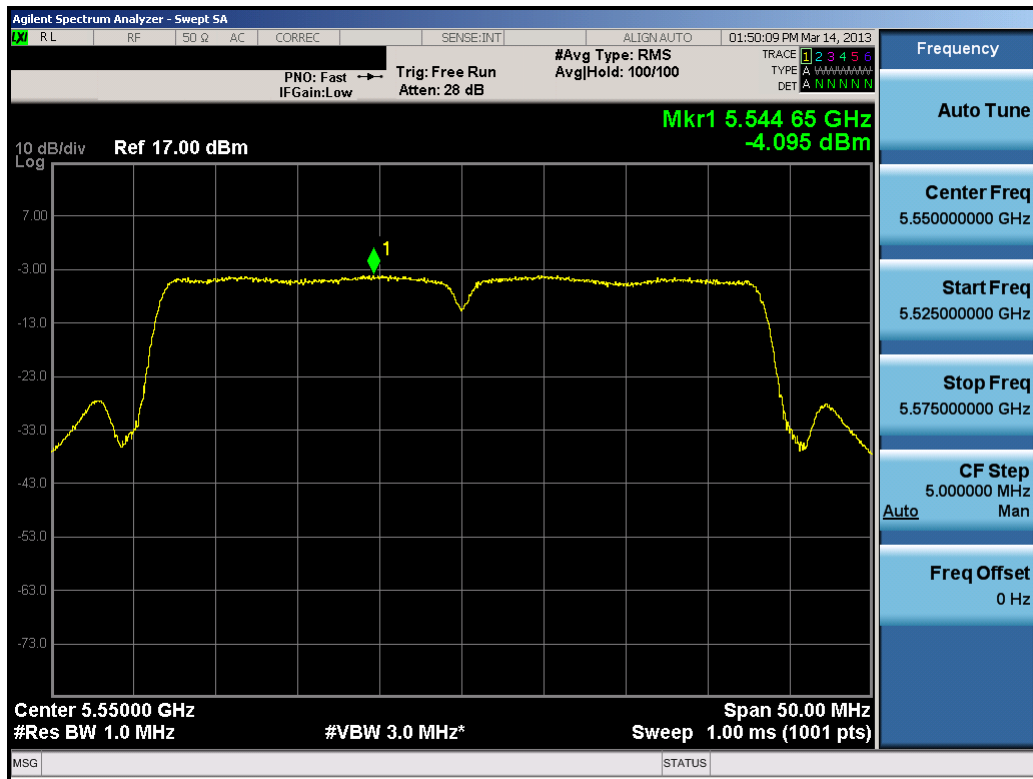

Plot 6-74. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 58 of 159

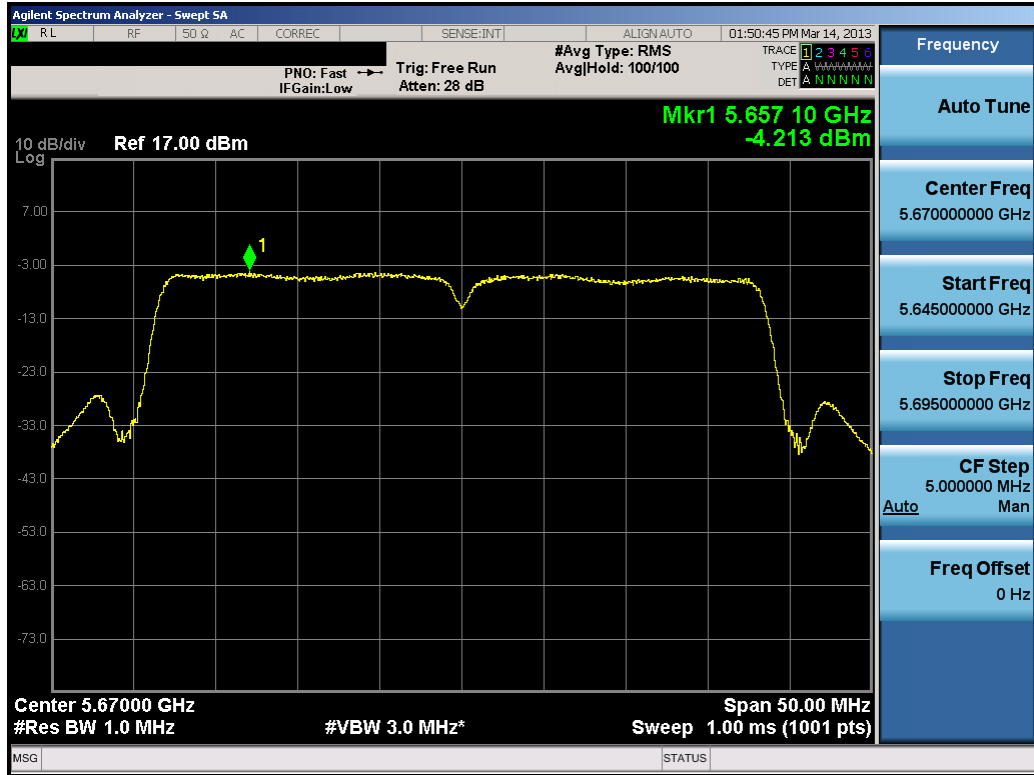



Plot 6-75. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)


FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 59 of 159

Antenna-2


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	-0.260	4.0	-4.26
	5200	40	a	6	-0.542	4.0	-4.54
	5240	48	a	6	-0.420	4.0	-4.42
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-0.524	4.0	-4.52
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-0.708	4.0	-4.71
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	-0.558	4.0	-4.56
	5190	38	n (40MHz)	13.5/15 (MCS0)	-4.567	4.0	-8.57
	5230	46	n (40MHz)	13.5/15 (MCS0)	-4.416	4.0	-8.42
Band II	5260	52	a	6	-1.389	11.0	-12.39
	5280	56	a	6	-1.571	11.0	-12.57
	5320	64	a	6	-1.277	11.0	-12.28
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-1.937	11.0	-12.94
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-1.647	11.0	-12.65
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-1.679	11.0	-12.68
	5270	54	n (40MHz)	13.5/15 (MCS0)	-5.686	11.0	-16.69
	5310	62	n (40MHz)	13.5/15 (MCS0)	-5.849	11.0	-16.85
Band III	5500	100	a	6	-1.032	11.0	-12.03
	5580	116	a	6	-1.097	11.0	-12.10
	5700	140	a	6	-1.631	11.0	-12.63
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-1.542	11.0	-12.54
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-1.415	11.0	-12.42
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	-1.950	11.0	-12.95
	5510	102	n (40MHz)	13.5/15 (MCS0)	-5.453	11.0	-16.45
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.594	11.0	-15.59
	5670	134	n (40MHz)	13.5/15 (MCS0)	-5.567	11.0	-16.57

Table 6-13. Antenna-2 Conducted Power Spectral Density Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 60 of 159	

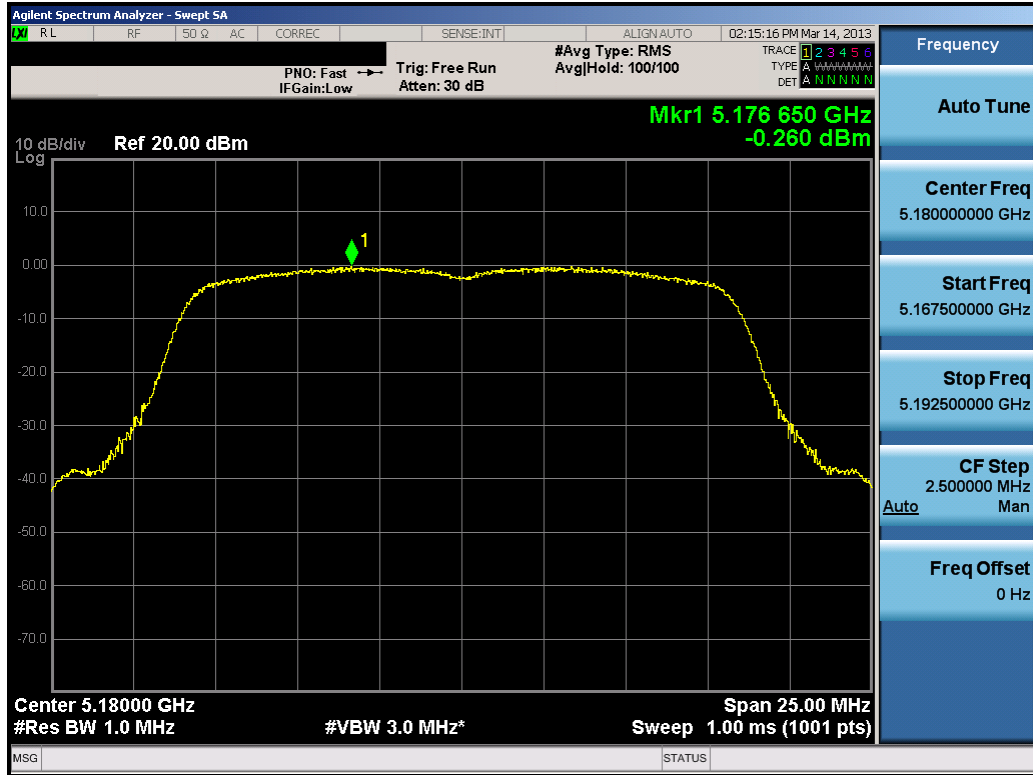


Plot 6-76. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

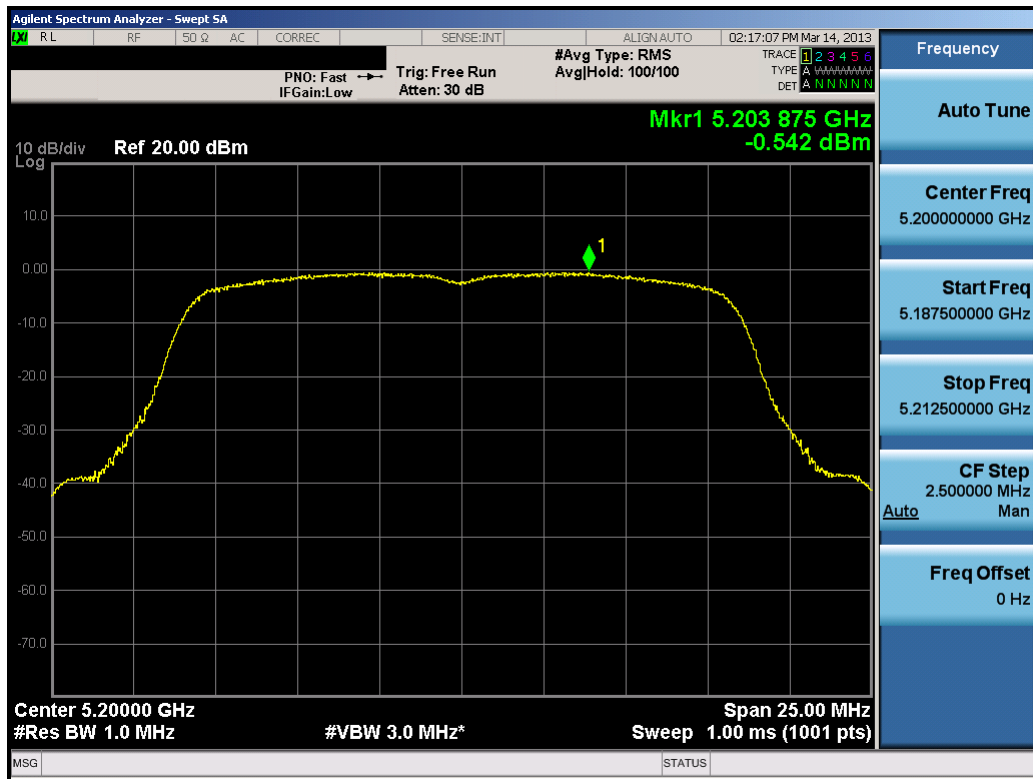


Plot 6-77. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 61 of 159

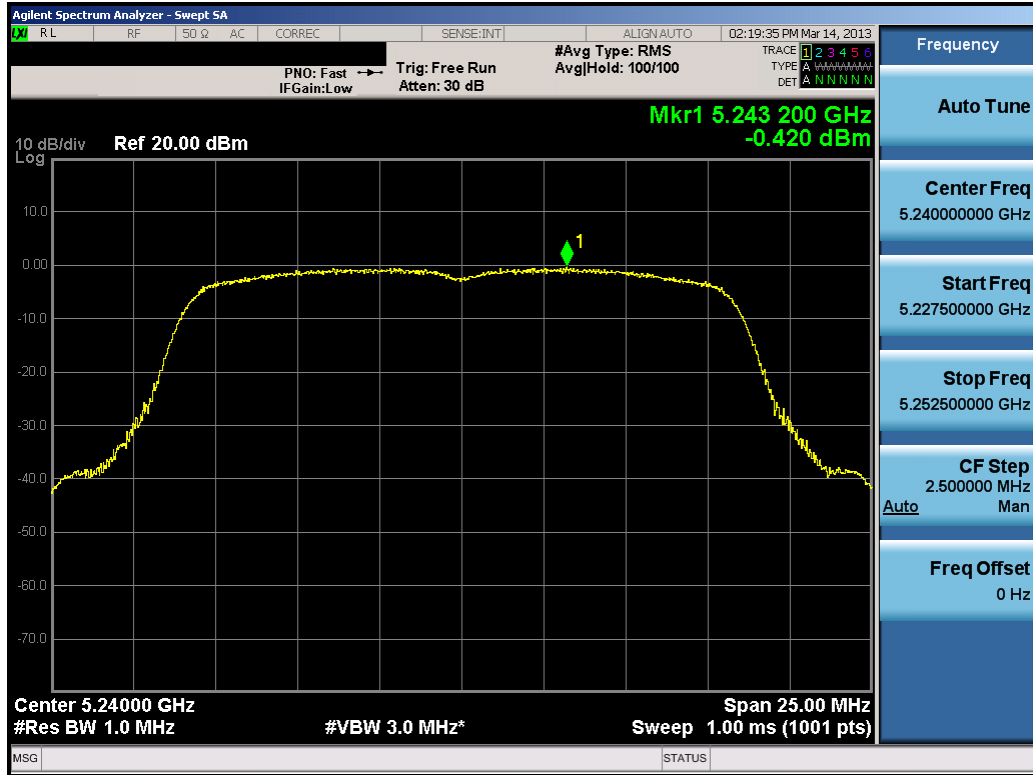


Plot 6-78. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

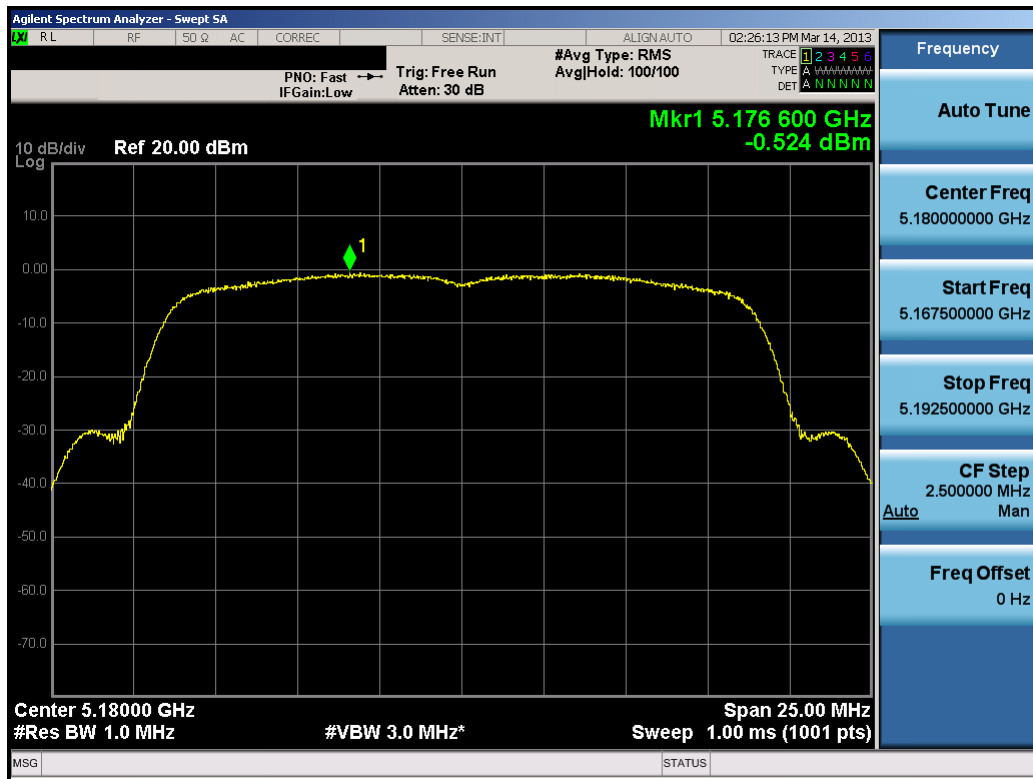


Plot 6-79. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 62 of 159

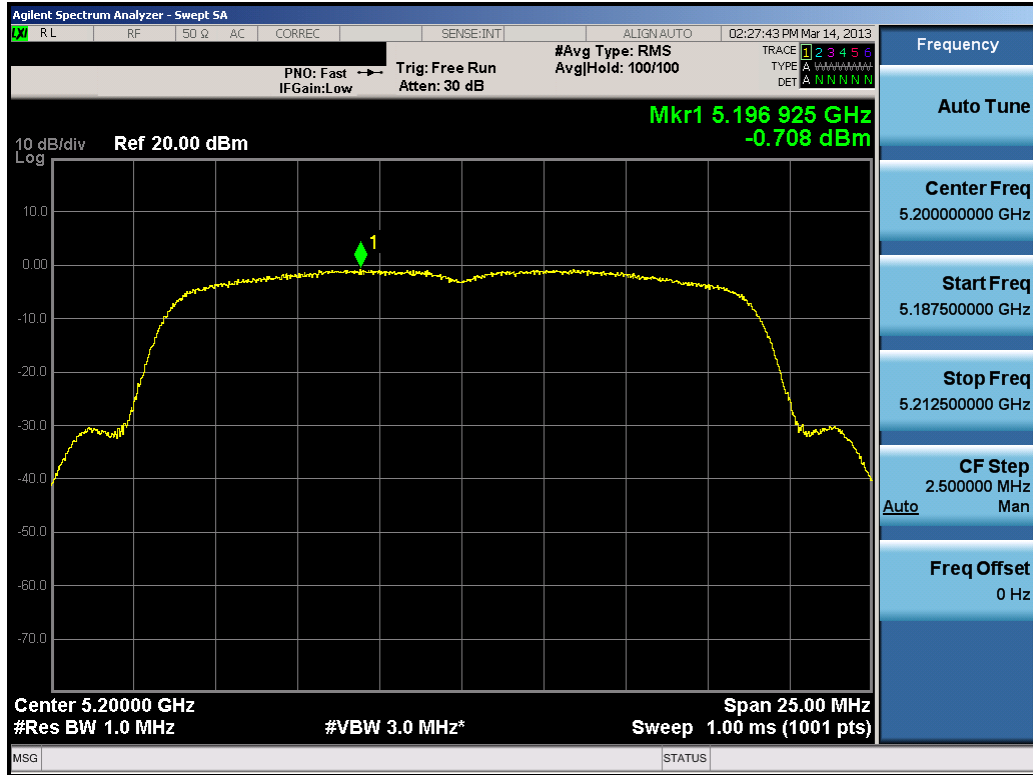


Plot 6-80. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

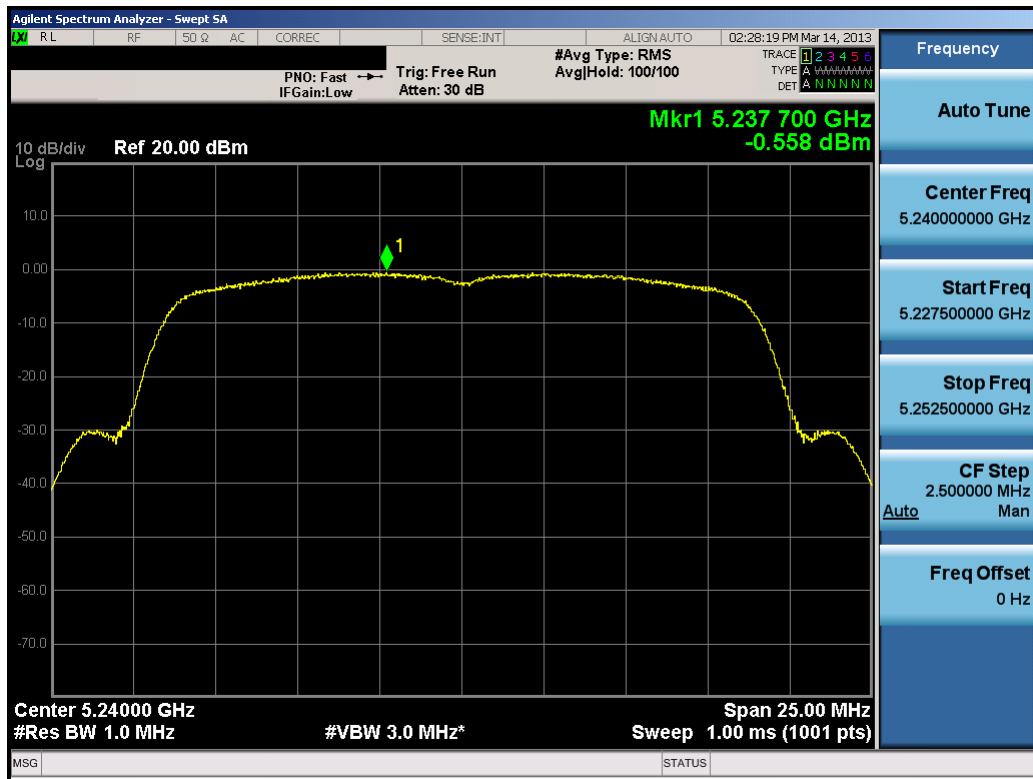


Plot 6-81. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 63 of 159

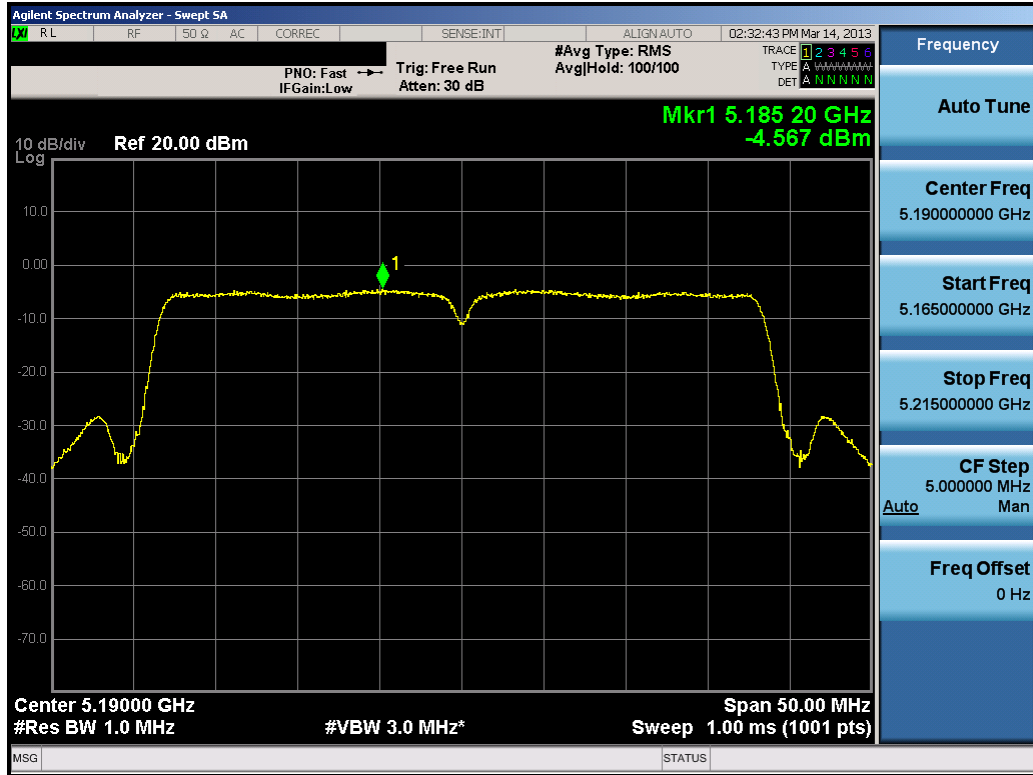


Plot 6-82. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

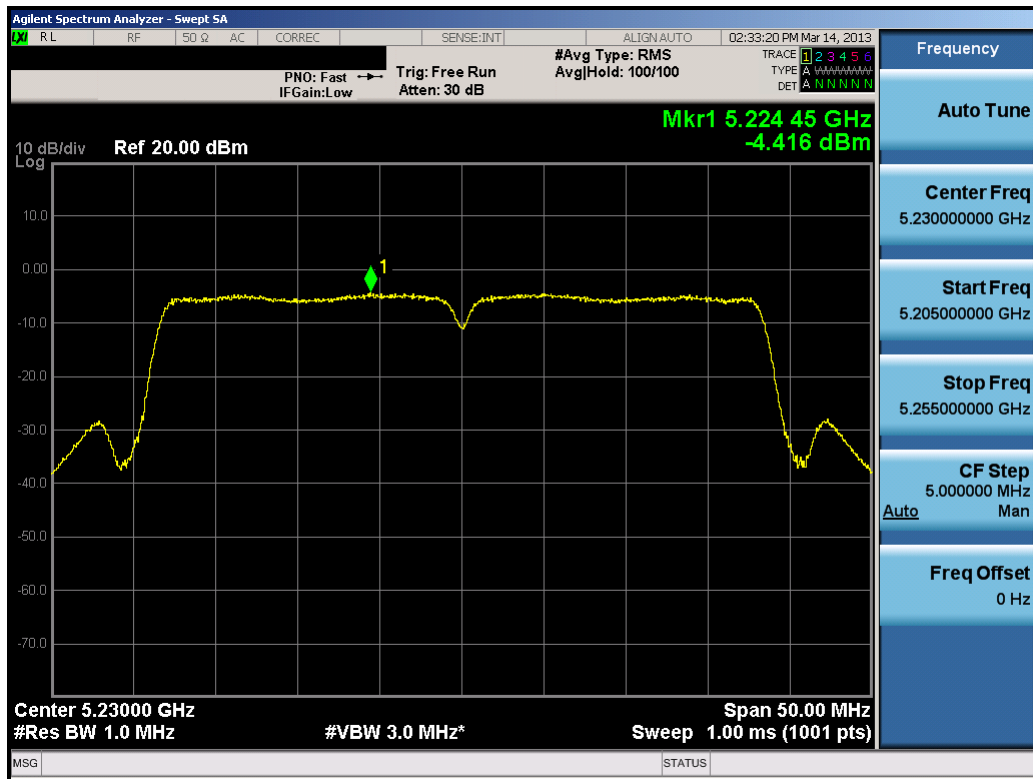


Plot 6-83. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 64 of 159

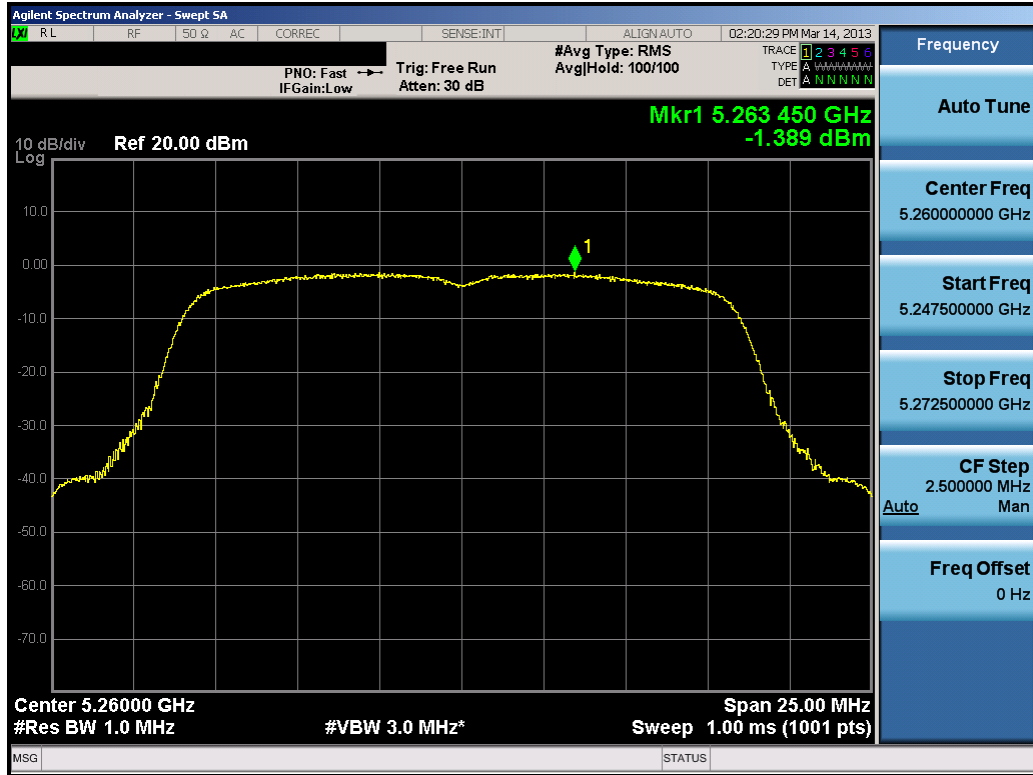


Plot 6-84. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

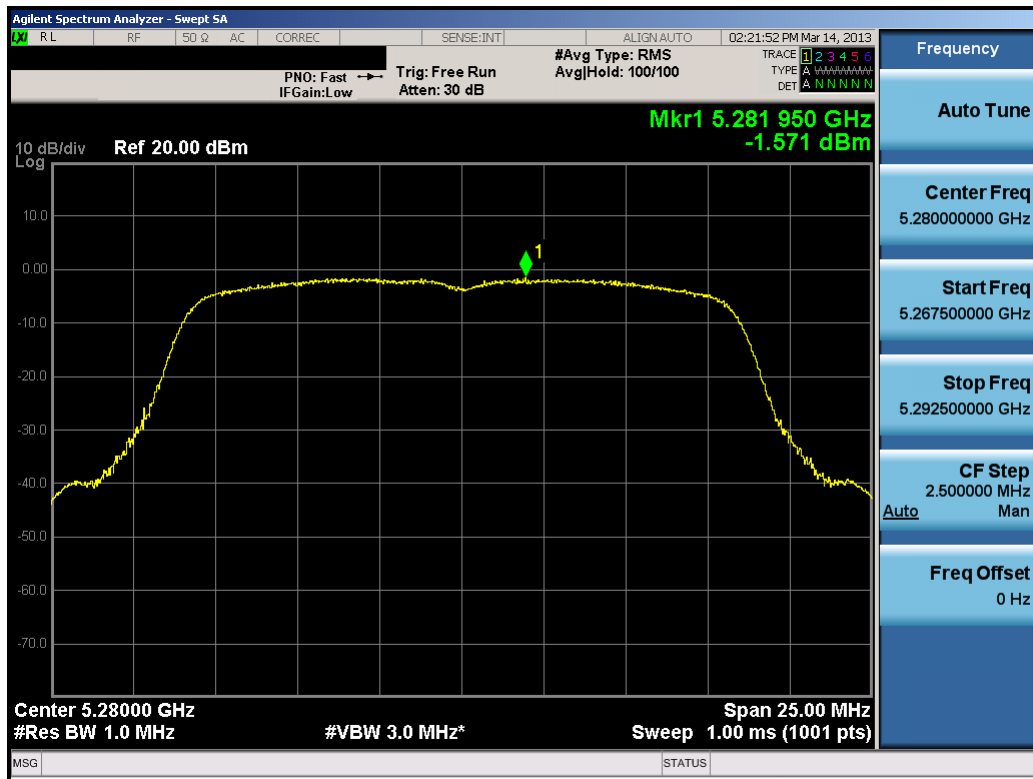


Plot 6-85. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 65 of 159

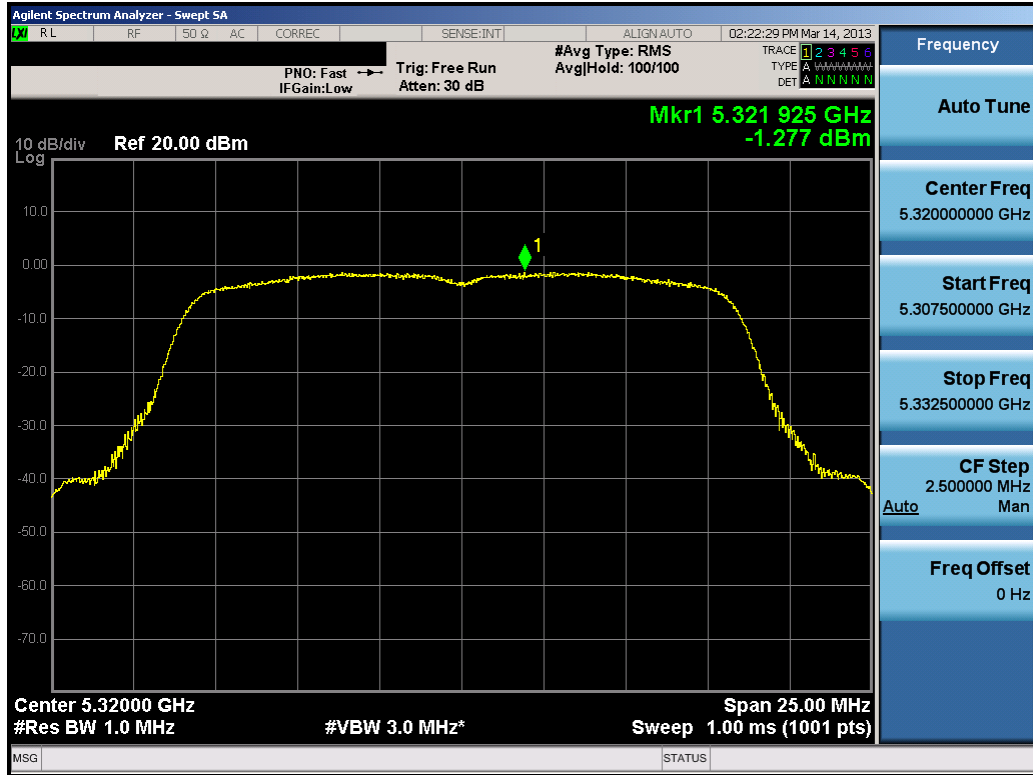


Plot 6-86. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

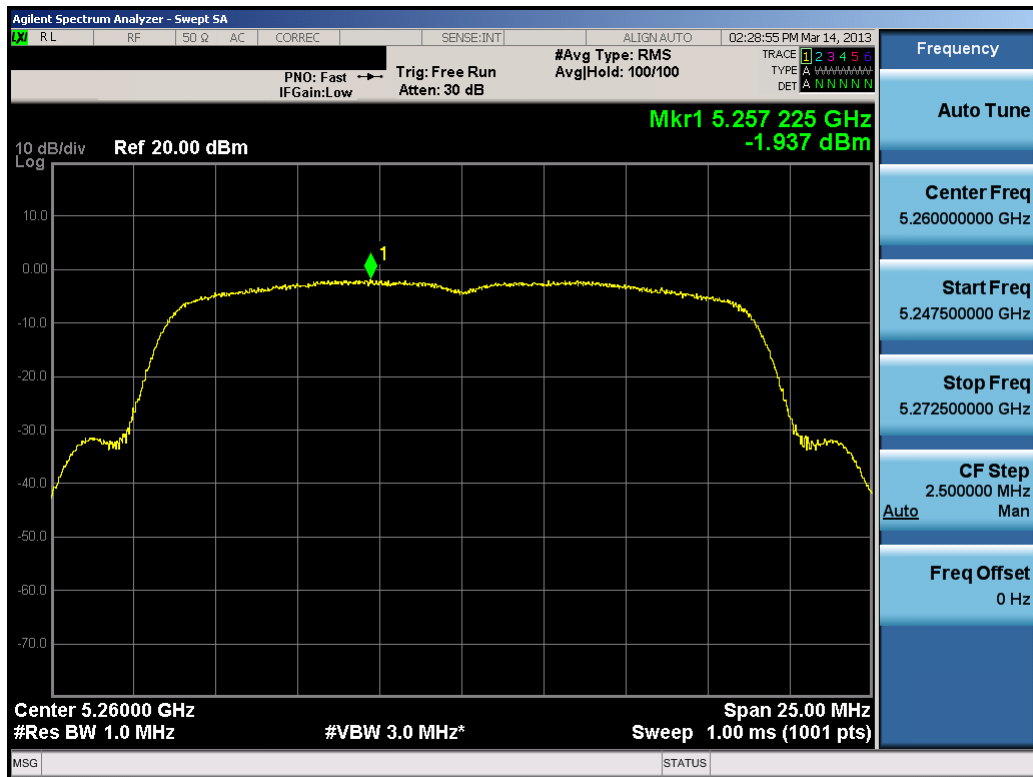


Plot 6-87. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

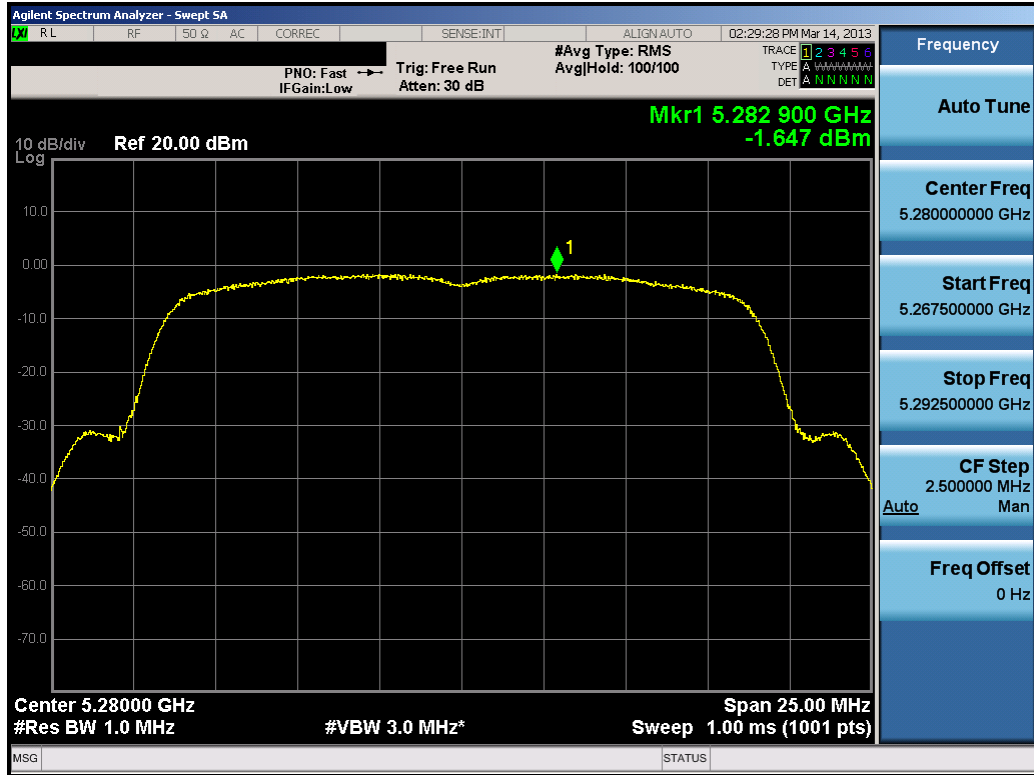

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 66 of 159

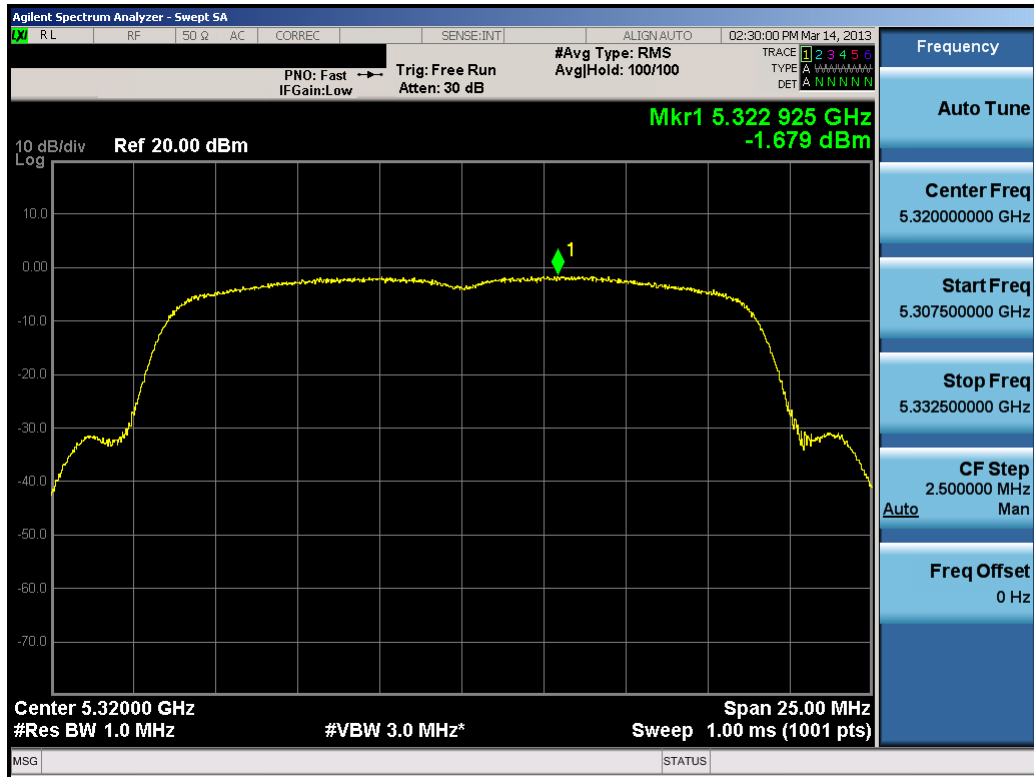


Plot 6-88. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)




Plot 6-89. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 67 of 159

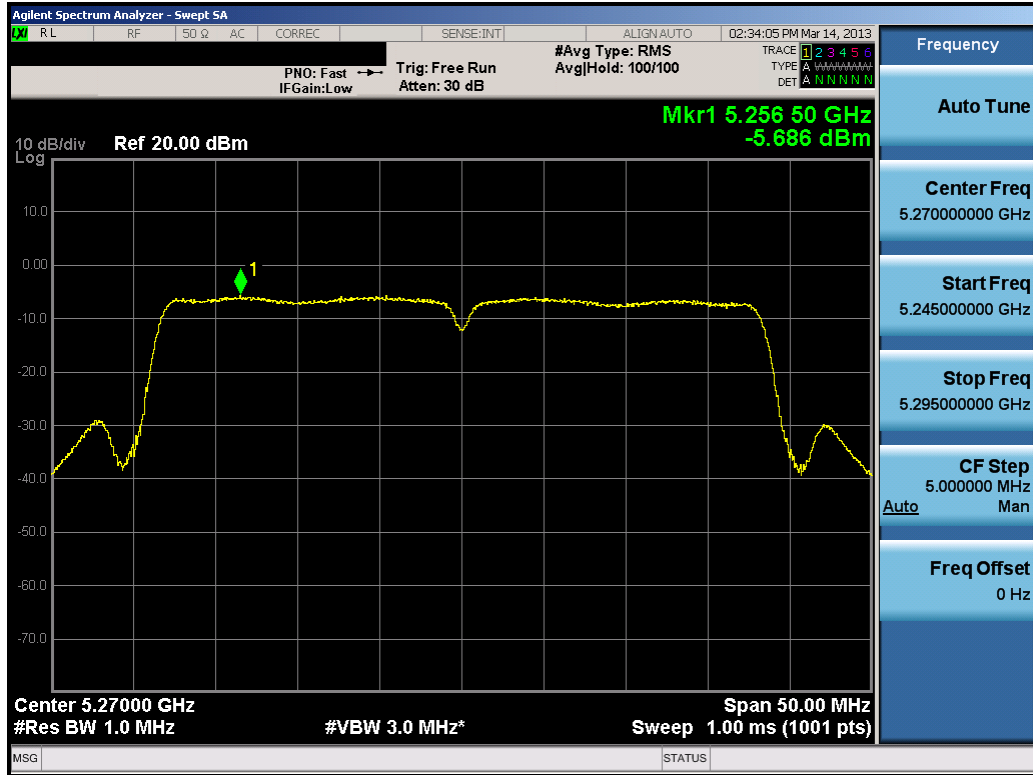


Plot 6-90. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

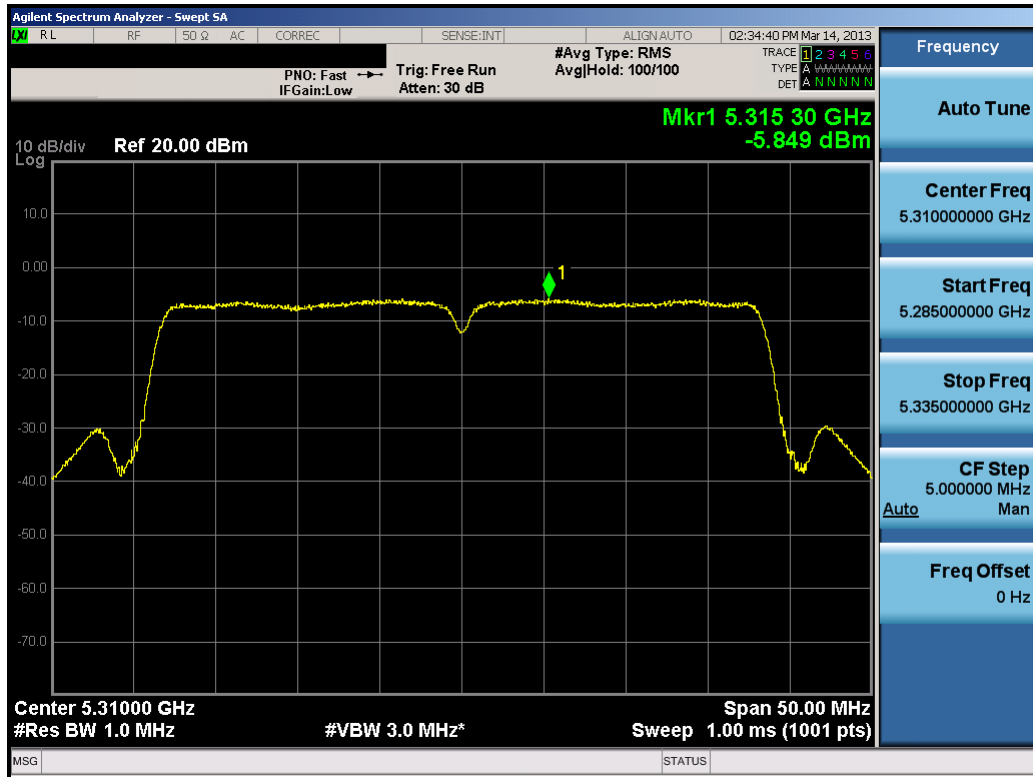


Plot 6-91. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 68 of 159

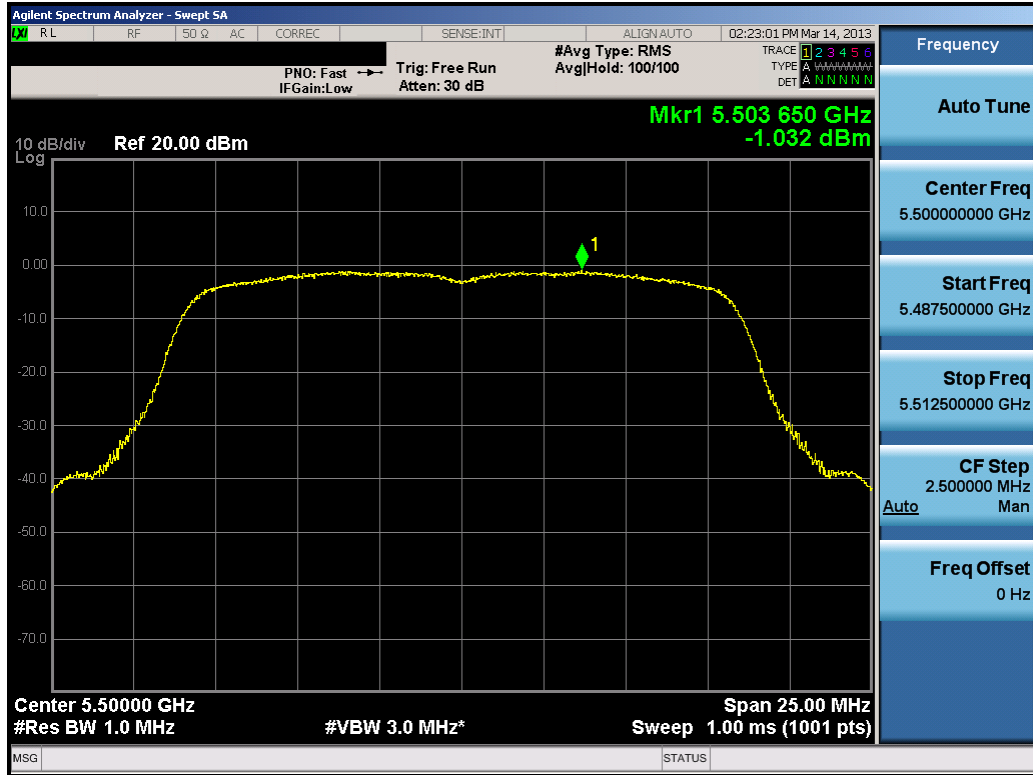


Plot 6-92. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

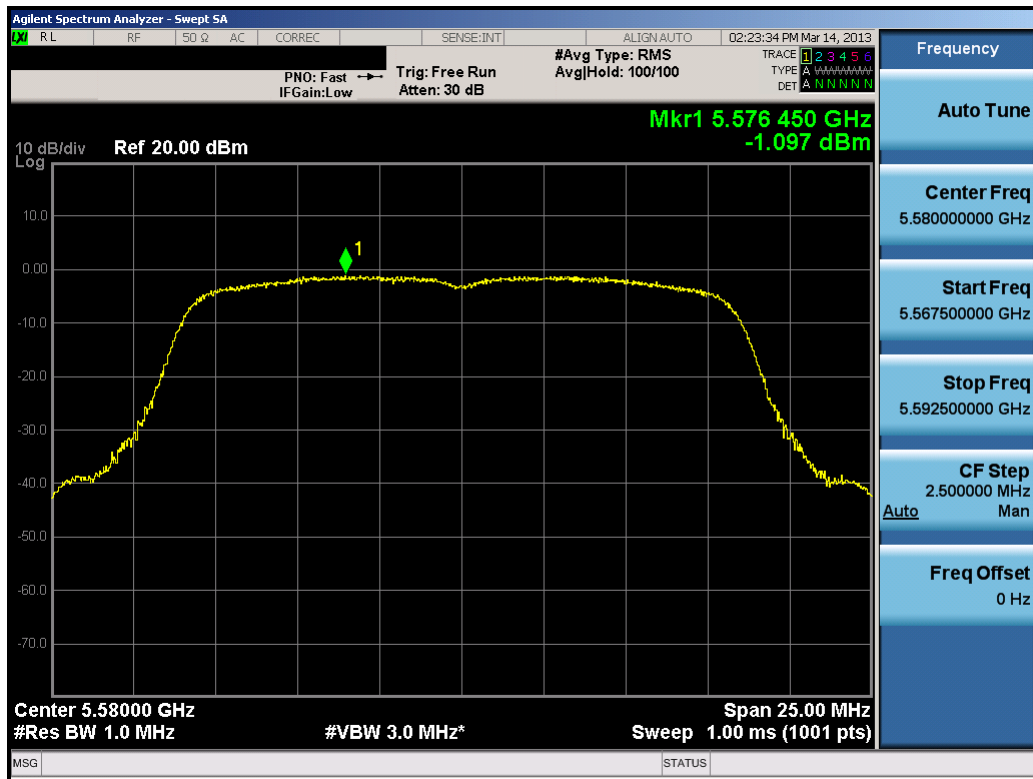


Plot 6-93. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 69 of 159

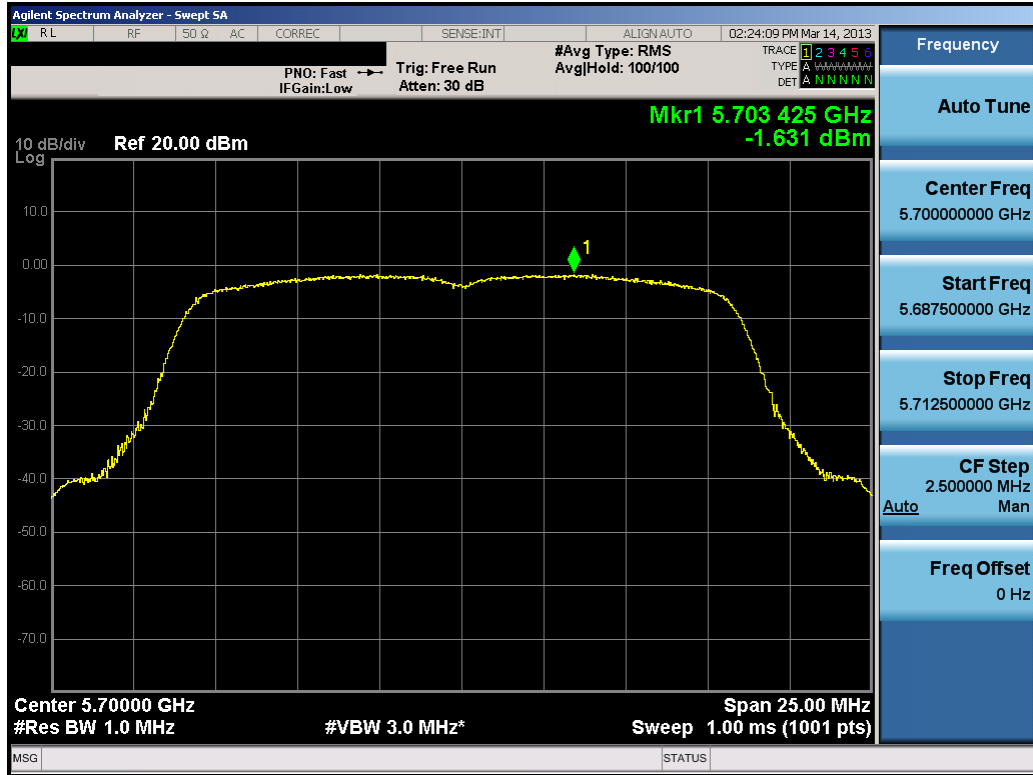


Plot 6-94. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)

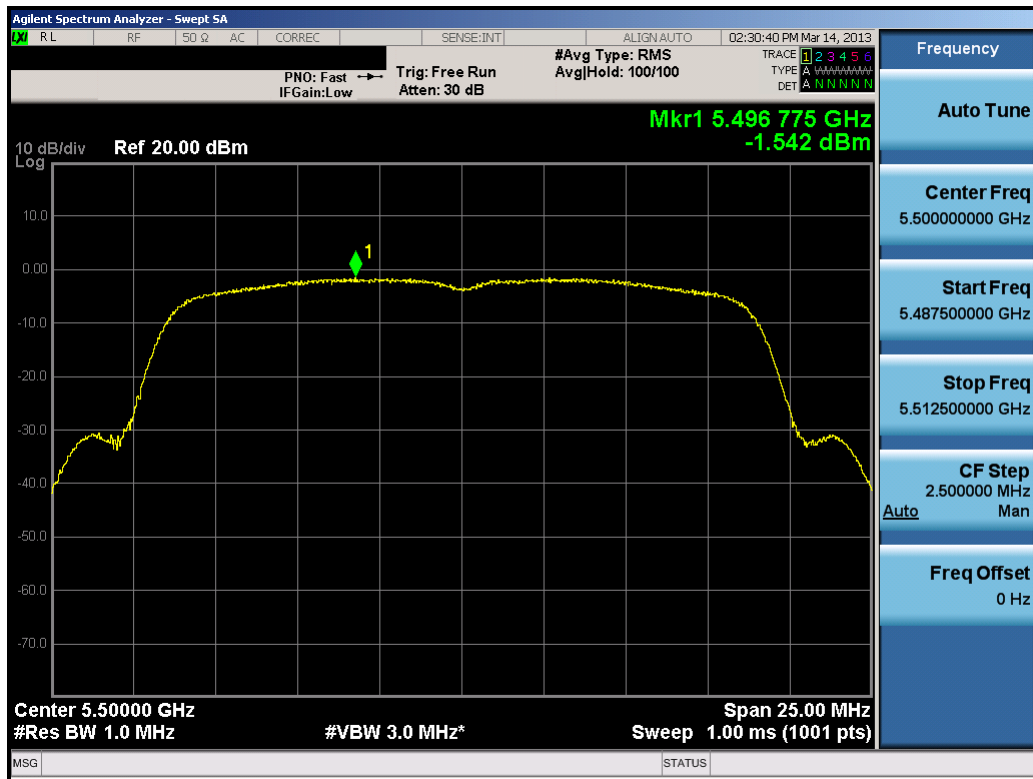


Plot 6-95. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 70 of 159

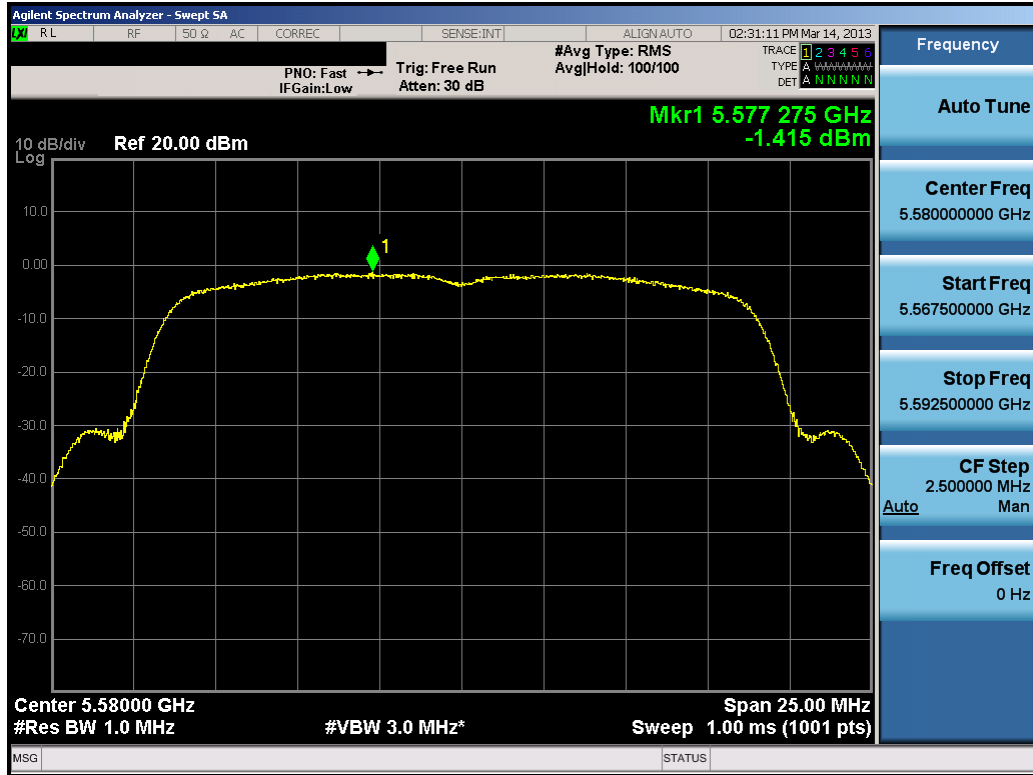


Plot 6-96. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

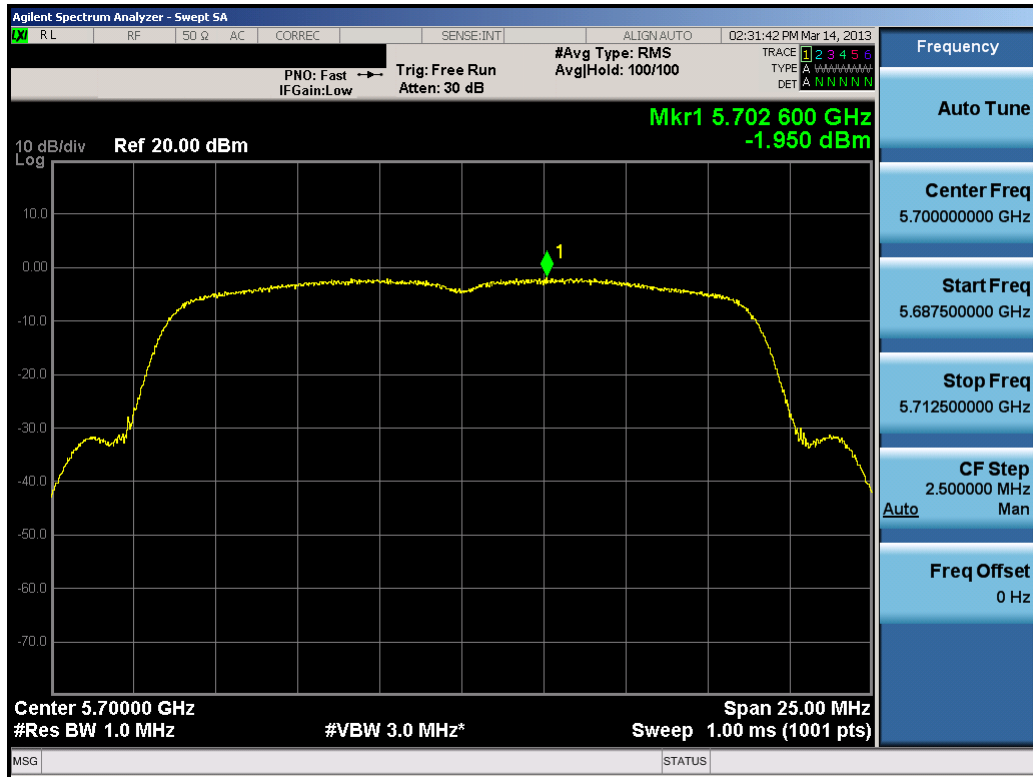


Plot 6-97. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 71 of 159

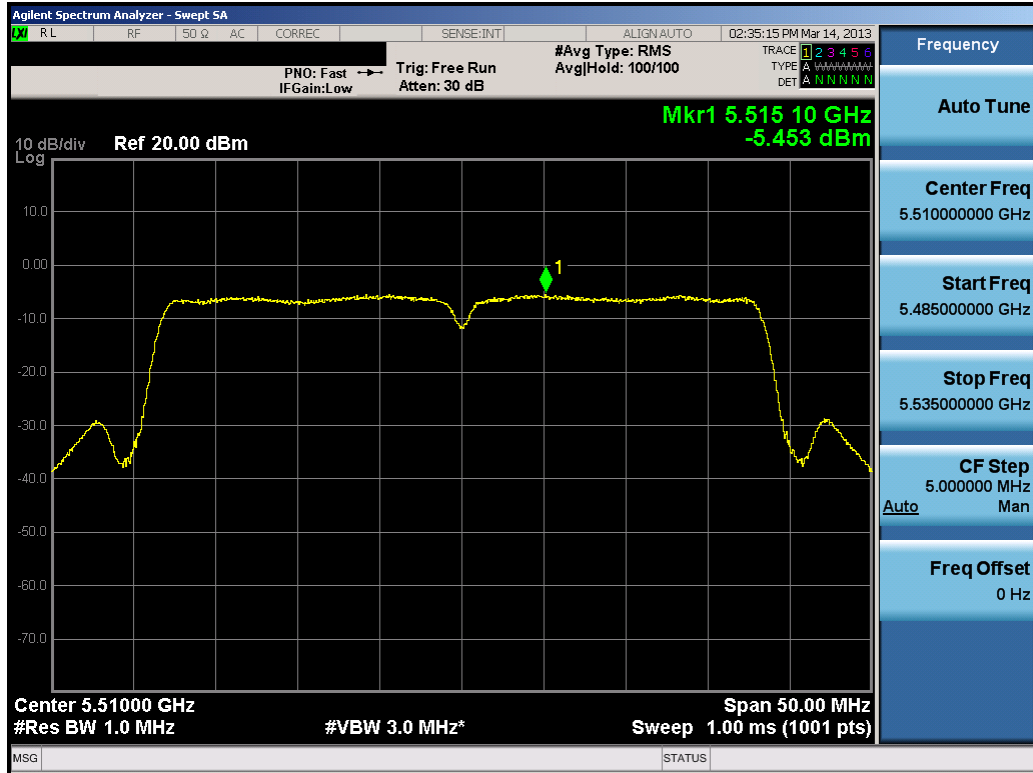


Plot 6-98. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

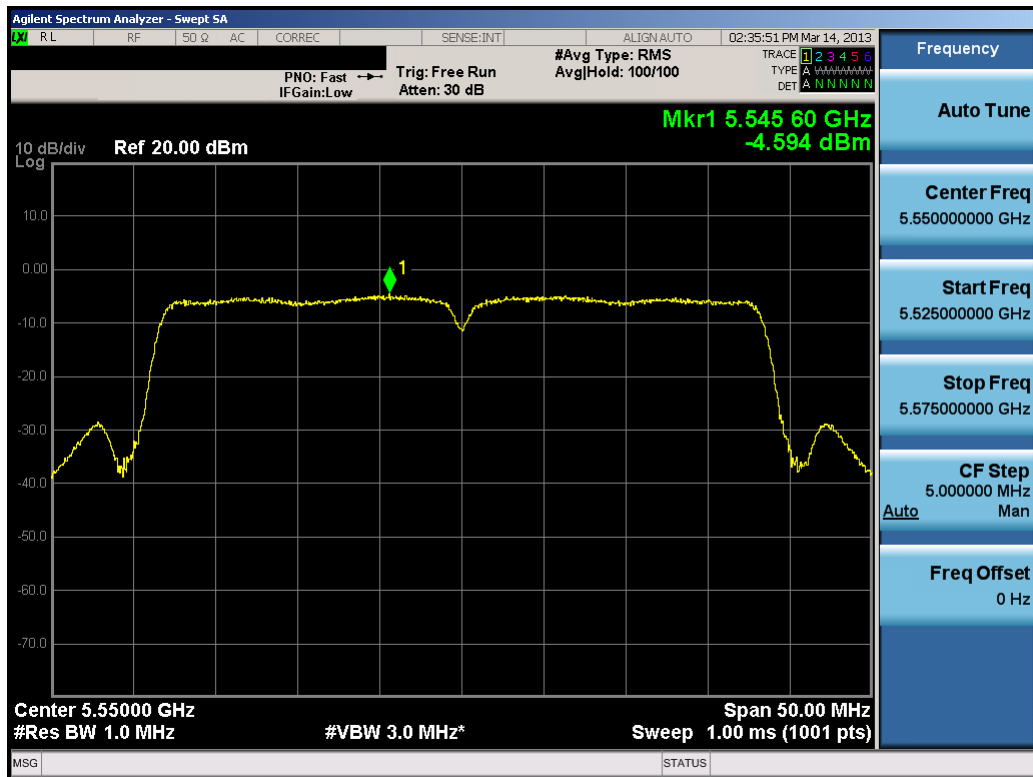

Plot 6-99. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 72 of 159

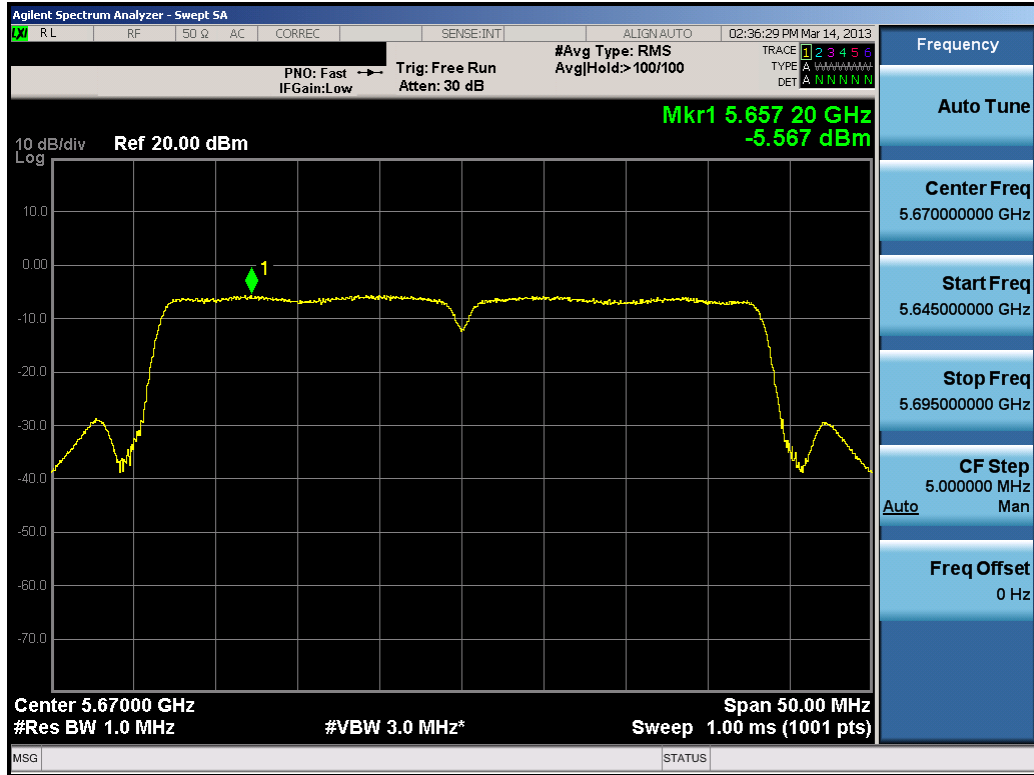



Plot 6-100. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 73 of 159

Summed MIMO Power Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT1 Power Density [dBm]	ANT2 Power Density (dBm)	Summed MIMO Pwr Density (dBm)	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	0.377	-0.260	-	4.0	N/A
	5200	40	a	6	0.639	-0.542	-	4.0	N/A
	5240	48	a	6	0.310	-0.420	-	4.0	N/A
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-1.256	-0.524	2.136	4.0	-1.86
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-1.271	-0.708	2.030	4.0	-1.97
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	-1.420	-0.558	2.043	4.0	-1.96
	5190	38	n (40MHz)	13.5/15 (MCS0)	-5.122	-4.567	-1.825	4.0	-5.83
	5230	46	n (40MHz)	13.5/15 (MCS0)	-5.016	-4.416	-1.695	4.0	-5.70
Band II	5260	52	a	6	0.261	-1.389	-	11.0	N/A
	5280	56	a	6	0.505	-1.571	-	11.0	N/A
	5320	64	a	6	0.198	-1.277	-	11.0	N/A
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-1.429	-1.937	1.335	11.0	-9.67
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-0.952	-1.647	1.725	11.0	-9.28
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-1.180	-1.679	1.588	11.0	-9.41
	5270	54	n (40MHz)	13.5/15 (MCS0)	-5.232	-5.686	-2.443	11.0	-13.44
	5310	62	n (40MHz)	13.5/15 (MCS0)	-5.519	-5.849	-2.671	11.0	-13.67
Band III	5500	100	a	6	-0.026	-1.032	-	11.0	N/A
	5580	116	a	6	0.004	-1.097	-	11.0	N/A
	5700	140	a	6	-0.466	-1.631	-	11.0	N/A
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-1.533	-1.542	1.473	11.0	-9.53
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-1.501	-1.415	1.553	11.0	-9.45
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	-1.830	-1.950	1.121	11.0	-9.88
	5510	102	n (40MHz)	13.5/15 (MCS0)	-4.369	-5.453	-1.867	11.0	-12.87
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.095	-4.594	-1.327	11.0	-12.33
	5670	134	n (40MHz)	13.5/15 (MCS0)	-4.213	-5.567	-1.827	11.0	-12.83

Table 6-14. MIMO Conducted Power Spectral Density Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 74 of 159	

6.5 Peak Excursion Ratio – 802.11a/n §15.407(a)(6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r02 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-4. Test Instrument & Measurement Setup


Test Notes

Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r02.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 75 of 159	


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5580	116	a	6	8.49	13.0	-4.51
5260	52	n (20MHz)	6.5/7.2 (MCS0)	8.38	13.0	-4.62
5310	62	n (40MHz)	13.5/15 (MCS0)	8.78	13.0	-4.22

Table 6-15. Antenna-1 Conducted Peak Excursion Ratio Measurements

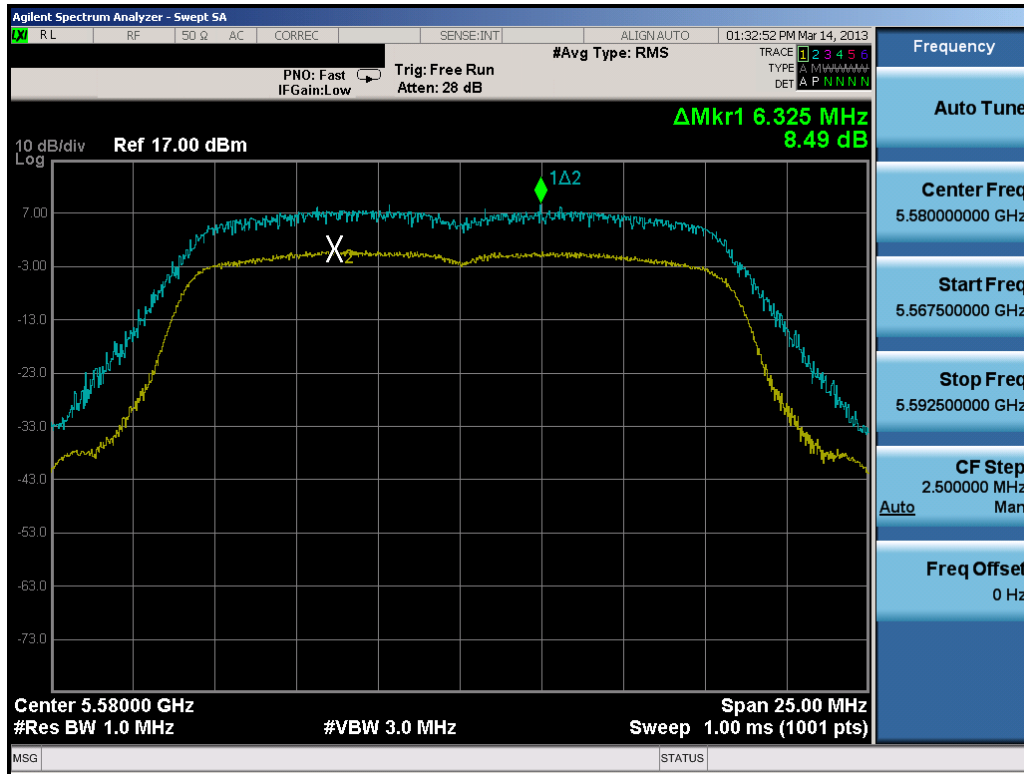


Plot 6-101. Peak Excursion Ratio Plot (802.11a)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 76 of 159

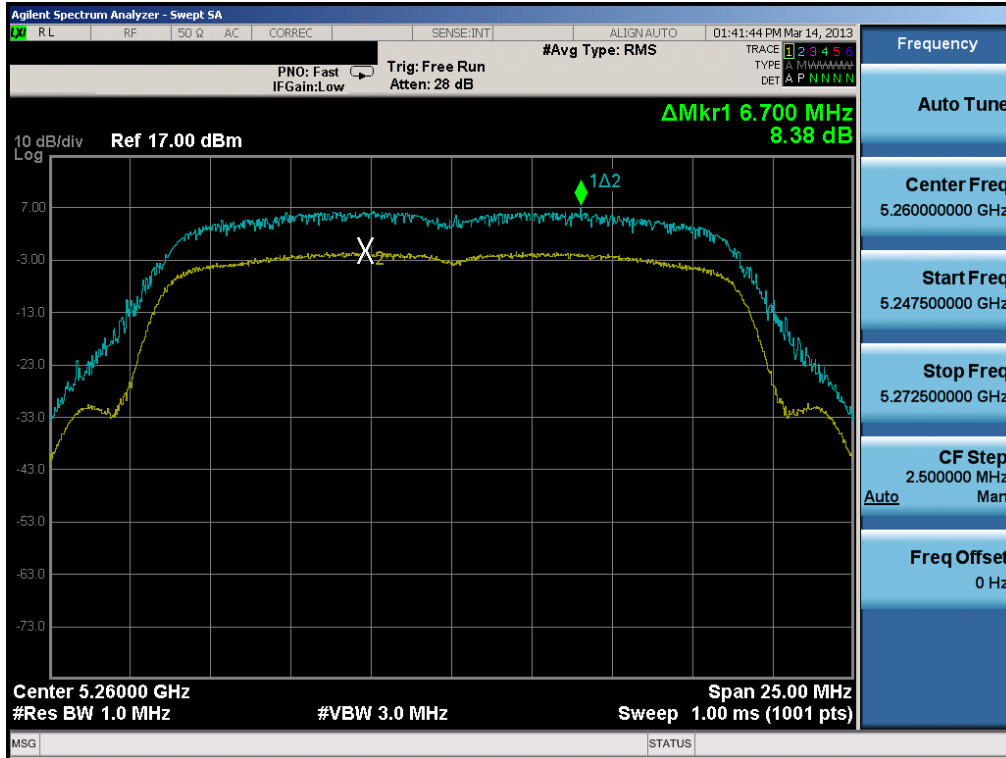

Plot 6-102. Peak Excursion Ratio Plot (20MHz BW 802.11n)

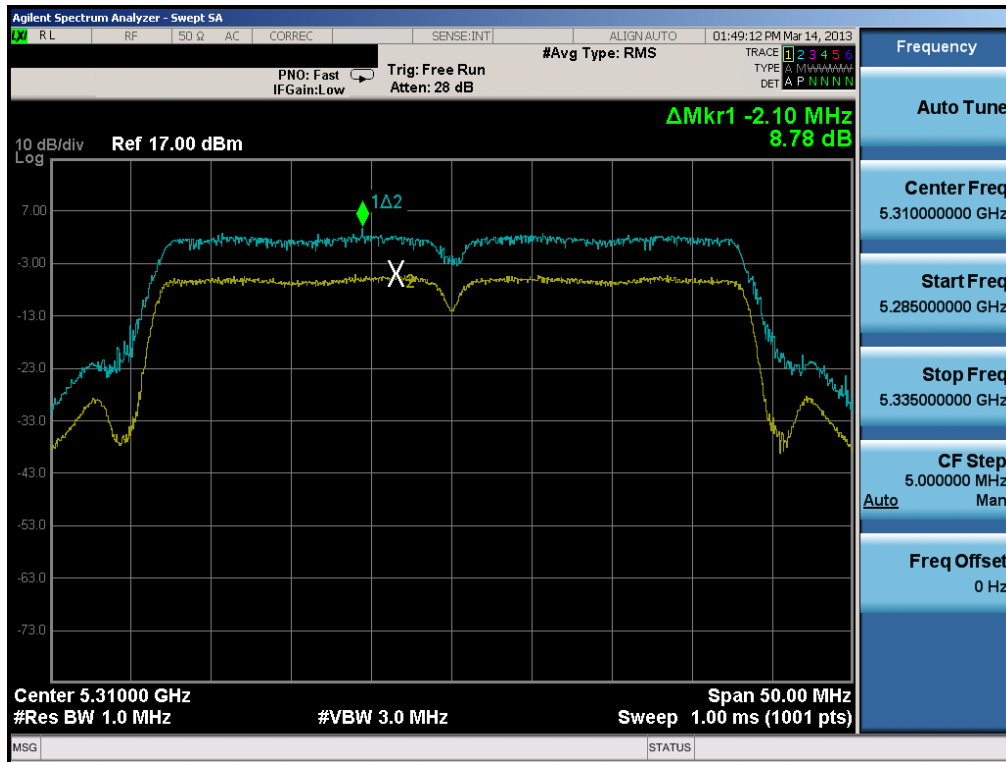


Plot 6-103. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 77 of 159


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5580	116	a	6	8.42	13.0	-4.58
5280	56	n (20MHz)	6.5/7.2 (MCS0)	8.79	13.0	-4.21
5270	54	n (40MHz)	13.5/15 (MCS0)	8.84	13.0	-4.16

Table 6-16. Antenna-2 Conducted Peak Excursion Ratio Measurements

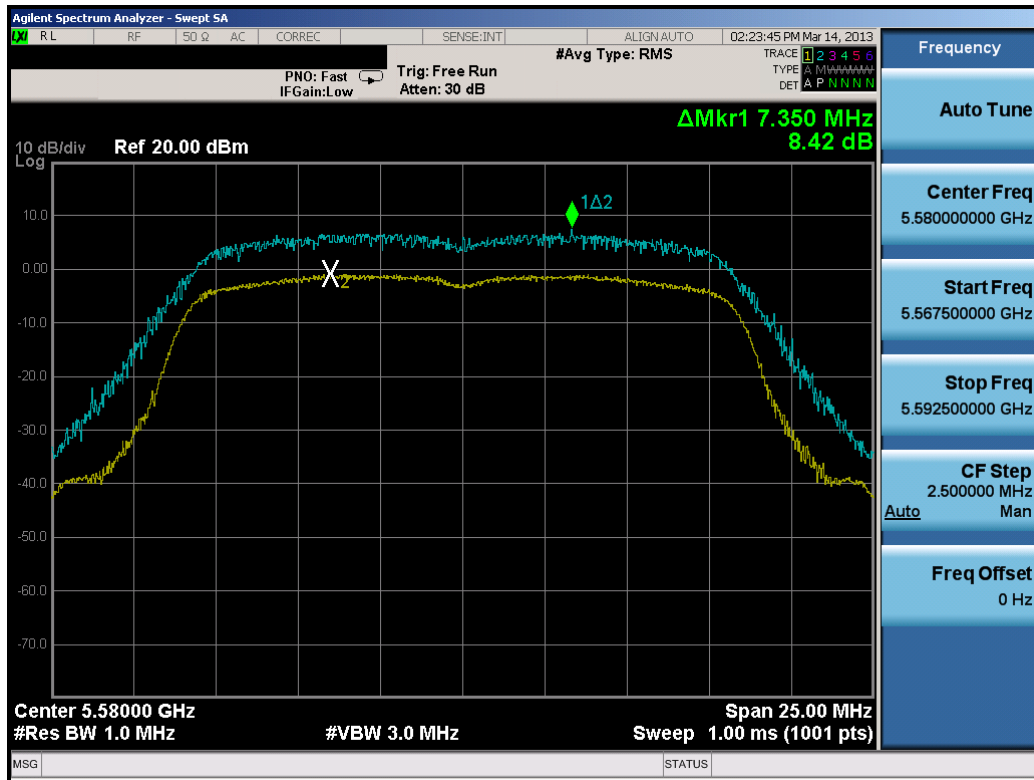


Plot 6-104. Peak Excursion Ratio Plot (802.11a)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 78 of 159

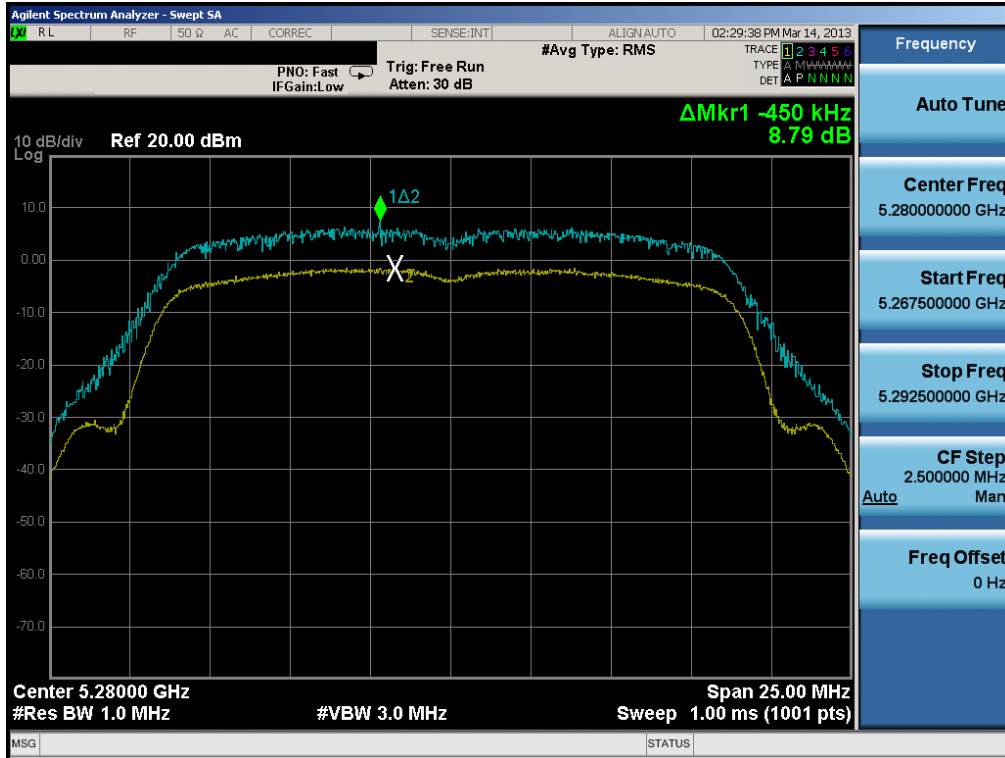

Plot 6-105. Peak Excursion Ratio Plot (20MHz BW 802.11n)

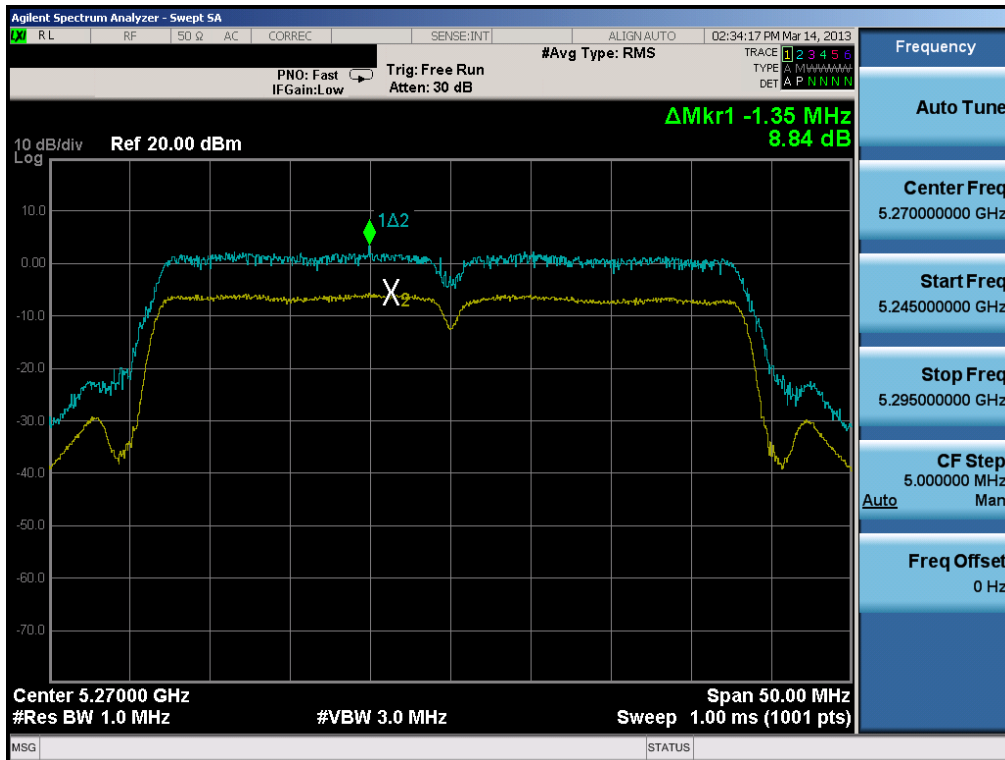

Plot 6-106. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 79 of 159

6.6 Frequency Stability: Antenna-1

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,180,000,028	28	0.00000054
100 %		- 30	5,179,999,970	-30	-0.00000058
100 %		- 20	5,179,999,982	-18	-0.00000035
100 %		- 10	5,179,999,968	-32	-0.00000062
100 %		0	5,179,999,979	-21	-0.00000041
100 %		+ 10	5,180,000,004	4	0.00000008
100 %		+ 20	5,180,000,021	21	0.00000041
100 %		+ 30	5,179,999,975	-25	-0.00000048
100 %		+ 40	5,180,000,006	6	0.00000012
100 %		+ 50	5,180,000,035	35	0.00000068
100 %		12.00	+ 20	5,180,000,003	3
BATT. ENDPOINT	12.00	+ 20	5,179,999,986	-14	-0.00000027

Table 6-17. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 80 of 159	

Frequency Stability: Antenna 1 (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,259,999,969	-31	-0.00000059
100 %		- 30	5,260,000,000	0	0.00000000
100 %		- 20	5,259,999,989	-11	-0.00000021
100 %		- 10	5,259,999,974	-26	-0.00000049
100 %		0	5,260,000,002	2	0.00000004
100 %		+ 10	5,260,000,006	6	0.00000011
100 %		+ 20	5,260,000,004	4	0.00000008
100 %		+ 30	5,259,999,987	-13	-0.00000025
100 %		+ 40	5,259,999,988	-12	-0.00000023
100 %		+ 50	5,259,999,983	-17	-0.00000032
100 %		12.00	+ 20	5,260,000,020	20
BATT. ENDPOINT	12.00	+ 20	5,259,999,984	-16	-0.00000030

Table 6-18. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 81 of 159	

Frequency Stability: Antenna-1 (Cont'd)
§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,499,999,976	-24	-0.00000044
100 %		- 30	5,500,000,024	24	0.00000044
100 %		- 20	5,500,000,008	8	0.00000015
100 %		- 10	5,499,999,989	-11	-0.00000020
100 %		0	5,499,999,996	-4	-0.00000007
100 %		+ 10	5,500,000,004	4	0.00000007
100 %		+ 20	5,499,999,969	-31	-0.00000056
100 %		+ 30	5,499,999,980	-20	-0.00000036
100 %		+ 40	5,499,999,967	-33	-0.00000060
100 %		+ 50	5,500,000,009	9	0.00000016
100 %		12.00	+ 20	5,499,999,978	-22
BATT. ENDPOINT	12.00	+ 20	5,500,000,003	3	0.00000005

Table 6-19. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 82 of 159	

6.7 Frequency Stability: Antenna-2

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,180,000,023	23	0.00000044
100 %		- 30	5,180,000,008	8	0.00000015
100 %		- 20	5,180,000,014	14	0.00000027
100 %		- 10	5,179,999,972	-28	-0.00000054
100 %		0	5,180,000,008	8	0.00000015
100 %		+ 10	5,179,999,974	-26	-0.00000050
100 %		+ 20	5,179,999,979	-21	-0.00000041
100 %		+ 30	5,179,999,998	-2	-0.00000004
100 %		+ 40	5,180,000,029	29	0.00000056
100 %		+ 50	5,179,999,988	-12	-0.00000023
100 %		12.00	+ 20	5,180,000,017	17
BATT. ENDPOINT	12.00	+ 20	5,179,999,974	-26	-0.00000050

Table 6-20. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 83 of 159	

Frequency Stability: Antenna 2 (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,259,999,979	-21	-0.00000040
100 %		- 30	5,259,999,988	-12	-0.00000023
100 %		- 20	5,260,000,016	16	0.00000030
100 %		- 10	5,260,000,026	26	0.00000049
100 %		0	5,260,000,002	2	0.00000004
100 %		+ 10	5,260,000,006	6	0.00000011
100 %		+ 20	5,260,000,001	1	0.00000002
100 %		+ 30	5,259,999,984	-16	-0.00000030
100 %		+ 40	5,259,999,965	-35	-0.00000067
100 %		+ 50	5,260,000,012	12	0.00000023
100 %		12.00	+ 20	5,260,000,002	2
BATT. ENDPOINT	12.00	+ 20	5,260,000,028	28	0.00000053

Table 6-21. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 84 of 159	

Frequency Stability: Antenna 2 (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100



REFERENCE VOLTAGE: 12 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.00	+ 20 (Ref)	5,499,999,988	-12	-0.00000022
100 %		- 30	5,500,000,004	4	0.00000007
100 %		- 20	5,499,999,986	-14	-0.00000025
100 %		- 10	5,499,999,989	-11	-0.00000020
100 %		0	5,499,999,972	-28	-0.00000051
100 %		+ 10	5,499,999,975	-25	-0.00000045
100 %		+ 20	5,500,000,021	21	0.00000038
100 %		+ 30	5,500,000,010	10	0.00000018
100 %		+ 40	5,499,999,986	-14	-0.00000025
100 %		+ 50	5,499,999,987	-13	-0.00000024
100 %		12.00	+ 20	5,500,000,032	32
BATT. ENDPOINT	12.00	+ 20	5,499,999,981	-19	-0.00000035

Table 6-22. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 85 of 159	

6.8 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW) and 802.11n (40MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. Worst case radiated spurious emissions were found to be in 802.11a mode. MIMO (802.11n) radiated spurious emissions were found to be less than or equal to 802.11a emissions and thus are not reported.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-23 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-23. Radiated Limits

Test Procedures Used

ANSI C63.10-2009



KDB 789033 v01r02 – Section G

KDB 662911

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto couple

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 86 of 159	

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

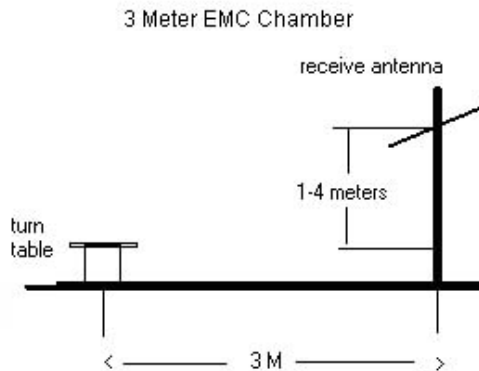




Figure 6-5. Test Instrument & Measurement Setup

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 87 of 159

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 789033 v01r02 were not used to evaluate this device.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

Sample Calculations



Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 88 of 159	

Antenna-1 Radiated Spurious Emission Measurements §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-103.71	Peak	H	47.20	50.49	68.20	-17.71
* 15540.00	-135.00	Average	H	59.10	31.10	53.98	-22.88
* 15540.00	-125.00	Peak	H	59.10	41.10	73.98	-32.88
* 20720.00	-135.00	Average	H	50.06	22.06	53.98	-31.92
* 20720.00	-125.00	Peak	H	50.06	32.06	73.98	-41.92
25900.00	-125.00	Peak	H	41.33	23.33	68.20	-44.87

Table 6-24. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-103.70	Peak	H	47.30	50.60	68.20	-17.60
* 15600.00	-135.00	Average	H	59.26	31.26	53.98	-22.72
* 15600.00	-125.00	Peak	H	59.26	41.26	73.98	-32.72
* 20800.00	-135.00	Average	H	49.91	21.91	53.98	-32.07
* 20800.00	-125.00	Peak	H	49.91	31.91	73.98	-42.07
26000.00	-125.00	Peak	H	41.17	23.17	68.20	-45.03

Table 6-25. Radiated Measurements

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10480.00	-104.07	Peak	H	47.50	50.43	68.20	-17.77
* 15720.00	-135.00	Average	H	59.56	31.56	53.98	-22.41
* 15720.00	-125.00	Peak	H	59.56	41.56	73.98	-32.41
* 20960.00	-135.00	Average	H	49.61	21.61	53.98	-32.37
20960.00	-125.00	Peak	H	49.61	31.61	73.98	-42.37
26200.00	-125.00	Peak	H	40.87	22.87	68.20	-45.33

Table 6-26. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-103.56	Peak	H	45.91	49.35	68.20	-18.85
* 15780.00	-135.00	Average	H	53.53	25.53	53.98	-28.45
* 15780.00	-125.00	Peak	H	53.53	35.53	73.98	-38.45
* 21040.00	-135.00	Average	H	50.46	22.46	53.98	-31.52
* 21040.00	-125.00	Peak	H	50.46	32.46	73.98	-41.52
26300.00	-125.00	Peak	H	46.79	28.79	68.20	-39.41

Table 6-27. Radiated Measurements

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10560.00	-104.35	Peak	H	46.01	48.66	68.20	-19.54
* 15840.00	-135.00	Average	H	53.79	25.79	53.98	-28.19
* 15840.00	-125.00	Peak	H	53.79	35.79	73.98	-38.19
* 21120.00	-135.00	Average	H	50.39	22.39	53.98	-31.59
* 21120.00	-125.00	Peak	H	50.39	32.39	73.98	-41.59
26400.00	-125.00	Peak	H	46.73	28.73	68.20	-39.47

Table 6-28. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	-115.83	Average	H	46.22	37.38	53.98	-16.60
* 10640.00	-103.98	Peak	H	46.22	49.23	73.98	-24.75
* 15960.00	-135.00	Average	H	55.98	27.98	53.98	-26.00
* 15960.00	-125.00	Peak	H	55.98	37.98	73.98	-36.00
* 21280.00	-135.00	Average	H	50.27	22.27	53.98	-31.71
* 21280.00	-125.00	Peak	H	50.27	32.27	73.98	-41.71
26600.00	-125.00	Peak	H	46.60	28.60	68.20	-39.60

Table 6-29. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 91 of 159

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-114.94	Average	H	48.02	40.08	53.98	-13.90
* 11000.00	-103.85	Peak	H	48.02	51.17	73.98	-22.81
16500.00	-125.00	Peak	H	60.56	42.56	68.20	-25.64
22000.00	-125.00	Peak	H	47.71	29.71	68.20	-38.49
27500.00	-125.00	Peak	H	38.98	20.98	68.20	-47.22

Table 6-30. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-114.94	Average	H	50.52	42.58	53.98	-11.40
* 11160.00	-103.83	Peak	H	50.52	53.69	73.98	-20.29
16740.00	-125.00	Peak	H	59.50	41.50	68.20	-26.70
* 22320.00	-135.00	Average	H	47.15	19.15	53.98	-34.83
* 22320.00	-125.00	Peak	H	47.15	29.15	73.98	-44.83
27900.00	-125.00	Peak	H	38.41	20.41	68.20	-47.79

Table 6-31. Radiated Measurements



FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 92 of 159

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-115.44	Average	H	48.78	40.34	53.98	-13.64
* 11400.00	-104.20	Peak	H	48.78	51.58	73.98	-22.40
17100.00	-125.00	Peak	H	57.51	39.51	68.20	-28.69
* 22800.00	-135.00	Average	H	46.32	18.32	53.98	-35.66
* 22800.00	-125.00	Peak	H	46.32	28.32	73.98	-45.66
28500.00	-125.00	Peak	H	37.58	19.58	68.20	-48.62

Table 6-32. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 93 of 159

Antenna-2 Radiated Spurious Emission Measurements §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-89.33	Peak	H	45.55	63.22	68.20	-4.98
* 15540.00	-135.00	Average	H	52.74	24.74	53.98	-29.24
* 15540.00	-125.00	Peak	H	52.74	34.74	73.98	-39.24
* 20720.00	-135.00	Average	H	50.71	22.71	53.98	-31.27
* 20720.00	-125.00	Peak	H	50.71	32.71	73.98	-41.27
25900.00	-125.00	Peak	H	47.04	29.04	68.20	-39.16

Table 6-33. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-88.51	Peak	H	45.64	64.13	68.20	-4.07
* 15600.00	-135.00	Average	H	52.93	24.93	53.98	-29.05
* 15600.00	-125.00	Peak	H	52.93	34.93	73.98	-39.05
* 20800.00	-135.00	Average	H	50.64	22.64	53.98	-31.33
* 20800.00	-125.00	Peak	H	50.64	32.64	73.98	-41.33
26000.00	-125.00	Peak	H	46.98	28.98	68.20	-39.22

Table 6-34. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 94 of 159

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10480.00	-89.14	Peak	H	45.81	63.68	68.20	-4.52
* 15720.00	-135.00	Average	H	53.30	25.30	53.98	-28.68
* 15720.00	-125.00	Peak	H	53.30	35.30	73.98	-38.68
* 20960.00	-135.00	Average	H	50.52	22.52	53.98	-31.46
20960.00	-125.00	Peak	H	50.52	32.52	73.98	-41.46
26200.00	-125.00	Peak	H	46.85	28.85	68.20	-39.35

Table 6-35. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-88.52	Peak	H	45.91	64.39	68.20	-3.81
* 15780.00	-135.00	Average	H	53.53	25.53	53.98	-28.45
* 15780.00	-125.00	Peak	H	53.53	35.53	73.98	-38.45
* 21040.00	-135.00	Average	H	50.46	22.46	53.98	-31.52
* 21040.00	-125.00	Peak	H	50.46	32.46	73.98	-41.52
26300.00	-125.00	Peak	H	46.79	28.79	68.20	-39.41

Table 6-36. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 95 of 159

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-89.23	Peak	H	46.01	63.78	68.20	-4.42
* 15840.00	-135.00	Average	H	53.79	25.79	53.98	-28.19
* 15840.00	-125.00	Peak	H	53.79	35.79	73.98	-38.19
* 21120.00	-135.00	Average	H	50.39	22.39	53.98	-31.59
* 21120.00	-125.00	Peak	H	50.39	32.39	73.98	-41.59
26400.00	-125.00	Peak	H	46.73	28.73	68.20	-39.47

Table 6-37. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-103.06	Average	H	46.22	50.15	53.98	-3.83
* 10640.00	-88.57	Peak	H	46.22	64.64	73.98	-9.34
* 15960.00	-135.00	Average	H	55.98	27.98	53.98	-26.00
* 15960.00	-125.00	Peak	H	55.98	37.98	73.98	-36.00
* 21280.00	-135.00	Average	H	50.27	22.27	53.98	-31.71
* 21280.00	-125.00	Peak	H	50.27	32.27	73.98	-41.71
26600.00	-125.00	Peak	H	46.60	28.60	68.20	-39.60

Table 6-38. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 96 of 159

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-102.60	Average	H	46.72	51.12	53.98	-2.86
* 11000.00	-90.35	Peak	H	46.72	63.37	73.98	-10.61
16500.00	-125.00	Peak	H	54.95	36.95	68.20	-31.25
22000.00	-125.00	Peak	H	49.72	31.72	68.20	-36.48
27500.00	-125.00	Peak	H	46.06	28.06	68.20	-40.14

Table 6-39. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-104.67	Average	H	49.14	51.48	53.98	-2.50
* 11160.00	-90.03	Peak	H	49.14	66.12	73.98	-7.86
16740.00	-125.00	Peak	H	54.31	36.31	68.20	-31.89
* 22320.00	-135.00	Average	H	49.49	21.49	53.98	-32.49
* 22320.00	-125.00	Peak	H	49.49	31.49	73.98	-42.49
27900.00	-125.00	Peak	H	45.82	27.82	68.20	-40.38



Table 6-40. Radiated Measurements

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140


Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11400.00	-102.30	Average	H	47.30	52.00	53.98	-1.98
* 11400.00	-88.96	Peak	H	47.30	65.34	73.98	-8.64
17100.00	-125.00	Peak	H	53.08	35.08	68.20	-33.12
* 22800.00	-135.00	Average	H	49.14	21.14	53.98	-32.84
* 22800.00	-125.00	Peak	H	49.14	31.14	73.98	-42.84
28500.00	-125.00	Peak	H	45.47	27.47	68.20	-40.73

Table 6-41. Radiated Measurements

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 98 of 159

6.9 Antenna-1 Radiated Band Edge Measurements (20MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

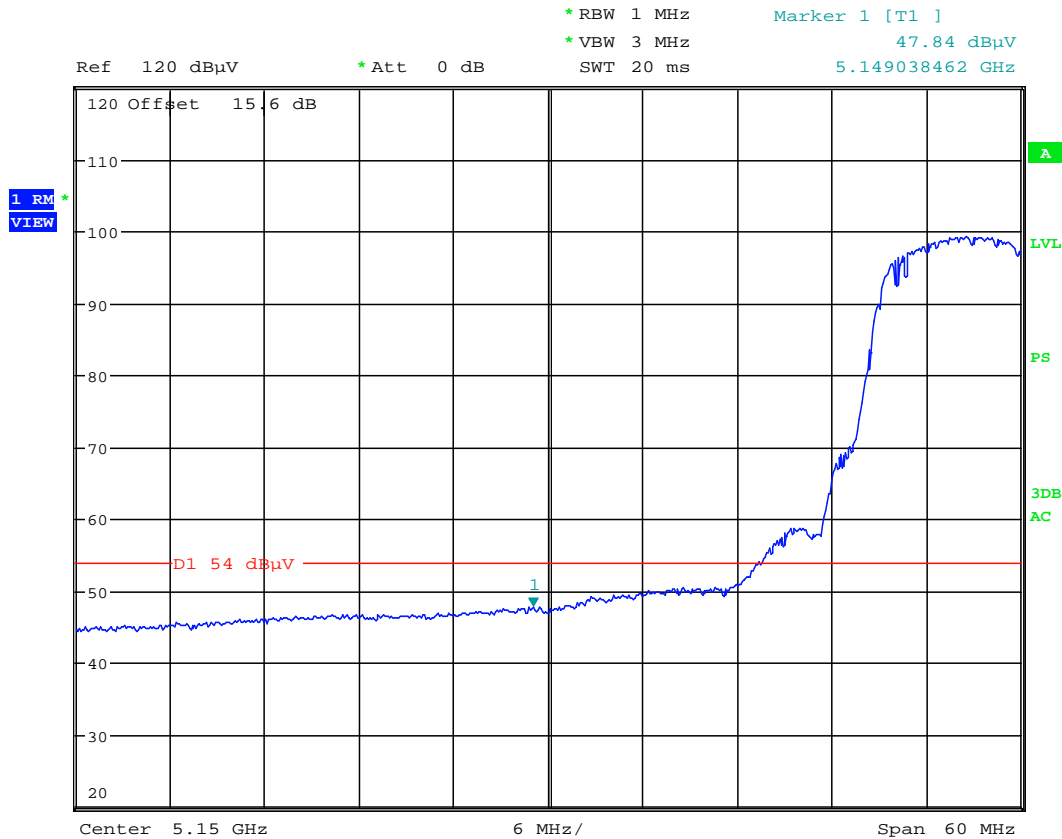


Date: 12.MAR.2013 18:14:42

Plot 6-107. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 99 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

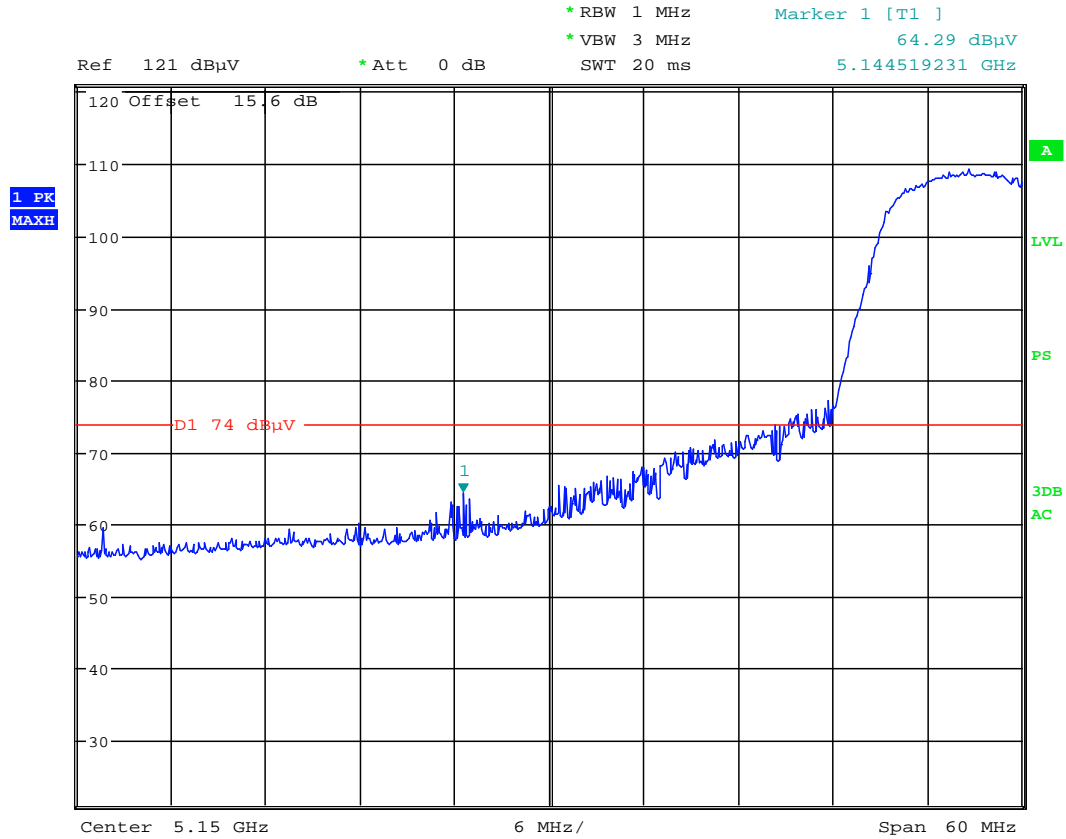


Date: 12.MAR.2013 18:16:35

Plot 6-108. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 100 of 159	

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

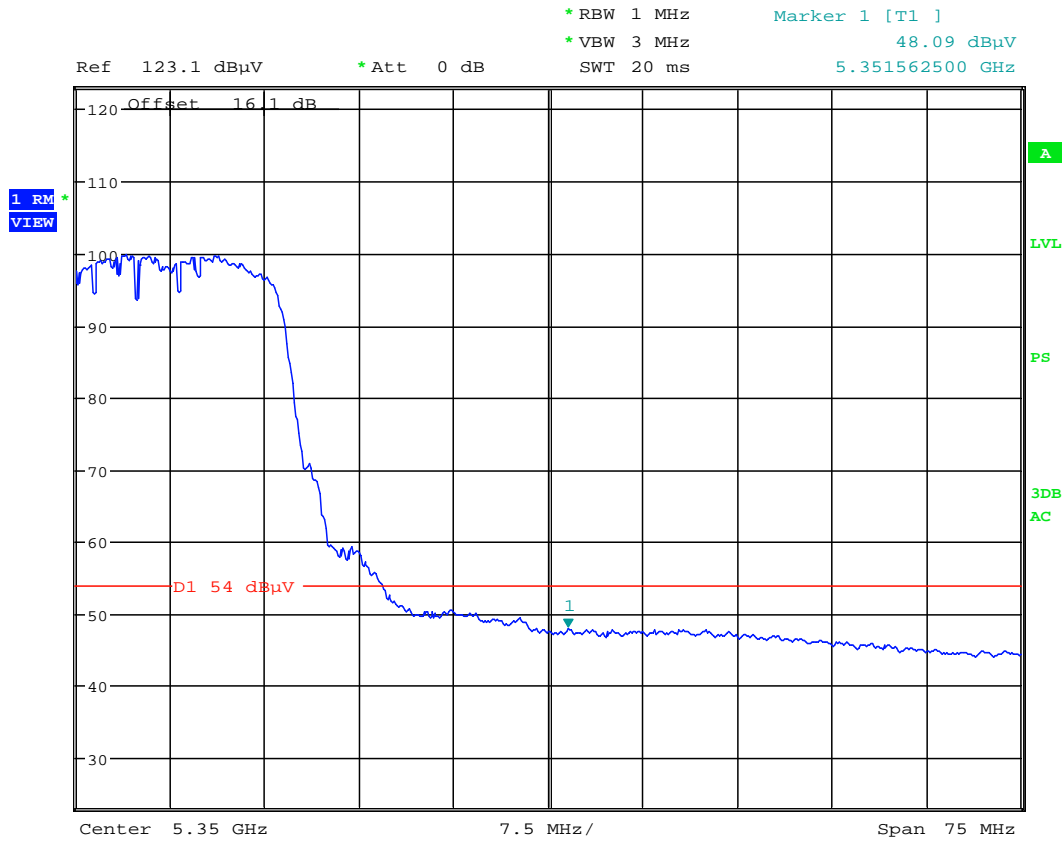


Date: 12.MAR.2013 20:16:08

Plot 6-109. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 101 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

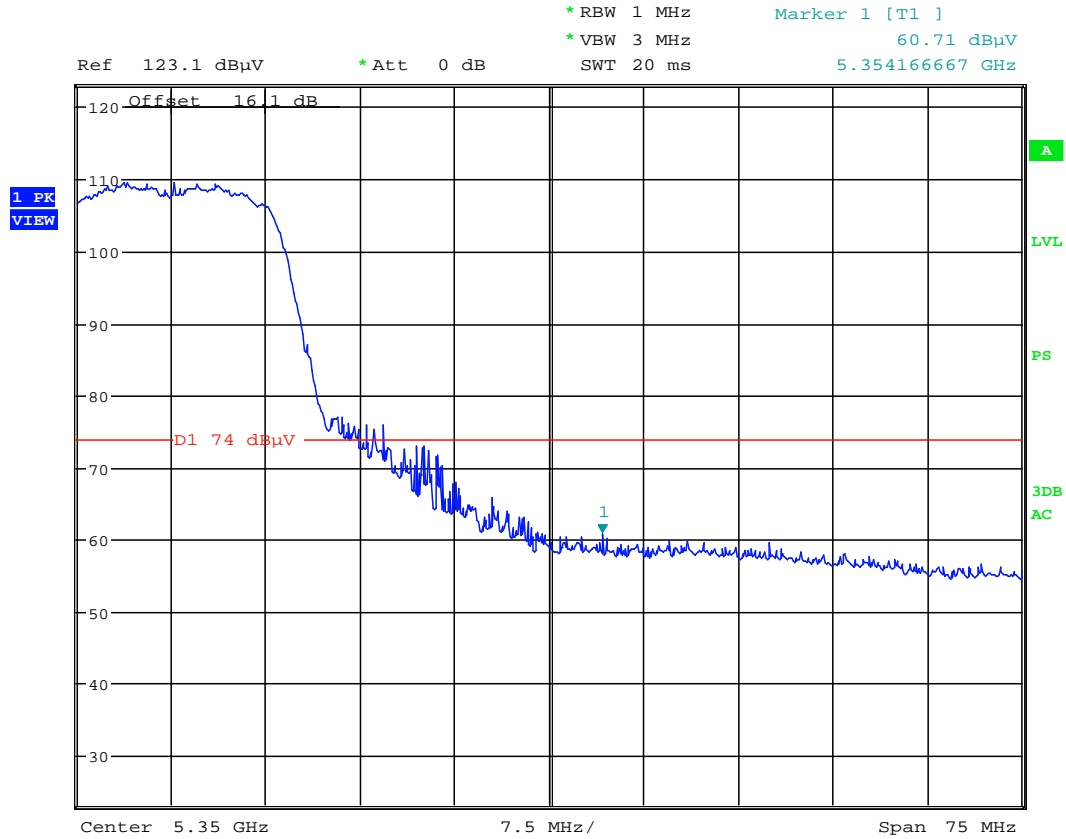


Date: 12.MAR.2013 20:15:23

Plot 6-110. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 102 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

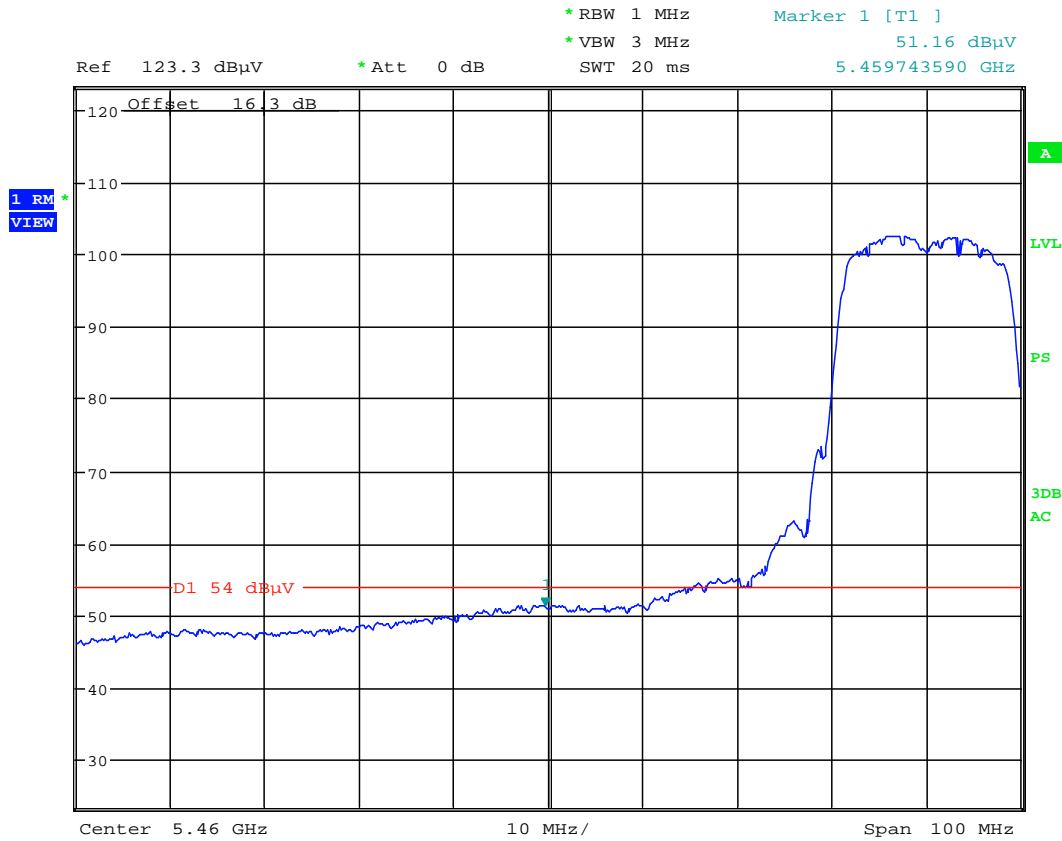


Date: 12.MAR.2013 21:13:22

Plot 6-111. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 103 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

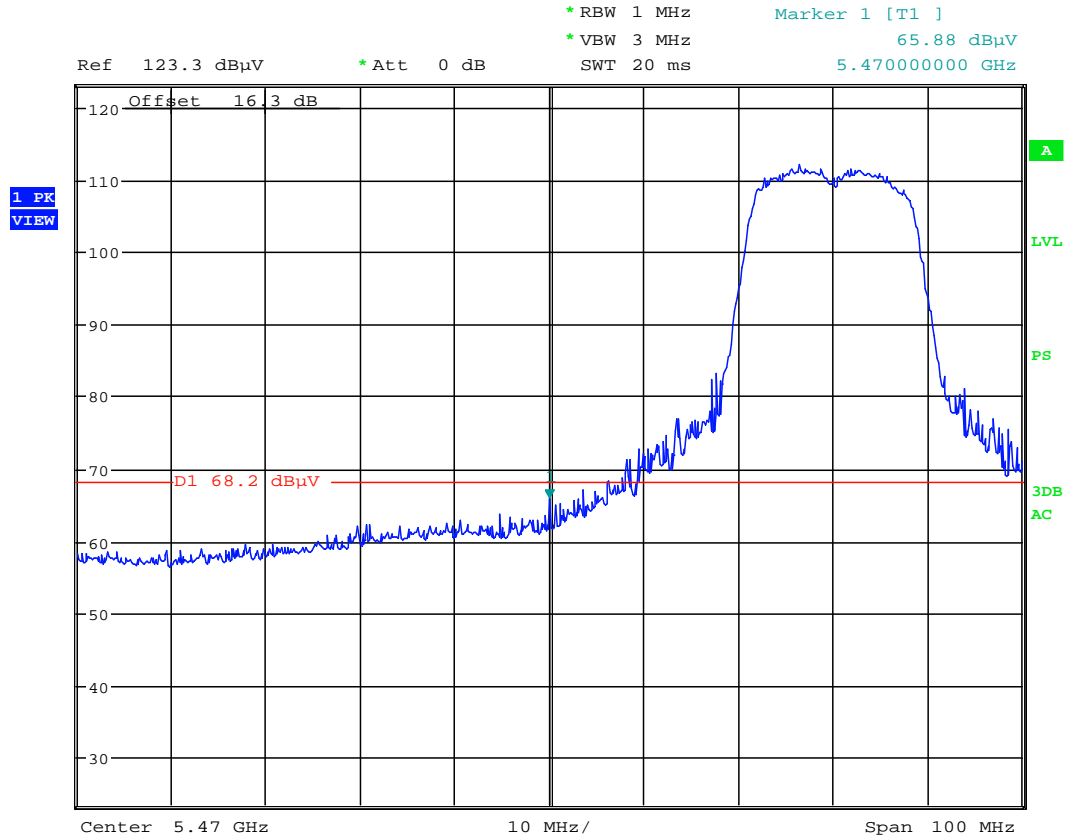


Date: 12.MAR.2013 21:14:20

Plot 6-112. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 104 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

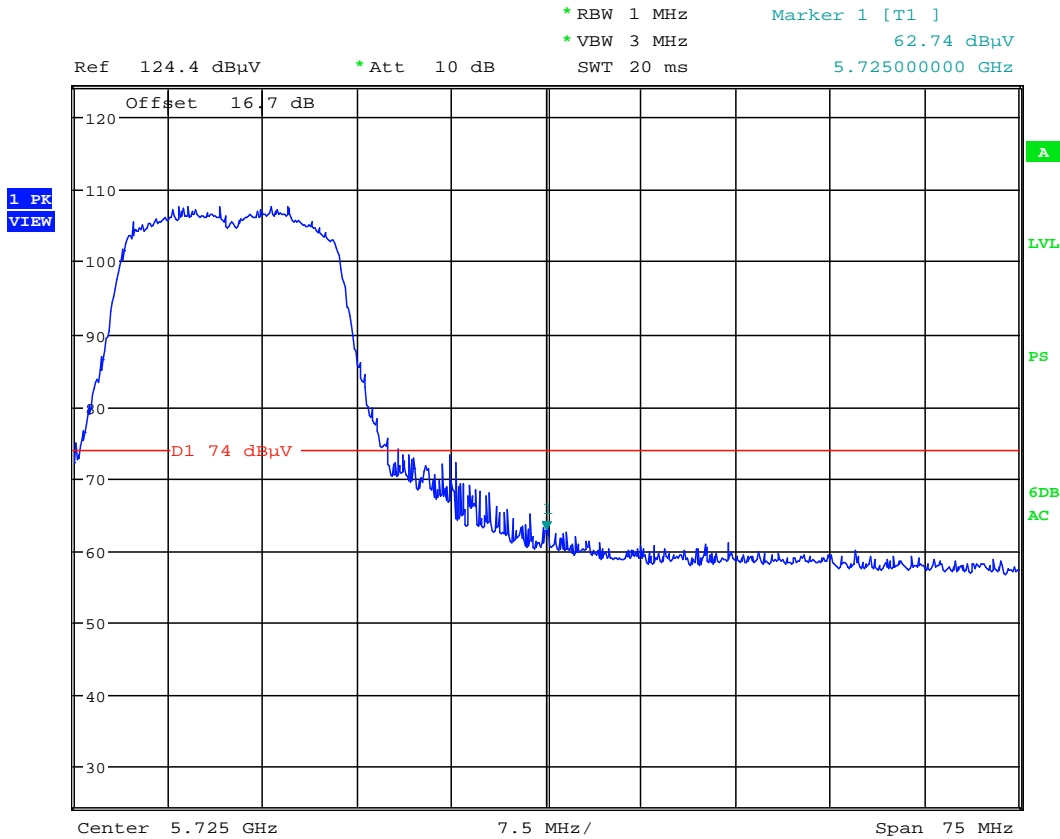


Date: 13.MAR.2013 14:52:22

Plot 6-113. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 105 of 159

6.10 Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

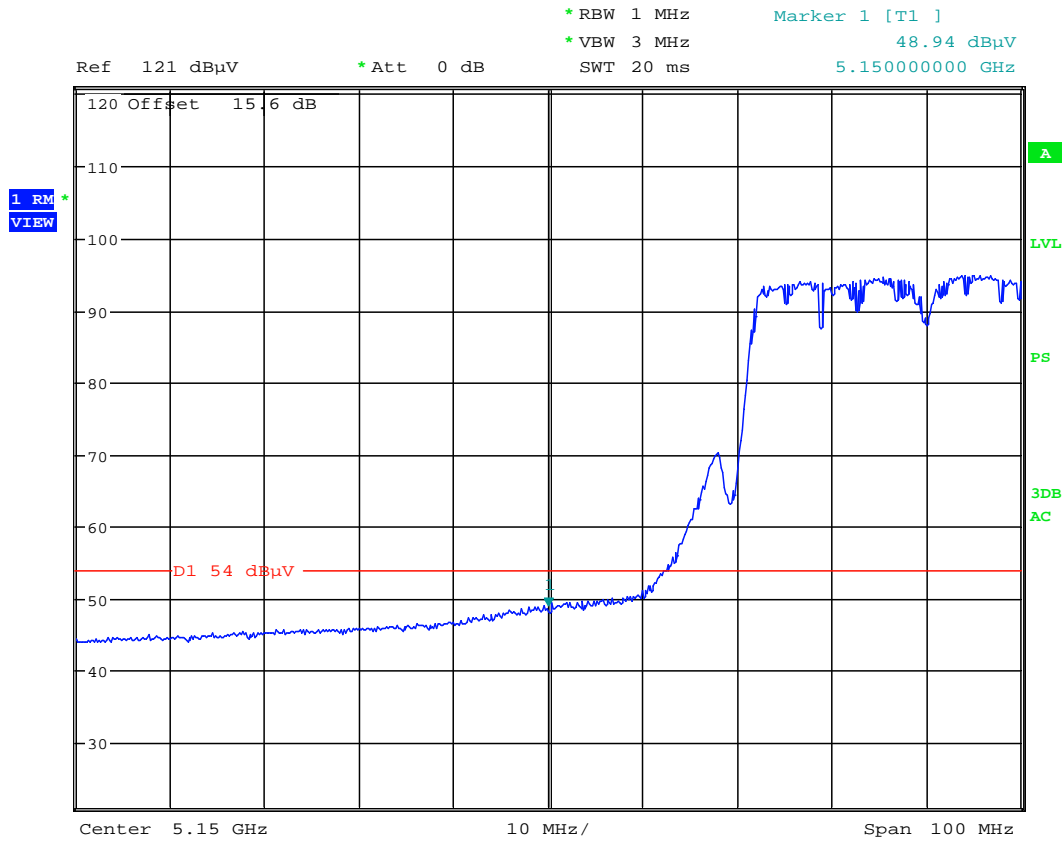


Date: 12.MAR.2013 19:43:08

Plot 6-114. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 106 of 159

Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

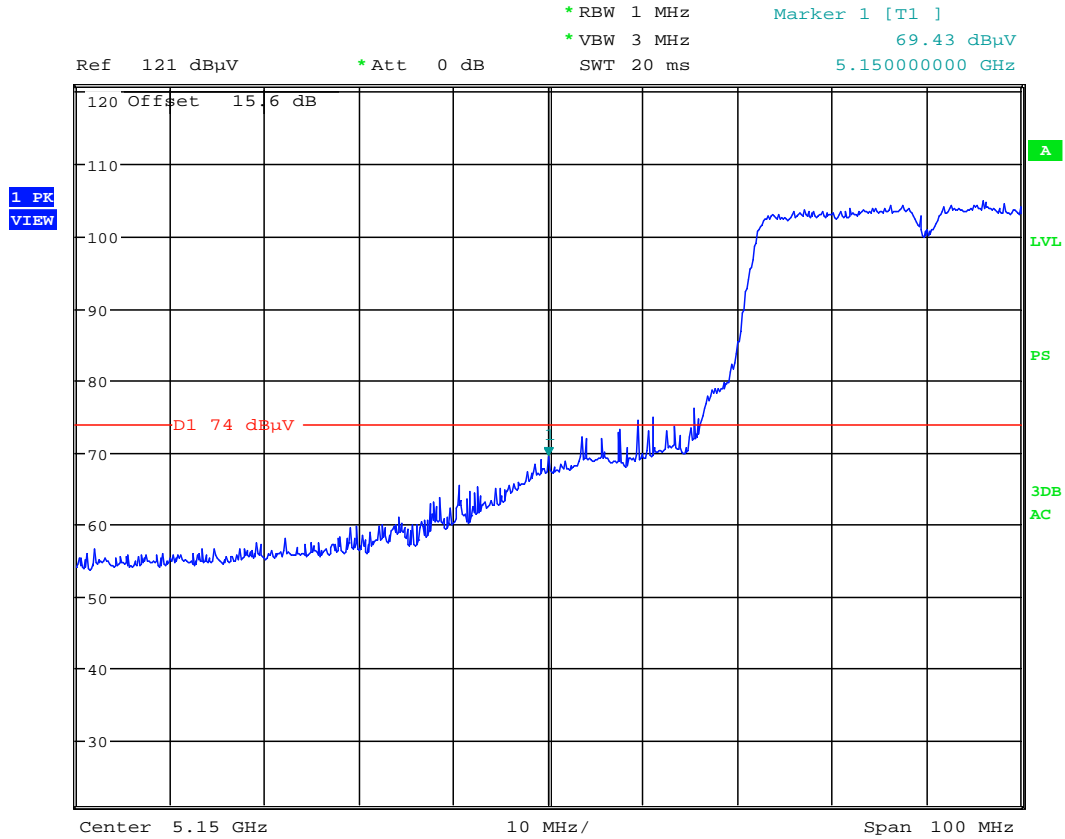


Date: 12.MAR.2013 19:41:51

Plot 6-115. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 107 of 159

Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

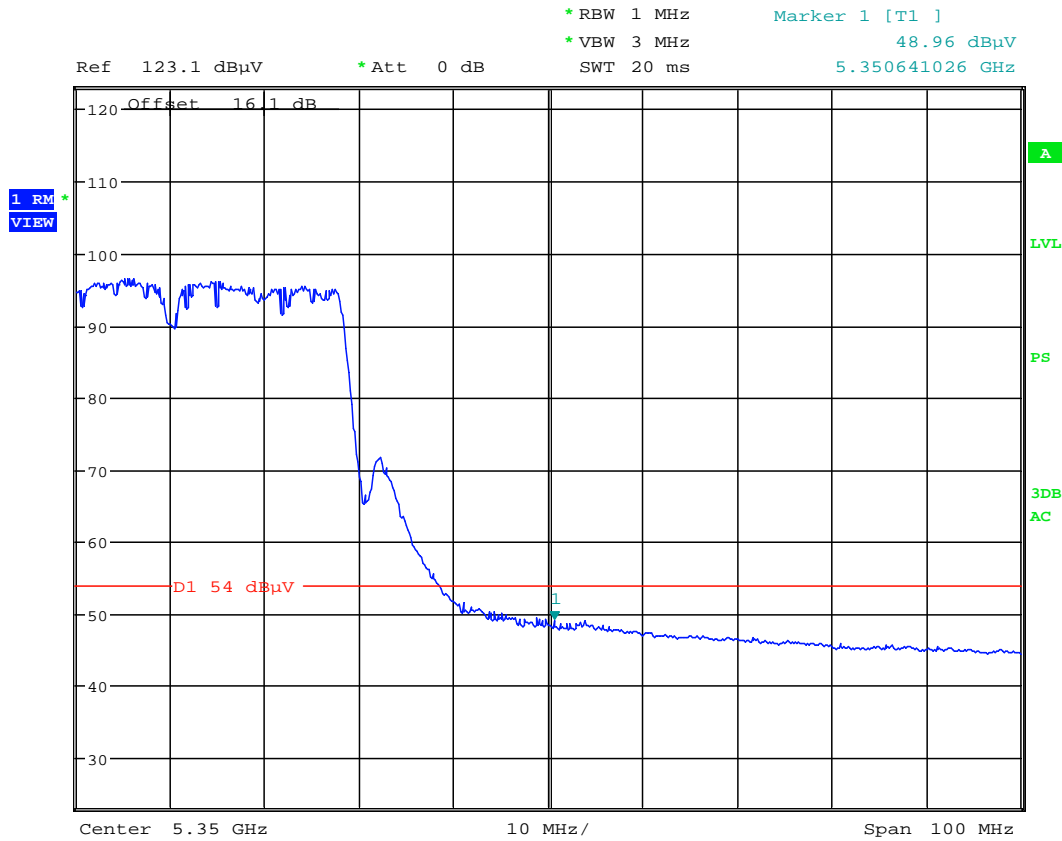


Date: 12.MAR.2013 20:19:24

Plot 6-116. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 108 of 159

Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

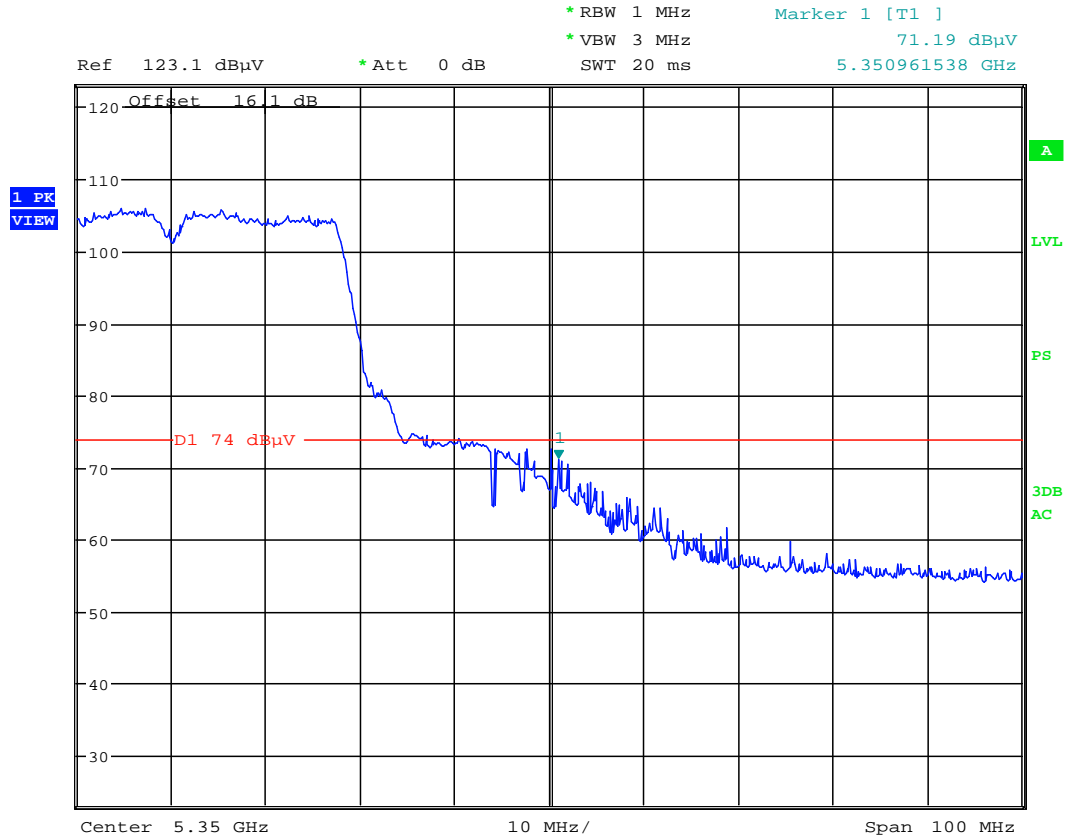


Date: 12.MAR.2013 20:20:45

Plot 6-117. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 109 of 159	

Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

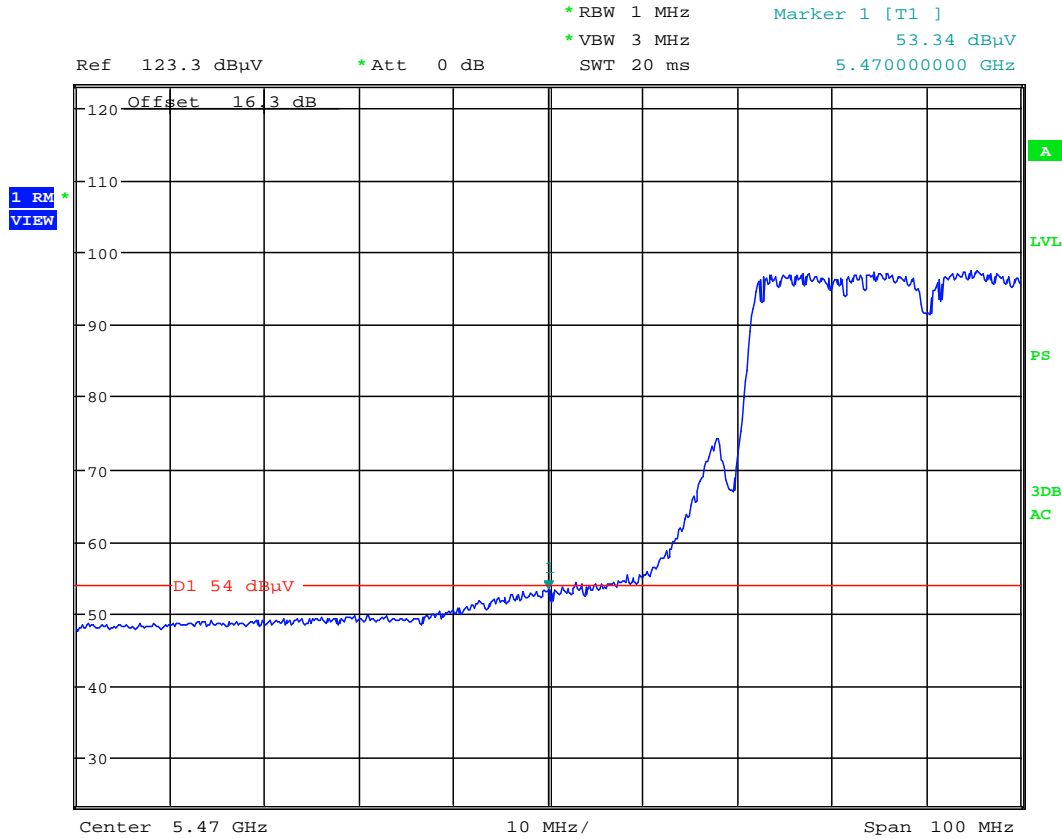


Date: 12.MAR.2013 21:53:01

Plot 6-118. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)



FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 110 of 159

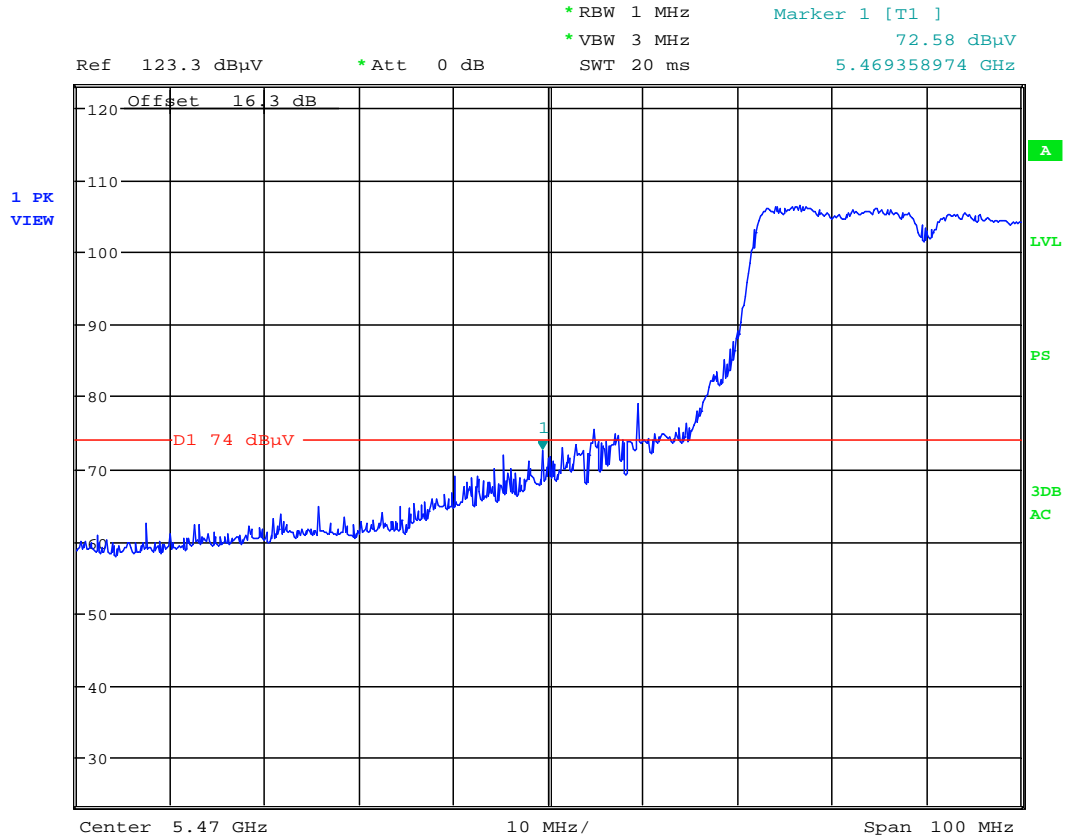Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]




Date: 12.MAR.2013 21:49:23

Plot 6-119. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 111 of 159	

Antenna-1 Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5670MHz
 Channel: 134

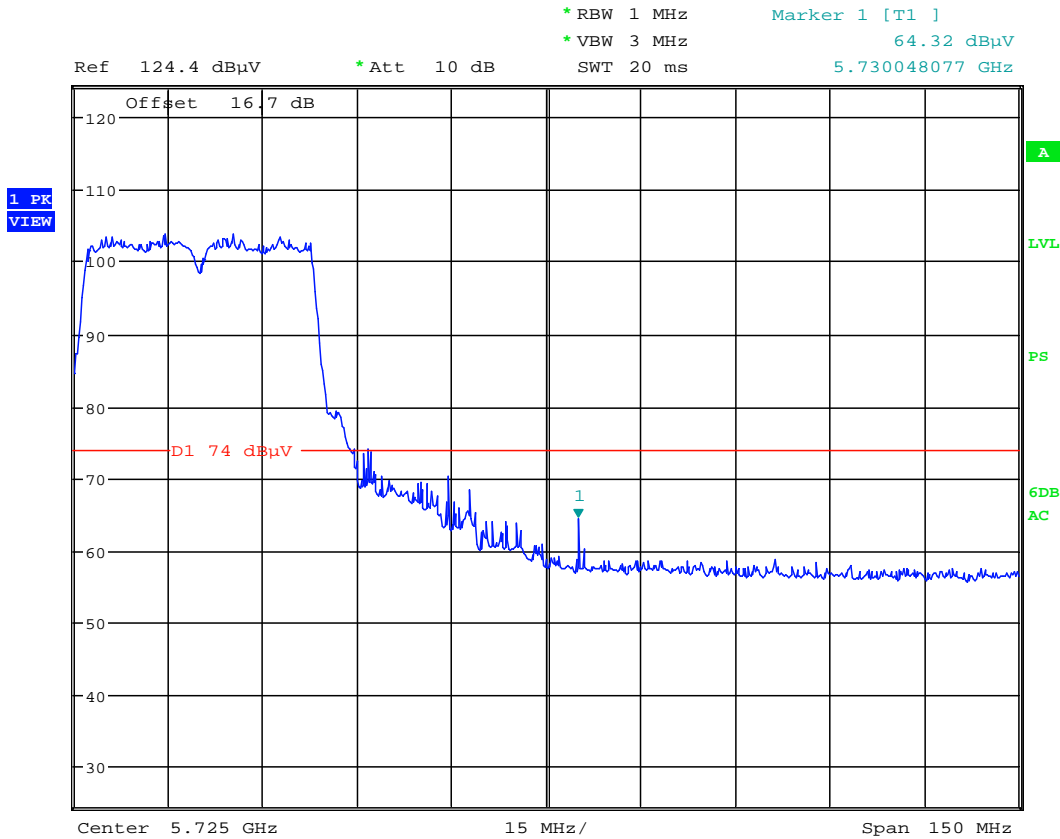


Date: 13.MAR.2013 14:55:06

Plot 6-120. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 112 of 159

6.11 Antenna-2 Radiated Band Edge Measurements (20MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

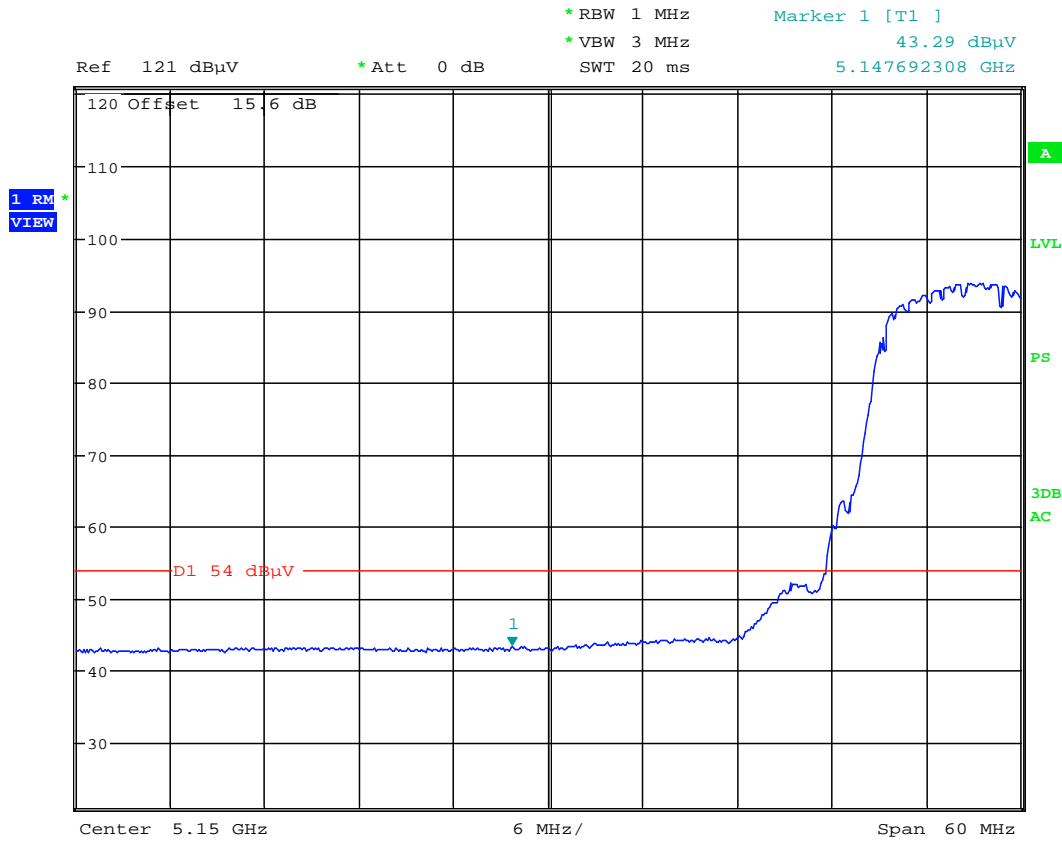


Date: 12.MAR.2013 18:48:10

Plot 6-121. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 113 of 159

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

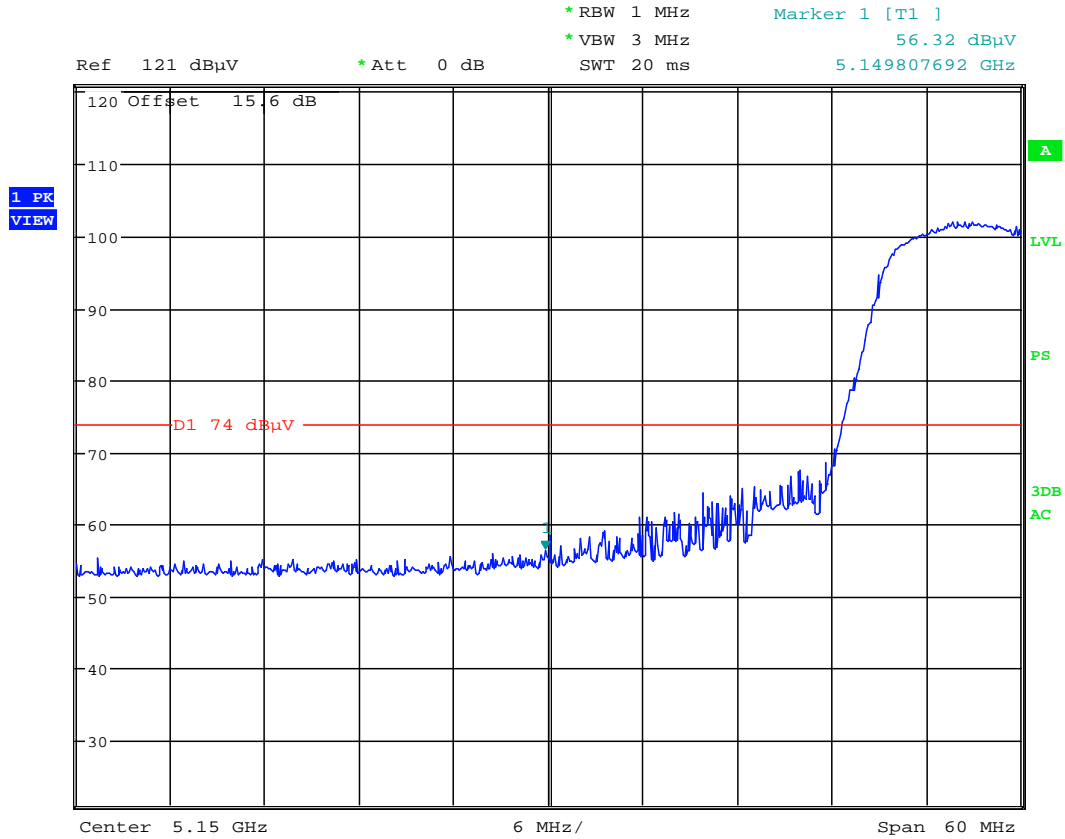


Date: 12.MAR.2013 18:26:32

Plot 6-122. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 114 of 159	

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

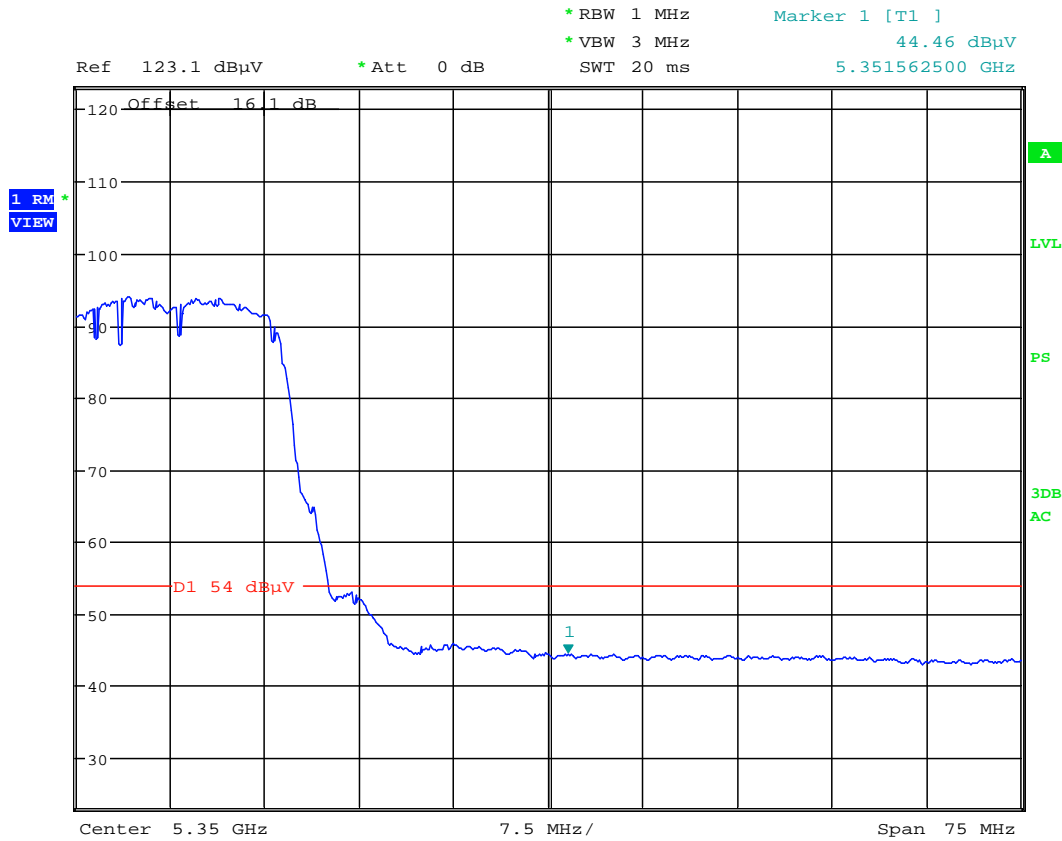


Date: 12.MAR.2013 20:31:00

Plot 6-123. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 115 of 159

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

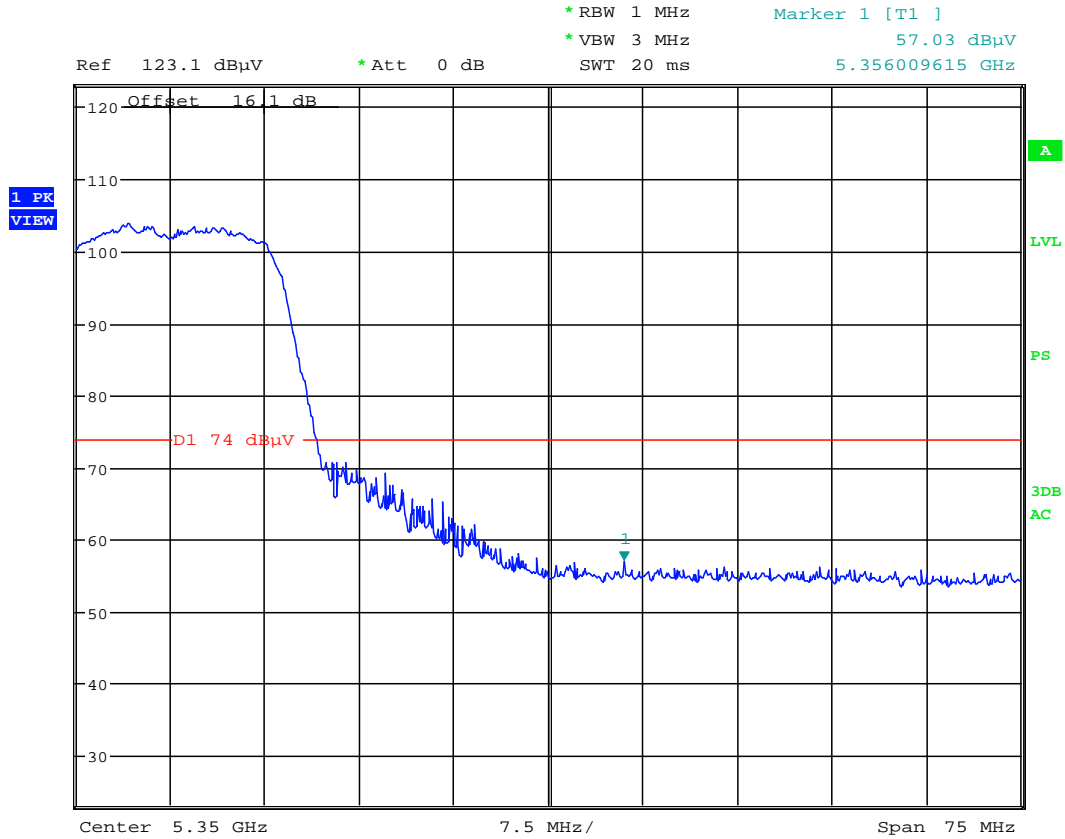


Date: 12.MAR.2013 20:32:17

Plot 6-124. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 116 of 159	

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

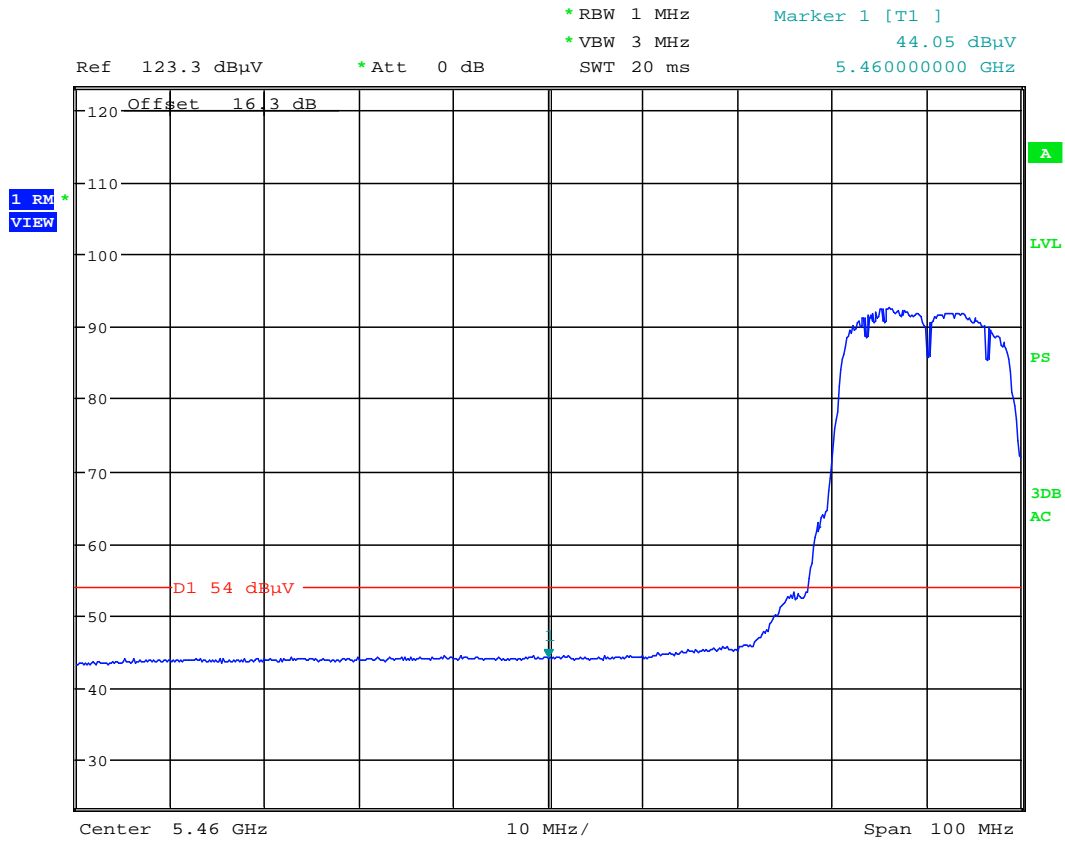


Date: 12.MAR.2013 20:50:43

Plot 6-125. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 117 of 159

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

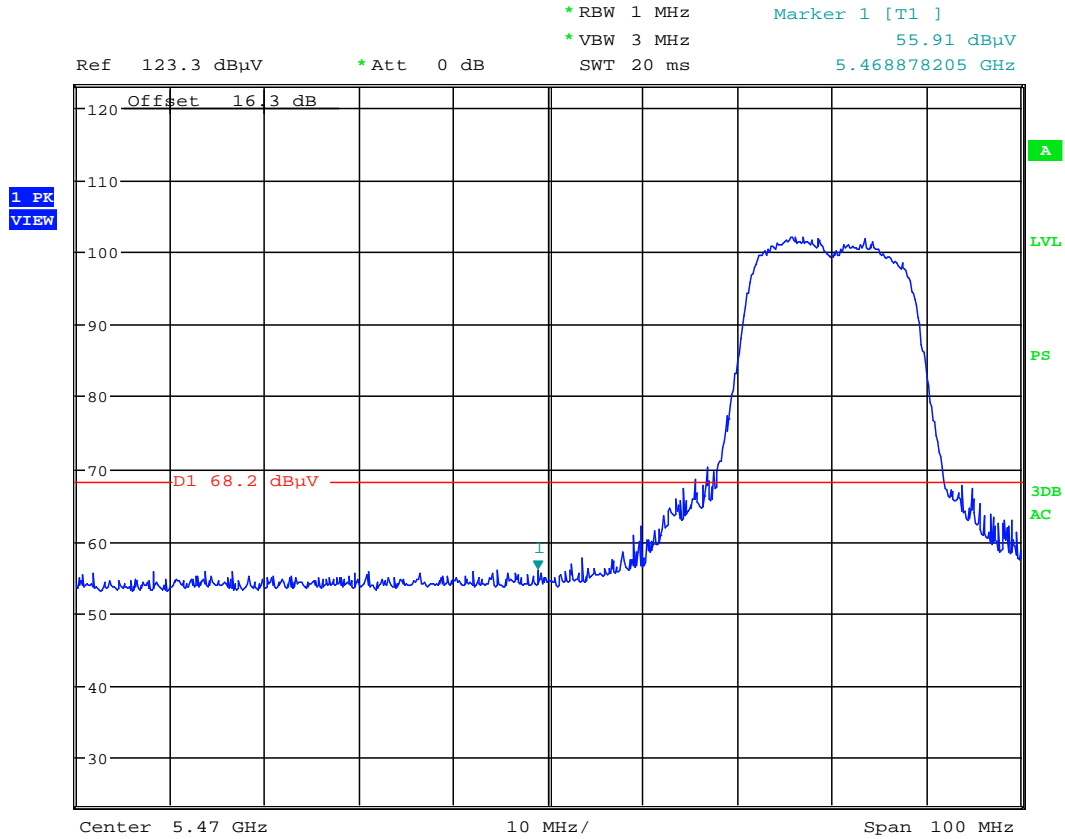

Date: 12.MAR.2013 20:54:05

Plot 6-126. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 118 of 159	

Antenna-2 Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

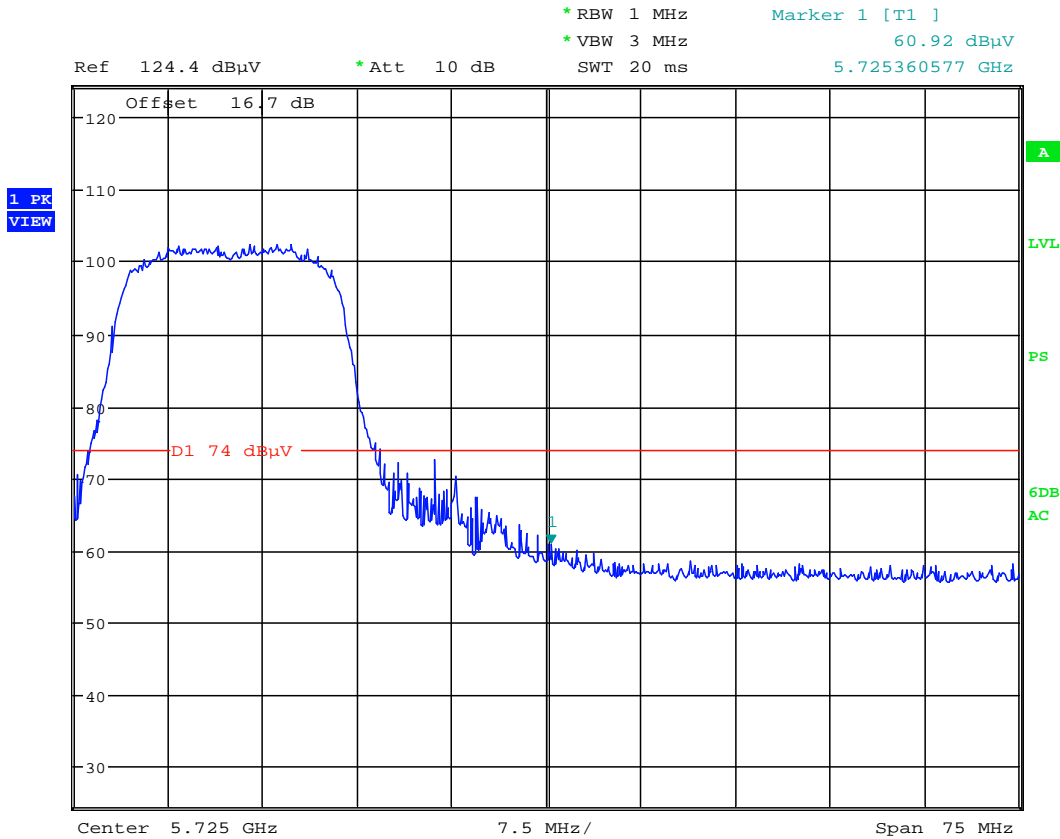


Date: 13.MAR.2013 15:08:34

Plot 6-127. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 119 of 159

6.12 Antenna-2 Radiated Band Edge Measurements (40MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

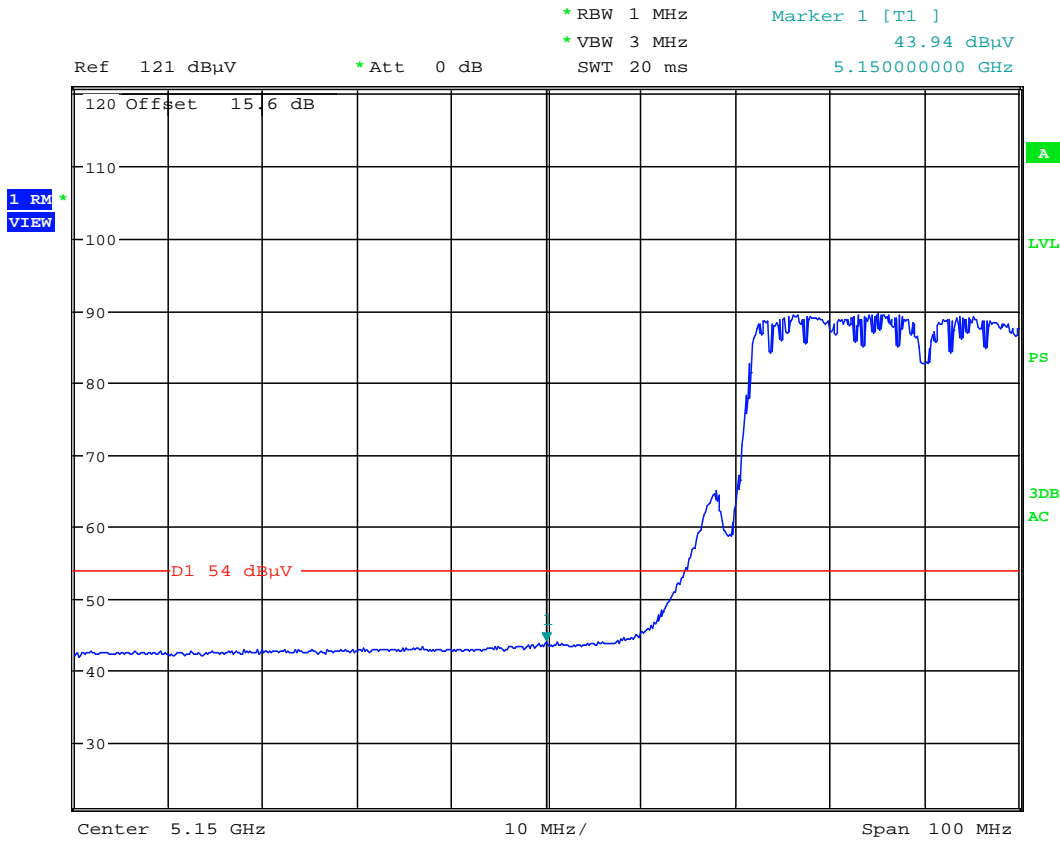


Date: 12.MAR.2013 19:27:32

Plot 6-128. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)



FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 120 of 159

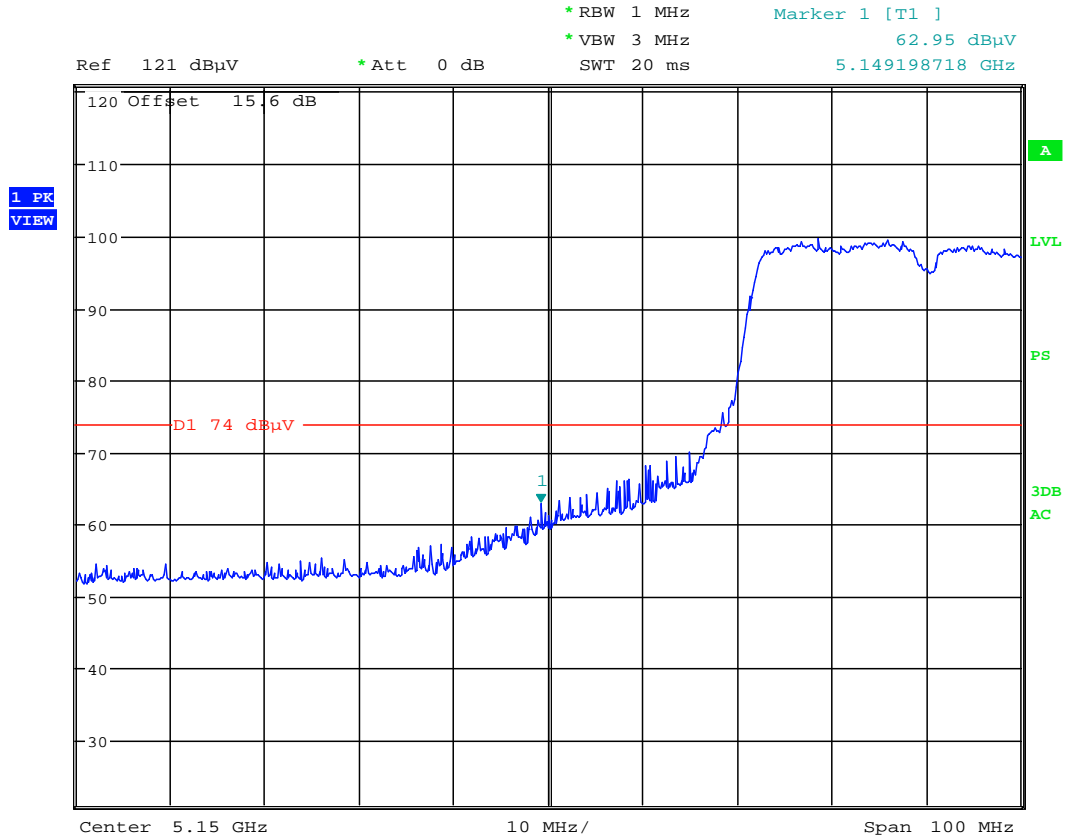Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]




Date: 12.MAR.2013 19:28:27

Plot 6-129. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 121 of 159	

Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

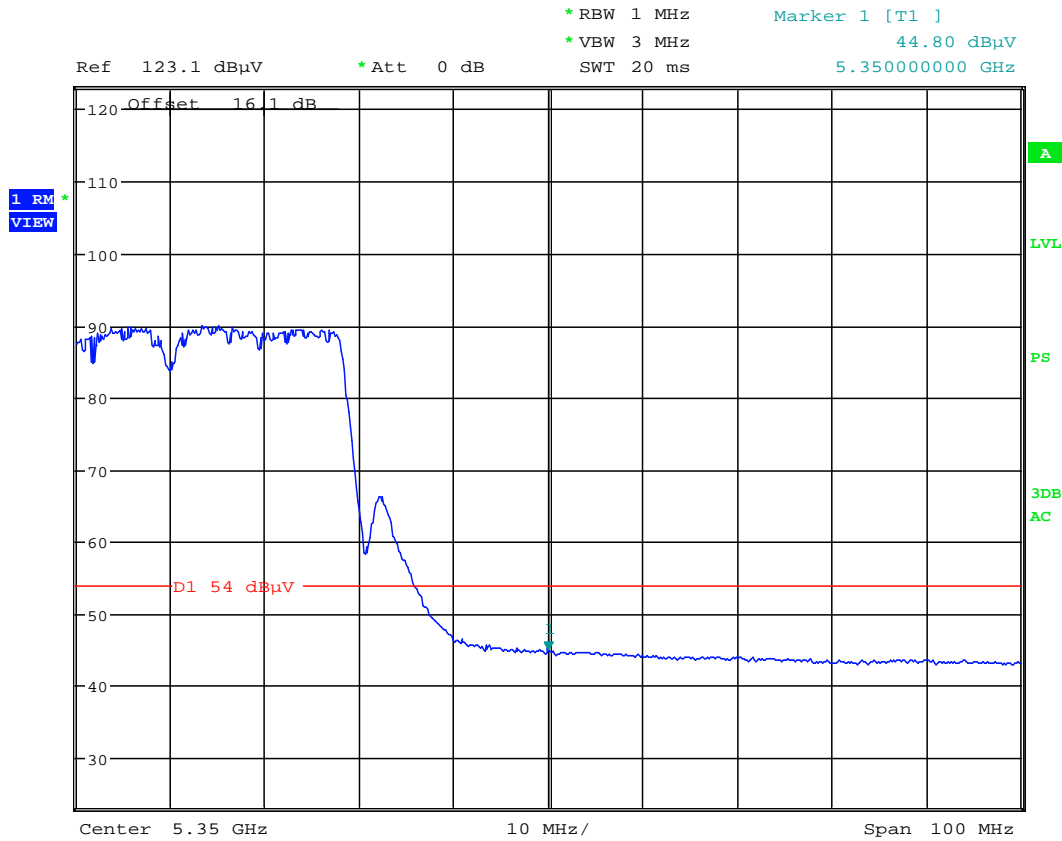


Date: 12.MAR.2013 20:29:14

Plot 6-130. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 122 of 159

Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

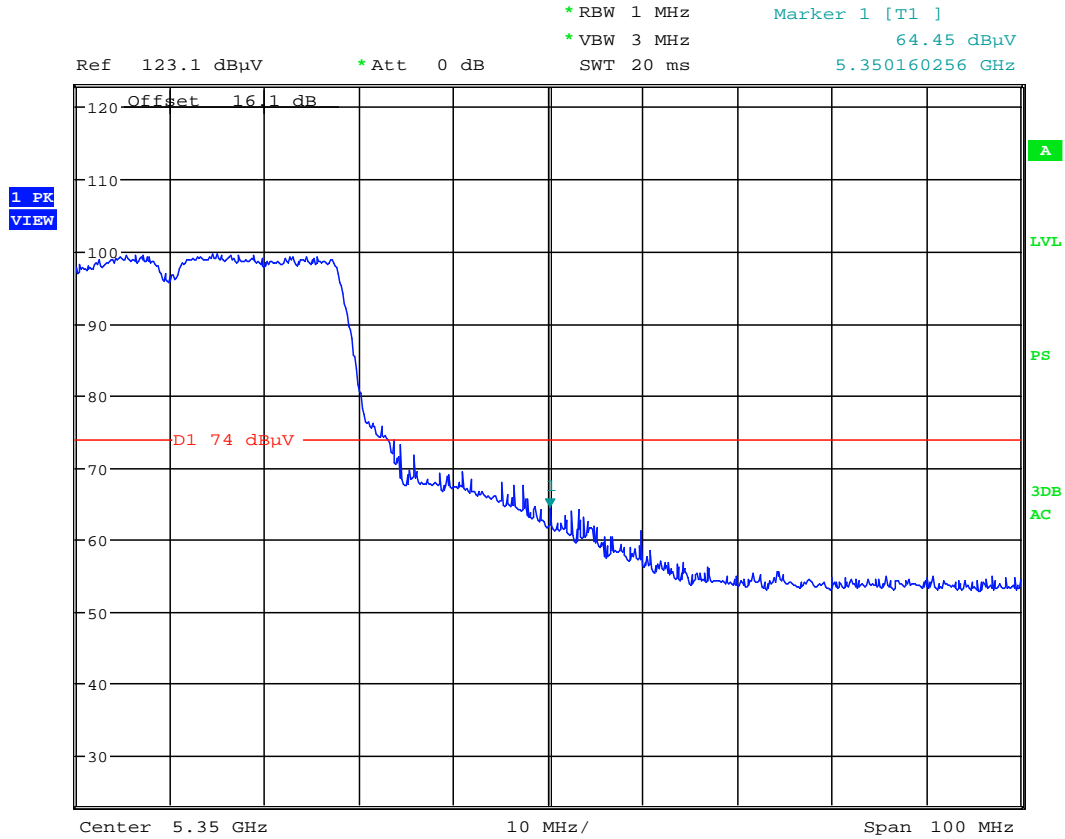


Date: 12.MAR.2013 20:28:25

Plot 6-131. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 123 of 159

Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

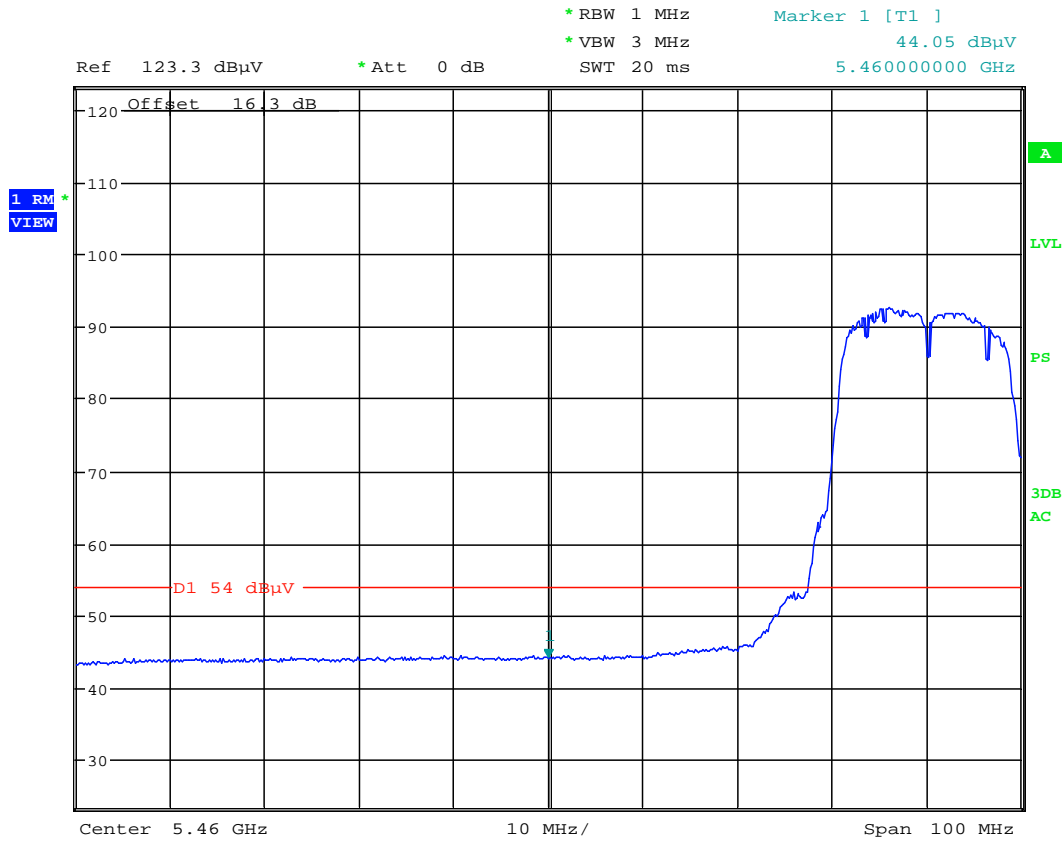


Date: 12.MAR.2013 20:50:43

Plot 6-132. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 124 of 159

Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

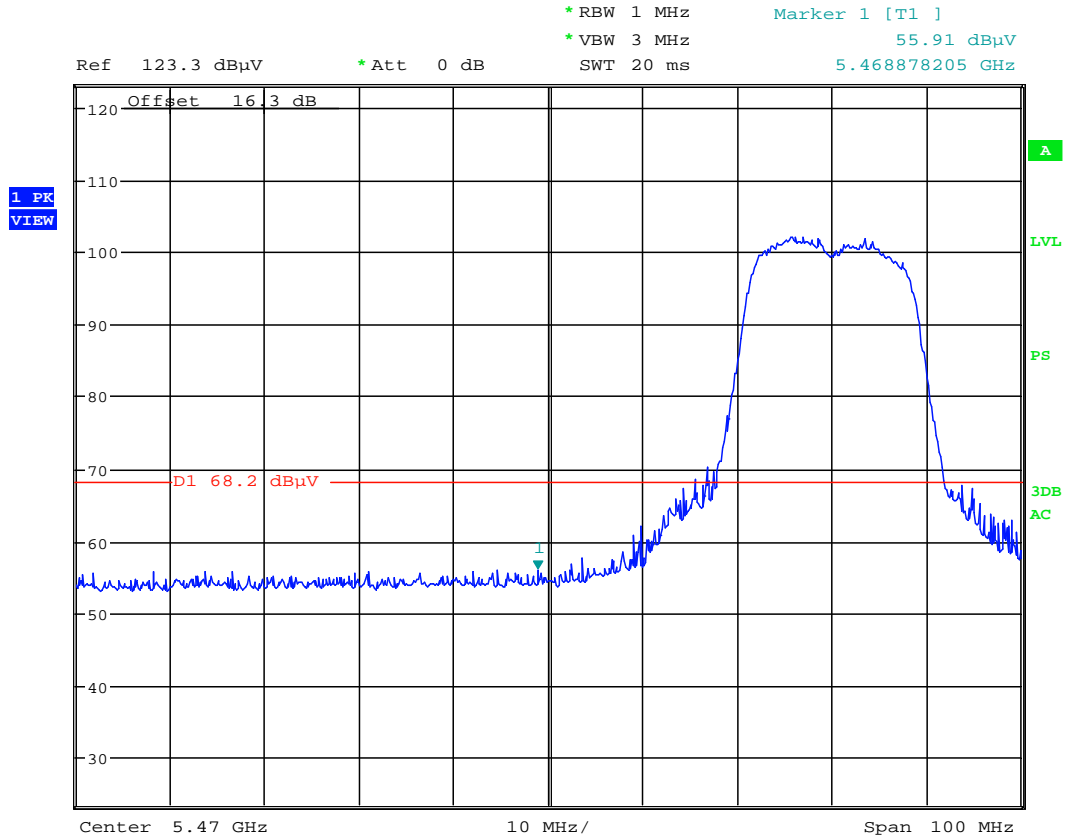


Date: 12.MAR.2013 20:54:05

Plot 6-133. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 125 of 159

Antenna-2 Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5670MHz
 Channel: 134

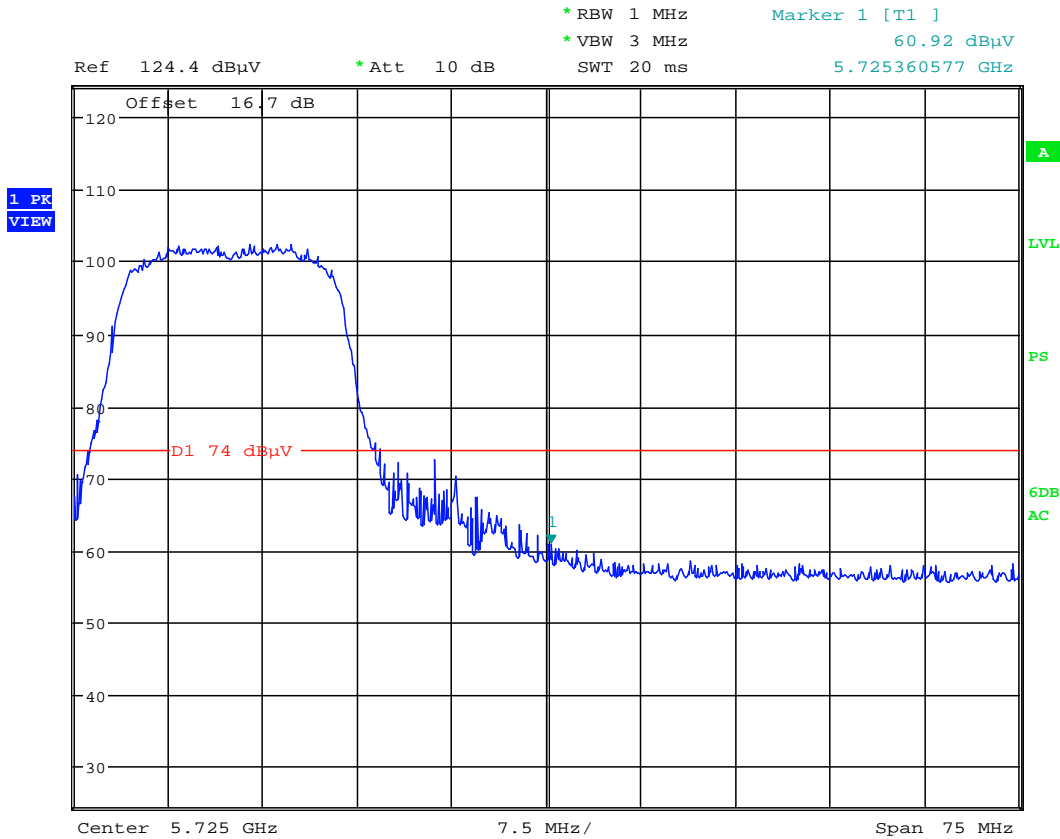


Date: 13.MAR.2013 15:08:34

Plot 6-134. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 126 of 159

6.13 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

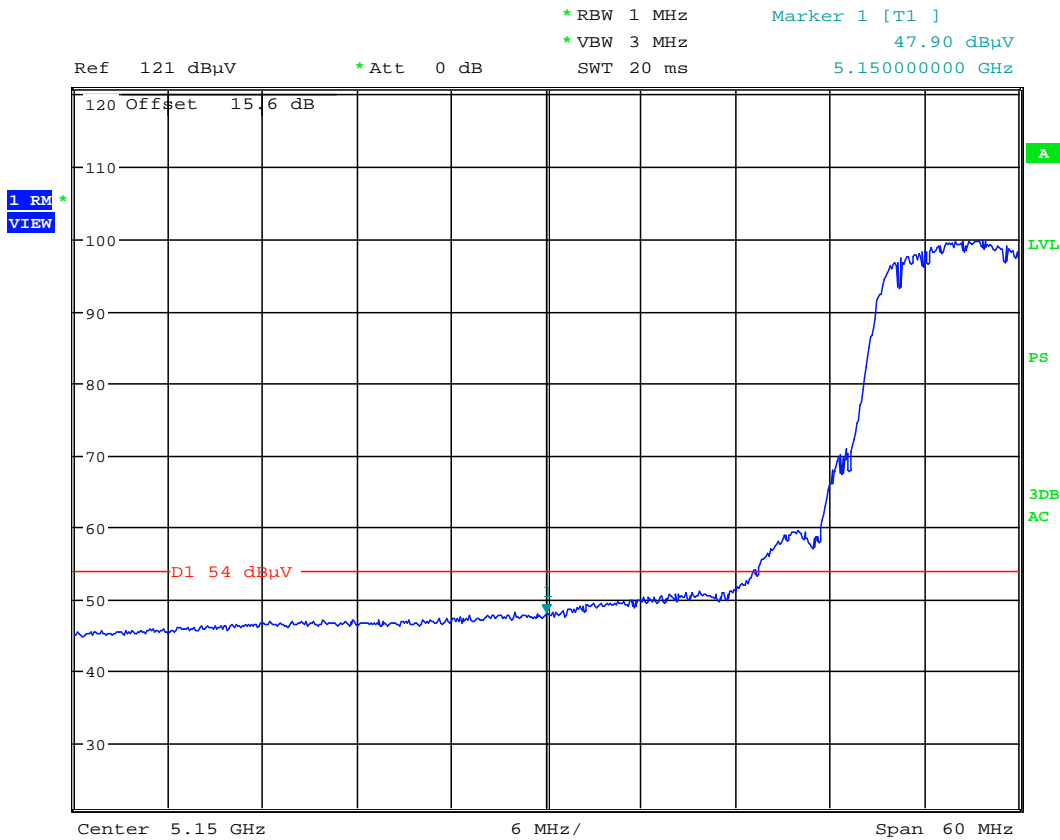


Date: 12.MAR.2013 18:37:31

Plot 6-135. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 127 of 159

Antenna-1 Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

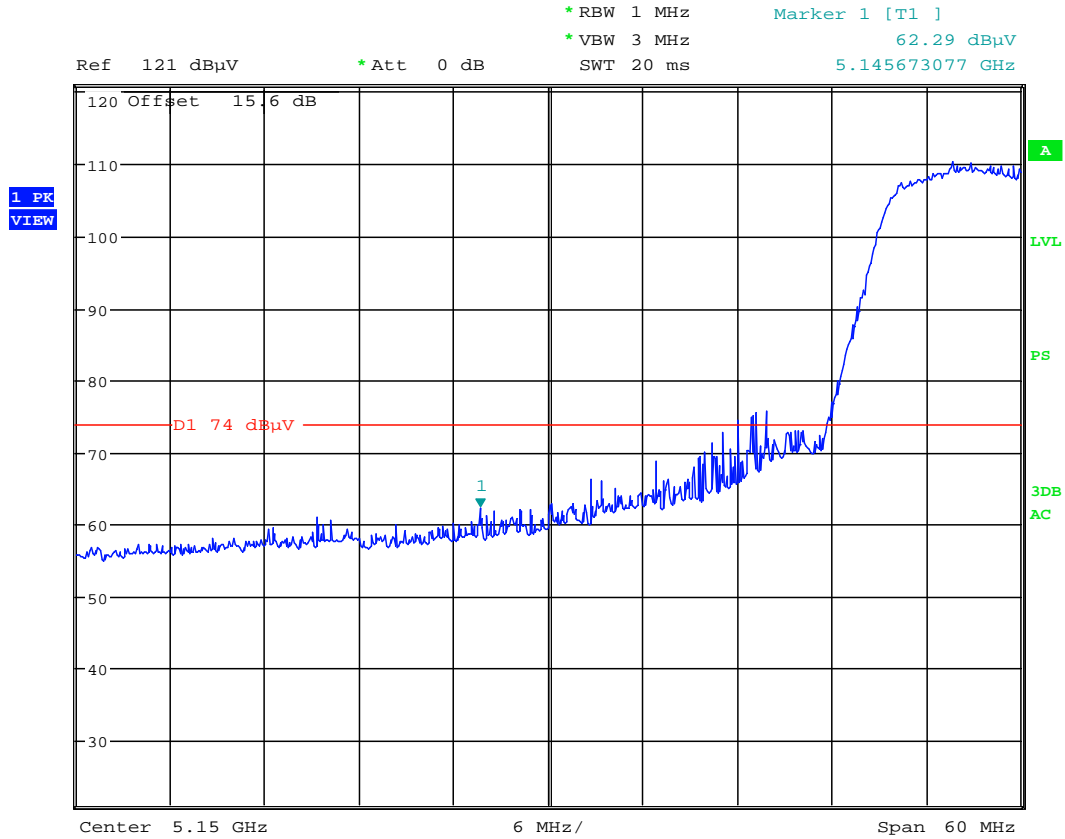


Date: 12.MAR.2013 18:39:04

Plot 6-136. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 128 of 159	

MIMO Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

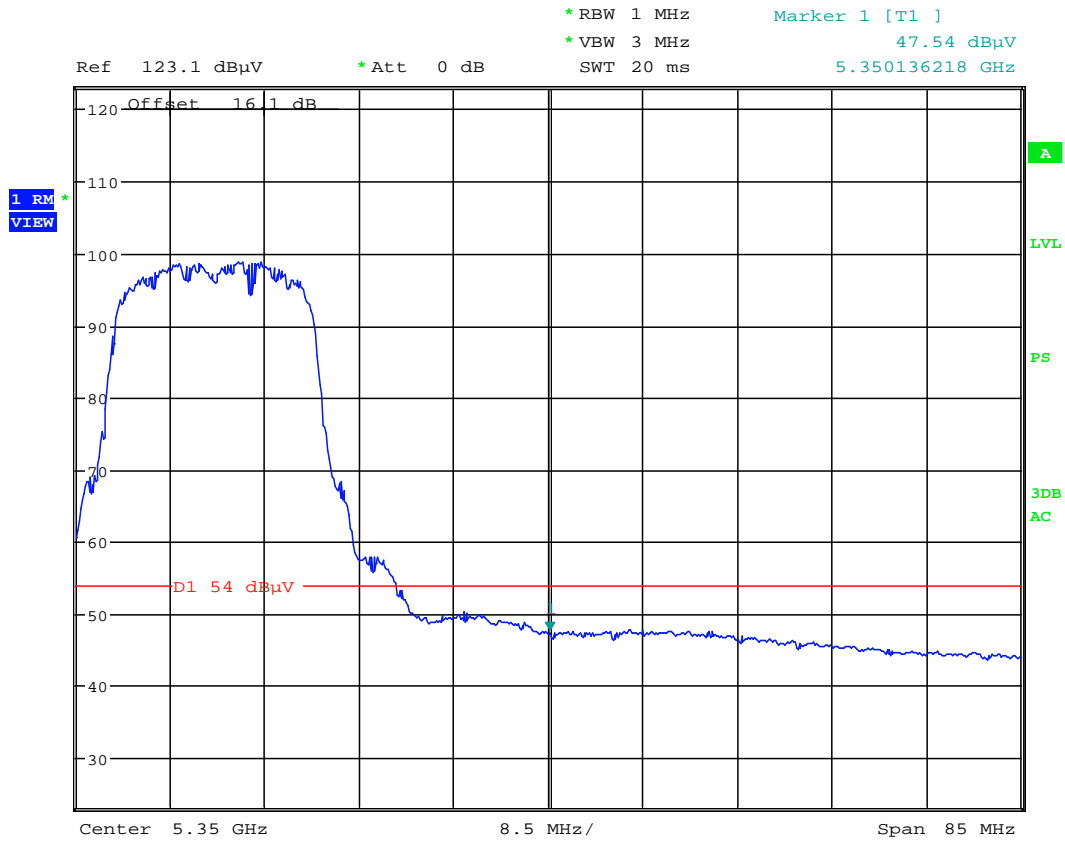


Date: 12.MAR.2013 20:03:16

Plot 6-137. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 129 of 159

MIMO Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

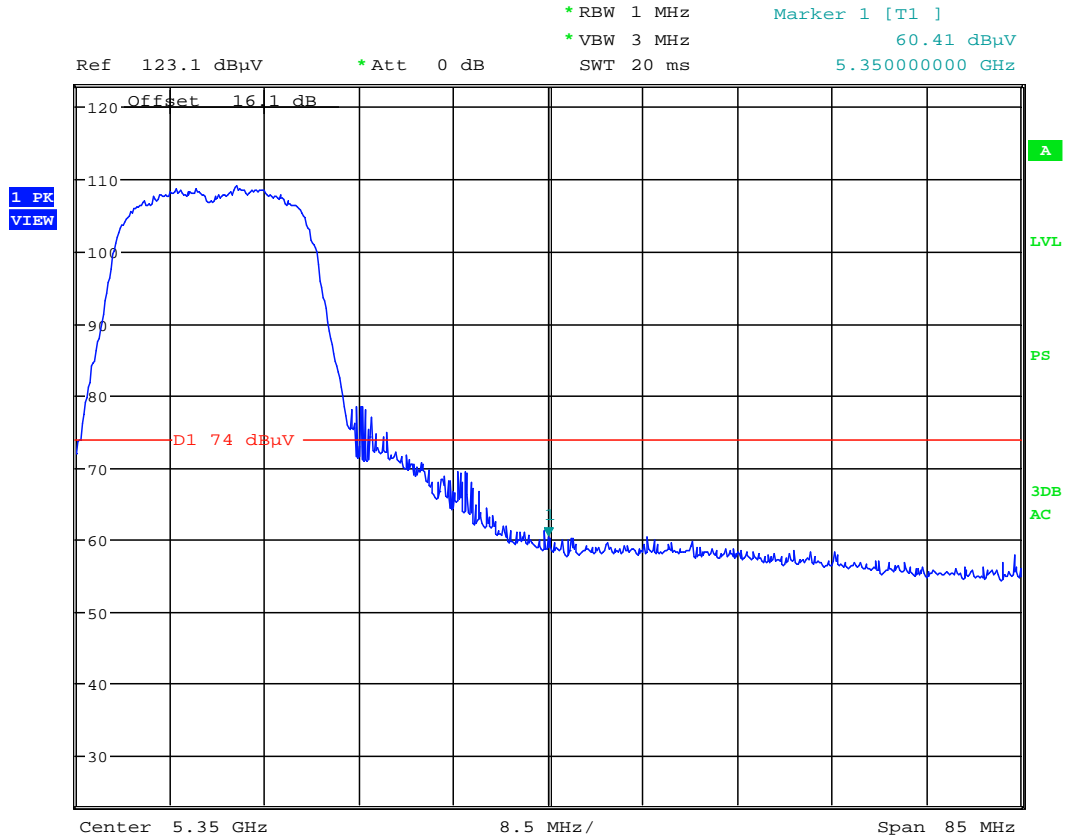


Date: 12.MAR.2013 20:02:27

Plot 6-138. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 130 of 159

MIMO Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

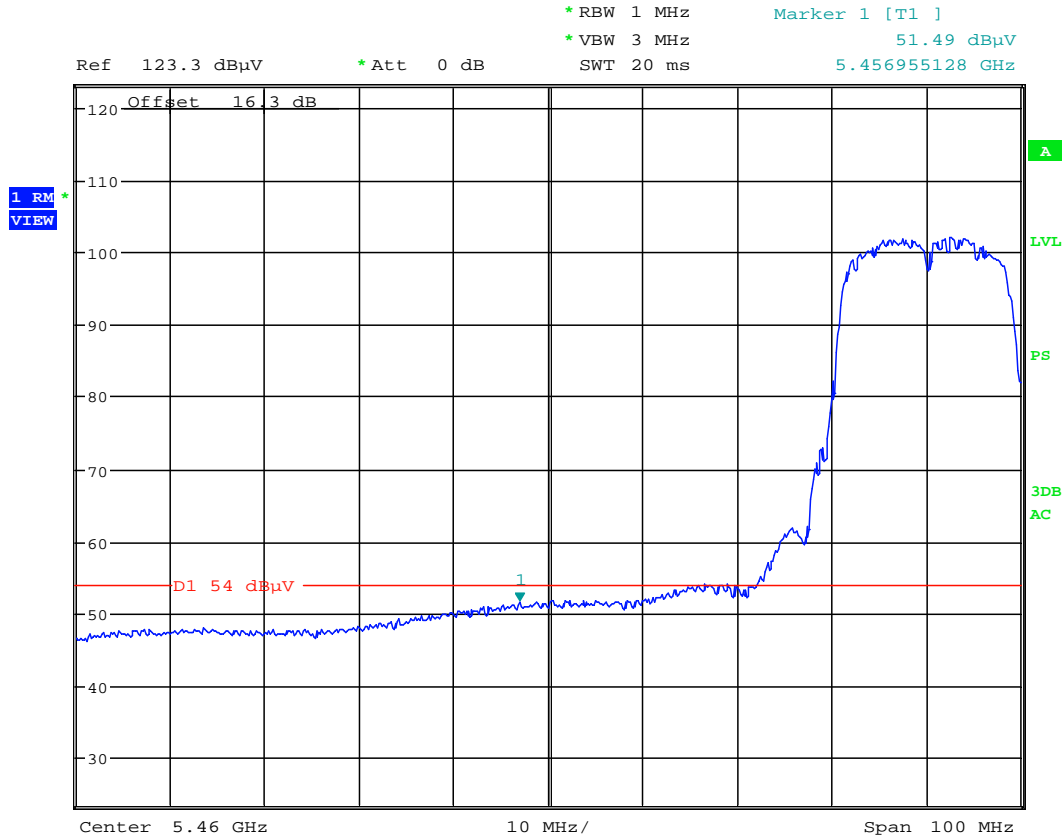


Date: 12.MAR.2013 22:01:46

Plot 6-139. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 131 of 159

MIMO Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

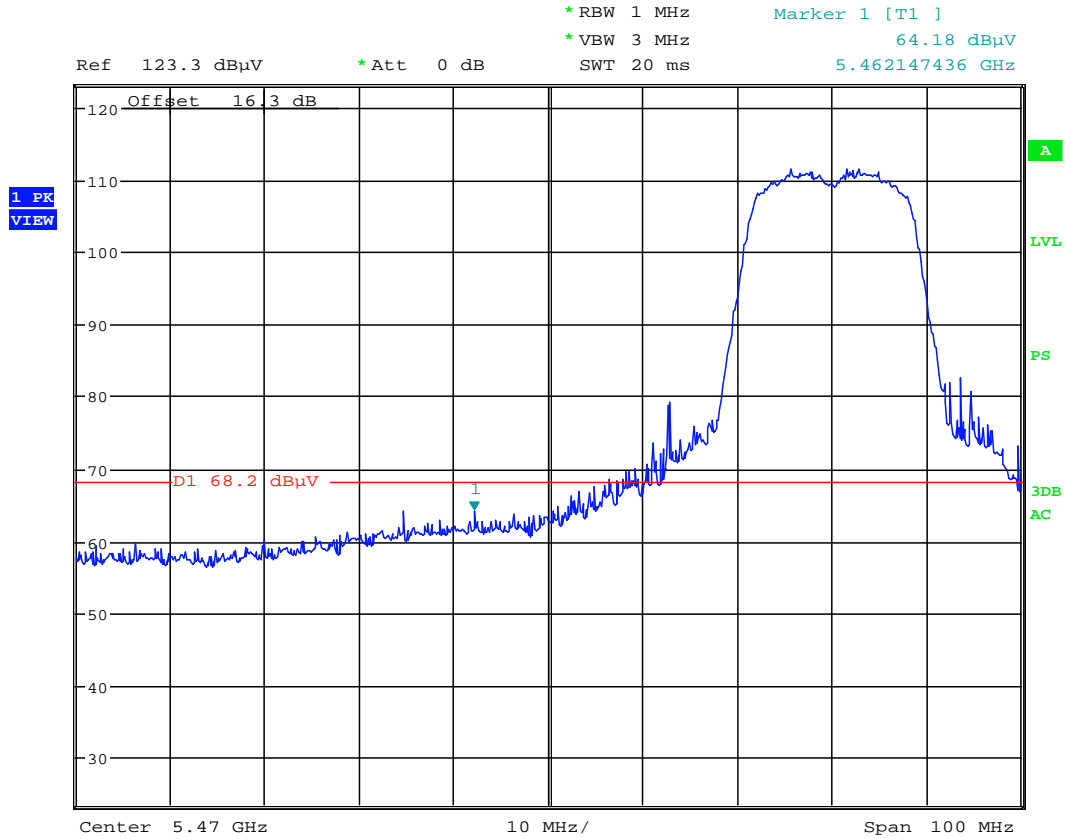


Date: 12.MAR.2013 22:03:03

Plot 6-140. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 132 of 159

MIMO Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

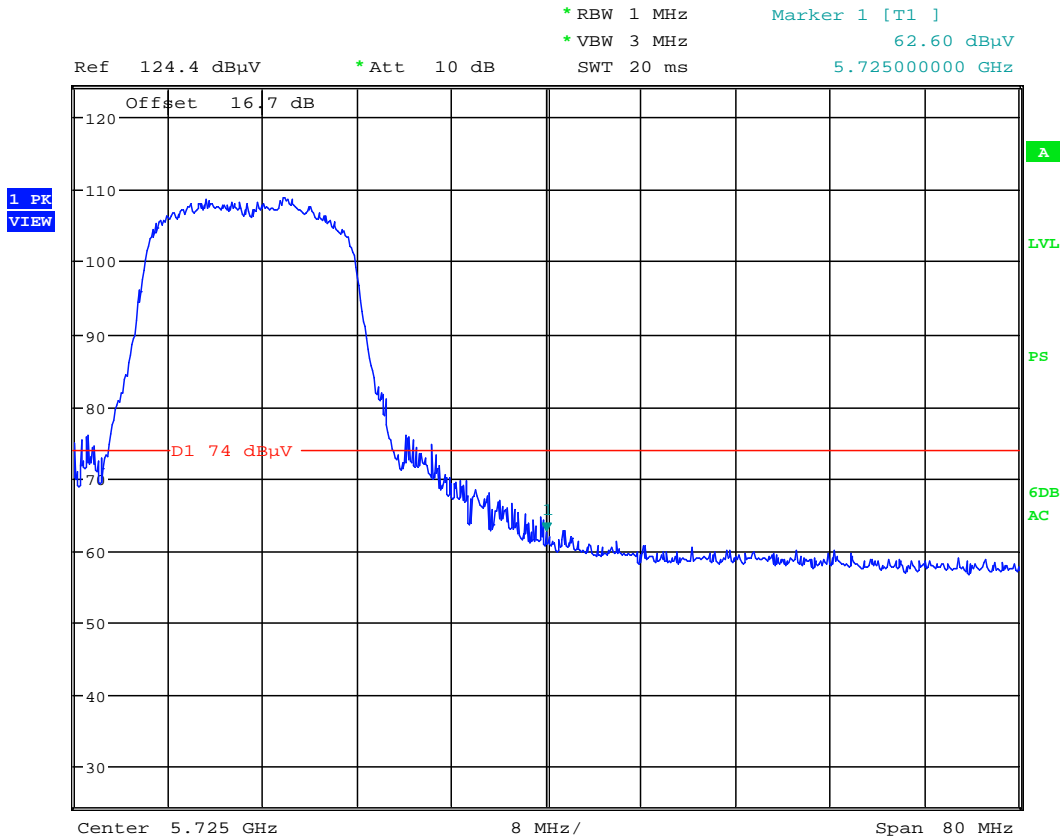


Date: 13.MAR.2013 14:12:46

Plot 6-141. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 133 of 159

6.14 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

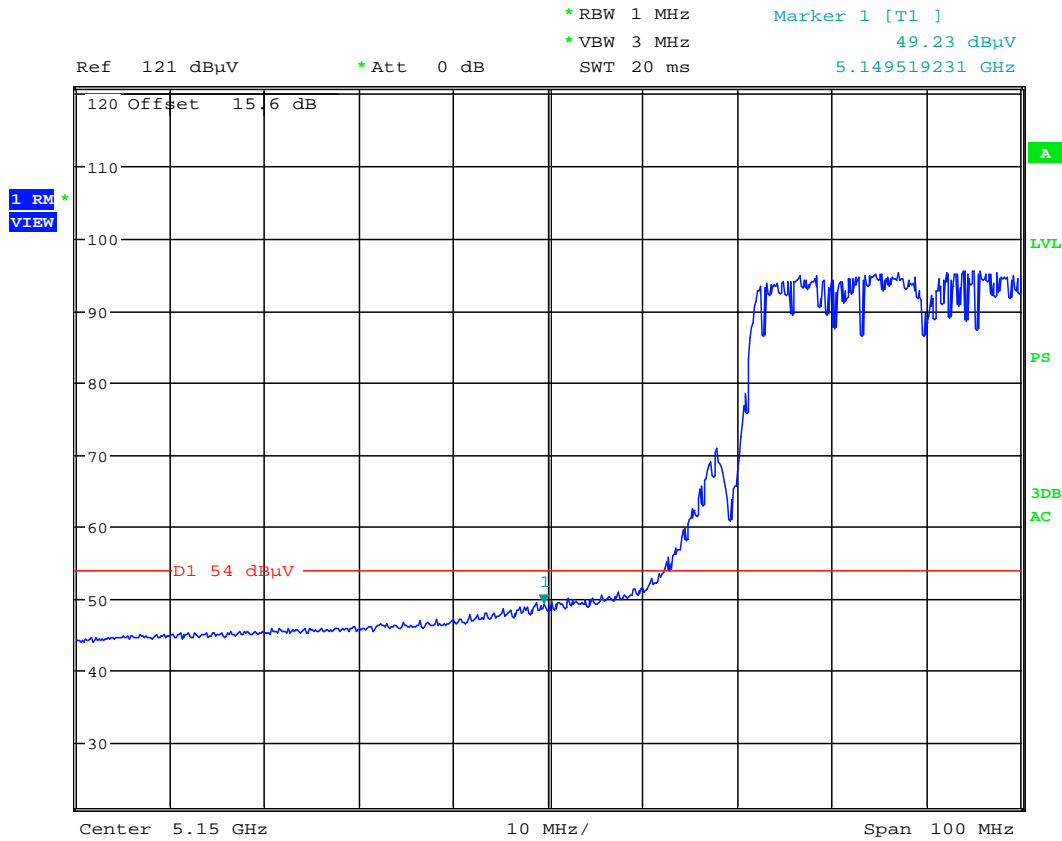


Date: 12.MAR.2013 19:49:27

Plot 6-142. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 134 of 159	

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

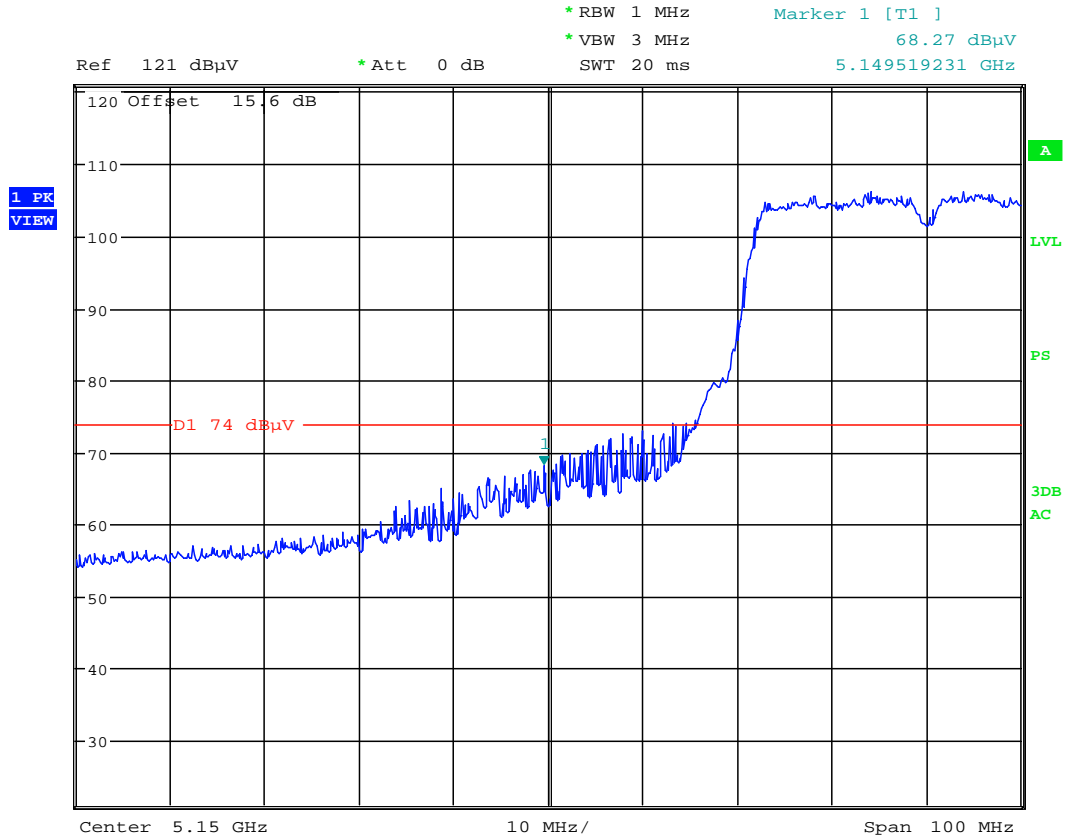


Date: 12.MAR.2013 19:51:38

Plot 6-143. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box	Page 135 of 159	

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

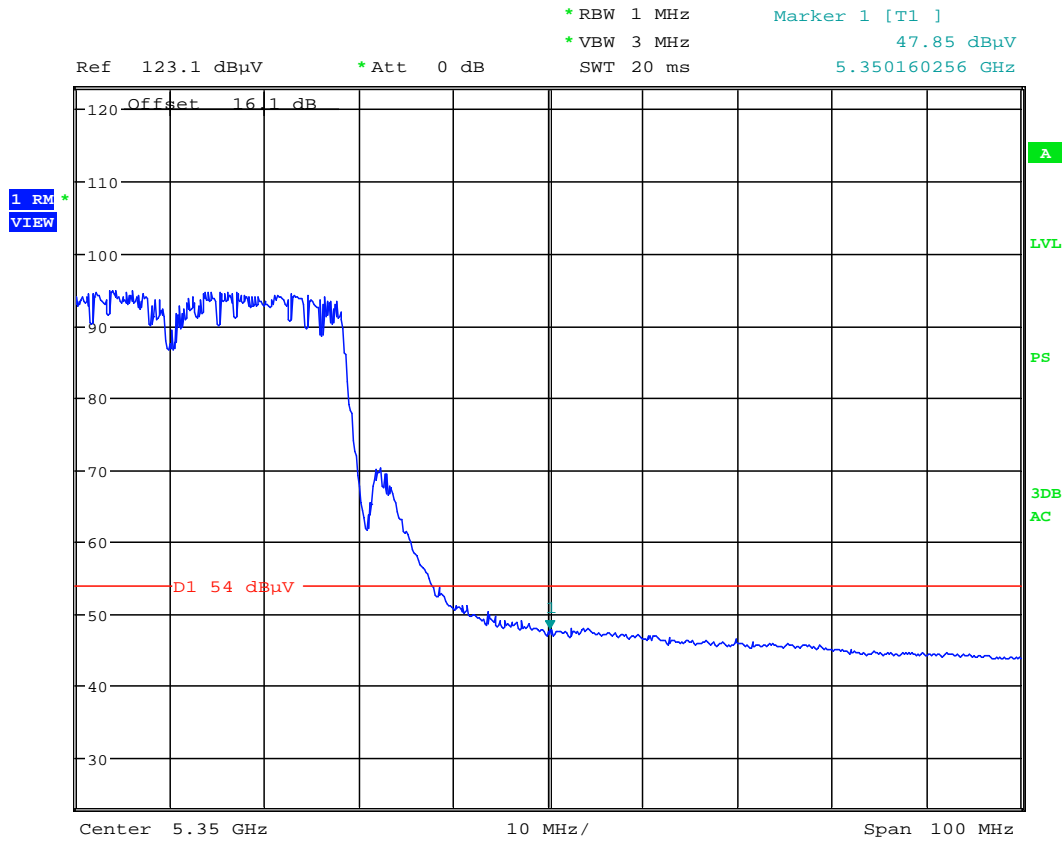


Date: 12.MAR.2013 20:05:12

Plot 6-144. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 136 of 159

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

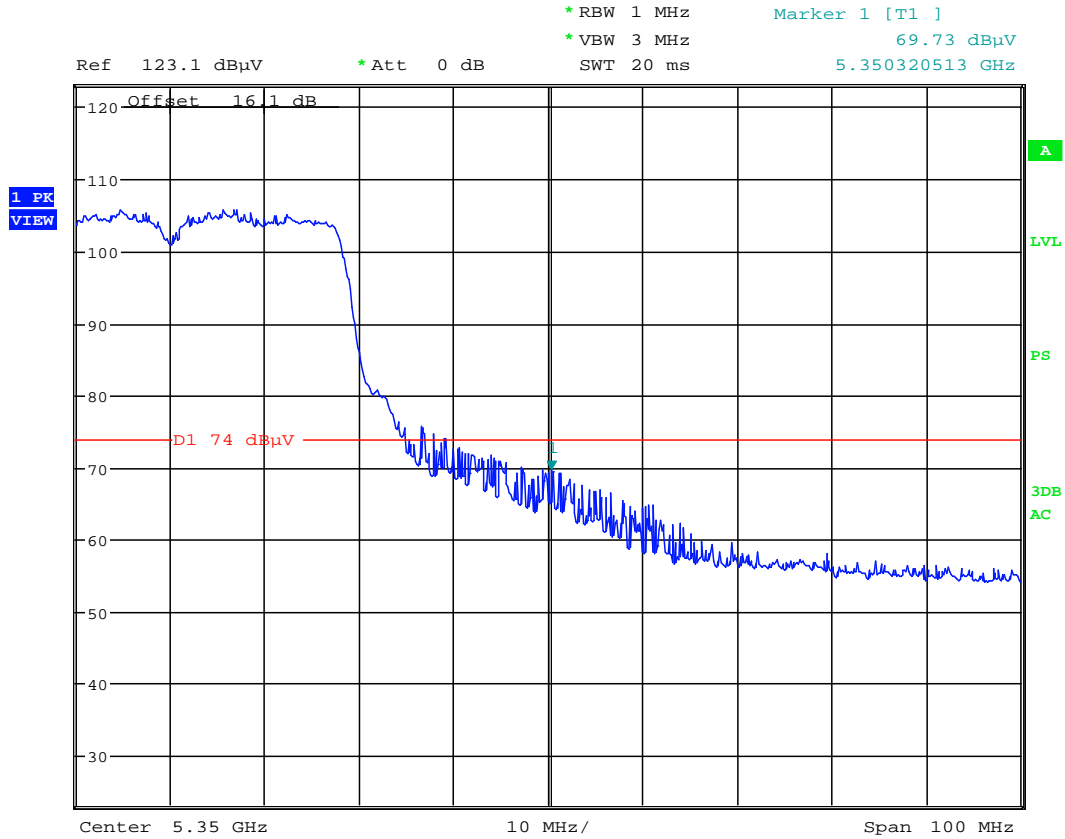


Date: 12.MAR.2013 20:07:10

Plot 6-145. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 137 of 159

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS08
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

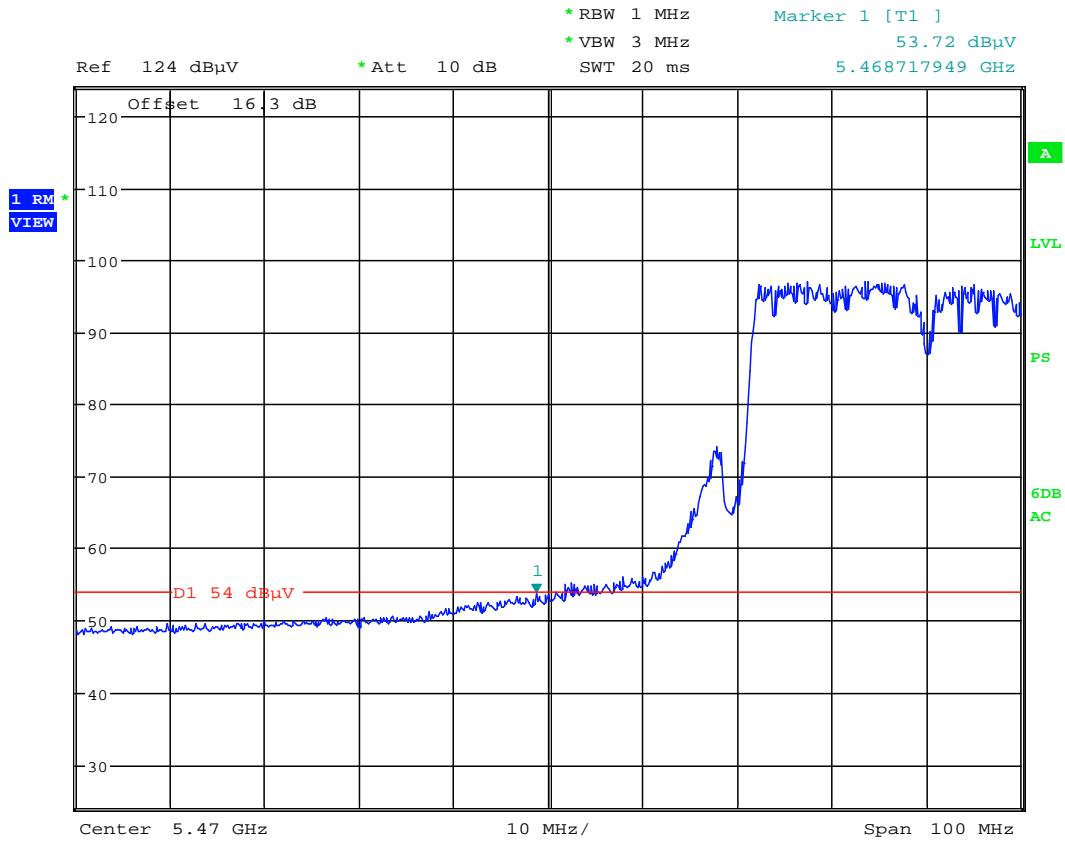


Date: 13.MAR.2013 14:02:55

Plot 6-146. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 138 of 159

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

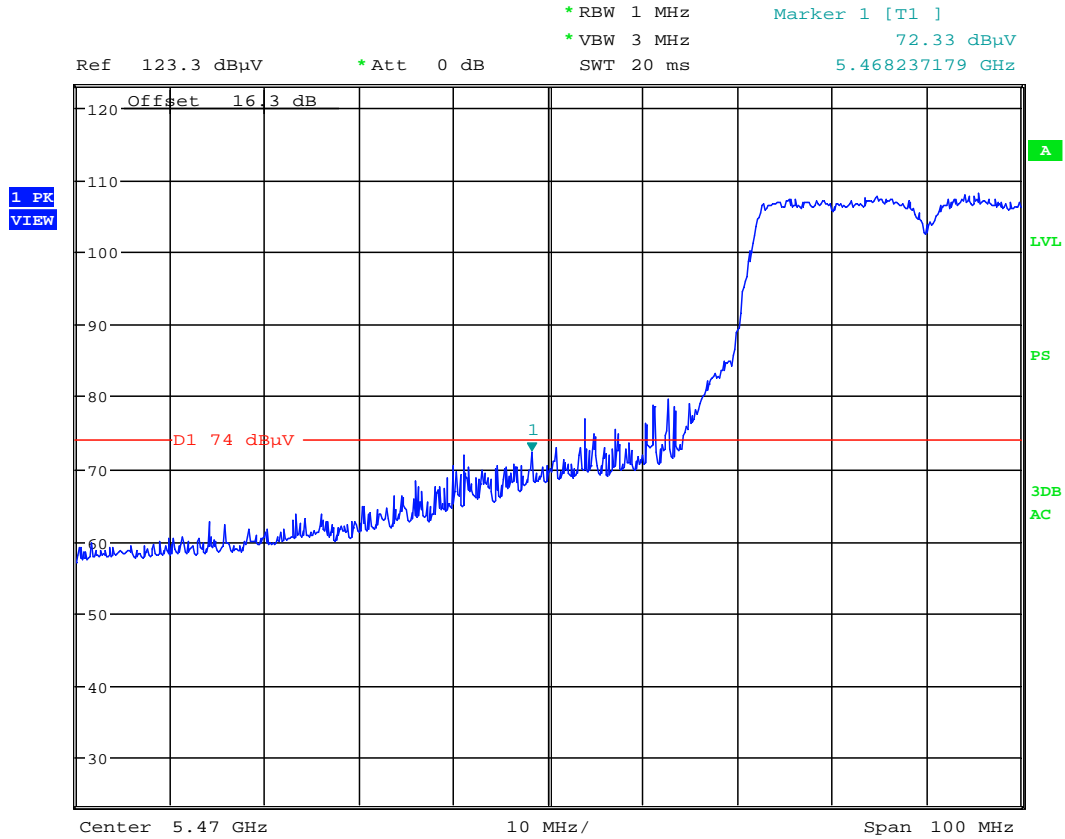

Date: 12.MAR.2013 22:05:42

Plot 6-147. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 139 of 159

MIMO Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS08

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

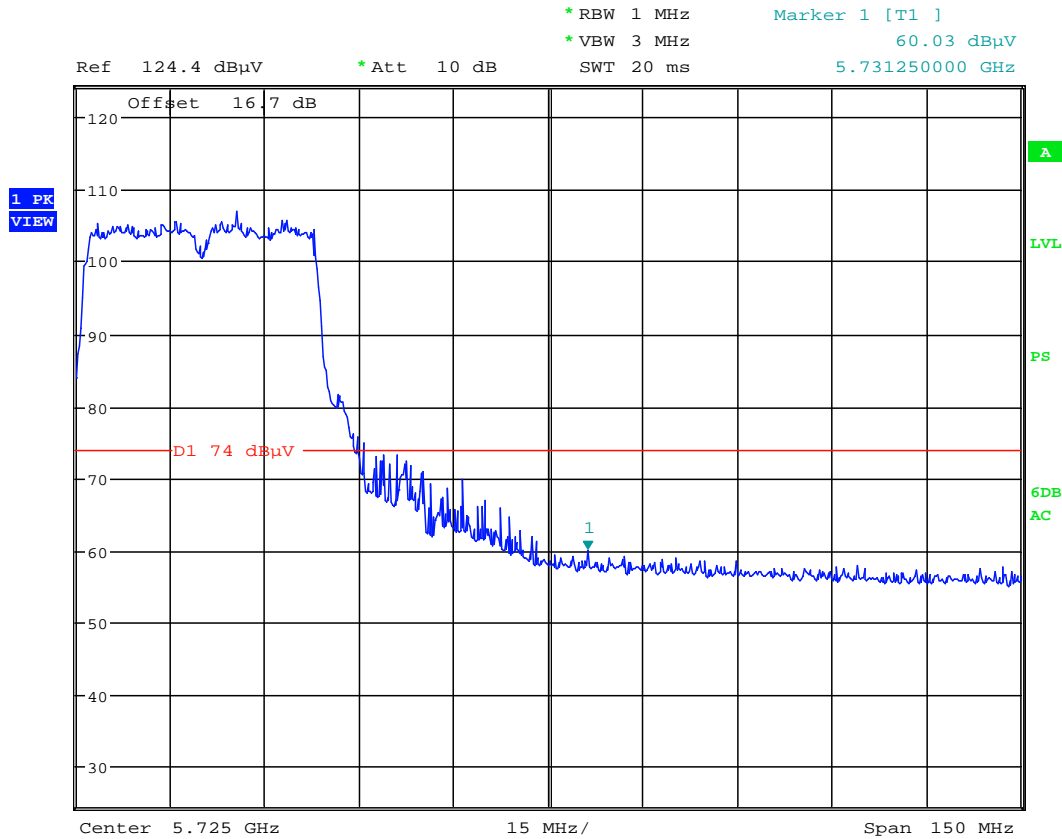


Date: 13.MAR.2013 14:36:52

Plot 6-148. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 140 of 159

6.15 Antenna-1 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

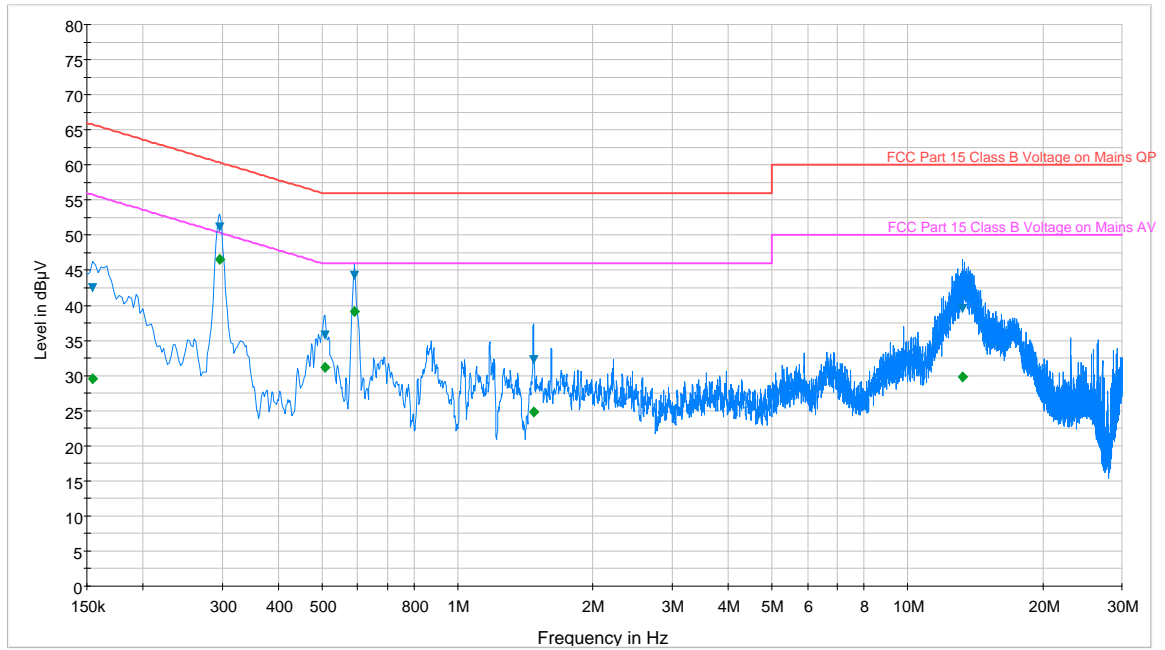

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
— FCC Part 15 Class B Voltage on Mains AV.LimitLine
— Preview Result 1-PK+
▼ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-149. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.155	L1	0.2	42.50	65.80	23.30	29.50	55.80	26.30
0.296	L1	0.1	51.20	60.30	9.10	46.50	50.30	3.80
0.508	L1	0.1	35.80	56.00	20.20	31.20	46.00	14.80
0.591	L1	0.1	44.30	56.00	11.70	39.10	46.00	6.90
1.475	L1	0.2	32.30	56.00	23.70	24.90	46.00	21.10
13.256	L1	0.5	39.50	60.00	20.50	29.80	50.00	20.20

Table 6-42. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 141 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

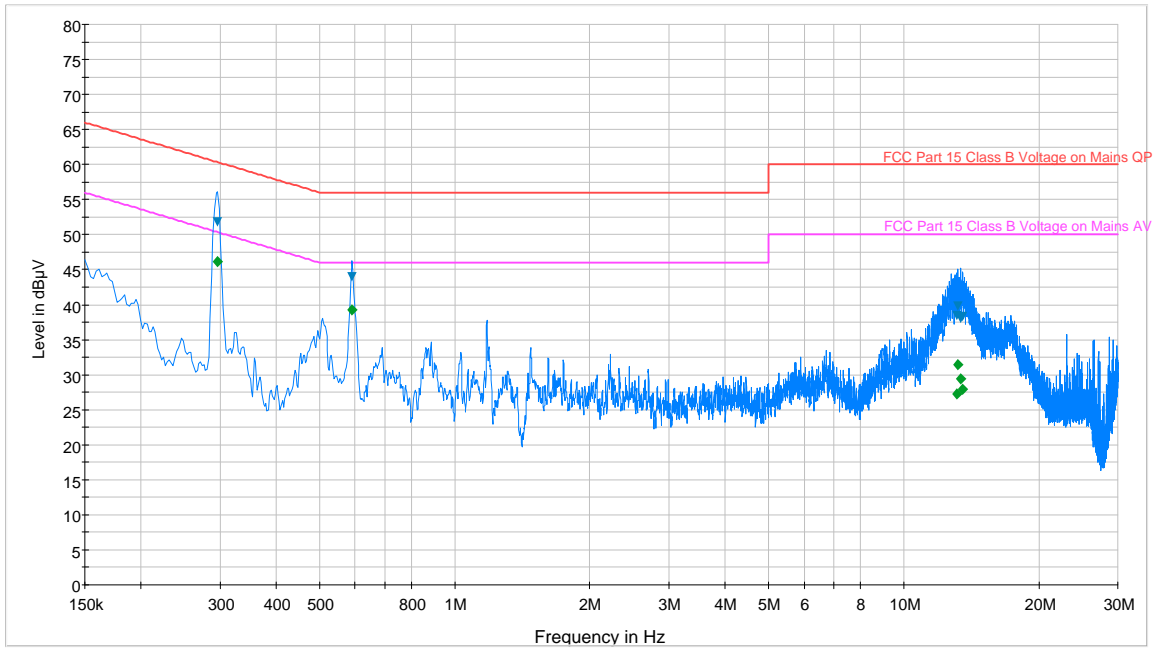

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
— FCC Part 15 Class B Voltage on Mains AV.LimitLine
— Preview Result 1-PK+
▼ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-150. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.296	N	0.2	51.70	60.30	8.60	46.20	50.30	4.10
0.591	N	0.1	44.00	56.00	12.00	39.20	46.00	6.80
13.146	N	0.5	38.40	60.00	21.60	27.30	50.00	22.70
13.196	N	0.5	39.80	60.00	20.20	31.50	50.00	18.50
13.382	N	0.5	38.10	60.00	21.90	29.40	50.00	20.60
13.504	N	0.5	38.30	60.00	21.70	27.90	50.00	22.10

Table 6-43. Line Conducted Data with 802.11a UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 142 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

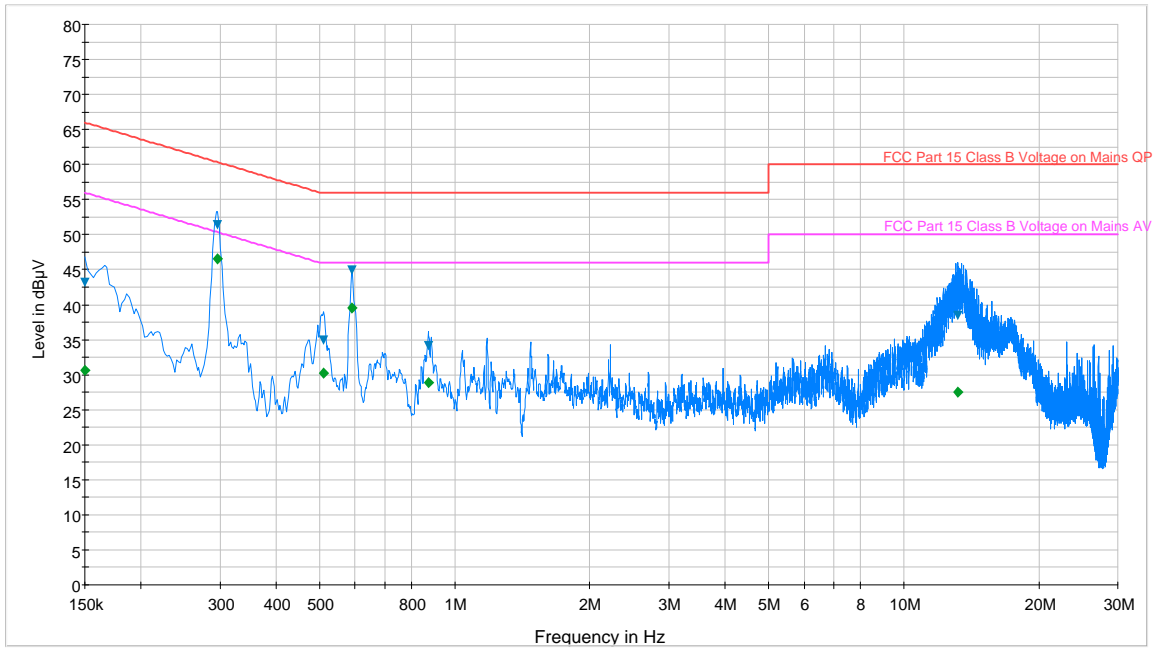

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
— FCC Part 15 Class B Voltage on Mains AV.LimitLine
— Preview Result 1-PK+
▼ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-151. Line Conducted Plot with 802.11a UNII Band 2 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.150	L1	0.2	43.20	66.00	22.80	30.60	56.00	25.40
0.296	L1	0.1	51.40	60.30	8.90	46.50	50.30	3.80
0.510	L1	0.1	34.90	56.00	21.10	30.20	46.00	15.80
0.591	L1	0.1	44.90	56.00	11.10	39.60	46.00	6.40
0.872	L1	0.1	34.10	56.00	21.90	28.90	46.00	17.10
13.223	L1	0.5	38.40	60.00	21.60	27.50	50.00	22.50

Table 6-44. Line Conducted Data with 802.11a UNII Band 2 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 143 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

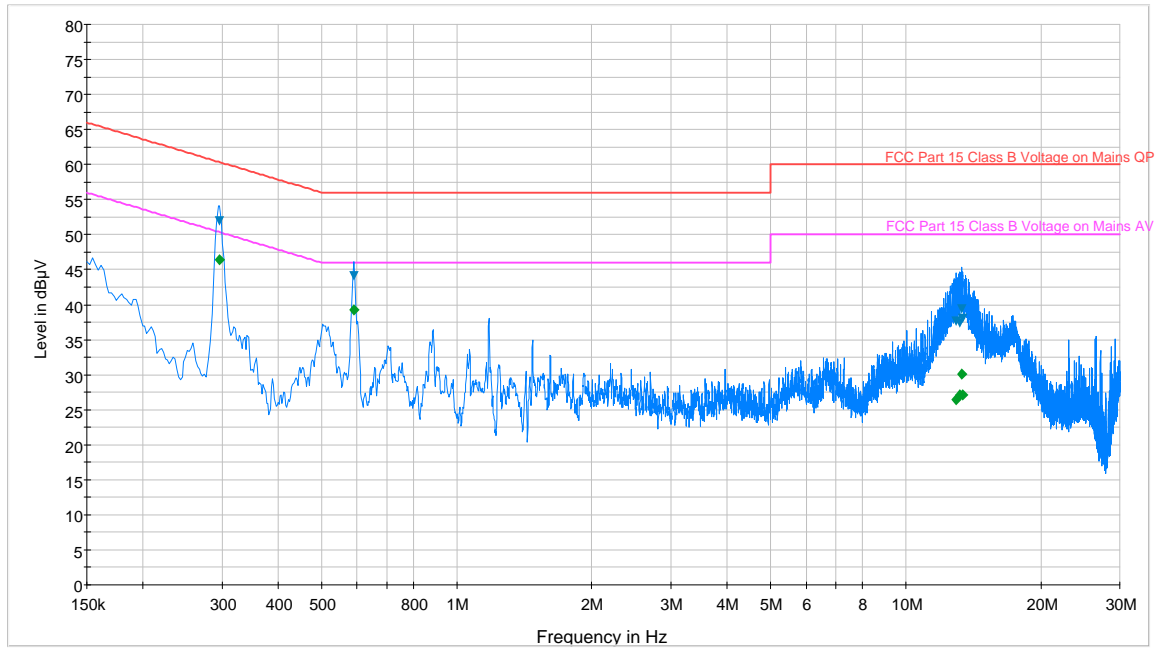

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▼ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-152. Line Conducted Plot with 802.11a UNII Band 2 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.296	N	0.2	52.00	60.30	8.30	46.40	50.30	3.90
0.589	N	0.1	44.10	56.00	11.90	39.30	46.00	6.70
12.968	N	0.5	37.70	60.00	22.30	26.50	50.00	23.50
13.232	N	0.5	37.40	60.00	22.60	27.10	50.00	22.90
13.324	N	0.5	39.50	60.00	20.50	30.10	50.00	19.90
13.396	N	0.5	38.00	60.00	22.00	27.20	50.00	22.80

Table 6-45. Line Conducted Data with 802.11a UNII Band 2 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 144 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

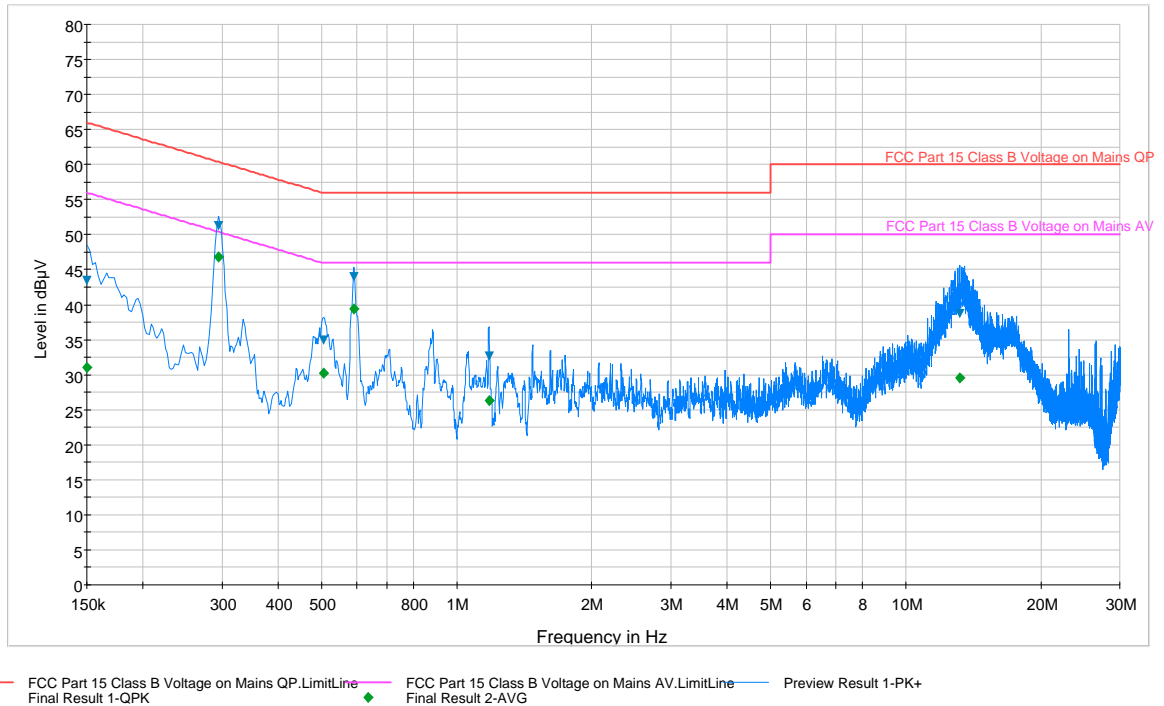

Plot 6-153. Line Conducted Plot with 802.11a UNII Band 3 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.150	L1	0.2	43.50	66.00	22.50	31.10	56.00	24.90
0.294	L1	0.1	51.30	60.40	9.10	46.80	50.40	3.60
0.506	L1	0.1	35.00	56.00	21.00	30.20	46.00	15.80
0.591	L1	0.1	44.00	56.00	12.00	39.30	46.00	6.70
1.181	L1	0.2	32.60	56.00	23.40	26.30	46.00	19.70
13.182	L1	0.5	38.80	60.00	21.20	29.50	50.00	20.50

Table 6-46. Line Conducted Plot with 802.11a UNII Band 3 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 145 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

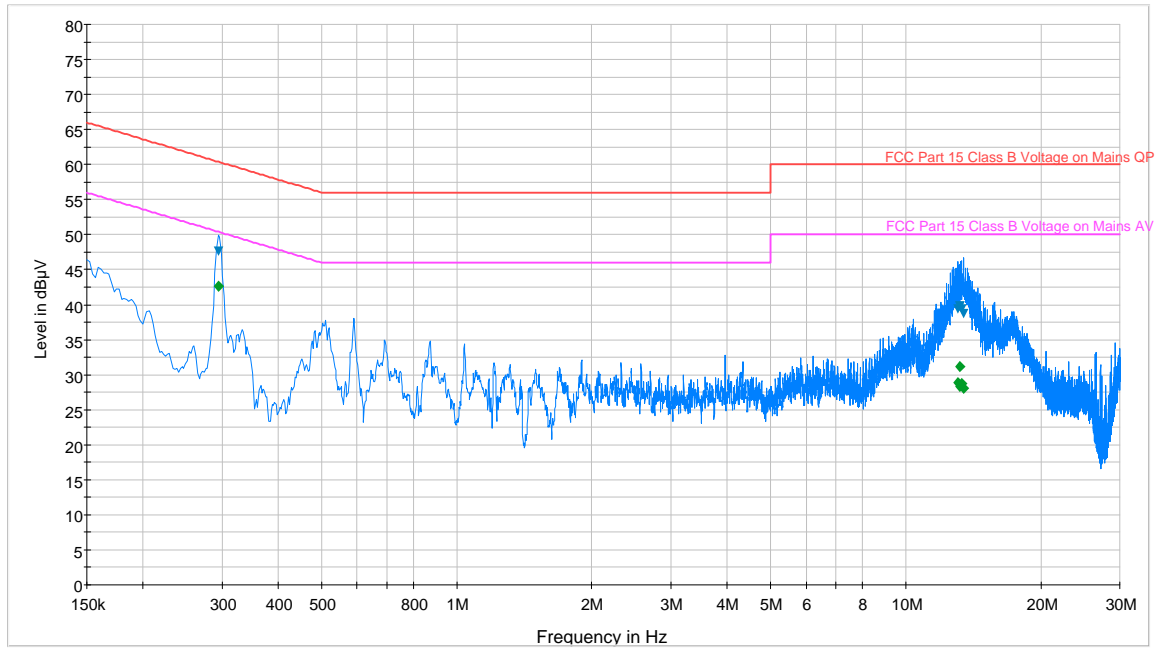

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▼ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 6-154. Line Conducted Plot with 802.11a UNII Band 3 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.2	47.60	60.40	12.80	42.60	50.40	7.80
13.054	N	0.5	39.40	60.00	20.60	28.90	50.00	21.10
13.173	N	0.5	39.70	60.00	20.30	28.30	50.00	21.70
13.191	N	0.5	39.80	60.00	20.20	31.20	50.00	18.80
13.301	N	0.5	39.30	60.00	20.70	28.70	50.00	21.30
13.479	N	0.5	38.70	60.00	21.30	28.00	50.00	22.00

Table 6-47. Line Conducted Data with 802.11a UNII Band 3 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 146 of 159

6.16 Antenna-2 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

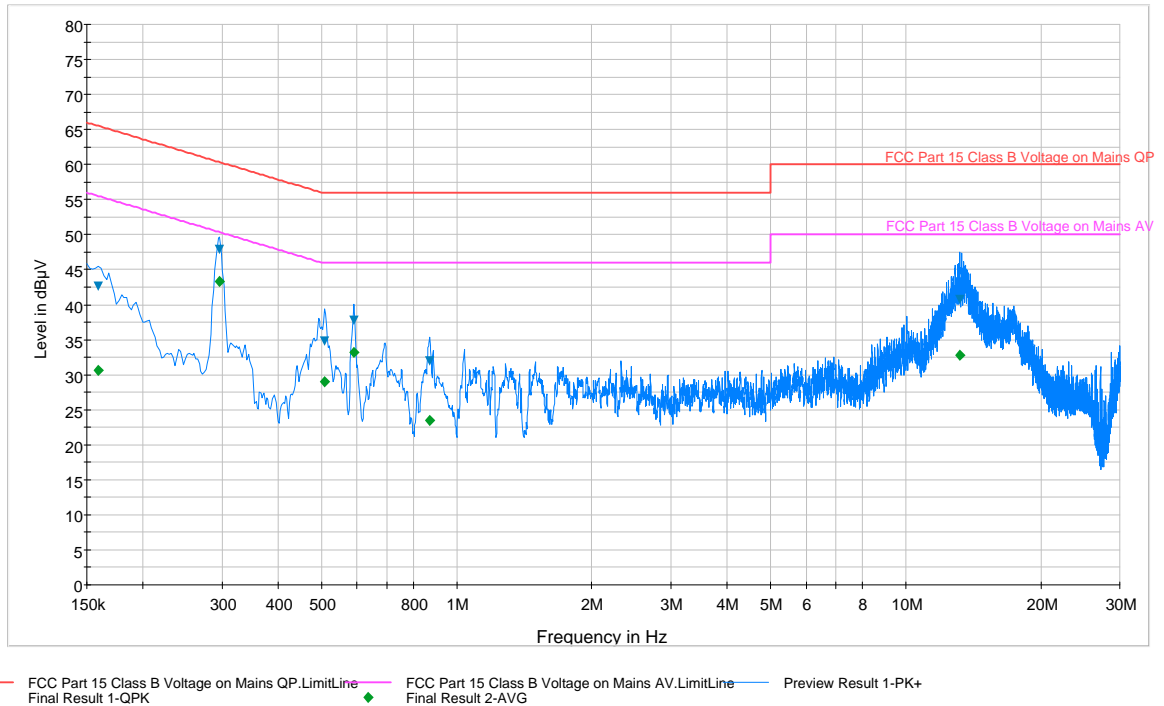

Plot 6-155. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.159	L1	0.2	42.60	65.50	22.90	30.60	55.50	24.90
0.296	L1	0.1	47.80	60.30	12.50	43.20	50.30	7.10
0.508	L1	0.1	34.80	56.00	21.20	29.00	46.00	17.00
0.591	L1	0.1	37.80	56.00	18.20	33.20	46.00	12.80
0.870	L1	0.1	31.90	56.00	24.10	23.50	46.00	22.50
13.196	L1	0.5	40.80	60.00	19.20	32.80	50.00	17.20

Table 6-48. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 147 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

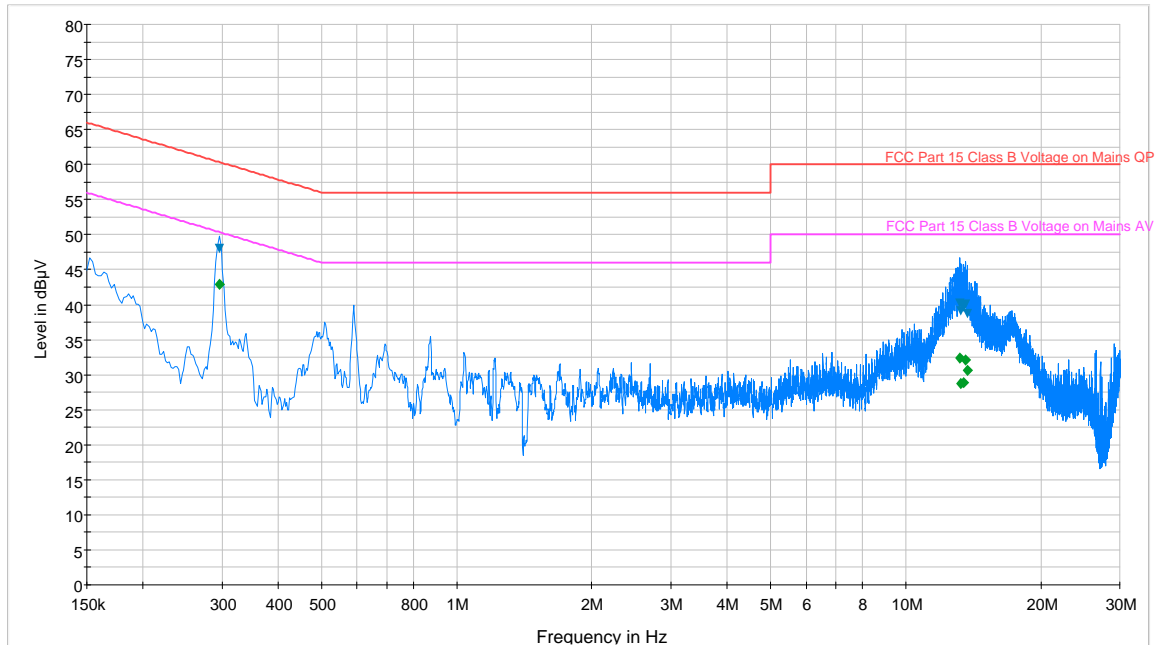

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▲ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-156. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.296	N	0.2	48.10	60.30	12.20	42.90	50.30	7.40
13.196	N	0.5	40.20	60.00	19.80	32.40	50.00	17.60
13.292	N	0.5	39.10	60.00	20.90	28.70	50.00	21.30
13.454	N	0.5	39.60	60.00	20.40	28.90	50.00	21.10
13.571	N	0.5	40.00	60.00	20.00	32.10	50.00	17.90
13.700	N	0.5	38.70	60.00	21.30	30.60	50.00	19.40

Table 6-49. Line Conducted Data with 802.11a UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 148 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

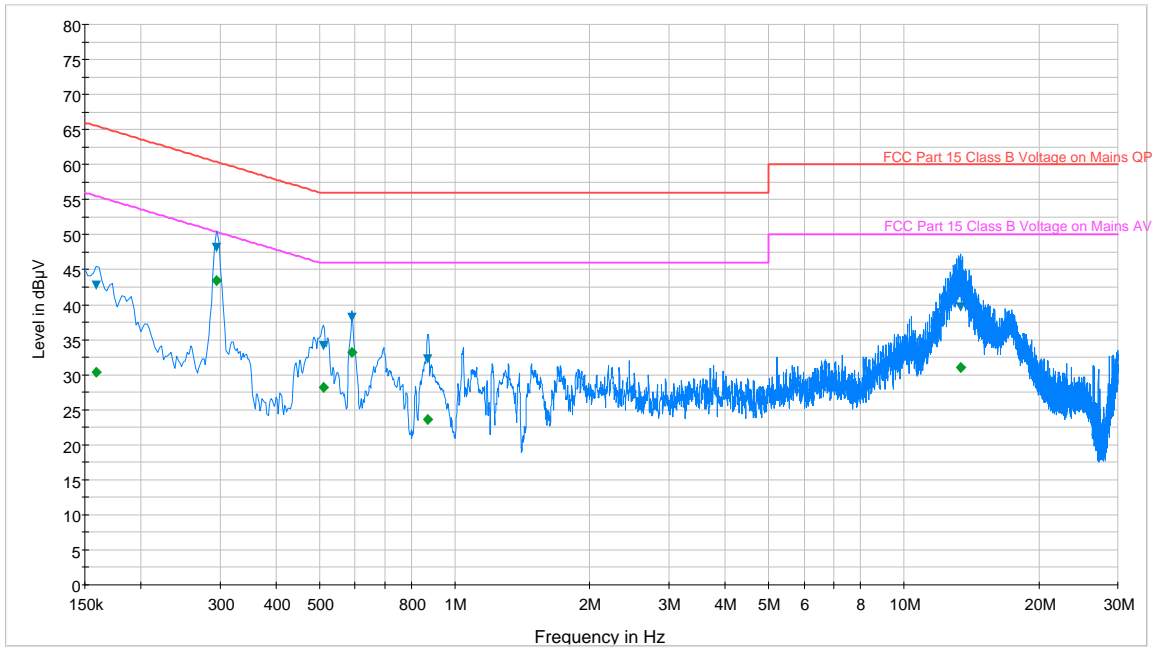

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▲ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-157. Line Conducted Plot with 802.11a UNII Band 2 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.159	L1	0.2	42.80	65.50	22.70	30.40	55.50	25.10
0.294	L1	0.1	48.10	60.40	12.30	43.40	50.40	7.00
0.510	L1	0.1	34.10	56.00	21.90	28.10	46.00	17.90
0.591	L1	0.1	38.10	56.00	17.90	33.10	46.00	12.90
0.870	L1	0.1	32.30	56.00	23.70	23.60	46.00	22.40
13.382	L1	0.5	39.60	60.00	20.40	31.00	50.00	19.00

Table 6-50. Line Conducted Data with 802.11a UNII Band 2 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 149 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

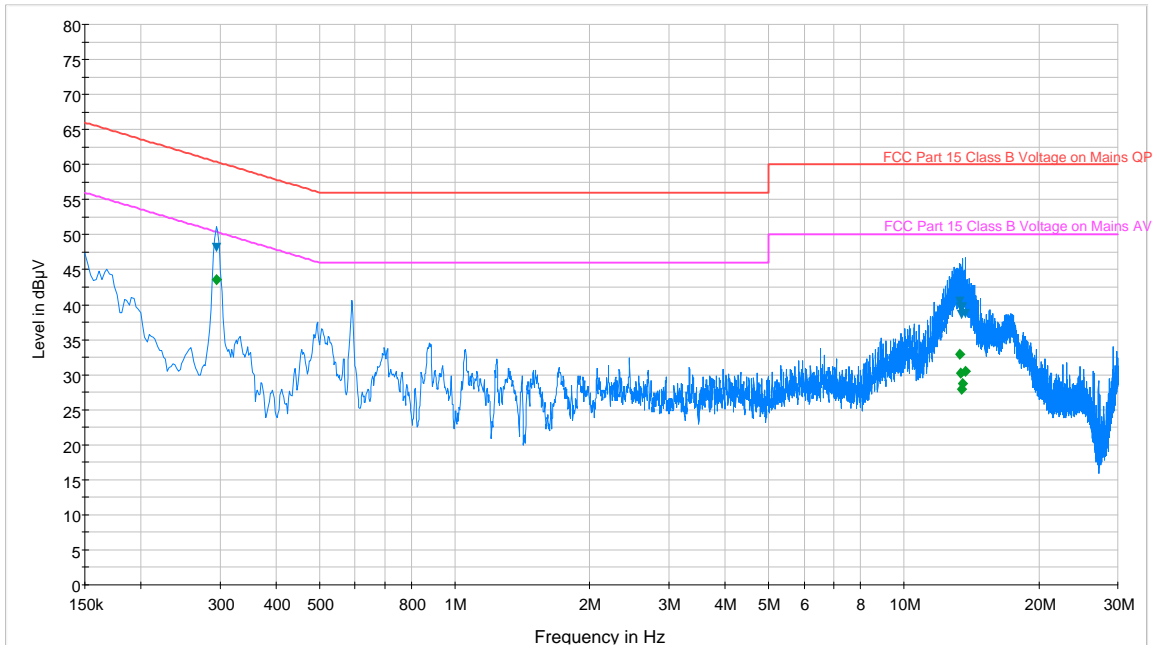

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▲ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 6-158. Line Conducted Plot with 802.11a UNII Band 2 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.2	48.20	60.40	12.20	43.50	50.40	6.90
13.319	N	0.5	40.40	60.00	19.60	32.90	50.00	17.10
13.382	N	0.5	39.70	60.00	20.30	30.20	50.00	19.80
13.468	N	0.5	38.60	60.00	21.40	28.00	50.00	22.00
13.504	N	0.5	39.60	60.00	20.40	28.80	50.00	21.20
13.700	N	0.5	38.70	60.00	21.30	30.40	50.00	19.60

Table 6-51. Line Conducted Data with 802.11a UNII Band 2 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 150 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

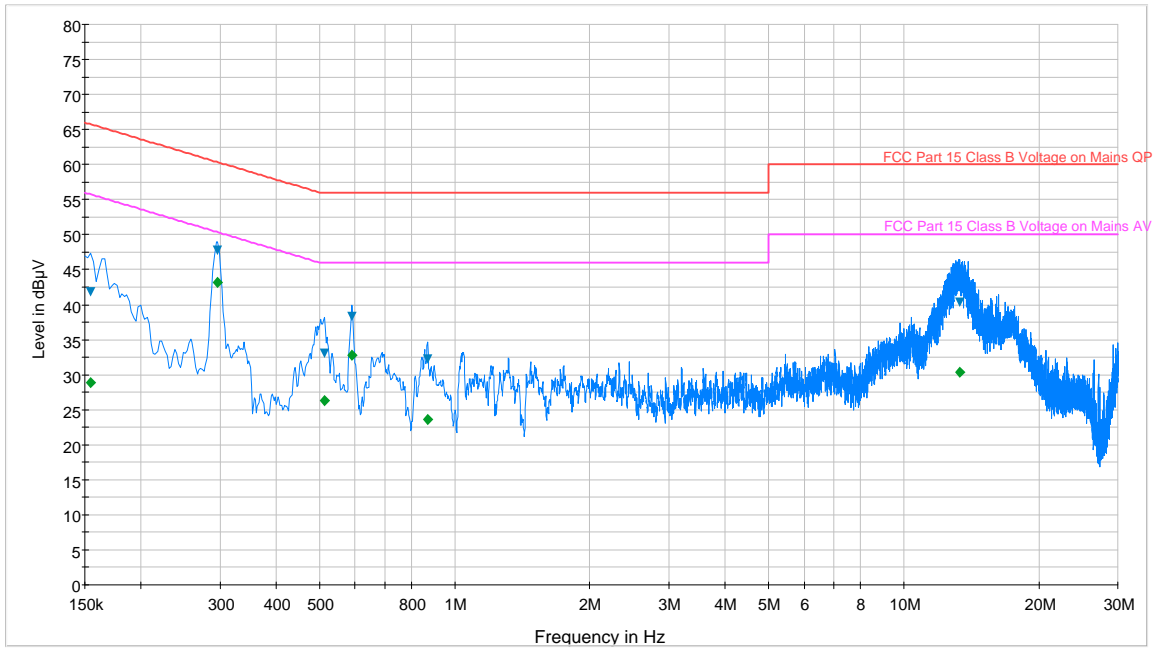

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+

Plot 6-159. Line Conducted Plot with 802.11a UNII Band 3 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.155	L1	0.2	41.80	65.80	24.00	28.90	55.80	26.90
0.296	L1	0.1	47.70	60.30	12.60	43.20	50.30	7.10
0.512	L1	0.1	33.10	56.00	22.90	26.40	46.00	19.60
0.591	L1	0.1	38.40	56.00	17.60	32.80	46.00	13.20
0.870	L1	0.1	32.30	56.00	23.70	23.70	46.00	22.30
13.308	L1	0.5	40.30	60.00	19.70	30.30	50.00	19.70

Table 6-52. Line Conducted Plot with 802.11a UNII Band 3 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 151 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

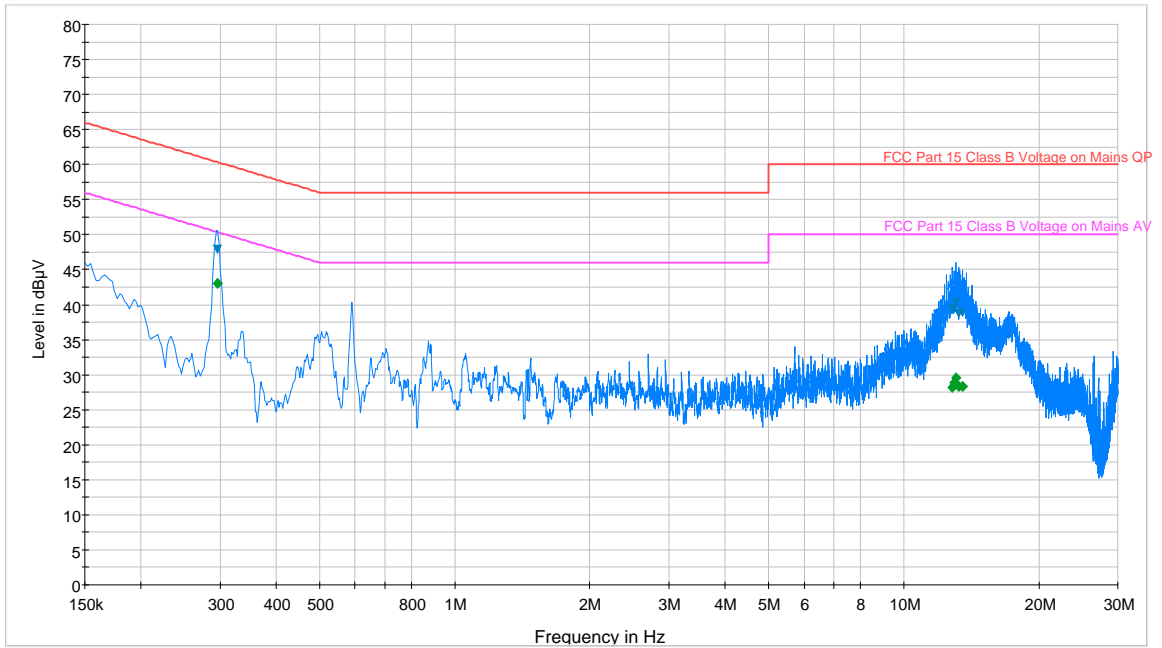

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-QPK+
▼ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-160. Line Conducted Plot with 802.11a UNII Band 3 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.296	N	0.2	47.90	60.30	12.40	43.00	50.30	7.30
12.829	N	0.5	39.40	60.00	20.60	28.10	50.00	21.90
12.950	N	0.5	39.40	60.00	20.60	28.90	50.00	21.10
13.056	N	0.5	40.40	60.00	19.60	29.50	50.00	20.50
13.279	N	0.5	38.80	60.00	21.20	28.30	50.00	21.70
13.502	N	0.5	38.80	60.00	21.20	28.40	50.00	21.60

Table 6-53. Line Conducted Data with 802.11a UNII Band 3 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 152 of 159

6.17 MIMO Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

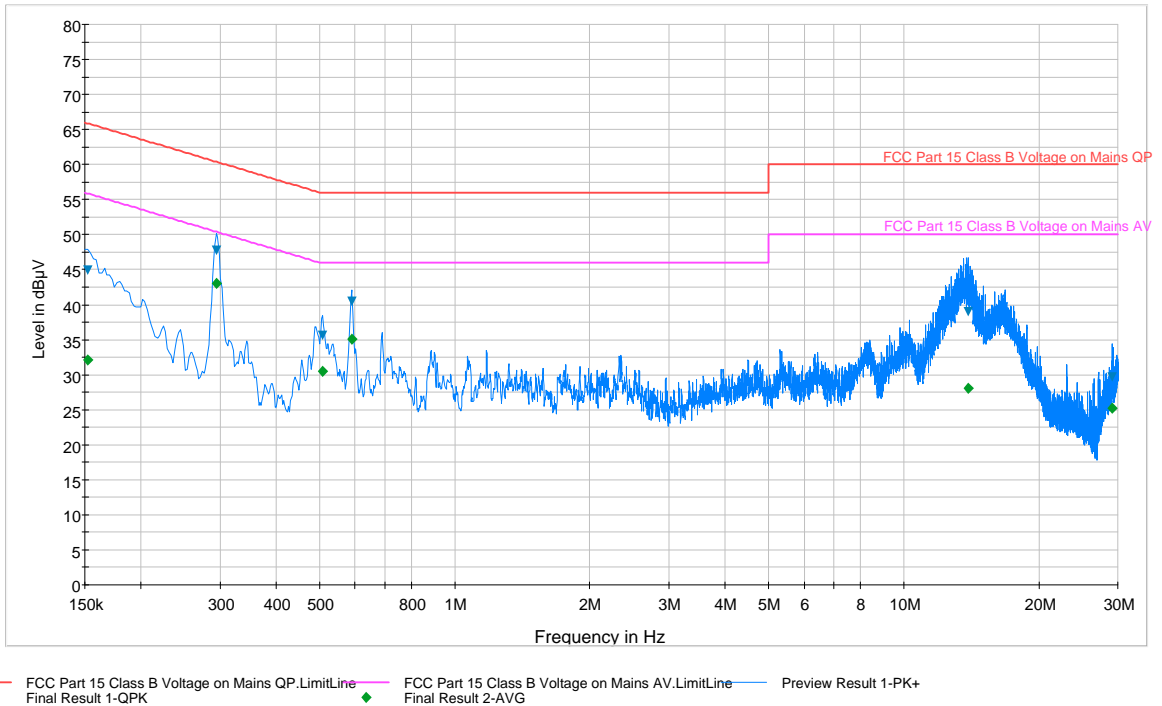

Plot 6-161. Line Conducted Plot with 802.11n UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.152	L1	0.2	44.90	65.90	21.00	32.20	55.90	23.70
0.294	L1	0.1	47.70	60.40	12.70	43.00	50.40	7.40
0.508	L1	0.1	35.60	56.00	20.40	30.50	46.00	15.50
0.589	L1	0.1	40.50	56.00	15.50	35.10	46.00	10.90
13.916	L1	0.5	39.00	60.00	21.00	28.00	50.00	22.00
29.114	L1	1.0	29.60	60.00	30.40	25.20	50.00	24.80

Table 6-54. Line Conducted Data with 802.11n UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 153 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

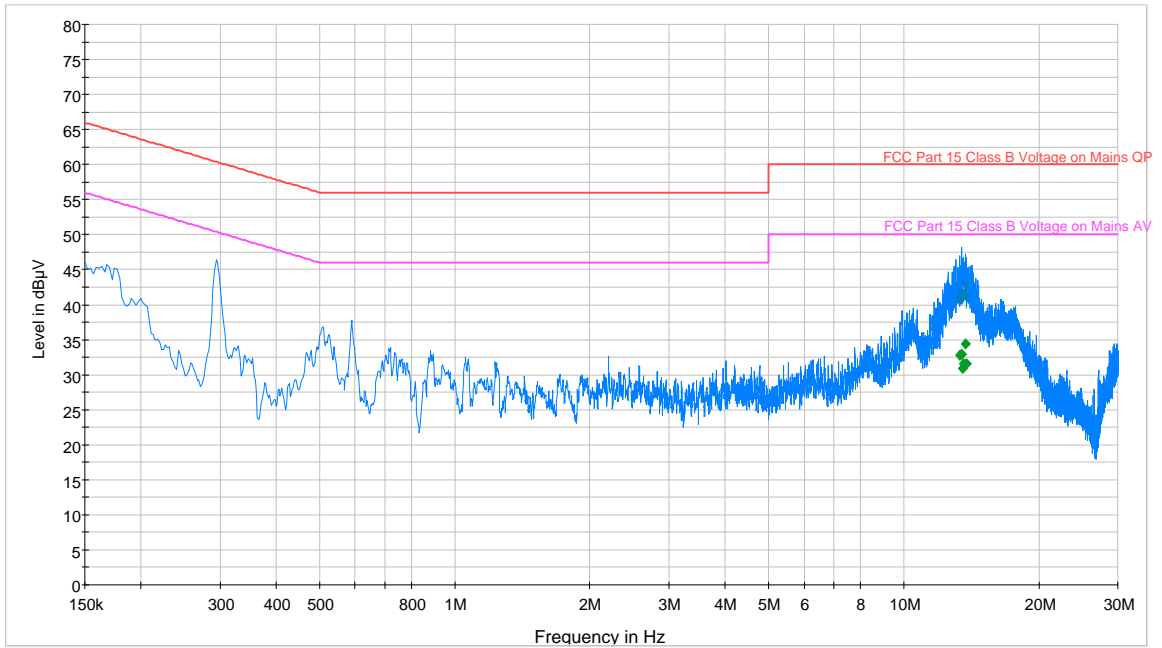

— FCC Part 15 Class B Voltage on Mains QP.LimitLine — FCC Part 15 Class B Voltage on Mains AV.LimitLine — Preview Result 1-PK+
▲ Final Result 1-QPK ◆ Final Result 2-AVG

Plot 6-162. Line Conducted Plot with 802.11n UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
13.326	N	0.5	40.50	60.00	19.50	32.80	50.00	17.20
13.452	N	0.5	41.30	60.00	18.70	32.90	50.00	17.10
13.553	N	0.5	40.80	60.00	19.20	30.80	50.00	19.20
13.583	N	0.5	41.60	60.00	18.40	31.50	50.00	18.50
13.702	N	0.5	42.60	60.00	17.40	34.40	50.00	15.60
13.817	N	0.5	41.10	60.00	18.90	31.60	50.00	18.40

Table 6-55. Line Conducted Data with 802.11n UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 154 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

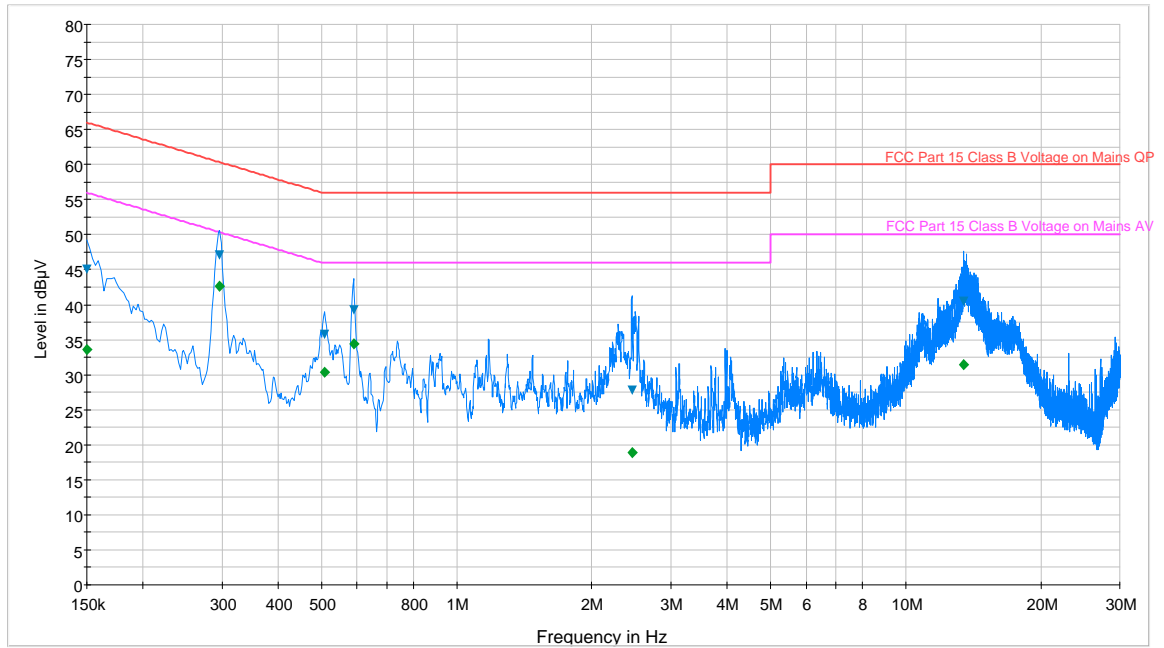

— FCC Part 15 Class B Voltage on Mains QP.LimitLine — FCC Part 15 Class B Voltage on Mains AV.LimitLine — Preview Result 1-PK+
▼ Final Result 1-QPK ◆ Final Result 2-AVG

Plot 6-163. Line Conducted Plot with 802.11n UNII Band 2 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.150	L1	0.2	45.10	66.00	20.90	33.60	56.00	22.40
0.296	L1	0.1	47.10	60.30	13.20	42.60	50.30	7.70
0.508	L1	0.1	35.70	56.00	20.30	30.30	46.00	15.70
0.589	L1	0.1	39.20	56.00	16.80	34.40	46.00	11.60
2.456	L1	0.2	27.70	56.00	28.30	18.90	46.00	27.10
13.452	L1	0.5	40.40	60.00	19.60	31.40	50.00	18.60

Table 6-56. Line Conducted Data with 802.11n UNII Band 2 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 155 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

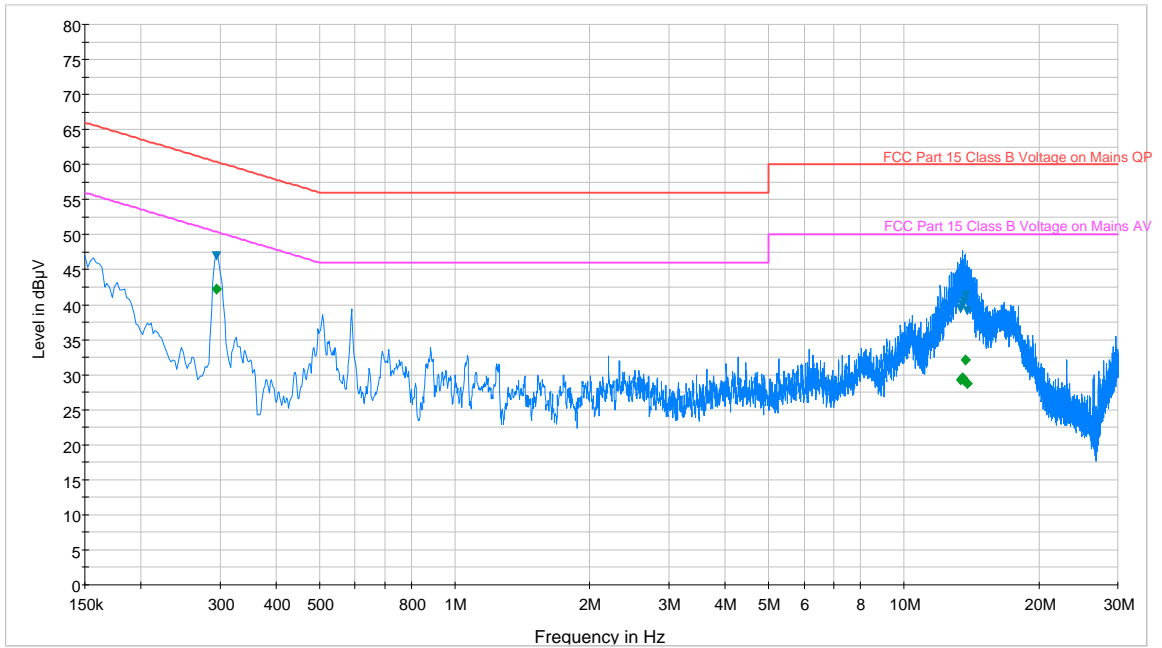

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▲ Final Result 1-QPK
◆ Final Result 2-AVG

Plot 6-164. Line Conducted Plot with 802.11n UNII Band 2 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.2	46.90	60.40	13.50	42.20	50.40	8.20
13.427	N	0.5	39.30	60.00	20.70	29.20	50.00	20.80
13.551	N	0.5	40.00	60.00	20.00	29.60	50.00	20.40
13.677	N	0.5	40.40	60.00	19.60	29.20	50.00	20.80
13.697	N	0.5	41.20	60.00	18.80	32.10	50.00	17.90
13.871	N	0.5	39.10	60.00	20.90	28.70	50.00	21.30

Table 6-57. Line Conducted Data with 802.11n UNII Band 2 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 156 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

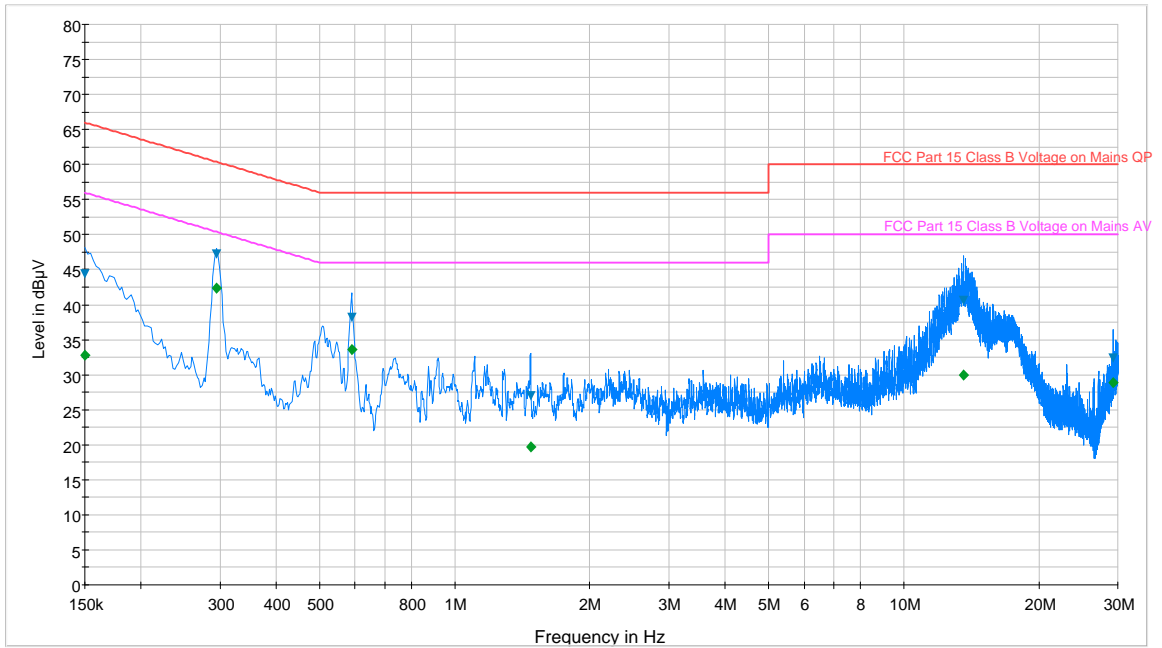

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
 ◆ Final Result 2-AVG
 ▼ Final Result 1-QPK

Plot 6-165. Line Conducted Plot with 802.11n UNII Band 3 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.150	L1	0.2	44.30	66.00	21.70	32.80	56.00	23.20
0.294	L1	0.1	47.20	60.40	13.20	42.30	50.40	8.10
0.589	L1	0.1	38.20	56.00	17.80	33.50	46.00	12.50
1.475	L1	0.2	27.00	56.00	29.00	19.60	46.00	26.40
13.585	L1	0.5	40.60	60.00	19.40	30.00	50.00	20.00
29.236	L1	1.0	32.40	60.00	27.60	28.90	50.00	21.10

Table 6-58. Line Conducted Plot with 802.11n UNII Band 3 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 157 of 159

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

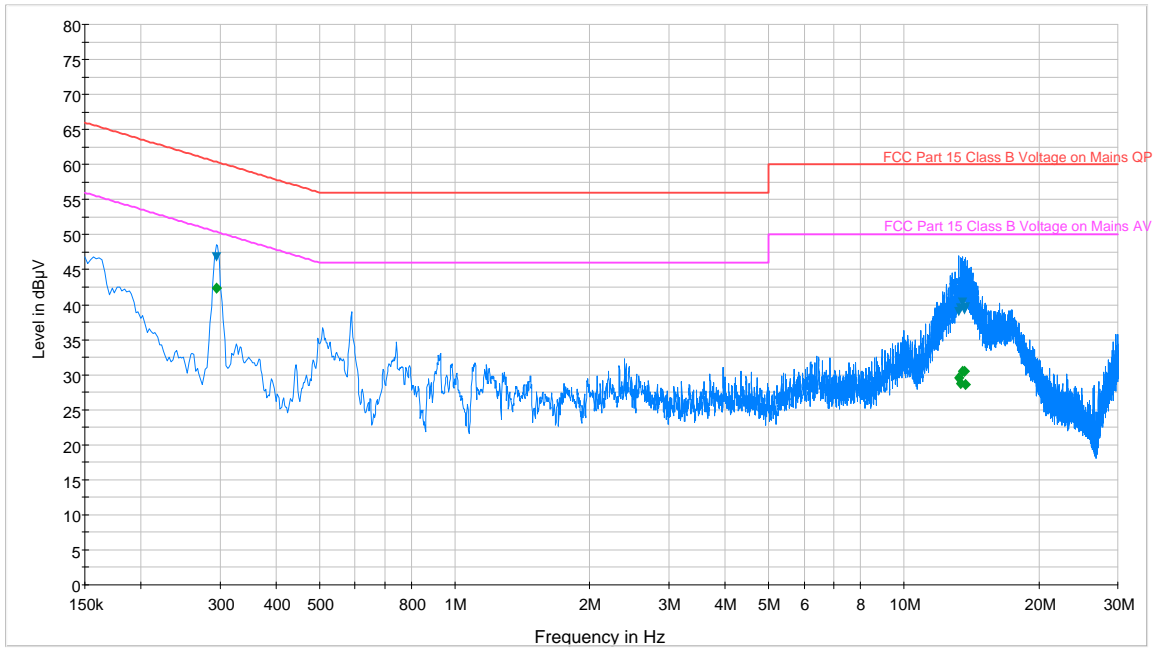

— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 6-166. Line Conducted Plot with 802.11n UNII Band 3 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.2	46.80	60.40	13.60	42.40	50.40	8.00
13.259	N	0.5	39.00	60.00	21.00	29.60	50.00	20.40
13.380	N	0.5	39.50	60.00	20.50	28.70	50.00	21.30
13.513	N	0.5	40.40	60.00	19.60	30.50	50.00	19.50
13.639	N	0.5	39.20	60.00	20.80	30.50	50.00	19.50
13.749	N	0.5	39.70	60.00	20.30	28.60	50.00	21.40

Table 6-59. Line Conducted Data with 802.11n UNII Band 3 (N)



Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11n mode using MCS8 on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 158 of 159

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Wireless LAN Multimedia Box FCC ID: A3LGTB9150** is in compliance with Part 15E of the FCC Rules.

FCC ID: A3LGTB9150		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1302280376.A3L	Test Dates: 02/28/2013 - 03/15/2013	EUT Type: Wireless LAN Multimedia Box		Page 159 of 159