


	1	2	3	4	5	6	7	8	
A			Rev. No						
B									
C									
D									
E									
F									
G	<p>Technical Description</p> <ol style="list-style-type: none"> 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper 								
H									
I									
J	MAT. White polypropylene 80 μ			FIN. Semitransparency OPP Lamination + UVP Coating					
K	TITLE GT-C5010D			LABEL (R)-MAIN-EU					
L	UNIT mm		DESIGNED jukyun Kim	CHECKED kyeonghwan jo	APPROVED junesop kim	PROJECTION			
	TOLERANCE +0.0 / -0.1					SHEET NO 1/1			
	SCALE N / S								
	Manufacture HANSUNG P&I		10-04-28	10-04-28	10-04-28				
			Doc. CODE		GH68-28757D				

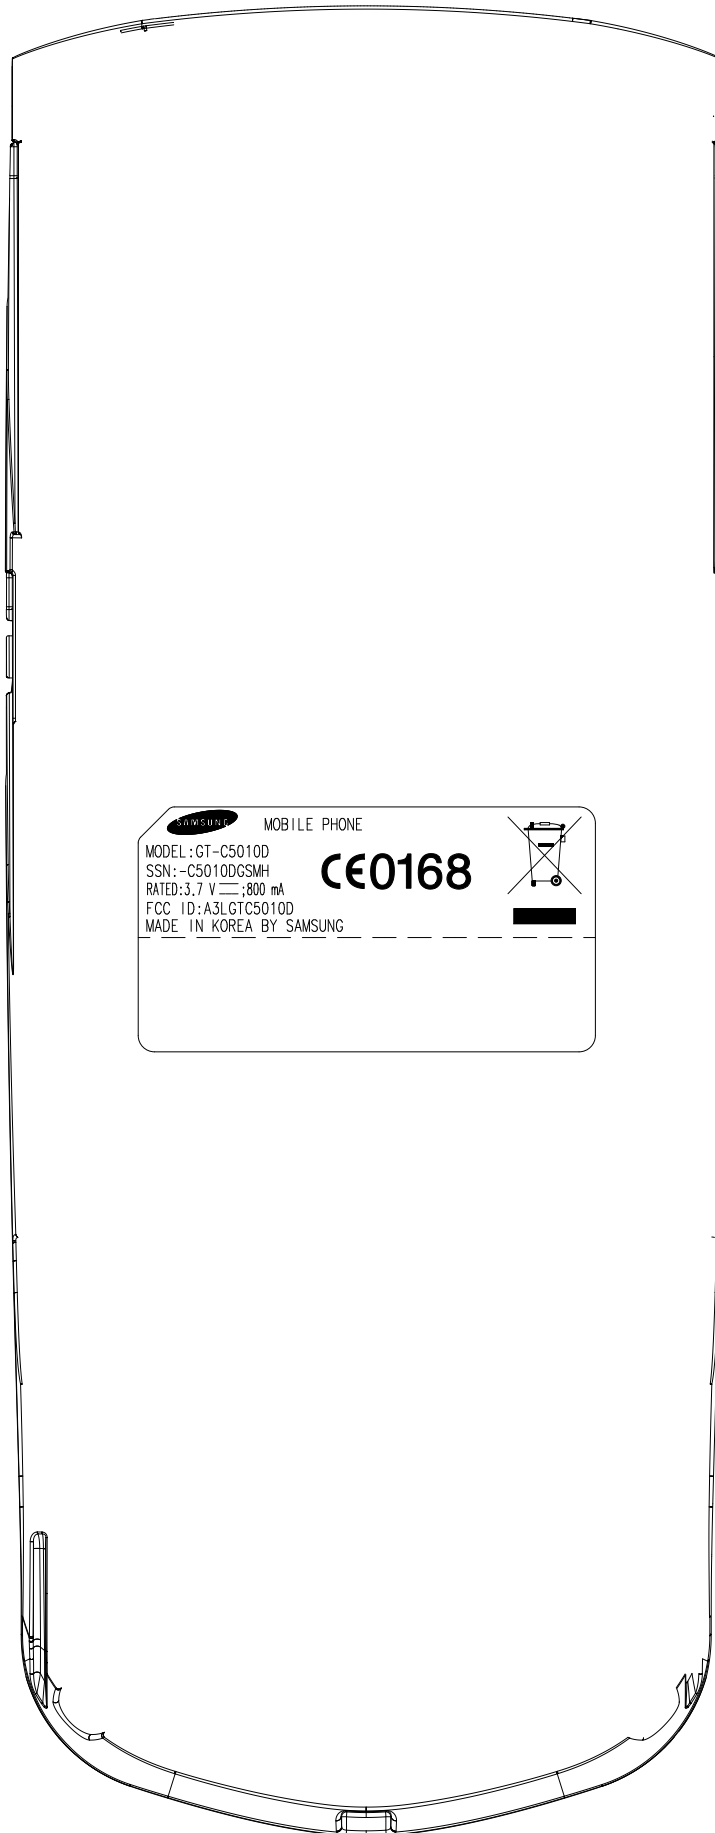

The label is placed inside the battery compartment

The FCC ID Label shown will be readily visible at the time of purchase.