




# EMC TEST REPORT

<b>Project No.</b>	LBE20115477	<b>Issue No.</b>	1
<b>Applicant</b>	<b>Name of organization</b>	Samsung Electronics Co., Ltd.	
	<b>Address</b>	416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	<b>Date of application</b>	December 2, 2011	
<b>EUT</b>	<b>Type of device</b>	Class B personal computers and peripherals	
	<b>Equipment authorization</b>	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	<b>FCC ID</b>	A3LGTE2222L	
	<b>Kind of product</b>	Mobile Phone	
	<b>Model No.</b>	GT-E2222L	
	<b>Variant Model No.</b>	Refer to clause 3.5	
	<b>Manufacturer</b>	<b>Samsung Electronica Da Amazonia Ltda.</b> 730-722 CEP13097-105Av. Thomas Nilsen Junior, 150 Predio A Pq Imperador Campinas SP, Brazil	
<b>Applied Standards</b>		FCC Part 15, Subpart B, Class B / ANSI C63.4-2003	
<b>Test Period</b>		December 12, 2011 ~ December 13, 2011	
<b>Issue date</b>		December 16, 2011	
<b>Test result : Complied</b> The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
<b>Tested by</b> : Young-Jin Kim 		<b>Reviewed by</b> : Tae-Young Jang 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.			
 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-so, 443-742, Republic of Korea Tel: 82 31 279 1750, Fax: 82 31 279 1745			

# Table of contents

## 1. Summary of test results .

1.1 Emission .....	3
--------------------	---

## 2. General Information

2.1 Test facility .....	3
-------------------------	---

## 3. Test Configuration

3.1 Test Peripherals .....	3
3.2 EUT operating mode .....	4
3.3 Details of Sampling .....	4
3.4 Used cable description .....	4
3.5 EUT Description .....	5
3.6 Clock Frequencies .....	5
3.7 Test configuration and condition .....	6
3.8 Measurement uncertainty .....	6

## 4. Result of individual tests

4.1 Conducted disturbance .....	7
4.2 Radiated disturbance .....	9

# 1. Summary of test results

## 1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result	Remarks
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2003	Complied	Meets Class B Limit
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied	Meets Class B Limit

## 2. General Information

### 2.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation Characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

## 3. Test Setup configuration

### 3.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Description	Model No.	Serial No.	Manufacturer/ Trademark	FCC ID / DoC
Mobile Phone	GT-E2222L	R29BB65722J	SAMSUNG	A3LGTE2222L
Battery	AB463651BU	YA1ZB177S/4-B	SAMSUNG	-
Headset	EHS49AS0ME	-	SAMSUNG	-
Data Cable	ECC1DU0BBK	-	SAMSUNG	-
microSD Card	2GB	-	SANDISK	-
Note PC	NT-P530	-	SAMSUNG	DoC
AC Adapter	AD-6019R	CNBA4400242ADON80 4S01X2	SAMSUNG	-
USB mouse	B138	Z5F8353	SAMSUNG	DoC
USB Keyboard	GP-K5000U	15000099	SAMSUNG	DoC

### 3.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

<b>Operating Mode 1</b>	USB Mode (Data Communication)
-------------------------	-------------------------------

### 3.3 Details of Sampling

Customer selected, single unit.

### 3.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected;

Connected cable	Length [m]	Shielded [Y/N]	Note
Data Cable	0.8	Yes	From EUT to Note PC
Headset	1.6	No	For Headset
Power	1.8	No	For AC Adapter
USB	1.8	Yes	From Note PC to Mouse
USB	1.5	Yes	From Note PC to Keyboard
LAN cable	1.5	Yes	From Note PC to LAN Port

### 3.5 EUT Description

1. The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM850	TX : 824.2 ~ 848.8 MHz RX : 869.2 ~ 893.8 MHz
	DCS1900	TX : 1850.2 ~ 1909.8 MHz RX : 1930.2 ~ 1989.8 MHz
Size (Standard Battery)	109.5 (L) * 61.3 (W) * 11.85 (H) (mm)	
Weight (Standard Battery)	90 g (±1 g)	
LCD Specification	Main 2.2 Inch, TFT (176 x 220 QCIF)	
Operating Temperature (°C)	-20 ~ +60	
Operating Humidity (%)	0 ~ 95	
Bluetooth	TX/RX Frequency : 2 402 ~ 2 480 MHz Version : 2.1	
Memory	Internal Memory : 50MB External Memory : microSD (Max. 16 GB)	

2. The variant models

- None

### 3.6 Clock Frequencies

Kind of Clocks	Frequency [ MHz ]
CPU	208
USB 2.0	12

### 3.7 Test configuration and condition

The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested.

This program was contained on the PC hard disk drive.

Once loaded, the program sequentially exercises each system component in turn.

The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

**- Test Voltage : AC 120 V, 60 Hz**

### 3.8 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

#### 3.8.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	$\pm 3.03$ dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	$\pm 4.61$ dB
	Vertical	$\pm 4.60$ dB
Radiated Disturbance (1 GHz ~ 6 GHz)		$\pm 4.09$ dB

## 4. Results of individual test

### 4.1 Conducted disturbance

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB( $\mu$ V)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

#### 4.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-046	Test Receiver	ESCS30	R&S	830986/004	2011-02-11	12
E3I-049	LISN	ESH3-Z5	R&S	100260	2011-01-13	12

#### 4.1.2 Temperature and humidity condition

<b>Test date</b>	2011-12-12	<b>Test engineer</b>	Young-Jin Kim
<b>Climate condition</b>	Ambient temperature	23.5 °C	Limit (15.0 to 35.0) °C
	Relative humidity	46.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.3 kPa	Limit (86.0 to 106.0) kPa
<b>Test place</b>	Shield Room (SR8)		

### 4.1.3 Test results

#### - Operating Mode 1: AC Mains

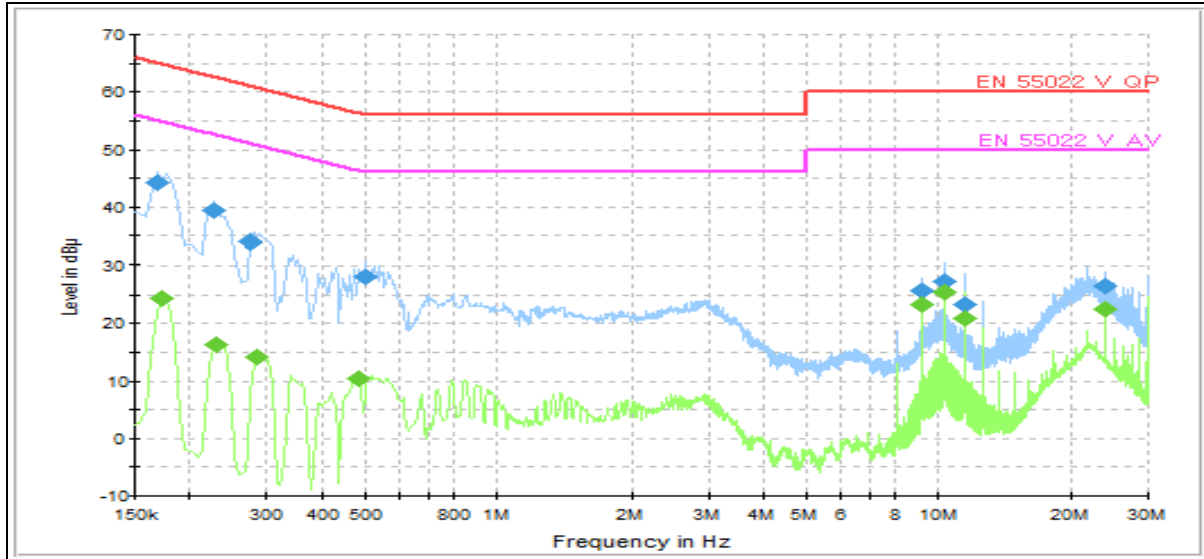

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dBµV)	Corr. (dB)	Limit (dBµV)	Margin (dB)	Line
0.168 000	44.2	0.2	65.10	20.90	L1
0.226 500	39.4	0.2	62.60	23.20	L1
0.276 000	34.0	0.2	60.90	26.90	L1
0.505 500	28.1	0.2	56.00	27.90	L1
9.172 500	25.8	0.4	60.00	34.20	N
10.315 500	27.3	0.4	60.00	32.70	L1
11.458 500	23.4	0.5	60.00	36.60	L1
23.910 000	26.6	0.9	60.00	33.40	L1

Average final measurement results table:

Frequency (MHz)	Level (dBµV)	Corr. (dB)	Limit (dBµV)	Margin (dB)	Line
0.172 500	24.3	0.2	54.80	30.50	L1
0.231 000	16.4	0.2	52.40	36.00	L1
0.285 000	14.2	0.2	50.70	36.50	L1
0.483 000	10.3	0.2	46.30	36.00	L1
9.172 500	23.3	0.4	50.00	26.70	N
10.315 500	25.4	0.4	50.00	24.60	L1
11.458 500	20.8	0.5	50.00	29.20	L1
23.910 000	22.5	0.8	50.00	27.50	N

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)  
 Margin (QP and/or AV) = Limit – Level (QP and/or AV)  
 QP = Quasi-Peak, AV = Average

## 4.2 Radiated disturbance

Of those disturbances above ( $L - 20\text{dB}$ ), where  $L$  is the limit level in logarithmic units, record at least the disturbance levels and the frequencies of the six highest disturbances.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	RBW	VBW	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	120 kHz	300 kHz	Continuous

Measurements within 20 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detectors.

Peak/Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5<sup>th</sup> harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	RBW	VBW	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	1 MHz (PK / AV)	3 MHz (PK) 10 Hz (AV)	Continuous

Measurements within 20 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and average detectors.

### Limits for radiated disturbance of ITE at a measuring distance of 3 m

Frequency range Limits [ MHz ]	Field Strength	
	$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

Results checked manually; and points close to the limit line were re-measured.

#### 4.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-130	BILOG Antenna	CBL6112D	TESEQ	25513	2010-11-12	24
E3I-170	Double-Ridged Waveguide Horn Antenna	R&S	HF906	100028	2010-10-07	24
E3I-175	Preamplifier	310N	Sonoma	273121	2011-12-06	12
E3I-257	EMI Test Receiver	ESU26	R&S	100364	2011-10-24	12


#### 4.2.2 Temperature and humidity condition

<b>Test date</b>	2011-12-13	<b>Test engineer</b>	Young-Jin Kim
<b>Climate condition</b>	Ambient temperature	24.2 °C	Limit (15.0 to 35.0) °C
	Relative humidity	44.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.5 kPa	Limit (86.0 to 106.0) kPa
<b>Test place</b>	Semi-Anechoic Chamber (SAC4)		

### 4.2.3 Test results

Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

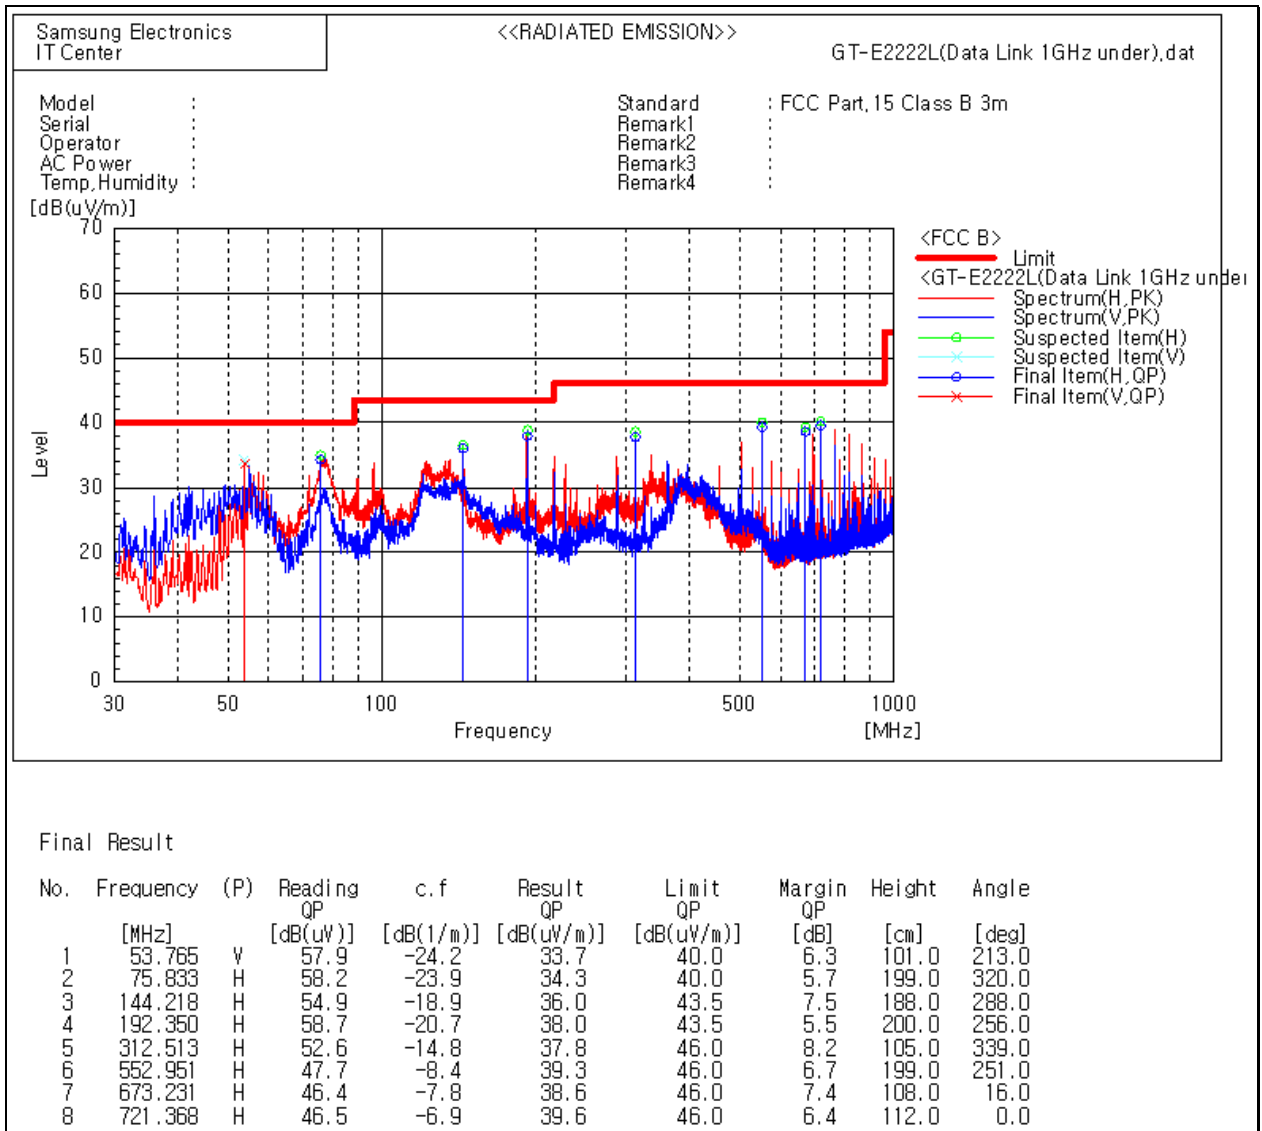

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak

Operating Mode 1

- Frequency range: 1 000 ~ 6 000 MHz

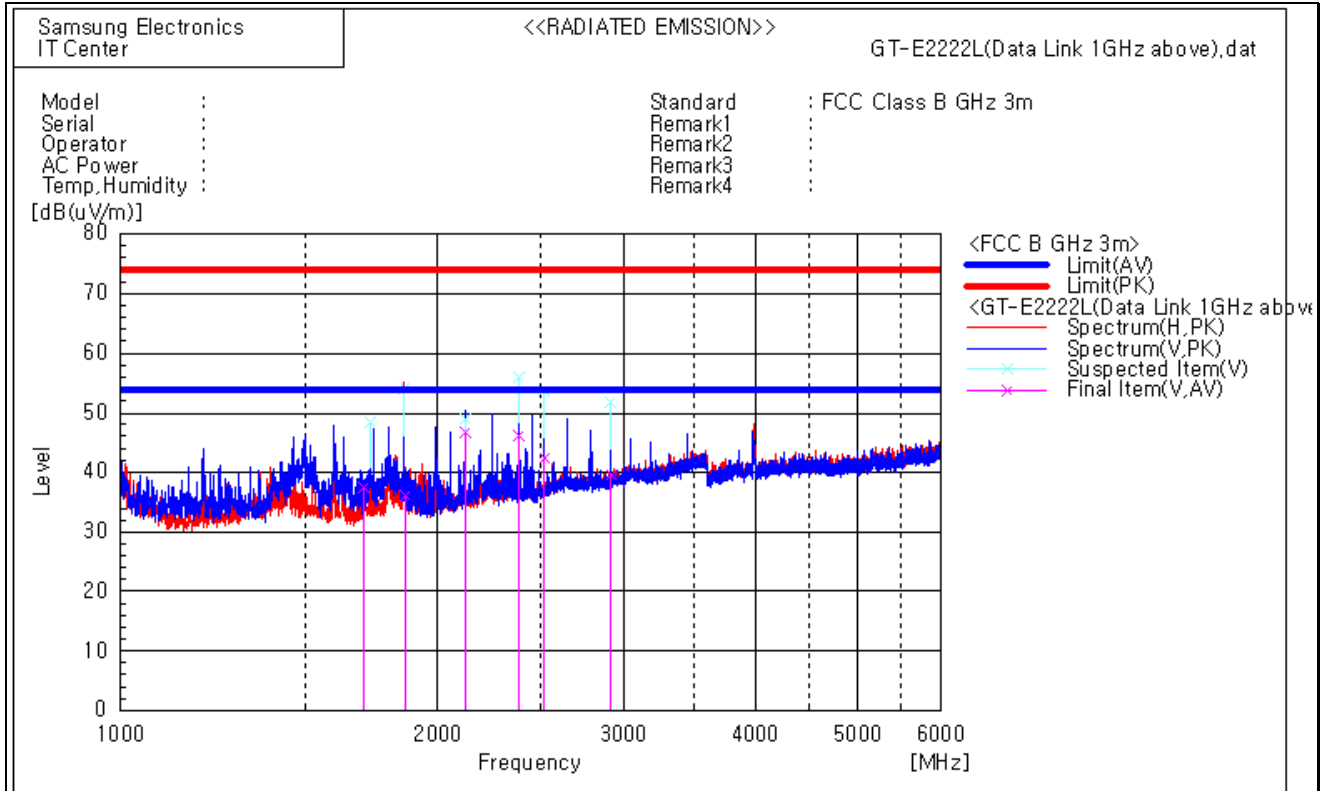

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(uV/m)]	c.f [dB(1/m)]	Result AV [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2387.983	V	51.2	-5.0	46.2	54.0	7.8	177.0	31.0
2	1862.238	V	43.8	-7.7	36.1	54.0	17.9	138.0	69.0
3	2122.594	V	53.0	-6.3	46.7	54.0	7.3	115.0	22.0
4	2924.350	V	42.4	-2.8	39.6	54.0	14.4	115.0	8.0
5	2521.113	V	46.6	-4.2	42.4	54.0	11.6	100.0	36.0
6	1701.657	V	46.3	-8.8	37.5	54.0	16.5	100.0	16.0

Note1) Representative operating modes were selected by customer and any emissions that do NOT exceed Average limit were not tested with peak detector mode.

Note2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or AV) = Reading (PK and/or AV) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or AV) = Limit - Level (PK and/or AV)

PK = Peak, AV = Average