



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**TABLET WITH 802.11BGN, BT3.0**

**MODEL NUMBER: GT-P3113**

**FCC ID: A3LGTP3113**

**REPORT NUMBER: 12I14205-1**

**ISSUE DATE: FEBRUARY 09, 2012**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON CITY, GYEONGGI-DO 443-742  
SOUTH KOREA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	02/09/12	Initial Issue	F. Ibrahim





# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON CITY, GYEONGGI-DO 443-742, SOUTH KOREA

**EUT DESCRIPTION:** TABLET WITH 802.11BGN, BT3.0

**MODEL:** GT-P3113

**SERIAL NUMBER:** 03050(CONDUCTED) and 03048(RADIATED)

**DATE TESTED:** JANUARY 19 - 31, 2012


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



FRANK IBRAHIM  
EMC SUPERVISOR  
UL CCS

MENGISTU MEKURIA  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Tablet with 802.11bgn, BT3.0

The radio module is manufactured by Broadcom Corporations.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range	Mode	Output Power (dBm)	Output Power (mW)
2412-2462	802.11b	13.33	21.53
2412-2462	802.11g	18.71	74.30
2412-2462	802.11n HT20	18.35	68.39

**5.3. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an 802.11 b/g/n and a Bluetooth antenna, with a maximum gain as stated in the table below:

No.	Contents	Standards			Unit	Condition	Remarks
		Min.	Avg.	Max.			
1	Gain of BT/WIFI	-6.4	-	-1.4	dBi	Based on Max. Gain in H-Plane.	
2	VSWR of BT/WIFI	1.2	1.7	2.2	-	2213 MHz	Jig Data
		1.2	1.7	2.2	-	2233 MHz	

**5.4. SOFTWARE AND FIRMWARE**

Bluetooth firmware - BCM4330B1\_002.001.003.0634.0678.hcd  
 Wi-Fi Firmware Rev 5.90.125.1191

EUT driver software version: P3113.001

**5.5. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For the fundamental investigation, since the EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated, also with AC/DC adapter, and earphone, and the worst case was found to be at Y orientation with headset alone.

Worst-case data rates used for the testing as provided by the client were as follows:

- 802.11b Mode: 1Mbps
- 802.11g Mode: 6Mbps
- 802.11n HT20 Mode: MCS0

**5.6. DESCRIPTION OF TEST SETUP**

**SUPPORT EQUIPMENT**

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA-P11X	3046	N/A
Headset	Samsung	EHS64AVFWE	3040	N/A


**I/O CABLES (CONDUCTED SETUP)**

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	UnShielded	2.0m	NA
2	DC	1	USB	Shielded	1.0m	NA
3	RF	1	SMA	Shielded	0.1 m	NA


**I/O CABLES (RADIATED SETUP)**

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	Mini USB	1	USB	shielded	1m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.2 m	Volume control attached

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

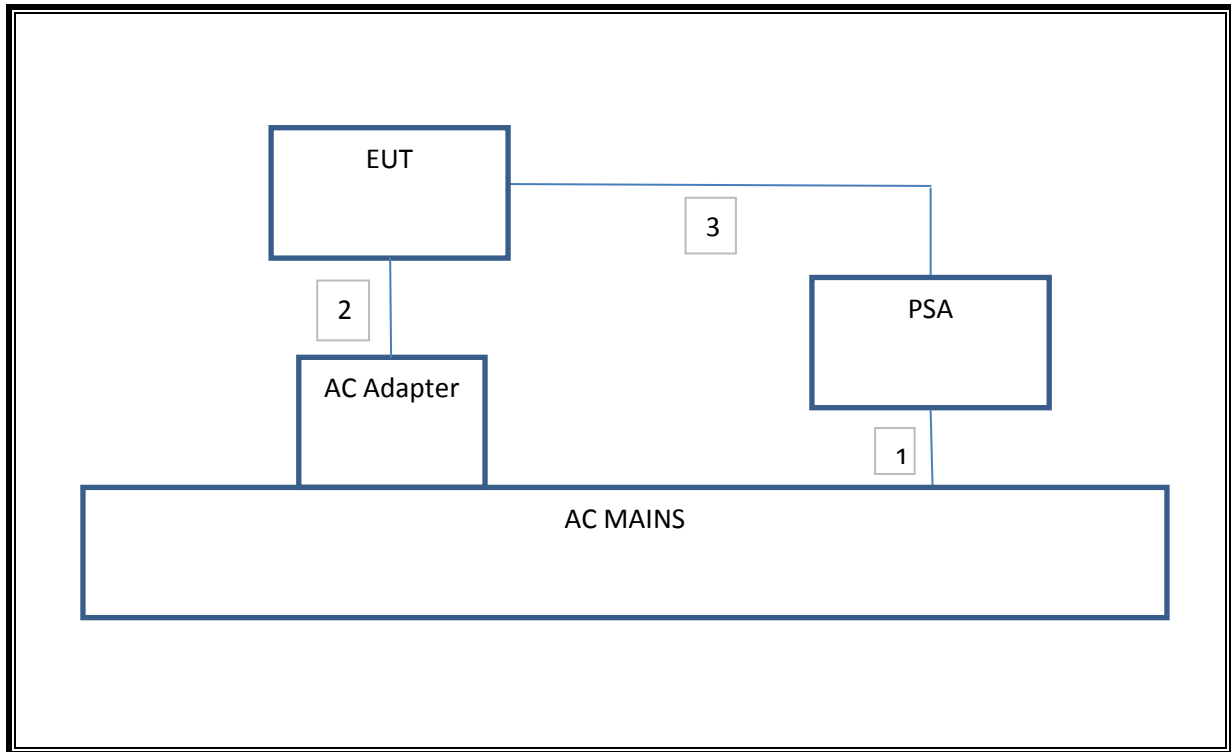

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

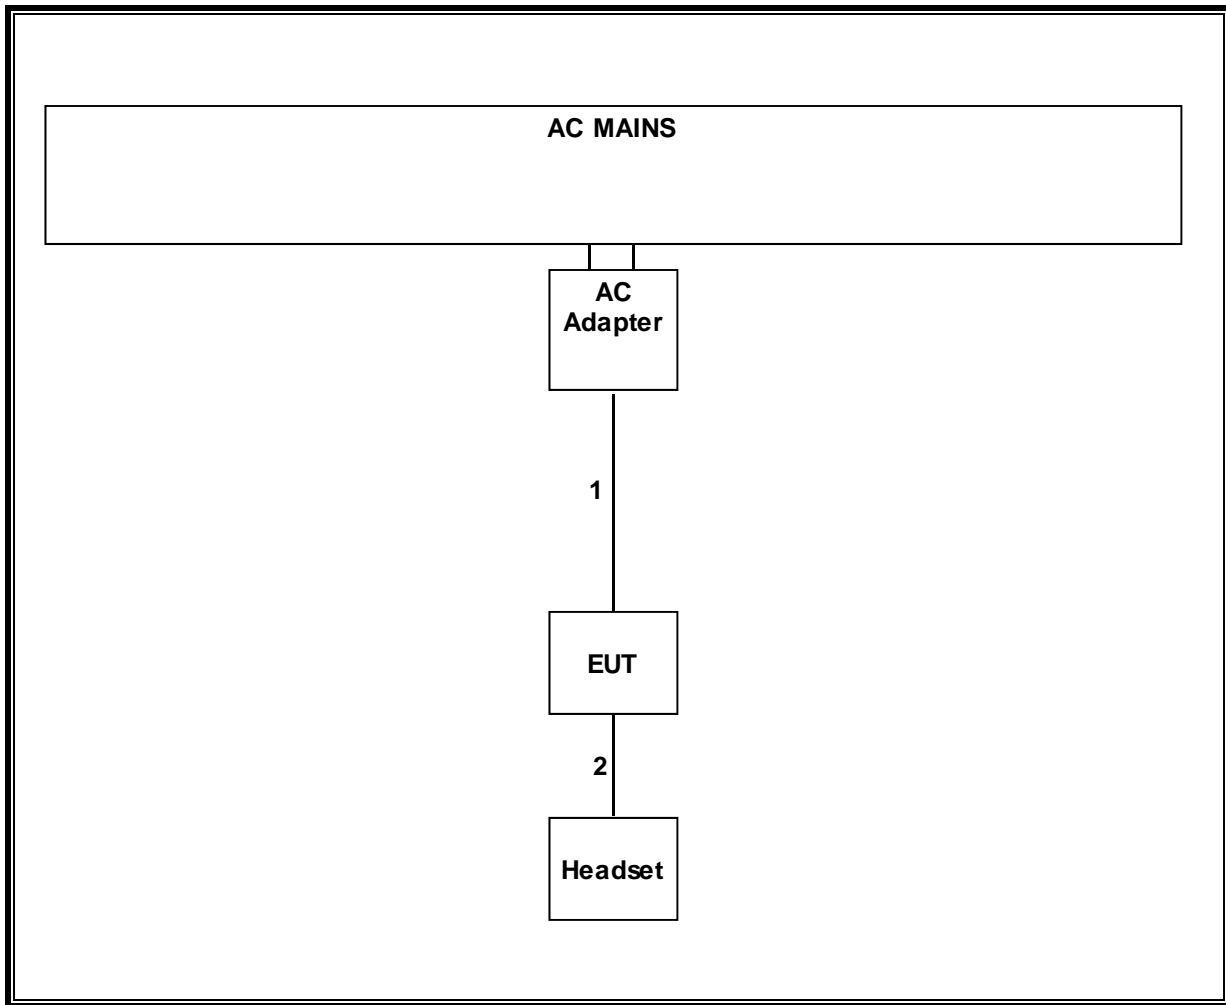

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	01/28/11	04/28/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/15/11	08/15/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	07/06/11	07/06/12
Antenna, Bilog, 2 GHz	Sundt Sciences	JB1	C01011	07/16/11	07/16/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/11	06/29/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/11	01/27/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/18/11	07/18/12
Power Meter	Agilent / HP	437B		07/28/11	07/28/12
Power Sensor, 18 GHz	Agilent / HP	8481A	N02782	07/29/11	07/29/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	12/13/11	12/13/12
Antenna, Horn, 26.5 GHz	ARA	MMH-1826/B	C00589	07/28/11	07/28/12

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 802.11b MODE IN THE 2.4 GHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


##### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.07	0.5
Middle	2437	8.07	0.5
High	2462	8.07	0.5

**6 dB BANDWIDTH**

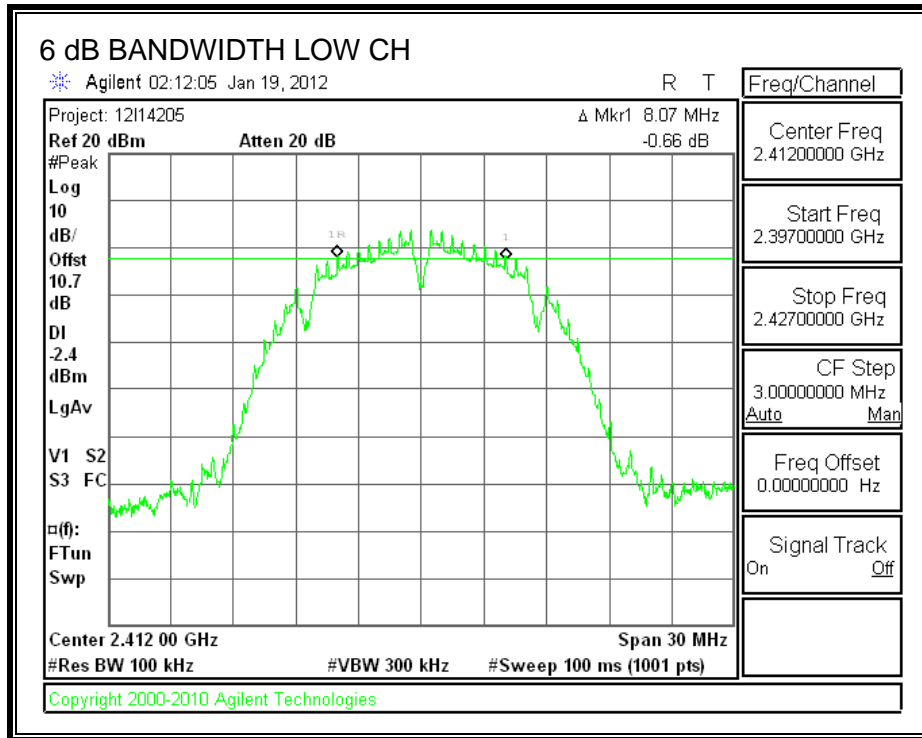

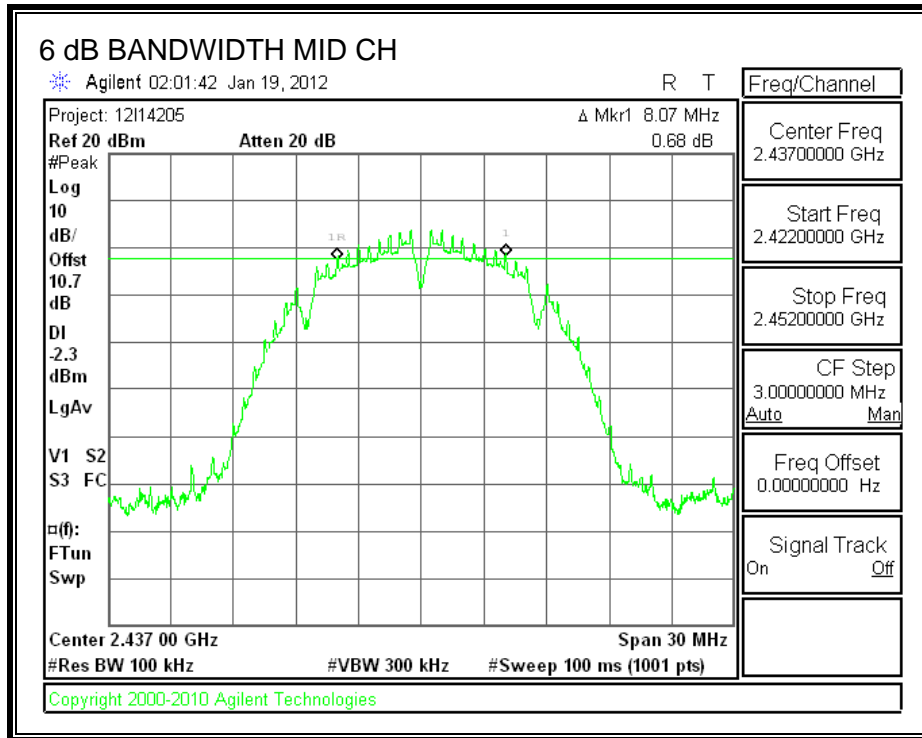

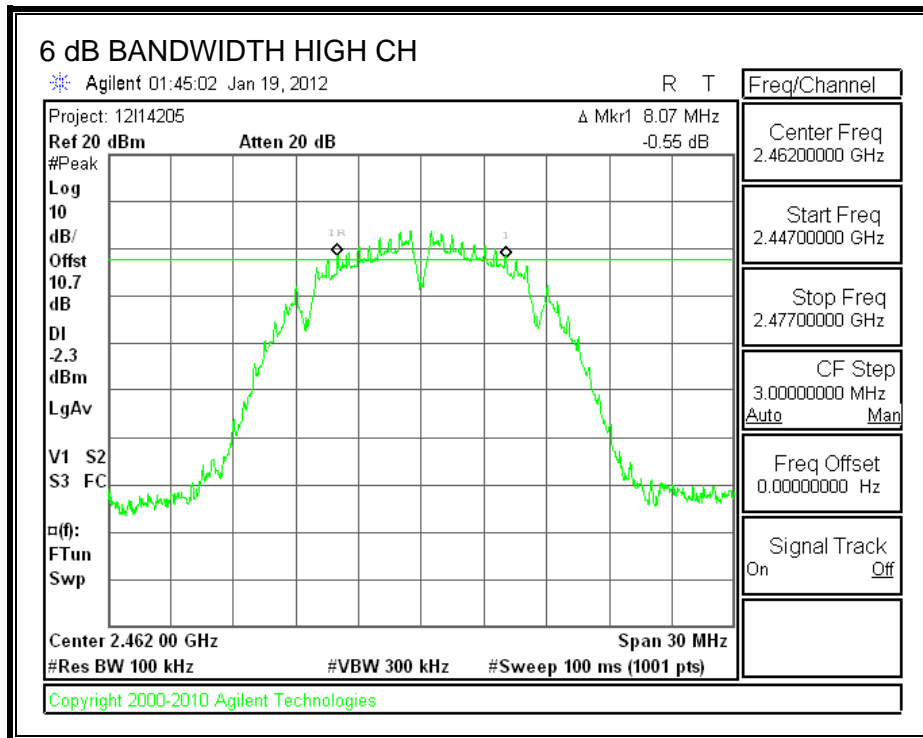

## 7.1.2. OUTPUT POWER

### LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


### TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


### RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	2.55	10.64	13.19	30	-16.81
Middle	2437	2.66	10.64	13.30	30	-16.70
High	2462	2.69	10.64	13.33	30	-16.67

**OUTPUT POWER**

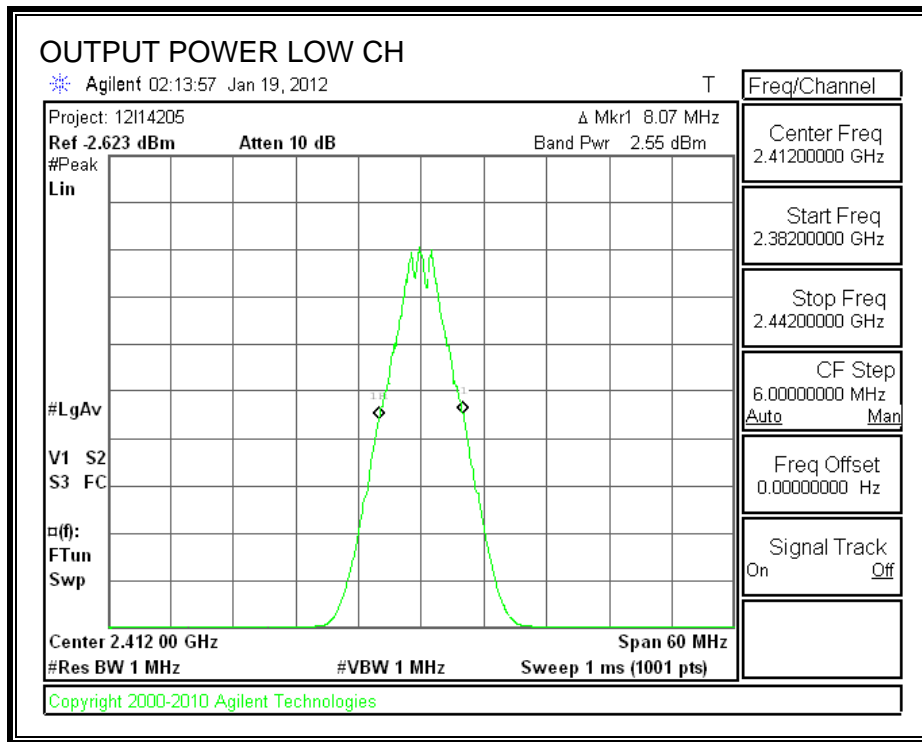

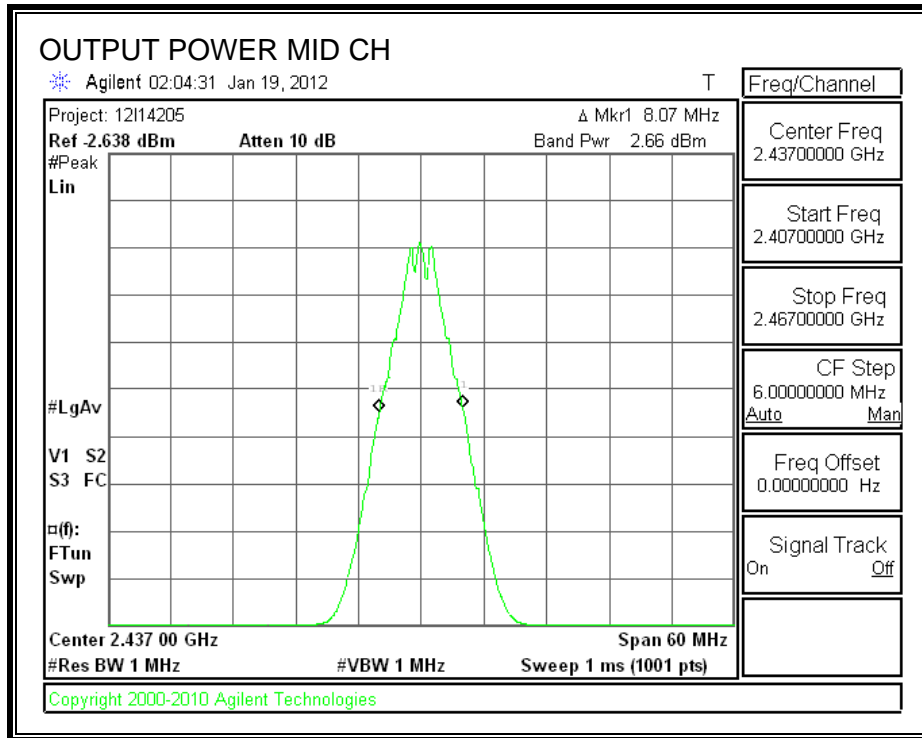

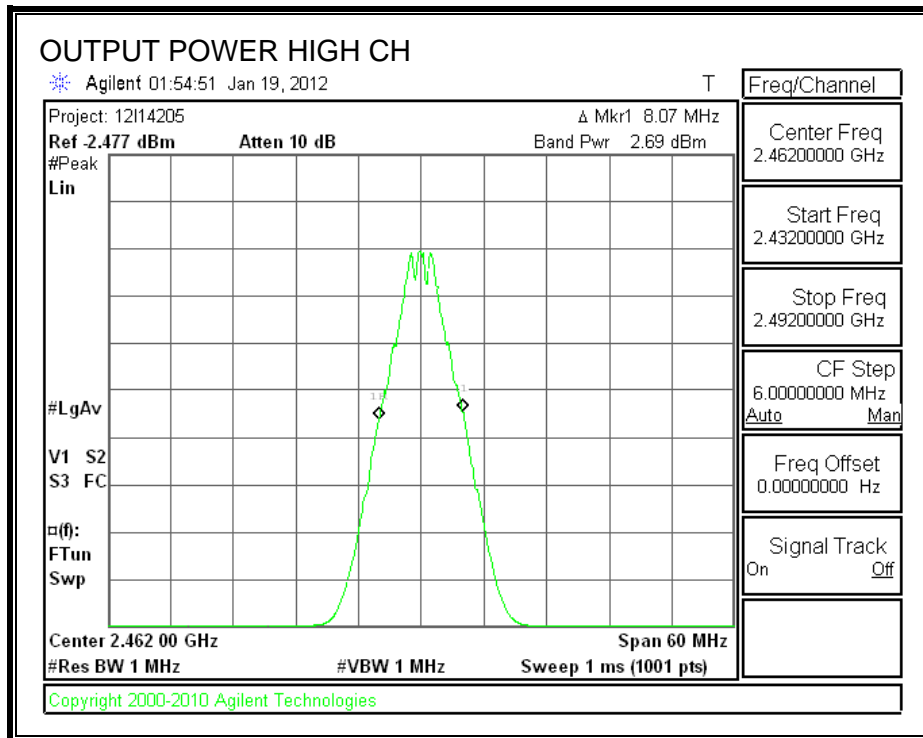

### 7.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.88 dB (including 10 dB pad and 1.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Frequency (MHz)	Power (dBm)
2412	11.68
2437	11.69
2462	11.66

## 7.1.4. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### TEST PROCEDURE

Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.49	8	-16.49
Middle	2437	-8.36	8	-16.36
High	2462	-8.02	8	-16.02

**POWER SPECTRAL DENSITY**

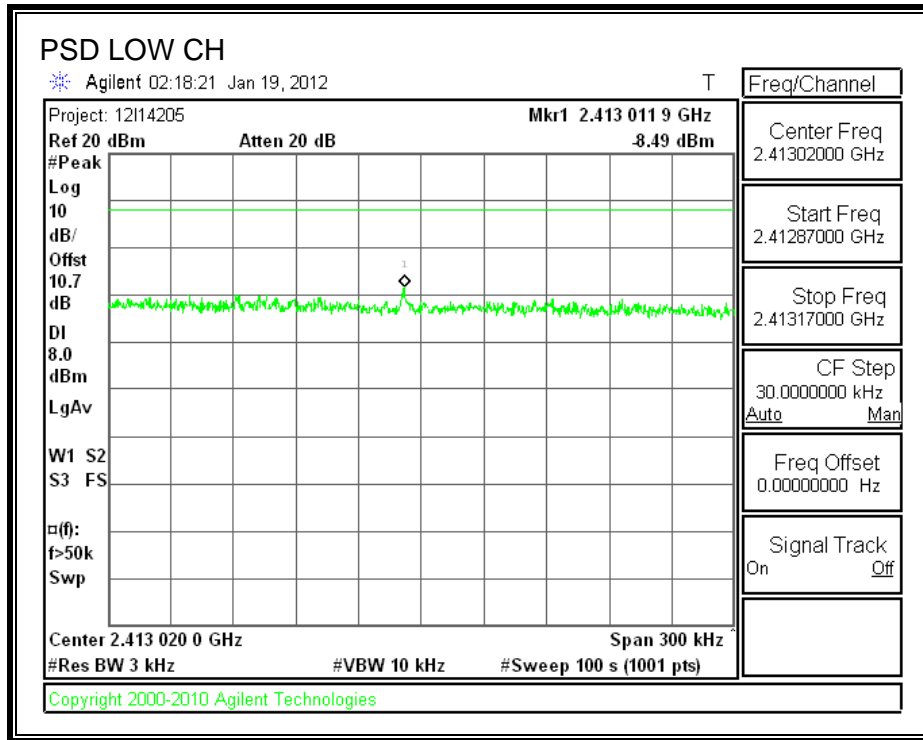



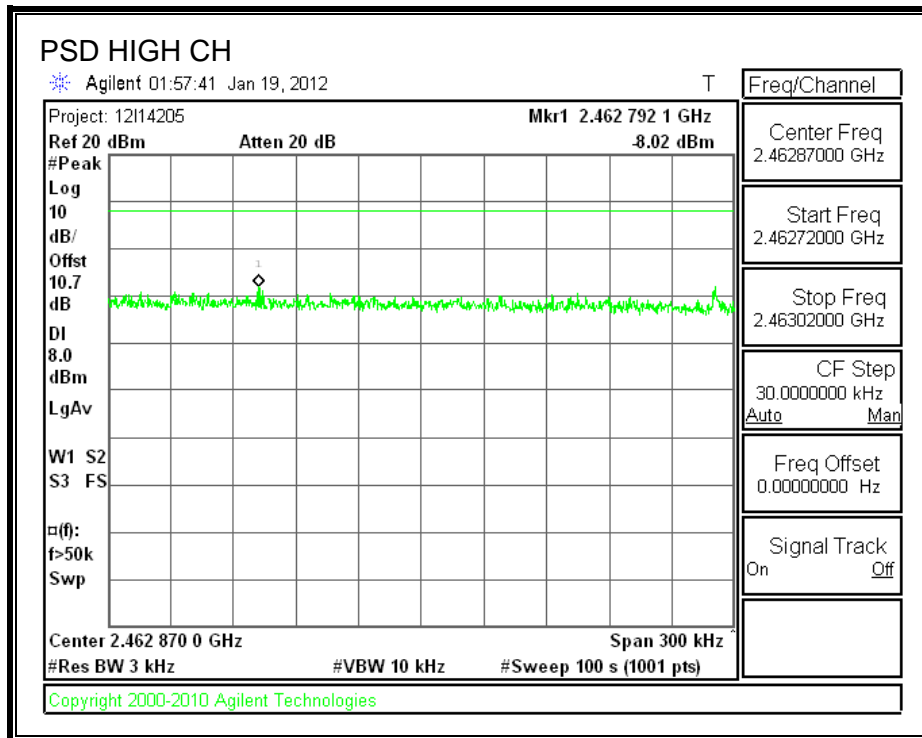

## **7.1.5. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


**RESULTS**


**SPURIOUS EMISSIONS, LOW CHANNEL**

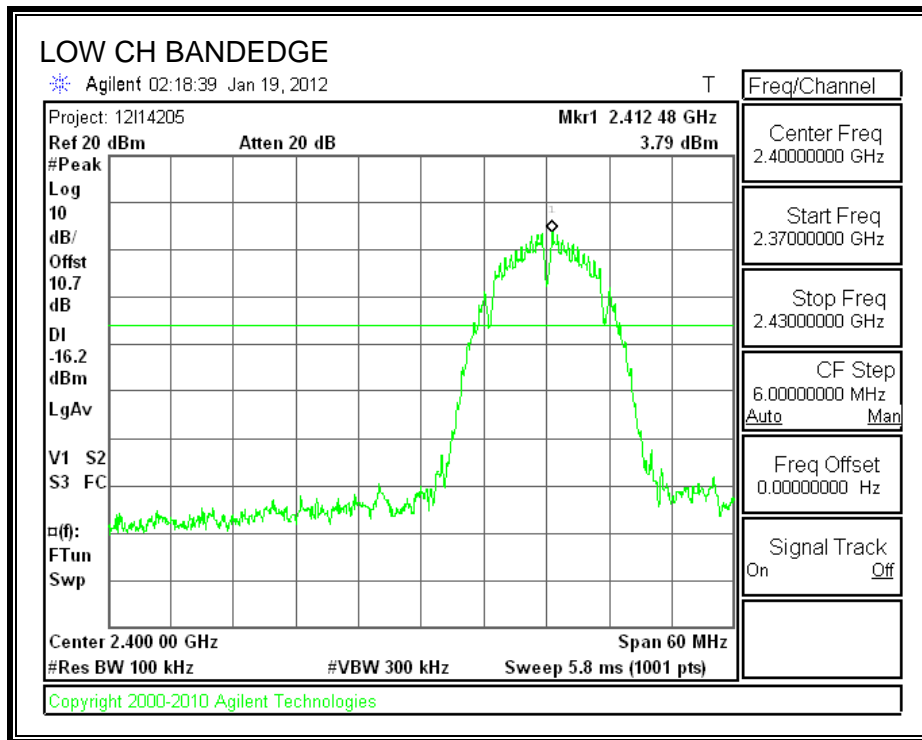

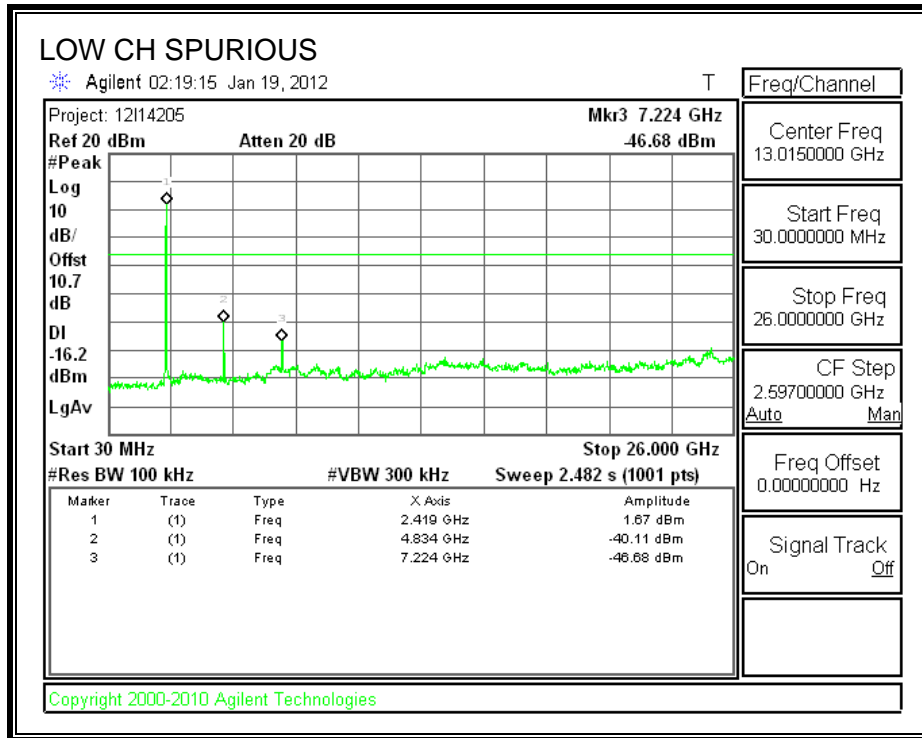



**SPURIOUS EMISSIONS, MID CHANNEL**

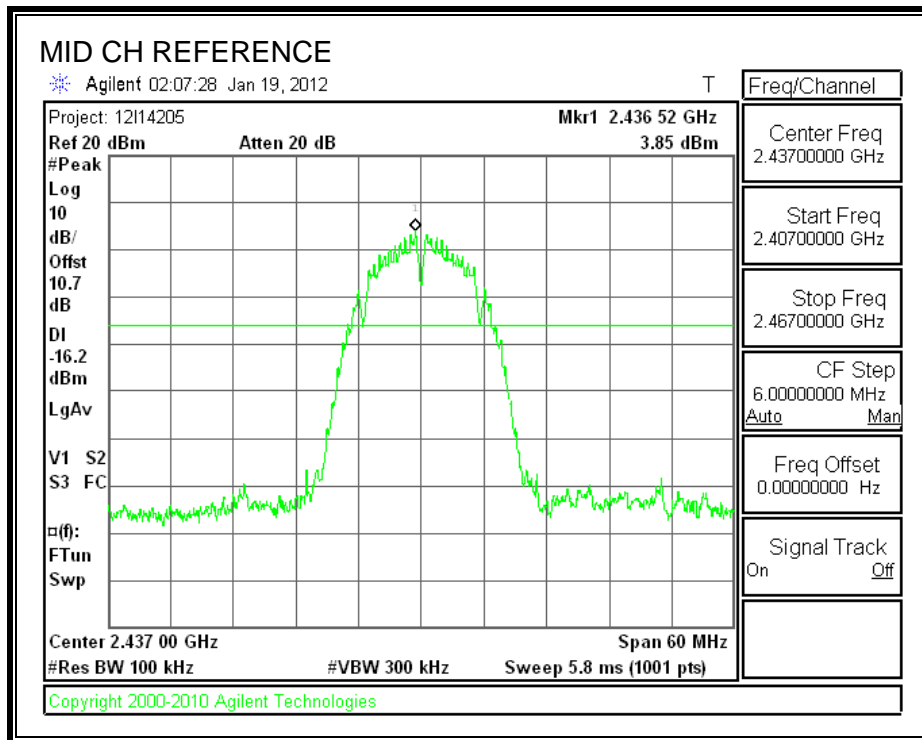

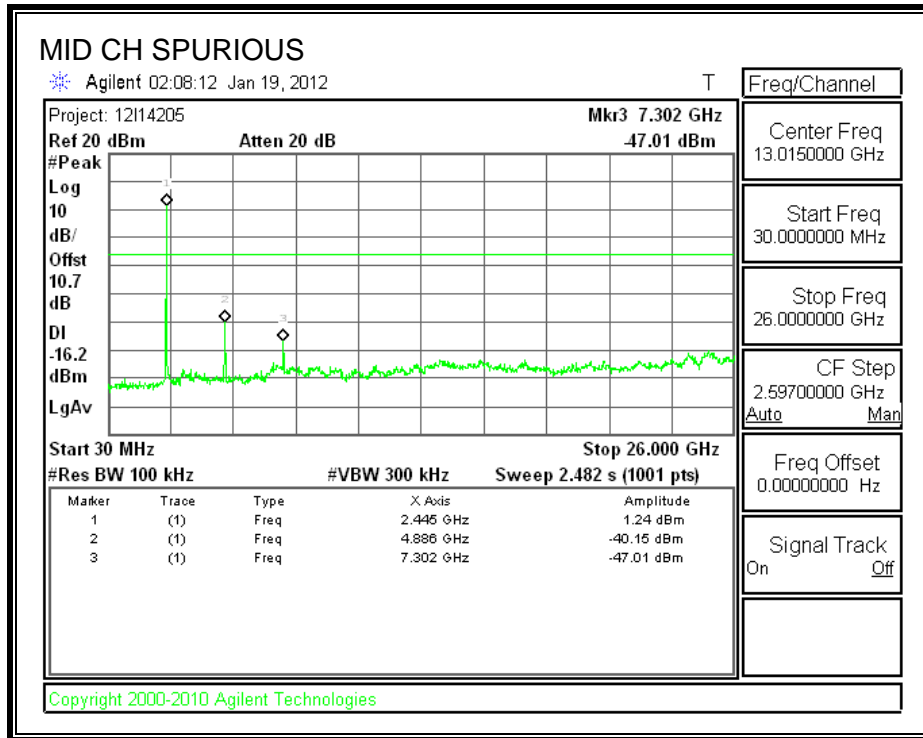

**SPURIOUS EMISSIONS, HIGH CHANNEL**

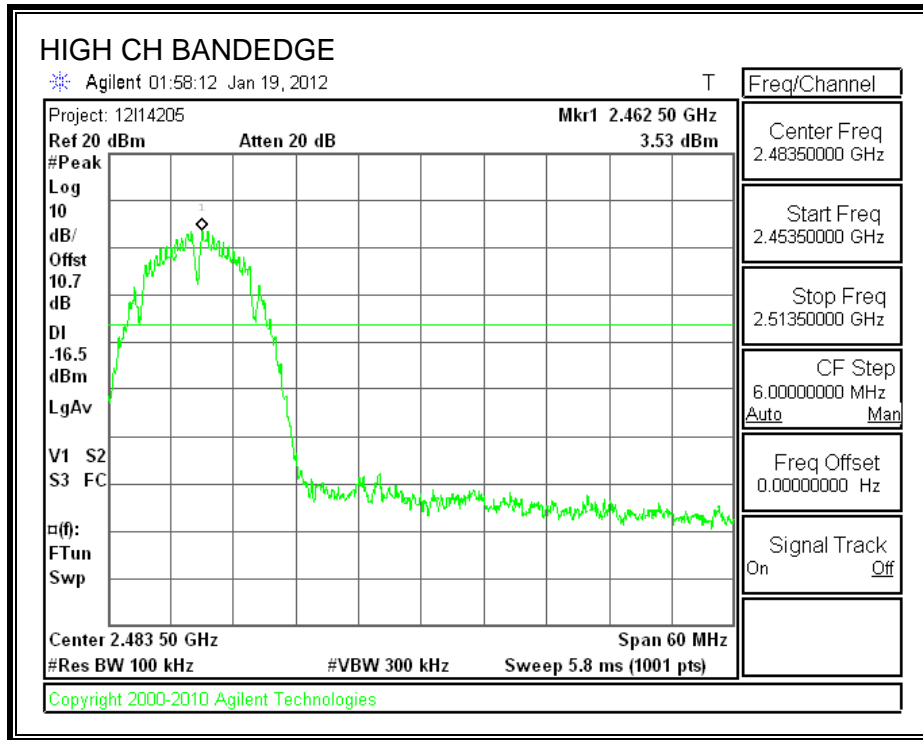

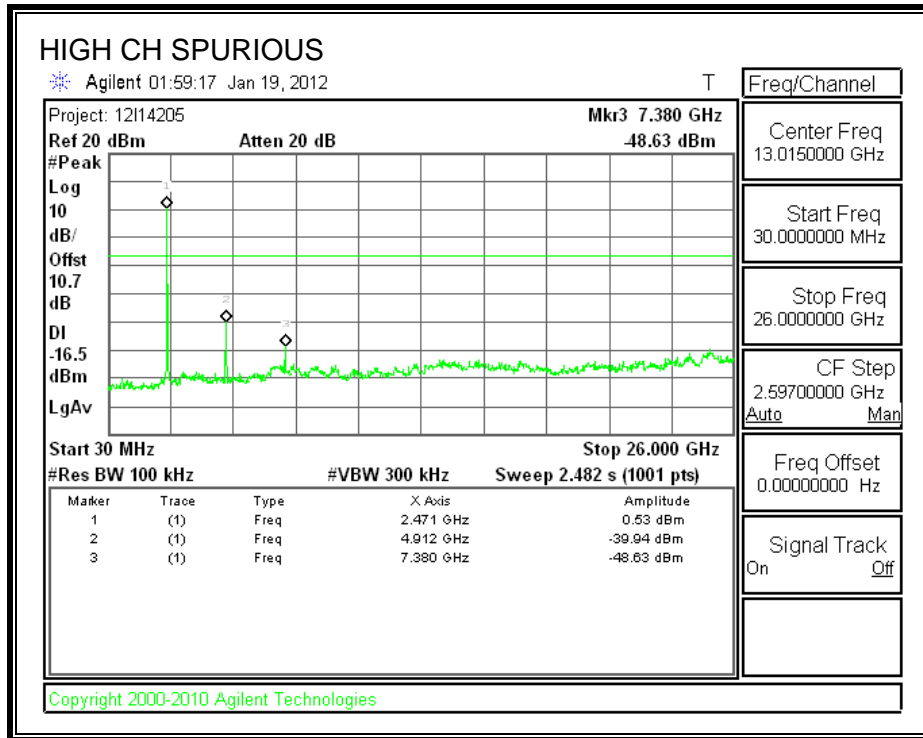

## **7.2. 802.11g MODE IN THE 2.4 GHz BAND**

### **7.2.1. 6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


#### **RESULTS**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>6 dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>
Low	2412	15.12	0.5
Middle	2437	15.09	0.5
High	2462	15.09	0.5

**6 dB BANDWIDTH**

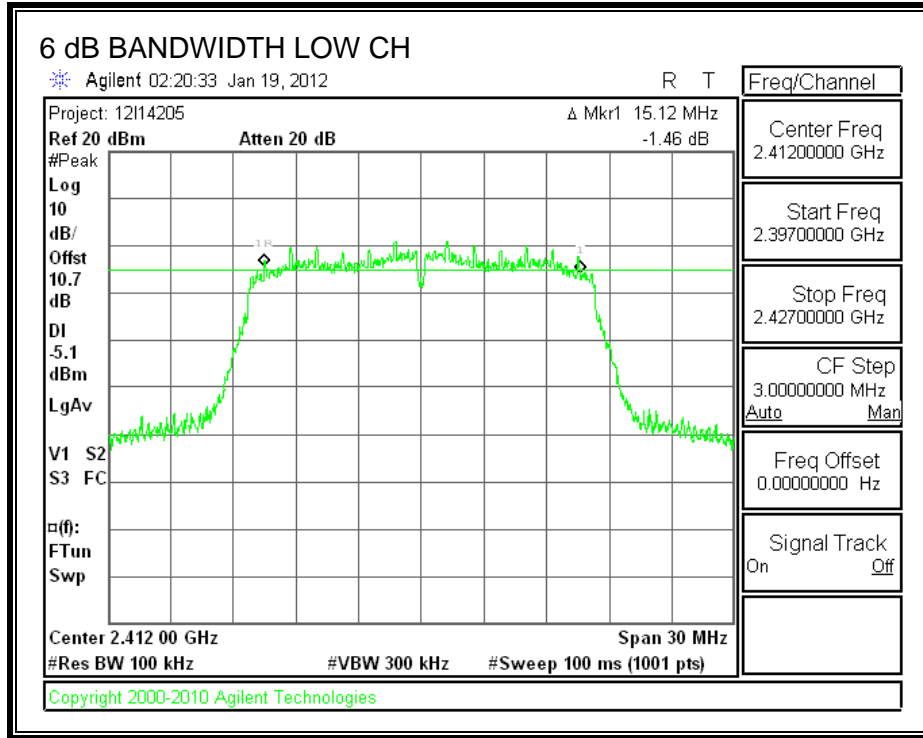

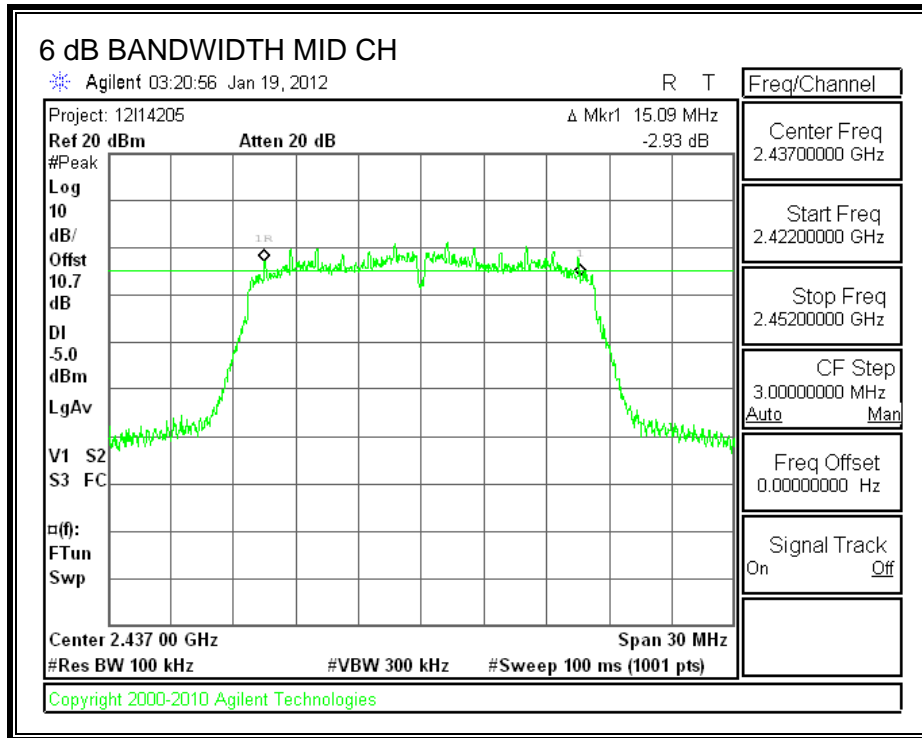

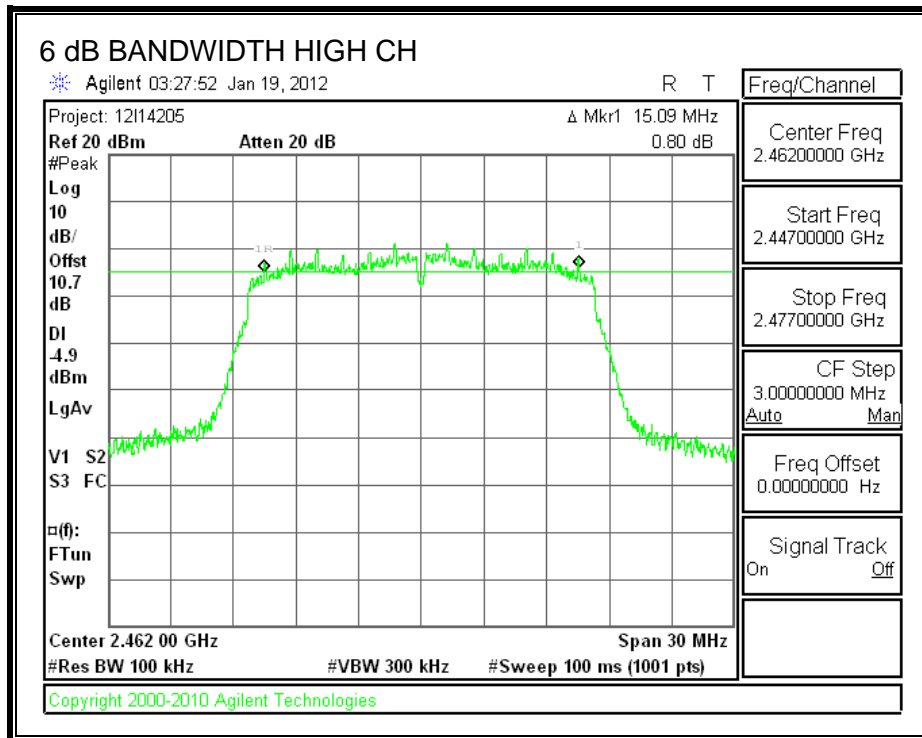

## 7.2.2. OUTPUT POWER

### LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


### TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


### RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	8.07	10.64	18.71	30	-11.29
Middle	2437	8.06	10.64	18.70	30	-11.30
High	2462	8.06	10.64	18.70	30	-11.30

**OUTPUT POWER**

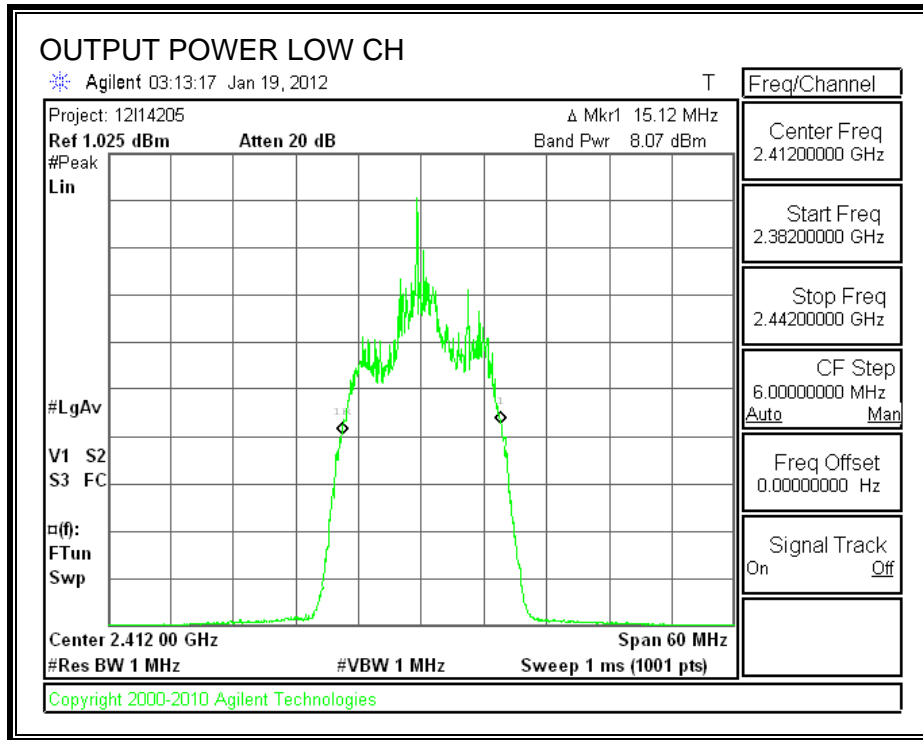

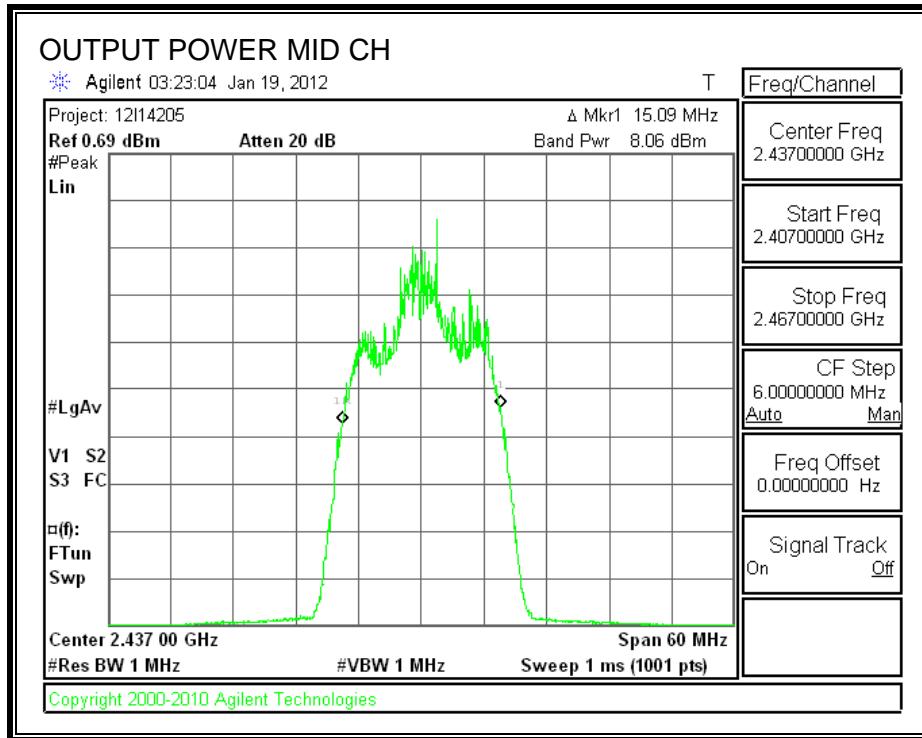

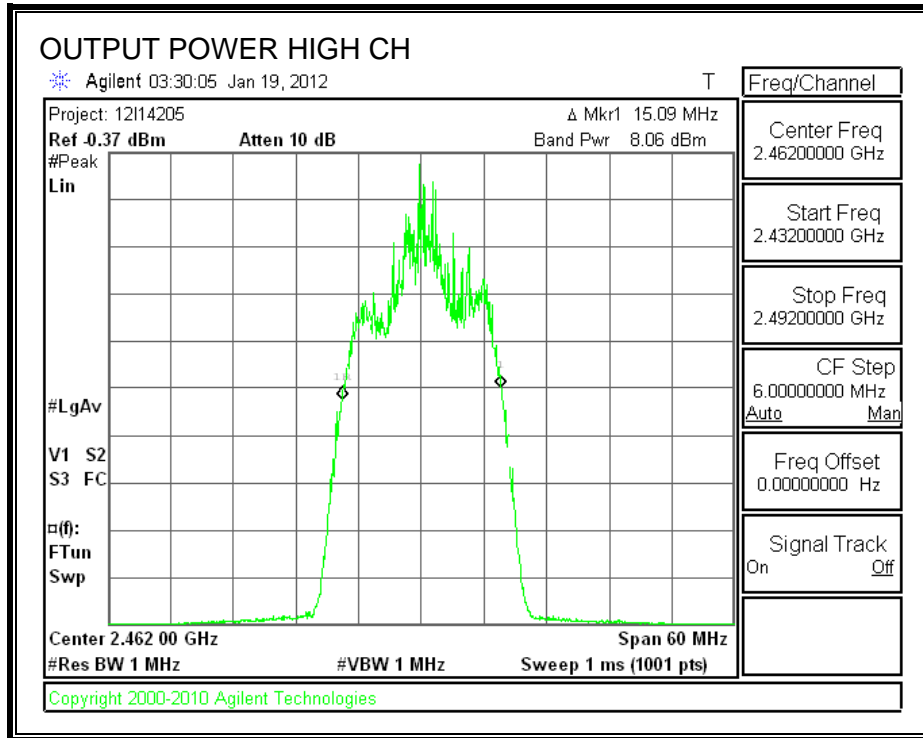

### 7.2.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.88 dB (including 10 dB pad and 1.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Frequency (MHz)	Power (dBm)
2412	11.52
2437	11.67
2462	11.74

## 7.2.4. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.58	8	-20.58
Middle	2437	-12.85	8	-20.85
High	2462	-11.65	8	-19.65

**POWER SPECTRAL DENSITY**

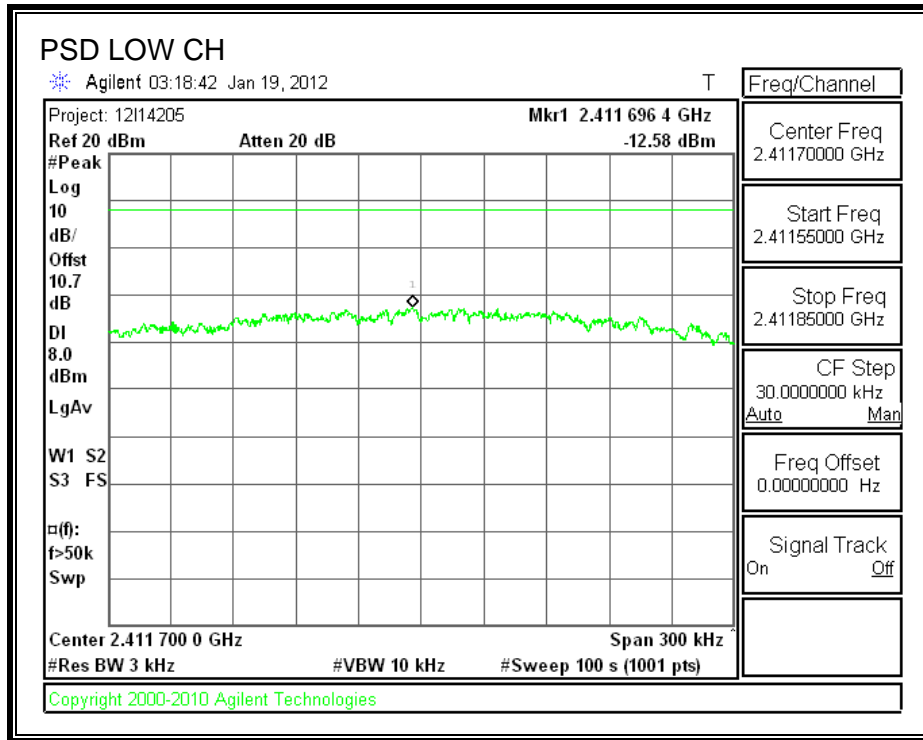

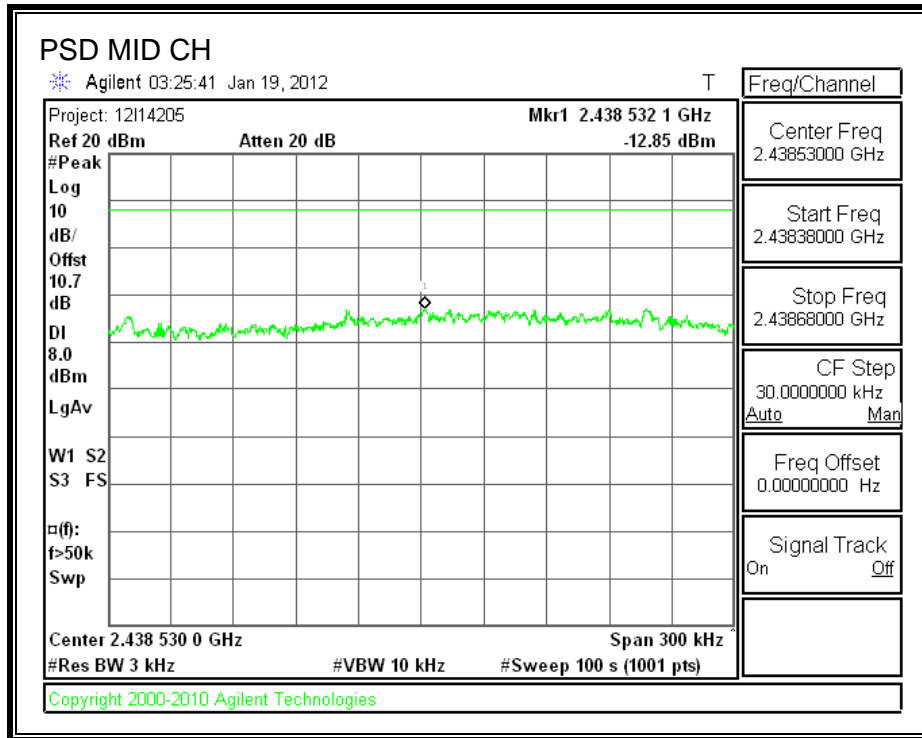



## **7.2.5. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


**RESULTS**


**SPURIOUS EMISSIONS, LOW CHANNEL**

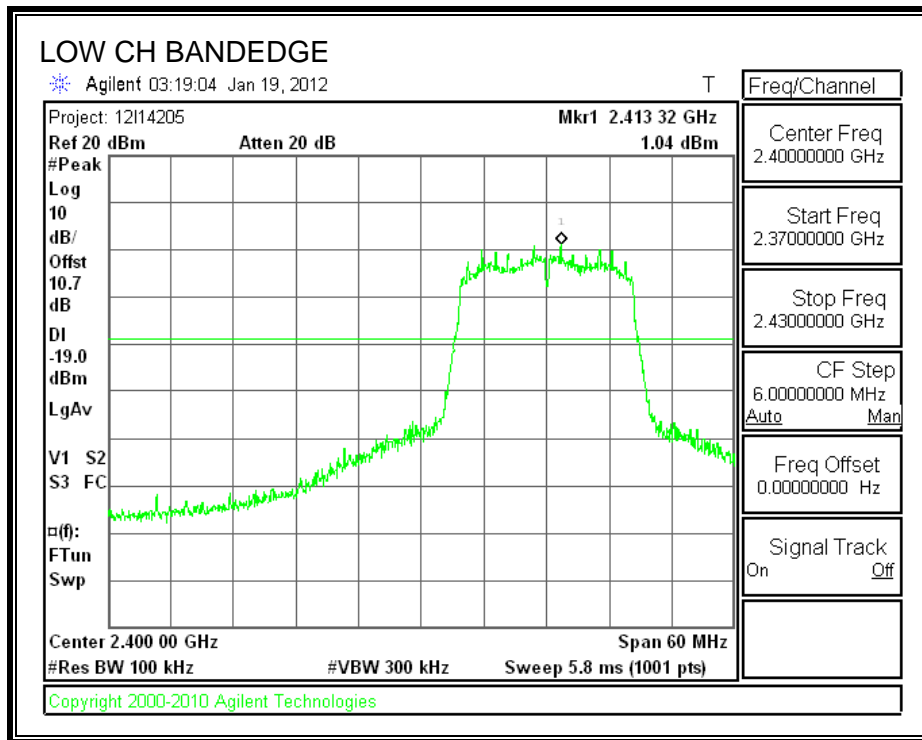

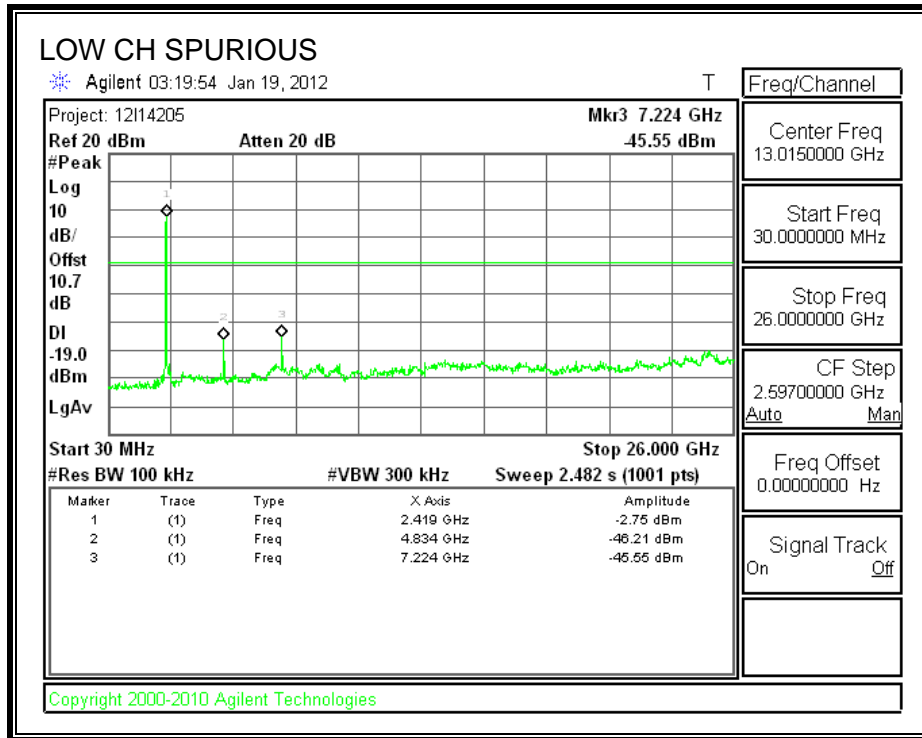



**SPURIOUS EMISSIONS, MID CHANNEL**

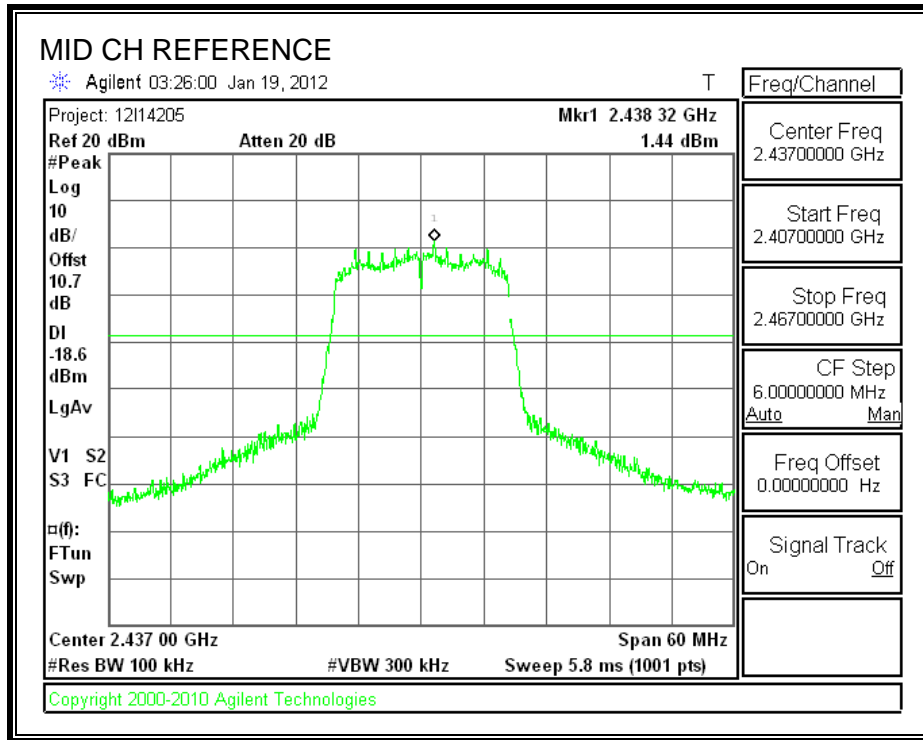

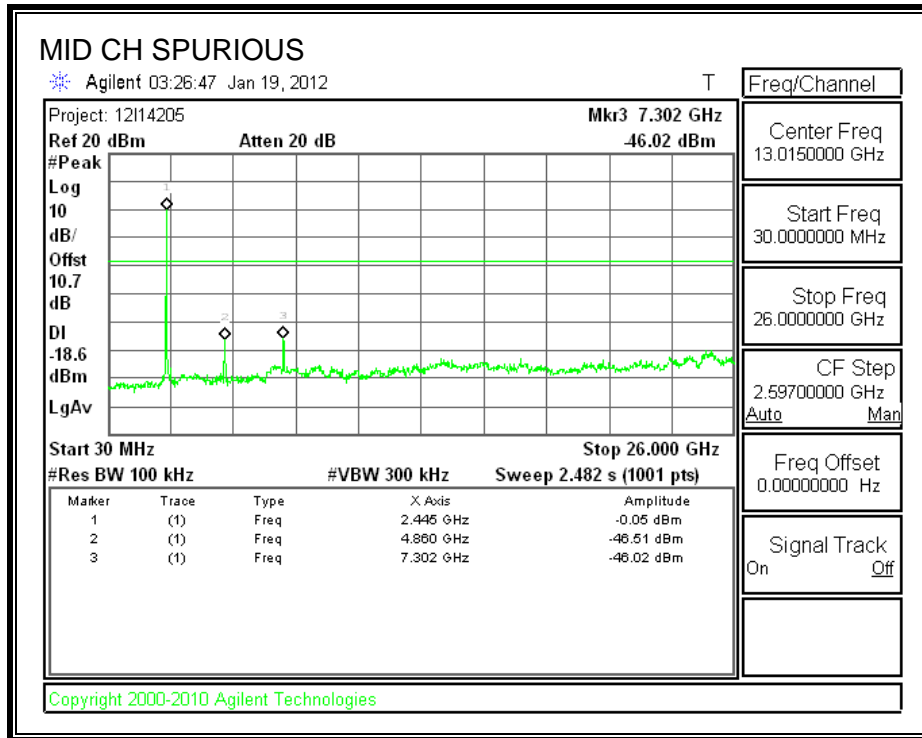

**SPURIOUS EMISSIONS, HIGH CHANNEL**

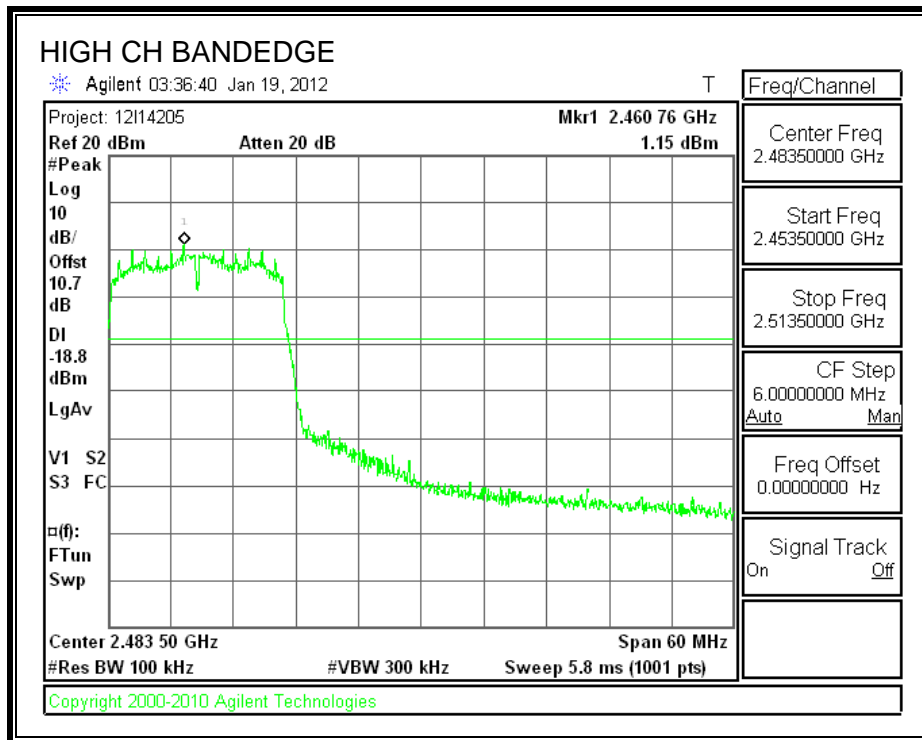

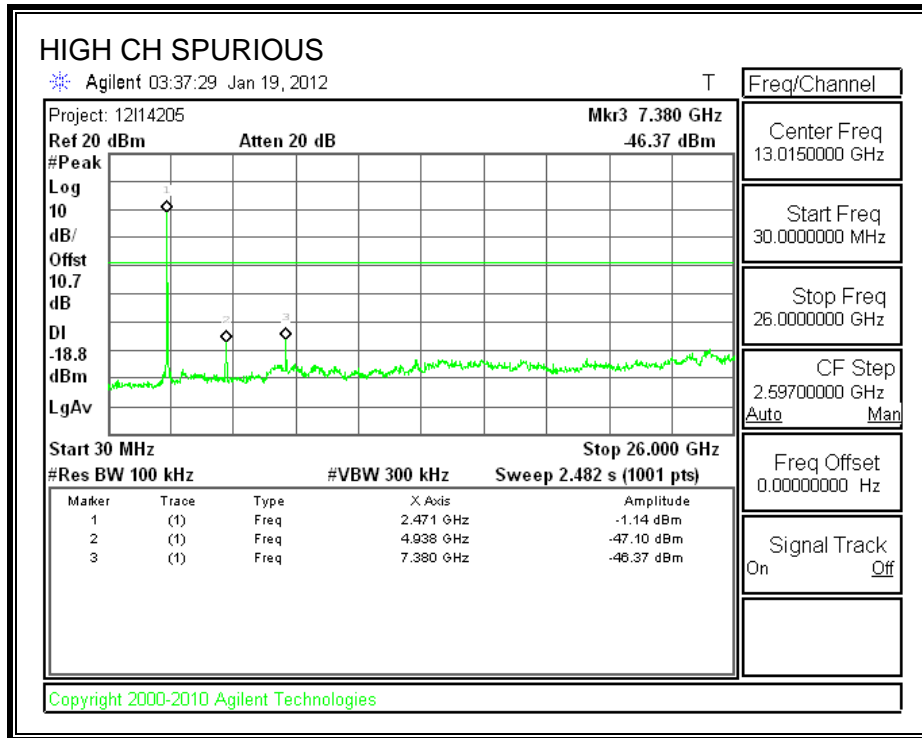

### **7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

#### **7.3.1. 6 dB BANDWIDTH**

##### **LIMITS**

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


##### **RESULTS**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>6 dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>
Low	2412	15.12	0.5
Middle	2437	15.15	0.5
High	2462	15.12	0.5

**6 dB BANDWIDTH**

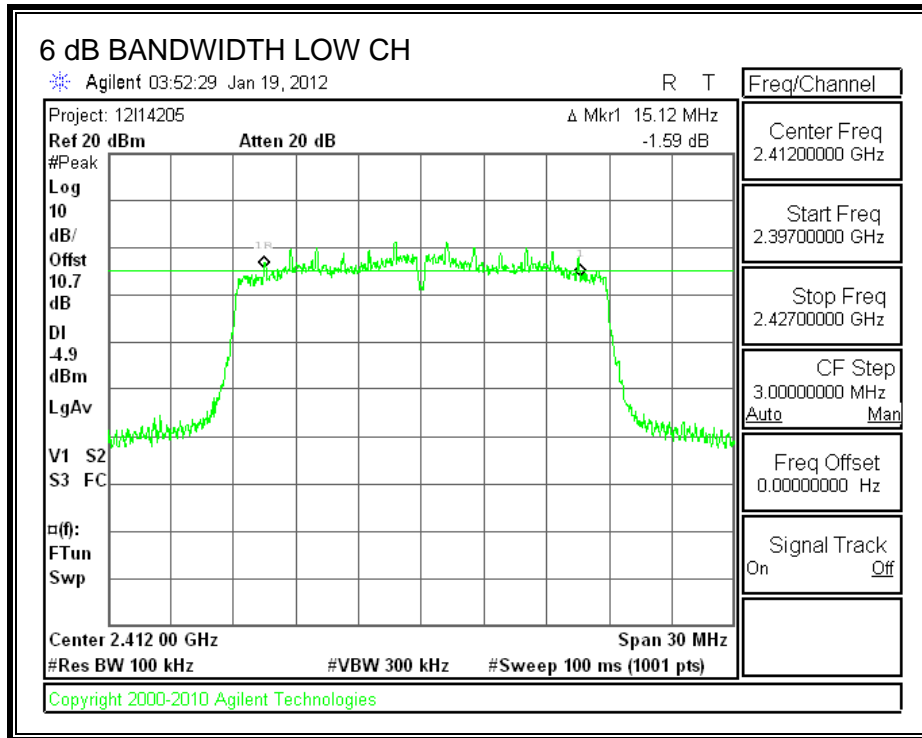

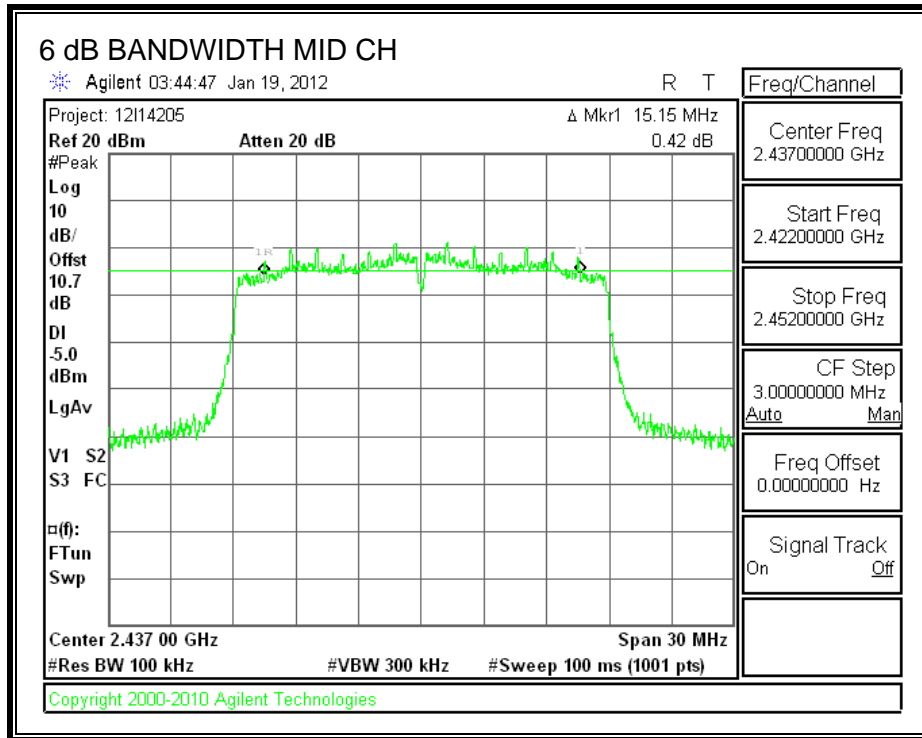

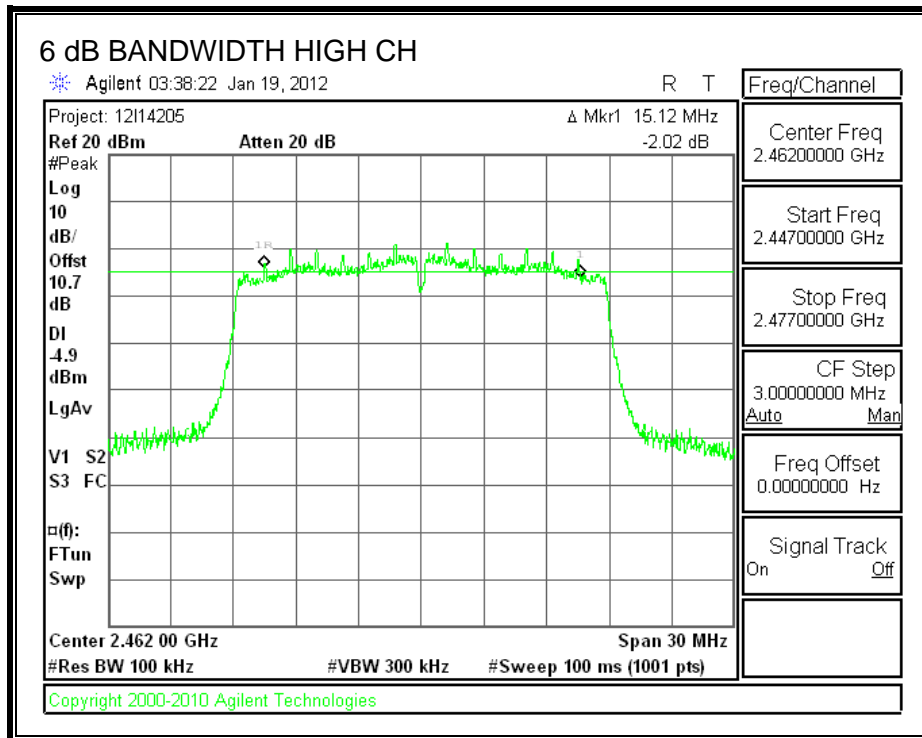

### 7.3.2. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


#### TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


#### RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	7.71	10.64	18.35	30	-11.65
Middle	2437	7.70	10.64	18.34	30	-11.66
High	2462	7.68	10.64	18.32	30	-11.68

**OUTPUT POWER**

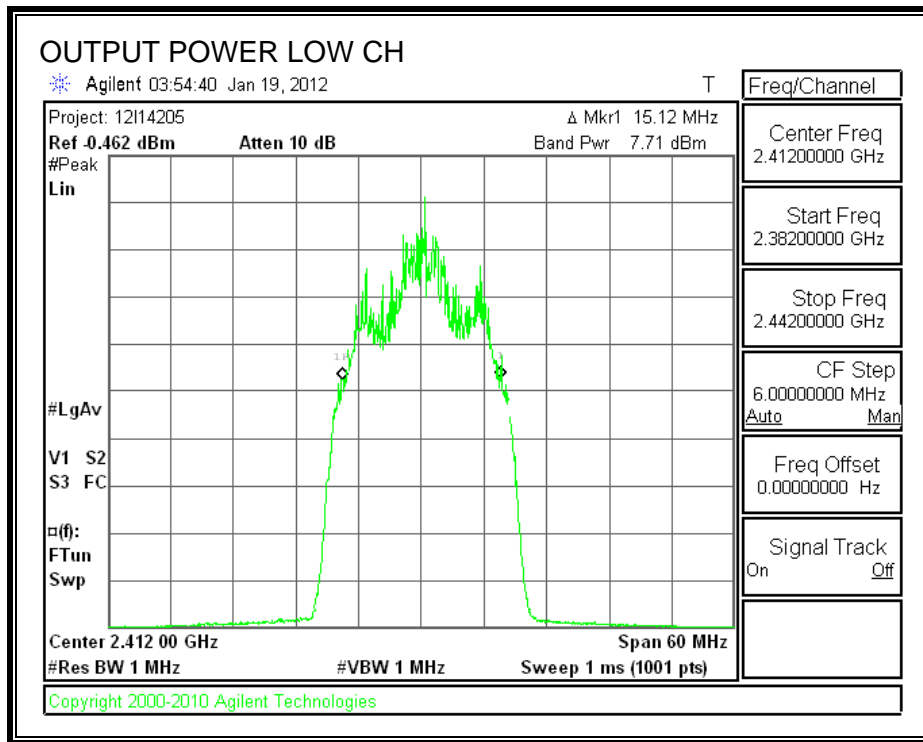

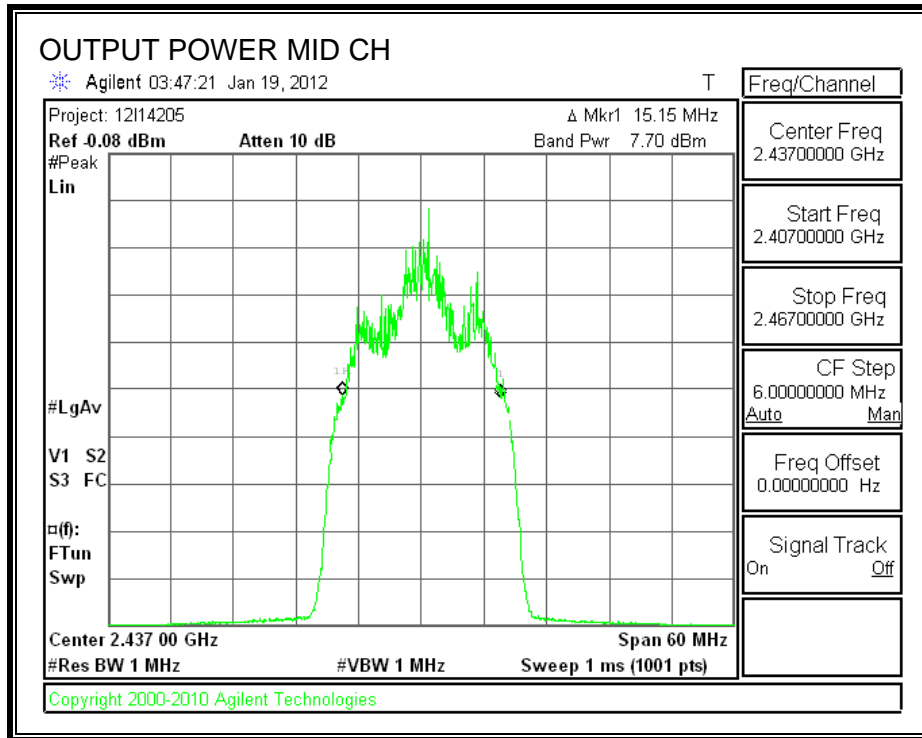

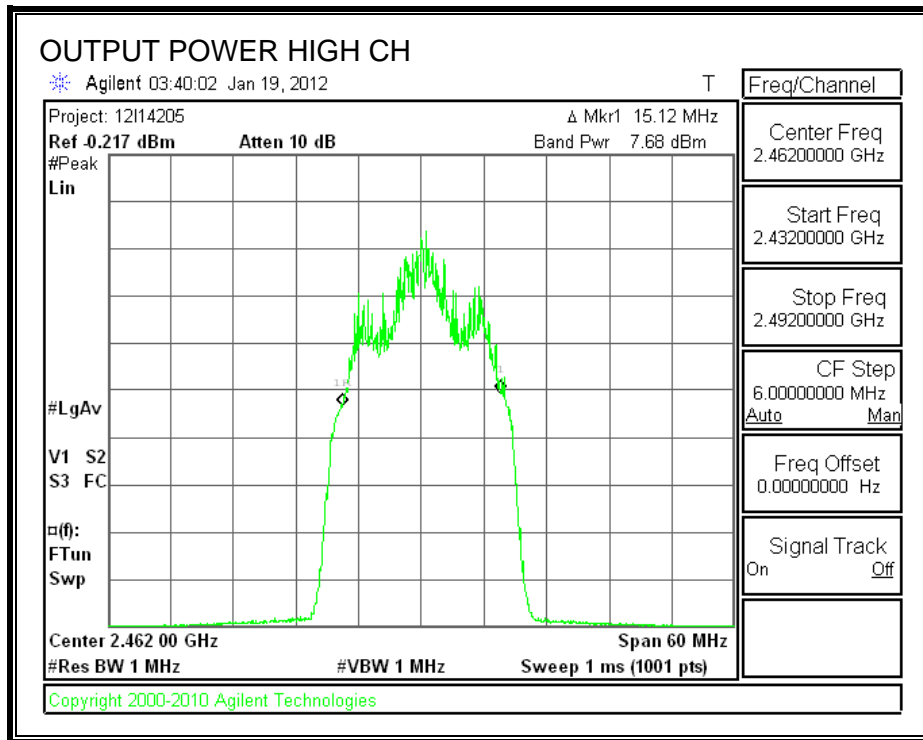

### 7.3.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.88 dB (including 10 dB pad and 1.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Frequency (MHz)	Power (dBm)
2412	11.46
2437	11.45
2462	11.46

### 7.3.4. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


#### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.74	8	-19.74
Middle	2437	-12.45	8	-20.45
High	2462	-10.91	8	-18.91

**POWER SPECTRAL DENSITY**

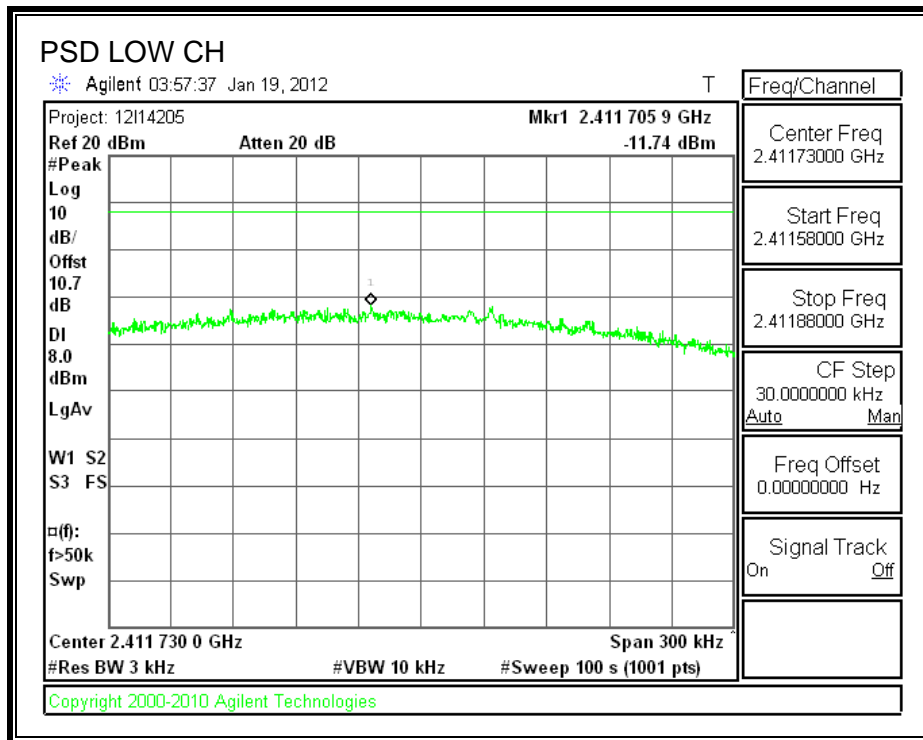

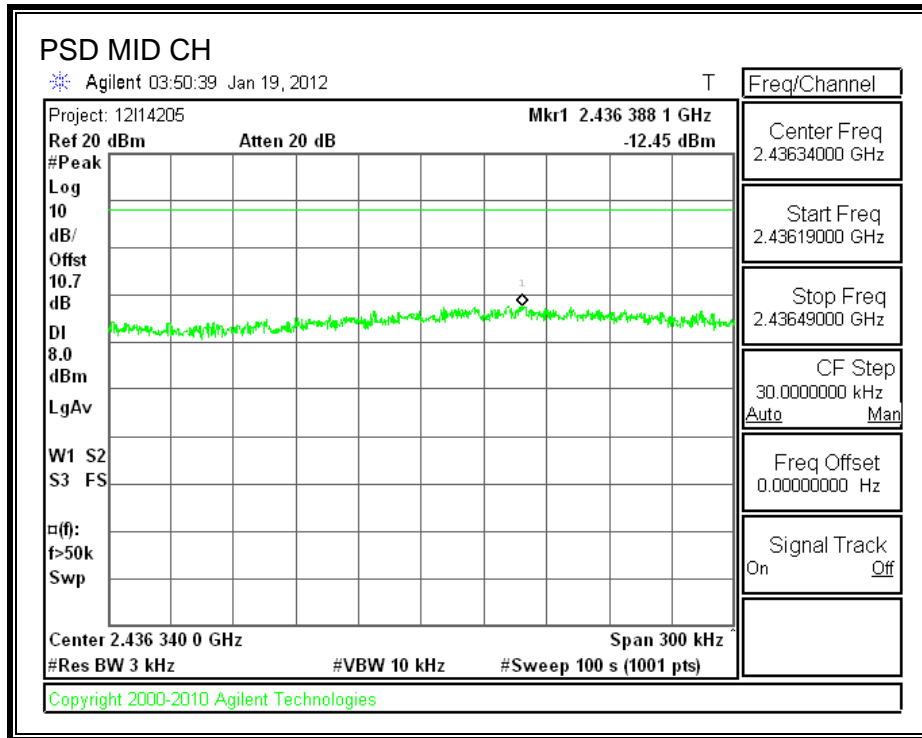

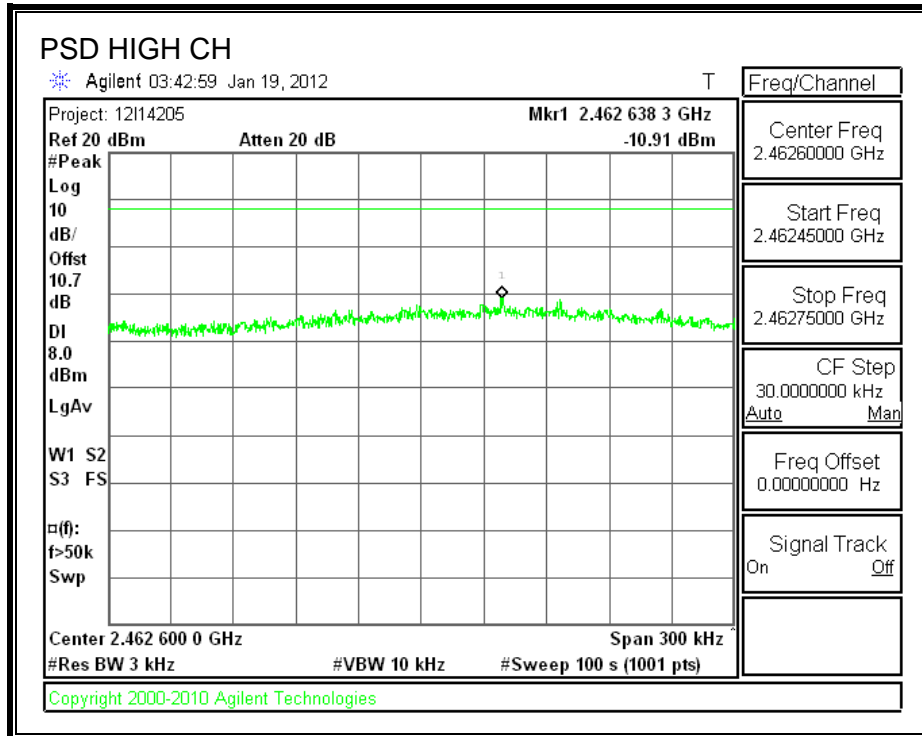

### **7.3.5. CONDUCTED SPURIOUS EMISSIONS**

#### **LIMITS**

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


**RESULTS**


**SPURIOUS EMISSIONS, LOW CHANNEL**

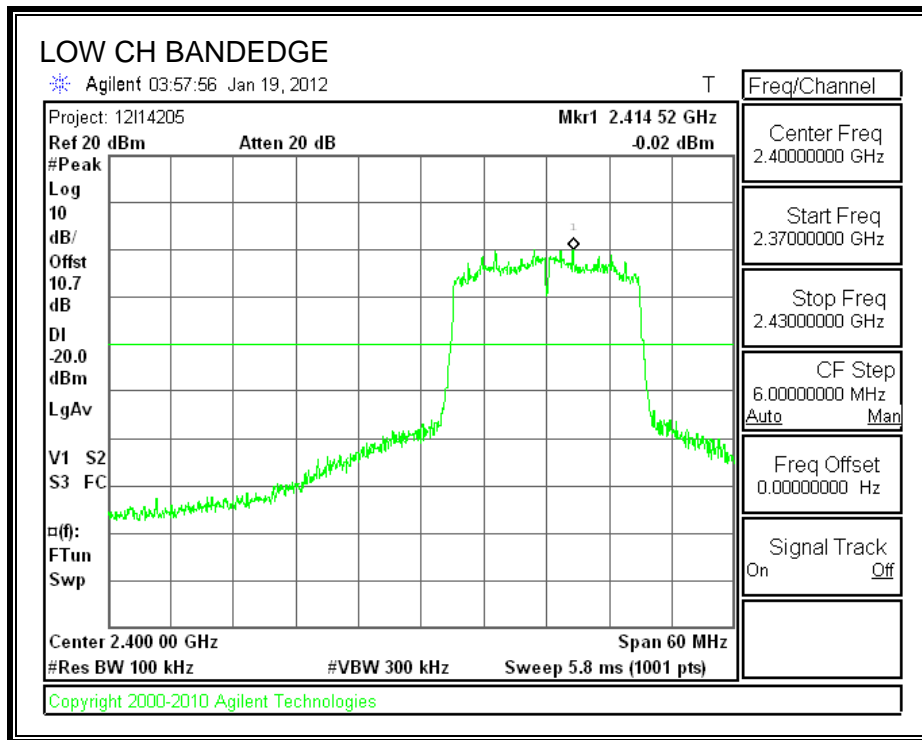

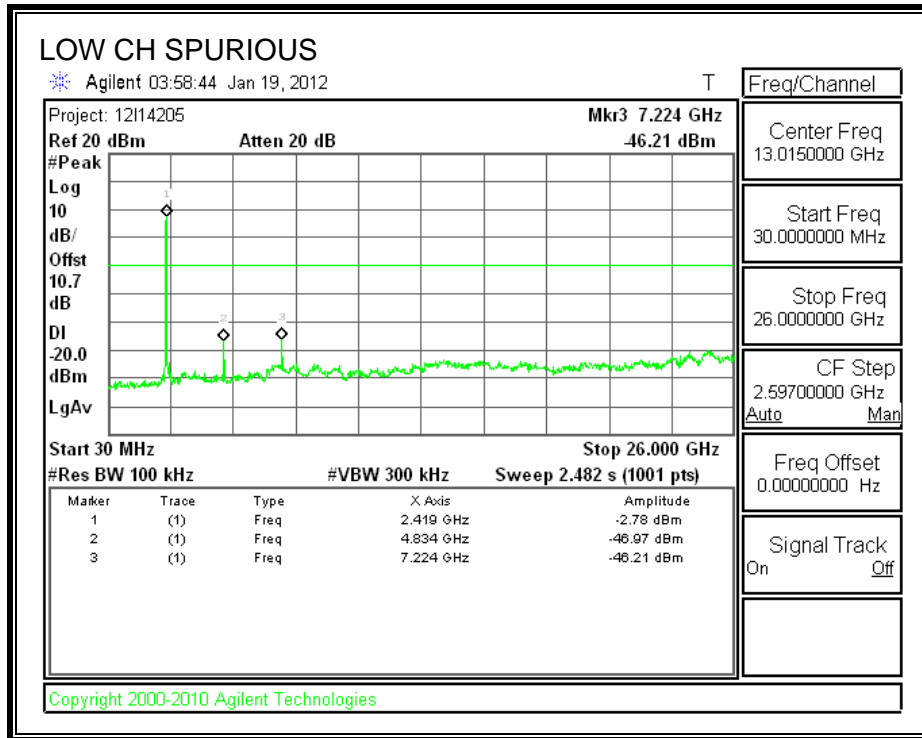



**SPURIOUS EMISSIONS, MID CHANNEL**

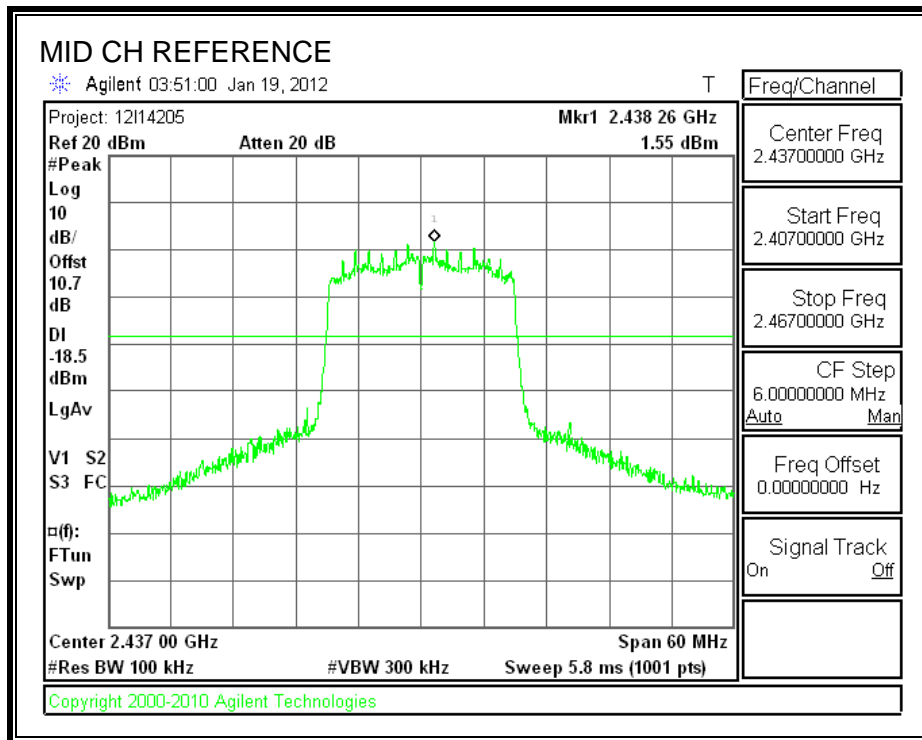

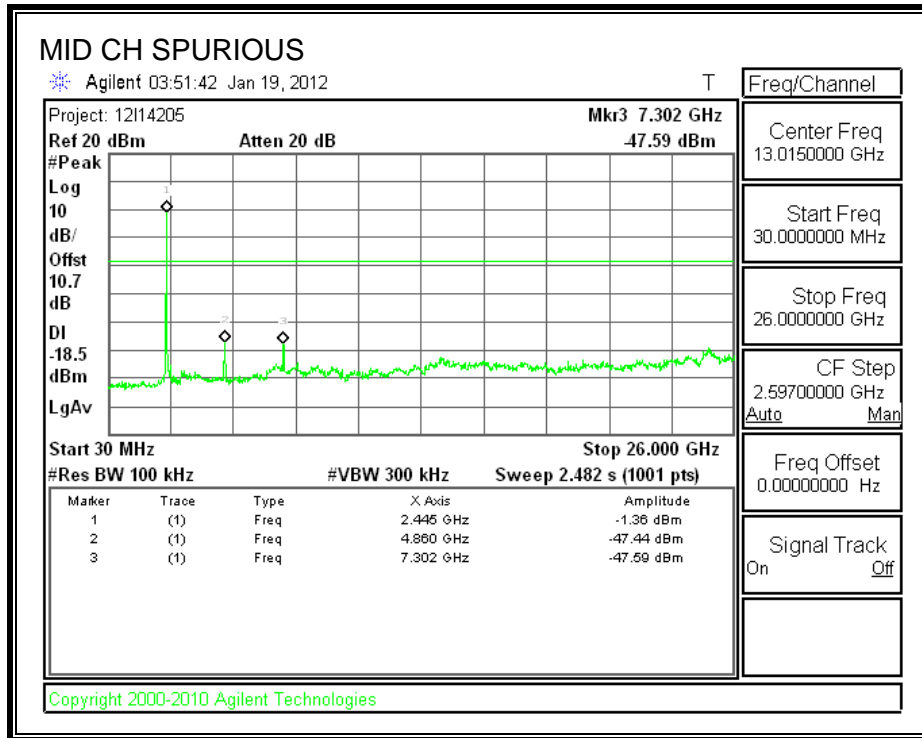

**SPURIOUS EMISSIONS, HIGH CHANNEL**

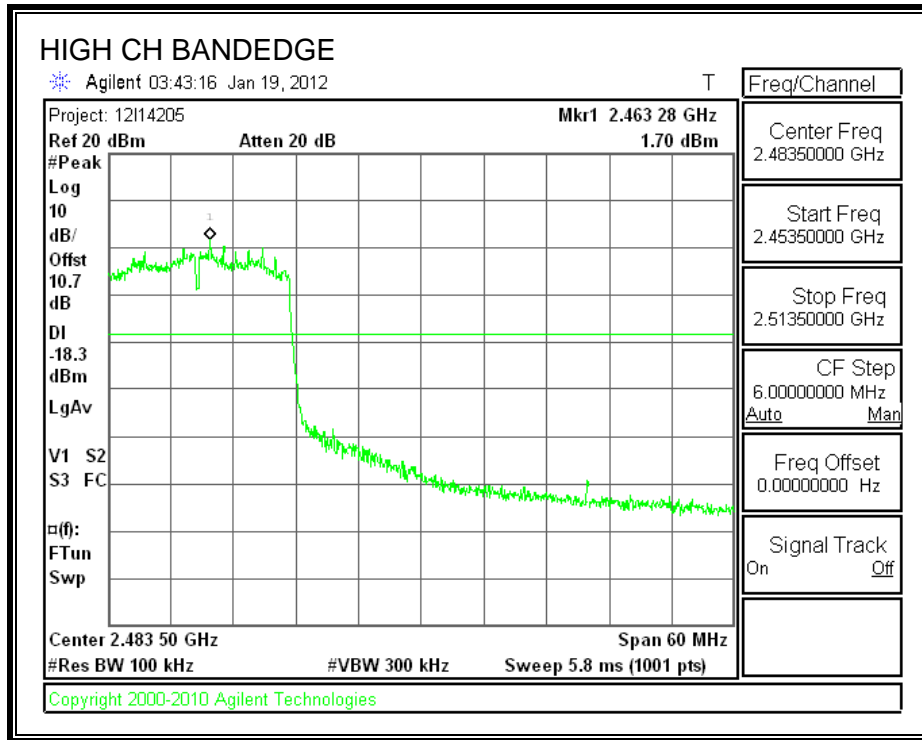

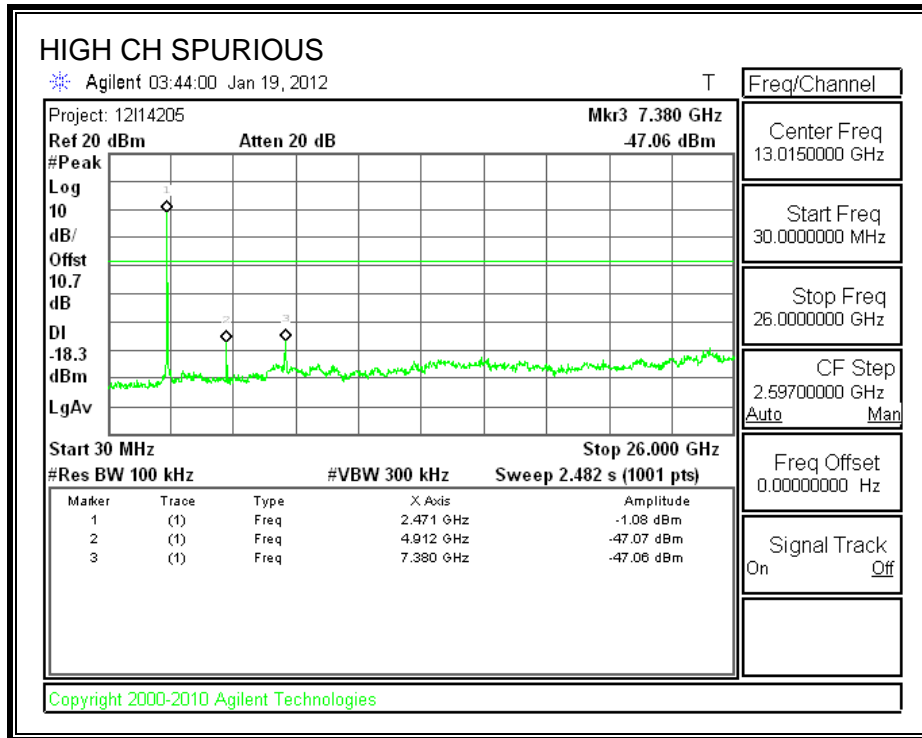

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz


### 8.2.1. TX ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND


#### RESTRICTED BANDEDG (LOW CHANNEL, HORIZONTAL)

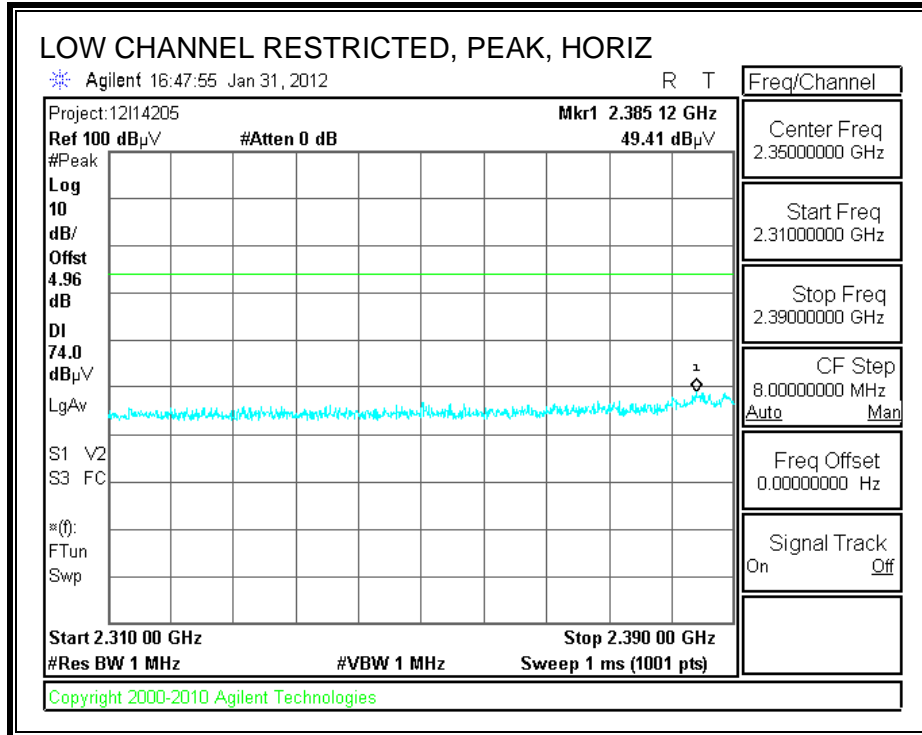

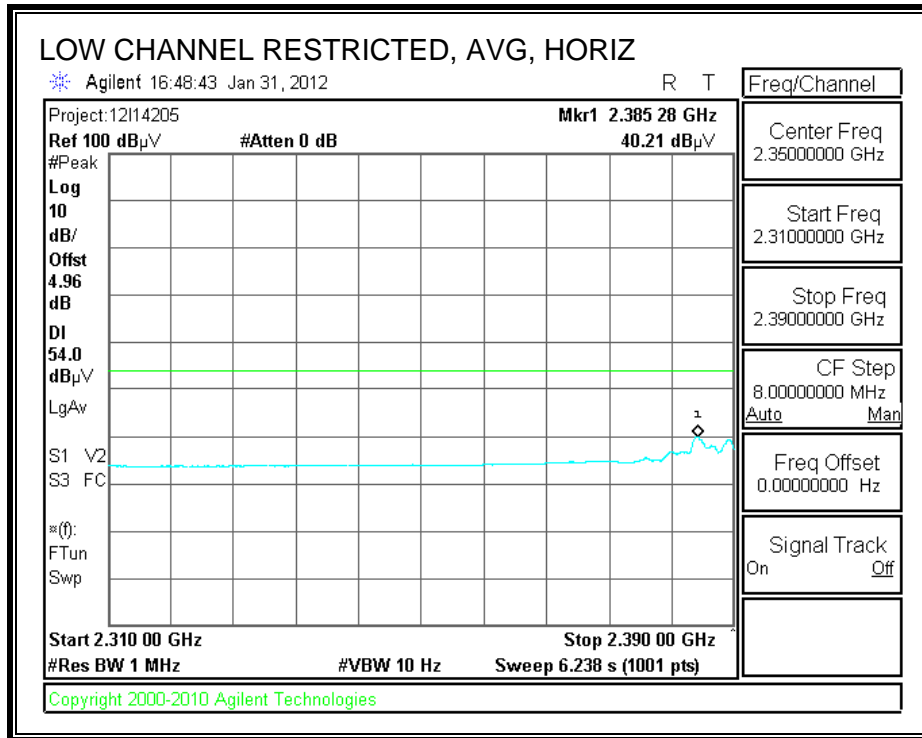



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

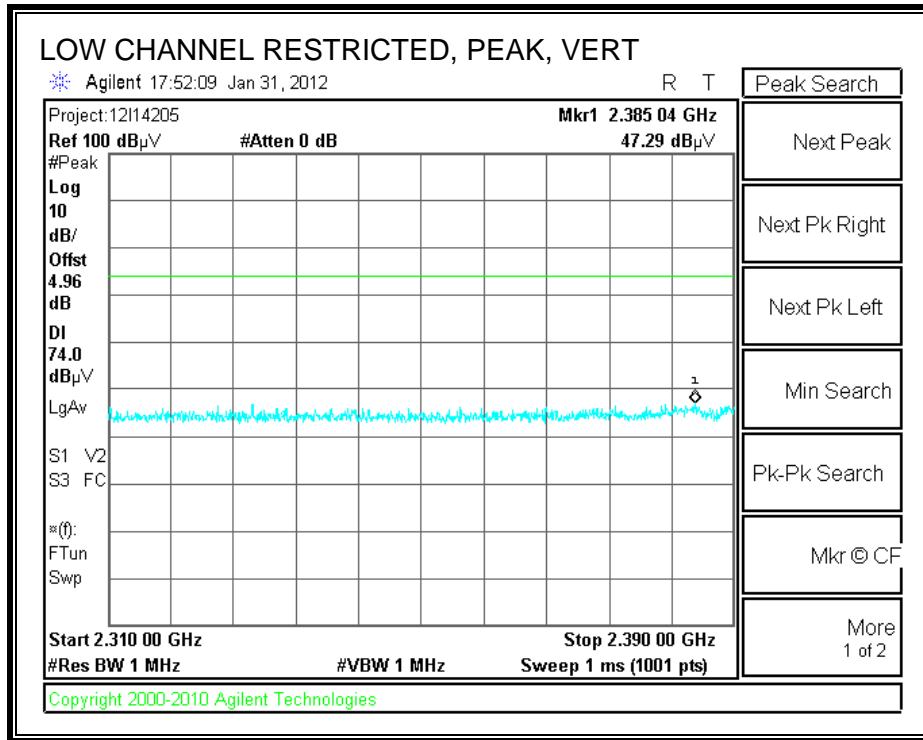

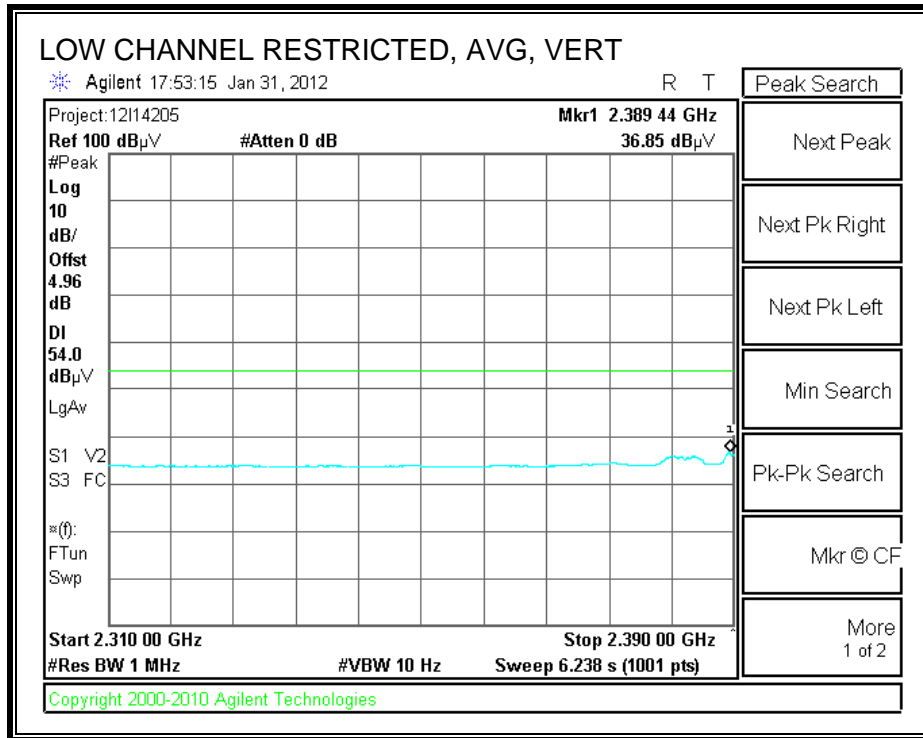



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

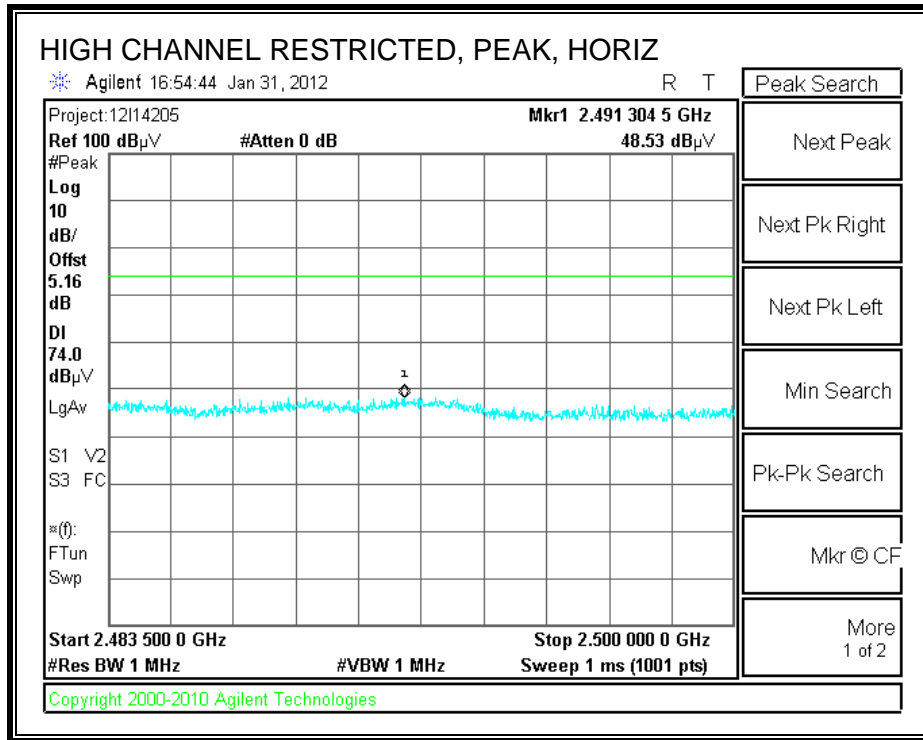

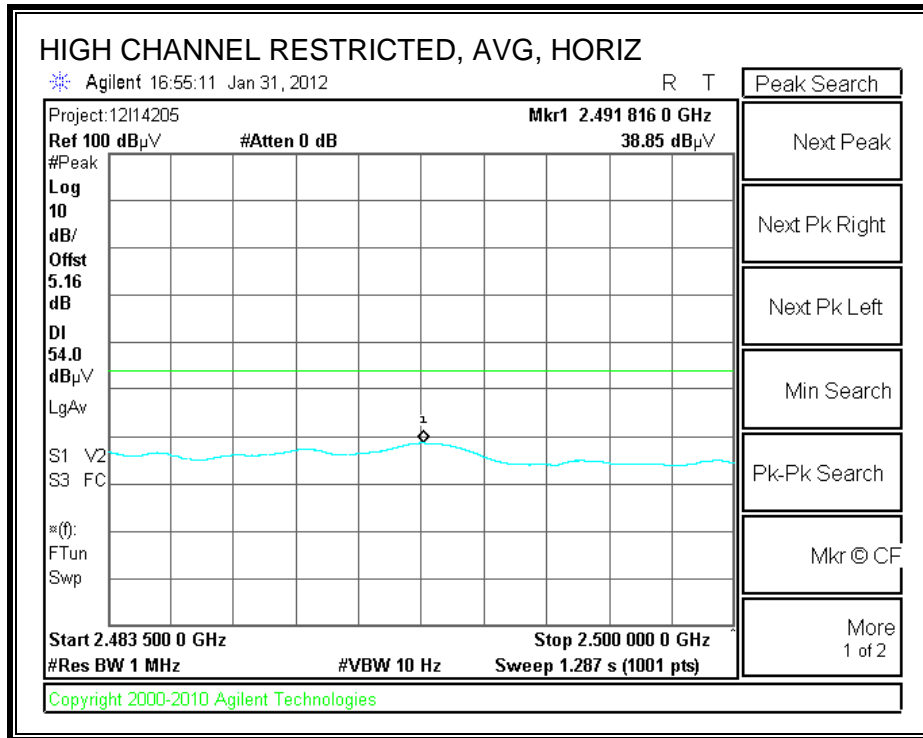

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

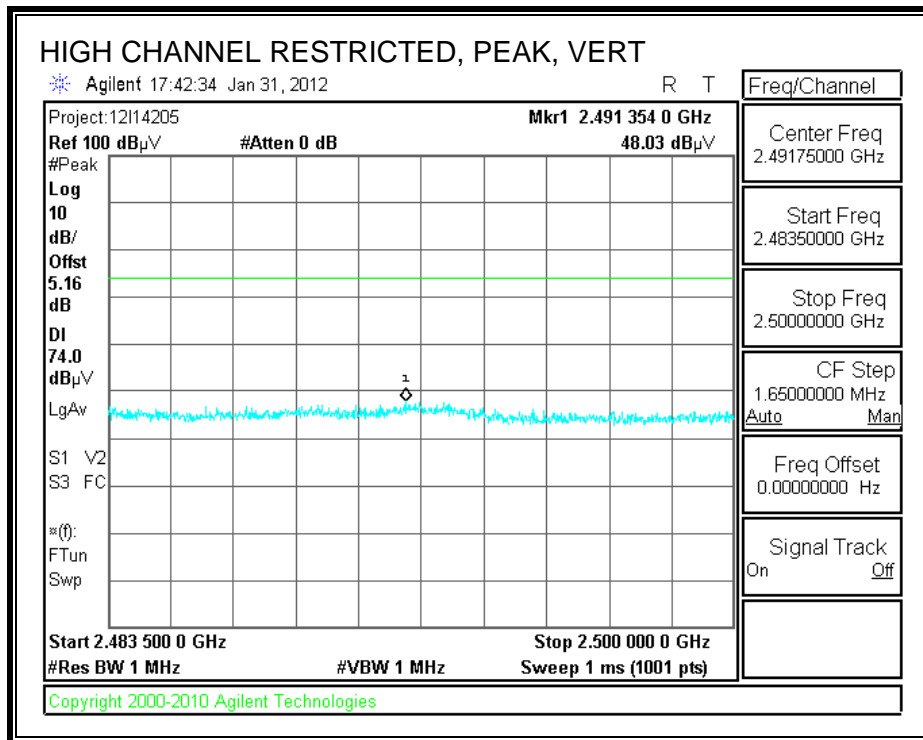

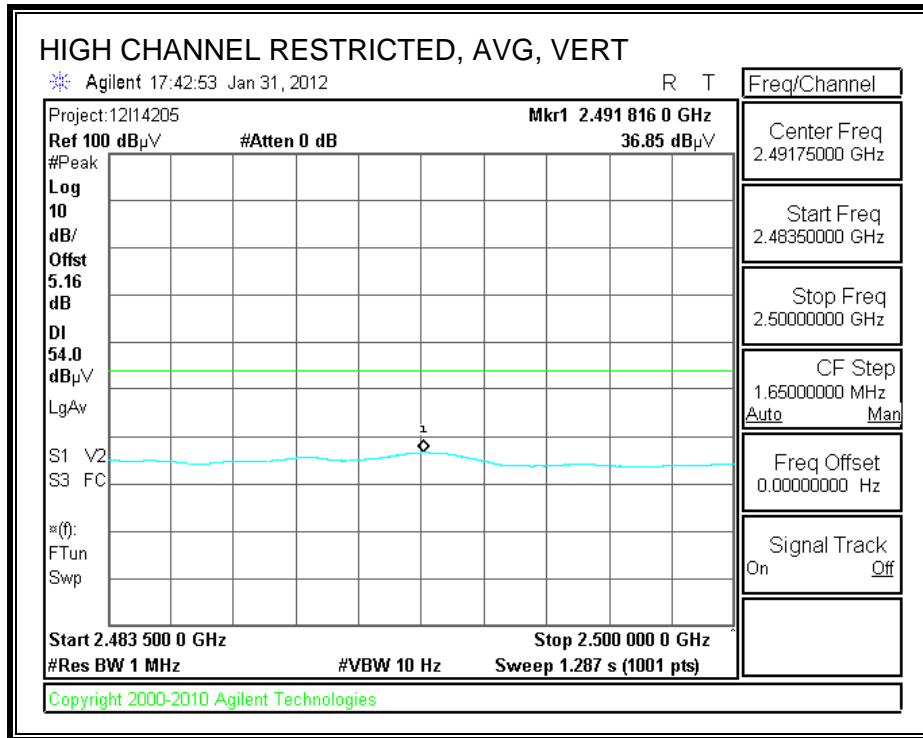

**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber-B

Company: SAMSUNG ELECTRONICS  
 Project #: 12I14205  
 Date: 1/30/2012  
 Test Engineer: MENGISTU MEKURIA  
 Configuration: EUT ALONE  
 Mode: TX, b MODE

Test Equipment:

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>	<b>Limit</b>
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.209

Hi Frequency Cables

<b>3' cable 22807700</b>	<b>12' cable 22807600</b>	<b>20' cable 22807500</b>	<b>HPF</b>	<b>Reject Filter</b>	<b>Peak Measurements</b> RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	47.2	43.6	33.9	6.3	-35.5	0.0	0.0	51.9	48.2	74	54	-22.1	-5.8	V
4.824	3.0	46.8	43.5	33.9	6.3	-35.5	0.0	0.0	51.5	48.1	74	54	-22.5	-5.9	H
12.060	3.0	36.7	25.6	39.7	11.1	-35.4	0.0	0.0	52.1	41.0	74	54	-21.9	-13.0	H
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	48.0	45.1	33.9	6.3	-35.5	0.0	0.0	52.7	49.8	74	54	-21.3	-4.2	V
7.311	3.0	39.4	29.0	36.6	8.5	-35.4	0.0	0.0	49.1	38.7	74	54	-24.9	-15.3	V
4.874	3.0	48.6	45.5	33.9	6.3	-35.5	0.0	0.0	53.3	50.2	74	54	-20.7	-3.8	H
7.311	3.0	40.0	30.5	36.6	8.5	-35.4	0.0	0.0	49.7	40.2	74	54	-24.3	-13.8	H
12.185	3.0	35.6	24.2	39.6	11.1	-35.3	0.0	0.0	51.0	39.6	74	54	-23.0	-14.4	H
<b>High Channel (2462 MHz)</b>															
4.924	3.0	48.6	45.4	34.0	6.3	-35.5	0.0	0.0	53.4	50.3	74	54	-20.6	-3.7	V
7.386	3.0	37.4	26.8	36.6	8.5	-35.5	0.0	0.0	47.2	36.6	74	54	-26.8	-17.4	V
4.924	3.0	49.8	47.0	34.0	6.3	-35.5	0.0	0.0	54.6	51.8	74	54	-19.4	-2.2	H
7.386	3.0	39.4	30.1	36.6	8.5	-35.5	0.0	0.0	49.1	39.8	74	54	-24.9	-14.2	H
12.310	3.0	35.8	25.0	39.6	11.2	-35.3	0.0	0.0	51.2	40.4	74	54	-22.8	-13.6	H


Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


### 8.2.2. TX ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

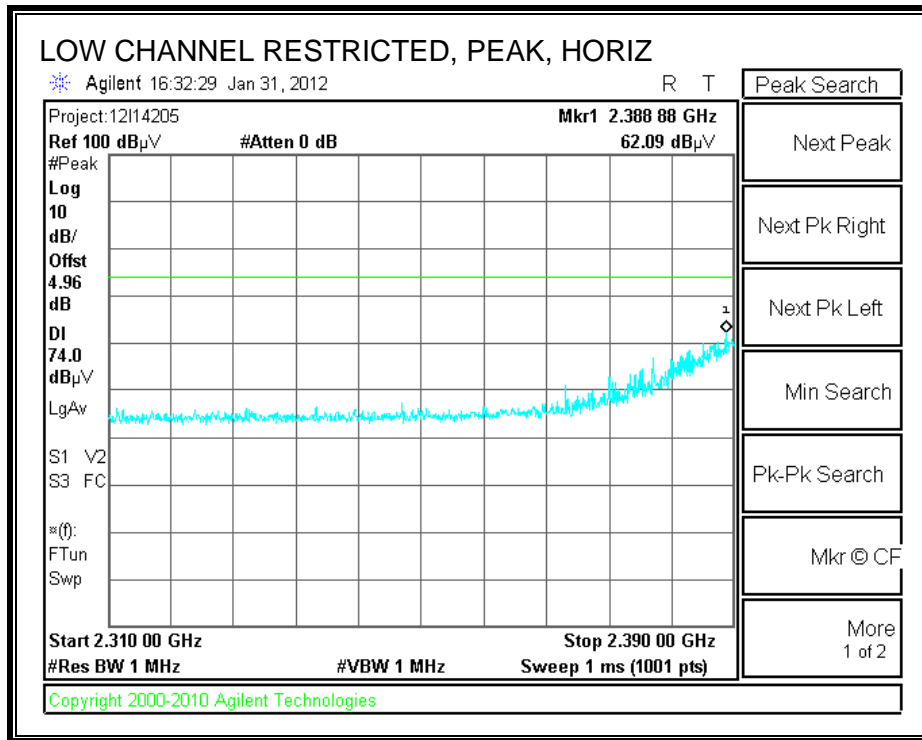

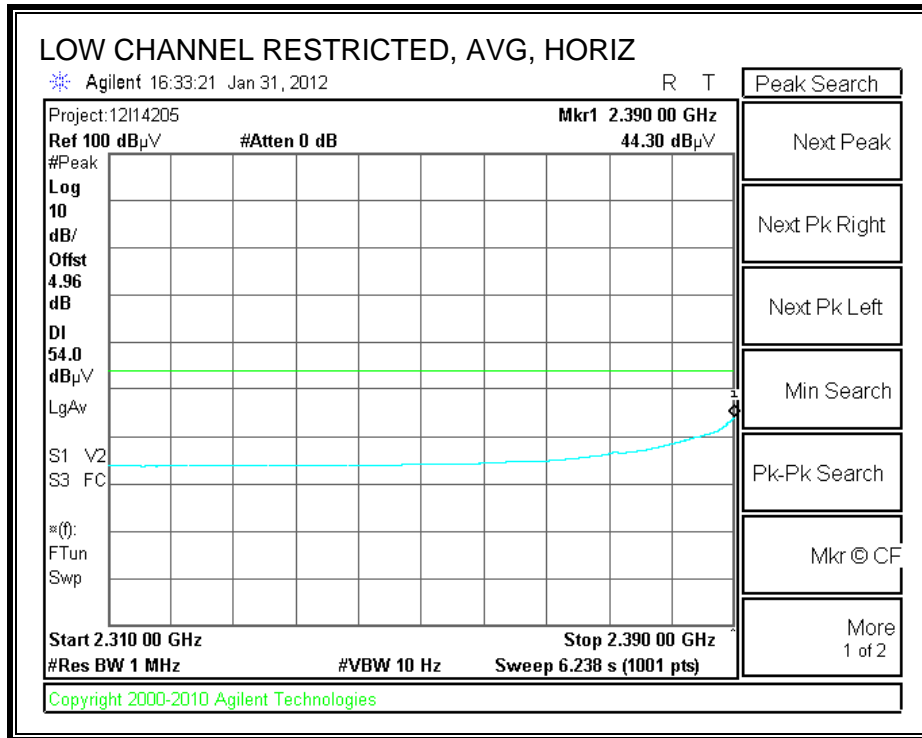



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

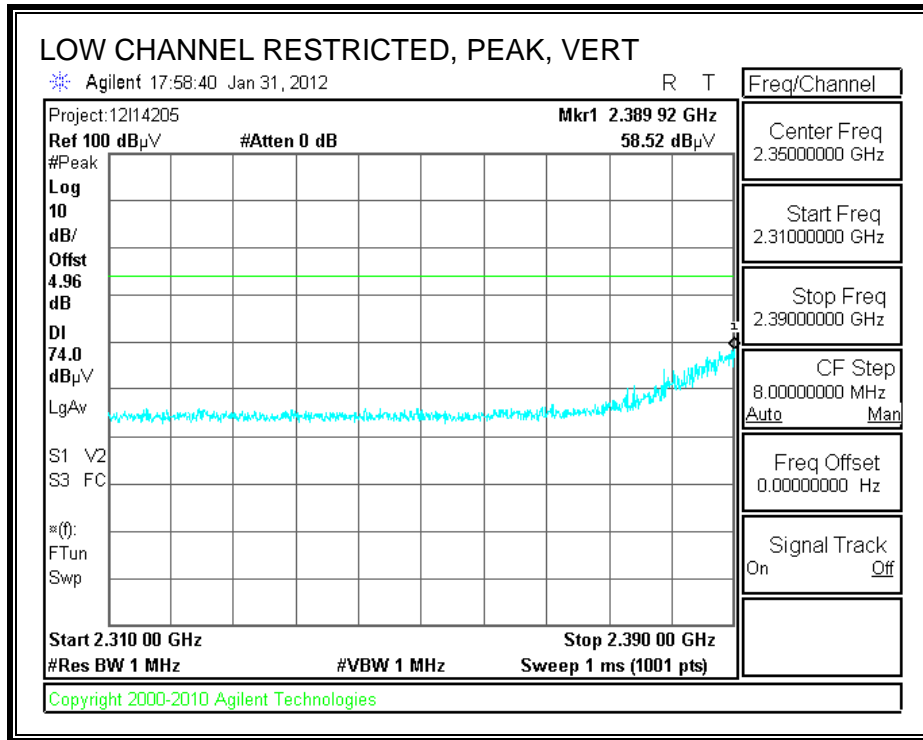

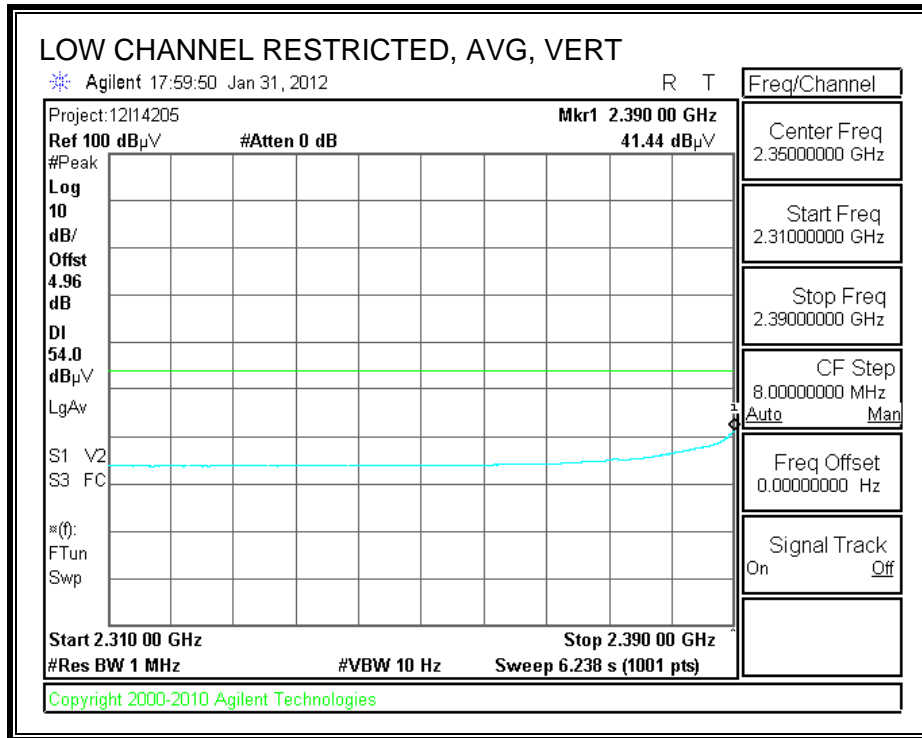


**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

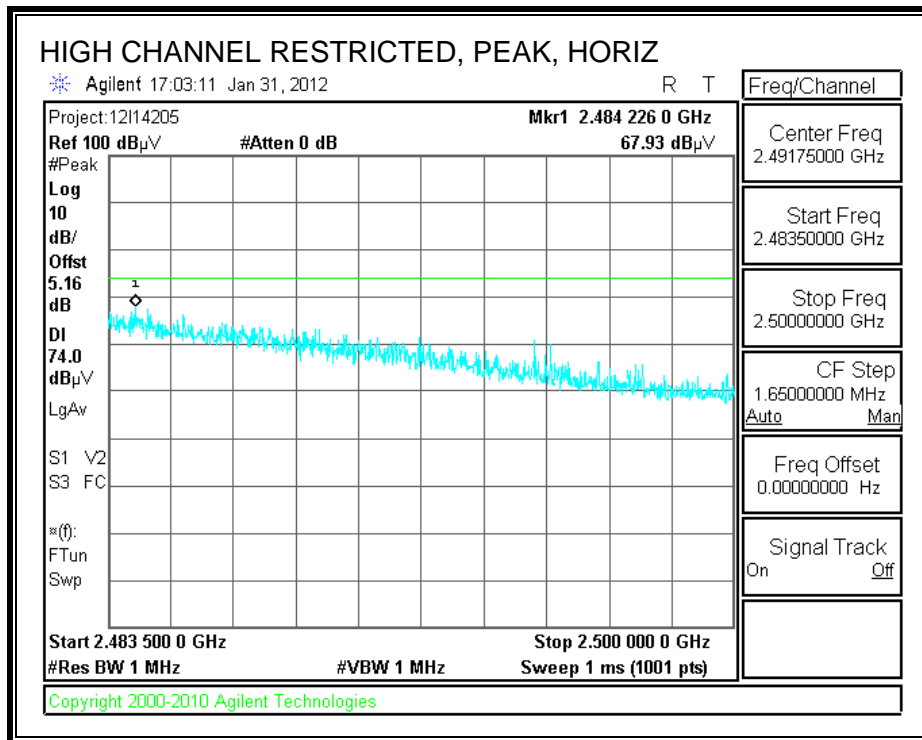

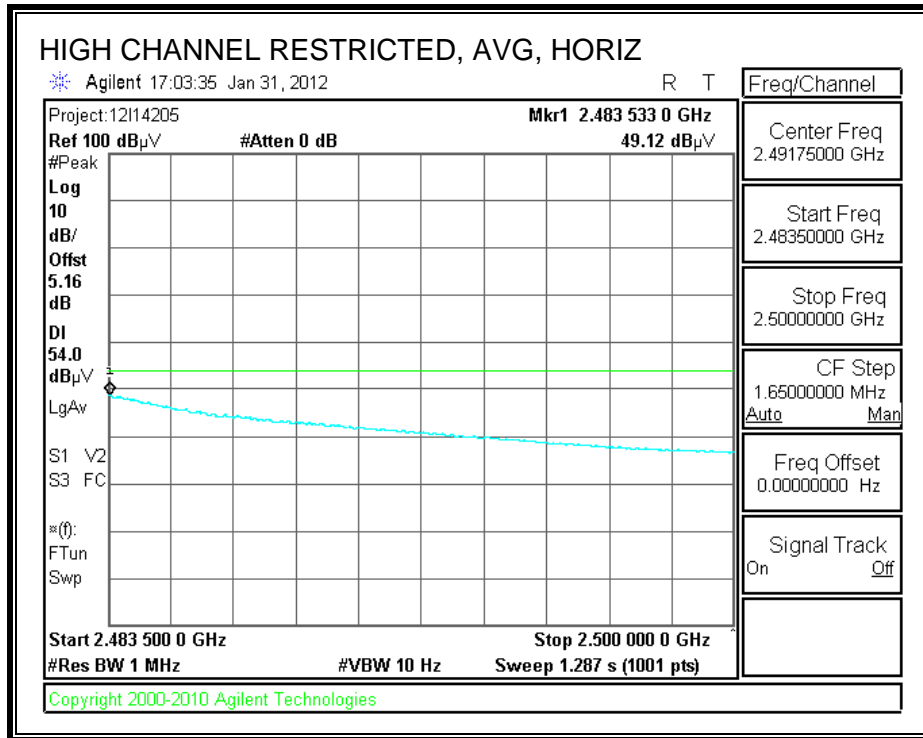

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

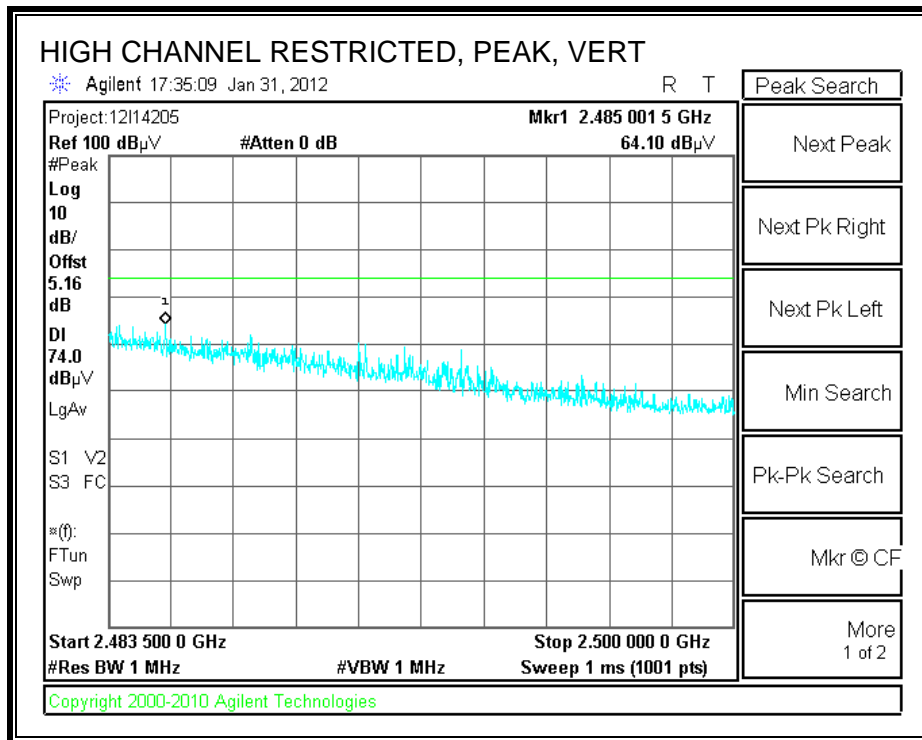



**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber-B

Company: SAMSUNG ELECTRONICS  
 Project #: 12I14205  
 Date: 1/30/2012  
 Test Engineer: MENGISTU MEKURIA  
 Configuration: EUT ALONE  
 Mode: TX, g MODE

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.209

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	48.6	33.9	33.9	6.3	-35.5	0.0	0.0	53.2	38.5	74	54	-20.8	-15.5	V
4.824	3.0	47.5	33.5	33.9	6.3	-35.5	0.0	0.0	52.2	38.1	74	54	-21.8	-15.9	H
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	48.2	34.3	33.9	6.3	-35.5	0.0	0.0	52.9	39.0	74	54	-21.1	-15.0	V
7.311	3.0	41.0	27.6	36.6	8.5	-35.4	0.0	0.0	50.7	37.2	74	54	-23.3	-16.8	V
4.874	3.0	48.9	34.5	33.9	6.3	-35.5	0.0	0.0	53.7	39.3	74	54	-20.3	-14.7	H
7.311	3.0	40.1	26.2	36.6	8.5	-35.4	0.0	0.0	49.7	35.8	74	54	-24.3	-18.2	H
<b>High Channel (2462 MHz)</b>															
4.924	3.0	49.0	35.1	34.0	6.3	-35.5	0.0	0.0	53.9	39.9	74	54	-20.1	-14.1	V
7.386	3.0	42.0	28.2	36.6	8.5	-35.5	0.0	0.0	51.7	37.9	74	54	-22.3	-16.1	V
4.924	3.0	49.7	35.6	34.0	6.3	-35.5	0.0	0.0	54.5	40.5	74	54	-19.5	-13.5	H
7.386	3.0	39.2	26.2	36.6	8.5	-35.5	0.0	0.0	49.0	35.9	74	54	-25.0	-18.1	H


Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


### 8.2.3. TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 2.4 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

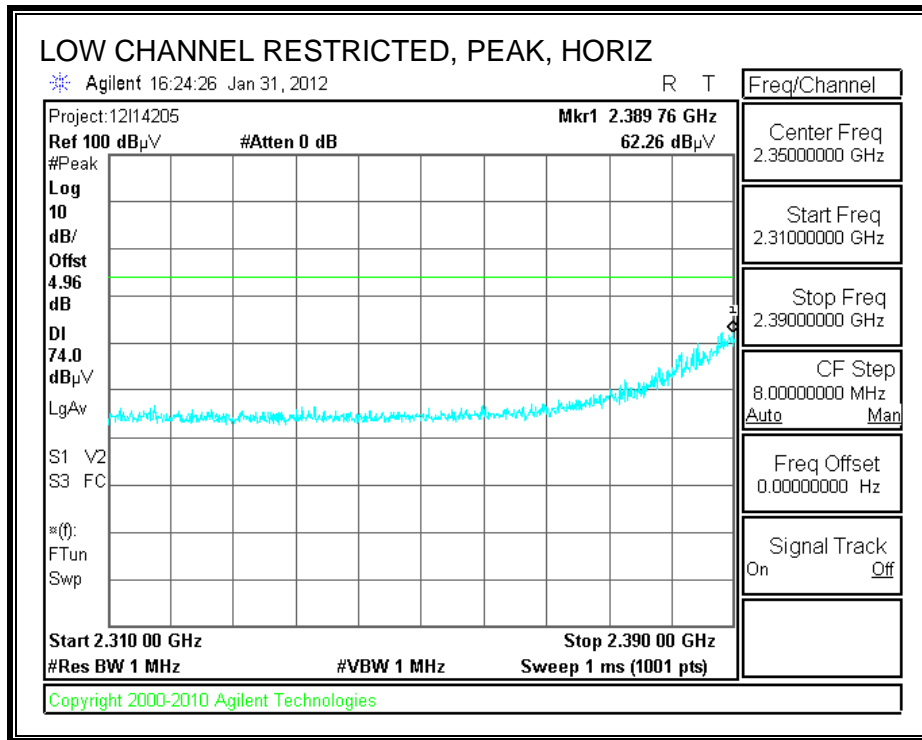

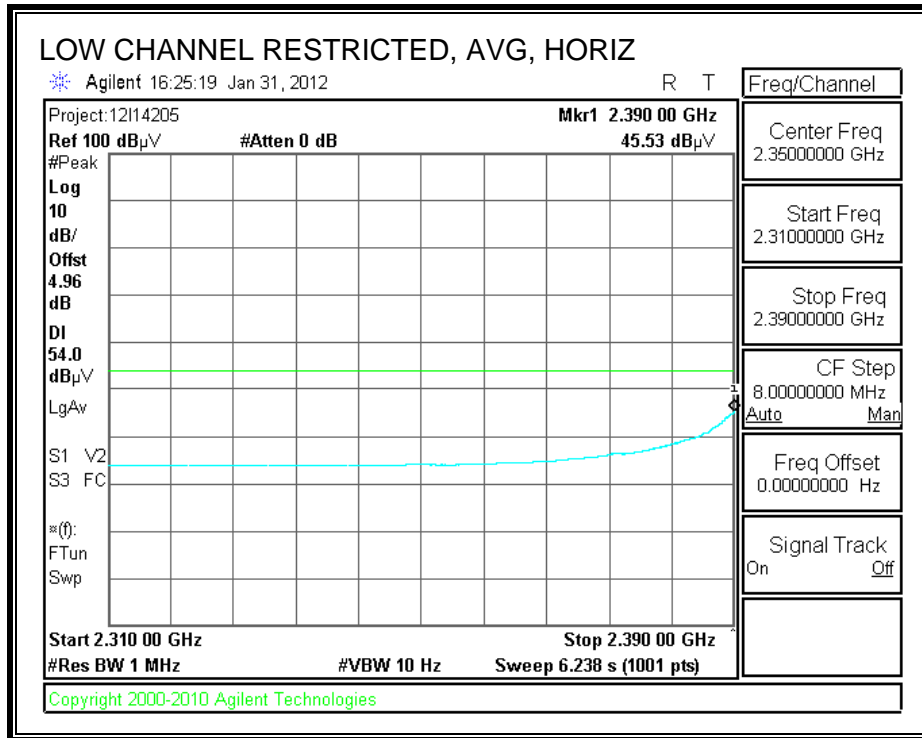



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

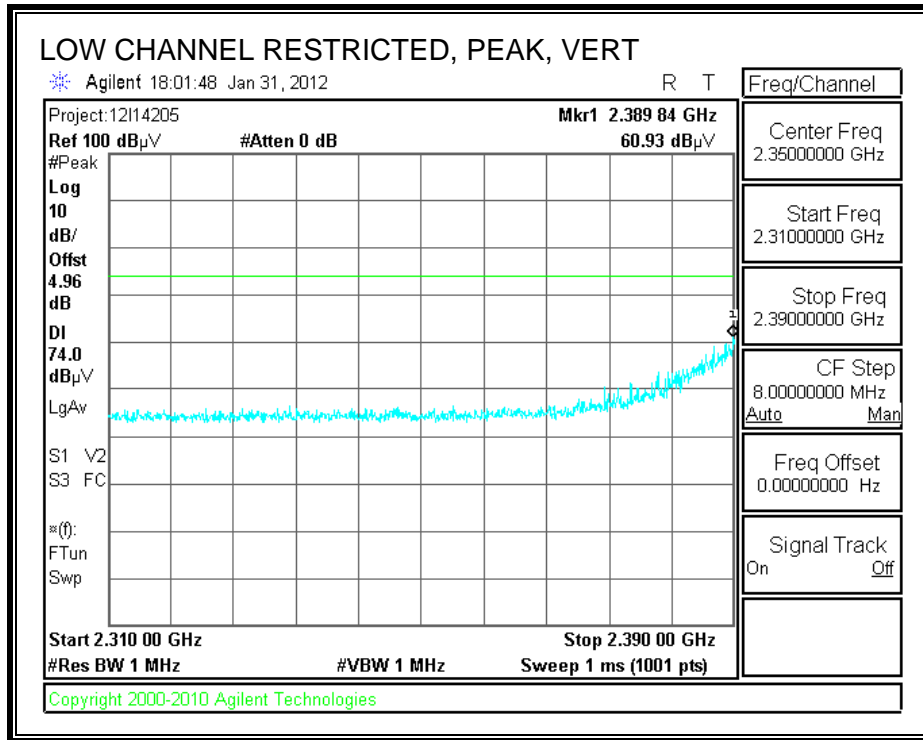

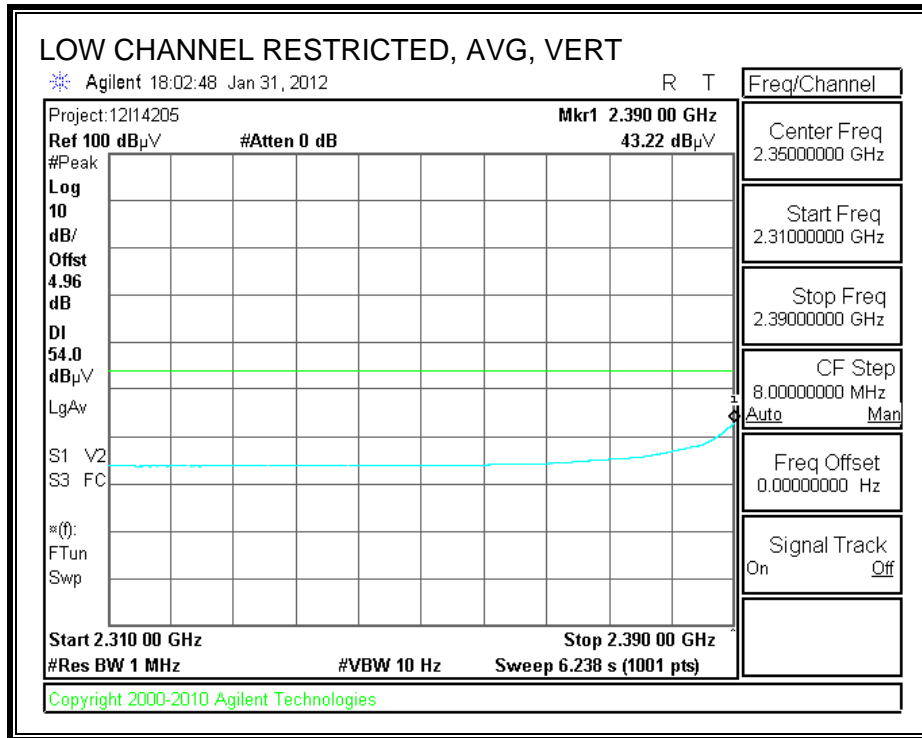



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

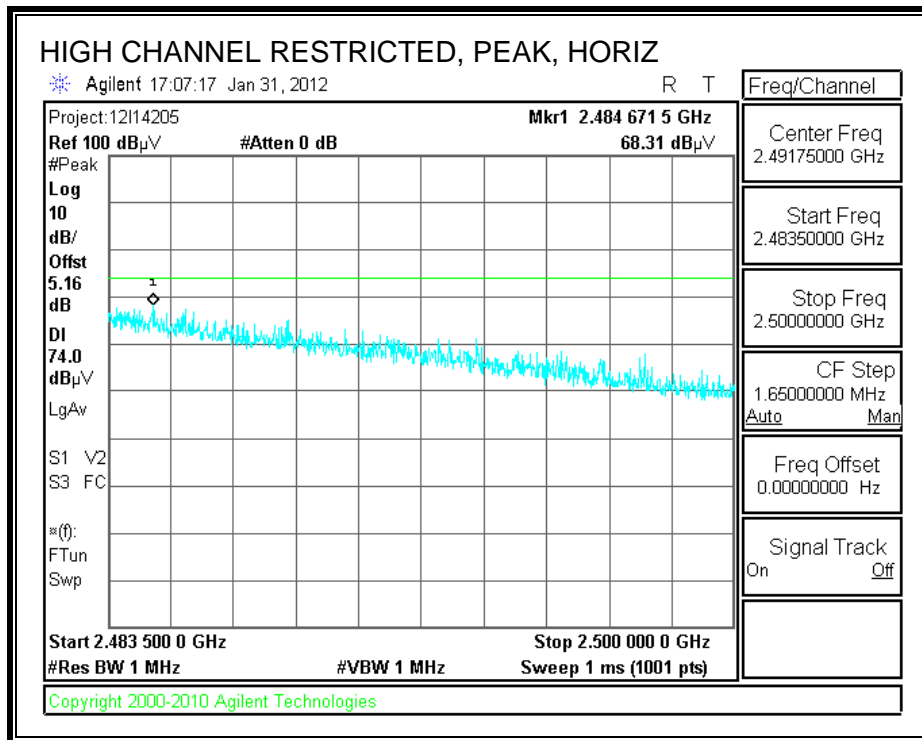

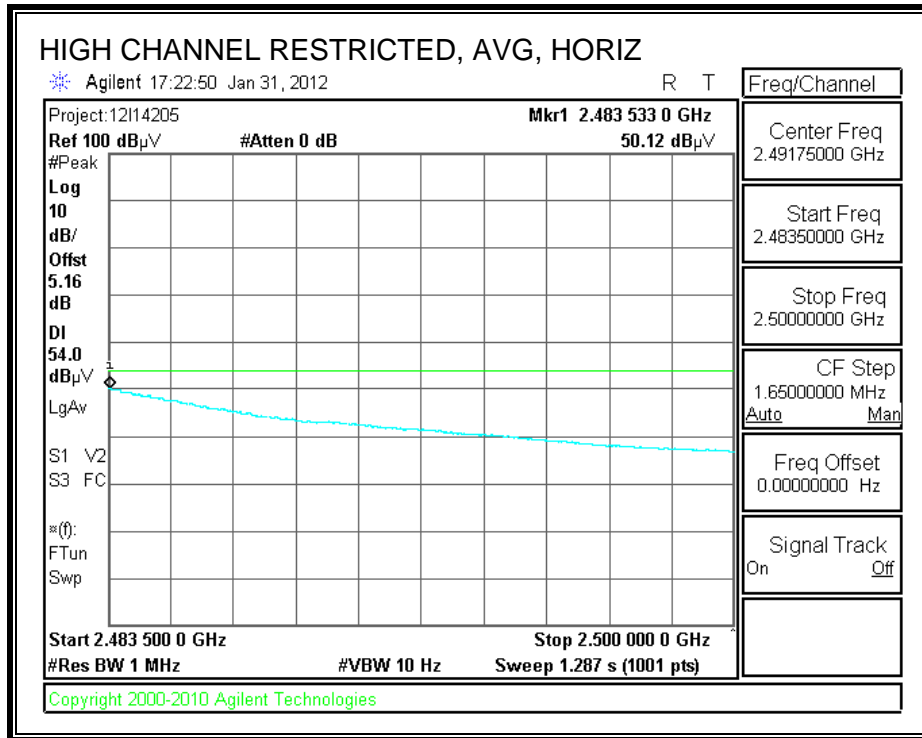

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

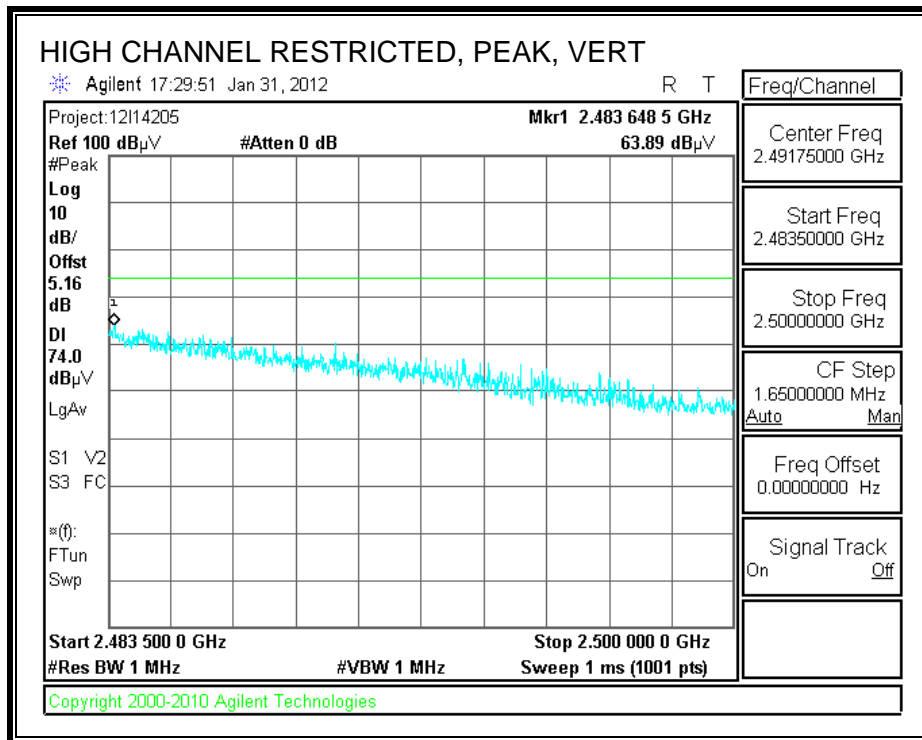

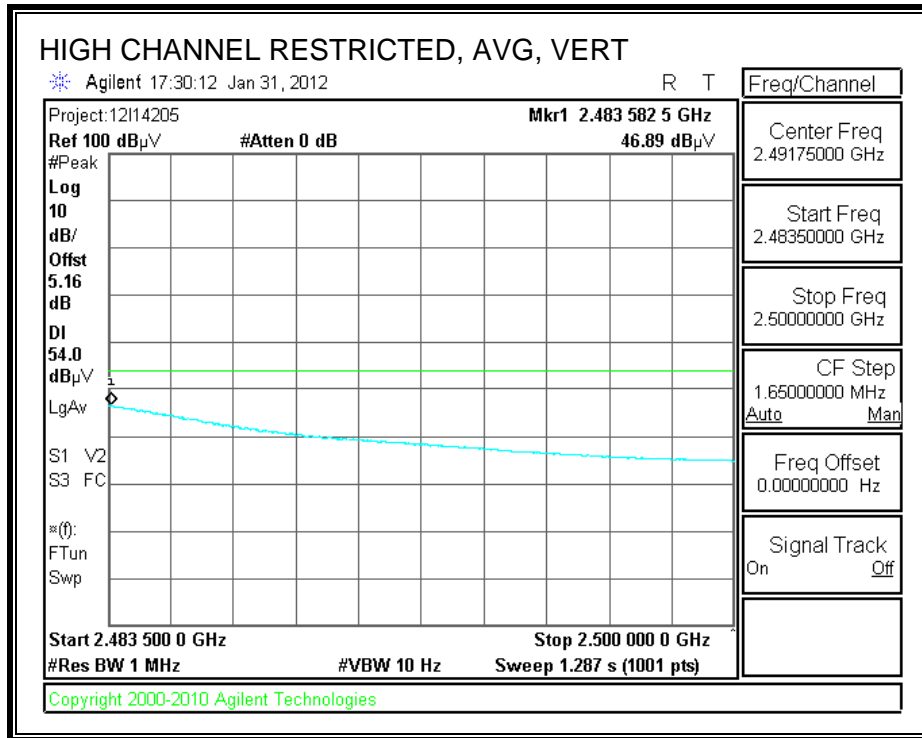

**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber-B

Company: SAMSUNG ELECTRONICS  
 Project #: 12I14205  
 Date: 1/30/2012  
 Test Engineer: MENGISTU MEKURIA  
 Configuration: EUT ALONE  
 Mode: TX, HT20 MODE

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.205

HI Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	48.0	33.4	33.9	6.3	-35.5	0.0	0.0	52.7	38.1	74	54	-21.3	-15.9	V
4.824	3.0	48.0	33.0	33.9	6.3	-35.5	0.0	0.0	52.6	37.6	74	54	-21.4	-16.4	H
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	48.5	33.7	33.9	6.3	-35.5	0.0	0.0	53.3	38.5	74	54	-20.7	-15.5	V
7.311	3.0	40.6	27.3	36.6	8.5	-35.4	0.0	0.0	50.2	36.9	74	54	-23.8	-17.1	V
4.874	3.0	48.4	34.0	33.9	6.3	-35.5	0.0	0.0	53.1	38.8	74	54	-20.9	-15.2	H
7.311	3.0	39.9	26.0	36.6	8.5	-35.4	0.0	0.0	49.5	35.7	74	54	-24.5	-18.3	H
<b>High Channel (2462 MHz)</b>															
4.924	3.0	49.0	34.8	34.0	6.3	-35.5	0.0	0.0	53.9	39.7	74	54	-20.1	-14.3	V
7.386	3.0	41.3	27.9	36.6	8.5	-35.5	0.0	0.0	51.0	37.6	74	54	-23.0	-16.4	V
4.924	3.0	50.0	35.1	34.0	6.3	-35.5	0.0	0.0	54.8	40.0	74	54	-19.2	-14.0	H
7.386	3.0	39.1	26.0	36.6	8.5	-35.5	0.0	0.0	48.8	35.8	74	54	-25.2	-18.2	H


Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

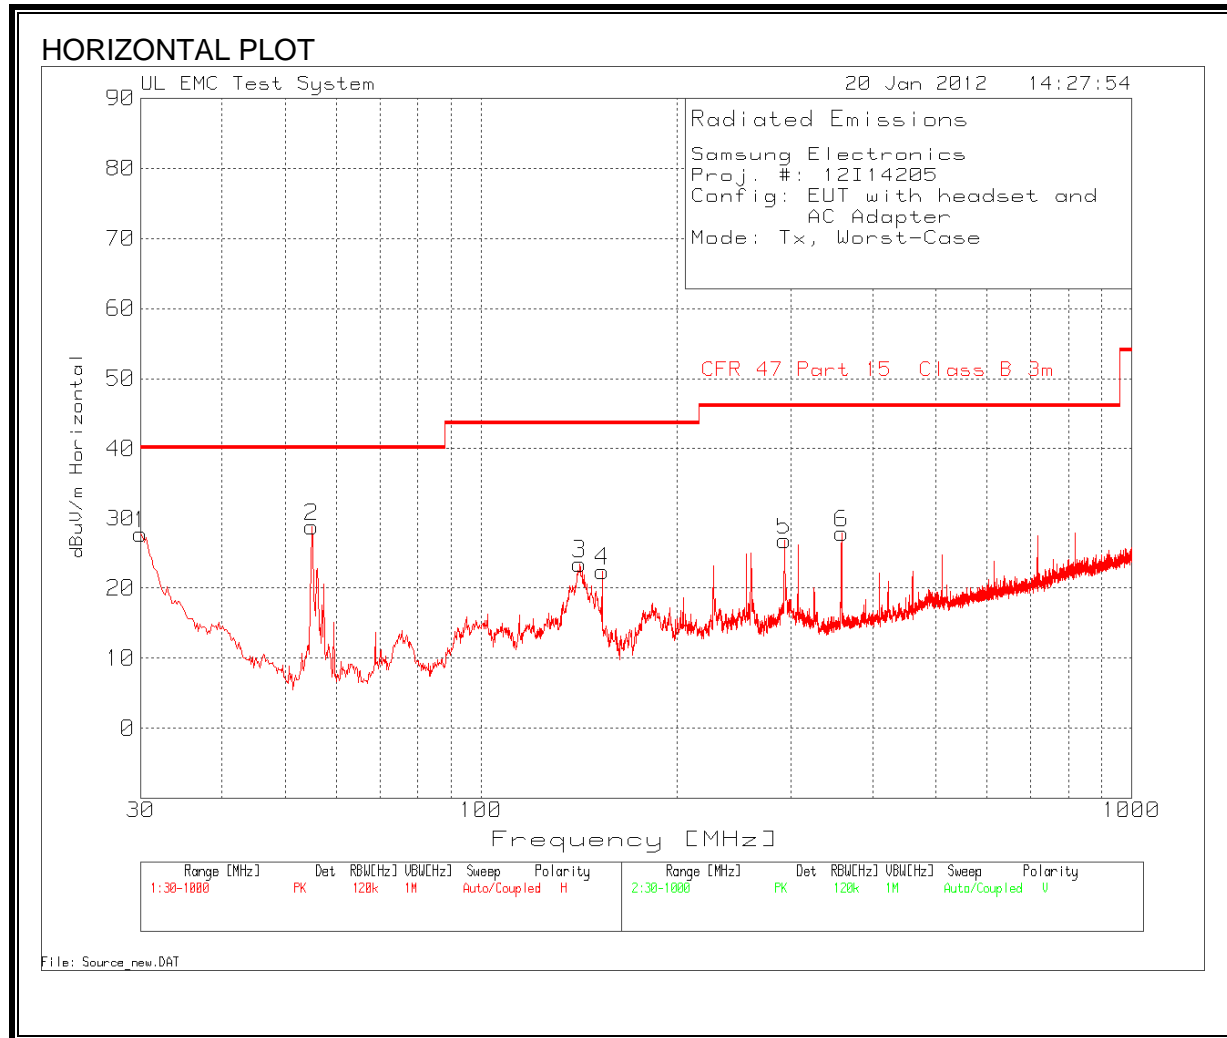

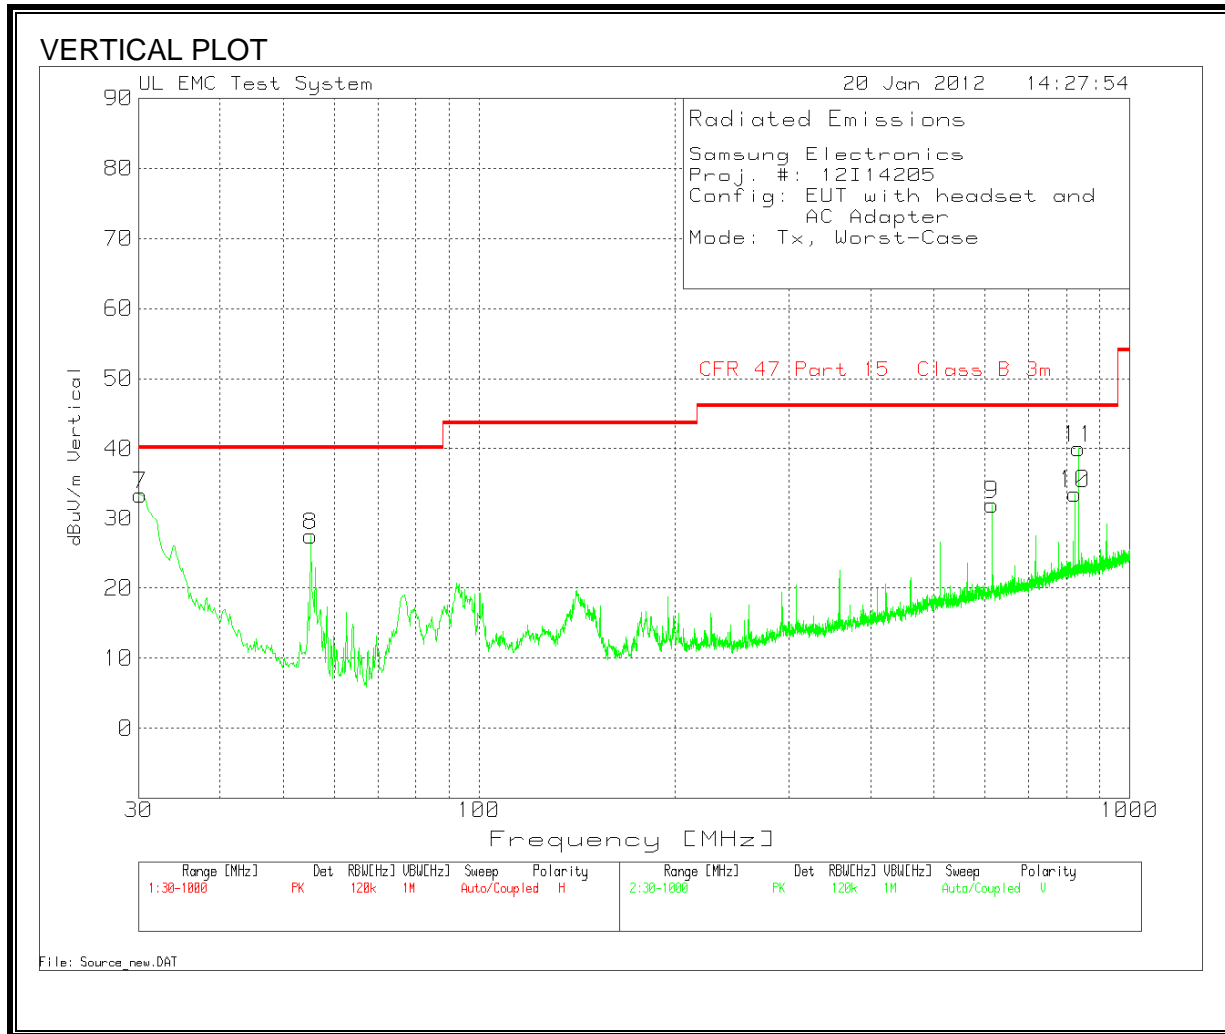

**HORIZONTAL AND VERTICAL DATA**

Samsung Electronics									
Proj. #: 12I14205									
Config: EUT with headset and AC Adapter									
Mode: Tx, Worst-Case									
Range 1 30 - 1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1Ghz ChmbrB Amp [dB]	T130 Bilog Factors.TXT [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
30	36.64	PK	-29.3	20.4	27.74	40	-12.26	200	Horz
55.006	49.83	PK	-29	7.9	28.73	40	-11.27	300	Horz
141.8485	38.41	PK	-28.1	13.1	23.41	43.5	-20.09	200	Horz
153.4792	38.4	PK	-28	12	22.4	43.5	-21.1	200	Horz
292.6599	40.55	PK	-26.9	13.1	26.75	46	-19.25	91	Horz
358.3733	40.37	PK	-26.8	14.3	27.87	46	-18.13	91	Horz
Range 2 30 - 1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1Ghz ChmbrB Amp [dB]	T130 Bilog Factors.TXT [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
30.1938	42.39	PK	-29.3	20.3	33.39	40	-6.61	100	Vert
55.1998	48.61	PK	-29	7.9	27.51	40	-12.49	300	Vert
614.4424	40.16	PK	-26.5	18.4	32.06	46	-13.94	100	Vert
824.958	37.77	PK	-25.3	21.1	33.57	46	-12.43	100	Vert
834.4564	44.02	PK	-25.2	21.2	40.02	46	-5.98	100	Vert

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

Samsung Electronics									
Proj. #: 14I14205									
Config.: EUT with headset and AC Adapter									
Mode: TX, Worst-Case									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT [dB]	LC Cables 1&3.TXT [dB]	dBuV	CISPR Class B QP	Margin	CISPR Class B Avg	Margin
0.501	47.17	PK	0.1	0	47.27	56	-8.73	-	-
0.501	36.14	Av	0.1	0	36.24	-	-	46	-9.76
0.798	45.48	PK	0.1	0	45.58	56	-10.42	-	-
0.798	28.11	Av	0.1	0	28.21	-	-	46	-17.79
1.9725	45	PK	0.1	0.1	45.2	56	-10.8	-	-
1.9725	26.26	Av	0.1	0.1	26.46	-	-	46	-19.54
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT [dB]	LC Cables 1&3.TXT [dB]	dBuV	CISPR Class B QP	Margin	CISPR Class B Avg	Margin
0.4965	46.8	PK	0.1	0	46.9	56.1	-9.2	-	-
0.4965	23.43	Av	0.1	0	23.53	-	-	46.1	-22.57
0.6675	44.36	PK	0.1	0	44.46	56	-11.54	-	-
0.6675	21.31	Av	0.1	0	21.41	-	-	46	-24.59
1.869	43.41	PK	0.1	0.1	43.61	56	-12.39	-	-
1.869	19.96	Av	0.1	0.1	20.16	-	-	46	-25.84

**LINE 1 RESULTS**

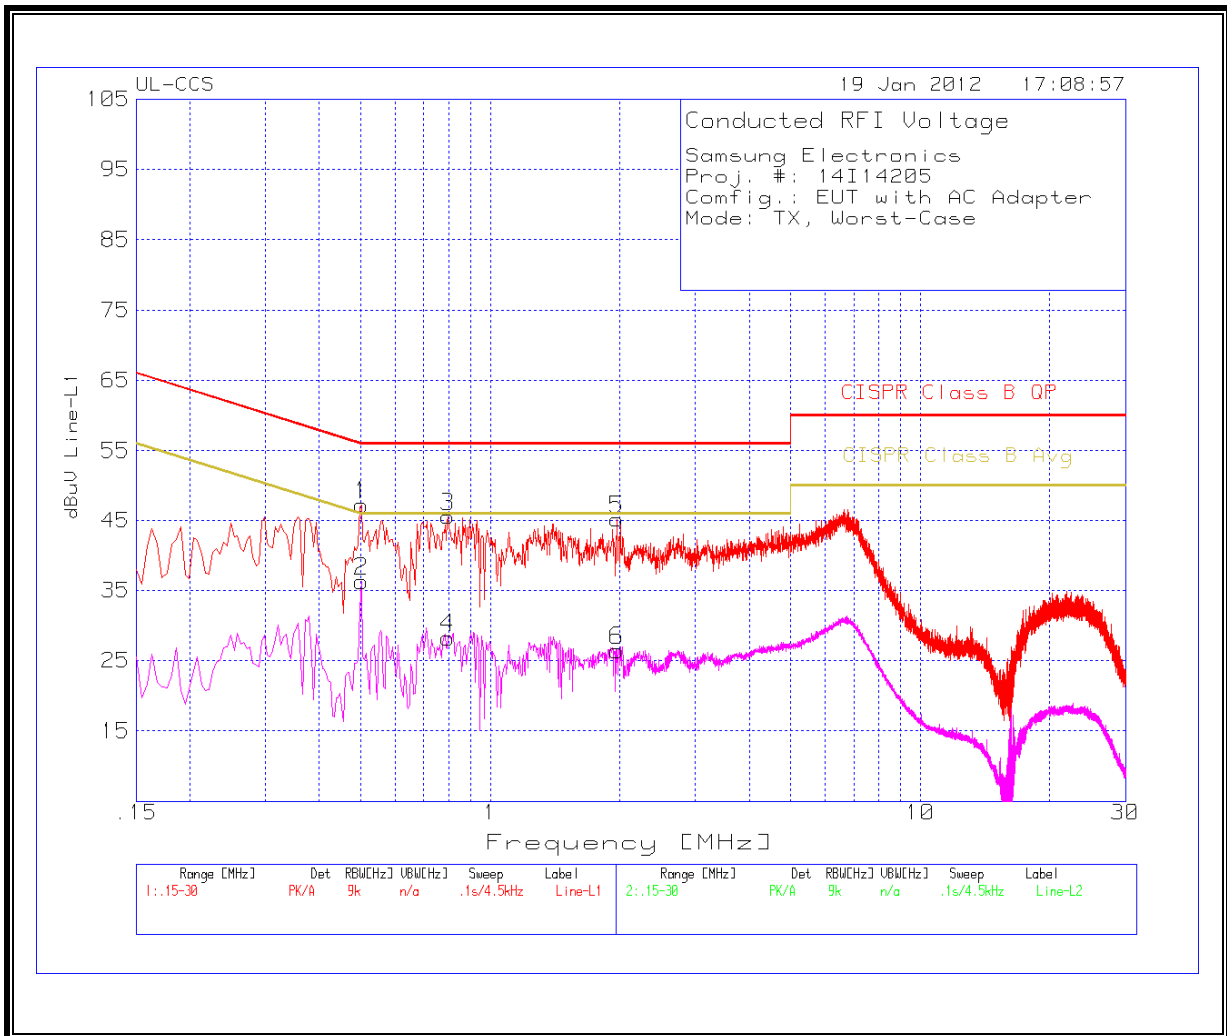

**LINE 2 RESULTS**

