



**FCC CFR47 PART 15 SUBPART C**

**BLUETOOTH**

**CERTIFICATION TEST REPORT**

**FOR**

**TABLET WITH 802.11BGN, BT3.0**

**MODEL NUMBER: GT-P3113**

**FCC ID: A3LGTP3113**

**REPORT NUMBER: 12114205-2**

**ISSUE DATE: FEBRUARY 09, 2012**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**416, MAETAN 3-DONG, YEONGTONG-GU**  
**SUWON CITY, GYEONGGI-DO 443-742**  
**SOUTH KOREA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	02/09/12	Initial Issue	F. Ibrahim

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>SAMPLE CALCULATION</i> .....	6
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	6
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>7</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	7
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	7
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	8
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>12</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>13</b>
7.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....	13
7.1.1. 20 dB BANDWIDTH .....	13
7.1.2. HOPPING FREQUENCY SEPARATION .....	17
7.1.3. NUMBER OF HOPPING CHANNELS.....	19
7.1.4. AVERAGE TIME OF OCCUPANCY .....	24
7.1.5. OUTPUT POWER.....	31
7.1.6. AVERAGE POWER .....	35
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	36
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i> .....	45
7.2.1. 20 dB BANDWIDTH .....	45
7.2.2. HOPPING FREQUENCY SEPARATION .....	49
7.2.3. NUMBER OF HOPPING CHANNELS.....	51
7.2.4. AVERAGE TIME OF OCCUPANCY .....	56
7.2.5. OUTPUT POWER.....	63
7.2.6. AVERAGE POWER .....	67
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	68
<b>8. RADIATED TEST RESULTS</b> .....	<b>77</b>
8.1. <i>LIMITS AND PROCEDURE</i> .....	77
8.2. <i>TRANSMITTER ABOVE 1 GHz</i> .....	78
8.2.1. BASIC DATA RATE GFSK MODULATION.....	78
8.2.2. ENHANCED DATA RATE 8PSK MODULATION.....	87

---

8.3. WORST-CASE BELOW 1 GHz .....	96
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>99</b>
<b>10. SETUP PHOTOS .....</b>	<b>103</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON CITY, GYEONGGI-DO 443-742, SOUTH KOREA

**EUT DESCRIPTION:** TABLET WITH 802.11bgn, BT3.0

**MODEL:** GT-P3113

**SERIAL NUMBER:** 03053(CONDUCTED) and 03048(RADIATED)

**DATE TESTED:** JANUARY 31 - FEBRUARY 01, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM  
EMC SUPERVISOR  
UL CCS

Tested By:



MENGISTU MEKURIA  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Tablet with 802.11bgn, BT3.0

The radio module is manufactured by Broadcom Corporation.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range	Mode	Output Power (dBm)	Output Power (mW)
2400-2480	Basic GFSK	12.19	16.56
2400-2480	Enhanced 8PSK	12.15	16.41

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an 802.11 b/g/n and a Bluetooth antenna, with a maximum gain as stated in the table below:

No.	Contents	Standards			Unit	Condition	Remarks
		Min.	Avg.	Max.			
1	Gain of BT/WIFI	-6.4	-	-1.4	dBi	Based on Max. Gain in H-Plane.	
2	VSWR of BT/WIFI	1.2	1.7	2.2	-	2213 MHz	Jig Data
		1.2	1.7	2.2	-	2233 MHz	

---

## **5.4. SOFTWARE AND FIRMWARE**

Bluetooth firmware - BCM4330B1\_002.001.003.0634.0678.hcd  
Wi-Fi Firmware Rev 5.90.125.1191

EUT driver software version: P3113.001

## **5.5. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For the fundamental investigation, since the EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated, also with AC/DC adapter, and earphone, and the worst case was found to be at Y orientation with headset alone.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA-P11X	3046	N/A
Headset	Samsung	EHS64AVFWE	3040	N/A

### I/O CABLES (CONDUCTED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	2.0 m	NA
2	DC	1	USB	shielded	1.0m	NA
3	RF	1	SMA	Shielded	0.6 m	NA


### I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Un-shielded	1.0m	NA
2	Audio	1	Earphone	Un-shielded	1.2m	Volume Control on Cable


### TEST SETUP

The EUT is connected to Bluetooth tester via a directional coupler during the tests.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

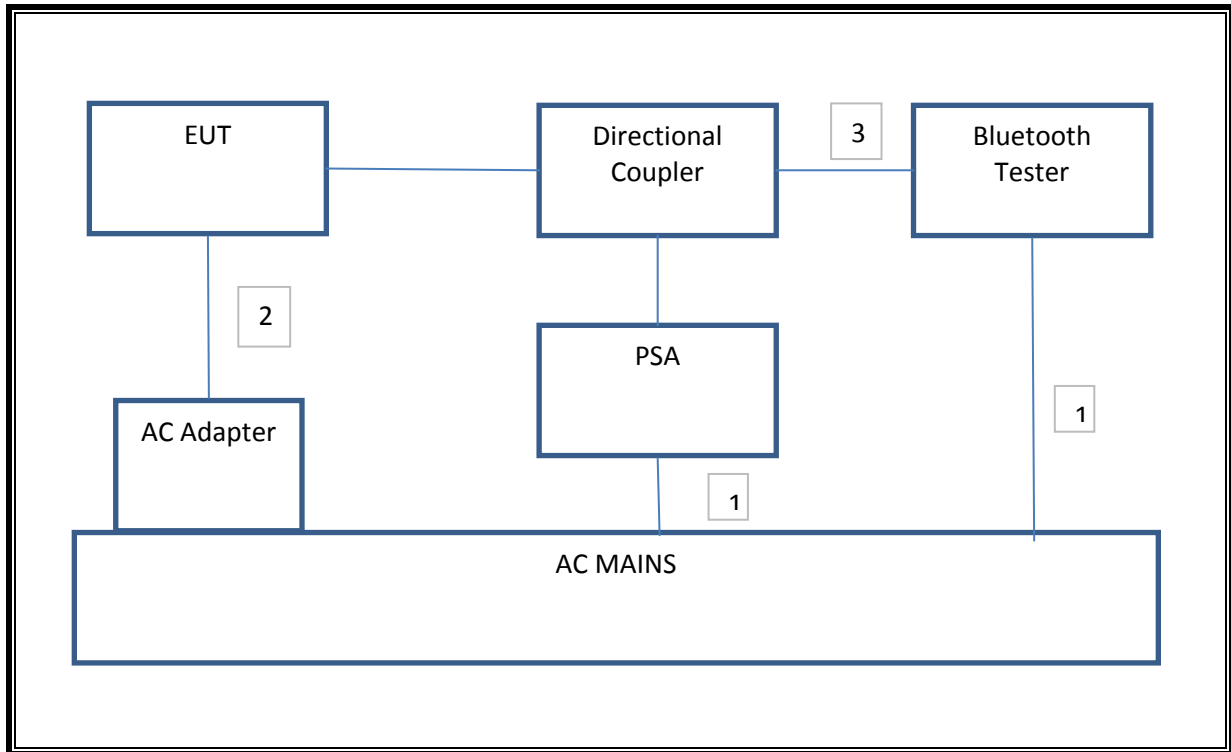

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

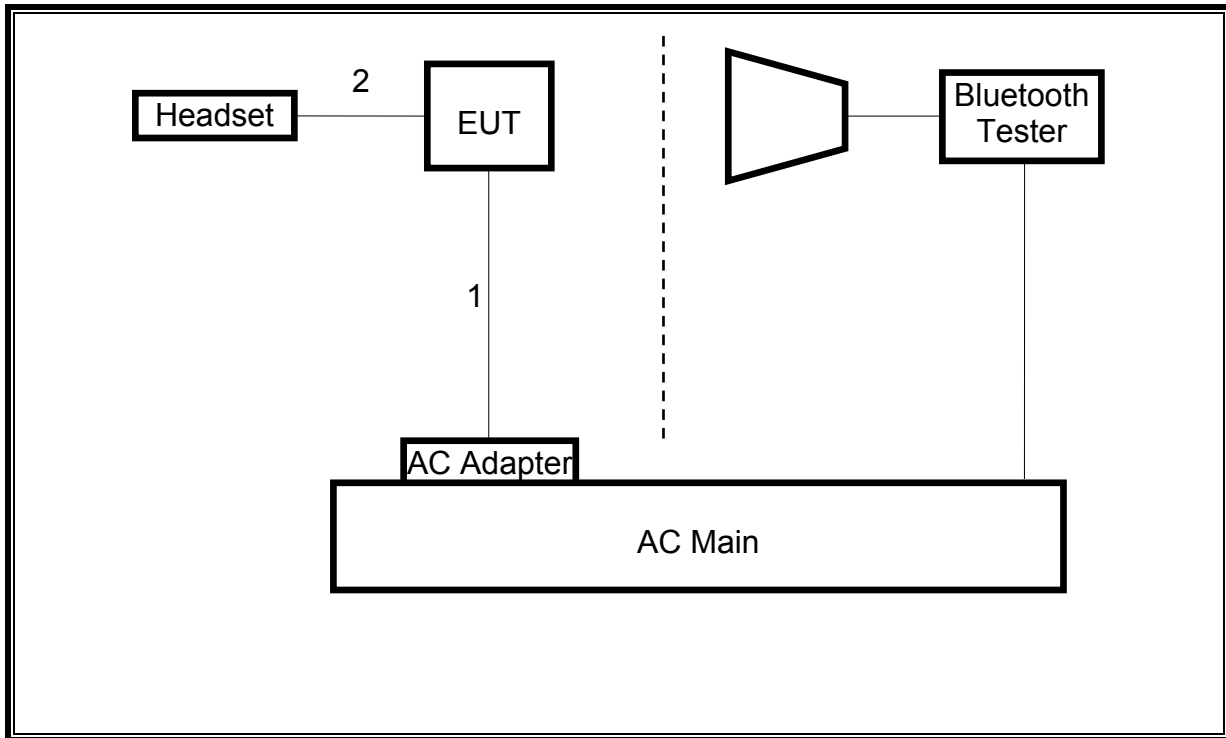

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	01/28/11	04/28/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	07/06/11	07/06/12
Bluetooth Tester	R & S	N/A	N/A	04/27/11	04/27/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	07/16/11	07/16/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/11	06/29/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/11	01/27/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/18/11	07/18/12
Directional Coupler	RF-:ambda	N/A	11101300751	CNR	CNR
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	12/13/11	12/13/12

## 7. ANTENNA PORT TEST RESULTS

### 7.1. BASIC DATA RATE GFSK MODULATION

#### 7.1.1. 20 dB BANDWIDTH

##### LIMIT

None; for reporting purposes only.


##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.


##### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.041
Middle	2441	1.041
High	2480	1.041

**20 dB BANDWIDTH**

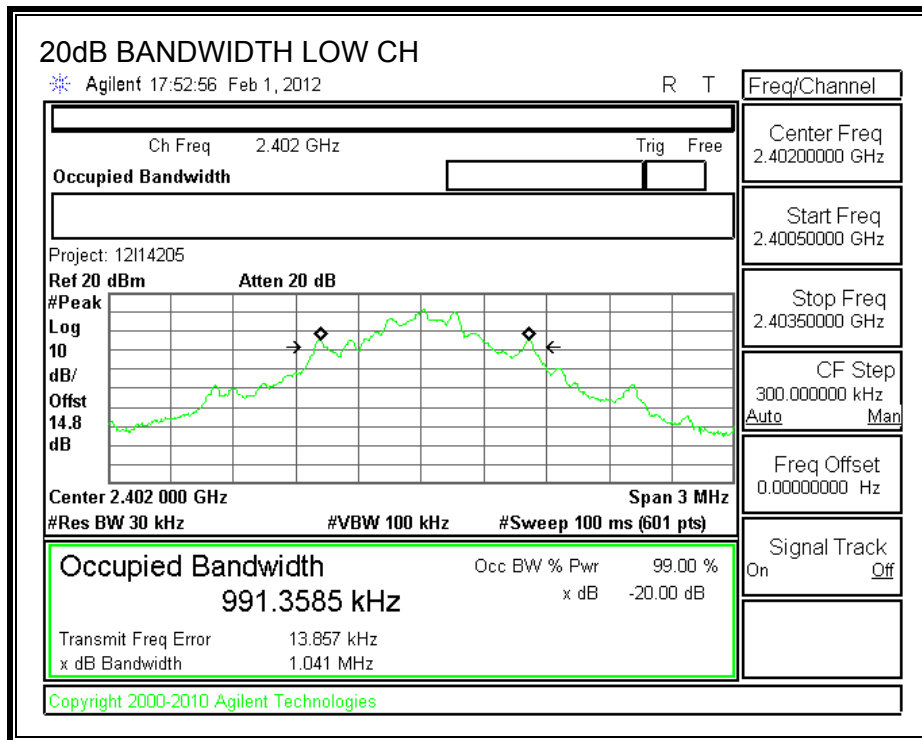

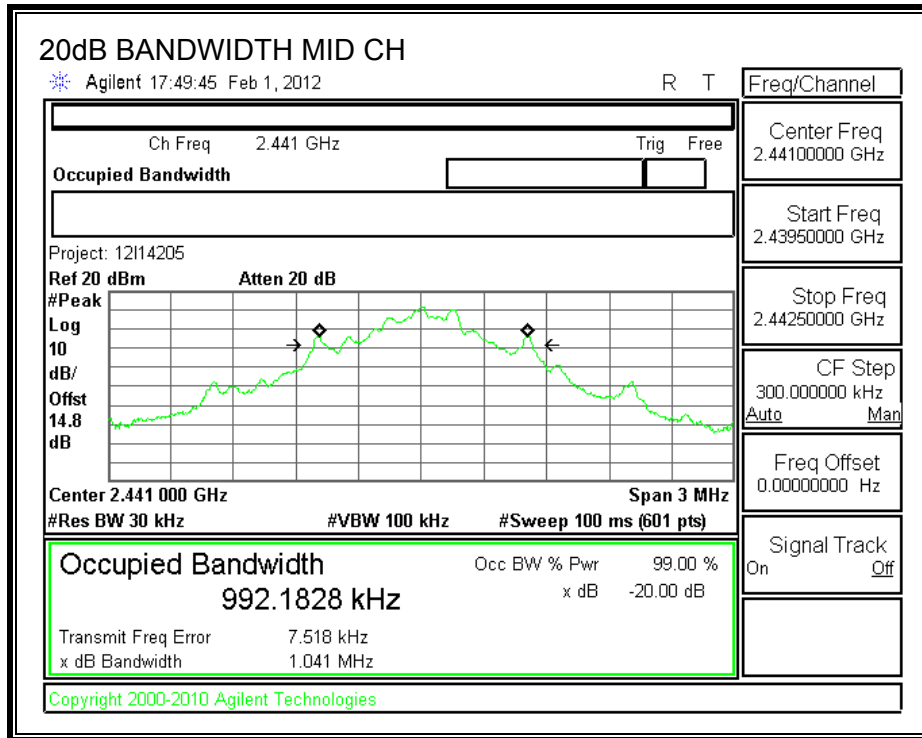

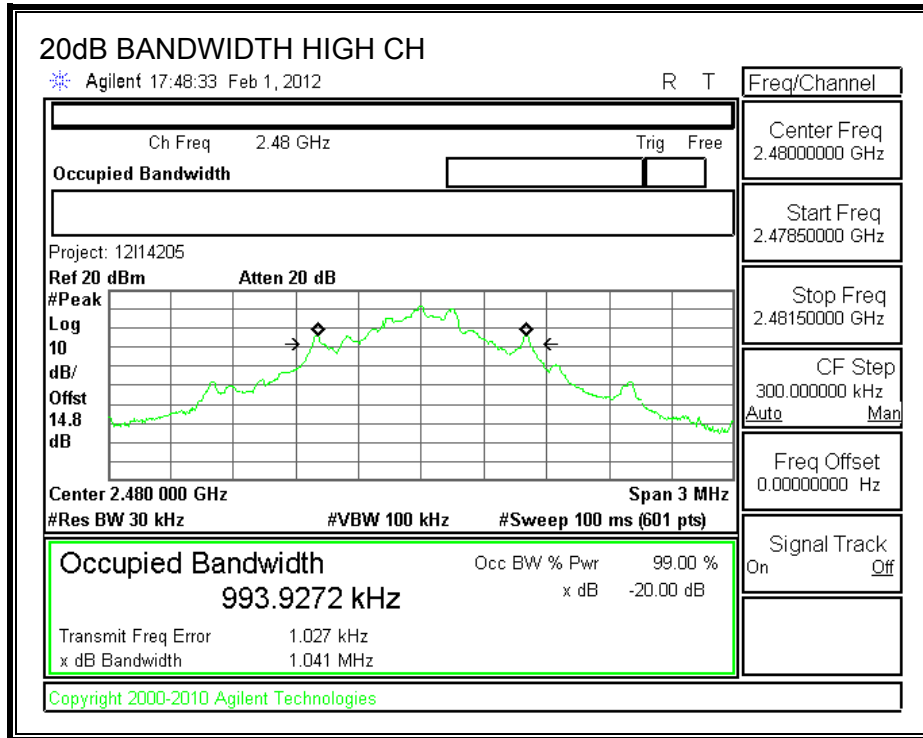

## 7.1.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

**RESULTS**

**HOPPING FREQUENCY SEPARATION**

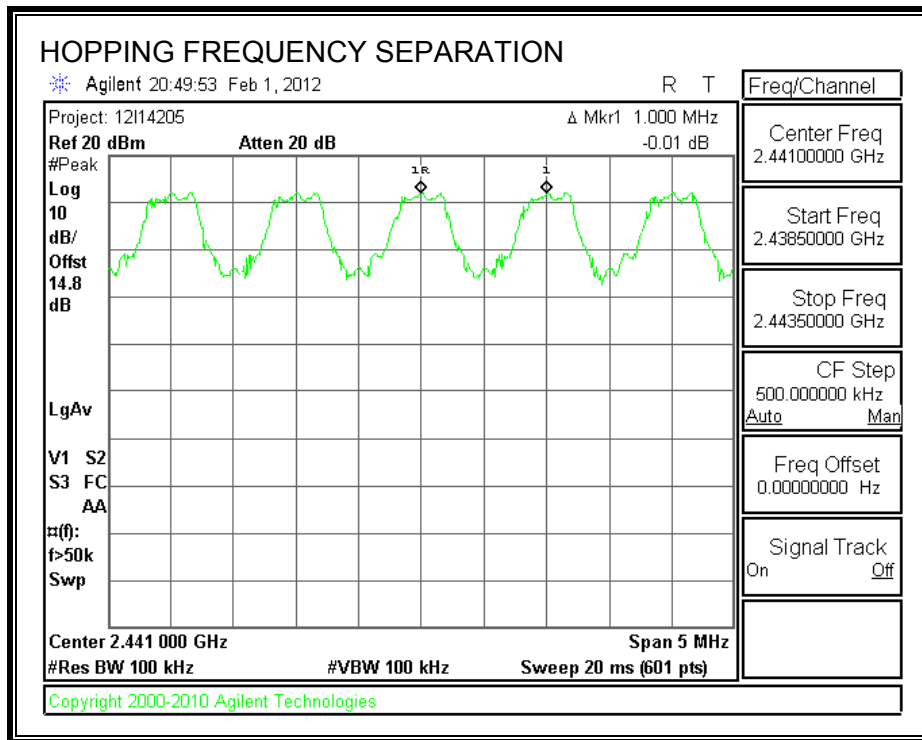

### **7.1.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


#### **RESULTS**


79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

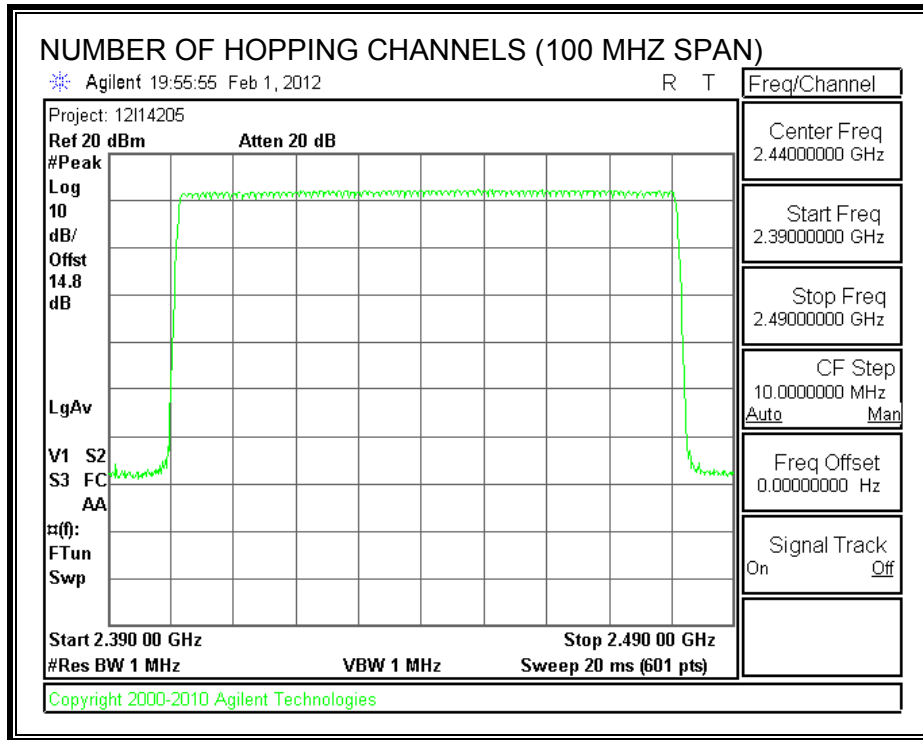

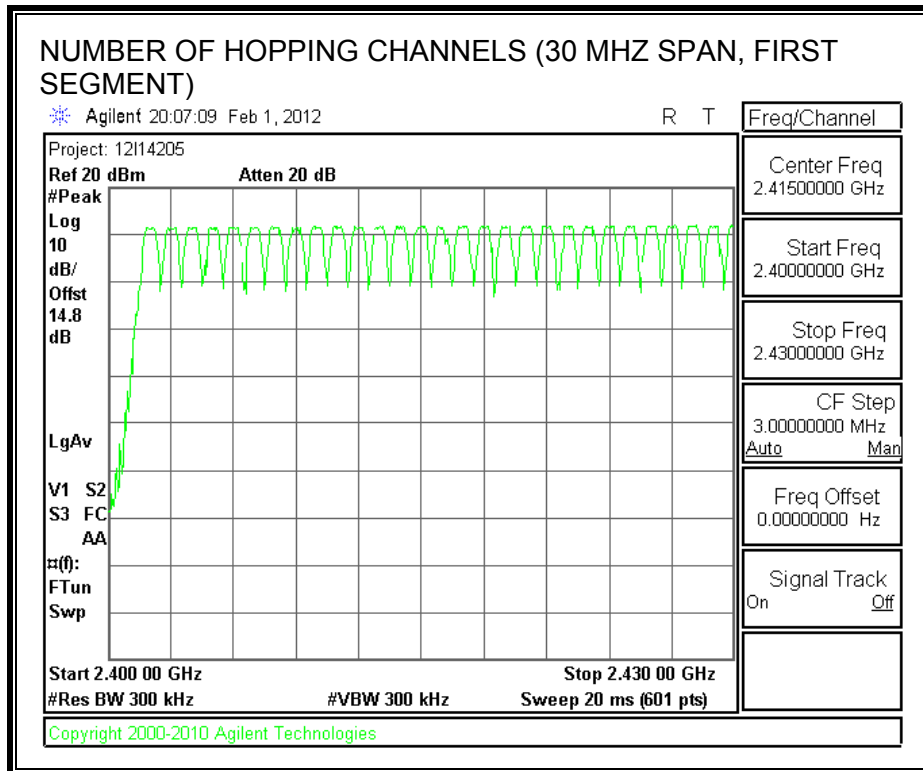

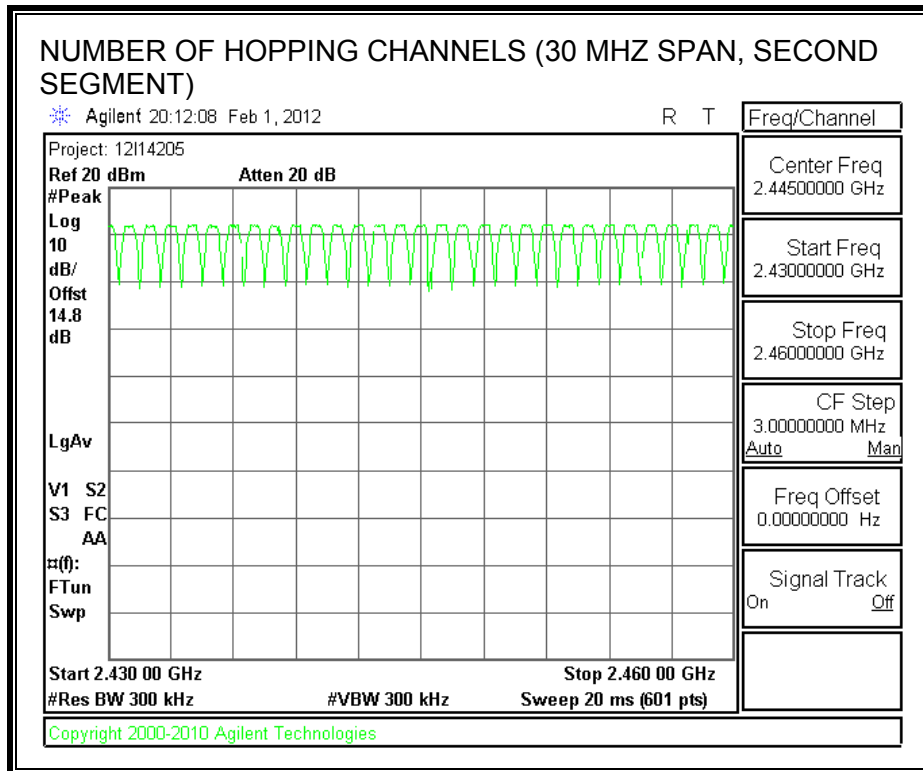

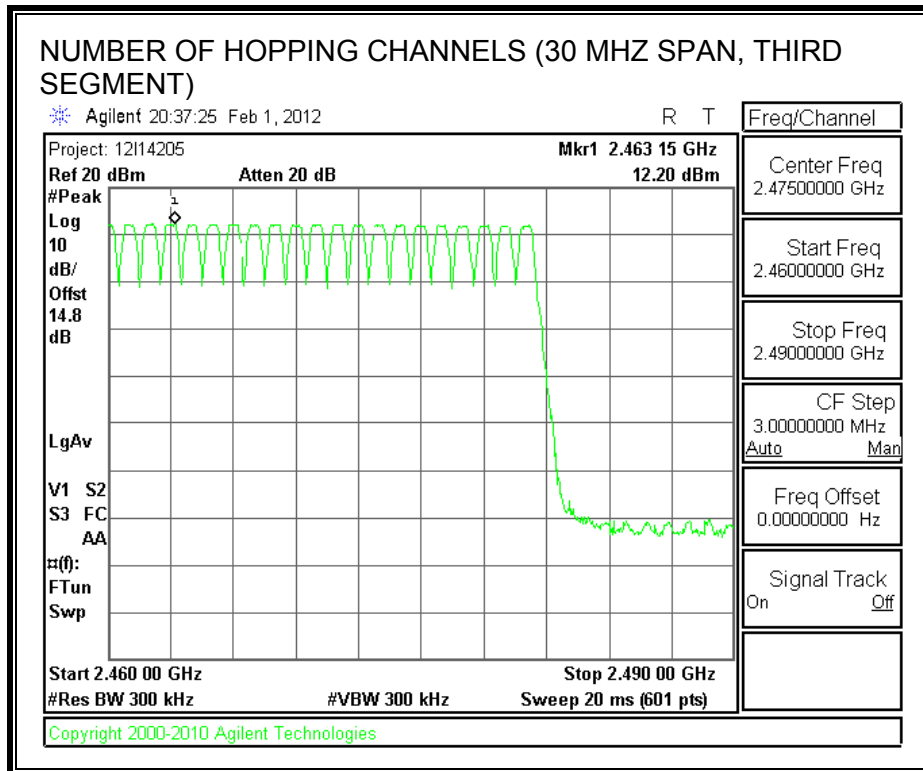

### 7.1.4. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .


#### RESULTS

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.392	32	0.125	0.4	-0.275
DH3	1.640	17	0.279	0.4	-0.121
DH5	2.900	11	0.319	0.4	-0.081

**DH1**

**PULSE WIDTH**

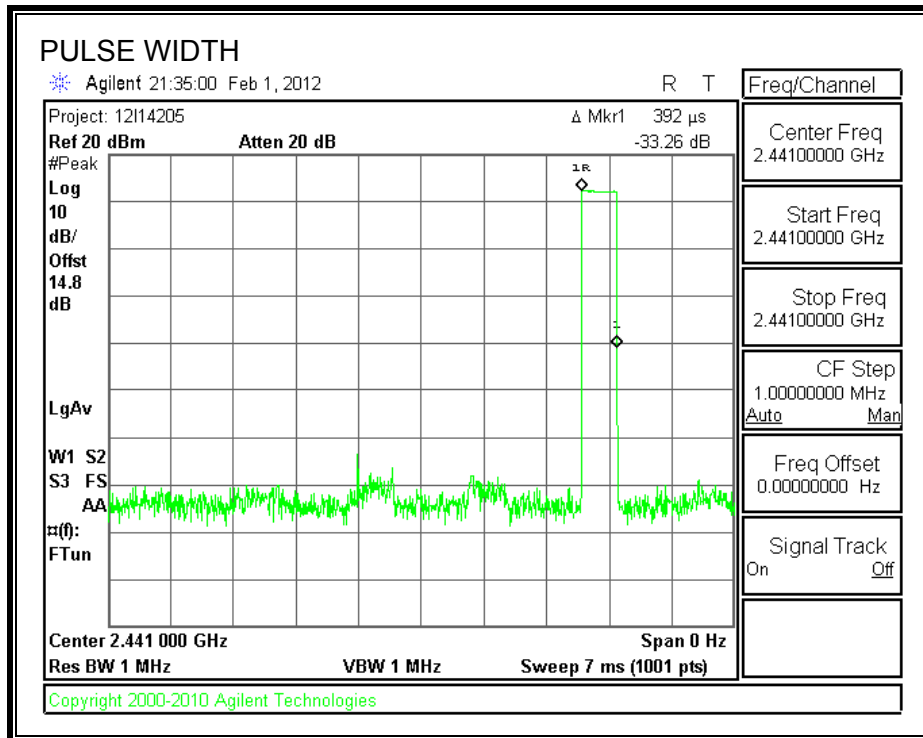


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

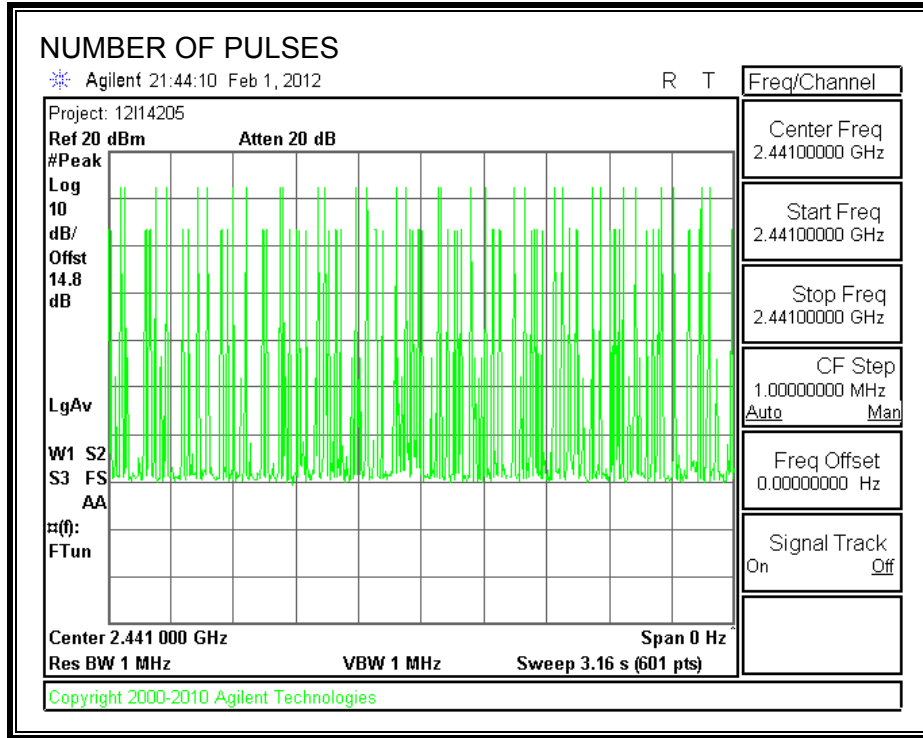


**DH3**

**PULSE WIDTH**

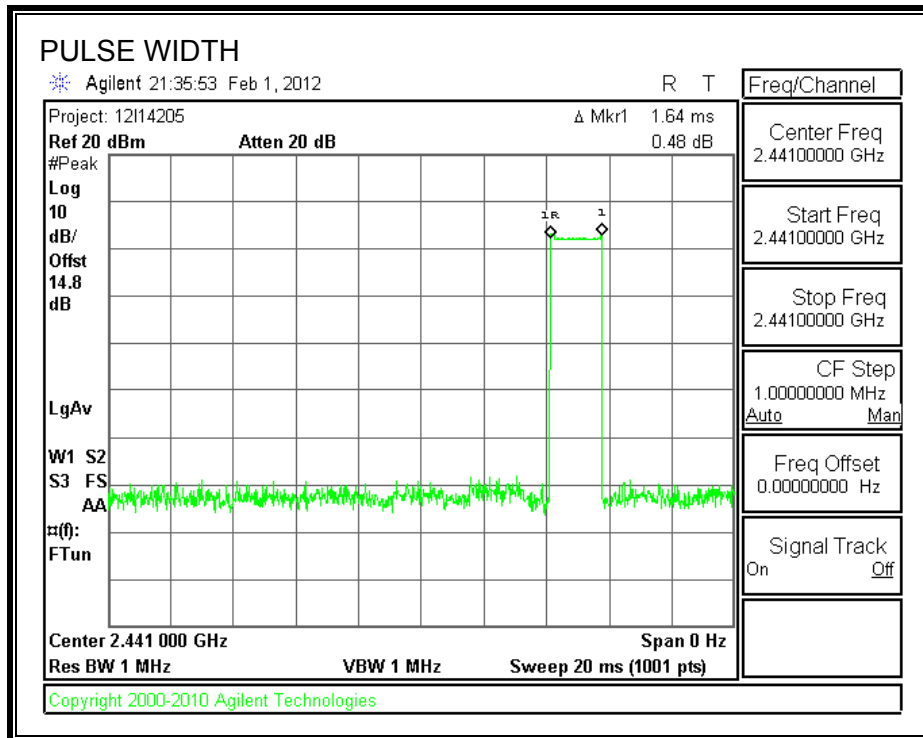


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

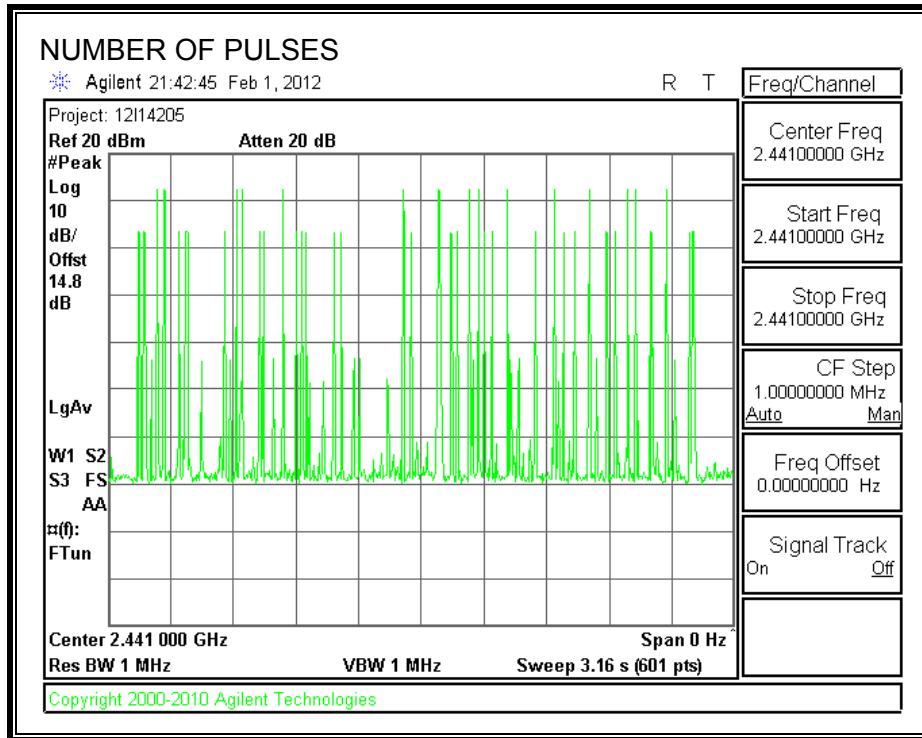


**DH5**

**PULSE WIDTH**

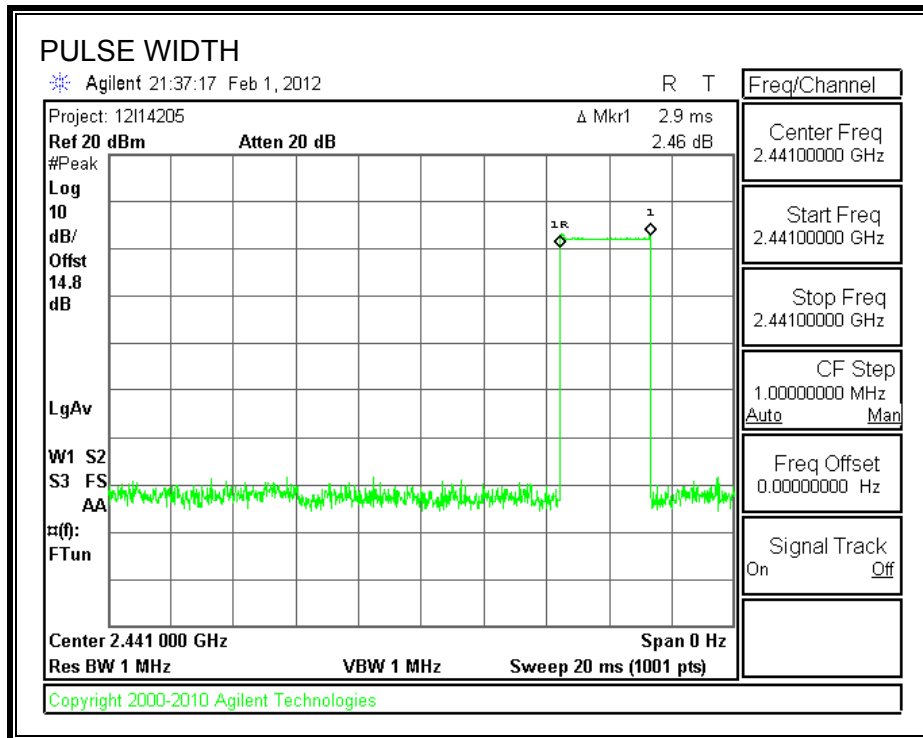

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

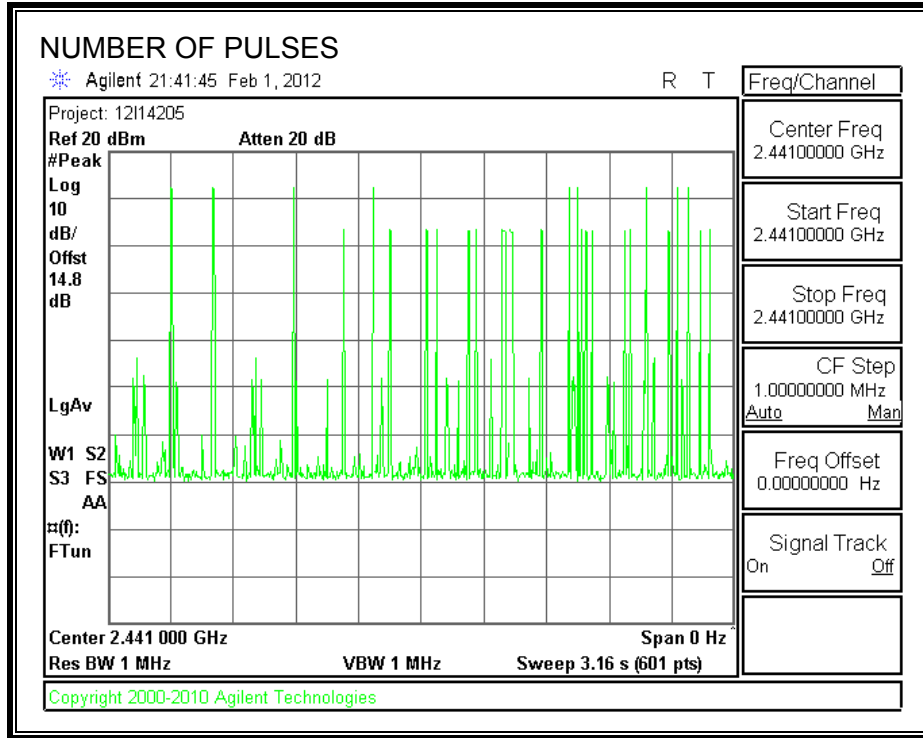

### 7.1.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.88	30	-18.12
Middle	2441	12.19	30	-17.81
High	2480	12.10	30	-17.90

**OUTPUT POWER**

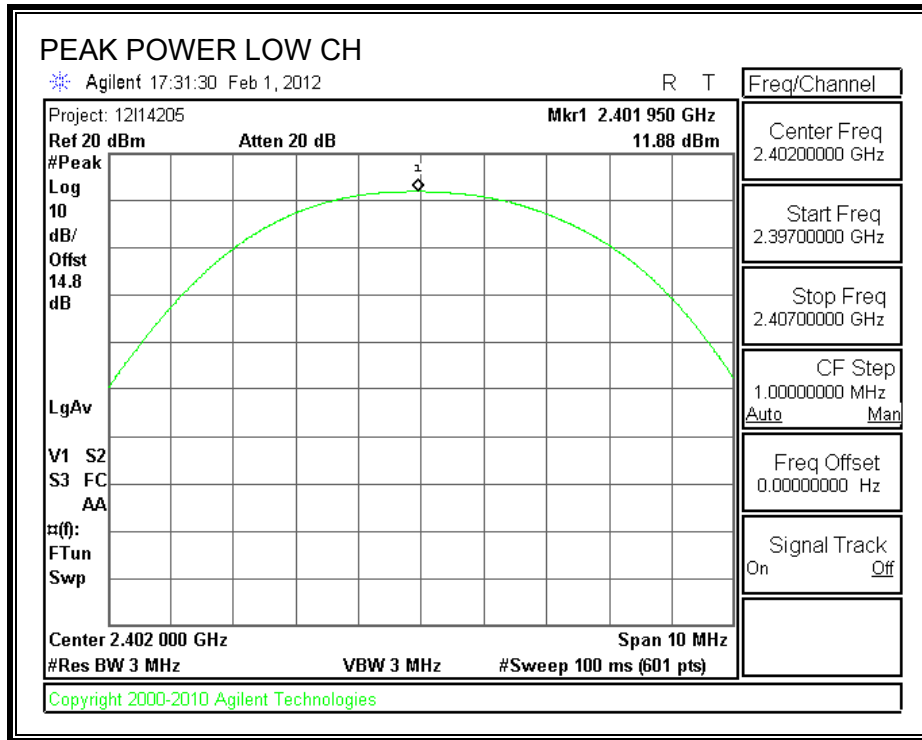

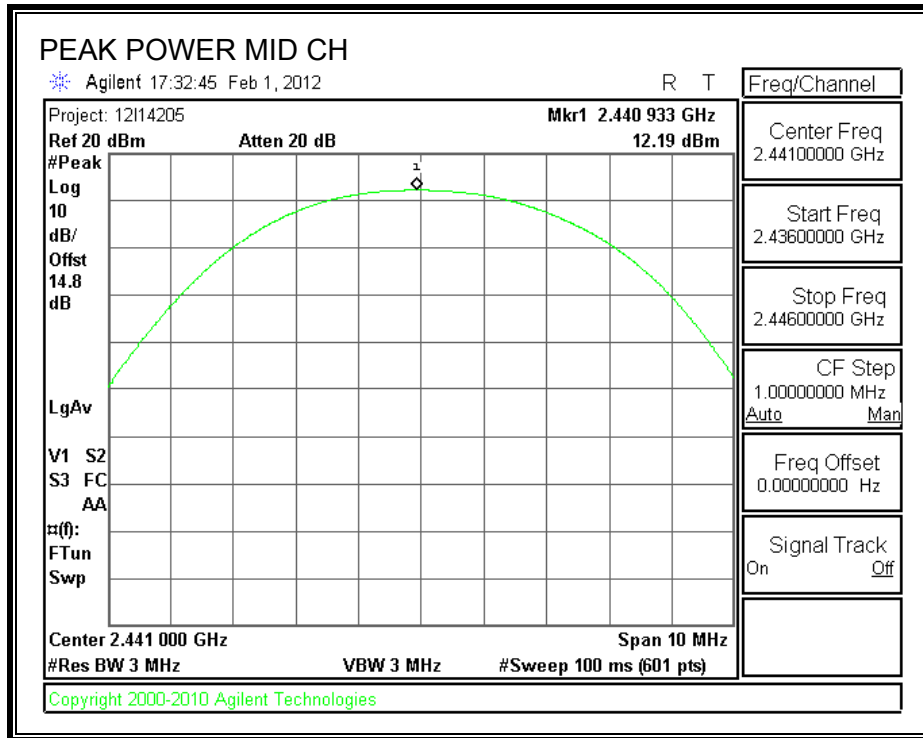

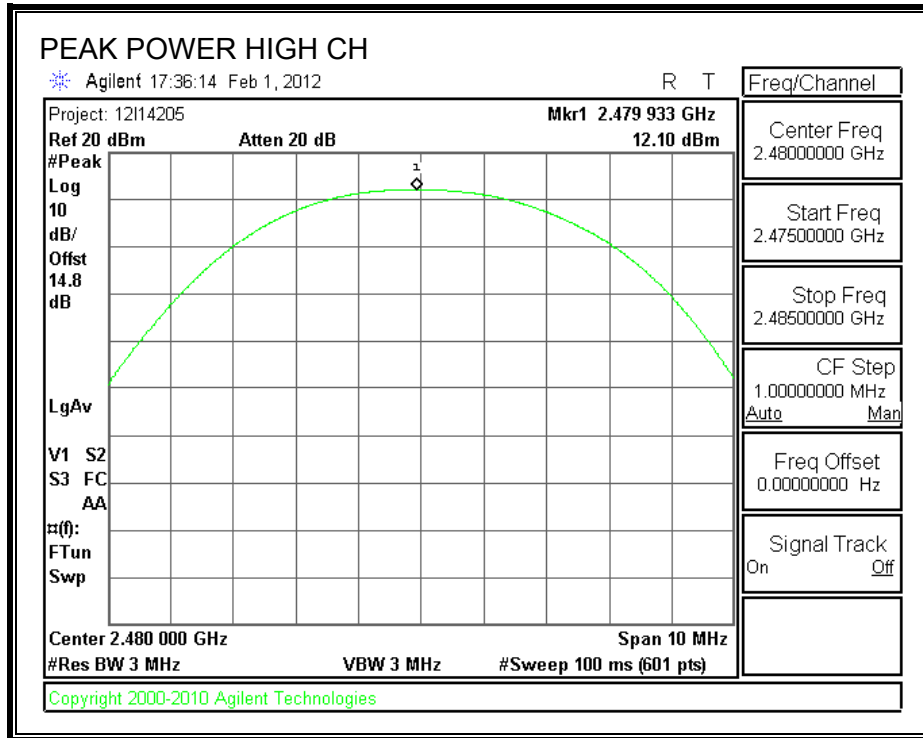

### 7.1.6. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.88 dB (including 10 dB pad and 1.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.10
Middle	2441	11.30
High	2480	11.10

### **7.1.7. CONDUCTED SPURIOUS EMISSIONS**

#### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


**RESULTS**


**SPURIOUS EMISSIONS, LOW CHANNEL**

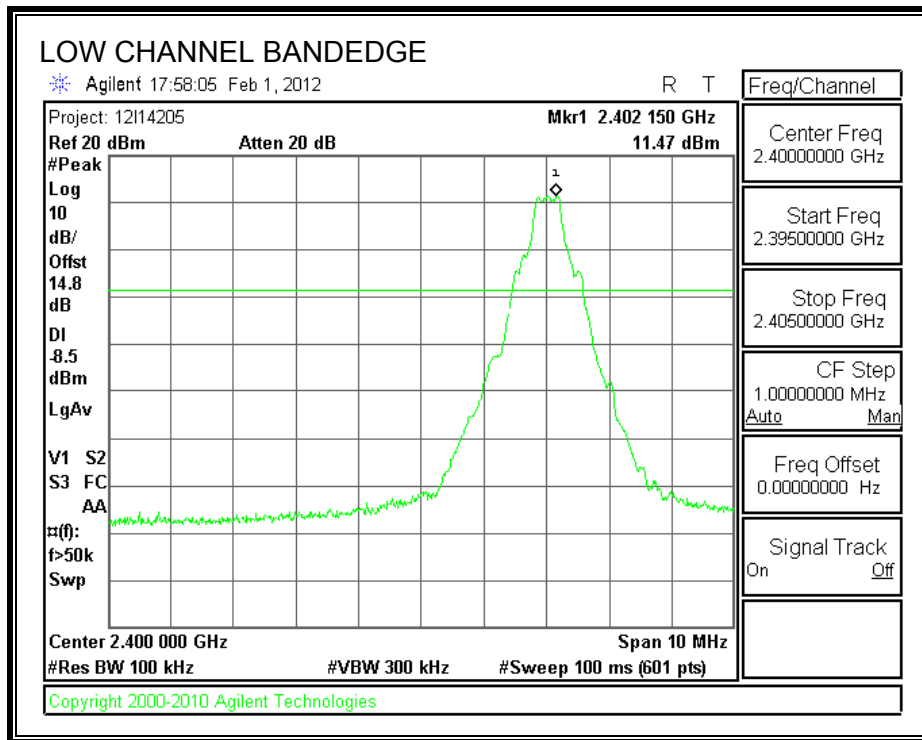

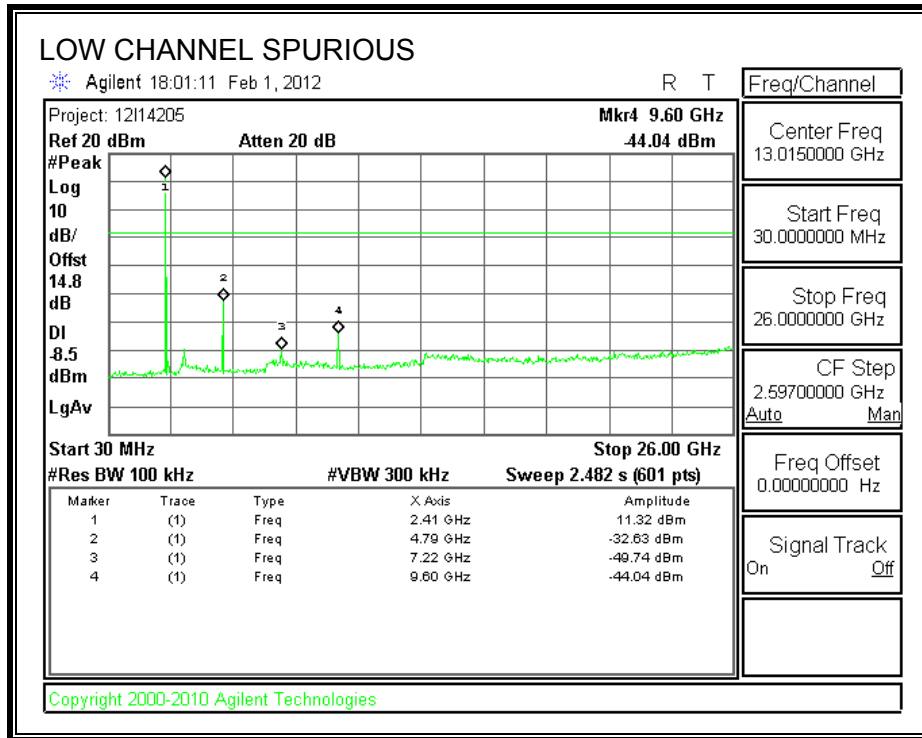



**SPURIOUS EMISSIONS, MID CHANNEL**

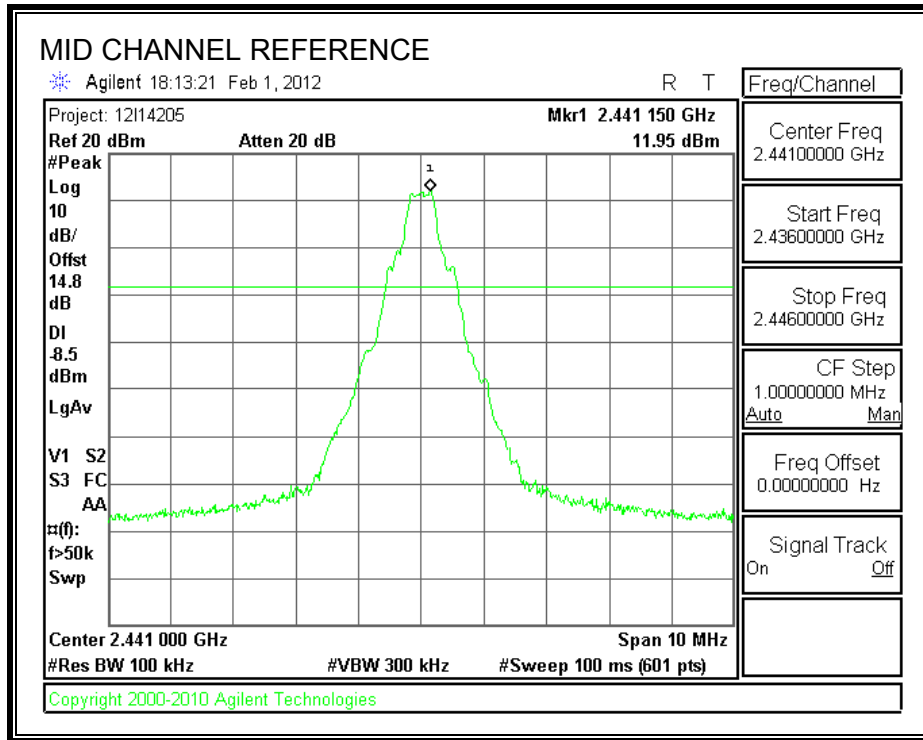

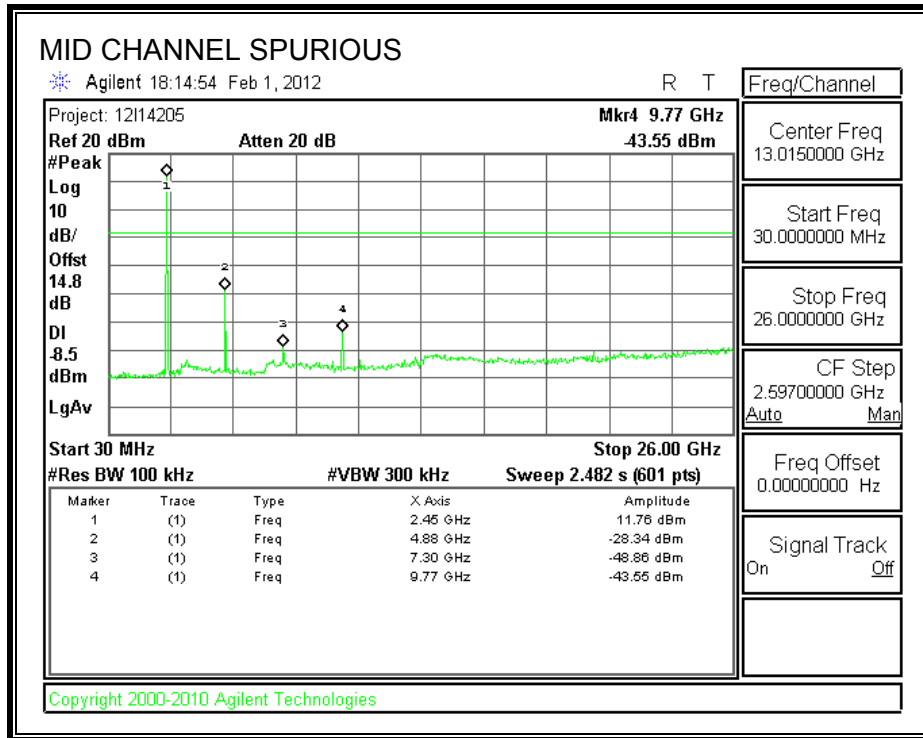



**SPURIOUS EMISSIONS, HIGH CHANNEL**

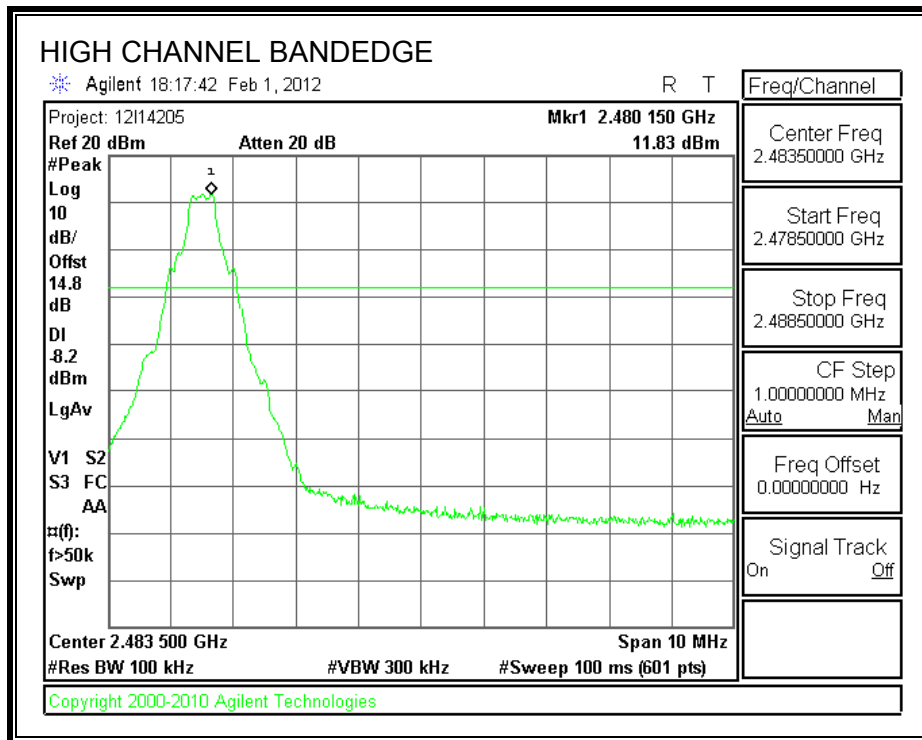

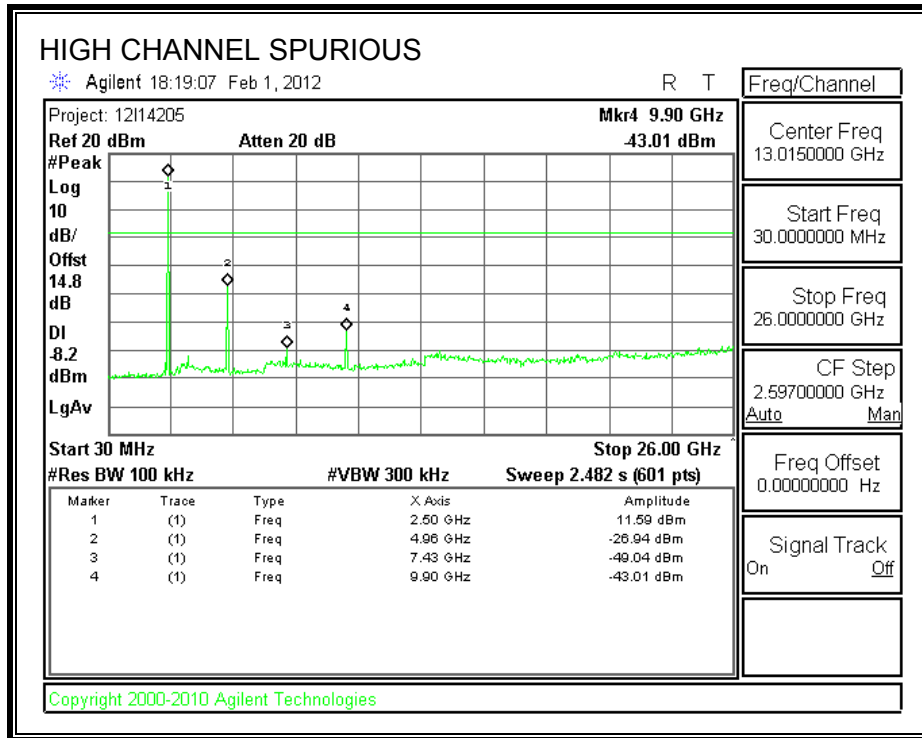

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

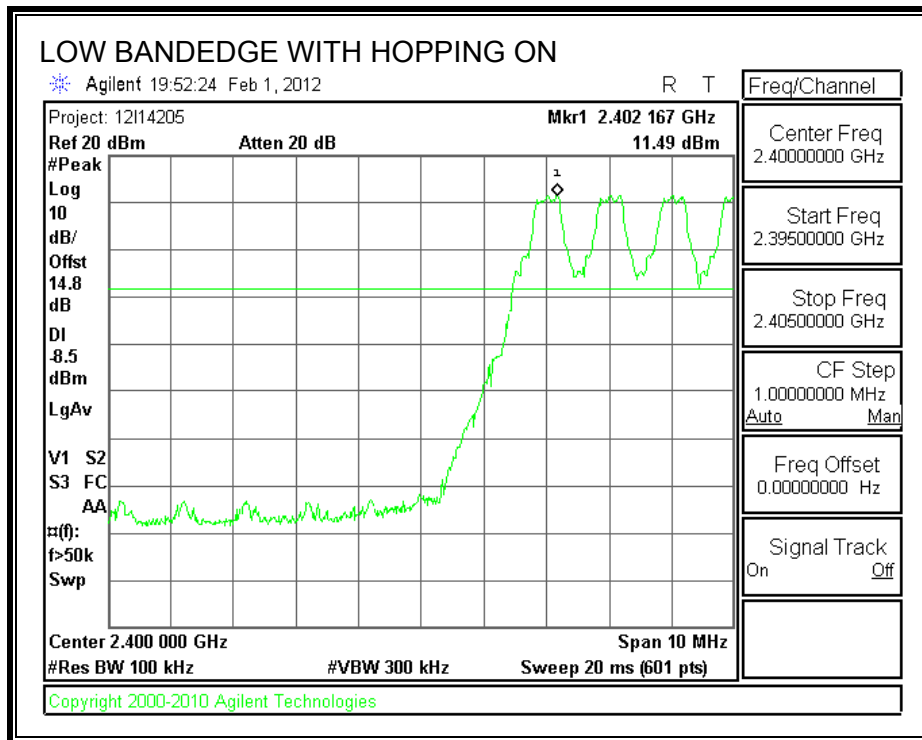

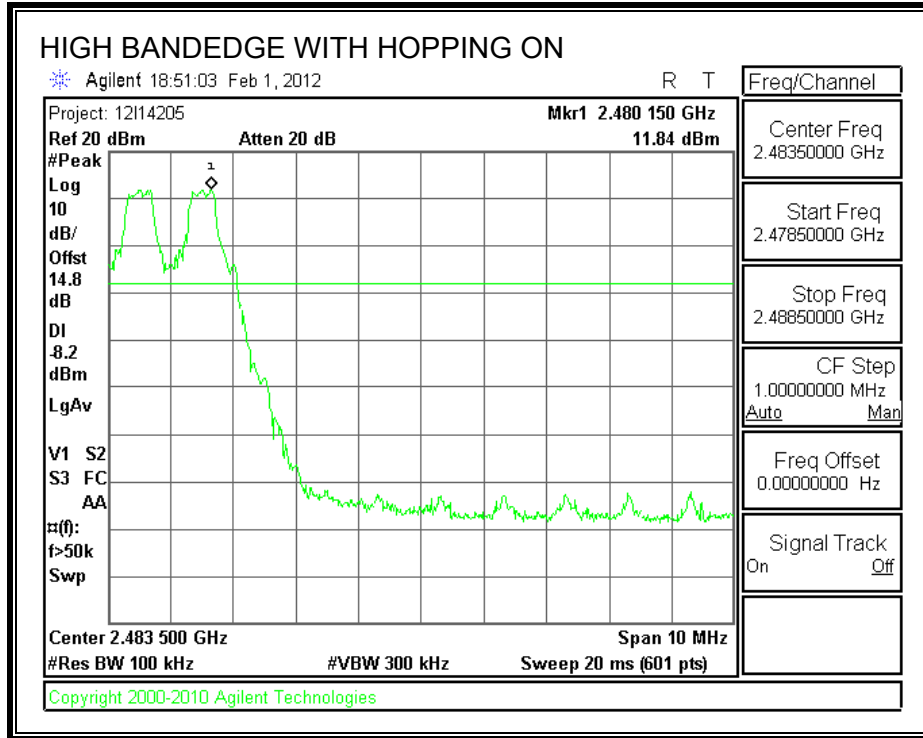

## 7.2. ENHANCED DATA RATE 8PSK MODULATION

### 7.2.1. 20 dB BANDWIDTH

#### LIMIT

None; for reporting purposes only.


#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.


#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.192
Middle	2441	1.190
High	2480	1.189

**20 dB BANDWIDTH**

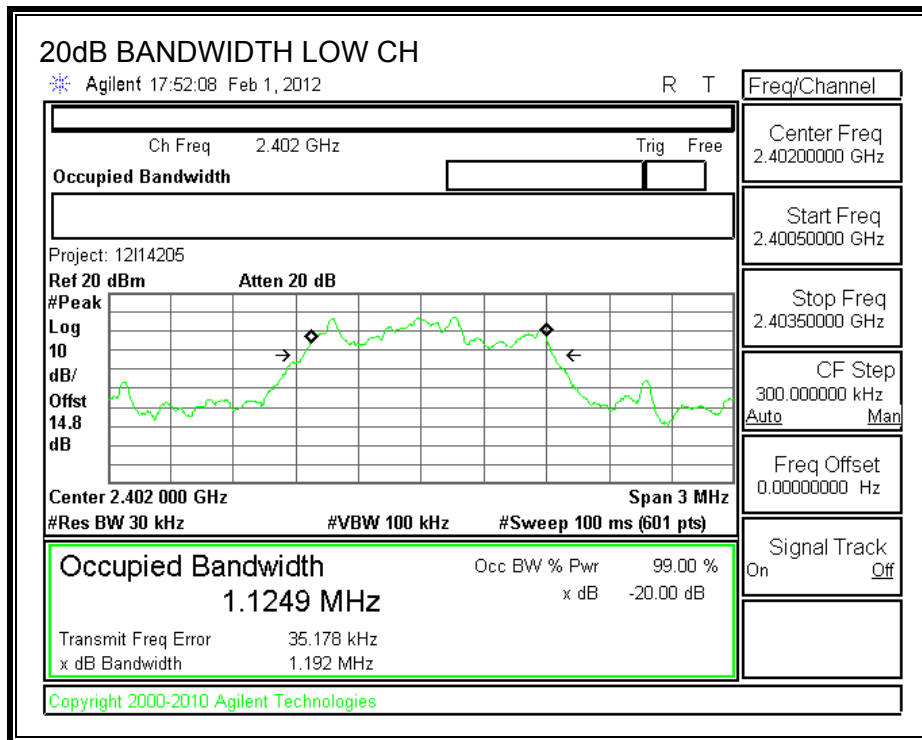

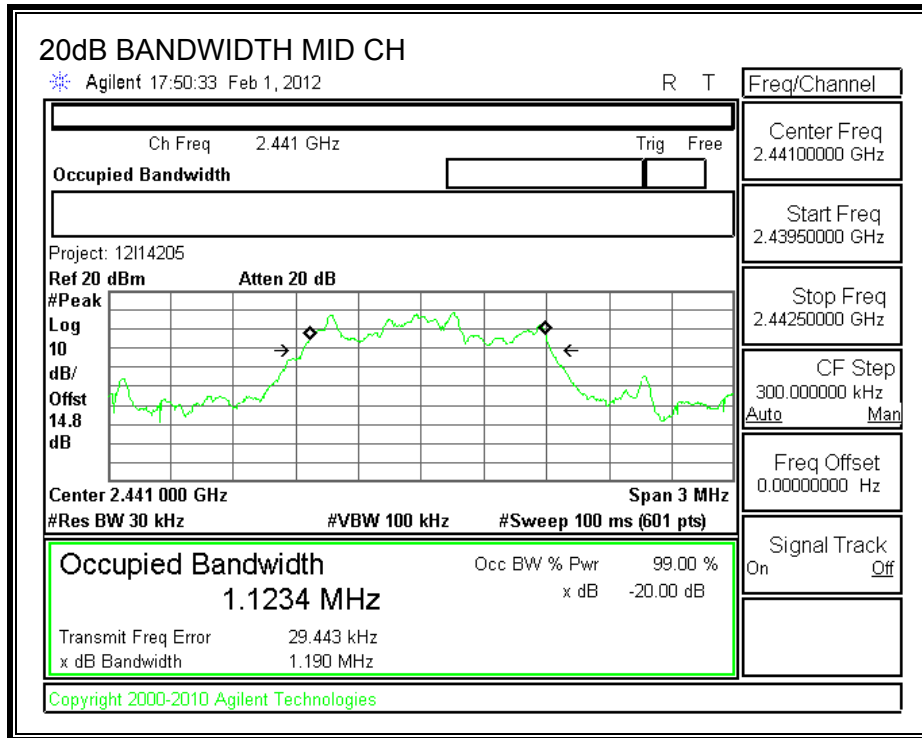

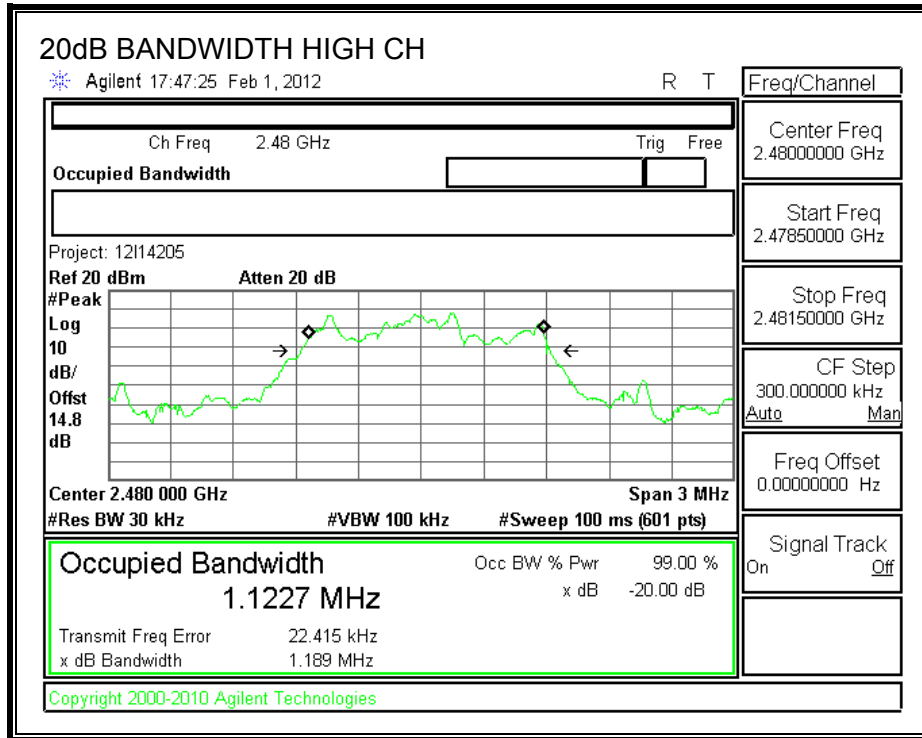

## 7.2.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

**RESULTS**

**HOPPING FREQUENCY SEPARATION**

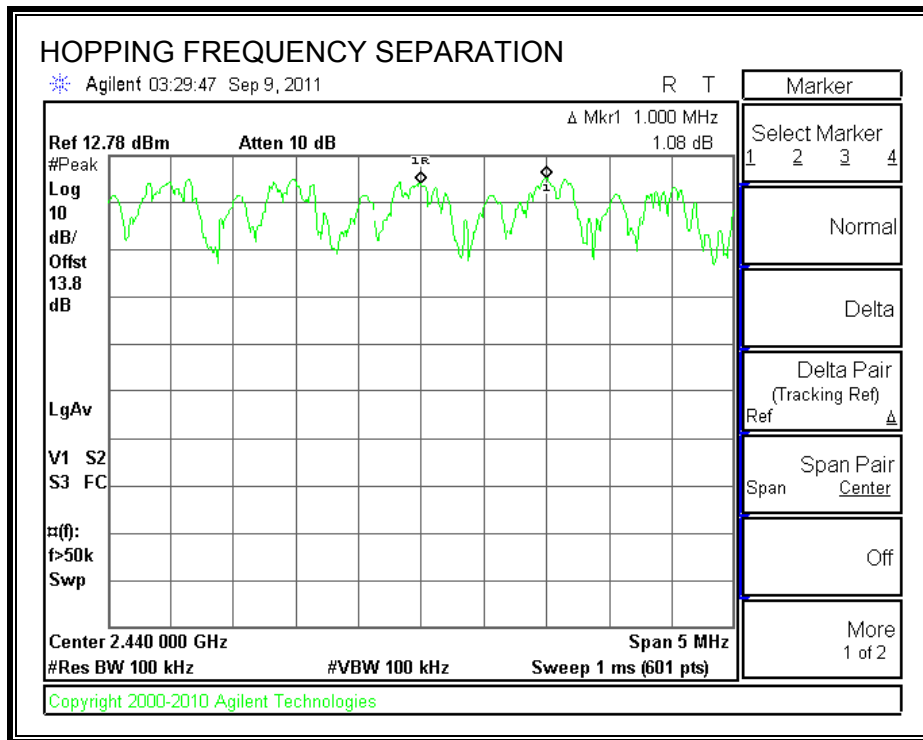

### **7.2.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


#### **RESULTS**


79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

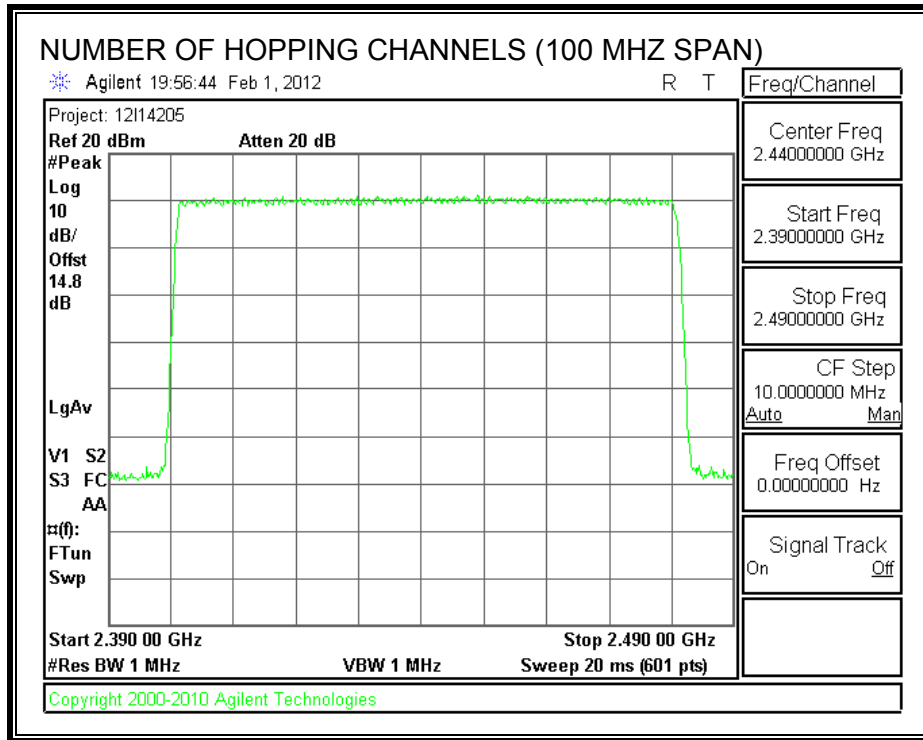

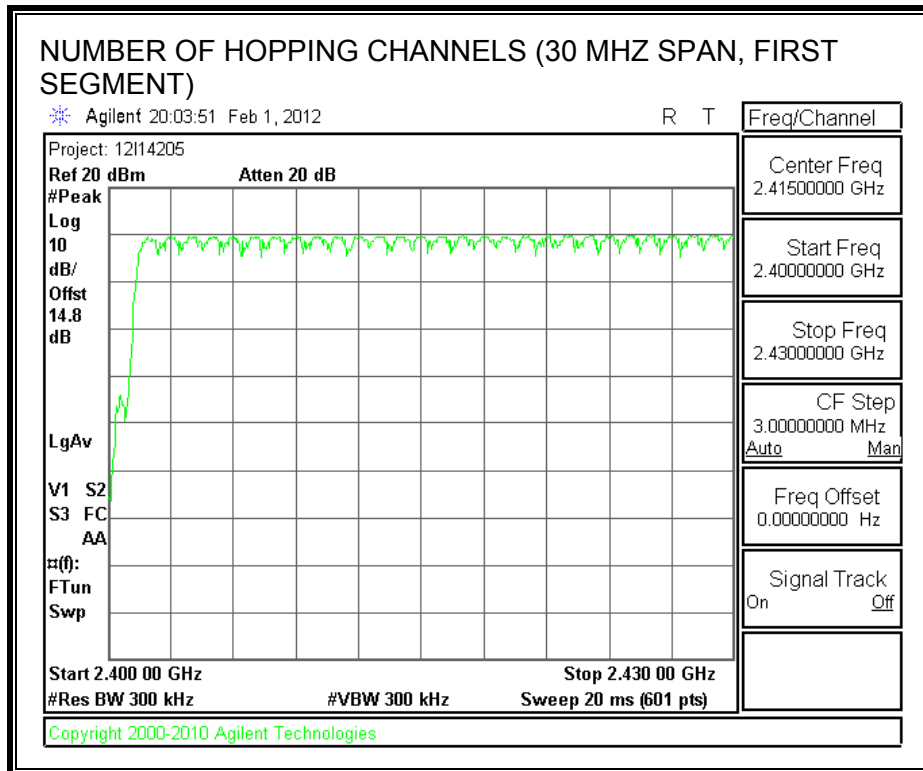

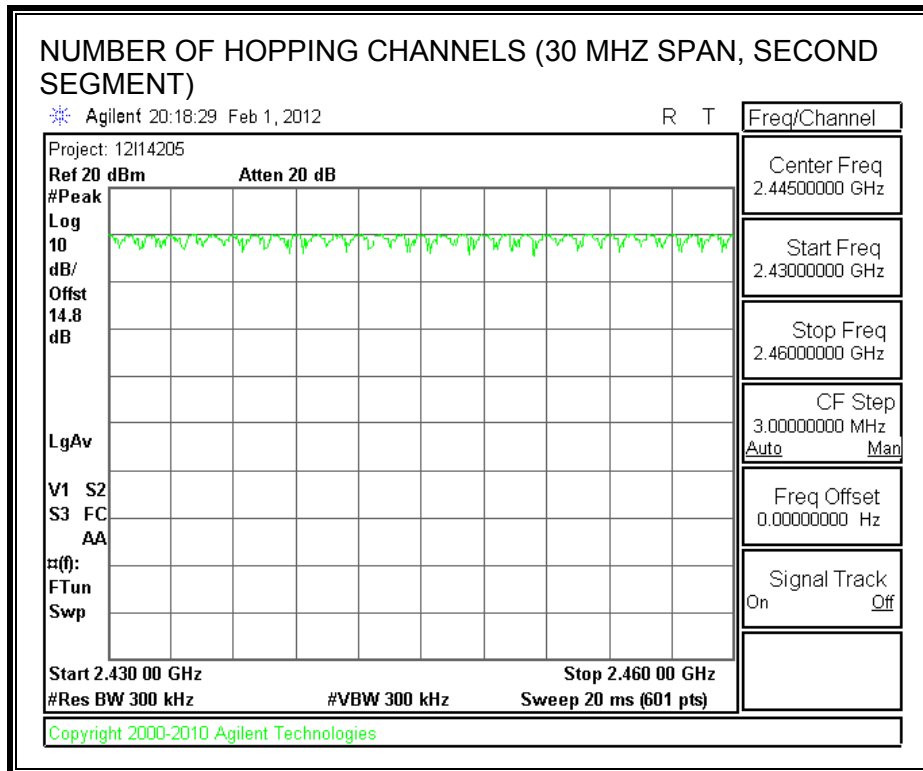

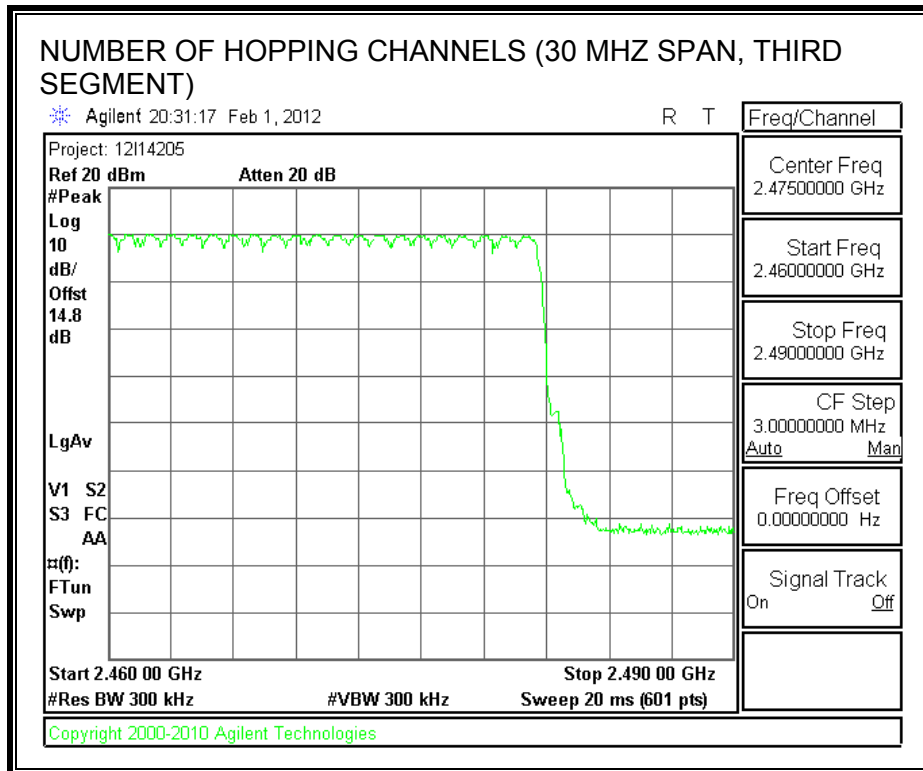

### 7.2.4. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .


#### RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupan cy (sec)	Limit (sec)	Margin (sec)
DH1	0.392	33	0.129	0.4	-0.271
DH3	1.633	17	0.278	0.4	-0.122
DH5	2.900	13	0.377	0.4	-0.023

**DH1**

**PULSE WIDTH**

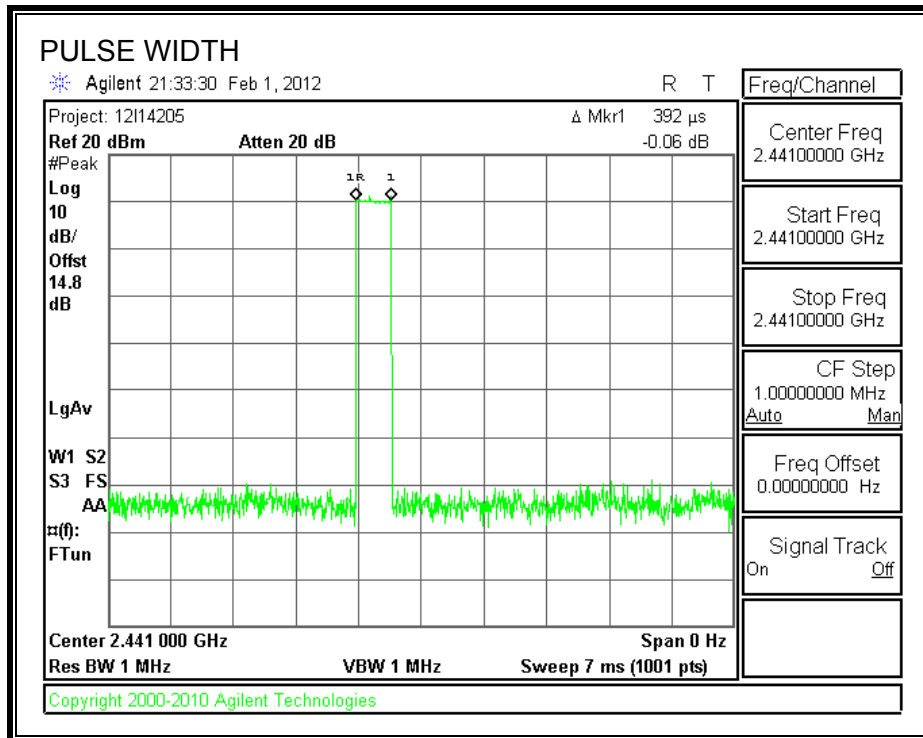


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

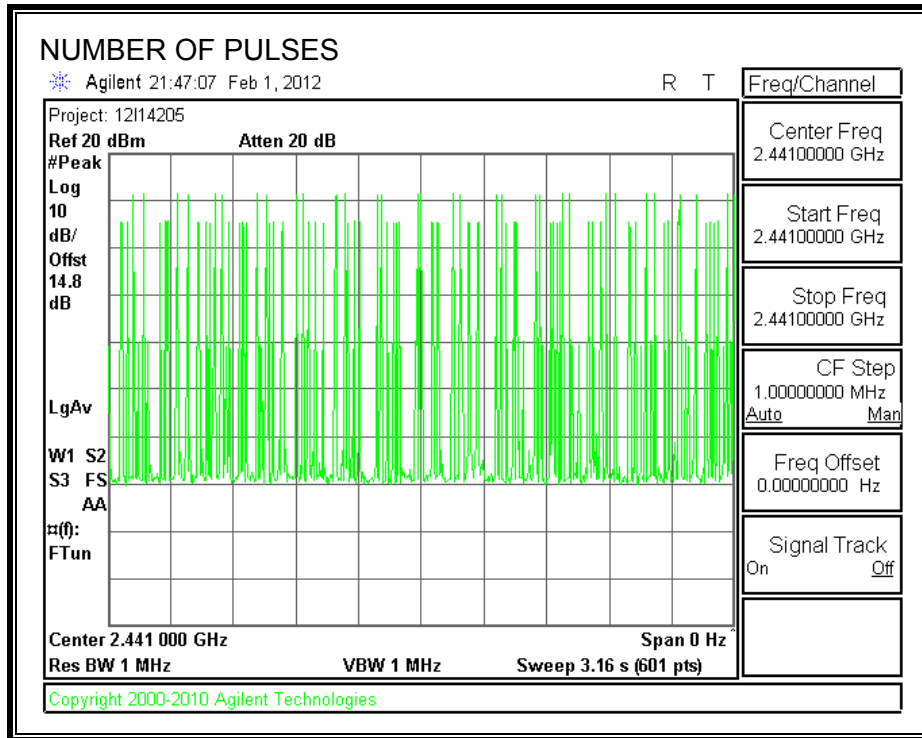


**DH3**

**PULSE WIDTH**

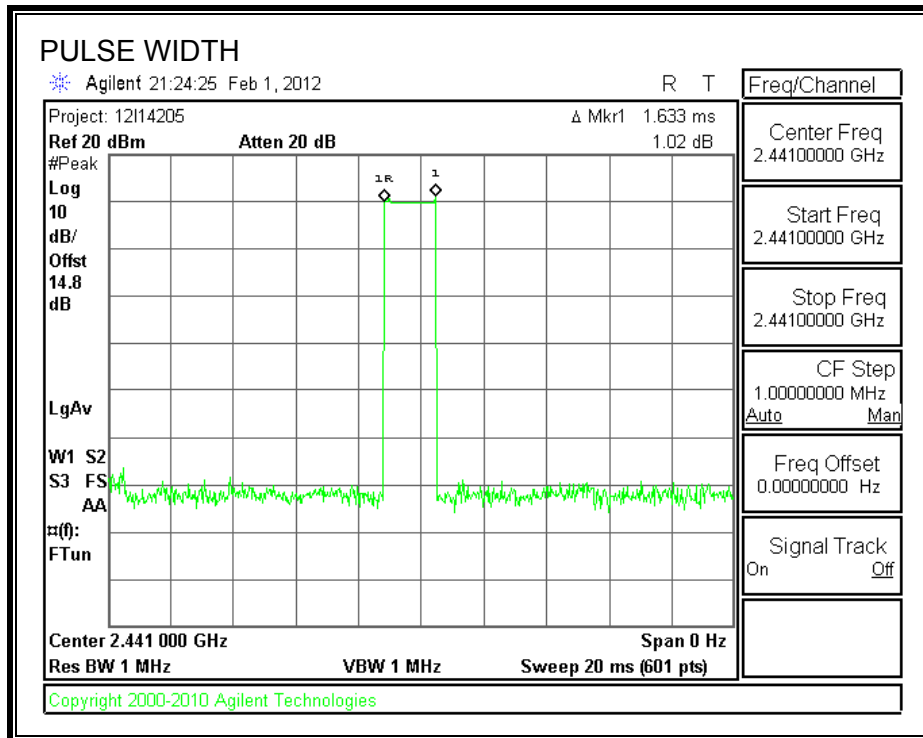


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

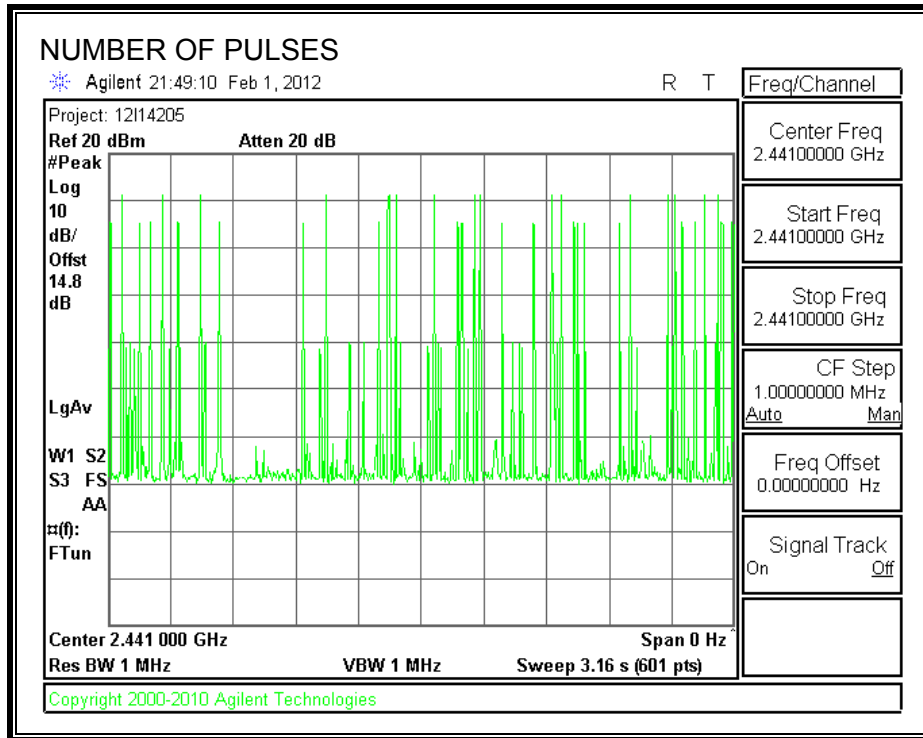


**DH5**

**PULSE WIDTH**

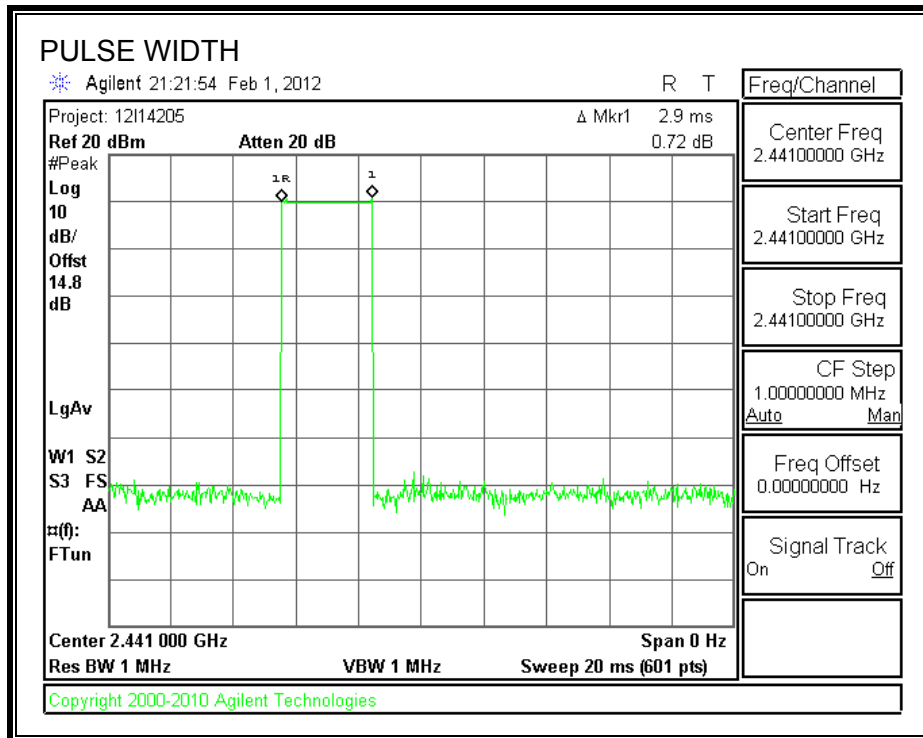

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

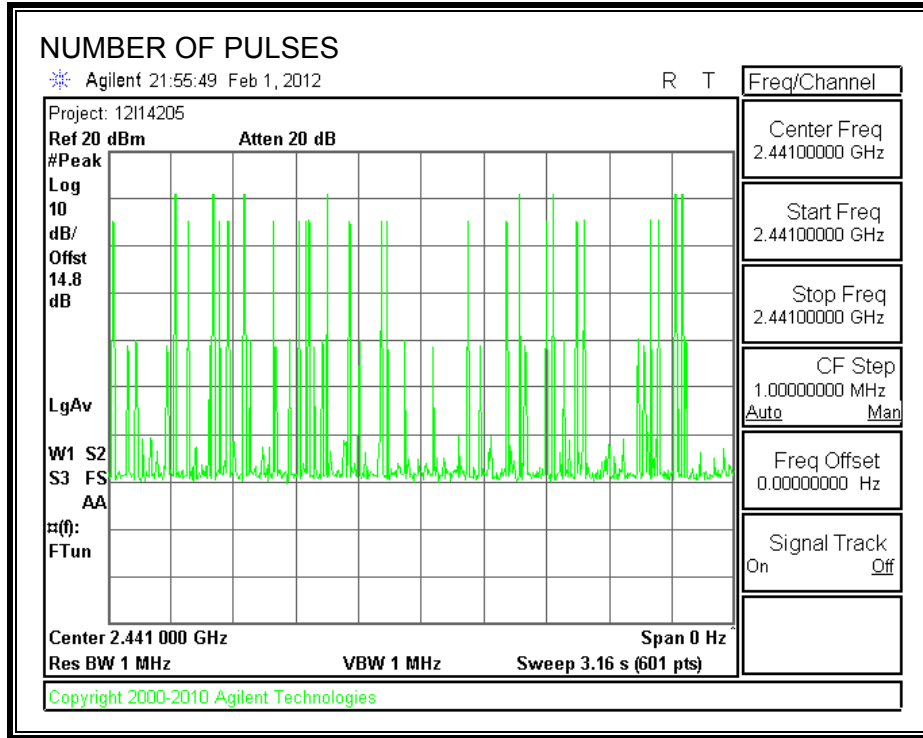

## 7.2.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.69	30	-18.31
Middle	2441	12.15	30	-17.85
High	2480	11.91	30	-18.09

**OUTPUT POWER**

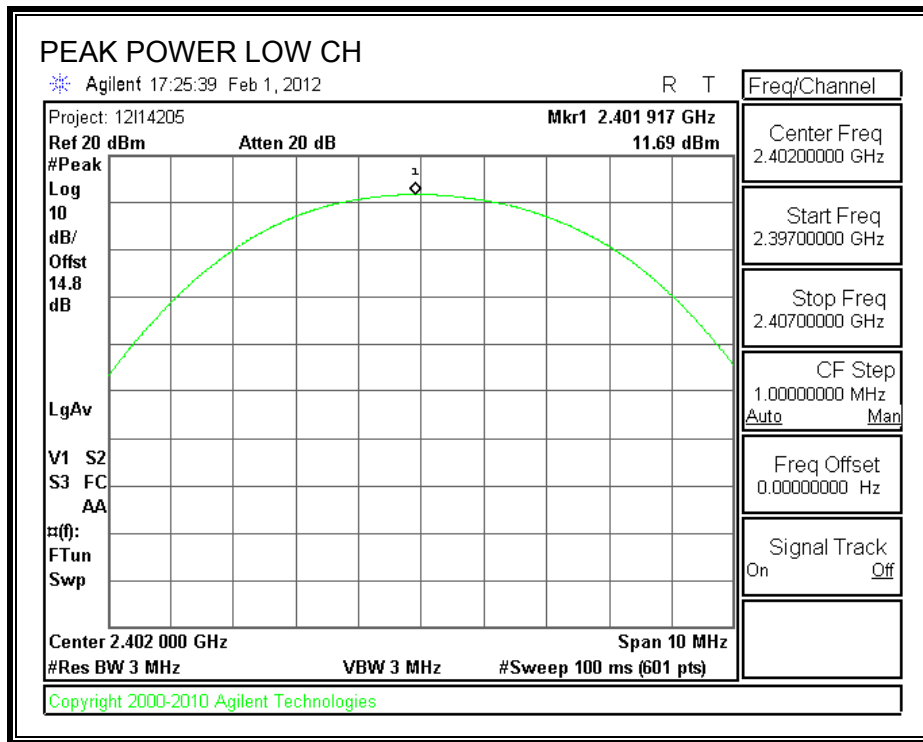

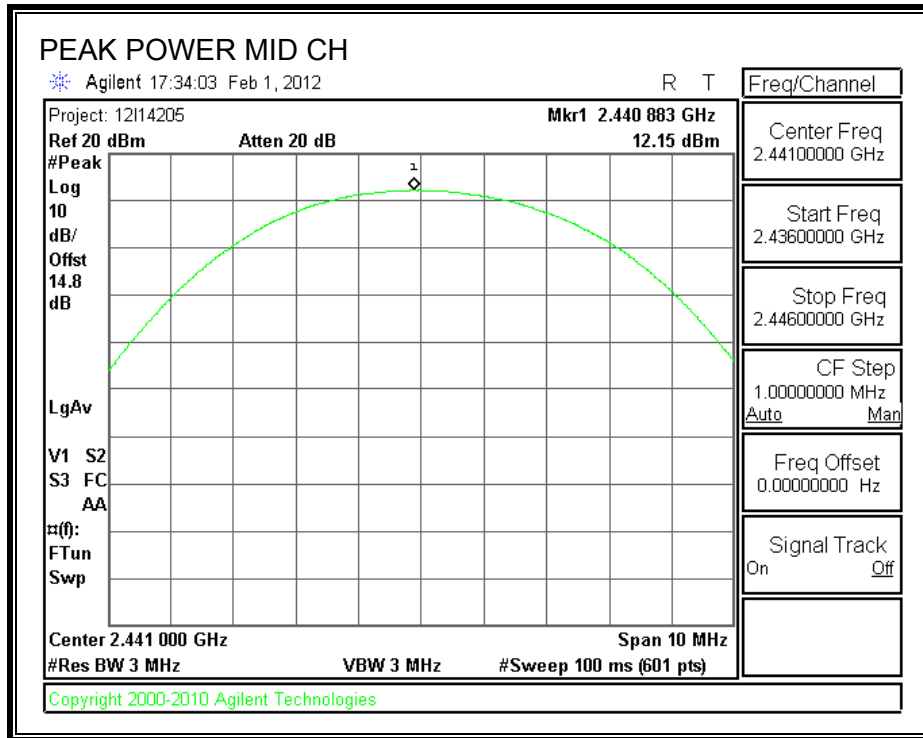

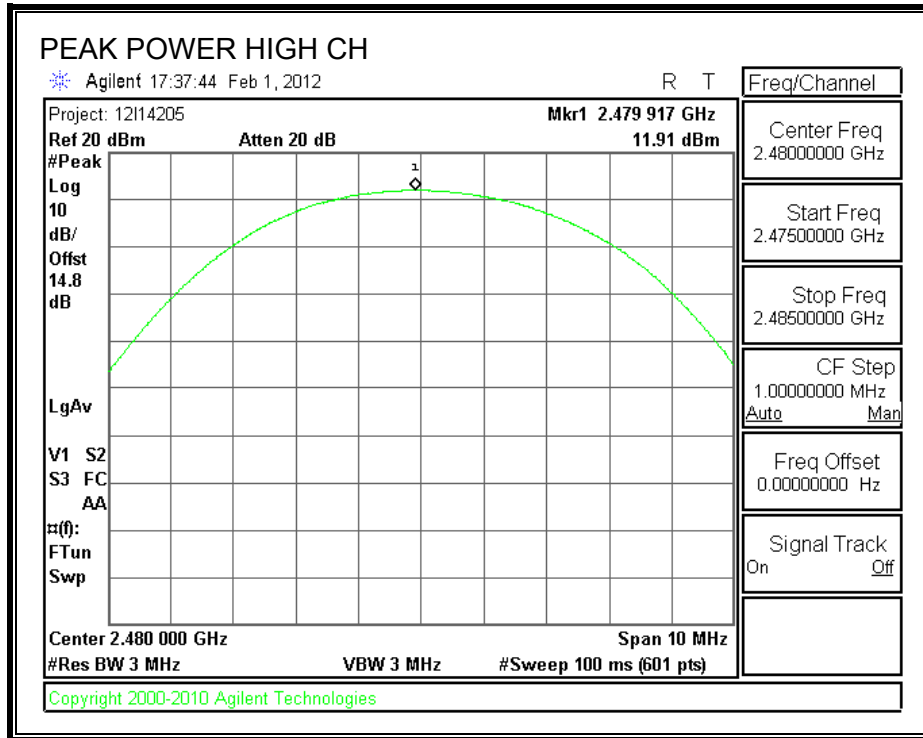

## 7.2.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 11.88 dB (including 10 dB pad and 1.88dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Frequency (MHz)	Average Power (dBm)
2402	8.90
2441	9.30
2480	9.20

## 7.2.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


**RESULTS**


**SPURIOUS EMISSIONS, LOW CHANNEL**

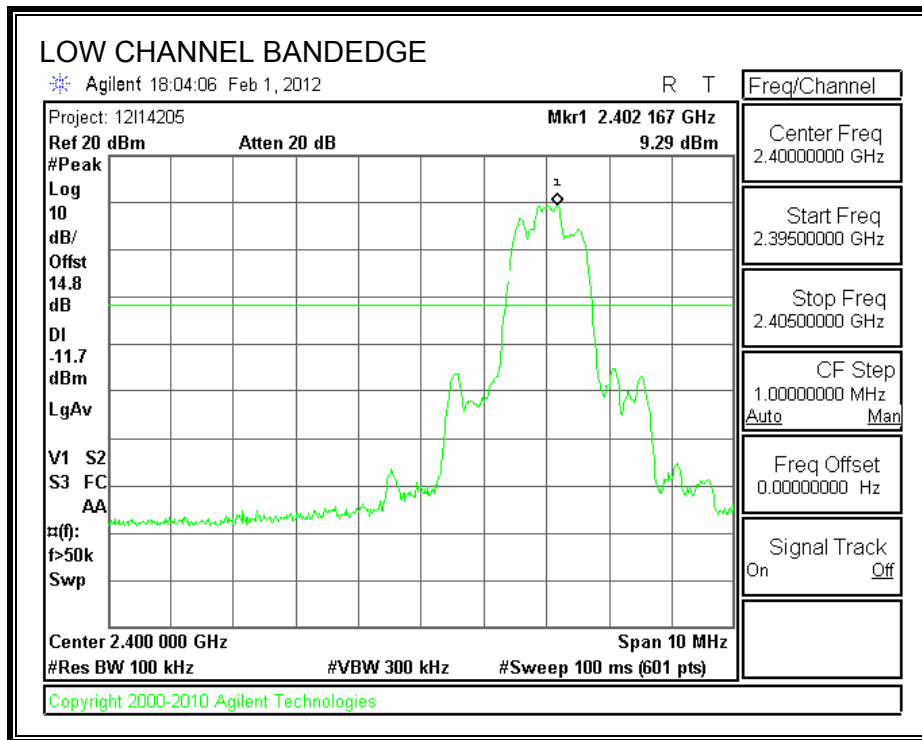

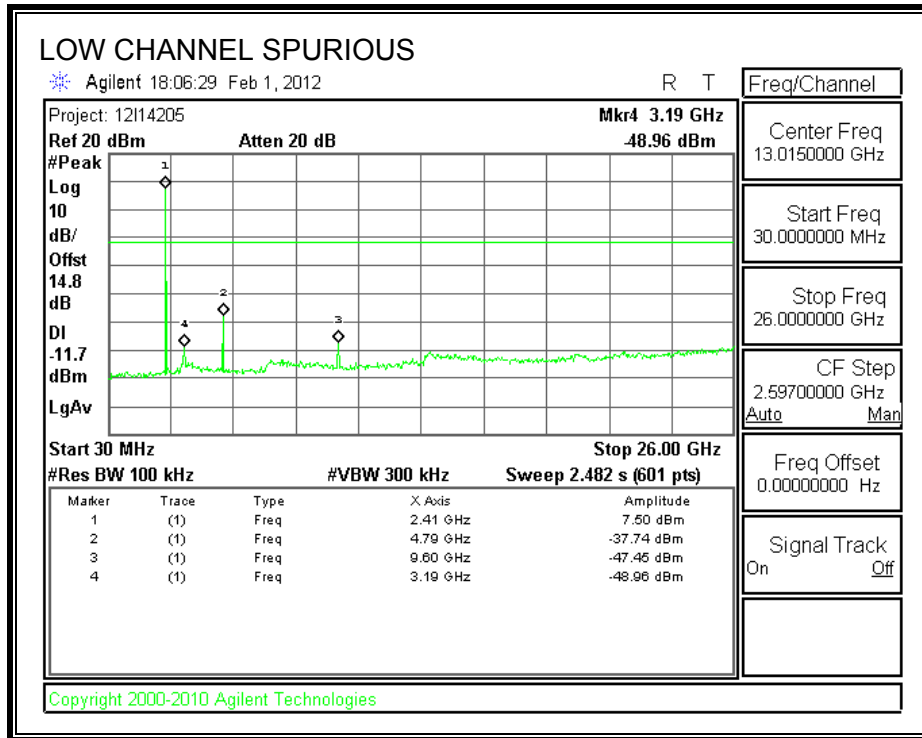



**SPURIOUS EMISSIONS, MID CHANNEL**

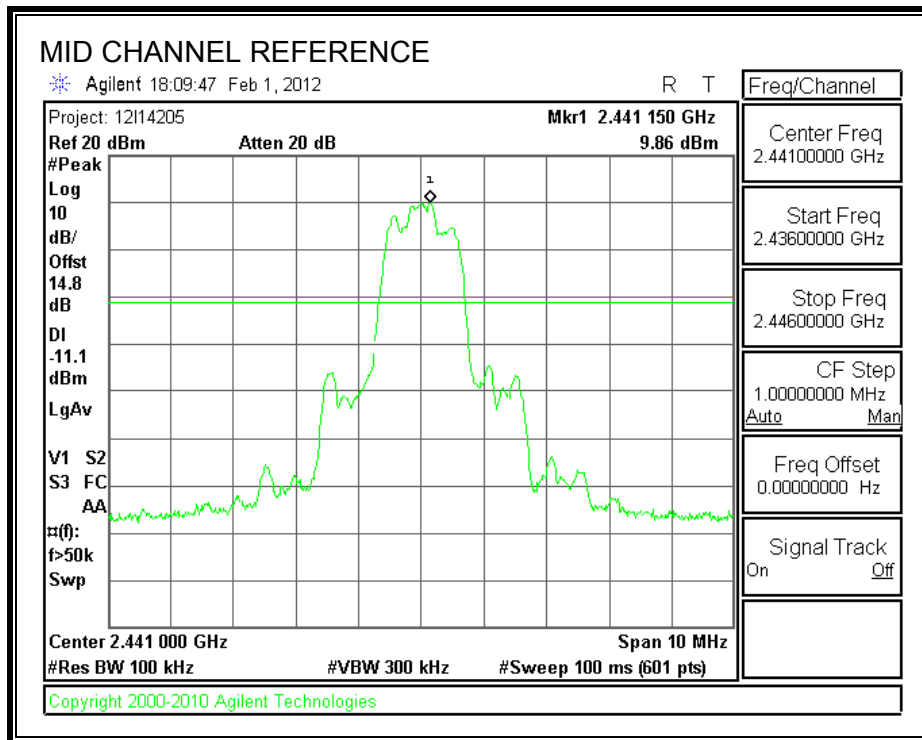

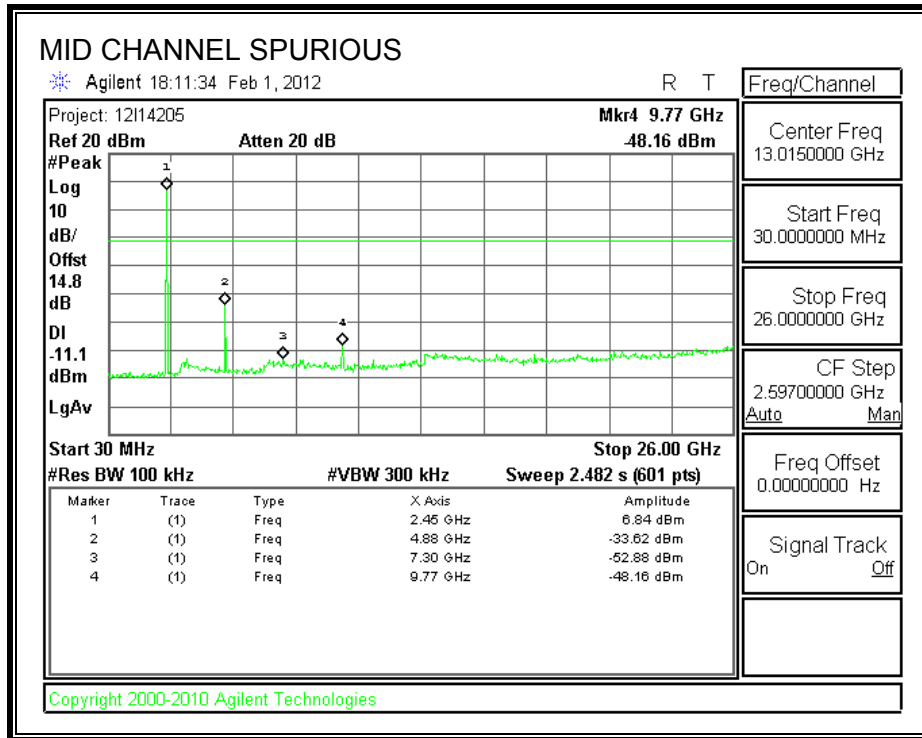



**SPURIOUS EMISSIONS, HIGH CHANNEL**

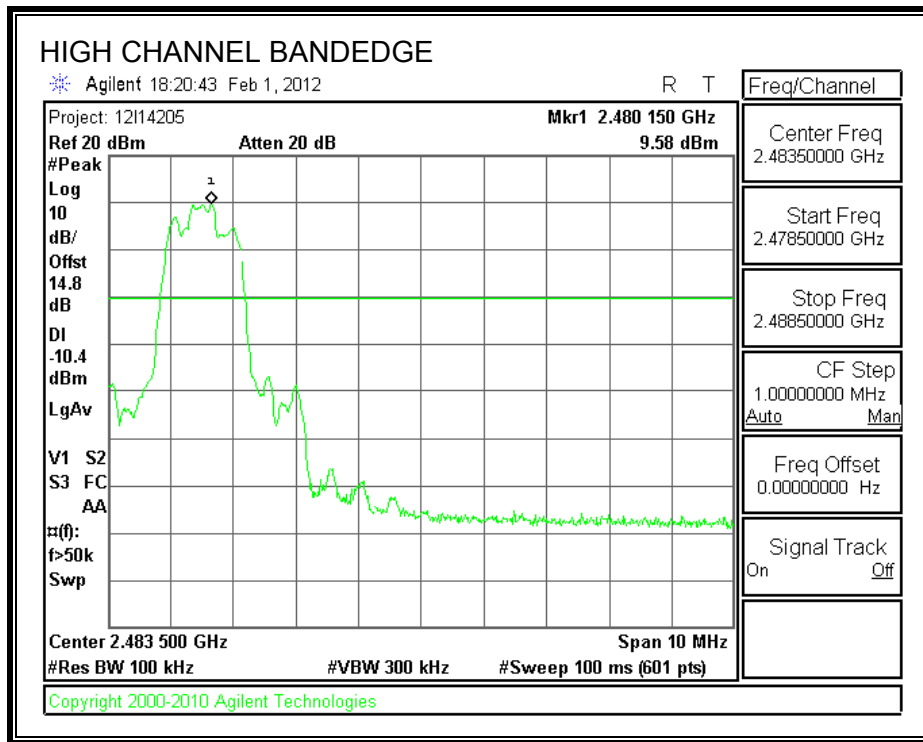

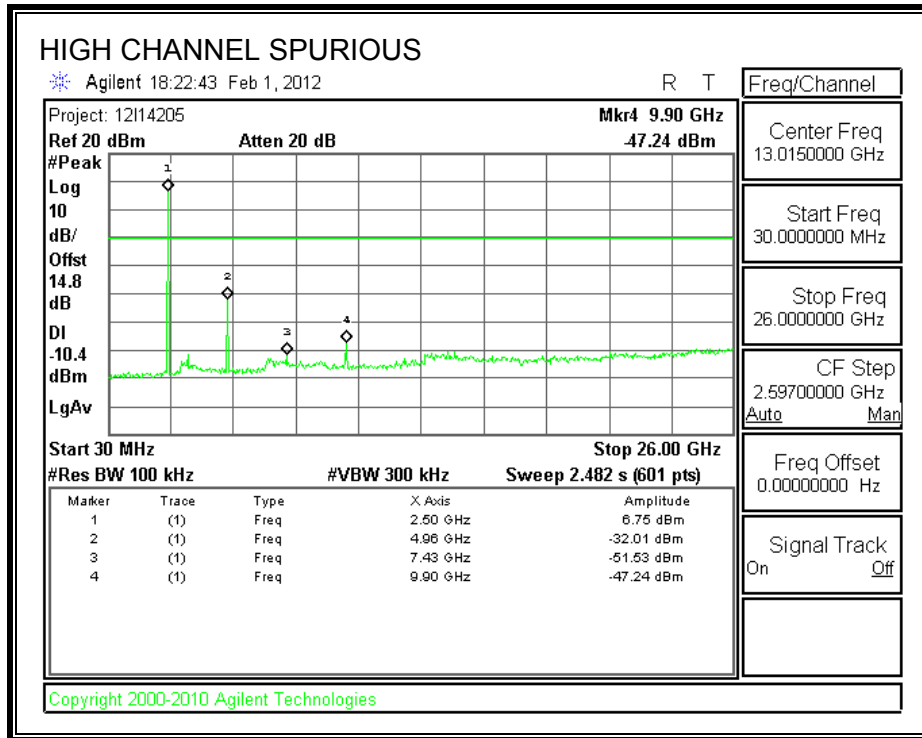

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

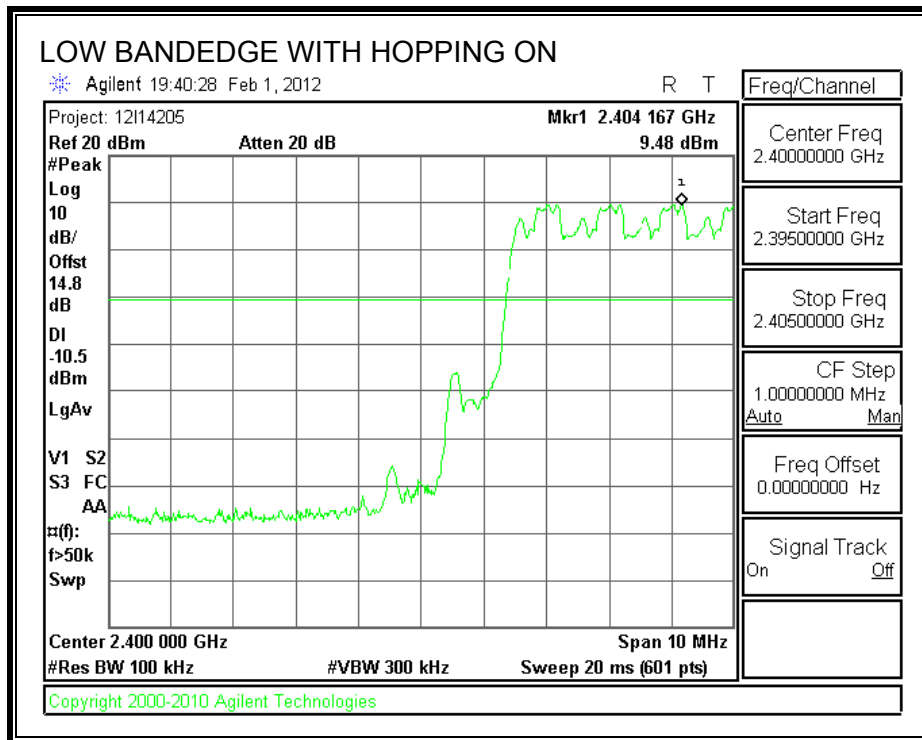

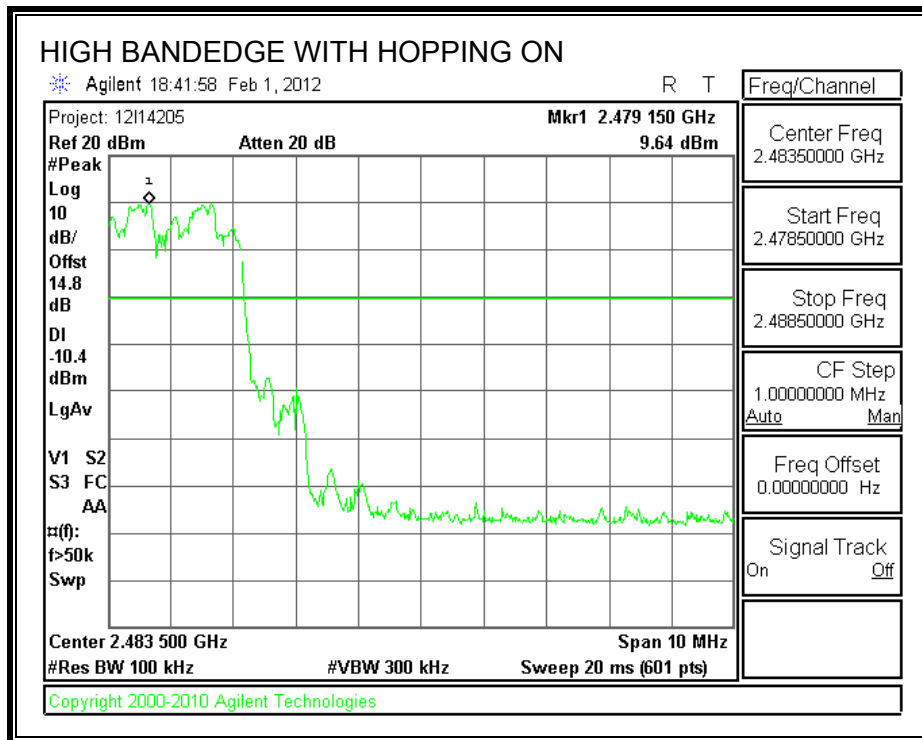

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz


### 8.2.1. BASIC DATA RATE GFSK MODULATION


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

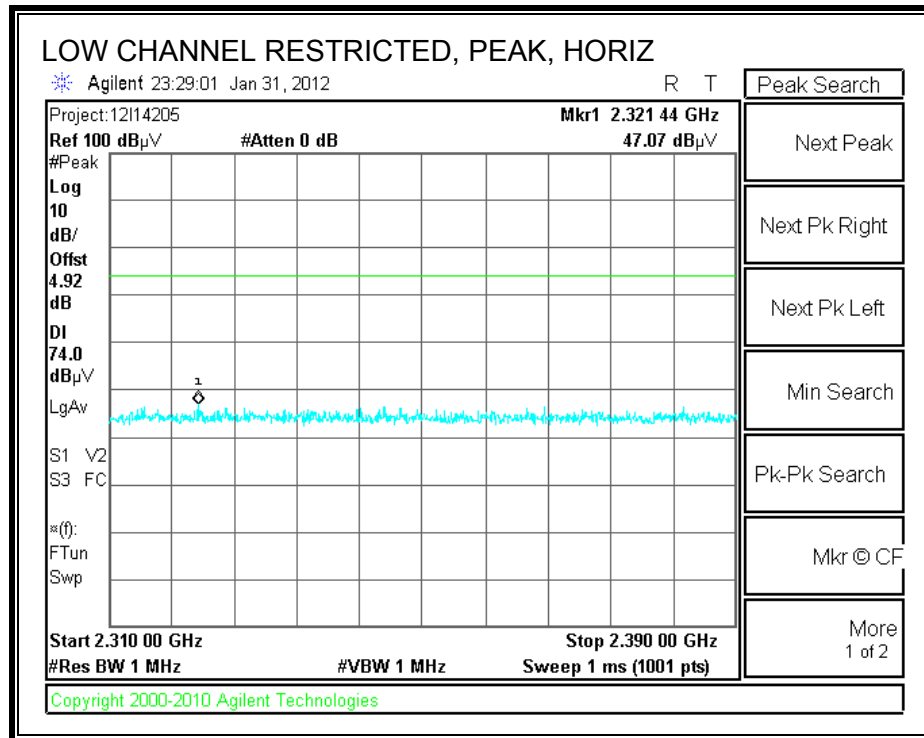

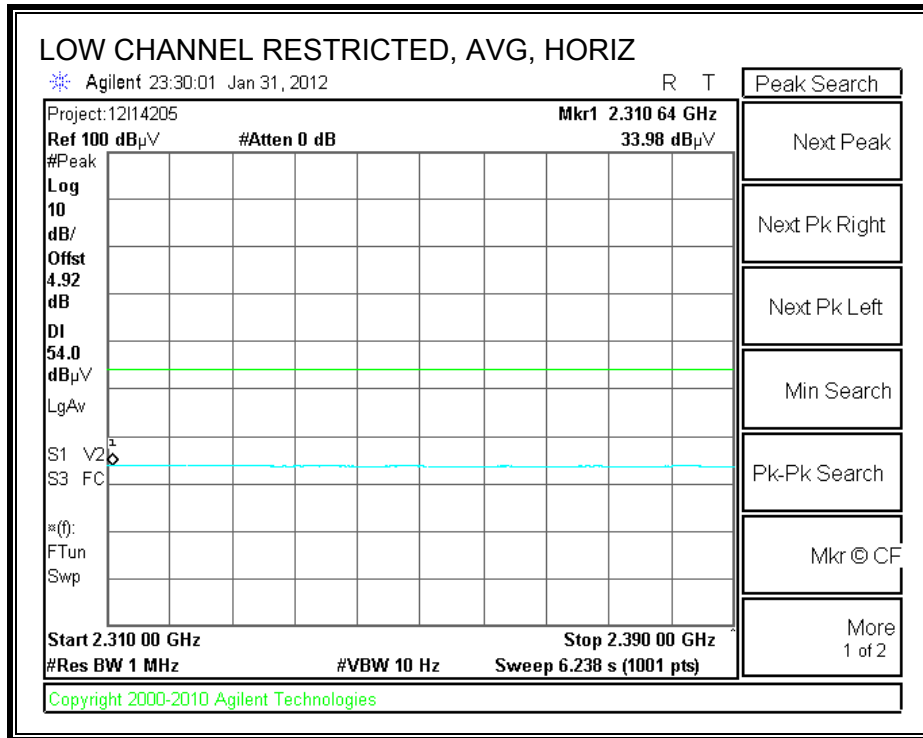



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

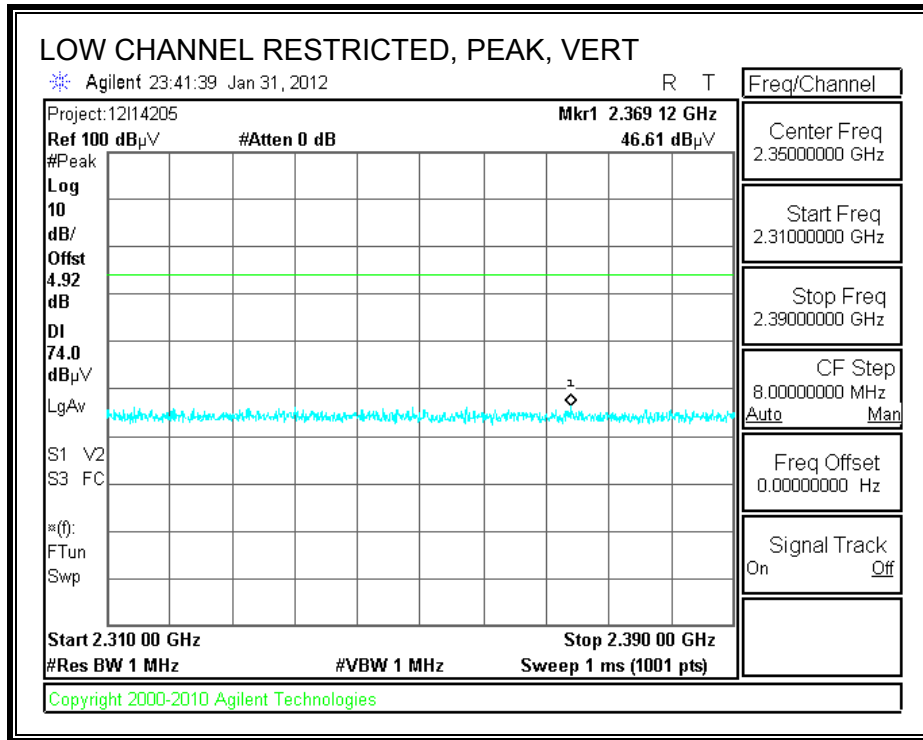

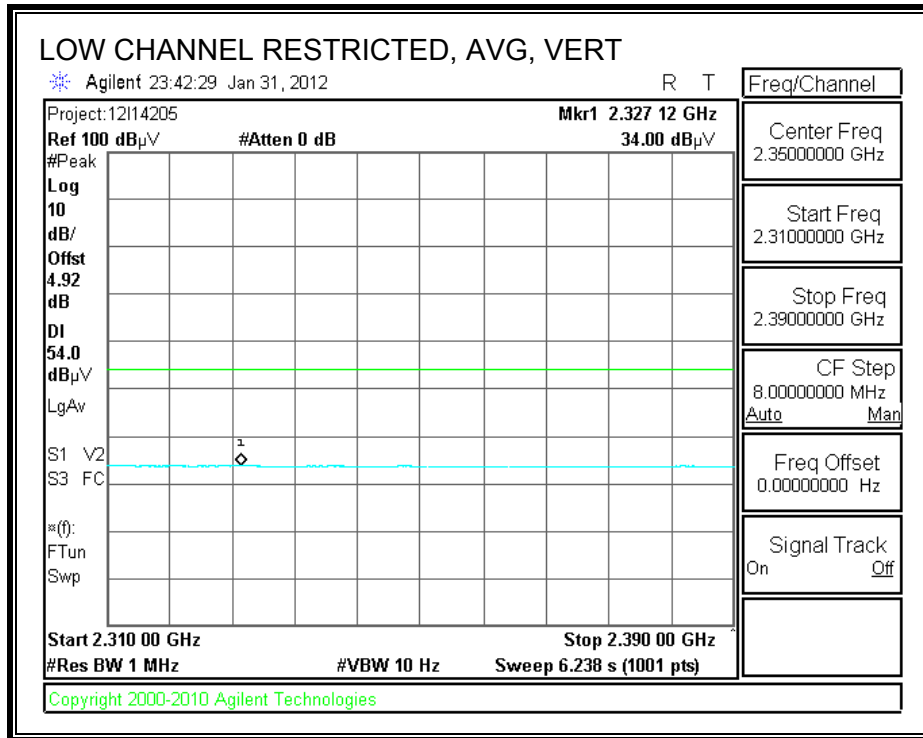



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

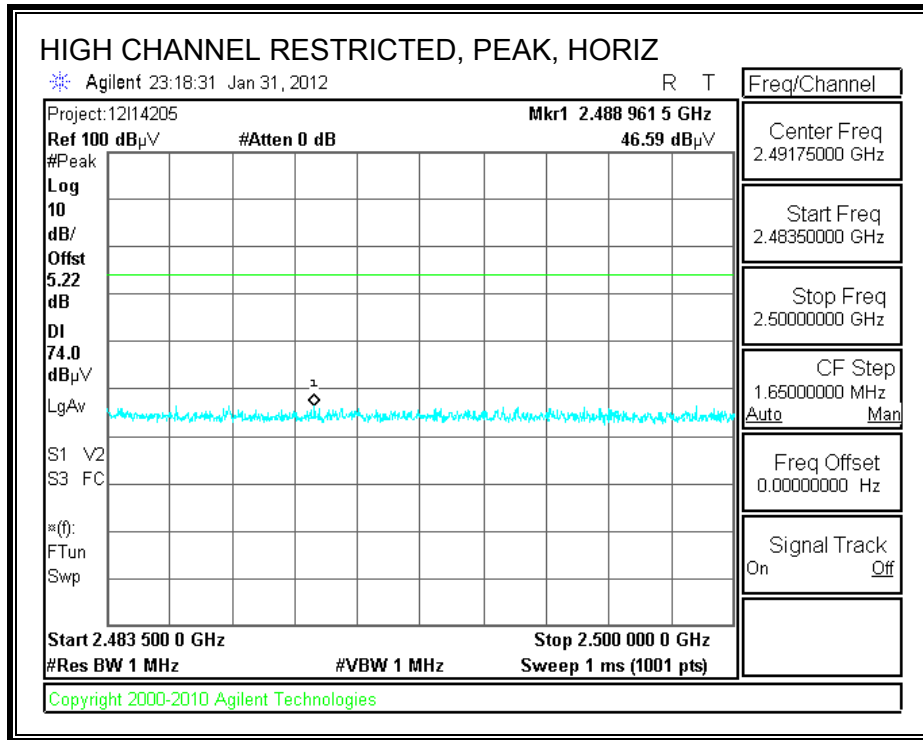

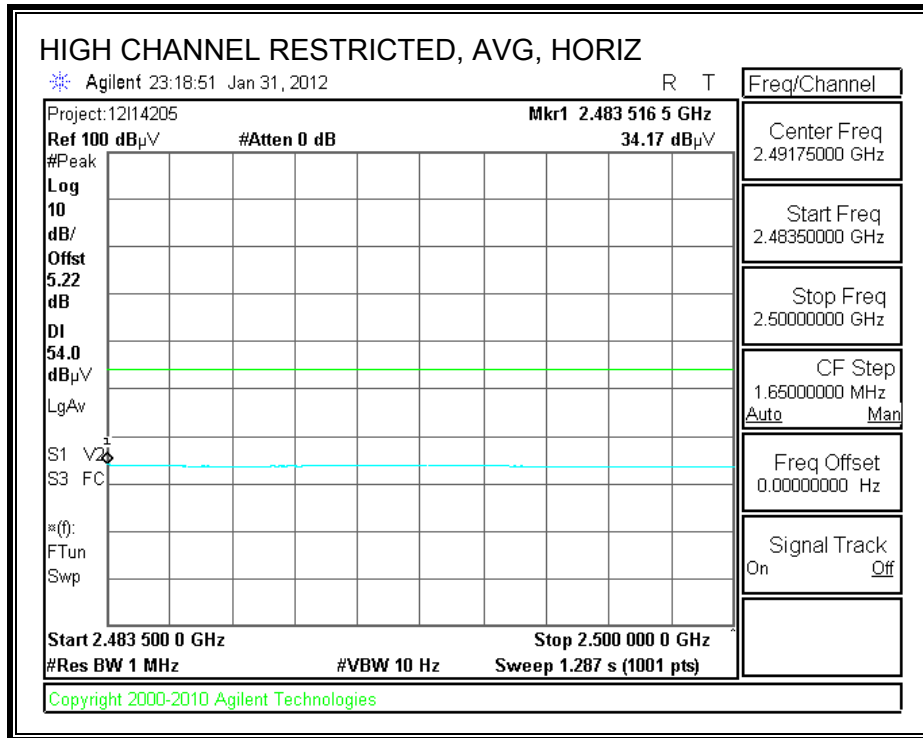

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

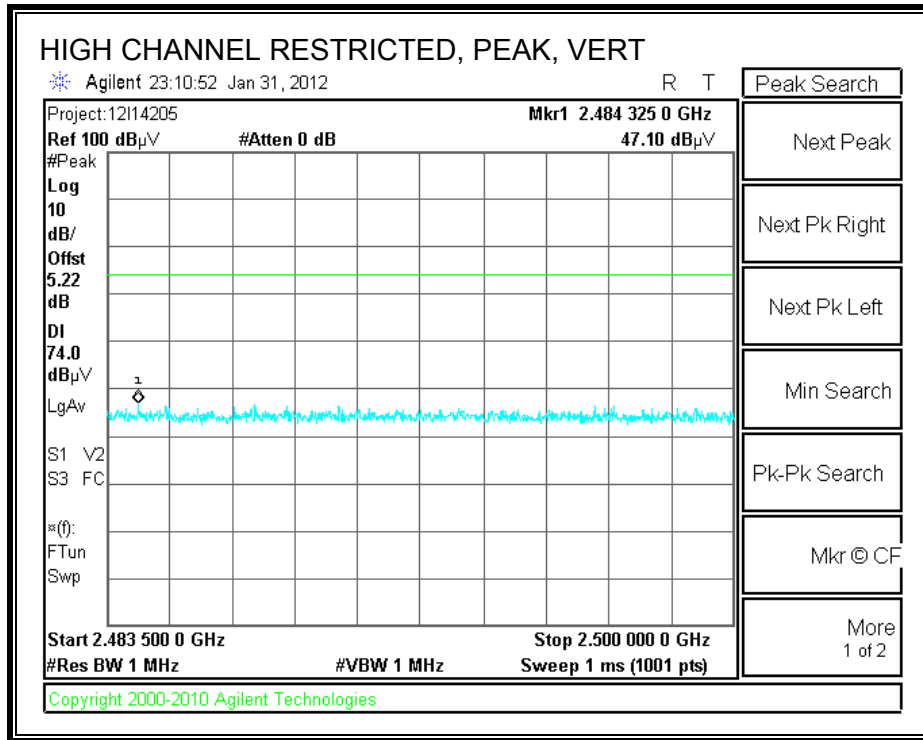

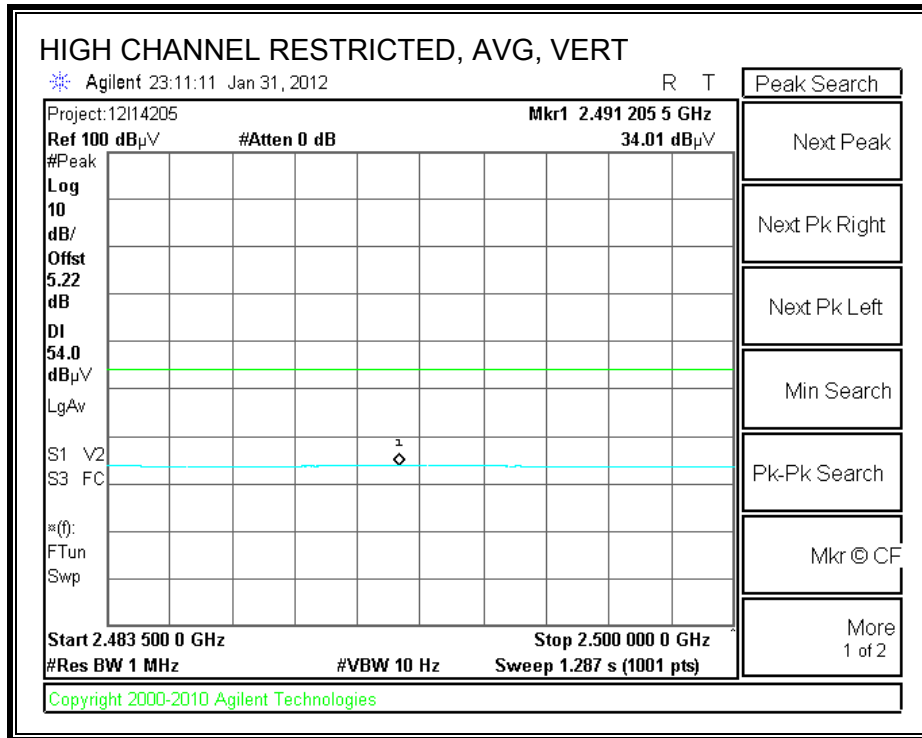

**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber-B

Company: SAMSUNG ELECTRONICS  
 Project #: 12I14205  
 Date: 1/31/2012  
 Test Engineer: MENGISTU MEKURIA  
 Configuration: EUT ALONE  
 Mode: TX, GFSK MODE

Test Equipment:

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>	<b>Limit</b>
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.209

HI Frequency Cables

<b>3' cable 22807700</b>	<b>12' cable 22807600</b>	<b>20' cable 22807500</b>	<b>HPF</b>	<b>Reject Filter</b>	<b>Peak Measurements</b> RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2402 MHz)</b>															
4.804	3.0	47.6	40.3	33.9	6.3	-35.5	0.0	0.0	52.2	44.9	74	54	-21.8	-9.1	V
12.010	3.0	35.6	23.4	39.8	11.0	-35.4	0.0	0.0	51.0	38.8	74	54	-23.0	-15.2	V
4.804	3.0	50.4	43.4	33.9	6.3	-35.5	0.0	0.0	55.0	48.0	74	54	-19.0	-6.0	H
12.010	3.0	36.4	24.9	39.8	11.0	-35.4	0.0	0.0	51.7	40.3	74	54	-22.3	-13.7	H
<b>Mid Channel (2441MHz)</b>															
4.882	3.0	49.6	38.8	33.9	6.3	-35.5	0.0	0.0	54.4	43.5	74	54	-19.6	-10.5	V
7.323	3.0	37.3	25.2	36.6	8.5	-35.4	0.0	0.0	47.0	34.9	74	54	-27.0	-19.1	V
12.205	3.0	35.8	23.3	39.6	11.1	-35.3	0.0	0.0	51.2	38.7	74	54	-22.8	-15.3	V
4.882	3.0	52.5	42.2	33.9	6.3	-35.5	0.0	0.0	57.2	46.9	74	54	-16.8	-7.1	H
7.323	3.0	39.1	26.6	36.6	8.5	-35.4	0.0	0.0	48.7	36.3	74	54	-25.3	-17.7	H
12.205	3.0	37.2	26.2	39.6	11.1	-35.3	0.0	0.0	52.7	41.7	74	54	-21.3	-12.3	H
<b>High Channel (2480 MHz)</b>															
4.960	3.0	50.0	43.2	34.0	6.4	-35.5	0.0	0.0	54.9	48.1	74	54	-19.1	-5.9	V
7.440	3.0	36.1	24.0	36.7	8.5	-35.5	0.0	0.0	45.9	33.8	74	54	-28.1	-20.2	V
12.400	3.0	36.4	24.1	39.5	11.2	-35.3	0.0	0.0	51.8	39.5	74	54	-22.2	-14.5	V
4.960	3.0	53.5	46.2	34.0	6.4	-35.5	0.0	0.0	58.4	51.1	74	54	-15.6	-2.9	H
7.440	3.0	36.8	24.5	36.7	8.5	-35.5	0.0	0.0	46.6	34.3	74	54	-27.4	-19.7	H
12.400	3.0	38.4	27.5	39.5	11.2	-35.3	0.0	0.0	53.9	42.9	74	54	-20.1	-11.1	H


Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


## 8.2.2. ENHANCED DATA RATE 8PSK MODULATION


### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

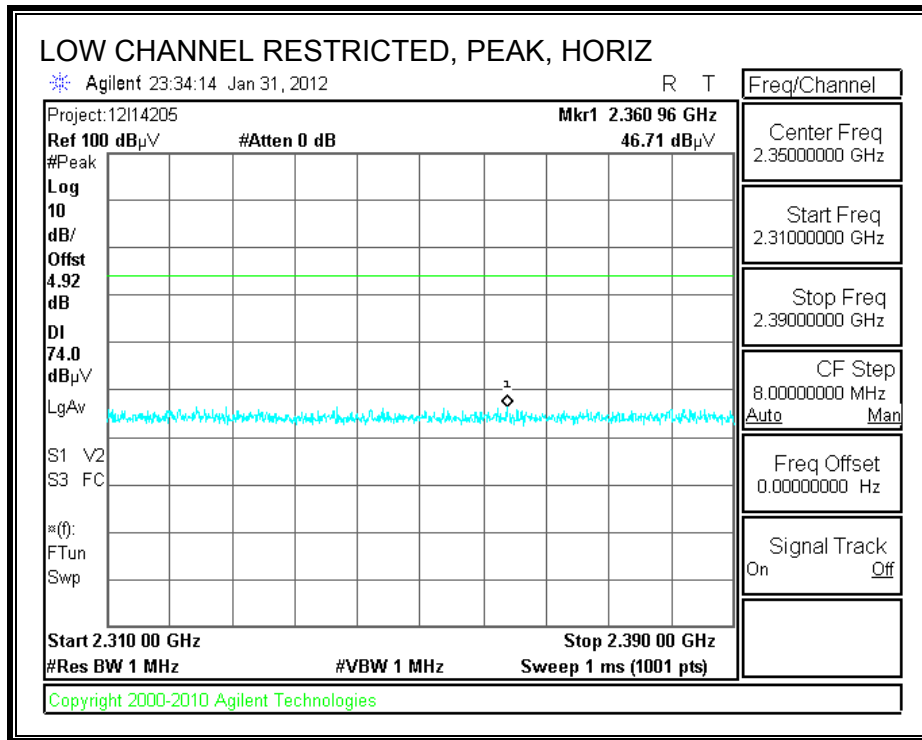

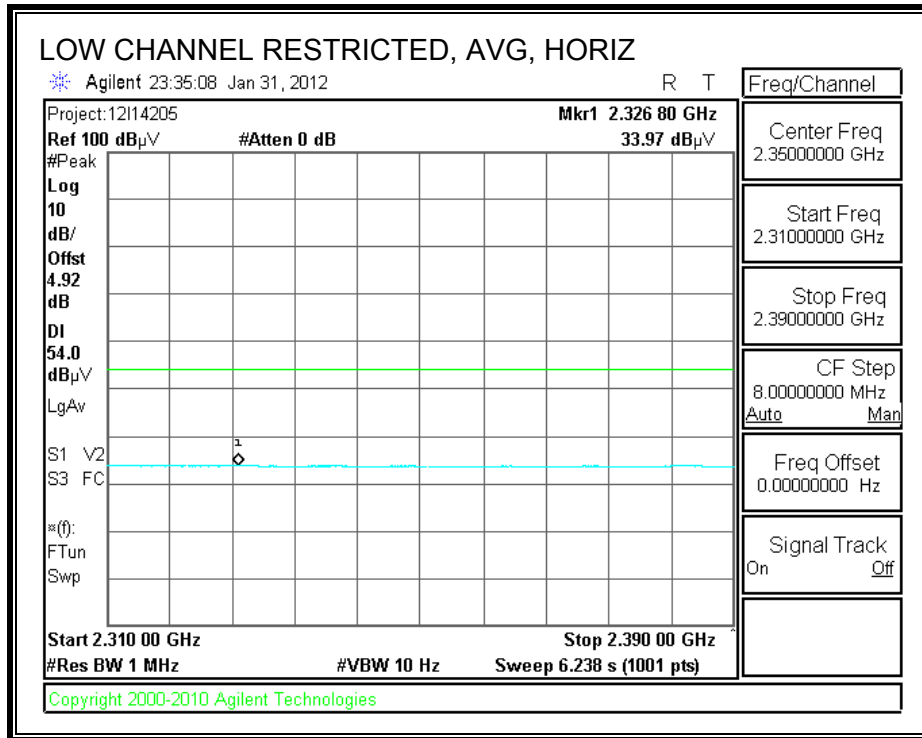



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

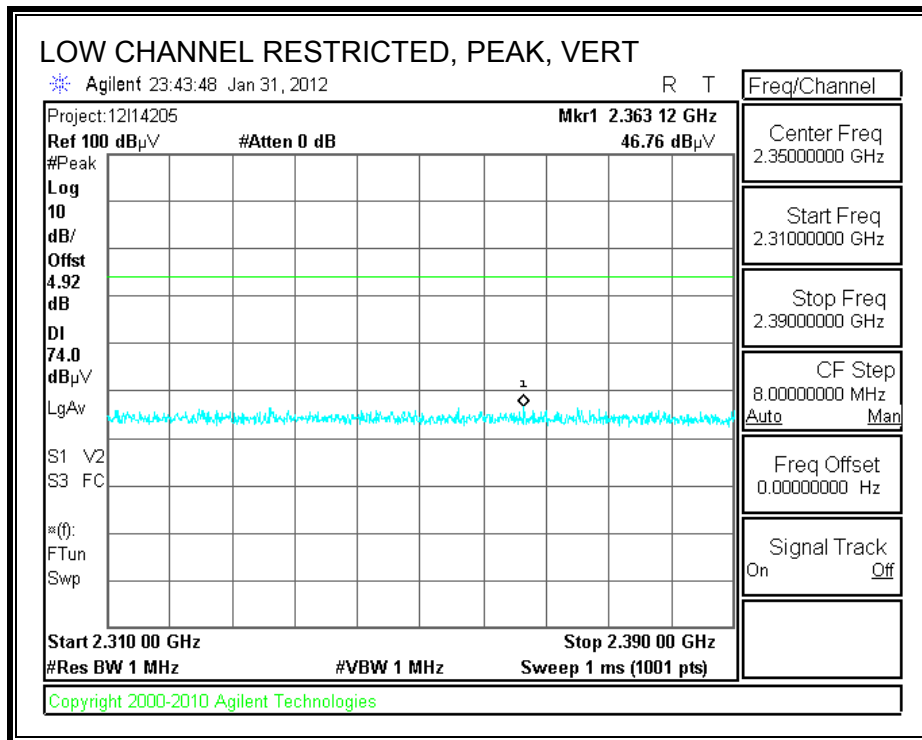

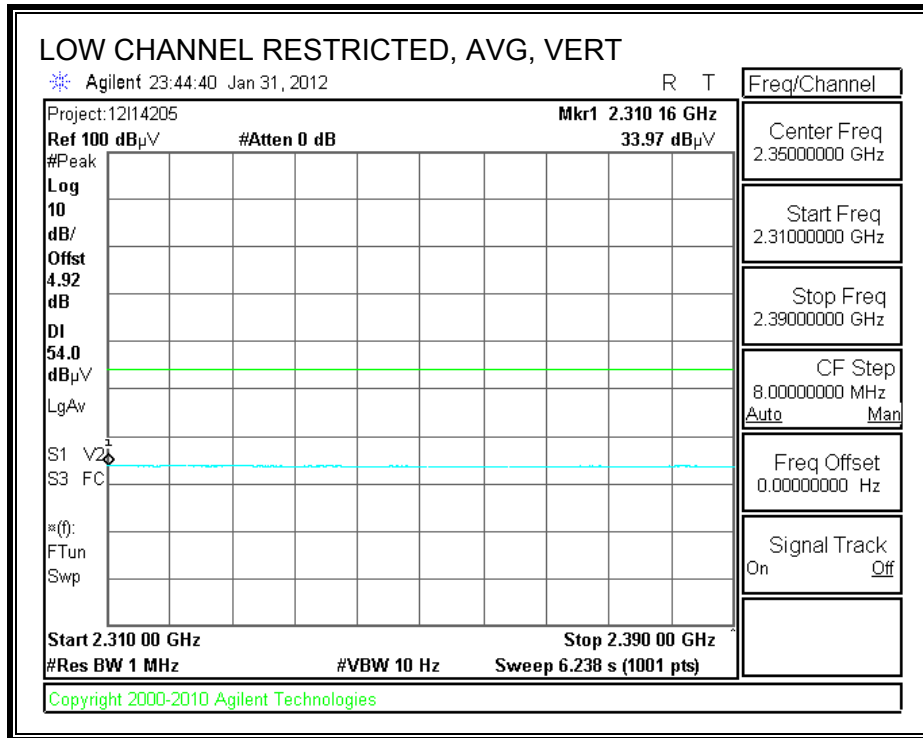



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

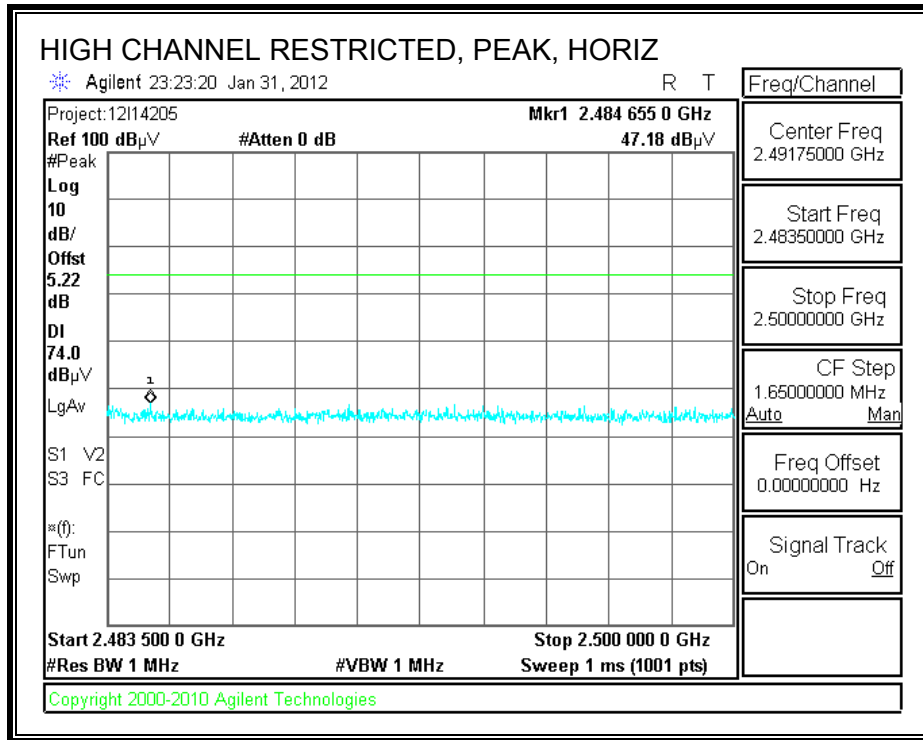

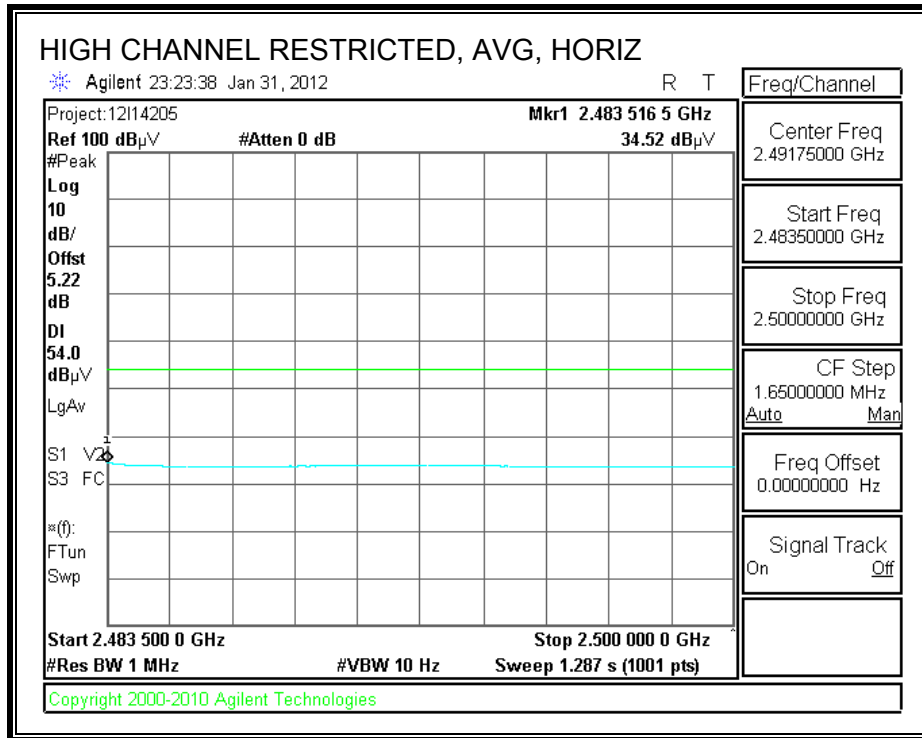

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

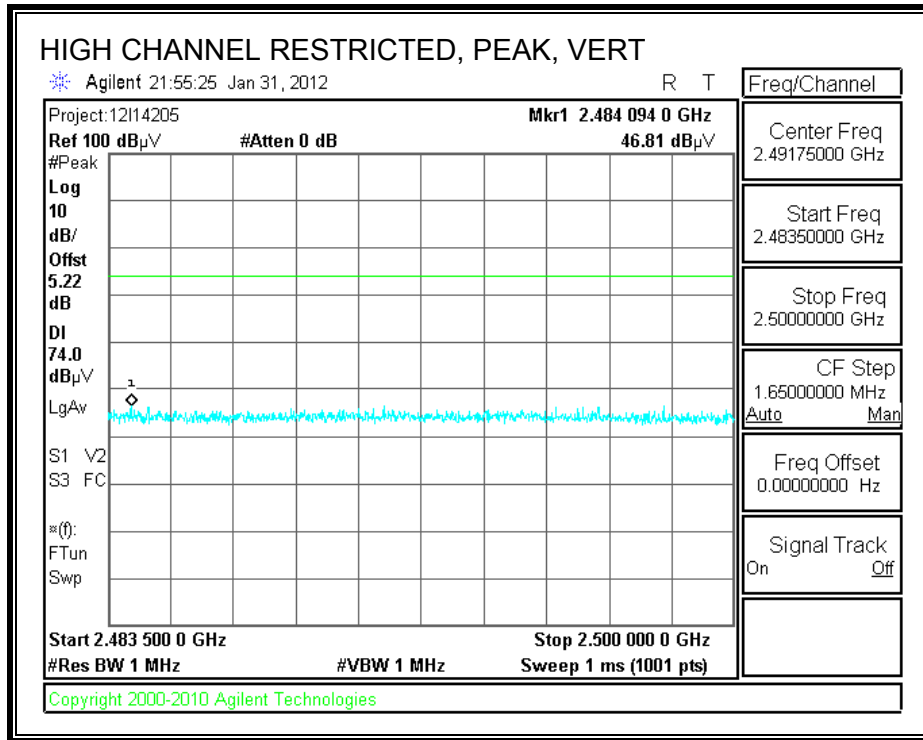

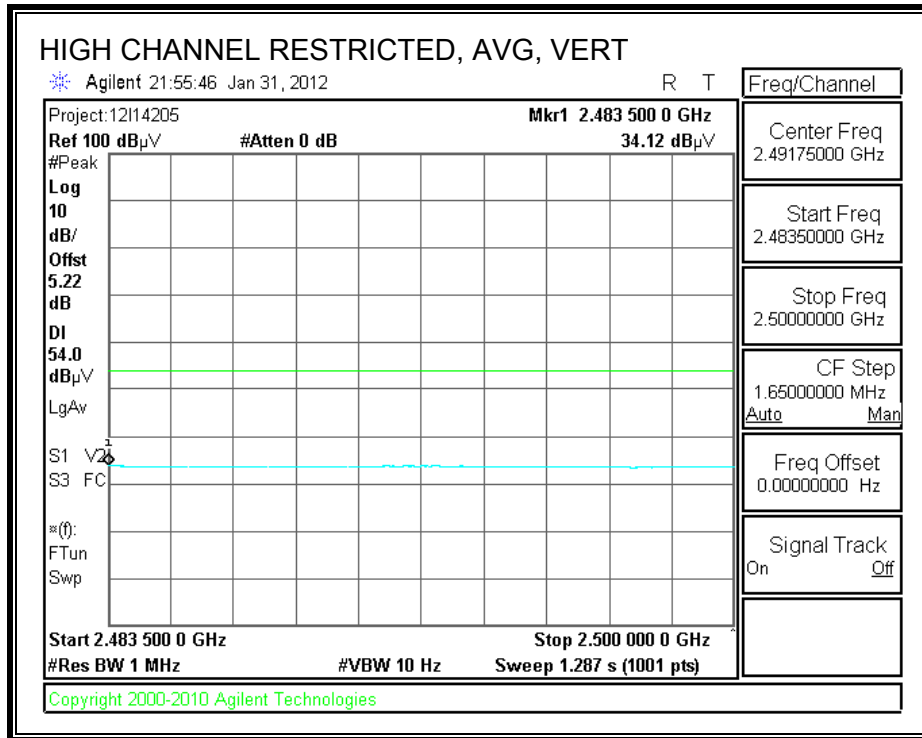

**HARMONICS AND SPURIOUS EMISSIONS**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber-B

**Company:** SAMSUNG ELECTRONICS  
**Project #:** 12I14205  
**Date:** 1/31/2012  
**Test Engineer:** MENGISTU MEKURIA  
**Configuration:** EUT ALONE  
**Mode:** TX, 8PSK MODE

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>	<b>Limit</b>
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.209

Hi Frequency Cables

<b>3' cable 22807700</b>	<b>12' cable 22807600</b>	<b>20' cable 22807500</b>	<b>HPF</b>	<b>Reject Filter</b>	<b>Peak Measurements</b> RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2402 MHz)</b>															
4.804	3.0	45.2	36.9	33.9	6.3	-35.5	0.0	0.0	49.8	41.5	74	54	-24.2	-12.5	V
12.010	3.0	34.8	22.2	39.8	11.0	-35.4	0.0	0.0	50.1	37.6	74	54	-23.9	-16.4	V
4.804	3.0	47.9	39.7	33.9	6.3	-35.5	0.0	0.0	52.5	44.3	74	54	-21.5	-9.7	H
12.010	3.0	35.6	23.3	39.8	11.0	-35.4	0.0	0.0	51.0	38.7	74	54	-23.0	-15.3	H
<b>Mid Channel (2441MHz)</b>															
4.882	3.0	47.5	39.1	33.9	6.3	-35.5	0.0	0.0	52.3	43.9	74	54	-21.7	-10.1	V
7.323	3.0	37.6	24.5	36.6	8.5	-35.4	0.0	0.0	47.2	34.1	74	54	-26.8	-19.9	V
12.205	3.0	35.0	22.4	39.6	11.1	-35.3	0.0	0.0	50.4	37.8	74	54	-23.6	-16.2	V
4.882	3.0	50.3	41.7	33.9	6.3	-35.5	0.0	0.0	55.1	46.4	74	54	-18.9	-7.6	H
7.323	3.0	37.4	24.9	36.6	8.5	-35.4	0.0	0.0	47.0	34.6	74	54	-27.0	-19.4	H
12.205	3.0	35.6	23.7	39.6	11.1	-35.3	0.0	0.0	51.0	39.1	74	54	-23.0	-14.9	H
<b>High Channel (2480 MHz)</b>															
4.960	3.0	47.7	39.5	34.0	6.4	-35.5	0.0	0.0	52.6	44.4	74	54	-21.4	-9.6	V
7.440	3.0	36.1	23.8	36.7	8.5	-35.5	0.0	0.0	45.9	33.6	74	54	-28.1	-20.4	V
12.400	3.0	34.7	22.5	39.5	11.2	-35.3	0.0	0.0	50.1	37.9	74	54	-23.9	-16.1	V
4.960	3.0	51.4	42.5	34.0	6.4	-35.5	0.0	0.0	56.3	47.4	74	54	-17.7	-6.6	H
7.440	3.0	36.3	23.8	36.7	8.5	-35.5	0.0	0.0	46.0	33.6	74	54	-28.0	-20.4	H
12.400	3.0	35.6	24.2	39.5	11.2	-35.3	0.0	0.0	51.0	39.6	74	54	-23.0	-14.4	H


Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

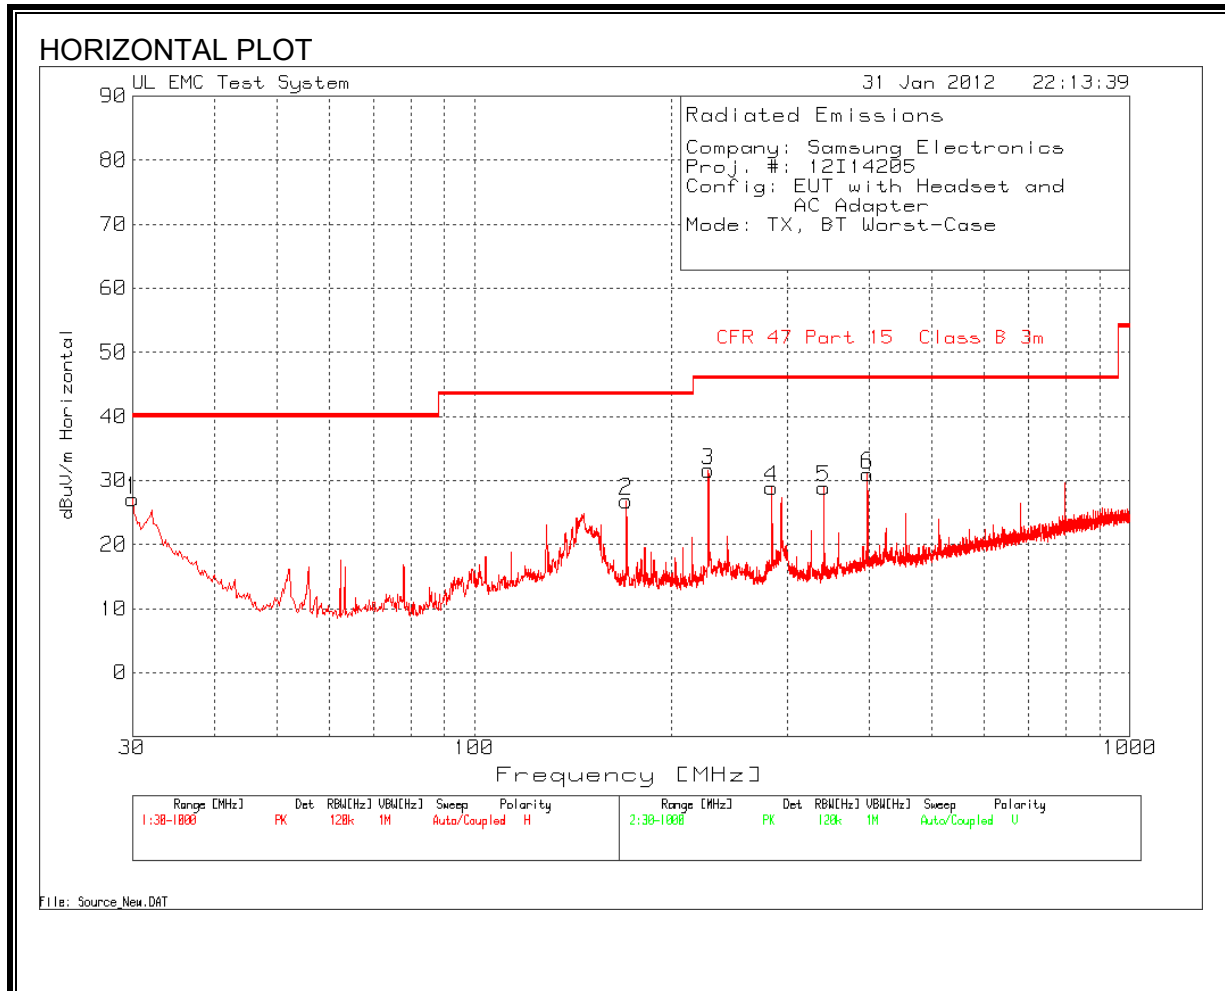

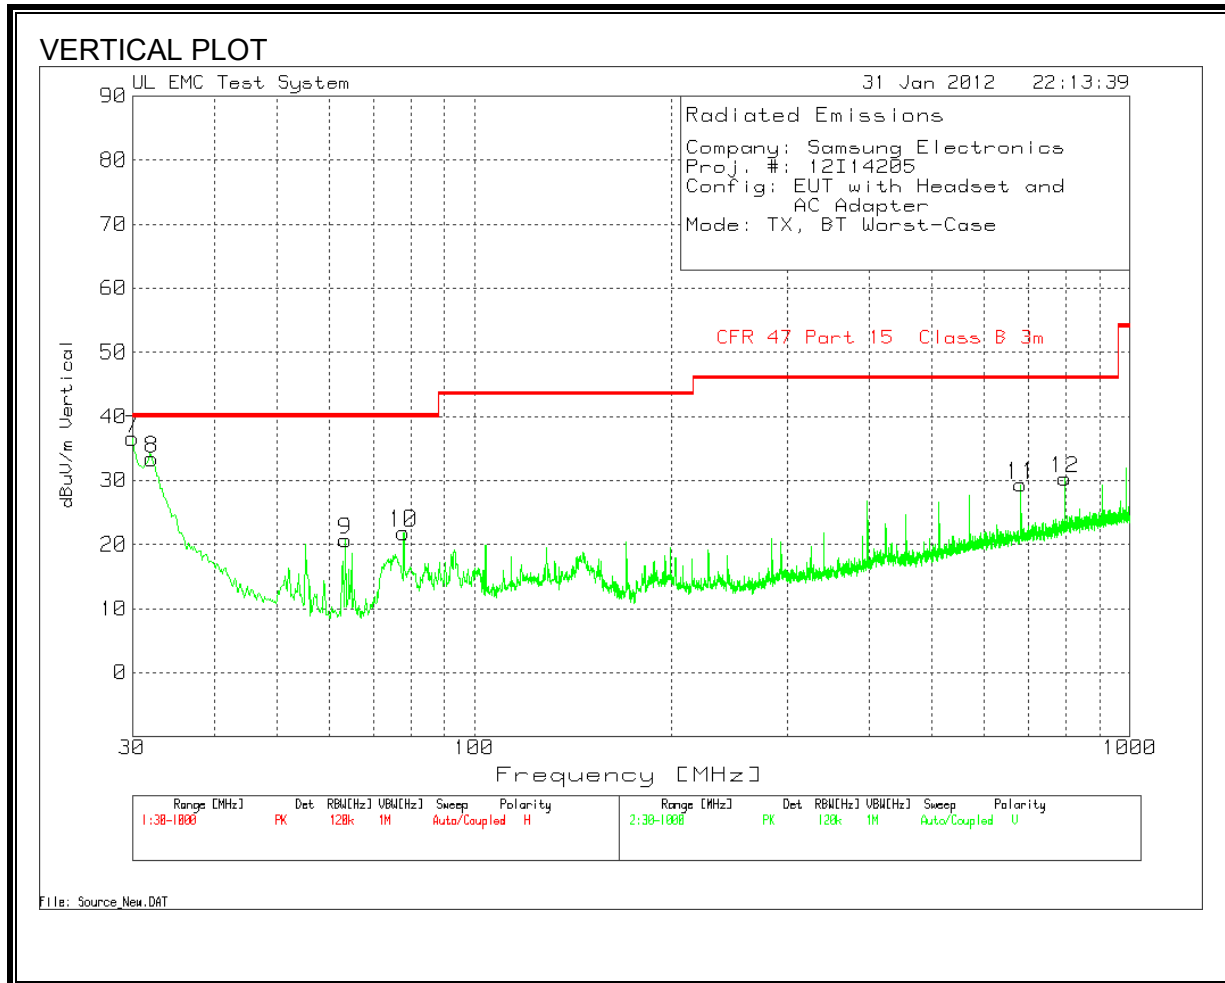

### HORIZONTAL AND VERTICAL DATA

Company: Samsung Electronics										
Proj. #: 12I14205										
Config: EUT with Headset and AC Adapter										
Mode: TX, BT Worst-Case										
Range 1 30 - 1000MHz										
Test Frequency	Meter Reading	Detector	25MHz-1GHz ChmbrA Amplified.TX [dB]	5m A T122 Bilog below 1GHz.TXT	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity	
30	34.47	PK	-27.5	20.1	27.07	40	-12.93	300	Horz	
170.5376	42.44	PK	-26.4	10.8	26.84	43.5	-16.66	200	Horz	
227.528	45.81	PK	-26.1	11.9	31.61	46	-14.39	91	Horz	
284.5184	41.86	PK	-25.9	12.9	28.86	46	-17.14	91	Horz	
341.3149	40.47	PK	-25.6	14	28.87	46	-17.13	91	Horz	
398.1115	41.37	PK	-25.3	14.9	30.97	46	-15.03	91	Horz	
Range 2 30 - 1000MHz										
Test Frequency	Meter Reading	Detector	25MHz-1GHz ChmbrA Amplified.TX [dB]	5m A T122 Bilog below 1GHz.TXT	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity	
30	44.01	PK	-27.5	20.1	36.61	40	-3.39	100	Vert	
30	39.05	QP	-27.5	20.1	31.65	40	-8.35	100	Vert	
32.1323	41.72	PK	-27.5	19.2	33.42	40	-6.58	100	Vert	
63.5352	39.9	PK	-27.2	8	20.7	40	-19.3	100	Vert	
77.8797	41.48	PK	-27.1	7.5	21.88	40	-18.12	100	Vert	
682.6759	33.26	PK	-23.3	19.4	29.36	46	-16.64	100	Vert	
796.4628	32.67	PK	-23.3	20.9	30.27	46	-15.73	100	Vert	

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

Samsung Electronics									
Proj. #: 14I14205									
Config.: EUT with AC Adapter and Headset									
Mode: TX BT, Worst-Case									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT [dB]	LC Cables 1&3.TXT [dB]	dBuV	CISPR Class B QP	Margin	CISPR Class B Avg	Margin
0.5145	47.73	PK	0.1	0	47.83	56	-8.17	-	-
0.5145	31.38	Av	0.1	0	31.48	-	-	46	-14.52
0.6675	48.18	PK	0.1	0	48.28	56	-7.72	-	-
0.6675	29.85	Av	0.1	0	29.95	-	-	46	-16.05
6.684	52.13	PK	0.1	0.1	52.33	60	-7.67	-	-
6.684	34.81	Av	0.1	0.1	35.01	-	-	50	-14.99
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT [dB]	LC Cables 1&3.TXT [dB]	dBuV	CISPR Class B QP	Margin	CISPR Class B Avg	Margin
0.4605	42.6	PK	0.1	0	42.7	56.7	-14	-	-
0.4605	24.89	Av	0.1	0	24.99	-	-	46.7	-21.71
0.789	39.72	PK	0.1	0	39.82	56	-16.18	-	-
0.789	22.38	Av	0.1	0	22.48	-	-	46	-23.52
6.6705	45.35	PK	0.1	0.1	45.55	60	-14.45	-	-
6.6705	25.94	Av	0.1	0.1	26.14	-	-	50	-23.86

**LINE 1 RESULTS**

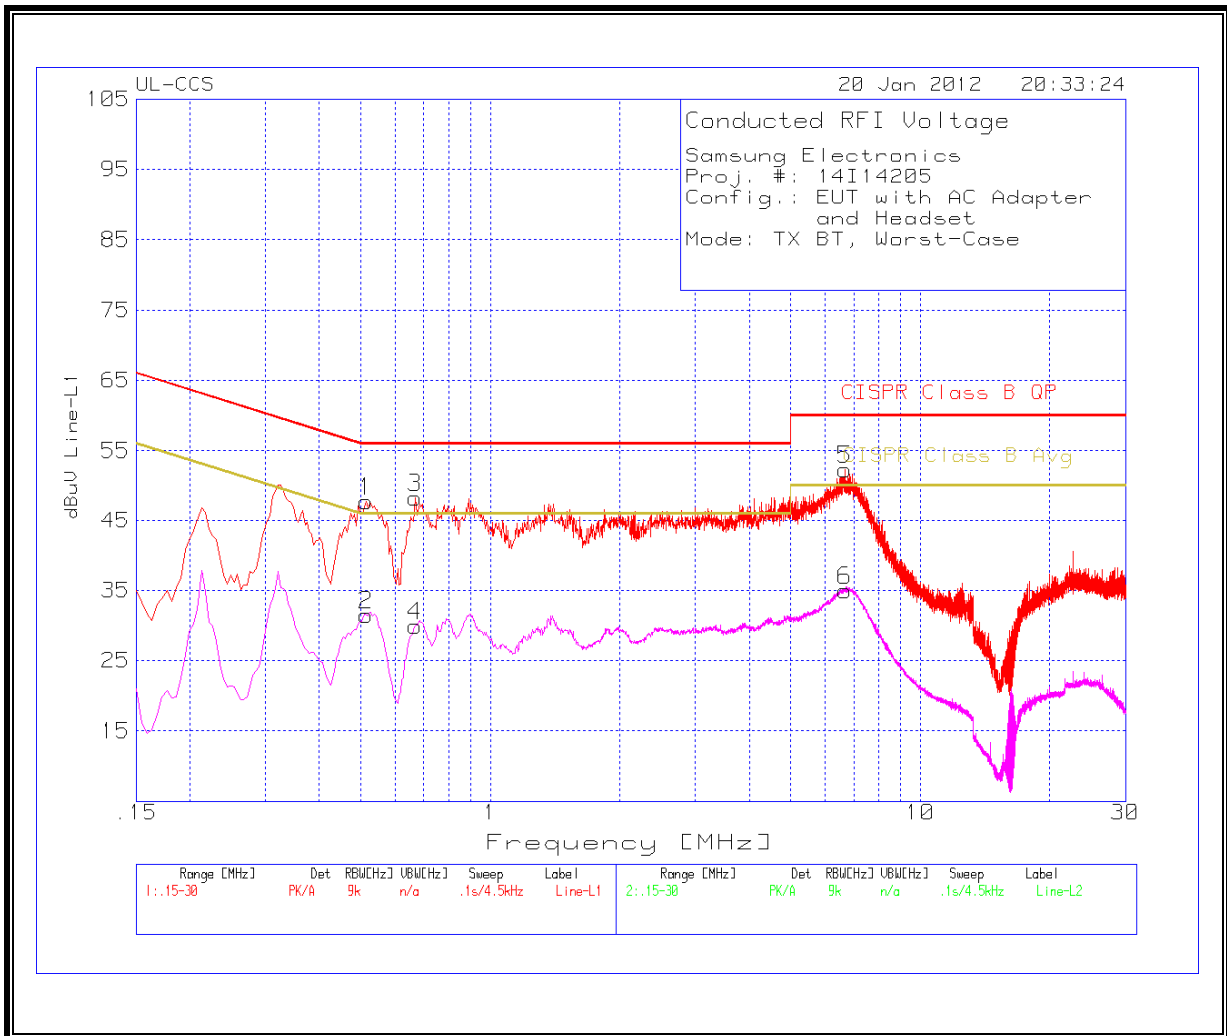

**LINE 2 RESULTS**

