



FCC 47 CFR PART 15 SUBPART B

CERTIFICATION TEST REPORT

FOR

TABLET WITH 802.11BGN, BT3.0

MODEL NUMBER: GT-P3113

FCC ID: A3LGTP3113

REPORT NUMBER: 12I14205-3, Revision A

ISSUE DATE: FEBRUARY 10, 2012

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO, 443-742
SOUTH KOREA**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
	02-03-12	Initial	S. Leitner
A	02-10-12	Updated EUT description	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. EUT SUBASSEMBLIES	6
5.3. PRELIMINARY TEST CONFIGURATIONS	6
5.4. MODE(S) OF OPERATION	7
5.5. SOFTWARE AND FIRMWARE	7
5.6. MODIFICATIONS	7
5.7. DETAILS OF TESTED SYSTEM	7
6. TEST AND MEASUREMENT EQUIPMENT	11
7. APPLICABLE LIMITS AND TEST RESULTS	12
7.1. RADIATED EMISSIONS	12
7.2. AC MAINS LINE CONDUCTED EMISSIONS	23
8. SETUP PHOTOS	30
8.1. RADIATED EMISSION	30
8.2. AC MAINS LINE CONDUCTED EMISSION	33

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO, 443-742, SOUTH KOREA

EUT DESCRIPTION: TABLET WITH 802.11bgn, BT3.0

MODEL: GT-P3113

SERIAL NUMBER: 03050

DATE TESTED: JANUARY 30 AND FEBRUARY 1, 2012


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:

Tested By:



STEVE LEITNER
EMC SUPERVISOR
UL CCS

MENGISTU MEKURIA
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Tablet with 802.11bgn and Bluetooth 3.0.

GENERAL INFORMATION

Power Requirements, AC adapter	Input: 100-240 V / 50-60 Hz, 0.35 A Output: 5 V, 2 A
Maximum frequency generated or used by the EUT	26 MHz (oscillator), 1.2 GHz (processor)

5.2. EUT SUBASSEMBLIES

Description	Model Number	Serial Number
Tablet PC	GT-P3113	03050
AC Adapter (illustrated as AC Adapter 1 in setup diagram)	ETA-P11X	03046

5.3. PRELIMINARY TEST CONFIGURATIONS

The following configurations were investigated during preliminary testing:

EUT Configuration	Description
Configuration 1	The EUT standalone, configured with a headset.
Configuration 2	The EUT was connected to the AC mains with an AC adapter and configured with a headset.
Configuration 3	The EUT, configured with a headset, was connected to a USB port of a notebook PC with a minimum set of peripherals.

The worst-case configuration was determined to be Configuration 3. The worst-case orientation was determined to be in the "Y" axis.

5.4. MODE(S) OF OPERATION

Mode	Description
Active	The EUT played movie.
Charge Mode	The batteries of the EUT were being charged while in Configuration 2.
USB Mode	While in Configuration 3 the EUT played a Movie (audio and video) while charging from the laptop.

5.5. SOFTWARE AND FIRMWARE

Bluetooth firmware - BCM4330B1_002.001.003.0634.0678.hcd
Wi-Fi Firmware Rev 5.90.125.1191

EUT driver software version: P3113.001

5.6. MODIFICATIONS

No modifications were made during testing.

5.7. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

CONFIGURATIONS 1 and 2

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Headset	Samsung	EHS64AVFWE	N/A	N/A

CONFIGURATION 3

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Notebook PC	Lenovo	Type 2537-C84	R8-2K96F	DoC
AC Adapter	Lenovo	42T4418	11S42T4418Z1ZG	DoC
USB Printer	HP	DESKJET 812C	CN01A1R23Q	DoC
AC Adapter	HP	C6409-60014	B9L18B	DoC
USB Mouse	DELL	M-UK DEL3	831890-0000	DoC
Headset	Samsung	EHS64AVFWE	N/A	N/A

I/O CABLES

CONFIGURATION 1

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	Audio	1	Mini-Jack	Unshielded	1.2 m	Volume control attached

CONFIGURATION 2

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC Power	1	USB	Shielded	1.0 m	Standard A USB at ac adapter end, 30-pin connector at EUT end
2	Audio	1	Mini-Jack	Unshielded	1.2 m	Volume control attached

CONFIGURATION 3


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	2-Prong	Unshielded	1.0 m	
2	AC Power	1	2-Prong	Unshielded	2.0 m	
3	DC Power	1	Mini-Jack	Unshielded	1.75 m	Ferrite at PC End
4	DC Power	1	Bananna	Unshielded	2.0 m	
5	USB	1	USB-A	Shielded	2.0 m	
6	USB	1	USB	Shielded	1.0 m	Standard A USB at PC end, 30-pin connector at EUT end
7	Audio	1	Mini-Jack	Unshielded	1.2 m	
8	USB	1	USB-A	Shielded	1.75 m	

TEST SETUP


The EUT was installed in a typical configuration per the following diagrams. Test software exercised the EUT.

TEST SETUP DIAGRAM


CONFIGURATION 1

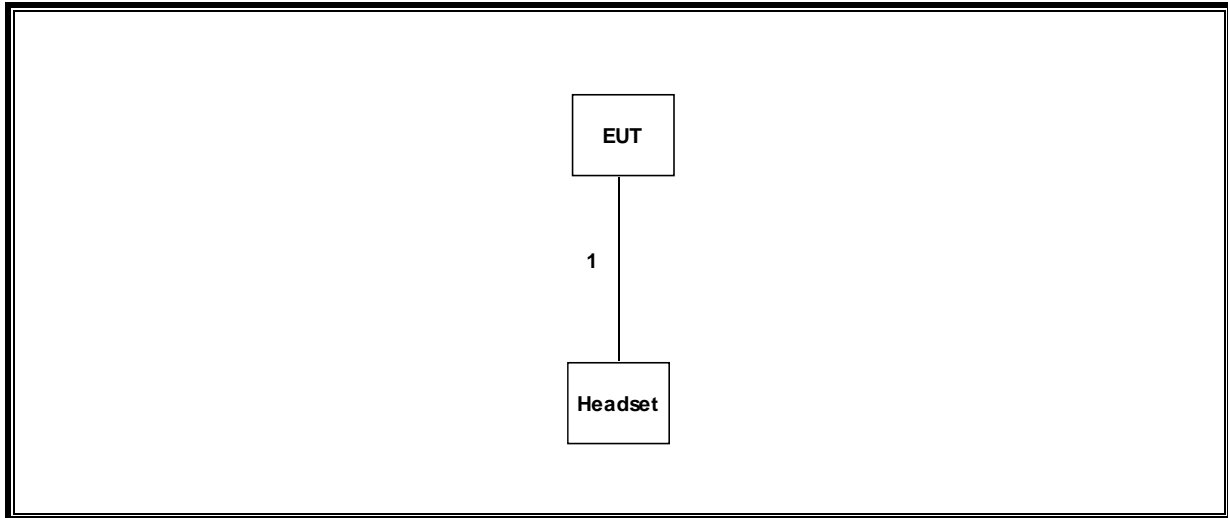

CONFIGURATION 2

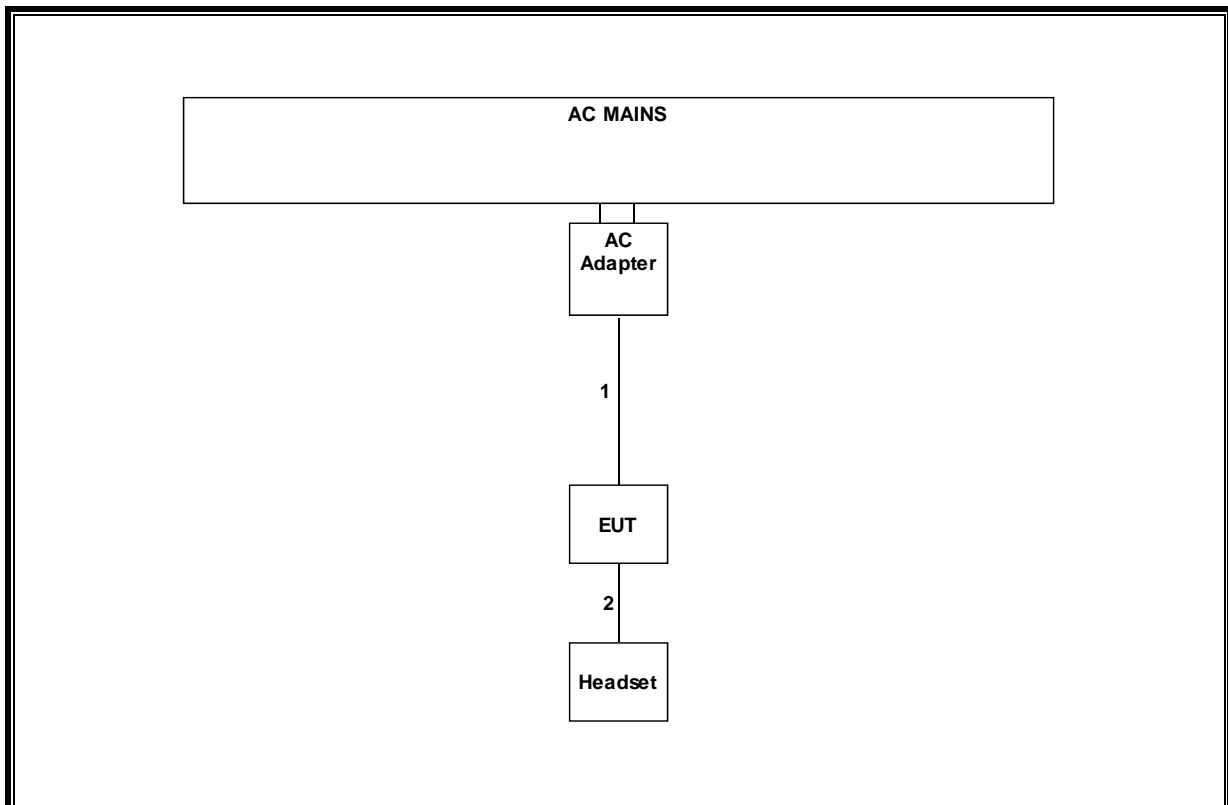

CONFIGURATION 3

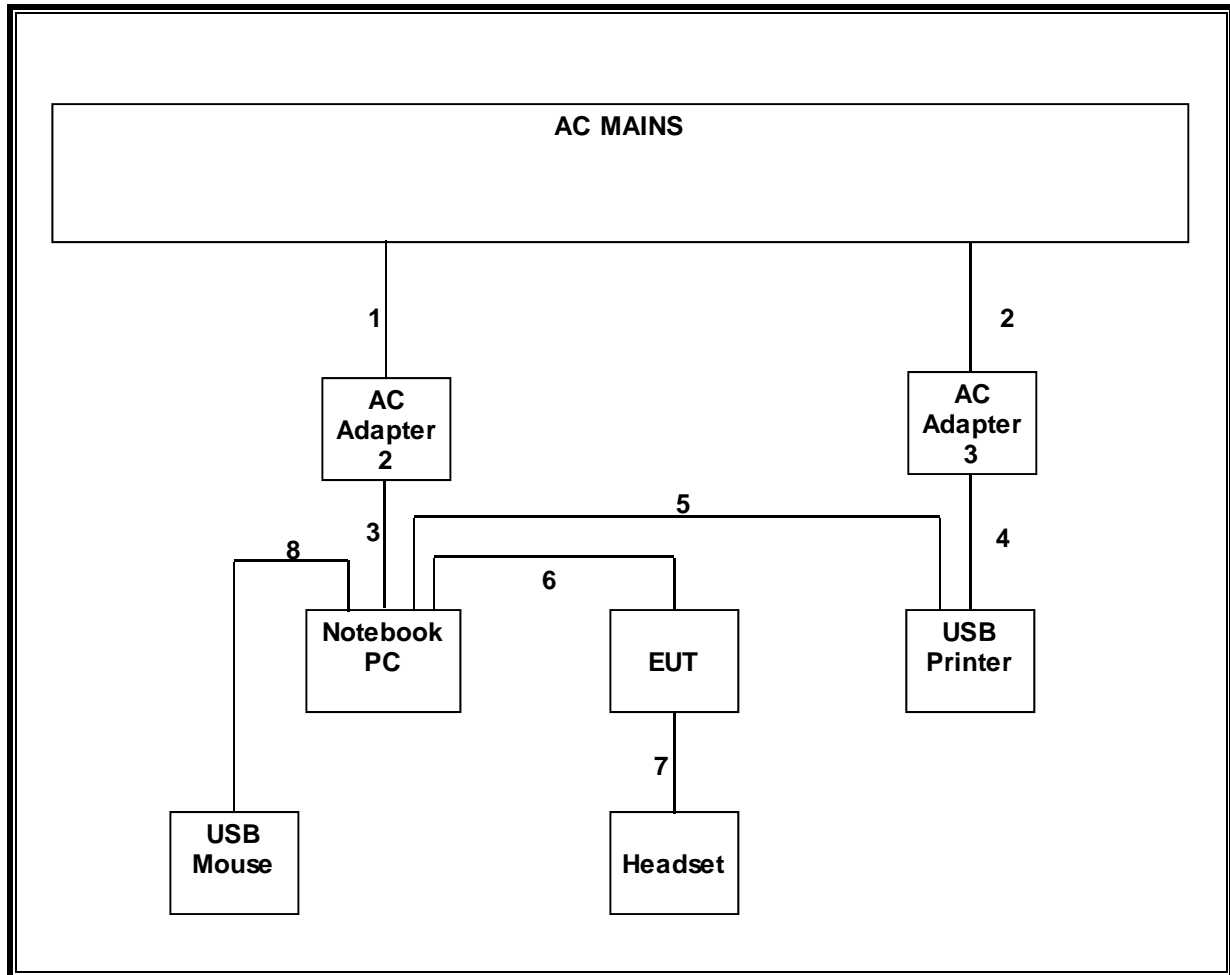

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	03/17/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	04/28/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/16/12
Preamplifier, 1300 Hz	Agilent / HP	8447D	C00580	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	09/20/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/12/12
EMI Test Receiver, 9 kHz-7	R & S	ESCI 7	1000741	07/06/12
LISN, 30 MHz	FCC	50/250-25-2	C00626	12/13/12
LISN, 30 MHz	Solar	8012-50-R-24-BNC	N02481	C.N.R.

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated or used in the EUT is 1200 MHz, therefore the frequency range was investigated from 30 MHz to 6000 MHz.

LIMIT


§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54


Note: The lower limit shall apply at the transition frequency.

RESULTS

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION) – CONFIGURATION 1

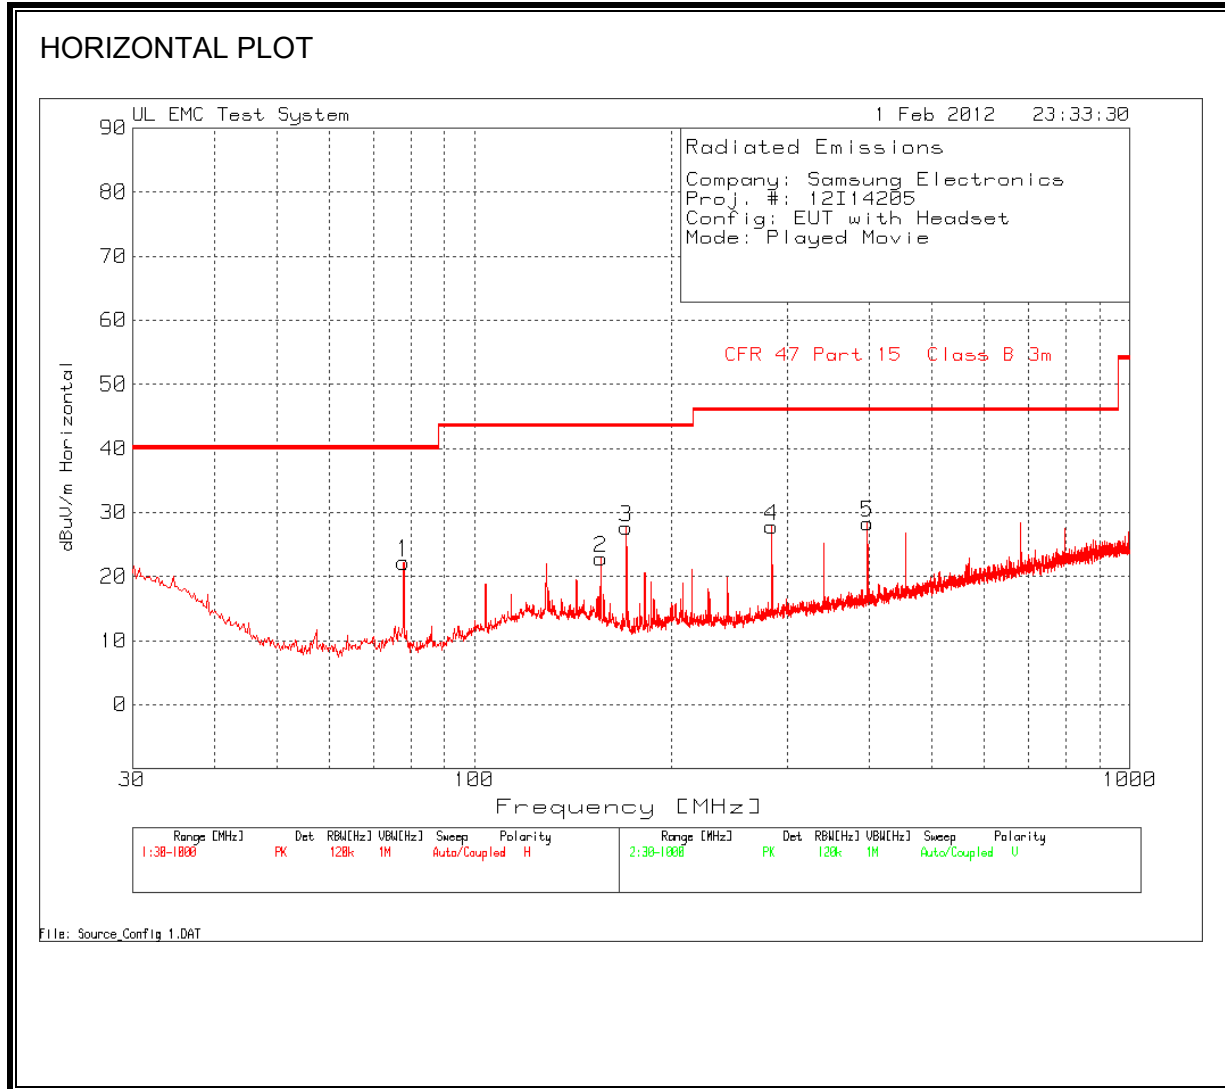


VERTICAL PLOT

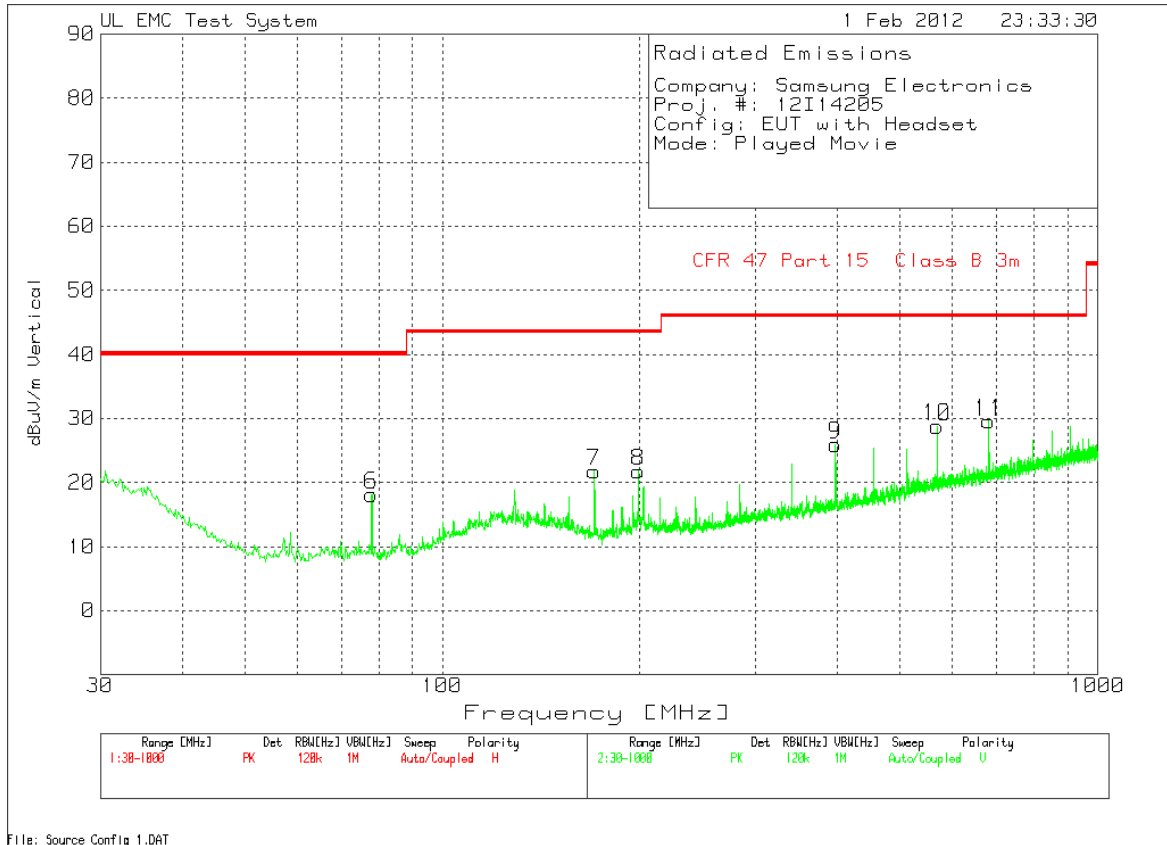


HORIZONTAL AND VERTICAL DATA

Company: Samsung Electronics									
Proj. #: 12I14205									
Configuration 1: EUT with Headset									
Mode: Played Movie									
Test Frequency	Meter Reading	Detector	Amplifier [dB]	T122 Bilog [dB]	Corrected dBuV/m	Class B 3m limit	QP Margin	Height [cm]	Polarity
77.8797	41.84	PK	-27.1	7.5	22.24	40	-17.76	200	Horz
155.8054	37.23	PK	-26.5	12.1	22.83	43.5	-20.67	200	Horz
170.5376	43.27	PK	-26.4	10.8	27.67	43.5	-15.83	200	Horz
284.5184	40.84	PK	-25.9	12.9	27.84	46	-18.16	91	Horz
398.1115	38.77	PK	-25.3	14.9	28.37	46	-17.63	91	Horz
77.8797	37.75	PK	-27.1	7.5	18.15	40	-21.85	300	Vert
170.5376	37.36	PK	-26.4	10.8	21.76	43.5	-21.74	200	Vert
198.8389	36.09	PK	-26.2	11.9	21.79	43.5	-21.71	100	Vert
398.1115	36.36	PK	-25.3	14.9	25.96	46	-20.04	100	Vert
568.8889	35.11	PK	-24.2	17.9	28.81	46	-17.19	100	Vert
682.6759	33.45	PK	-23.3	19.4	29.55	46	-16.45	100	Vert
PK - Peak detector									
QP - Quasi-peak detector									

CONFIGURATION 2

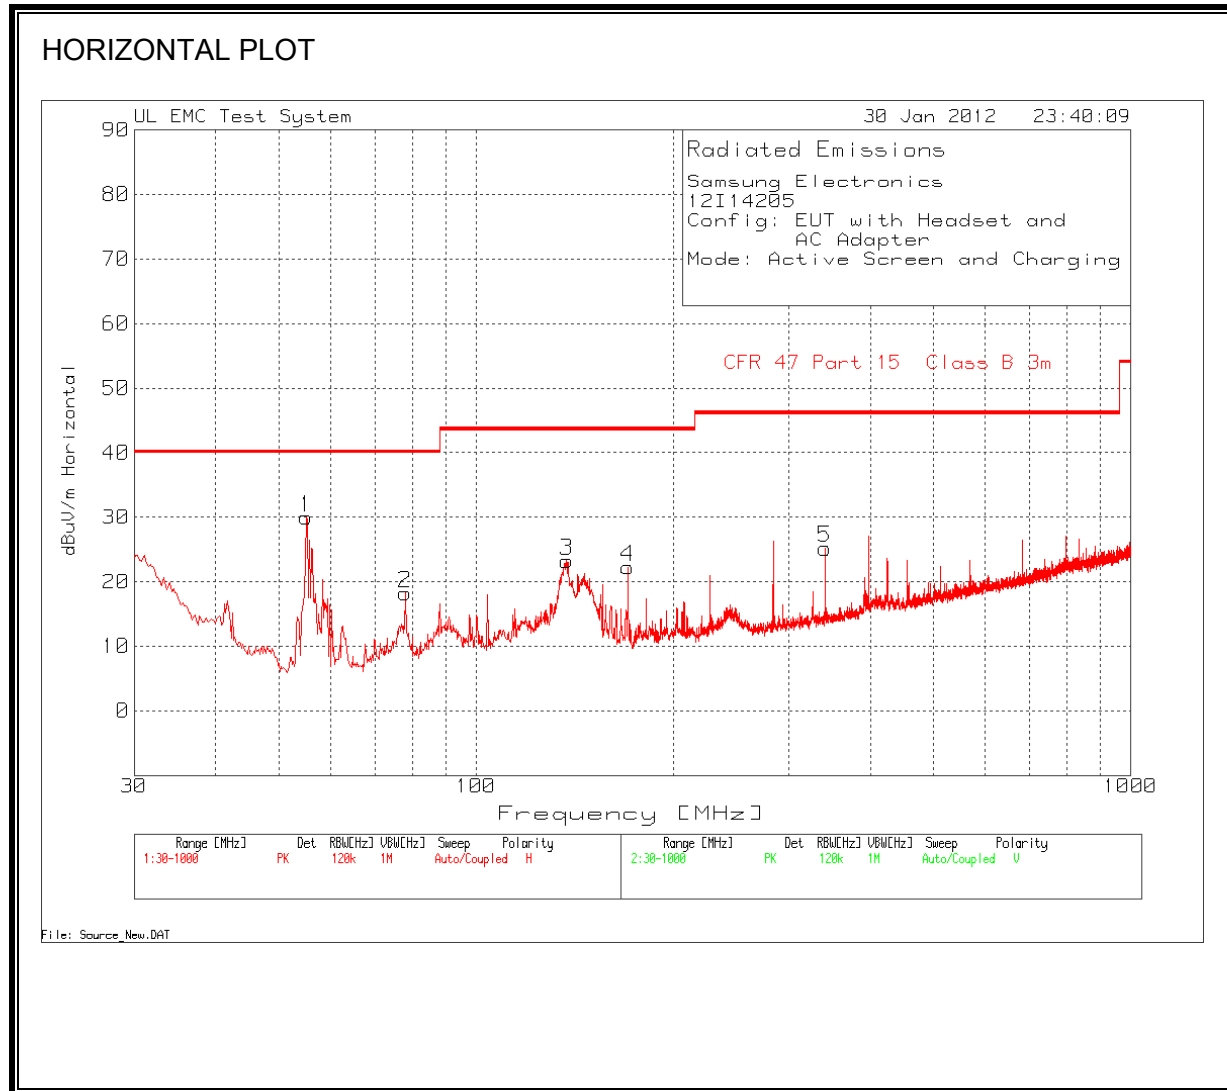

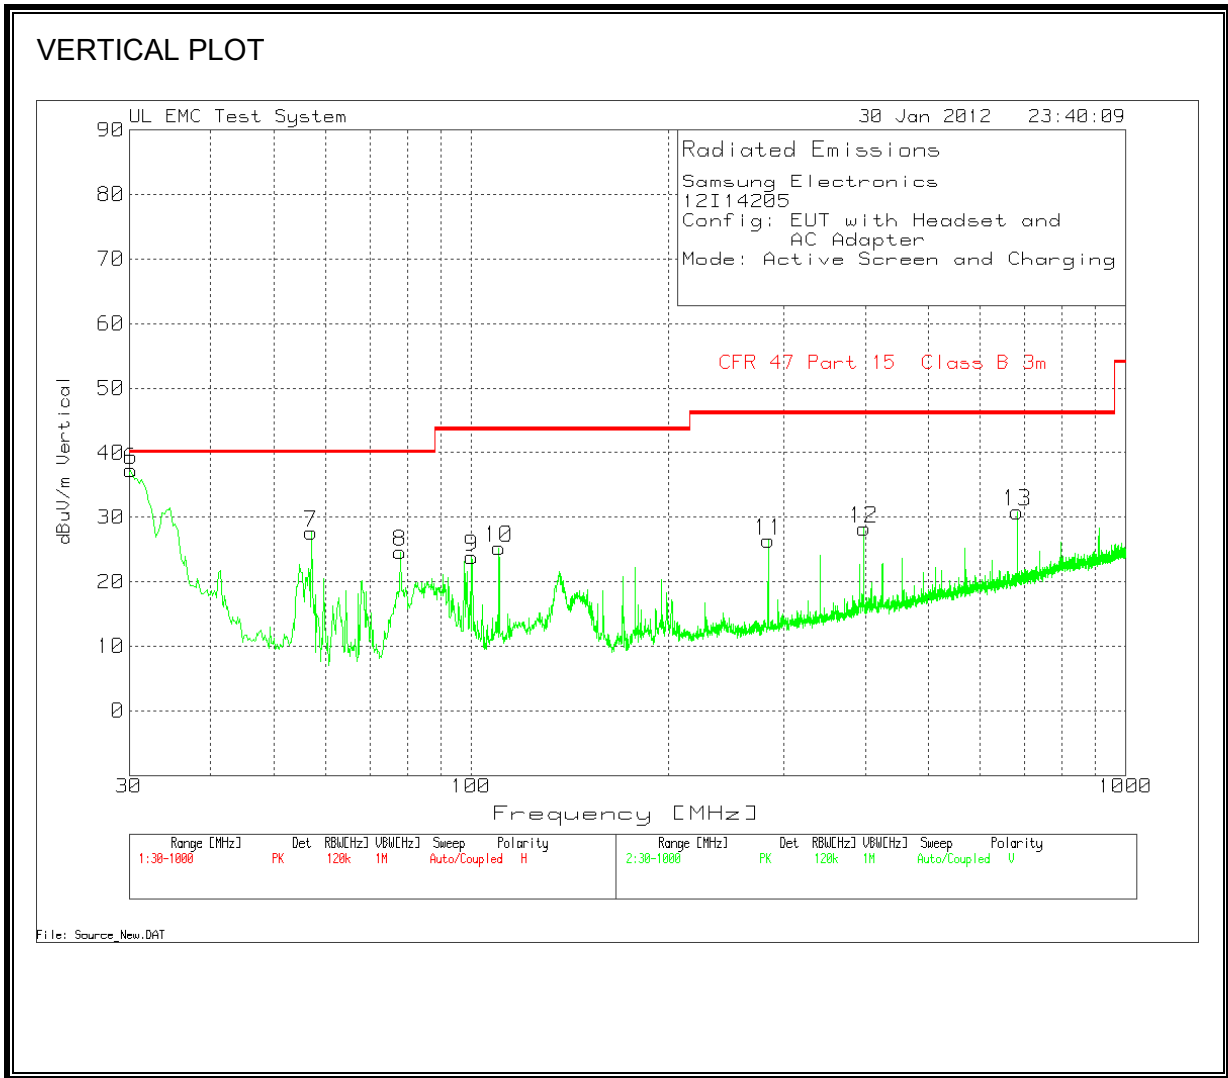

HORIZONTAL AND VERTICAL DATA


Samsung Electronics
 12I14205
 Configuration 2: EUT with Headset and AC adapter
 Mode: Active Screen and Charging

Test Frequency	Meter Reading	Detector	Amp [dB]	T130 Bilog [dB]	Corrected dBuV/m	Class B 3m limit	QP Margin	Height [cm]	Polarity
55.006	51.12	PK	-29	7.9	30.02	40	-9.98	400	Horz
77.8797	39.33	PK	-28.8	7.7	18.23	40	-21.77	400	Horz
137.3901	38.18	PK	-28.2	13.3	23.28	43.5	-20.22	200	Horz
170.5376	39.95	PK	-27.8	10.1	22.25	43.5	-21.25	200	Horz
341.3149	38	PK	-26.8	14	25.2	46	-20.8	100	Horz
30.1938	46.32	PK	-29.3	20.3	37.32	40	-2.68	100	Vert
30.1938	40.22	PK	-29.3	20.3	31.12	40	-8.88	100	Vert
56.9444	48.72	PK	-29	7.9	27.62	40	-12.38	200	Vert
77.8797	45.71	PK	-28.8	7.7	24.61	40	-15.39	100	Vert
100.1719	42.34	PK	-28.6	10.1	23.84	43.5	-19.66	100	Vert
110.2518	41.85	PK	-28.5	11.9	25.25	43.5	-18.25	100	Vert
284.5184	40.49	PK	-26.9	12.8	26.39	46	-19.61	200	Vert
398.1115	40.18	PK	-26.9	15	28.28	46	-17.72	200	Vert
682.6759	38.01	PK	-26.3	19.1	30.81	46	-15.19	100	Vert


PK - Peak detector

QP - Quasi-Peak detector

CONFIGURATION 3

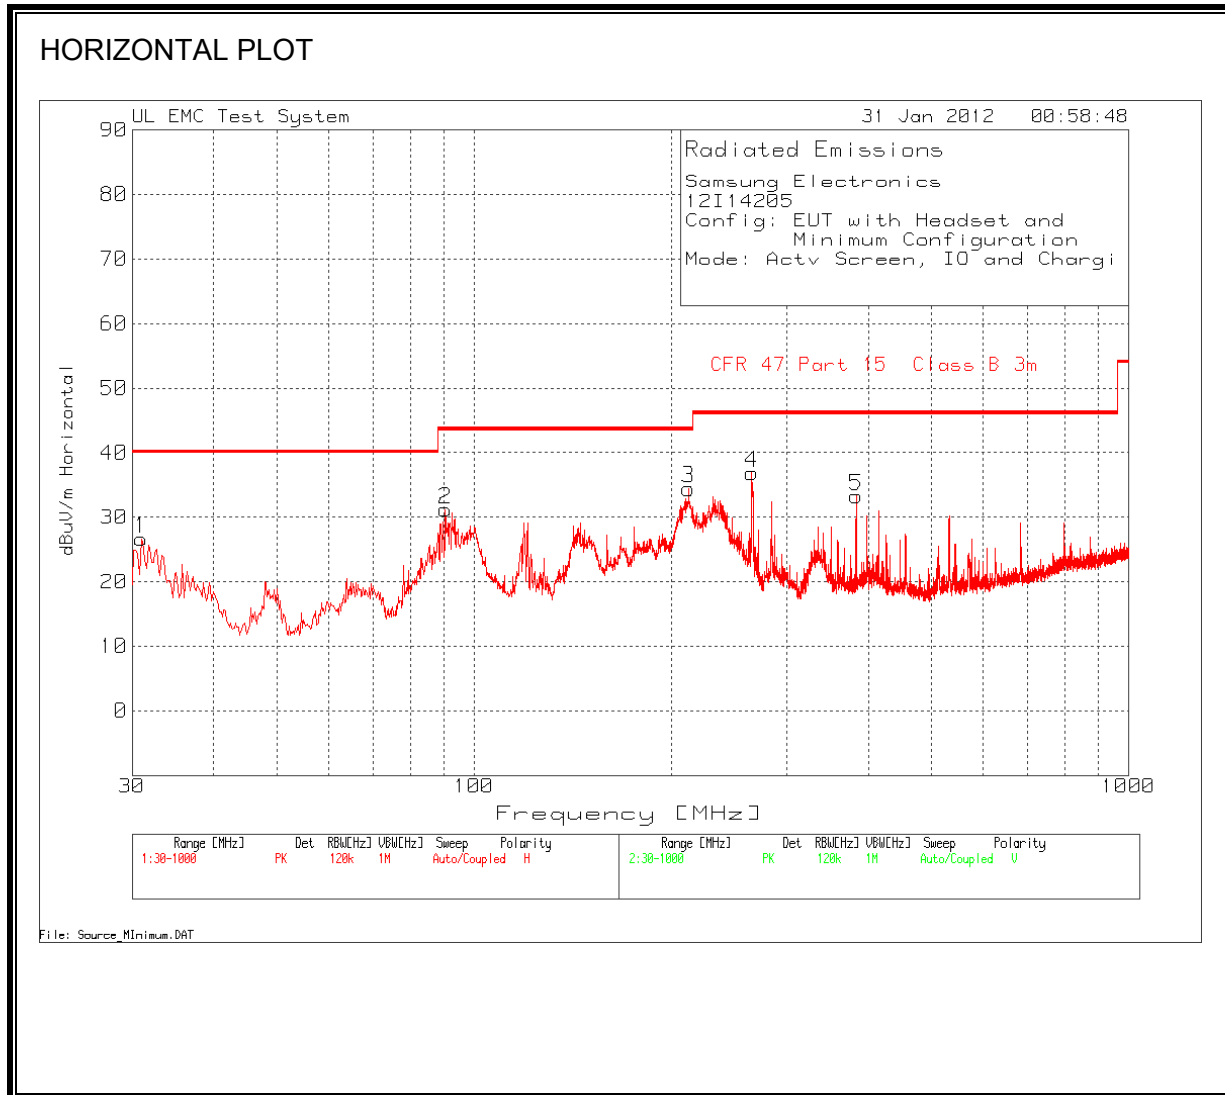

VERTICAL PLOT

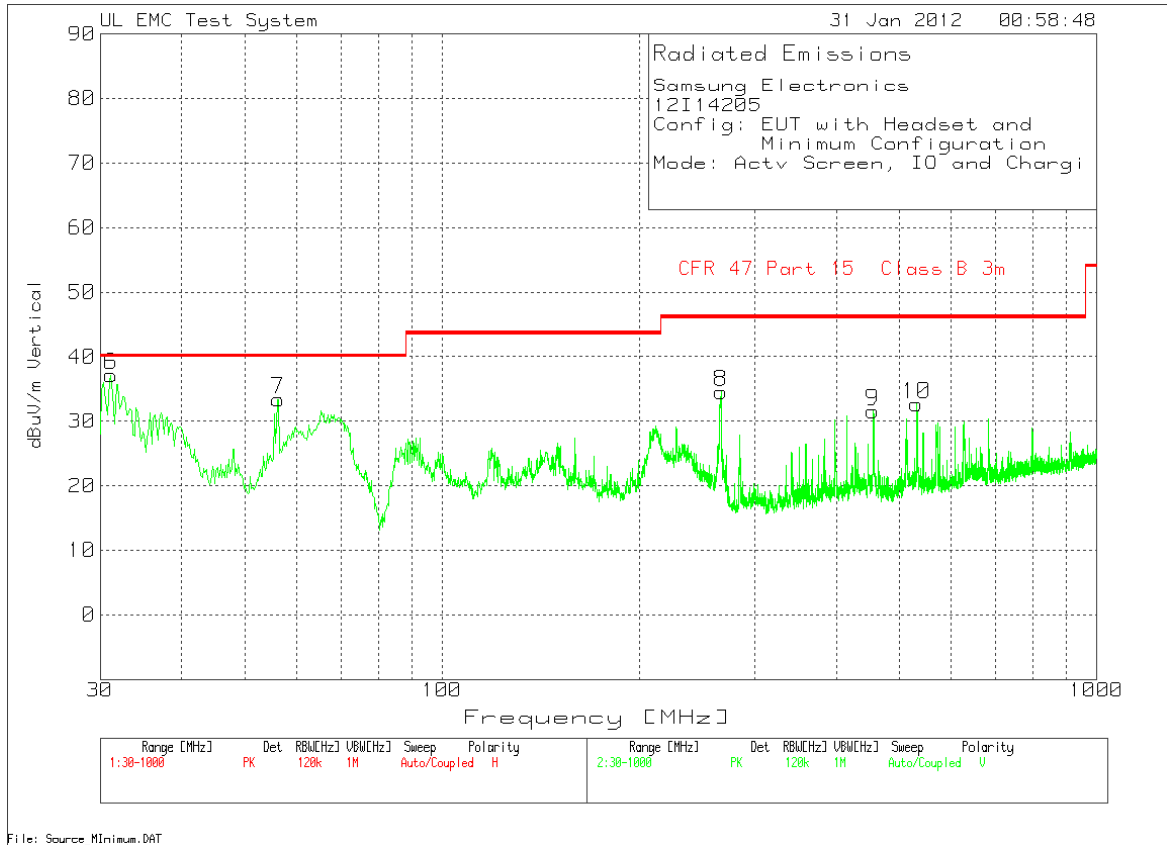

HORIZONTAL AND VERTICAL DATA

Samsung Electronics
 12I14205
 Configuration 3: EUT with Headset and minimum configuration
 Mode: Active Screen, I/O and Charging

Test Frequency	Meter Reading	Detector	Amp [dB]	T130 Bilog [dB]	Corrected dBuV/m	Class B 3m limit	QP Margin	Height [cm]	Polarity
30.9692	36.07	PK	-29.3	19.9	26.67	40	-13.33	300	Horz
90.2858	52.3	PK	-28.7	7.6	31.2	43.5	-12.3	200	Horz
212.6019	50.01	PK	-27.5	11.9	34.41	43.5	-9.09	200	Horz
265.5216	51.57	PK	-27	12.3	36.87	46	-9.13	100	Horz
383.3793	45.39	PK	-26.8	14.7	33.29	46	-12.71	100	Horz
31.1631	46.65	PK	-29.3	19.8	37.15	40	-2.85	100	Vert
31.1631	40.91	PK	-29.3	19.8	31.41	40	-8.59	100	Vert
56.1691	54.5	PK	-29	7.9	33.4	40	-6.6	100	Vert
266.6847	49.25	PK	-27	12.3	34.55	46	-11.45	200	Vert
455.1019	42.58	PK	-27	16	31.58	46	-14.42	100	Vert
530.8953	42.26	PK	-26.8	17.2	32.66	46	-13.34	200	Vert

PK - Peak detector
 QP - Quasi-Peak detector

RADIATED EMISSIONS ABOVE 1000 MHz – WORST-CASE

CONFIGURATION 3:

HORIZONTAL AND VERTICAL DATA

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber-B

Company: SAMSUNG ELECTRONICS
Project #: 12I14205
Date: 1/31/2012
Test Engineer: MENGISTU MEKURIA
Configuration: EUT WITH HEADSET AND LAPTOP
Mode: ACTIVE MONITOR AND AUDIO WHILE IN CHARGING MODE

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC Class B

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.024	3.0	49.6	40.5	24.7	2.6	-38.8	0.0	0.0	38.2	29.1	74	54	-35.8	-24.9	V
1.196	3.0	54.7	32.9	25.4	2.9	-38.5	0.0	0.0	44.3	22.5	74	54	-29.7	-31.5	V
1.348	3.0	57.2	32.6	26.0	3.0	-38.3	0.0	0.0	47.9	23.3	74	54	-26.1	-30.7	V
1.596	3.0	61.0	35.2	26.9	3.3	-38.0	0.0	0.0	53.2	27.4	74	54	-20.8	-26.6	V
2.132	3.0	52.3	33.9	28.5	3.9	-37.3	0.0	0.0	47.5	29.0	74	54	-26.5	-25.0	V
1.432	3.0	55.7	32.2	26.3	3.1	-38.2	0.0	0.0	46.8	23.4	74	54	-27.2	-30.6	H
1.572	3.0	51.8	31.2	26.8	3.3	-38.1	0.0	0.0	43.8	23.2	74	54	-30.2	-30.8	H
1.600	3.0	58.9	32.1	26.9	3.3	-38.0	0.0	0.0	51.1	24.3	74	54	-22.9	-29.7	H
2.132	3.0	51.1	32.7	28.5	3.9	-37.3	0.0	0.0	46.3	27.8	74	54	-27.7	-26.2	H

Rev. 07.08.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

RESULTS – CONFIGURATION 2


6 WORST EMISSIONS

Samsung Electronics									
Proj. #: 12I14205									
Configuration 2: EUT With AC adapter.									
Mode: Active Screen and Charging									
Test Frequency	Meter Reading	Detector	T24 LISN [dB]	Cables [dB]	Corrected dBuV	Class B QP limit	QP Margin	Class B Av limit	Margin
Line-L1 .15 - 30MHz									
0.5055	49.02	PK	0.1	0	49.12	56	-6.88	-	-
0.5055	32.01	Av	0.1	0	32.11	-	-	46	-13.89
0.636	44.46	PK	0.1	0	44.56	56	-11.44	-	-
0.636	28.26	Av	0.1	0	28.36	-	-	46	-17.64
1.1805	44.34	PK	0.1	0.1	44.54	56	-11.46	-	-
1.1805	26.6	Av	0.1	0.1	26.8	-	-	46	-19.2
Line-L2 .15 - 30MHz									
0.51	47.74	PK	0.1	0	47.84	56	-8.16	-	-
0.51	25	Av	0.1	0	25.1	-	-	46	-20.9
1.1715	43.7	PK	0.1	0.1	43.9	56	-12.1	-	-
1.1715	19.92	Av	0.1	0.1	20.12	-	-	46	-25.88
6.486	46.84	PK	0.1	0.1	47.04	60	-12.96	-	-
6.486	24.51	Av	0.1	0.1	24.71	-	-	50	-25.29
PK - Peak detector									
QP - Quasi-Peak detector									
Av - Average detector									

LINE 1 RESULTS

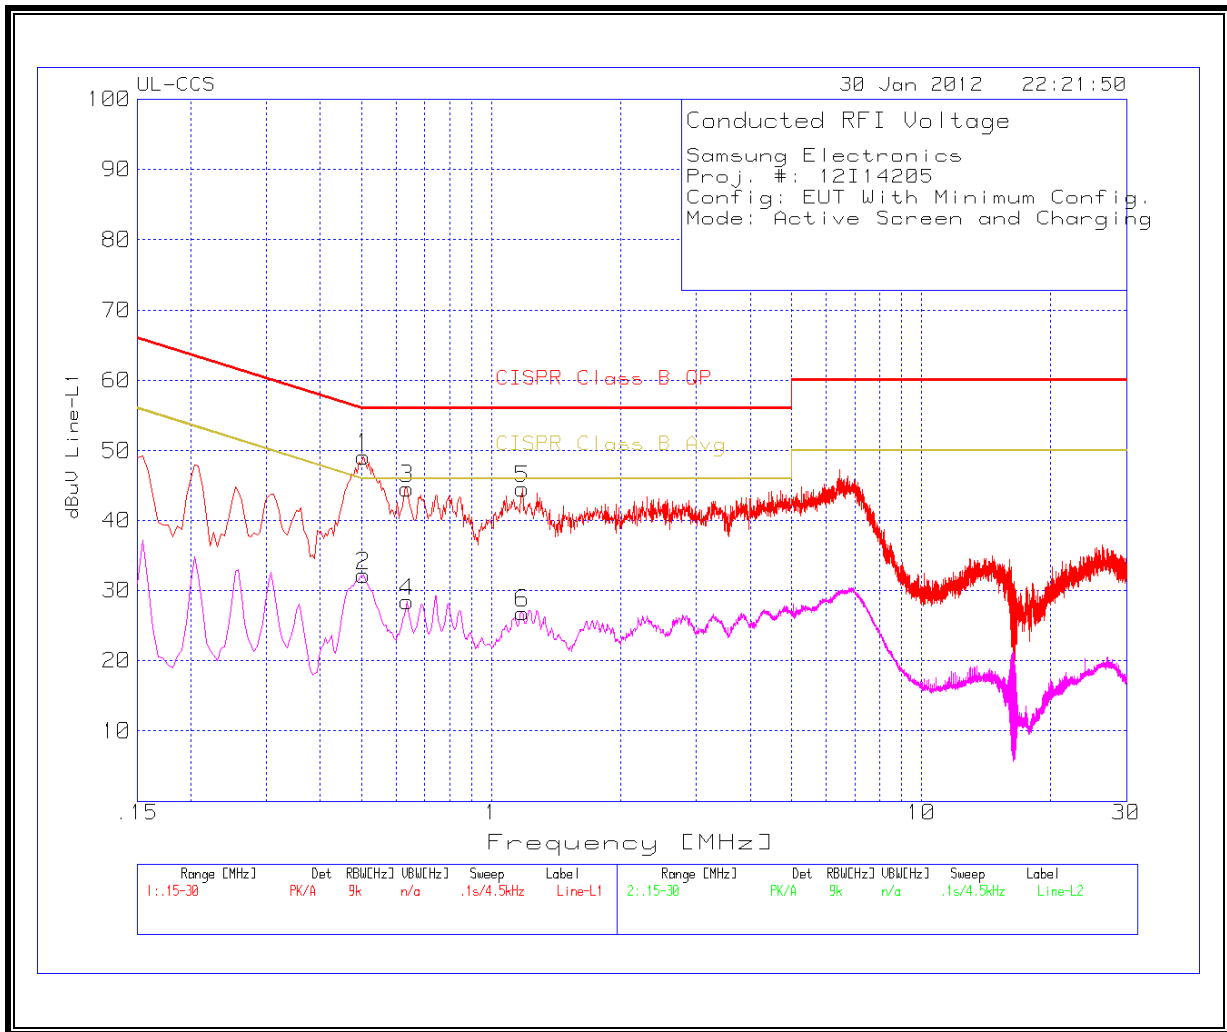

LINE 2 RESULTS

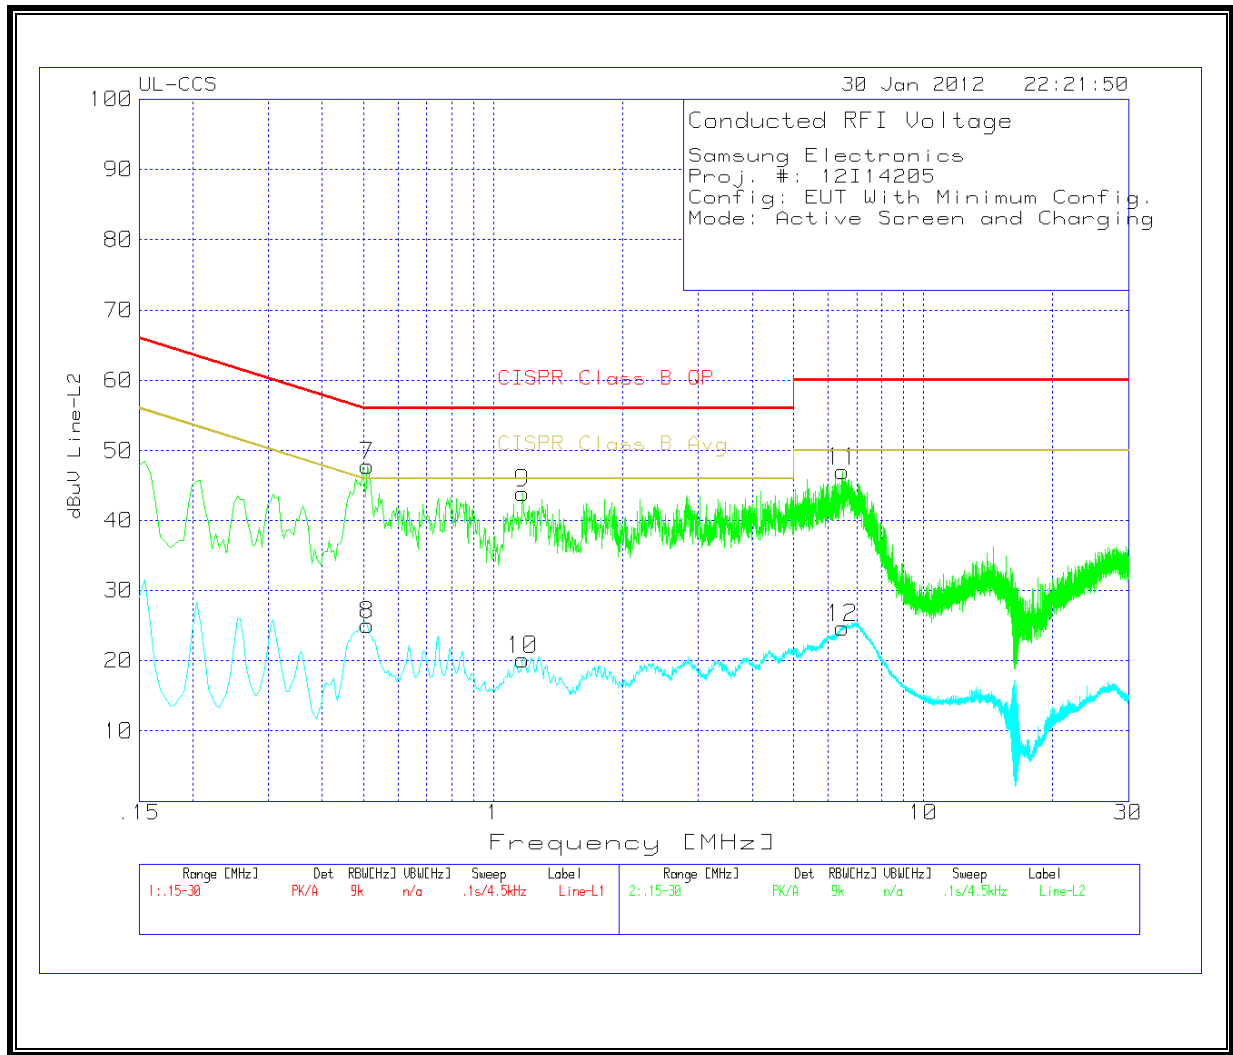


RESULTS – CONFIGURATION 3

6 WORST EMISSIONS

Samsung Electronics									
Proj. #: 12I14205									
Configuration 3: EUT With Minimum Config.									
Mode: Active Screen and I/O Ports and charging									
Test Frequency	Meter Reading	Detector	T24 LISN [dB]	Cables [dB]	Corrected dBuV	Class B QP limit	QP Margin	Class B Av limit	Av Margin
Line-L1 .15 - 30MHz									
0.177	57.51	PK	0.1	0	57.61	64.6	-6.99	-	-
0.177	32.86	Av	0.1	0	32.96	-	-	54.6	-21.64
0.249	47.29	PK	0.1	0	47.39	61.8	-14.41	-	-
0.249	26.92	Av	0.1	0	27.02	-	-	51.8	-24.78
4.8705	43.8	PK	0.1	0.1	44	56	-12	-	-
4.8705	30.61	Av	0.1	0.1	30.81	-	-	46	-15.19
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	IL L2.TXT [dB]	Cables 2&3.TX [dB]	dBuV	PR Class B	Margin	PR Class B	Margin
0.1815	54.39	PK	0.1	0	54.49	64.4	-9.91	-	-
0.1815	31.26	Av	0.1	0	31.36	-	-	54.4	-23.04
0.744	39.93	PK	0.1	0	40.03	56	-15.97	-	-
0.744	35.29	Av	0.1	0	35.39	-	-	46	-10.61
4.7715	42.5	PK	0.1	0.1	42.7	56	-13.3	-	-
4.7715	31.91	Av	0.1	0.1	32.11	-	-	46	-13.89
PK - Peak detector									
QP - Quasi-Peak detector									
Av - Average detector									

LINE 1 RESULTS

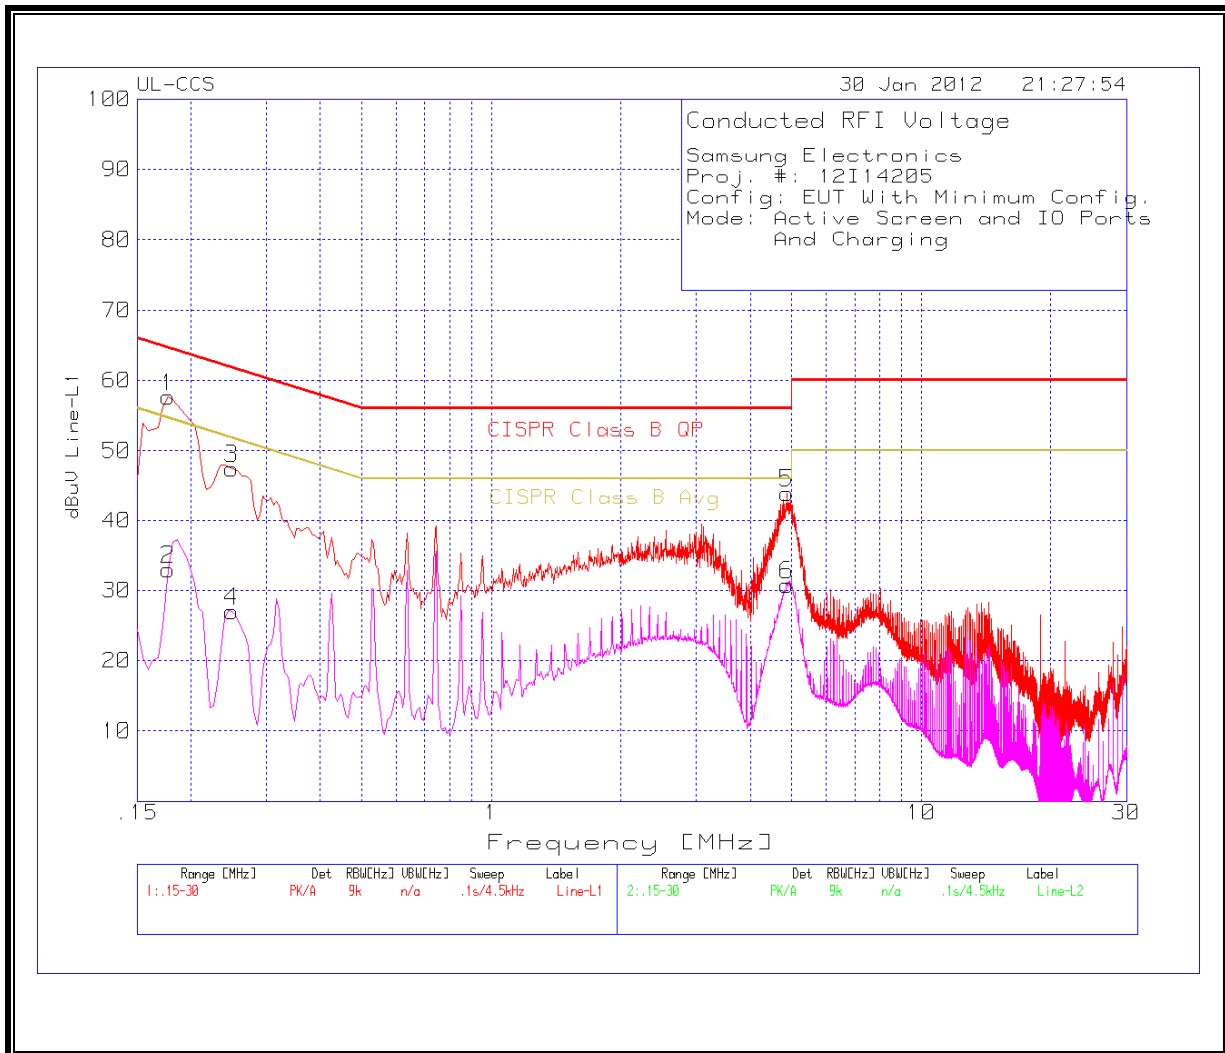

LINE 2 RESULTS

