



Test report No. : 32BE0278-HO-R-R4
Page : 1 of 184
FCC ID : A3LGTP6200L
Issued date : October 18, 2011
Revised date : November 18, 2011

SAR TEST REPORT

Test Report No. : 32BE0278-HO-R-R4

Applicant : SAMSUNG ELECTRONICS CO., LTD.
Type of Equipment : Cellular/PCS GSM/GPRS/EDGE, Cellular /PCS WCDMA
Tablet with 802.11abgn, BT3.0
Model No. : GT-P6200L
FCC ID : A3LGTP6200L
Test regulation : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C (Edition 01-01)
Test Result : **Complied**
FCC Part 15.247 Head : 0.073W/kg (5.8GHz)
Body : 0.890W/kg (2.4GHz)
FCC Part 15.407 Head : 0.048W/kg (5.6GHz)
Body: : 0.678W/kg (5.6GHz)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 32BE0278-HO-R. 32BE0278-HO-R is replaced with this report.

Date of test: October 2 to November 6, 2011

**Representative
test engineer:**

Miyō Kishimoto
Engineer of WiSE Japan,
UL Verification Service

Approved by :

Mitsuru Fujimura
Leader of WiSE Japan
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13-EM-F0429

SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
2.1 Identification of E.U.T.	3
2.2 Product description	4
SECTION 3 : Test standard information	6
3.1 Test Specification	6
3.2 Procedure	6
3.3 Exposure limit	7
3.4 Test Location	7
SECTION 4 : Test result	8
4.1 Stand-alone SAR result.....	8
4.2 Simultaneous transmission SAR result.....	8
SECTION 5 : Description of the operating mode	10
5.1 Output power operating modes.....	10
5.2 SAR testing operating modes	11
5.3 Confirmation before SAR testing	24
5.4 Confirmation after SAR testing	24
SECTION 6 : Description of the Head/Body setup	25
6.1 Specification of sensor.....	25
6.2 Power reduction implementation	25
6.3 Test position for Head setup	26
6.4 Description of the Body setup	28
SECTION 7 : Test surrounding	30
7.1 Measurement uncertainty	30
SECTION 8 : Measurement results	32
8.1 WLAN 2.4G HEAD SAR.....	32
8.2 WLAN 5G HEAD SAR.....	33
8.3 Simultaneous transmission evaluation for HEAD	35
8.4 WLAN Body SAR (2.4G)	36
8.5 WLAN Body SAR (5G)	37
8.6 Simultaneous transmission evaluation for BODY	40
SECTION 9 Test instruments	43
APPENDIX 1 : SAR Measurement data	44
1. Evaluation procedure	44
2. Measurement data	45
APPENDIX 2 : System Validation	96
1. Validation uncertainty.....	96
2. System validation result 2450MHz.....	97
3. System Validation Dipole (D2450V2,S/N:713).....	100
4. System validation result 5GHz	111
5. System Validation Dipole (D5GHzV2,S/N:1020)	121
APPENDIX 3 : System specifications	134
1. Configuration and peripherals.....	134
2. Specifications.....	135
3. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507).....	139
4. Dosimetric E-Field Probe Calibration (EX3DV4, S/N: 3679).....	150
5. Dosimetric E-Field Probe Calibration (EX3DV4, S/N: 3540).....	161
APPENDIX 4: Photographs of test setup	172
1. Photographs of EUT	172
2. Antenna position	173
3. Photographs of setup.....	174

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 1: Customer information

Company Name	SAMSUNG ELECTRONICS CO., LTD.
Address	416, MAETAN 3-DONG, YEONGTONG-GU SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

SECTION 2: Equipment under test (E.U.T.)**2.1 Identification of E.U.T.**

Type of EUT	Cellular/PCS GSM/GPRS/EDGE, Cellular/PCS WCDMA Tablet with 802.11abgn, BT3.0
Model No.	GT-P6200L
Serial No.	358877/04/000460/7
Rating	DC 4.0V
Option Battery	N/A
Receipt Date of Sample	September 27, 2011
Modification of EUT	No Modification by the test lab
Device category	Portable
Antenna to antenna separation distance	108.2mm from WWAN antenna to WLAN antenna 57.35mm from WWAN antenna to BT antenna 138mm from WLAN antenna to Bluetooth antenna
Simultaneous transmission	WWAN can transmit simultaneously with WLAN WWAN can transmit simultaneously with Bluetooth WLAN can transmit simultaneously with Bluetooth
Size of EUT	19.36cm x 12.235cm (Diagonal dimension :22cm)

UL Japan, Inc.
Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2.2 Product description**Radio Specification****Bluetooth**

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Type of Modulation	FHSS
Bandwidth & Channel spacing	1MHz & 1MHz
Antenna Type	PIFA
Antenna Gain	-0.63 dBi

WLAN (IEEE802.11a/b/g/n-20)

Equipment Type	Transceiver	
Frequency of Operation	2412-2462MHz	5180-5240MHz 5260-5320MHz 5500-5700MHz 5745-5825MHz
Type of Modulation	DSSS, OFDM	OFDM
Bandwidth & Channel spacing	20MHz & 5MHz	20MHz & 20MHz
Antenna Type	SEMI-PIFA	
Antenna Gain	2.4G: -2.85dBi	5G: -4.15dBi

WLAN (IEEE802.11n-40)

Equipment Type	Transceiver
Frequency of Operation	5190-5230MHz 5270-5310MHz 5510-5670MHz 5755-5795MHz
Type of Modulation	OFDM
Bandwidth & Channel spacing	40MHz & 40MHz
Antenna Type	SEMI-PIFA
Antenna Gain	-4.15dBi

UL Japan, Inc.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

GSM

Equipment Type	Transceiver
Frequency of Operation	[Up Link] GSM850: 824 – 849MHz PCS: 1850 – 1910MHz [Down Link] GSM850: 869 – 894MHz PCS: 1930 – 1990MHz
Type of Modulation	GMSK , 8PSK
Antenna Type	PIFA
Antenna Gain	GSM850: -5.86dBi PCS: -4.02dBi

W-CDMA

Equipment Type	Transceiver
Frequency of Operation	[Up Link] Band V: 824 – 849MHz Band II: 1850 – 1910MHz [Down Link] Band V: 869 – 894MHz Band II: 1930 – 1990MHz
Type of Modulation	QPSK
Antenna Type	PIFA
Antenna Gain	Band V: -5.86dBi Band II: -4.02dBi

UL Japan, Inc.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Test standard information

3.1 Test Specification

Title : **Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01):**

Supplement C (Edition 01-01) - Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions
OET Bulletin 65 (Edition 97-01) - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields

: **IEEE Std 1528-2003:**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Supplement C

In additions;

KDB447498D01(v04): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB648474D01: SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas

KDB941225D01(v02): SAR Measurement Procedures for 3G Devices

KDB941225D02(v02v01): 3GPP R6 HSPA and R7 HSPA+ SAR Guidance

KDB941225D03(v01): Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE

KDB941225D04(v01): Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode

KDB248227(rev.1.2): SAR Measurement Procedures for 802.11a/b/g Transmitters

KDB865664: SAR Measurement Requirements for 3 to 6 GHz

<Reference>

KDB94122506(v01): SAR test procedures for devices incorporating SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities (Hot Spot SAR)

Reference

[1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.

[2]SPEAG uncertainty document (AN 15-7/AN19-17) for DASY 5 System from SPEAG (Shimid & Partner Engineering AG).

3.2 Procedure

Transmitter	WWAN	WLAN	Bluetooth
Test Procedure	FCC OET BULLETIN 65, SUPPLEMENT C	FCC OET BULLETIN 65, SUPPLEMENT C	Exemption (Power < 12mW)
	SAR	SAR	
Category	FCC47CFR 2.1093	FCC47CFR 2.1093	FCC47CFR 2.1093
Note: UL Japan, Inc. 's SAR Work Procedures 13-EM-W0429 and 13-EM-W0430			

Bluetooth mode is excluded from SAR test since power was $1/2 * 60/f_{[GHz]}[mW]$.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3.3 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg
--

3.4 Test Location

*Shielded room for SAR testings

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 4 : Test result**4.1 Stand-alone SAR result**

No.	Capable Tx configurations		Head SAR	Body SAR	Hot Spot SAR* ¹	Note
1	WWAN	GSM/GPRS/EGPRS 850 MHz	Yes	Yes	Reference only	withVOIP
2		GSM/GPRS/EGPRS 1900 MHz	Yes	Yes	Reference only	withVOIP
3		WCDMA/HSPA Band V	Yes	Yes	Reference only	withVOIP
4		WCDMA/HSPA Band II	Yes	Yes	Reference only	withVOIP
5	WLAN	WLAN 2.4G	Yes	Yes	Reference only	withVOIP
6		WLAN 5G	Yes	Yes	-	withVOIP
7	Bluetooth	Bluetooth BDR/EDR	Exemption	Exemption	-	-

Note*¹: *Hotspot DATA;(body SAR with a 10mm separation from the front of the device to the phantom) is not required because the diagonal dimension of EUT exceeds 20cm. and has not been considered for FCC equipment certification It is provided for reference purposes only.*

Mode	1g Head SAR [W/kg]	1g BodySAR [W/kg]
GSM850	0.491	0.746
PCS1900	0.519	0.986
W-CDMA Band V	0.432	0.767
W-CDMA Band II	0.614	1.09
WLAN 11b/g/n(2.4G)	0.057	0.890
WLAN 11a/n(5G) 15.247	0.073	0.660
WLAN 11a/n(5G) 15.407	0.048	0.678
Bluetooth	Exemption	Exemption

4.2 Simultaneous transmission SAR result**<Simultaneous Procedure>**

This EUT has the unlicensed transmitter such as WLAN (802.11b/g/n) & Bluetooth devices besides licensed transmitter WWAN (GSM/WCDMA), and the following simultaneous transmission is possible.

No.	Capable Tx configurations		Head SAR	Body SAR	Hot Spot SAR* ²	Note
8	WWAN+WLAN	GSM + WLAN2.4G	Yes	Yes	-	-
9		GPRS/EGPRS + WLAN2.4G	Yes	Yes	Exemption	-
10		WCDMA/HSPA + WLAN2.4G	Yes	Yes	Exemption	-
11		GSM + WLAN 5G	Yes	Yes	-	-
12		GPRS/EGPRS + WLAN 5G	Yes	Yes	-	-
13		WCDMA/HSPA + WLAN 5G	Yes	Yes	-	-
14	WWAN+Bluetooth		Exemption	Exemption	-	-
15	WLAN+Bluetooth		Exemption	Exemption	-	-

Note*²: *Hotspot DATA;(body SAR with a 10mm separation from the front of the device to the phantom) is not required because the diagonal dimension of EUT exceeds 20cm. and has not been considered for FCC equipment certification It is provided for reference purposes only.*

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

<WWAN + WLAN >

Simultaneous transmitter evaluation based on the KDB648474. Refer to the Section 8.

Step1	WWAN antenna is >5cm from Wireless LAN antenna	
Step2	WLAN power > 2Pref (=60/f _[GHz]).	
Step3	Stand-alone SAR for WLAN	
Step4	Simultaneous transmission is possible (WWAN + WLAN)	
Step5	$\Sigma 1g$ SAR (WWAN + WLAN) < 1.6W/kg	$\Sigma 1g$ SAR(WWAN + WLAN) >1.6W/kg Max. SAR Measured (WWAN + WLAN) :1.657 W/kg
Step6	No simultaneous transmission.	Antenna pair SAR to peak SAR separation ratio<0.3 $\Sigma 1g$ SAR(WWAN + WLAN) / 13.06 cm : 0.127
Step7	No simultaneous transmission SAR	

<WWAN + Bluetooth >

Simultaneous transmitter evaluation based on the KDB648474.

Step1	WWAN antenna is >5cm from Bluetooth antenna	
Step2	Bluetooth power < 2Pref (=60/f _[GHz]). Refer to the FCC 15.247 test report	
Step3	No stand-alone SAR for Bluetooth	
Step4	No simultaneous transmission SAR	

<WLAN + Bluetooth >

Simultaneous transmitter evaluation based on the KDB648474.

Step1	WLAN antenna is >5cm from Bluetooth antenna	
Step2	Bluetooth power < 2Pref (=60/f _[GHz]). Refer to the FCC 15.247 test report	
Step3	No stand-alone SAR for Bluetooth	
Step4	No simultaneous transmission SAR	

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 5 : Description of the operating mode

5.1 Output power operating modes

Mode	Duty cycle	Frequency Band	Test Frequency	Modulation
IEEE802.11b	100%	2412-2462MHz	2412MHz (1ch) 2437MHz(6ch) 2462MHz(11ch)	DSSS (DBPSK.DQPSK.CCK)
IEEE802.11g	100%	2412-2462MHz	2412MHz (1ch) 2437MHz(6ch) 2462MHz(11ch)	OFDM (BPSK.QPSK.16QAM,64QAM)
IEEE802.11n20 (2.4G)	100%	2412-2462MHz	2412MHz (1ch) 2437MHz(6ch) 2462MHz(11ch)	
IEEE802.11a	100%	5180-5240MHz	All channel	
	100%	5260-5320MHz	All channel	
	100%	5500-5700MHz	All channel	
	100%	5745-5825MHz	All channel	
IEEE802.11n20 (5G)	100%	5180-5240MHz	All channel	
	100%	5260-5320MHz	All channel	
	100%	5500-5700MHz	All channel	
	100%	5745-5825MHz	All channel	
IEEE802.11n40 (5G)	100%	5190-5230MHz	All channel	
	100%	5270-5310MHz	All channel	
	100%	5510-5670MHz	All channel	
	100%	5755-5795MHz	All channel	
WLAN				
<p>*Power of the EUT was set by the software as follows; Software name & version: HW Rev 1.0, SW: P6200.010 [Power Setting] 11a: 9dBm 11b: 14dBm 11g: 14dBm 11n-20(2.4GHz): 13dBm 11n-20(5GHz): 9dBm 11n-40(5GHz): 9dBm</p> <p>*The above setting of the software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>				

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5.2 SAR testing operating modes

Decision of SAR test channel

The operating mode for SAR testing was decided by the output power

The average output power for 802.11a was measured on all channels in each frequency band.

Mode	GHz	Channel	"Default Test Channel"				
			FCC 15.247		UNII		
			802.11b	802.11g			
802.11 b/g/n20	2.412	1	√	Δ			
	2.437	6	√	Δ			
	2.462	11	√	Δ			
802.11a/n20	UNII	5.18	36			√	
		5.20	40				*
		5.22	44				*
		5.24	48			√	
		5.26	52			√	
		5.28	56				*
		5.30	60				*
		5.32	64			√	
		5.50	100				*
		5.52	104			√	
		5.54	108				*
		5.56	112				*
		5.58	116			√	
		5.60	120				*
	5.62	124			√		
	5.64	128				*	
	5.66	132				*	
	5.68	136			√		
	5.70	140				*	
	UNII or FCC 15.247	5.745	149	√		√	
		5.765	153		*		*
5.785		157	√			*	
5.805		161		*	√		
FCC 15.247	5.825	165	√				
802.11n40	UNII	5.19	38			√	
		5.23	46			√	
		5.27	54			√	
		5.31	62			√	
		5.51	102			√	
		5.55	110			√	
		5.59	118				*
	5.63	126			√		
	5.67	134			√		
	UNII or FCC 15.247	5.755	151	√		√	
FCC 15.247		5.795	159	√		√	

√ = "default test channels"

* = Possible 802.11a channels with maximum average output > the "default test channels"

Δ = Possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

1) WLAN (11b/g/n(2.4G))

1. The 11b mode was maximum average power. The 11g/n SAR is not required for other mode because the maximum average output power for other mode is less than 1/4dB higher than that measured 11b mode.
2. The data rate SAR for highest power is not required because the average output power for higher data rate is less than 1/4dB higher than that measured the lowest data rate mode.
3. The other channels are measured if the SAR result at max. AVG power channel will be above 0.8W/kg

[IEEE802.11b] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
1.0	2437	4.74	2.14	0.50	10.01	15.25	12.65	33.50	18.41
2.0	2437	4.62	2.02	0.50	10.01	15.13	12.53	32.58	17.91
5.5	2437	4.69	2.03	0.50	10.01	15.20	12.54	33.11	17.95
11.0	2437	4.61	1.97	0.50	10.01	15.12	12.48	32.51	17.70

:Worst data rate

IEEE802.11b 1Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
1	2412	5.14	2.65	0.50	10.01	15.65	13.16	36.73	20.70
6	2437	4.74	2.14	0.50	10.01	15.25	12.65	33.50	18.41
11	2462	4.90	2.33	0.50	10.01	15.41	12.84	34.75	19.23

:SAR test channel

[IEEE802.11g] Rate Check

Rate [Mbps]	Frequency [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
6.0	2437	12.30	1.80	0.50	10.01	22.81	12.31	190.99	17.02
9.0	2437	11.60	1.66	0.50	10.01	22.11	12.17	162.55	16.48
12.0	2437	11.83	1.52	0.50	10.01	22.34	12.03	171.40	15.96
18.0	2437	11.09	1.65	0.50	10.01	21.60	12.16	144.54	16.44
24.0	2437	12.37	1.78	0.50	10.01	22.88	12.29	194.09	16.94
36.0	2437	12.12	1.61	0.50	10.01	22.63	12.12	183.23	16.29
48.0	2437	12.22	1.68	0.50	10.01	22.73	12.19	187.50	16.56
54.0	2437	12.15	1.60	0.50	10.01	22.66	12.11	184.50	16.26

:Worst data rate

IEEE802.11g 6Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
1	2412	12.13	2.01	0.50	10.01	22.64	12.52	183.65	17.86
6	2437	12.30	1.80	0.50	10.01	22.81	12.31	190.99	17.02
11	2462	12.63	1.99	0.50	10.01	23.14	12.50	206.06	17.78

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

[IEEE802.11n-20] Rate Check

Rate	Frequency [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
						PK	AVG	PK	AVG
MCS0	2437	11.31	1.21	0.50	10.01	21.82	11.72	152.05	14.86
MCS1	2437	11.09	1.16	0.50	10.01	21.60	11.67	144.54	14.69
MCS2	2437	11.77	1.13	0.50	10.01	22.28	11.64	169.04	14.59
MCS3	2437	11.75	1.11	0.50	10.01	22.26	11.62	168.27	14.52
MCS4	2437	11.71	1.02	0.50	10.01	22.22	11.53	166.72	14.22
MCS5	2437	11.25	0.87	0.50	10.01	21.76	11.38	149.97	13.74
MCS6	2437	12.36	0.88	0.50	10.01	22.87	11.39	193.64	13.77
MCS7	2437	11.42	0.87	0.50	10.01	21.93	11.38	155.96	13.74

:Worst data rate

IEEE802.11n-20 MCS0

Ch	Frequency [MHz]	P/M Reading [dBm]		Cable Loss [dB]	Atten. [dB]	Result			
		PK	AVG			[dBm]		[mW]	
						PK	AVG	PK	AVG
1	2412	11.99	1.55	0.50	10.01	22.50	12.06	177.83	16.07
6	2437	11.31	1.21	0.50	10.01	21.82	11.72	152.05	14.86
11	2462	11.97	1.54	0.50	10.01	22.48	12.05	177.01	16.03

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2) WLAN (11a/n(5180-5240MHz):

1. The 11n SAR is not required for other mode because the maximum average output power for other mode is less than 1/4dB higher than that measured 11a mode.
2. The data rate SAR for highest power and the lowest data rate are required.
3. The other channels are measured if the SAR result at max. AVG power channel will be above 0.8W/kg.

[IEEE802.11a 5180-5240MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
6.0	5240	-1.20	1.00	10.05	9.85	9.66
9.0	5240	-1.21	1.00	10.05	9.84	9.64
12.0	5240	-1.24	1.00	10.05	9.81	9.57
18.0	5240	-1.27	1.00	10.05	9.78	9.51
24.0	5240	-0.89	1.00	10.05	10.16	10.38
36.0	5240	-1.08	1.00	10.05	9.97	9.93
48.0	5240	-1.09	1.00	10.05	9.96	9.91
54.0	5240	-1.11	1.00	10.05	9.94	9.86

IEEE802.11a 5180-5240MHz band 24Mbps

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
36	5180	-1.05	1.00	10.05	10.00	10.00
40	5200	-1.22	1.00	10.05	9.83	9.62
44	5220	-0.99	1.00	10.05	10.06	10.14
48	5240	-0.89	1.00	10.05	10.16	10.38

Sample Calculation: Result = Reading + Cable Loss + Attenuator

: Worst data rate

: SAR test channel

[IEEE802.11n-20 5180-5240MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5240	-1.36	1.00	10.05	9.69	9.31
MCS1	5240	-1.42	1.00	10.05	9.63	9.18
MCS2	5240	-1.44	1.00	10.05	9.61	9.14
MCS3	5240	-1.03	1.00	10.05	10.02	10.05
MCS4	5240	-1.06	1.00	10.05	9.99	9.98
MCS5	5240	-1.18	1.00	10.05	9.87	9.71
MCS6	5240	-1.14	1.00	10.05	9.91	9.79
MCS7	5240	-1.19	1.00	10.05	9.86	9.68

MCS3 : Worst data rate

IEEE802.11n-20 5180-5240MHz band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
36	5180	-1.05	1.00	10.05	10.00	10.00
40	5200	-0.74	1.00	10.05	10.31	10.74
44	5220	-0.77	1.00	10.05	10.28	10.67
48	5240	-1.03	1.00	10.05	10.02	10.05

[IEEE802.11n-40 5190-5230MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5230	-0.86	1.00	10.05	10.19	10.45
MCS1	5230	-0.87	1.00	10.05	10.18	10.42
MCS2	5230	-0.96	1.00	10.05	10.09	10.21
MCS3	5230	-0.81	1.00	10.05	10.24	10.57
MCS4	5230	-0.81	1.00	10.05	10.24	10.57
MCS5	5230	-0.82	1.00	10.05	10.23	10.54
MCS6	5230	-0.75	1.00	10.05	10.30	10.72
MCS7	5230	-0.83	1.00	10.05	10.22	10.52

MCS3 : Worst data rate

IEEE802.11n-40 5190-5230MHz band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
38	5190	-1.17	1.00	10.05	9.88	9.73
46	5230	-0.81	1.00	10.05	10.24	10.57

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3) WLAN (11a/n(5260-5320MHz):

1. The 11n SAR is not required for other mode because the maximum average output power for other mode is less than 1/4dB higher than that measured 11a mode.
2. The data rate SAR for highest power and the lowest data rate are required.
3. The other channels are measured if the SAR result at max. AVG power channel will be above 0.8W/kg.

[IEEE802.11a 5260-5320MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
6.0	5280	-1.21	1.00	10.05	9.84	9.64
9.0	5280	-1.27	1.00	10.05	9.78	9.51
12.0	5280	-1.29	1.00	10.05	9.76	9.46
18.0	5280	-1.34	1.00	10.05	9.71	9.35
24.0	5280	-0.96	1.00	10.05	10.09	10.21
36.0	5280	-1.10	1.00	10.05	9.95	9.89
48.0	5280	-1.22	1.00	10.05	9.83	9.62
54.0	5280	-1.27	1.00	10.05	9.78	9.51

IEEE802.11a 5260-5320MHz band 24Mbps

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
52	5260	-1.37	1.00	10.05	9.68	9.29
56	5280	-0.96	1.00	10.05	10.09	10.21
60	5300	-1.74	1.00	10.05	9.31	8.53
64	5320	-1.70	1.00	10.05	9.35	8.61

Sample Calculation: Result = Reading + Cable Loss + Attenuator

: Worst data rate

: SAR test channel

[IEEE802.11n-20 5260-5320MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5280	-1.54	1.00	10.05	9.51	8.93
MCS1	5280	-1.64	1.00	10.05	9.41	8.73
MCS2	5280	-1.66	1.00	10.05	9.39	8.69
MCS3	5280	-1.07	1.00	10.05	9.98	9.95
MCS4	5280	-1.26	1.00	10.05	9.79	9.53
MCS5	5280	-1.37	1.00	10.05	9.68	9.29
MCS6	5280	-1.34	1.00	10.05	9.71	9.35
MCS7	5280	-1.44	1.00	10.05	9.61	9.14

: Worst data rate

IEEE802.11n-20 5260-5320MHz band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
52	5260	-1.28	1.00	10.05	9.77	9.48
56	5280	-1.07	1.00	10.05	9.98	9.95
60	5300	-1.42	1.00	10.05	9.63	9.18
64	5320	-1.67	1.00	10.05	9.38	8.67

[IEEE802.11n-40 5270-5310MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5270	-0.91	1.00	10.05	10.14	10.33
MCS1	5270	-1.14	1.00	10.05	9.91	9.79
MCS2	5270	-1.22	1.00	10.05	9.83	9.62
MCS3	5270	-0.75	1.00	10.05	10.30	10.72
MCS4	5270	-0.91	1.00	10.05	10.14	10.33
MCS5	5270	-1.03	1.00	10.05	10.02	10.05
MCS6	5270	-1.12	1.00	10.05	9.93	9.84
MCS7	5270	-1.22	1.00	10.05	9.83	9.62

: Worst data rate

IEEE802.11n-40 5270-5310MHz band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
54	5270	-0.75	1.00	10.05	10.30	10.72
62	5310	-0.88	1.00	10.05	10.17	10.40

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4) WLAN (11a/n(5500-5700MHz):

1. The 11n20 mode was maximum average power. T

2. The data rate SAR for highest power and the lowest data rate are required.

3. The other channels are measured if the SAR result at max. AVG power channel will be above 0.4W/kg

[IEEE802.11a 5500-5700MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
6.0	5580	-2.76	1.00	10.06	8.30	6.76
9.0	5580	-2.97	1.00	10.06	8.09	6.44
12.0	5580	-2.96	1.00	10.06	8.10	6.46
18.0	5580	-2.78	1.00	10.06	8.28	6.73
24.0	5580	-2.67	1.00	10.06	8.39	6.90
36.0	5580	-3.16	1.00	10.06	7.90	6.17
48.0	5580	-2.81	1.00	10.06	8.25	6.68
54.0	5580	-2.93	1.00	10.06	8.13	6.50

24.0 : Worst data rate

[IEEE802.11a 5500-5700MHz band] band 24Mbps

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
100	5500	-3.43	1.00	10.06	7.63	5.79
104	5520	-3.09	1.00	10.06	7.97	6.27
108	5540	-2.78	1.00	10.06	8.28	6.73
112	5560	-3.11	1.00	10.06	7.95	6.24
116	5580	-2.67	1.00	10.06	8.39	6.90
120	5600	-2.36	1.00	10.06	8.70	7.41
124	5620	-2.29	1.00	10.06	8.77	7.53
128	5640	-2.18	1.00	10.06	8.88	7.73
132	5660	-2.16	1.00	10.06	8.90	7.76
136	5680	-2.14	1.00	10.06	8.92	7.80
140	5700	-2.29	1.00	10.06	8.77	7.53

Sample Calculation: Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

[IEEE802.11n-20 5500-5700MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5600	-2.87	1.00	10.06	8.19	6.59
MCS1	5600	-2.98	1.00	10.06	8.08	6.43
MCS2	5600	-2.93	1.00	10.06	8.13	6.50
MCS3	5600	-2.16	1.00	10.06	8.90	7.76
MCS4	5600	-2.20	1.00	10.06	8.86	7.69
MCS5	5600	-2.32	1.00	10.06	8.74	7.48
MCS6	5600	-2.29	1.00	10.06	8.77	7.53
MCS7	5600	-2.42	1.00	10.06	8.64	7.31

: Worst data rate

[IEEE802.11n-20 5500-5700MHz band] band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
100	5500	-3.47	1.00	10.06	7.59	5.74
104	5520	-3.14	1.00	10.06	7.92	6.19
108*	5540	-2.86	1.00	10.06	8.20	6.61
112	5560	-2.68	1.00	10.06	8.38	6.89
116	5580	-2.17	1.00	10.06	8.89	7.74
120*	5600	-2.16	1.00	10.06	8.90	7.76
124	5620	-1.86	1.00	10.06	9.20	8.32
128	5640	-1.95	1.00	10.06	9.11	8.15
132*	5660	-2.23	1.00	10.06	8.83	7.64
136	5680	-2.27	1.00	10.06	8.79	7.57
140	5700	-2.48	1.00	10.06	8.58	7.21

[IEEE802.11n-20 5500-5700MHz band] band MCS0

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
100	5500	-3.55	1.00	10.06	7.51	5.64
104	5520	-3.15	1.00	10.06	7.91	6.18
108*	5540	-2.98	1.00	10.06	8.08	6.43
112	5560	-3.83	1.00	10.06	7.23	5.28
116	5580	-3.01	1.00	10.06	8.05	6.38
120*	5600	-2.87	1.00	10.06	8.19	6.59
124	5620	-2.01	1.00	10.06	9.05	8.04
128	5640	-2.01	1.00	10.06	9.05	8.04
132*	5660	-2.24	1.00	10.06	8.82	7.62
136	5680	-2.56	1.00	10.06	8.50	7.08
140	5700	-2.51	1.00	10.06	8.55	7.16

Sample Calculation: Result = Reading + Cable Loss + Attenuator

: SAR test channel * : This channel was tested instead of an adjacent "default test channel".

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

[IEEE802.11n-40 5500-5700MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5590	-1.86	1.00	10.06	9.20	8.32
MCS1	5590	-1.93	1.00	10.06	9.13	8.18
MCS2	5590	-2.17	1.00	10.06	8.89	7.74
MCS3	5590	-2.19	1.00	10.06	8.87	7.71
MCS4	5590	-2.10	1.00	10.06	8.96	7.87
MCS5	5590	-2.23	1.00	10.06	8.83	7.64
MCS6	5590	-2.26	1.00	10.06	8.80	7.59
MCS7	5590	-2.60	1.00	10.06	8.46	7.01

: Worst data rate

[IEEE802.11n-40 5500-5700MHz band] band MCS0

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
102	5510	-3.47	1.00	10.06	7.59	5.74
110	5550	-2.25	1.00	10.06	8.81	7.60
118	5590	-1.86	1.00	10.06	9.20	8.32
126	5630	-1.95	1.00	10.06	9.11	8.15
134	5670	-2.06	1.00	10.06	9.00	7.94

Sample Calculation: Result = Reading + Cable Loss + Attenuator

5) WLAN (11a/n(5745-5825MHz):

1. The 11n SAR is not required for other mode because the maximum average output power for other mode is less than 1/4dB higher than that measured 11a mode.

2. The other channels are measured if the SAR result at max. AVG power channel will be above 0.8W/kg.

[IEEE802.11a 5745-5825MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
6.0	5785.0	-1.99	1.00	10.07	9.08	8.09
9.0	5785.0	-2.01	1.00	10.07	9.06	8.05
12.0	5785.0	-2.04	1.00	10.07	9.03	8.00
18.0	5785.0	-2.03	1.00	10.07	9.04	8.02
24.0	5785.0	-2.15	1.00	10.07	8.92	7.80
36.0	5785.0	-2.43	1.00	10.07	8.64	7.31
48.0	5785.0	-2.07	1.00	10.07	9.00	7.94
54.0	5785.0	-2.19	1.00	10.07	8.88	7.73

IEEE802.11a 5745-5825MHz band 6Mbps

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
149	5745.0	-1.95	1.00	10.07	9.12	8.17
153	5765.0	-1.74	1.00	10.07	9.33	8.57
157	5785.0	-1.99	1.00	10.07	9.08	8.09
161	5805.0	-2.29	1.00	10.07	8.78	7.55
165	5825.0	-2.99	1.00	10.07	8.08	6.43

Sample Calculation: Result = Reading + Cable Loss + Attenuator

 : Worst data rate

 : SAR test channel

[IEEE802.11n-20 5745-5825MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5785.0	-2.21	1.00	10.07	8.86	7.69
MCS1	5785.0	-2.29	1.00	10.07	8.78	7.55
MCS2	5785.0	-2.31	1.00	10.07	8.76	7.52
MCS3	5785.0	-1.86	1.00	10.07	9.21	8.34
MCS4	5785.0	-1.92	1.00	10.07	9.15	8.22
MCS5	5785.0	-1.98	1.00	10.07	9.09	8.11
MCS6	5785.0	-2.03	1.00	10.07	9.04	8.02
MCS7	5785.0	-2.08	1.00	10.07	8.99	7.93

MCS3 : Worst data rate

IEEE802.11n-20 5745-5825MHz band MCS3

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
149	5745.0	-1.87	1.00	10.07	9.20	8.32
153	5765.0	-1.72	1.00	10.07	9.35	8.61
157	5785.0	-1.86	1.00	10.07	9.21	8.34
161	5805.0	-2.43	1.00	10.07	8.64	7.31
165	5825.0	-3.19	1.00	10.07	7.88	6.14

Sample Calculation: Result = Reading + Cable Loss + Attenuator

[IEEE802.11n-40 5755-5795MHz band] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
MCS0	5755.0	-1.73	1.00	10.07	9.34	8.59
MCS1	5755.0	-1.73	1.00	10.07	9.34	8.59
MCS2	5755.0	-1.79	1.00	10.07	9.28	8.47
MCS3	5755.0	-1.85	1.00	10.07	9.22	8.36
MCS4	5755.0	-2.04	1.00	10.07	9.03	8.00
MCS5	5755.0	-2.07	1.00	10.07	9.00	7.94
MCS6	5755.0	-2.13	1.00	10.07	8.94	7.83
MCS7	5755.0	-2.18	1.00	10.07	8.89	7.74

MCS0 : Worst data rate

IEEE802.11n-40 5755-5795MHz band MCS0

Ch	Freq. [MHz]	P/M Reading [dBm] AVG	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm] AVG	[mW] AVG
151	5755.0	-1.73	1.00	10.07	9.34	8.59
159	5795.0	-1.91	1.00	10.07	9.16	8.24

Sample Calculation: Result = Reading + Cable Loss + Attenuator

5.3 Confirmation before SAR testing

Correlation of Output Power between EMC and SAR tests

It was checked that the antenna port power was correlated within 0~+5% (FCC requirements)

5.4 Confirmation after SAR testing

It was checked that the power drift [W] is within +/-5%. The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-field at the same location at beginning and the end of the scan measurement for each test position.

DASY5 system calculation Power drift value[dB] = $20\log(E_a)/(E_b)$

Before SAR testing : E_b [V/m]

After SAR testing : E_a [V/m]

Limit of power drift[W] = +/-5%

$X[\text{dB}] = 10\log[P] = 10\log(1.05/1) = 10\log(1.05) - 10\log(1) = 0.212\text{dB}$

from E-field relations with power.

$p = E^2/\eta = E^2/377$

Therefore, The correlation of power and the E-field

$X_{\text{dB}} = 10\log(P) = 10\log(E^2) = 20\log(E)$

Therefore,

The calculated power drift of DASY5 System must be the less than +/-0.212dB.

SECTION6 : Description of the Head/Body setup

6.1 Specification of sensor

This EUT has a proximity sensor and two grip sensors for power reduction. These sensors detect the human skin within 70mm from front display, 10mm from the rear case and 5mm from top edge of EUT.

Sensor specification			
Position	Yes/No	Type	Distance detected
Front	Yes	Proximity	70mm
Rear	Yes	Grip	10mm
Left edge	No	-	-
Right edge	No	-	-
Top edge	Yes	Grip	5mm
Bottom edge	No	-	-

6.2 Power reduction implementation

Mode	Power reduction level [dB]
GSM850 GSM/GPRS/EGPRS	6
PCS1900 GSM/GPRS/EGPRS	7
WCDMA band V AMR/12.2k RMC /HSDPA/HSUPA	5
WCDMA band II AMR/12.2k RMC /HSDPA/HSUPA	8
WLAN 11b/g/n	Power reduction is not implemented for WLAN
WLAN 11a/n	

6.3 Test position for Head setup

i) Procedure for SAR testing

The EUT was tested in accordance with FCC OET Bulletin 65 Supplement C: 2001-01 and IEEE 1528: 2003 for both the “Cheek/Touch” and “Ear/Tilt” positions at the left and right sides of the SAM phantom head region. The FCC KDB 648474 D01 was also incorporated.

ii) Test mode

GSM850/PCS1900	Voice mode (GSM)/VOIP mode(Worst mode in Data transmission)
WCDMA V/II	12.2k RMC
WLAN	VOIP mode

iii) Test position


The measurement is performed in EUT with power reduction for proximity sensor located at front position.

- (1) Left cheek
- (2) Left tilt
- (3) Right cheek
- (4) Right tilt

Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

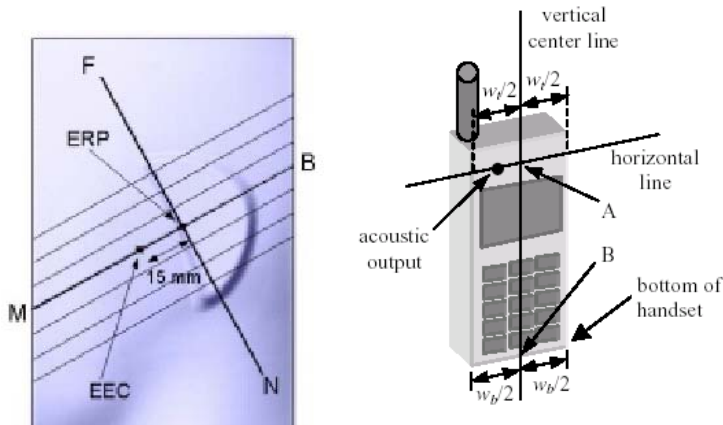


Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line.


This test position is established:

- i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii) (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

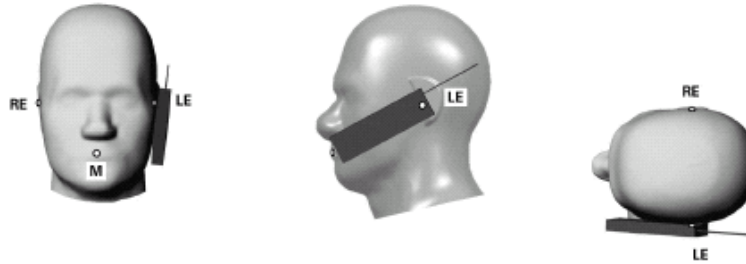

Tilt position

If the earpiece of the handset is not in full contact with the phantom’s ear spacer and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both “ear reference points” for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the “test device reference point” by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.

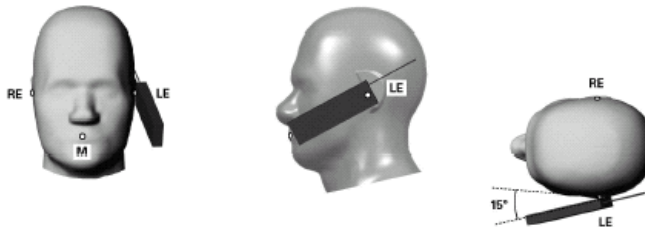

SAR test in Mouse and Jaw Regions of the SAM Phantom

The measurement procedure using a flat phantom according to the KDB648474 D01.

The SAR required in these regions of SAM should be measured using a flat phantom. Rectangular shaped phones should be positioned with its bottom edge positioned from the flat phantom with the same distance provided by the cheek touching position using SAM. The ear reference point (ERP, as defined for SAM) of the phone should be positioned ½ cm from the flat phantom shell.

<Antenna position>

The antennas use for WWAN and WLAN are both separate in a single fixed position. The antennas are integral part of the device.

6.4 Description of the Body setup

i) Procedure for SAR testing


-The tested distance were performed according to the KDB447498D01 (Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies)

-<Reference procedure>The tested distance were performed according to the KDB941225 D06 v01 (SAR Evaluation Procedures for portable Devices with Wireless Router Capabilities) (Device dimensions : 193.6 mm x 122.35mm)

ii) Test mode

GSM850/PCS1900	Data transmission mode (GPRS)
WCDMA V/II	Data transmission mode (12.2kRMC)
WLAN	Data transmission mode

iii) Test Position

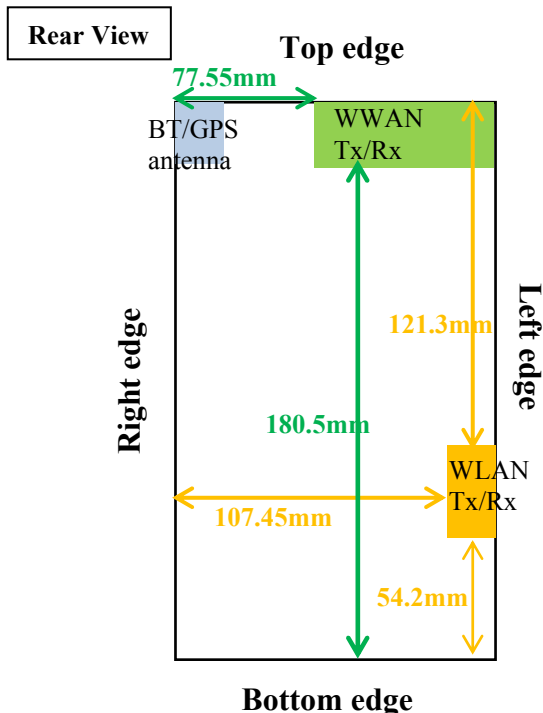

Position	WWAN	WLAN
Front (Hotspot)	Not required (Tested for reference purposes only)	Not required (Tested for reference purposes only (2.4GHz only))
Rear	Tested	Tested
Right edge	Not required	Not required
Left edge	Tested	Tested
Top edge	Tested	Not required
Bottom edge	Not required	Not required
Top 45degree	Tested	Not required

NOTE1: Test position is required to the edge within 5cm from antenna according to the KDB 447498D1.

NOTE2: Hotspot mode (body SAR with a 10mm separation from the front of the device to the phantom) is not required because the diagonal dimension of EUT exceeds 20cm. and has not been considered for FCC equipment certification It is provided for reference purposes only.

iv) Test configurations

EUT checked to the condition with or without headset. As the result, all tests were performed in the EUT without headset as worst condition.

(1) Rear (10mm) :

The measurement separated 10mm distance between the rear surface of EUT with normal power to the flat Phantom.

(2) Rear (0mm) :

The measurement touched to the rear surface of EUT with power reduction to the flat Phantom.

(3) Top (5mm) :

The measurement separated 5mm distance between the top edge of EUT with normal power to the flat Phantom.

(4) Top (0mm) :

The measurement touched to the top edge of EUT with power reduction to the flat Phantom.

(5) Left edge (0mm) :

The measurement touched to the left edge of EUT with normal power to the flat Phantom.

(6) Front (10mm) :

The measurement separated 10mm distance between the front surface of EUT with power reduction to the flat Phantom.

This condition is reference data for a hotspot mode procedure.

(7) Top 45 degree :

The measurement leaned a top edge of EUT to 45 degrees from the vertex touched to flat phantom. The condition of power was a normal power. The vertex position was the corner where the WWAN antenna is the closest.

<WLAN>

(1) Rear (10mm) :

The measurement separated 10mm distance between the rear surface of EUT to the flat Phantom.

This condition is for evaluation of simultaneous transmission.

(2) Rear (0mm) :

The measurement touched to the rear surface of EUT to the flat Phantom.

(3) Left edge (0mm) :

The measurement touched to the left edge of EUT to the flat Phantom.

(4) Front (10mm) :

The measurement separated 10mm distance between the front surface of EUT with power reduction to the flat Phantom.

This condition is reference data for a hotspot mode procedure.

<Antenna position>

The antennas use for WWAN and WLAN are both separate in a single fixed position. The antennas are integral part of the device.

SECTION 7 : Test surrounding

7.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY5 measurement system according to the SPEAG documents[2] and is given in the following Table.

<WLAN 300M-3GHz>

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 5.5	Normal	1	1	± 5.5	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	0.7	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	0.7	± 3.9	∞
Boundary effects	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Max.SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	6
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	4
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	\pm	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	-4.9	Rectangular	1	0.6	\pm	∞
Combined Standard Uncertainty						
					± 11.386	
Expanded Uncertainty (k=2)						
					± 22.8	

<WLAN 3-6GHz>

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.55	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	0.7	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	0.7	± 3.9	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 9.9	Rectangular	$\sqrt{3}$	1	± 5.7	∞
Max.SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	29
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	3
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	+4.8	Rectangular	1	0.64	± 3.1	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	-4.8	Rectangular	1	0.6	± 2.9	∞
Combined Standard Uncertainty					± 13.283	
Expanded Uncertainty (k=2)					± 26.6	

SECTION 8 : Measurement results

8.1 WLAN 2.4G HEAD SAR

(1) Method of measurement

SAR test in Mouse and Jaw Regions of the SAM Phantom

WLAN antenna is located near the bottom of a EUT. Therefore Head SAR for WLAN applied the measurement procedure using a flat phantom according to the KDB648474 D01.

Step1. Area scan at SAM phantom

For the Zoom scan measurement was confirmed the tight region of SAM phantom.

Step2. The measurement at Flat phantom

The test was positioned 5mm against ERP and 10mm against bottom edge from flat phantom.

The test was performed in mode of the maximum average output power

Note:

- (1) The SAR is not required for 11g/n mode because the maximum average output power for 11g/n mode is less than 1/4dB higher than that measured 11b mode.
- (2) The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.

(2) Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.

The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS										
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]
7-Oct	24	57	HSL 2450	23.5	2450	ϵ_r	39.2	38.0	-3.1	+/-5
						σ [mho/m]	1.80	1.89	5.0	+/-5

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in FCC OET65.

(3) Result of HEAD SAR

HEAD SAR MEASUREMENT RESULTS							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
1	2412	11b 1Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.057

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.2 WLAN 5G HEAD SAR

(1)Method of measurement

SAR test in Mouse and Jaw Regions of the SAM Phantom

WLAN antenna is located near the bottom of a EUT. Therefor Head SAR for WLAN applied the measurement procedure using a flat phantom according to the KDB648474 D01.

Step1. Area scan at SAM phantom

For the Zoom scan measurement was confirmed the tight region of SAM phantom.

Step2. The measurement at Flat phantom

The test was positioned 5mm against ERP and 10mm against bottom edge from flat phantom.

The test was performed in mode of the maximum average output power

Note:

- (1) The SAR is not required for 11a/n40 mode because the maximum average output power for 11a/n40 mode is less than 1/4dB higher than that measured 11n20 mode.
- 2) For 5180-5320MHz band & 5500-5700MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.4W/kg.
- 3) For 5745-5825MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.

(2)Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.

The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS										
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]
4-Nov	24.0	55	HSL 3-6GHz	23.5	5200	ϵ_r	36.0	34.8	-3.3	+/-5
						σ [mho/m]	4.66	4.78	2.6	+/-5
4-Nov	24.0	55	HSL 3-6GHz	23.5	5300	ϵ_r	35.9	34.5	-3.9	+/-5
						σ [mho/m]	4.76	4.89	2.7	+/-5
4-Nov	24.0	55	HSL 3-6GHz	23.5	5500	ϵ_r	35.6	34.1	-4.2	+/-5
						σ [mho/m]	4.96	5.10	2.8	+/-5
10-Oct	24.0	61	HSL 3-6GHz	23.5	5600	ϵ_r	35.5	34.1	-3.9	+/-5
						σ [mho/m]	5.07	5.24	3.4	+/-5
4-Nov	24.0	55	HSL 3-6GHz	23.5	5600	ϵ_r	35.5	34.0	-4.2	+/-5
						σ [mho/m]	5.07	5.22	3.0	+/-5
4-Nov	24.0	55	HSL 3-6GHz	23.5	5700	ϵ_r	35.4	34.0	-4.0	+/-5
						σ [mho/m]	5.17	5.35	3.5	+/-5
4-Nov	24.0	55	HSL 3-6GHz	23.5	5800	ϵ_r	35.3	33.6	-4.8	+/-5
						σ [mho/m]	5.27	5.46	3.6	+/-5

ϵ_r : Relative Permittivity / σ : Coconductivity

*1 The Target value is a parameter defined in FCC OET65.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

(3)Result of HEAD SAR

HEAD SAR MEASUREMENT RESULTS(5180-5240MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
48	5240	11a 24Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.021
48	5240	11a 6Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.017

HEAD SAR MEASUREMENT RESULTS (5260-5320MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
48	5280	11a 24Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.033
48	5280	11a 6Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.022

HEAD SAR MEASUREMENT RESULTS(5500-5700MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
124	5620	11n20 MCS3	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.040
124	5620	11n20 MCS0	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.048

HEAD SAR MEASUREMENT RESULTS							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
153	5765	11a 6Mbps	Flat	Fixed	Front	5(ERP) 10(bottom edge)	0.073

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.3 Simultaneous transmission evaluation for HEAD**Result of SUM Σ SAR1g**

SUM Σ SAR1g (GSM850 +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone worst SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		GSM850 Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Right cheek	0	0.491	0.057	0.073	0.548	0.564

SUM Σ SAR1g (PCS1900 +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone worst SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		PCS1900 Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Right cheek	0	0.519	0.057	0.073	0.576	0.592

SUM Σ SAR1g (WCDMA Band V +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone worst SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		WCDMA Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Right tilt	0	0.432	0.057	0.073	0.489	0.505

SUM Σ SAR1g (WCDMA band II+WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone worst SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		WCDMA Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Right cheek	0	0.614	0.057	0.073	0.671	0.687

: Highest SUM Σ SAR1g Head simultaneous transmissions

8.4 WLAN Body SAR (2.4G)**(1) Method of measurement**

Step1. The searching for the worst position

The test was performed in mode of the maximum average output power

Step2. The changing to the other channels

Step3. Separation change

The test was performed at front 10mm and rear 10mm in the worst channel.

Note:

1)The BODY SAR is not required for 11g/n mode because the maximum average output power for 11g/n mode is less than 1/4dB higher than that measured 11b mode.

2)The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.

(2) Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.

The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS										
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]
2-Oct	24	54	MSL 2450	24.5	2450	ϵ_r	52.7	50.1	-4.9	+/-5
						σ [mho/m]	1.95	2.00	2.6	+/-5

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in FCC OET65.

3) Result of Body SAR

BODY SAR MEASUREMENT RESULTS							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
Step.1 Position searching							
1	2412	11b 1Mbps	Flat	Fixed	Rear	0	0.890
1	2412	11b 1Mbps	Flat	Fixed	Left edge	0	0.245
Step.2 Channel change (SAR level in Step.1 > 0.8 w/kg)							
6	2437	11b 1Mbps	Flat	Fixed	Rear	0	0.840
11	2462	11b 1Mbps	Flat	Fixed	Rear	0	0.614
Step.3 Separation change							
Reference DATA							
1	2412	11b 1Mbps	Flat	Fixed	Front ^{*1}	10	0.038
1	2412	11b 1Mbps	Flat	Fixed	Rear ^{*2}	10	0.097

Note

*1 This measurement conditions is reference data for hotspot mode.

*2 This measurement conditions is for evaluation of simultaneous transmission.

Hotspot mode (body SAR with a 10mm separation from the front of the device to the phantom) is not required because the diagonal dimension of EUT exceeds 20cm. and has not been considered for FCC equipment certification. It is provided for reference purposes only.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.5 WLAN Body SAR (5G)

(1) Method of measurement

Step1. Data rate check

The test was performed in data rate of the maximum average output power and lowest data rate.

Step2. The searching for the worst position

The test was performed at the worst condition of Step1.

Step3. The changing to the other channels

Note:

- 1) The BODY SAR is not required for 11n mode because the maximum average output power for 11n mode is less than 1/4dB higher than that measured 11a mode.
- 2) For 5180-5320MHz band & 5500-5700MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.4W/kg.
- 3) For 5745-5825MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.

(2) Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.

The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS										
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value*1	Measured	Deviation [%]	Limit [%]
5-Nov	24.5	66	MSL 3-6GHz	24.5	5200	ϵ_r	49.0	47.1	-3.9	+/-5
						σ [mho/m]	5.30	5.42	2.3	+/-5
5-Nov	24.5	66	MSL 3-6GHz	24.5	5300	ϵ_r	48.9	46.9	-4.1	+/-5
						σ [mho/m]	5.42	5.55	2.4	+/-5
6-Oct	24.5	60	MSL 3-6GHz	24.5	5500	ϵ_r	48.6	46.8	-3.7	+/-5
						σ [mho/m]	5.65	5.82	3.0	+/-5
6-Oct	24.5	60	MSL 3-6GHz	24.5	5600	ϵ_r	48.5	46.9	-3.3	+/-5
						σ [mho/m]	5.77	5.98	3.6	+/-5
6-Oct	24.5	60	MSL 3-6GHz	24.5	5700	ϵ_r	48.3	46.2	-4.3	+/-5
						σ [mho/m]	5.88	6.08	3.4	+/-5
5-Nov	24.5	66	MSL 3-6GHz	24.5	5500	ϵ_r	48.6	46.5	-4.3	+/-5
						σ [mho/m]	5.65	5.83	3.2	+/-5
5-Nov	24.5	66	MSL 3-6GHz	24.5	5600	ϵ_r	48.5	46.3	-4.5	+/-5
						σ [mho/m]	5.77	5.97	3.5	+/-5
5-Nov	24.5	66	MSL 3-6GHz	24.5	5700	ϵ_r	48.3	46.1	-4.6	+/-5
						σ [mho/m]	5.88	6.11	3.9	+/-5
6-Nov	24.6	54	MSL 3-6GHz	24.2	5800	ϵ_r	48.2	45.9	-4.8	+/-5
						σ [mho/m]	6.00	6.29	4.8	+/-5

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in FCC OET65.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3)Result of Body SAR

BODY SAR MEASUREMENT RESULTS(5150-5250MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
Step.1 Data rate check							
48	5240	11a 24Mbps	Flat	Fixed	Rear	0	0.435
48	5240	11a 6Mbps	Flat	Fixed	Rear	0	0.423
Step.2 Position searching							
48	5240	11a 24Mbps	Flat	Fixed	Left edge	0	0.234

BODY SAR MEASUREMENT RESULTS(5250-5350MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
Step.1 Data rate check							
56	5280	11a 24Mbps	Flat	Fixed	Rear	0	0.517
56	5280	11a 6Mbps	Flat	Fixed	Rear	0	0.445
Step.2 Position searching							
56	5280	11a 24Mbps	Flat	Fixed	Left edge	0	0.292

BODY SAR MEASUREMENT RESULTS(5500-5700MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
Step.1 Data rate check							
124	5620	11n20 MCS3	Flat	Fixed	Rear	0	0.570
124	5620	11n20 MCS0	Flat	Fixed	Rear	0	0.559
Step.2 Position searching							
124	5620	11n20 MCS3	Flat	Fixed	Left edge	0	0.443
Step.3 Channel change (SAR level in Step.1&2 > 0.4 w/kg)							
108	5540	11n20 MCS3	Flat	Fixed	Rear	0	0.647
120	5600	11n20 MCS3	Flat	Fixed	Rear	0	0.610
132	5660	11n20 MCS3	Flat	Fixed	Rear	0	0.568
108	5540	11n20 MCS0	Flat	Fixed	Rear	0	0.631
120	5600	11n20 MCS0	Flat	Fixed	Rear	0	0.567
132	5660	11n20 MCS0	Flat	Fixed	Rear	0	0.678
108	5540	11n20 MCS3	Flat	Fixed	Left edge	0	0.423
120	5600	11n20 MCS3	Flat	Fixed	Left edge	0	0.474
132	5660	11n20 MCS3	Flat	Fixed	Left edge	0	0.411

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

BODY SAR MEASUREMENT RESULTS(5745-5825MHz)							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
153	5765	11 a 6Mbps	Flat	Fixed	Rear	0	0.660
153	5765	11 a 6Mbps	Flat	Fixed	Left edge	0	0.537

Stand-alone SAR for simultaneous transmission evaluation

These tests were performed with condition of maximum 5GHz WLAN SAR in order to evaluate a simultaneous transmission at rear 10mm position.

Note:

- 1) For 5180-5320MHz band & 5500-5700MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.4W/kg.
- 2) For 5745-5825MHz band, the other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.

BODY SAR MEASUREMENT RESULTS							
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Maximum value of multi-peak
56	5280	11 a 24Mbps	Flat	Fixed	Rear	10	0.047
132	5660	11 n MCS0	Flat	Fixed	Rear	10	0.055
153	5765	11 a 6Mbps	Flat	Fixed	Rear	10	0.083

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.6 Simultaneous transmission evaluation for BODY

Hotspot mode (body SAR with a 10mm separation from the front of the device to the phantom) is not required because the diagonal dimension of EUT exceeds 20cm. and has not been considered for FCC equipment certification It is provided for reference purposes only.

Result of SUM Σ SAR1g

SUM Σ SAR1g (GSM850 +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		GSM850 Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Rear	10	0.432	0.097	0.083	0.529	0.515
Rear	0	0.746	0.890	0.678	1.636	1.424
Top	5	0.634	- *1	- *1	-	-
Top	0	0.335	- *1	- *1	-	-
Left edge	0	0.358	0.245	0.537	0.603	0.895
Front (Reference)	10	0.093	0.038	- *2	0.131	0.224
Top	45 degree	0.212	- *1	- *1	-	-

1.636 : SUM Σ SAR1g >1.6W/kg

SUM Σ SAR1g (PCS1900 +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		PCS1900 Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Rear	10	0.436	0.097	0.083	0.533	0.519
Rear	0	0.625	0.890	0.678	1.515	1.303
Top	5	0.986	- *1	- *1	-	-
Top	0	0.402	- *1	- *1	-	-
Left edge	0	0.283	0.245	0.537	0.528	0.820
Front (Reference)	10	0.120	0.038	- *2	0.158	0.278
Top	45 degree	0.546	- *1	- *1	-	-

*1 This position is not required in WLAN SAR mode since distance from antenna is over 5cm.

*2 This position is not required since WLAN 5GHz has not hotspot mode.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SUM Σ SAR1g (WCDMA band V +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		WCDMA Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Rear	10	0.323	0.097	0.083	0.420	0.406
Rear	0	0.767	0.890	0.678	1.657	1.445
Top	5	0.489	- *1	- *1	-	-
Top	0	0.278	- *1	- *1	-	-
Left edge	0	0.280	0.245	0.537	0.525	0.817
Front (Reference)	10	0.100	0.038	- *2	0.138	0.238
Top	45 degree	0.164	- *1	- *1	-	-

: SUM Σ SAR1g > 1.6W/kg

SUM Σ SAR1g (WCDMA band II +WLAN(2.4G/5G))						
Position	Separation [mm]	Stand alone SAR(1g) [W/kg]			SUM SAR(1g)[W/kg]	SUM SAR(1g)[W/kg]
		WCDMA Band	WLAN 2.4G	WLAN 5G	WWAN + WLAN(2.4G)	WWAN + WLAN(5G)
Rear	10	0.535	0.097	0.083	0.632	0.618
Rear	0	0.646	0.890	0.678	1.536	1.324
Top	5	1.09	- *1	- *1	-	-
Top	0	0.509	- *1	- *1	-	-
Left edge	0	0.366	0.245	0.537	0.611	0.903
Front (Reference)	10	0.123	0.038	- *2	0.161	0.284
Top	45 degree	0.633	- *1	- *1	-	-

: Highest SUM Σ SAR1g Body simultaneous transmissions(in SUM Σ SAR1g < 1.6W/kg)

*1 This position is not required in WLAN SAR mode since distance from antenna is over 5cm.


*2 This position is not required since WLAN 5GHz has not hotspot mode.

SAR to Peak Location Separation Ratio

SUM \sum 1-g SAR > 1.6 W/kg

\sum SAR 1g > 1.6W/kg Condition	\sum 1-g SAR (W/kg)	3D distance (cm)	SAR to peak location separation ratio
Body GSM850 + Body WLAN2.4GHz	1.636	13.05	0.125
Body WCDMA V + Body WLAN2.4GHz	1.657	13.06	0.127

Body GSM850 + Body WLAN2.4GHz

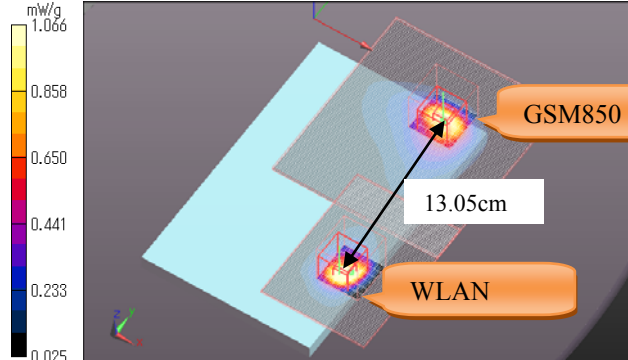


Mode	Value of SAR mW/g	X m	Y m	Z m
1 GSM850	1.07	0.036	0.087	-0.18
2 WLAN 2.4G	1.5	0.0475	-0.043	-0.179

(d) cm	0.1305	13.05
	$\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$	

(d)cm : The actual measured distance between peak SAR locations

Body W-CDMA band V+ Body WLAN2.4GHz

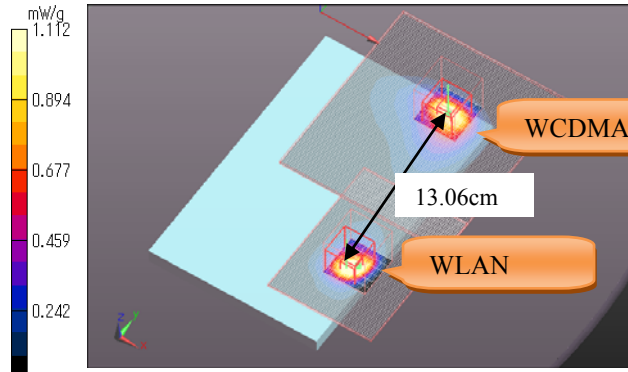

Mode	Value of SAR mW/g	X m	Y m	Z m
1 WCDMA band V	1.11	0.0345	0.087	-0.179
2 WLAN 2.4G	1.5	0.0475	-0.043	-0.179

(d) cm	0.1306	13.06
	$\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$	

(d)cm : The actual measured distance between peak SAR locations

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 9 Test instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MPM-08	Power Meter	Anritsu	ML2495A	6K00003338	Power Measurement	2011/09/13 * 12
MPSE-11	Power sensor	Anritsu	MA2411B	011737	Power Measurement	2011/09/13 * 12
MAT-24	Attenuator(10dB)(above 1 GHz)	Agilent	8493C	71389	Power Measurement	2011/06/23 * 12
MAT-25	Attenuator(10dB)(above 1 GHz)	Agilent	8493C	71642	Power Measurement	2011/06/23 * 12
MPSC-01	Power splitters/Combiners	Mini-Circuit	ZFSC-2-2500	0124	Power Measurement	2011/09/27 * 12
MCC-91	Microwave Cable 1G-40GHz	Schner	SUCOFLEX102	30812/2	Power Measurement	2011/05/27 * 12
MPM-01	Power Meter	Agilent	E4417A	GB41290639	SAR	2011/02/01 * 12
MPSE-01	Power Sensor	Agilent	E9300B	US40010300	SAR	2011/01/28 * 12
MPSE-03	Power sensor	Agilent	E9327A	US40440576	SAR	2011/02/02 * 12
MAT-15	Attenuator(30dB)	Agilent	8498A	US40010300	SAR	2011/02/16 * 12
MSG-10	Signal Generator	Agilent	N5181A	MY47421098	SAR	2011/09/22 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	MY39500780	SAR	2011/03/10 * 12
MRFA-08	Pre Amplifier	TSJ	TCBP0206	-	SAR	2011/03/27 * 12
MHDC-12	Dual Directional Coupler	Hewlett Packard	772D	2839A0016	SAR	Pre Check
MNA-01	Network Analyzer	Agilent/HP	E8358A	US41080381	SAR	2011/08/22 * 12
MDPK-01	Dielectric probe kit	Agilent	85070D	702	SAR	2010/10/25 * 36
MNCK-01	Type N Calibration Kit	Agilent	85032F	MY41495257	SAR	2011/08/12 * 12
MPB-03	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV3	3507	SAR	2011/03/16 * 12
KPB-01	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3679	SAR	2011/05/19 * 12
MRENT-82	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3540	SAR	2011/07/21 * 12
MDAE-01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	509	SAR	2011/07/20 * 12
COTS-MSAR-03	Dasy5	Schmid&Partner Engineering AG	DASY52.6.1.408	-	SAR	-
COTS-MSAR-02	S-Parameter Network Analyzer	Agilent	-	-	SAR	-
MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	SAR	2010/09/13 * 36
MDA-08	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1020	SAR	2011/08/23 * 12
MPSAM-02	SAM Phantom	Schmid&Partner Engineering AG	SAM Twin Phantom V4.0	1333	SAR	Pre Check
MPF-02	2mmOval Flat Phantom ERI 4.0	Schmid&Partner Engineering AG	QD VA 001B (ERI4.0)	1045	SAR	2011/04/01 * 12
MDH-01	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	SAR	Pre Check
MOS-26	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q29	SAR	2011/05/26 * 12
MOS-10	Digital thermometer	HANNA	Checktemp-2	MOS-10	SAR	2011/08/22 * 12
MBM-13	Barometer	Sunoh	SBR121	837	SAR	2011/03/14 * 36
HSL/MSL2450					Daily check	Target value \pm 5%
HSL/MSL 3-6GHz					Daily check	Target value \pm 5%
SAR room					Daily check	Ambient Noise<0.012W/kg

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124