


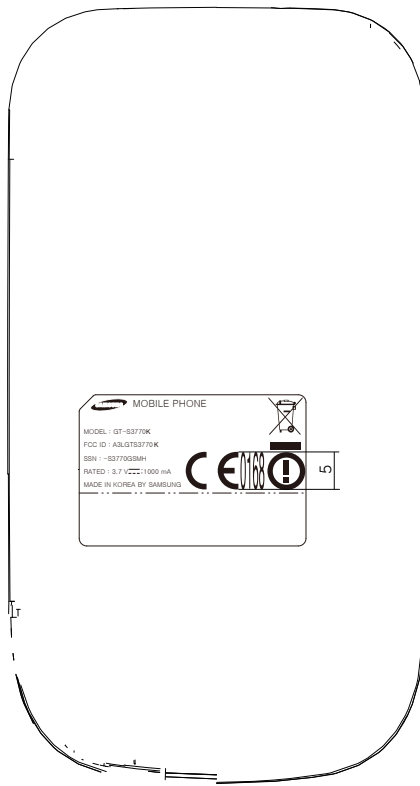


**Technical Description**

1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents
2. Background color is 'WHITE', letter color is 'BLACK'  
(reverse for SAMSUNG LOGO)
3. Back side should be attached to release paper once adhesive is applied.
4. No letter should be blur/smearred
5. The production must be proceed after the approval of R&D Group
6. The product must be within approved sample's specification tolerance.
7. The product must be finished in a ROLL
8. Release paper must be unifiedn for material and color(blue)
9. Do not contain any substances which are specified in (OQA-2049).



MAT. 		OPP Laminating 18μ Adhesive 8μ		FIN. Semi transparency OPP laminating + UVP Coating	
		WHITE POLYPROPYLENE 80μ Adhesive 25μ			
TITLE <b>GT-S3770K (EU)</b>					
<b>LABEL-MAIN</b>					
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION
TOLERANCE	+0.0 -0.1	Tae Hun Kim	Kyeong Hwan JO	June Sop Kim	
SCALE	N/S				SHEET NO
Vendor	HSINS	110621	110621	110621	1/1
		Doc. CODE		<b>GH68-00000A</b>	



The label is placed inside the battery compartment