



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center

416, Maetan-3dong,
Yeongtong-gu, Suwon-si,
Gyeonggi-do, Korea 443-742

TEST REPORT ON SAR

Model Tested: GT-S3770L
FCC ID (Requested): A3LGTS3770L
Job No: FI-122
Report No: FI-122-S1

- Abstract -


This document reports on SAR Tests carried out in accordance with FCC/OET Bulletin 65, Supplement C(June 2001).

Prepared By _____

JR LEE - Test Engineer


Authorized By _____

JD JANG - Technical Manager

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	1 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Contents

1. GENERAL INFORMATION	3
2. DESCRIPTION OF DEVICE	3
3. DESCRIPTION OF TEST EQUIPMENT	4
3.1 SAR Measurement Setup	4
3.2 E-field Probe	5
3.3 Phantom	7
3.4 Brain Simulating Mixture Characterization	9
3.5 Device Holder for Transmitters	9
3.6 Validation Dipole.....	10
3.7 Equipment Calibration.....	11
4. SAR MEASUREMENT PROCEDURE	12
5. DESCRIPTION OF TEST POSITION	13
5.1 SAM Phantom Shape	13
5.2 “cheek” Position.....	13
5.3 “tilted” Position.....	15
5.4 Body Holster/Belt Clip Configurations	16
6. MEASUREMENT UNCERTAINTY.....	18
7. SYSTEM VERIFICATION	21
7.1 Tissue Verification.....	21
7.2 Test System Validation.....	21
8. SAR MEASUREMENT RESULTS	22
8.1 GSM850 Head SAR Results	30
8.2 GPRS850 Body SAR Results(Without Holster)	31
8.3 GSM1900 Head SAR Results	32
8.4 GPRS1900 Body SAR Results(Without Holster)	33
8.5 WCDMA850 Head SAR Results.....	34
8.6 WCDMA850 Body SAR Results(Without Holster).....	35
8.7 WCDMA1900 Head SAR Results.....	36
8.8 WCDMA1900 Body SAR Results(Without Holster).....	37
8.9 WLAN Head SAR Results.....	38
8.10 WLAN Body SAR Results(Without Holster).....	39
9. CONCLUSION	40
10. REFERENCES	41
APPENDIX A SAR Definition	43
APPENDIX B Probe Calibration Process.....	44
APPENDIX C ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS	45
APPENDIX D The Validation Measurements	46
APPENDIX E Plots of The SAR Measurements	53
APPENDIX F Probe Calibration.....	89
APPENDIX G Calibration of The Validation Dipole	101


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	2 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

1. GENERAL INFORMATION

Test Dates : May.26, 2011 ~ May.30, 2011
Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.
Address : 416 Maetan3-Dong, Suwon City, Korea
Test Standard : §2.1093; FCC/OET Bulletin 65, Supplement C(June 2001)
FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)
Digital Transmitter System (DTS)
Tested for : FCC/TCB Certification

2. DESCRIPTION OF DEVICE

Test Sample : 850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth,
WLAN and EDGE Rx only
Model Number : GT-S3770L
Serial Number : Identical prototype (S/N : # FI-122-A)
Tx Freq.Range: 824.2 ~ 848.8 MHz (GSM850)
1850.20 ~ 1909.80 MHz (GSM1900)
826.4 ~ 846.6 MHz (WCDMA850)
1852.4 ~ 1907.6 MHz (WCDMA1900)
2412 ~ 2462 MHz (WLAN)
Rx Freq.Range: 869.2 ~ 893.8 MHz (GSM850)
1930.20 ~ 1989.80 MHz (GSM1900)
871.4 ~ 891.6 MHz (WCDMA850)
1932.4 ~ 1987.6 MHz (WCDMA1900)
2412 ~ 2462 MHz (WLAN)
Antenna Manufacturer : SKYCROSS
Model No.: B110070
GSM Class B
GPRS Class 12
DTM Multislot N/A
Antenna Dimensions : 48.29 X 12.93 X 3.58 (mm)
Separation distance between
Main and Bluetooth antenna : 65mm

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	3 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR Measurement Setup

Robotic System

Measurements are performed using the DASY4 (or DASY5) automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, Samsung computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

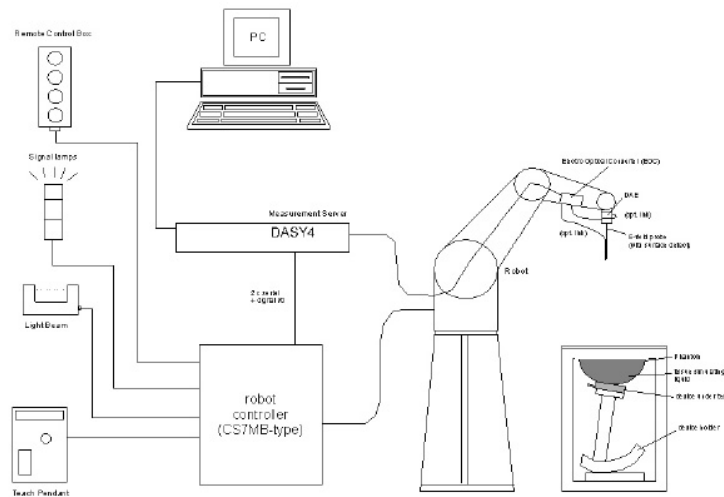



Figure 3.1 SAR Measurement System Setup

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the Samsung computer with Windows XP system and SAR Measurement Software DASY4 (or DASY5), LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	4 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

3.2 E-field Probe



The SAR measurements were conducted with the dosimetric probe ES3DV2, ES3DV3, EX3DV4 and ET3DV6, designed in the classical triangular configuration (see Fig.3.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.2). The approach is

Figure 3.2 DAE System stopped at reaching the maximum.

Probe Specifications

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration Basic Broad Band Calibration in air: 10-3000 MHz
 Conversion Factors (CF) for HSL 900 and HSL 1800





Figure 3.3 Triangular Probe Configuration

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	5 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Additional CF for other liquids and frequencies upon request

Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity **[ES3DV3], [ET3DV6]**
 ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.3 dB in tissue material (rotation normal to probe axis)
[EX3DV4]
 ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range **[ES3DV3], [ET3DV6]**
 $5\mu\text{W/g}$ to $> 100\text{mW/g}$; Linearity: ± 0.2 dB
[EX3DV4]
 $10\ \mu\text{W/g}$ to $> 100\ \text{mW/g}$; Linearity: ± 0.2 dB

Dimensions **[ES3DV3], [ES3DV2]**
 Overall length: 330 mm (Tip: 20 mm)
 Tip diameter: 3.9 mm (Body: 12 mm)
 Distance from probe tip to dipole centers: 2.1 mm
[EX3DV4]
 Overall length: 330 mm (Tip: 20 mm)
 Tip diameter: 2.5 mm (Body: 12 mm)
 Typical distance from probe tip to dipole centers: 1 mm




[ES3DV3], [ES3DV2]

[ET3DV6]
 Overall length: 330mm
 Tip length: 16mm
 Body diameter: 12mm
 Tip diameter: 6.8mm
 Distance from probe tip to dipole centers: 2.7mm



[EX3DV4]

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	6 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Application **[ES3DV3], [ES3DV2]**
 General dosimetry up to 5 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones



[EX3DV4]
 High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30 %.

[ET3DV6]

[ET3DV6]
 General dosimetry up to 3 GHz
 Compliance tests of mobile phones
 Fast automatic scanning in arbitrary phantoms

Optical **[ET3DV6]**
 Surface ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
 Detection

3.3 Phantom


SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.5)



Figure3.5 SAM Twin Phantom

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	7 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

SAM Twin Phantom Specification

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Height: 810 mm; Length: 1000 mm; Width: 500 mm

Modular Flat Phantom

The Modular Flat Phantom V5.1 is constructed of a fiberglass shell integrated in a wooden table. Also It consists of three identical flat phantoms (modules) which can be installed and removed separately without emptying the liquid, as well as a wooden support.. It enables the dosimetric evaluation of body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.


Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.6)



Figure 3.6 Modular Flat Phantom

Modular Flat Phantom Specification

Construction	The shell corresponds to the specifications of IEEE 1528-2003. It enables the dosimetric evaluation of body mounted usage above 800 MHz at the flat phantom region. A cover prevents evaporation of the liquid
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 10 liters
Dimension	Wooden support - Height: 810 mm; Length: 830 mm; Width: 500 mm Each Module - Height:190 mm; Length: 200 mm; width: 300 mm

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	8 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

3.4 Brain Simulating Mixture Characterization

The brain mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

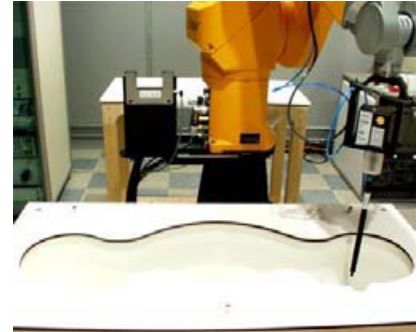


Figure 3.7 Simulated Tissue

Table 3.1 Composition of the Brain Tissue Equivalent Matter

INGREDIENTS	835MHz Brain	835MHz Muscle	1900MHz Brain	1900MHz Muscle	2450MHz Brain	2450MHz Muscle
WATER	40.19%	50.75%	55.24%	70.23%	71.88%	73.4%
SUGAR	57.90%	48.21%	-	-	-	-
SALT	1.48%	0.94%	0.31%	0.29%	0.16%	0.06%
DGBE	-	-	44.45%	29.48%	7.99%	26.54%
Triton X-100	-	-	-	-	19.97%	-
BACTERIACIDE	0.18%	0.10%	-	-	-	-
HEC	0.25%	-	-	-	-	-
Dielectric Constant Target	41.5	55.2	40	53.3	39.2	52.7
Conductivity Target (S/m)	0.9	0.97	1.4	1.52	1.8	1.95

3.5 Device Holder for Transmitters


In combination with the Twin SAM Phantom V4.0, the Mounting Device (see Fig. 3.7) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening.



Figure 3.8 Device Holder

The devices can be easily, accurately and repeatedly be positioned according to the EN 50360:2001 and FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

*Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configuration. To produce worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	9 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

3.6 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.


Frequency	835, 1900, 2450 MHz
Return Loss	< -20 dB at specified validation position
Dimensions	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm D2450V2: dipole length: 51.8 mm; overall height: 300 mm

Note:

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibration in KDB 450824

D2450V2 S/N:807	Parameters				
	Date of Cal	Return loss (dB)	Deviation (%)	Impedance (Ω)	Deviation (Ω)
	2010.02.04	-26.8	0	54.4	0
	2011.03.31	-26.6	0.75	50.1	-4.3

- End of page -

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	10 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

3.7 Equipment Calibration


Table 3.2 Test Equipment Calibration

Type	Calibration Due Date	Serial No.
SPEAG E-Field Probe EX3DV4	Mar.22, 2012	3520
SPEAG DAE4	Mar.18, 2012	686
SPEAG Validation Dipole D835V2	Feb.23, 2013	4d050
SPEAG Validation Dipole D1900V2	Feb.23, 2013	5d082
SPEAG Validation Dipole D2450V2	Feb.04, 2012	807
Stäubli Robot RX90BL	Not Required	F05/51G6A1/A/01
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1364
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1604
Modular Phantom	Not Required	MP-1010
E4421B Signal Generator	Oct.29, 2011	MY41000654
BBS3Q7ELU Power Amp	Oct.22, 2011	1007D/C0035
E4419B Power meter	Oct.22, 2011	GB41293847
E9300B Power sensor	Jun.09, 2011	MY41495880
HP-8753ES Network Analyzer	Apr.27, 2012	US39173712
HP85070C Dielectric Probe Kit	Not Required	US99360087
E4419B Power meter	Feb.25, 2012	MY45103291
E9300B Power sensor	Jun.09, 2011	MY41495872
E9300B Power sensor	Jun.09, 2011	MY41495885
DASY4 S/W (ver 4.7)	Not Required	-
8560E Spectrum Analyzer	Sep.17, 2011	3635A02452
778D Dual Directional Coupler	Dec.02, 2011	50189
777D Dual Directional Coupler	Feb.23, 2012	07523
Base Station Simulator	Jan.26, 2012	GB45360270

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Samsung Lab. before each test. (see § 7.2) The brain simulating material is calibrated by Samsung using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. (see § 7.1)

- End of page -

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	11 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure.

STEP 1

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

STEP 2

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm x 20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

STEP 3


Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

STEP 4

The SAR value at the same location as in step 1 was again measured.

(If the value changed by more than 5%, the evaluation is repeated.)

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	12 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

5. DESCRIPTION OF TEST POSITION

5.1 SAM Phantom Shape

Figure 5.1 shows the front, back and side views of SAM. The point “M” is the reference point for the center of mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.2.



Figure 5.1 Front, back and side view of SAM

The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines should be marked on the external phantom shell to facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs.

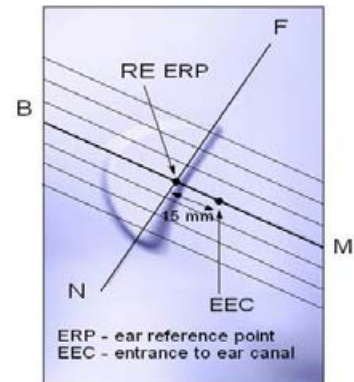



Figure 5.2 Close up side view

5.2 “cheek” Position

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 5.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its tip and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	13 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011




Figure 5.4 Handset vertical and horizontal reference lines




Figure 5.3 Side view of the phantom showing relevant markings




Figure 5.5 Front, Side and Top View of Cheek/Touch Position

Step 1

The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5.5), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom

Step 2


The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.

Step 3

While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).

Step 4

Rotate the handset around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	14 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Step 5

While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 5.2.

5.3 “tilted” Position

With the test device aligned in the “cheek” position :

Step 1

Repeat steps 1 to 5 of 5.2 to place the device in the “Cheek/Touch Position”



Figure 5.6 Front, side and Top View of Ear/Tilt 15° Position

Step 2


While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.

Step 3

The phone was then rotated around the horizontal line by 15 degree.

Step 4

While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	15 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

5.4 Body Holster/Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 5.7). A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

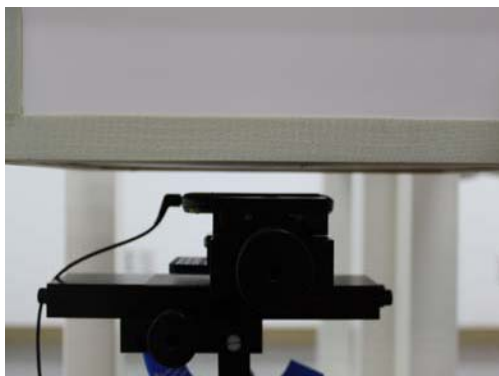



Figure 5.7 Body Belt Clip and Holster Configurations

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains unique metallic component. If multiple accessory share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used.


Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), Including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	16 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements must be included in the user's manual.

- End of page -

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	17 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

6. MEASUREMENT UNCERTAINTY

Table 6.1 Uncertainty Budget at 835MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	1.73	rectangular	1.732	1	1.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.12	normal	1.000	1	1.12	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	5.62	normal	1.000	1	5.62	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	0.38	normal	1.000	0.64	0.24	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	5.44	normal	1.000	0.6	3.26	∞
Combined Standard Uncertainty		Normal	-	-	11.84	172776
Extended Standard Uncertainty(K=2.00)					23.69	172776


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	18 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 6.2 Uncertainty Budget at 1900MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or V _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.50	normal	1.000	1	1.50	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	6.02	normal	1.000	1	6.02	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	1.84	normal	1.000	0.64	1.18	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.54	normal	1.000	0.6	2.73	∞
Combined Standard Uncertainty		Normal	-	-	12.00	60176
Extended Standard Uncertainty(K=2.00)					24.00	60176



FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	19 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 6.3 Uncertainty Budget at 2450MHz

Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v _i ² or V _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.00	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	4.22	normal	1.000	1	4.22	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	2.32	Normal	1.0001	1	2.32	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	2.04	normal	1.000	0.64	1.30	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.27	normal	1.000	0.6	2.56	∞
Combined Standard Uncertainty		Normal	-	-	11.32	728
Extended Standard Uncertainty(K=2.00)					22.64	728

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	20 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

7. SYSTEM VERIFICATION

7.1 Tissue Verification

Table 7.1 MEASURED TISSUE PARAMETERS

	835MHz Head		835MHz Body		1900MHz Head		1900MHz Body		2450MHz Head		2450MHz Body	
	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Date	May26,2011		May26,2011		May27,2011		May27,2011		May30,2011		May30,2011	
Liquid Temperature(°C)	222		223		223		221		222		221	
Dielectric Constant: $\hat{\alpha}'$	415	416	552	536	40	39.1	53.3	52.3	392	38.3	52.7	51.4
Conductivity:	0.9	0.88	0.97	0.96	1.4	1.43	1.52	1.53	1.8	1.83	1.95	2
Tissue Batch Number	835DF3001F		835B2001J		1900F3001P		1900B2002F		2450MF3001A		2450B2001A	

The measured value must be within $\pm 5\%$ of the target value.

7.2 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specification at 835MHz, 1900MHz and 2450MHz by using the system validation kit(s). (see Appendix D, Graphic Plot Attached)

Table 7.2 System Validation Results

System Validation Kit	Tissue	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Normalized SAR _{1g} (mW/g)	Deviation (%)	Date	Liquid Temperature(°C)	Ambient Temperature(°C)	Input Power (mW)
4d050	835MHz Brain	9.61	2.45	9.8	1.98	May.26, 2011	22.2	22.6	250
4d050	835MHz Body	10.0	2.36	9.44	-5.6	May.26, 2011	22.3	22.6	250
5d082	1900MHz Brain	41.4	4.37	43.7	5.56	May.27, 2011	22.3	22.7	100
5d082	1900MHz Body	40.7	3.9	39	-4.18	May.27, 2011	22.1	22.5	100
807	2450MHz Brain	54.4	5.64	56.4	3.68	May.30, 2011	22.2	22.7	100
807	2450MHz Body	51.1	5.15	51.5	0.78	May.30, 2011	22.1	22.5	100

*Validation was measured with input power 100 mW, 250 mW and normalized to 1W.

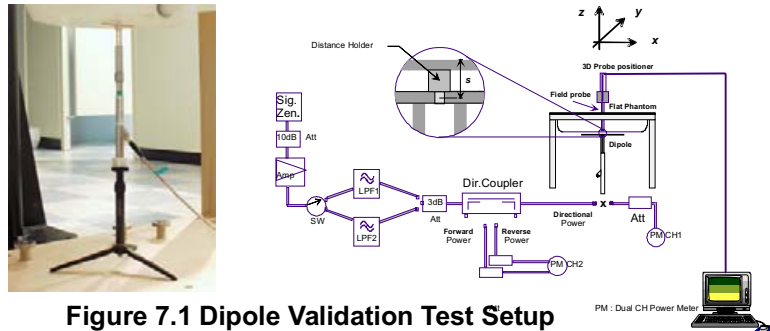



Figure 7.1 Dipole Validation Test Setup

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	21 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8. SAR MEASUREMENT RESULTS

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode using base station simulator. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

SAR Measurement Conditions for WCDMA

These procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", May 2006.

Output Power Verification


Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes) should be tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.

Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	22 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure the additional DPDCHn for the DUT using FTM(Factory Test Mode) with parameters similar to those used in 384 kbps and 768 kbps RMC.

SAR Measurement Conditions for HSDPA Data Devices

Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all “1s”. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH) is tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations is identified.


Head SAR Measurements (if VoIP applicable)

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. In addition, body SAR is also measured in HSDPA with an FRC, together with a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	23 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of $\beta_c=9$ and $\beta_d=15$, and power offset parameters of $\Delta_{ACK} = \Delta_{NACK} = 5$ and $\Delta_{CQI}=2$ is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.

Table 8.1 Max. Power Output Table for GT-S3770L [dBm]

Operation Band Channel	Channel	12.2 Kbps RMC		12.2 Kbps AMR
		HSDPA Inactive	HSDPA Active	
WCDMA850	4132	22.57	22.93	22.58
	4183	22.50	22.95	22.50
	4233	22.49	22.89	22.50
WCDMA1900	9262	22.07	22.03	22.30
	9400	22.61	22.18	22.49
	9538	22.82	22.25	22.65

WCDMA 850	HSDPA	4132	4183	4233	MPR
	Subtest1	22.93	22.95	22.89	0.0
	Subtest2	22.97	22.98	22.95	0.0
	Subtest3	22.02	21.98	21.94	0.5
	Subtest4	22.05	21.99	21.96	0.5
WCDMA 1900	HSDPA	9262	9400	9538	MPR
	Subtest1	22.03	22.18	22.25	0.0
	Subtest2	21.95	22.25	22.22	0.0
	Subtest3	21.12	21.35	21.27	0.5
	Subtest4	21.11	21.38	21.28	0.5

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	24 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated. And all Tx(1~4Tx) conducted power were also investigated for Body-Worn SAR Measurement

Table 8.2 GPRS Power Table for GT-S3770L [dBm]

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850	128	32.76	32.76	32.32	30.54	29.5
	190	32.44	32.44	31.98	30.16	29.09
	251	32.32	32.32	31.84	30.02	28.93
1900	512	29.48	29.48	29.06	26.84	26
	661	29.28	29.28	28.8	26.36	25.45
	810	29.73	29.73	29.32	26.86	25.91

Simultaneous Transmission

Refer to the FCC OET document, 'SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas' (Feb 2008)

Table 8.3 Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P Ref	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table				


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	25 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 8.4 Conducted Output Peak Power Measurements

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	19.85	30
		2 Mbps	20.17	30
		5.5 Mbps	21.96	30
		11 Mbps	23.55	30
2437	6	1 Mbps	20.27	30
		2 Mbps	20.43	30
		5.5 Mbps	22.35	30
		11 Mbps	23.9	30
2462	11	1 Mbps	20.31	30
		2 Mbps	20.46	30
		5.5 Mbps	22.41	30
		11 Mbps	24.01	30
802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	22.2	30
		9 Mbps	22.21	30
		12 Mbps	22.22	30
		18 Mbps	22.12	30
		24 Mbps	22.56	30
		36 Mbps	22.41	30
		48 Mbps	22.41	30
		54 Mbps	22.34	30
2437	6	6 Mbps	22.42	30
		9 Mbps	22.43	30
		12 Mbps	22.4	30
		18 Mbps	22.33	30
		24 Mbps	22.8	30
		36 Mbps	22.57	30
		48 Mbps	22.56	30
		54 Mbps	22.53	30
2462	11	6 Mbps	22.62	30
		9 Mbps	22.56	30
		12 Mbps	22.64	30
		18 Mbps	22.55	30
		24 Mbps	22.94	30
		36 Mbps	22.74	30
		48 Mbps	22.71	30
		54 Mbps	22.7	30


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	26 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 8.5 Conducted Output Average Power Measurements

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	17.18	30
		2 Mbps	16.76	30
		5.5 Mbps	15.54	30
		11 Mbps	14.42	30
2437	6	1 Mbps	17.57	30
		2 Mbps	16.98	30
		5.5 Mbps	15.83	30
		11 Mbps	14.59	30
2462	11	1 Mbps	17.47	30
		2 Mbps	17.07	30
		5.5 Mbps	15.96	30
		11 Mbps	14.71	30
802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	12.91	30
		9 Mbps	12.1	30
		12 Mbps	11.25	30
		18 Mbps	10.23	30
		24 Mbps	9.35	30
		36 Mbps	8.02	30
		48 Mbps	7.1	30
		54 Mbps	6.77	30
2437	6	6 Mbps	13.08	30
		9 Mbps	12.27	30
		12 Mbps	11.5	30
		18 Mbps	10.46	30
		24 Mbps	9.58	30
		36 Mbps	8.34	30
		48 Mbps	7.39	30
		54 Mbps	7.07	30
2462	11	6 Mbps	13.21	30
		9 Mbps	12.4	30
		12 Mbps	11.75	30
		18 Mbps	10.6	30
		24 Mbps	9.73	30
		36 Mbps	8.53	30
		48 Mbps	7.58	30
		54 Mbps	7.26	30


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	27 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 8.6 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<p>SAR not required:</p> <p><u>Unlicensed only</u></p> <ul style="list-style-type: none"> o when stand-alone 1-g SAR is not required and antenna is > 5 cm from other antennas <p><u>Licensed & Unlicensed</u></p> <ul style="list-style-type: none"> o when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas o when SAR to antenna separation ratio of simultaneous transmitting antenna pair is < 0.3 <p>SAR required:</p> <p><u>Licensed & Unlicensed</u></p> <p>antenna pairs with SAR to antenna separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Unlicensed Transmitters	<p>When there is no simultaneous transmission –</p> <ul style="list-style-type: none"> o output < 60/f: SAR not required o output $\geq 60/f$: stand-alone SAR required <p>When there is simultaneous transmission –</p> <p><u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> o output $\leq 2.P_{Ref}$ and antenna is > 5.0 cm from other antennas o output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas o output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <p><u>Otherwise stand-alone SAR is required</u></p> <p>When stand-alone SAR is required</p> <ul style="list-style-type: none"> o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures 	


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	28 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

Table 8.7 Simultaneous Transmission Summation for Held to Ear Voice Call

Simult Tx	Configuration	WIFI SAR (W/Kg)	GSM850 SAR(W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	WIFI SAR (W/Kg)	GSM1900 SAR(W/Kg)	Σ SAR (W/Kg)
Head SAR	Right Cheek	0.300	0.410	0.710	Head SAR	Right Cheek	0.300	0.591	0.891
	Right Tilt	0.359	0.214	0.573		Right Tilt	0.359	0.170	0.529
	Left Cheek	0.349	0.544	0.893		Left Cheek	0.349	0.601	0.950
	Left Tilt	0.444	0.222	0.666		Left Tilt	0.444	0.157	0.601
Simult Tx	Configuration	WIFI SAR (W/Kg)	WCDMA850 SAR(W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	WIFI SAR (W/Kg)	WCDMA1900 SAR(W/Kg)	Σ SAR (W/Kg)
Head SAR	Right Cheek	0.300	0.339	0.639	Head SAR	Right Cheek	0.300	0.707	1.007
	Right Tilt	0.359	0.159	0.518		Right Tilt	0.359	0.222	0.581
	Left Cheek	0.349	0.479	0.828		Left Cheek	0.349	0.894	1.243
	Left Tilt	0.444	0.178	0.622		Left Tilt	0.444	0.232	0.676

Table 8.8 Simultaneous Transmission Summation for 2G, 3G Data and WIFI


Simult Tx	Configuration	WIFI SAR (W/Kg)	GSM850 SAR(W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	WIFI SAR (W/Kg)	GSM1900 SAR(W/Kg)	Σ SAR (W/Kg)
Body SAR	Back	0.142	0.467	0.609	Body SAR	Back	0.142	0.225	0.367
Simult Tx	Configuration	WIFI SAR (W/Kg)	WCDMA850 SAR(W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	WIFI SAR (W/Kg)	WCDMA1900 SAR(W/Kg)	Σ SAR (W/Kg)
Body SAR	Back	0.142	0.219	0.361	Body SAR	Back	0.142	0.154	0.296

Conclusion

The above tables represent the worst-case simultaneous transmission scenarios possible with this device.

The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. Therefore, no volumetric SAR summation is required since the numerical sums are below the limit.

Based on the output power, antenna separation distance, and Body SAR, a stand-alone BT SAR test is not required. The summation of BT SAR and Licensed Transmitter SAR is 0.467 + 0 = 0.467, which is less than 1.6 W/Kg, therefore, a simultaneous SAR evaluation is not required.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	29 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.1 GSM850 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	SAR Level (W/kg)
MHz	Ch		Start	End					
836.6	190	GSM850	32.44	32.42	Right	Cheek/Touch	Intenna	Standard	0.410
836.6	190	GSM850	32.48	32.52	Right	Ear/Tilt 15°	Intenna	Standard	0.214
836.6	190	GSM850	32.40	32.45	Left	Cheek/Touch	Intenna	Standard	0.544
836.6	190	GSM850	32.45	32.39	Left	Ear/Tilt 15°	Intenna	Standard	0.222
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2cm
- Battery is fully charged for all readings.
- Test Configuration Manu. Test Codes Base Station Simulator
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	30 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.2 GPRS850 Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Test Position	Antenna Type	Battery	Bar	Tx GPRS Slots	SAR Level (W/kg)
MHz	Ch		Start	End						
836.6	190	GSM850	31.95	32.02	1.5 cm [w/o Holster]	Intenna	Standard	Body	2	0.467
836.6	190	GSM850	30.15	30.24	1.5 cm [w/o Holster]	Intenna	Standard	Body	3	0.466
836.6	190	GSM850	29.10	29.07	1.5 cm [w/o Holster]	Intenna	Standard	Body	4	0.465
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration With Holster Without Holster
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM850 mode. Hence, the GSM850 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	31 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.3 GSM1900 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	SAR Level (W/kg)
MHz	Ch		Start	End					
1880	661	GSM1900	29.36	29.31	Right	Cheek/Touch	Intenna	Standard	0.591
1880	661	GSM1900	29.32	29.29	Right	Ear/Tilt 15°	Intenna	Standard	0.170
1880	661	GSM1900	29.28	29.36	Left	Cheek/Touch	Intenna	Standard	0.601
1880	661	GSM1900	29.21	29.28	Left	Ear/Tilt 15°	Intenna	Standard	0.157
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration Manu. Test Codes Base Station Simulator
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	32 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.4 GPRS1900 Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Test Position	Antenna Type	Battery	Bar	Tx GPRS Slots	SAR Level (W/kg)
MHz	Ch		Start	End						
1880	661	GSM1900	28.78	28.82	1.5 cm [w/o Holster]	Intenna	Standard	Body	2	0.225
1880	661	GSM1900	26.37	26.30	1.5 cm [w/o Holster]	Intenna	Standard	Body	3	0.202
1880	661	GSM1900	25.39	25.43	1.5 cm [w/o Holster]	Intenna	Standard	Body	4	0.219
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration With Holster Without Holster
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM1900 mode. Hence, the GSM1900 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	33 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.5 WCDMA850 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	SAR Level (W/kg)
MHz	Ch		Start	End					
836.6	4183	WCDMA850	22.5	22.48	Right	Cheek/Touch	Intenna	Standard	0.339
836.6	4183	WCDMA850	22.52	22.50	Right	Ear/Tilt 15°	Intenna	Standard	0.159
836.6	4183	WCDMA850	22.56	22.59	Left	Cheek/Touch	Intenna	Standard	0.479
836.6	4183	WCDMA850	22.51	22.56	Left	Ear/Tilt 15°	Intenna	Standard	0.178
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration Manu. Test Codes Base Station Simulator
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA mode was tested under RMC 12.2 kbps with HSPA Inactive.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	34 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.6 WCDMA850 Body SAR Results(Without Holster)

Frequency		Mode	Conducted Power		Test Position	Antenna Type	Battery	Bar	SAR Level (W/kg)
MHz	Ch		Start	End					
836.6	4183	WCDMA850	22.49	22.55	1.5 cm [w/o Holster]	Intenna	Standard	Body	0.219
836.6	4183	WCDMA850	22.92	22.87	1.5 cm [w/o Holster]	Intenna	Standard	Body	*0.211
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2cm
- Battery is fully charged for all readings.
- Test Configuration With Holster Without Holster
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA mode in Body SAR was tested under RMC 12.2 kbps with HSDPA Inactive.
- * WCDMA mode in Body SAR was tested under RMC 12.2 kbps with HSDPA Active. According to "SAR Measurement Procedures for 3G Devices", May 2006, HSDPA active mode was measured because it was more 0.25dB higher than HSDPA inactive mode.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	35 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.7 WCDMA1900 Head SAR Results

Frequency		Mode	Conducted Power		Side	Test Position	Antenna Type	Battery	SAR Level (W/kg)
MHz	Ch		Start	End					
1880	9400	WCDMA1900	22.61	22.68	Right	Cheek/Touch	Intenna	Standard	0.707
1880	9400	WCDMA1900	22.58	22.63	Right	Ear/Tilt 15 °	Intenna	Standard	0.222
1852.4	9262	WCDMA1900	22.07	22.11	Left	Cheek/Touch	Intenna	Standard	0.802
1880	9400	WCDMA1900	22.60	22.66	Left	Cheek/Touch	Intenna	Standard	0.894
1907.6	9538	WCDMA1900	22.82	22.88	Left	Cheek/Touch	Intenna	Standard	0.751
1880	9400	WCDMA1900	22.55	22.60	Left	Ear/Tilt 15 °	Intenna	Standard	0.232
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- All modes of operation were investigated, and the worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration Manu. Test Codes Base Station Simulator
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- WCDMA mode was tested under RMC 12.2 kbps with HSPA Inactive.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	36 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.8 WCDMA1900 Body SAR Results(Without Holster)

Frequency		Mode	Conducted Power		Test Position	Antenna Type	Battery	Bar	SAR Level (W/kg)
MHz	Ch		Start	End					
1880	9400	WCDMA1900	22.52	22.58	1.5 cm [w/o Holster]	Intenna	Standard	Body	0.154
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population					1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. All modes of operation were investigated, and the worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plot.
4. Liquid tissue depth is 15.2 ± 0.2 cm
5. Battery is fully charged for all readings.
6. Test Configuration With Holster Without Holster
7. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
8. WCDMA mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	37 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.9WLAN Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Data Rate (Mbps)	SAR Level (W/kg)
MHz	Ch		Start	End						
2437	6	WLAN	17.57	17.58	Right	Cheek/Touch	Intenna	Standard	1	0.300
2437	6	WLAN	17.52	17.55	Right	Ear/Tilt 15°	Intenna	Standard	1	0.359
2437	6	WLAN	17.58	17.50	Left	Cheek/Touch	Intenna	Standard	1	0.349
2437	6	WLAN	17.54	17.60	Left	Ear/Tilt 15°	Intenna	Standard	1	0.444
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. All modes of operation were investigated, and the worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plot.
4. Liquid tissue depth is 15.2 ± 0.2cm
5. Battery is fully charged for all readings.
6. Test Configuration Manu. Test Codes Base Station Simulator
7. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes: Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
8. WLAN Transmission was verified using a spectrum analyzer.


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	38 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

8.10 WLAN Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Test Position	Antenna Type	Battery	Bar	Data Rate (Mbps)	SAR Level (W/kg)
MHz	Ch		Start	End						
2437	6	WLAN	17.48	17.52	1.5 cm [w/o Holster]	Intenna	Standard	Body	1	0.142
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. All modes of operation were investigated, and the worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plot.
4. Liquid tissue depth is 15.2 ± 0.2 cm
5. Battery is fully charged for all readings.
6. Test Configuration With Holster Without Holster
7. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes: Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
8. WLAN Transmission was verified using a spectrum analyzer.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	39 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

9. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

The highest reported SAR values are as follows:


GSM850: Head: 0.544W/Kg : Body-worn: 0.467W/Kg

GSM1900: Head: 0.601W/Kg : Body-worn: 0.225W/Kg

WCDMA850: Head: 0.479W/Kg : Body-worn: 0.219W/Kg


WCDMA1900: Head: 0.894W/Kg : Body-worn: 0.154W/Kg

WLAN: Head: 0.444W/Kg : Body-worn: 0.142W/Kg


FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	40 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

10. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	41 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225

FCC ID: A3LGTS3770L	Report Number: FI-122-S1		Page	42 of 42
 SAMSUNG Electronics CO. LTD	EUT Type	850/1900 GSM/GPRS/WCDMA/HSDPA Phone with Bluetooth, WLAN and EDGE Rx only	Issue Date	Jun.13, 2011

APPENDIX A

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. A.1) .

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure A.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where :

- σ = conductivity of the tissue-simulant material (S/m)
- ρ = mass density of the tissue-simulant material (kg/m³)
- E = Total RMS electric field strength (V/m)

Note: The primary factors that control rate or energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

APPENDIX B

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in **K. Pokovic, T.Schmid, N. Kuster, *Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies*, ICECOM97, Oct. 1997, pp. 120-124** with an accuracy better than +/-10%. The spherical isotropy was evaluated with the procedure described in **K. Pokovic, T.Schmid, N. Kuster, *E-field Probe with improved isotropy in brain simulating liquids*, Proceedings of the ELMAR, Zadar, June 23-25, 1996, pp. 172-175** and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. B.1), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe (see Fig. B.2).

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{p}$$

where:

Δt = exposure time (30 seconds)

C = heat capacity of tissue (brain or muscle).

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

where:

σ = simulated tissue conductivity

p = Tissue density (1.25 g/cm³ for brain tissue)

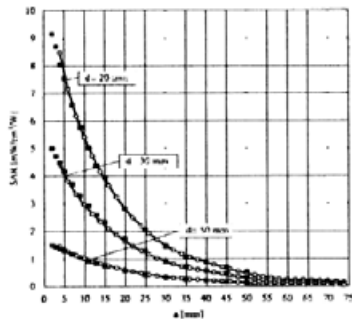


Figure B.1. E-Field and Temperature measurements at 900MHz

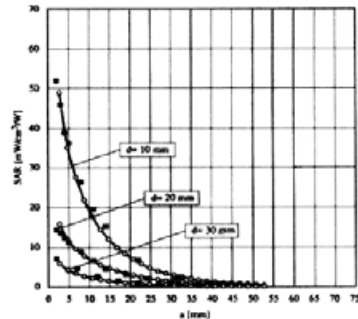


Figure B.2. E-Field and temperature measurements at 1.9GHz

APPENDIX C

ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is the exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table C.1 Safety Limits for Partial Body Exposure

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL PEAK SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

APPENDIX D

The Validation Measurements

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.05.26

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 2.69 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.9 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

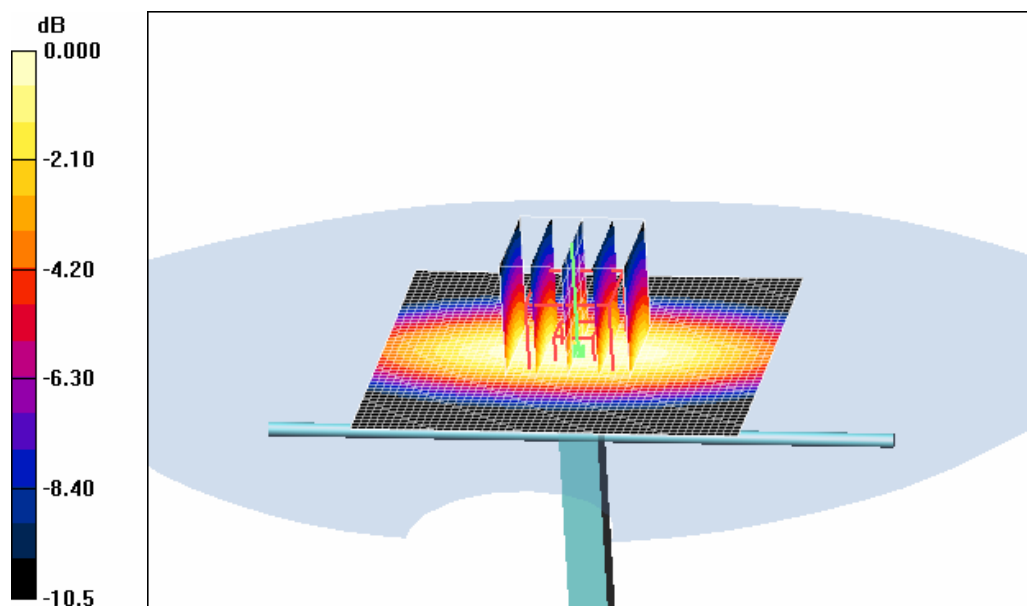

0 dB = 2.64mW/g

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.05.26

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.3;Test Date-26/May/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 2.64 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.3 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.55 mW/g

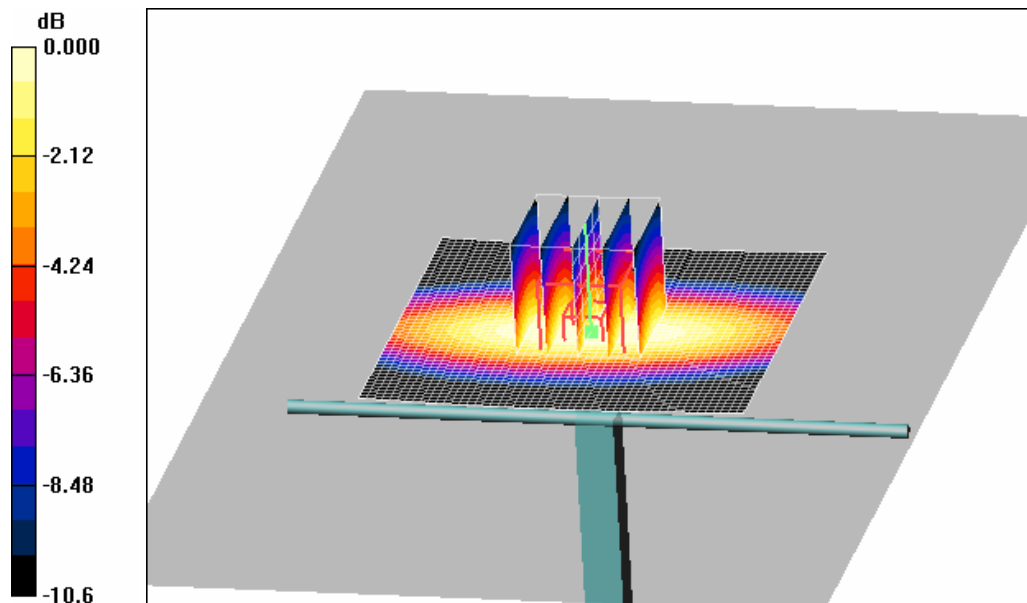

0 dB = 2.55mW/g

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.05.27

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 5.71 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.7 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 7.99 W/kg

SAR(1 g) = 4.37 mW/g; SAR(10 g) = 2.29 mW/g

Maximum value of SAR (measured) = 4.90 mW/g

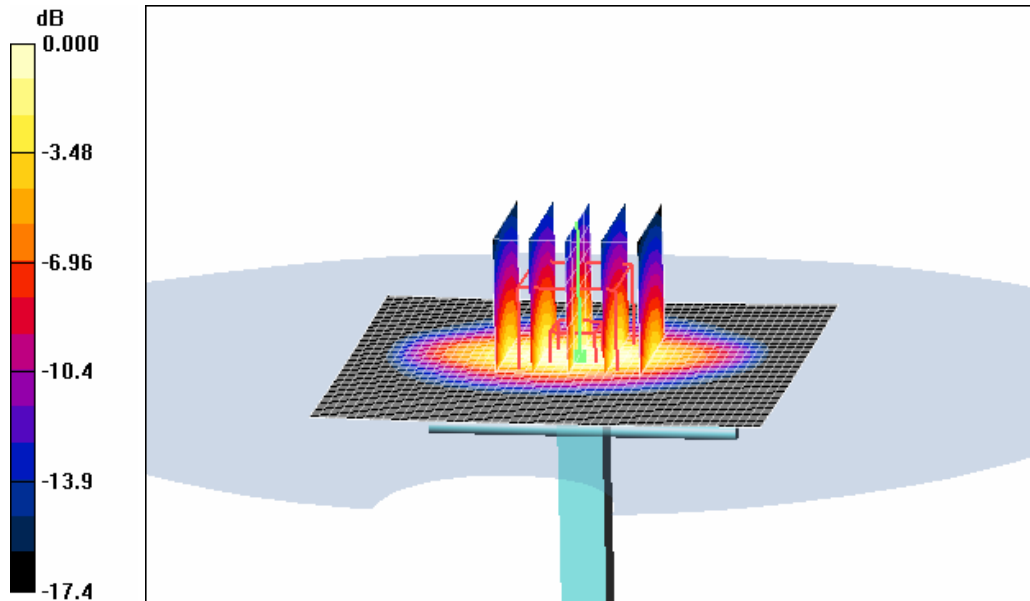

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.05.27

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-27/May/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 5.50 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.3 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 7.99 W/kg

SAR(1 g) = 3.9 mW/g; SAR(10 g) = 2.06 mW/g

Maximum value of SAR (measured) = 4.34 mW/g

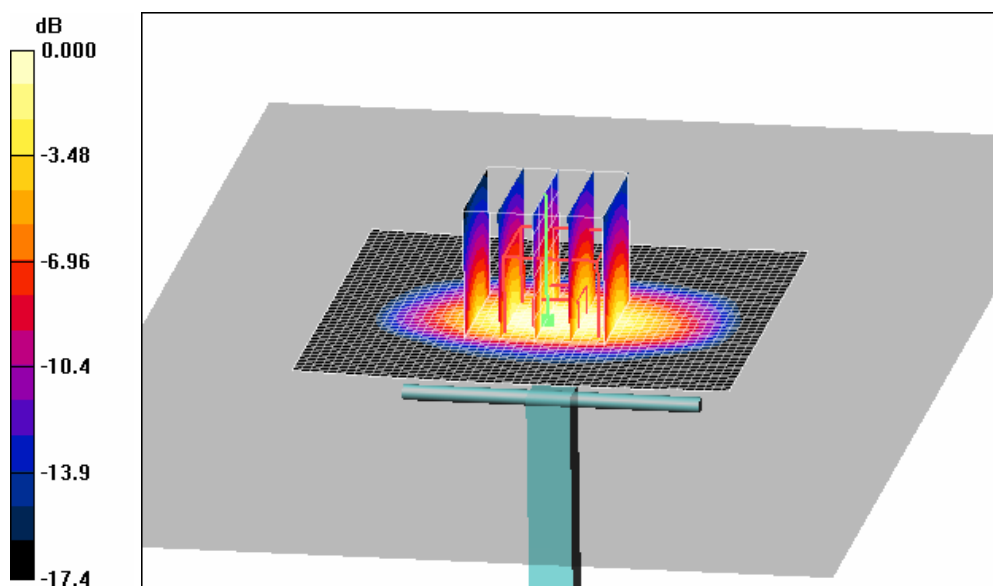

0 dB = 4.34mW/g

DUT: Dipole 2450 MHz; Serial: 807

Program Name: 2450MHz Dipole Validation 2011.05.30

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 7.32 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.64 mW/g; SAR(10 g) = 2.58 mW/g

Maximum value of SAR (measured) = 6.39 mW/g

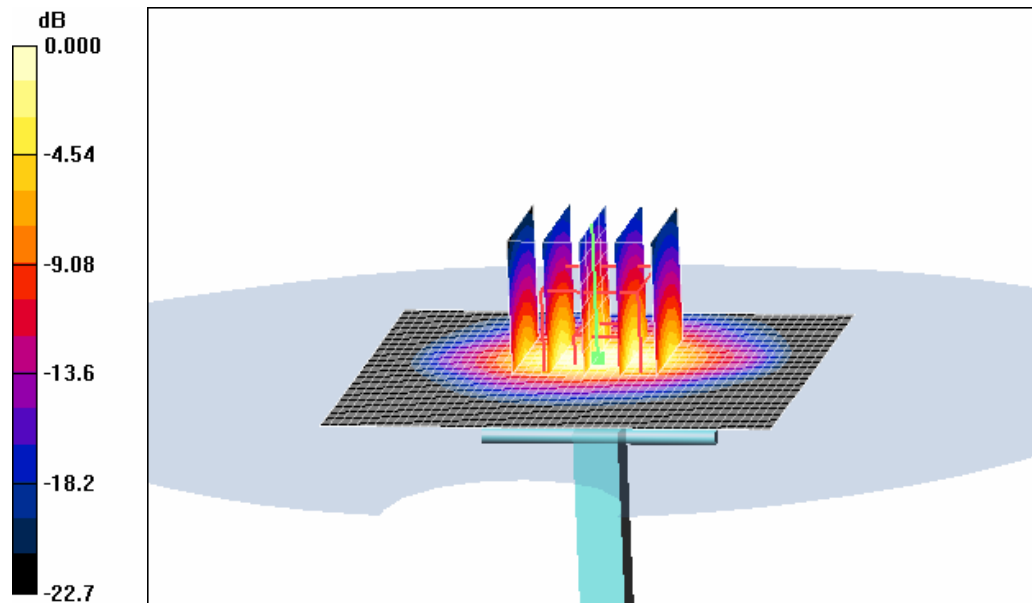

0 dB = 6.39mW/g

DUT: Dipole 2450 MHz; Serial: 807

Program Name: 2450MHz Dipole Validation 2011.05.30

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-30/May/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 6.12 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.0 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.15 mW/g; SAR(10 g) = 2.38 mW/g

Maximum value of SAR (measured) = 5.85 mW/g

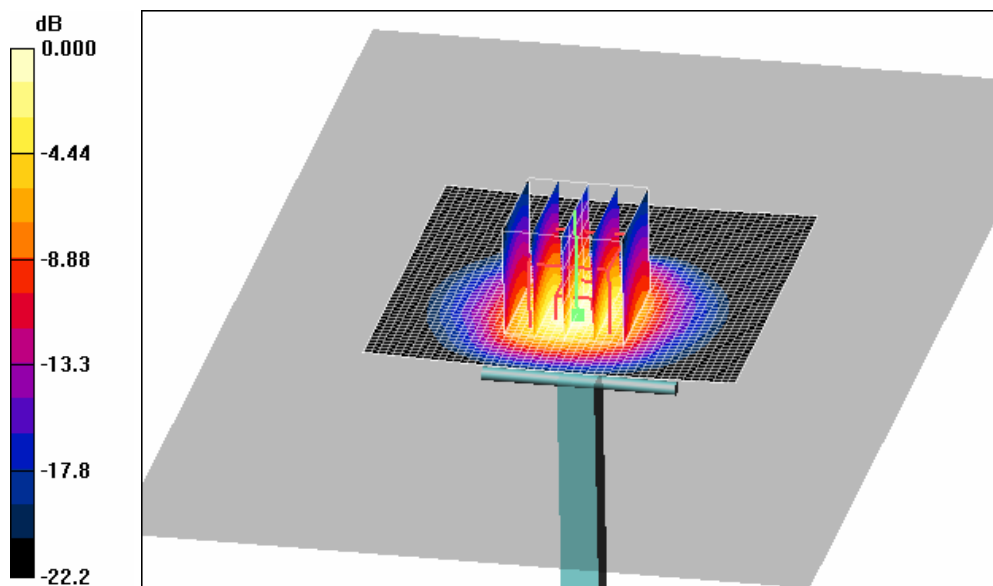

0 dB = 5.85mW/g

APPENDIX E

Plots of The SAR Measurements

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM850 Right (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.469 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.434 mW/g

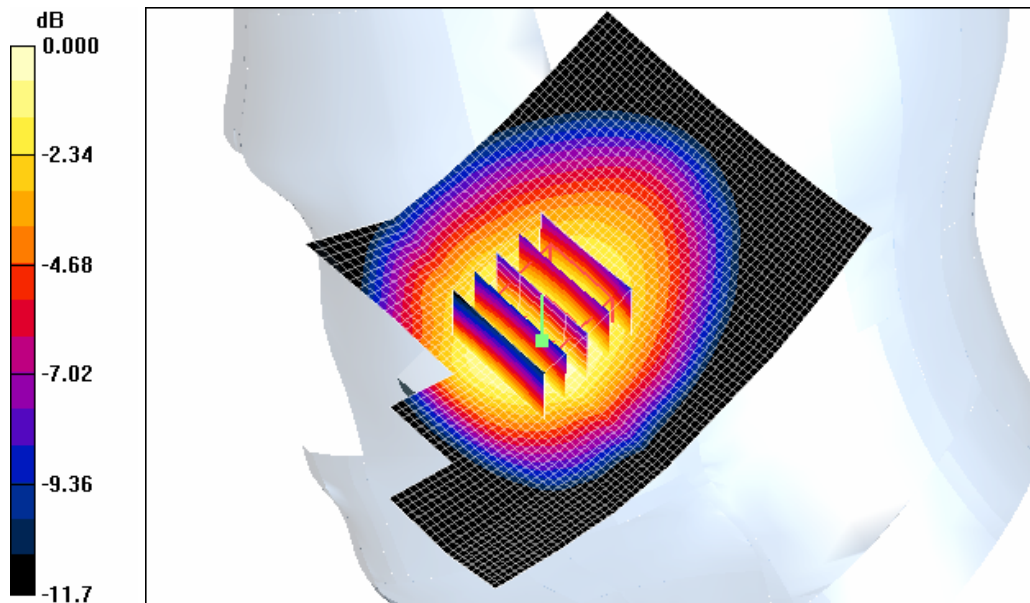

0 dB = 0.434mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM850 Right (Job No. : FI-122)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.229 mW/g

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

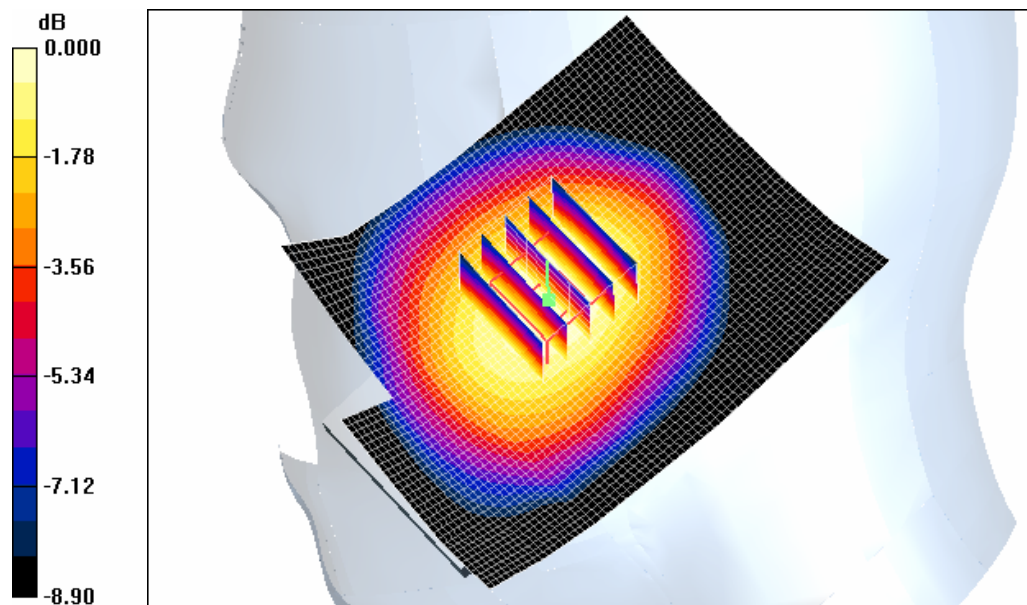

0 dB = 0.226mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM850 Left (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.629 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.6 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

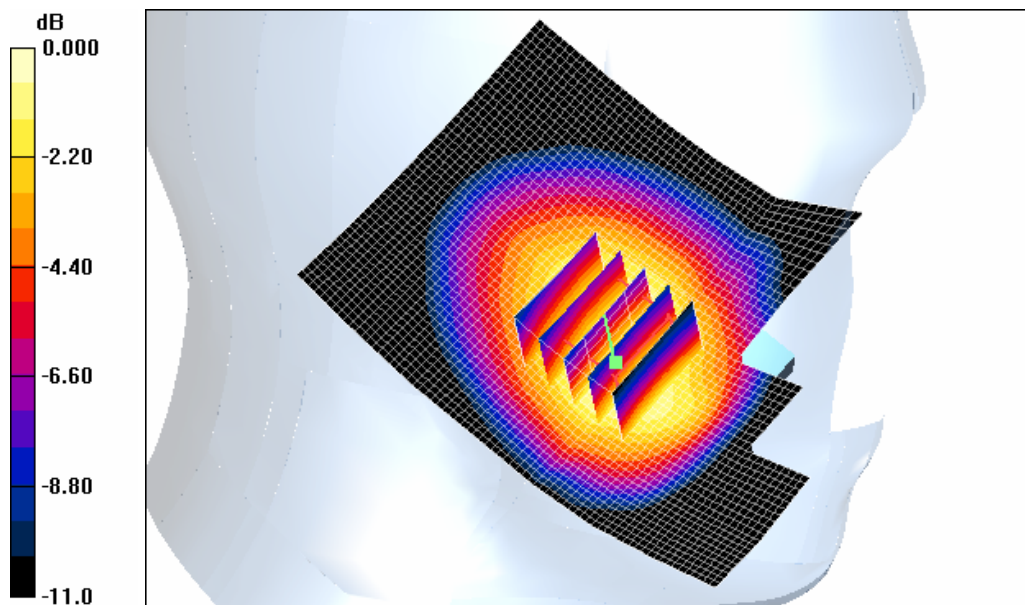

0 dB = 0.577mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM850 Left (Job No. : FI-122)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.237 mW/g

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.233 mW/g

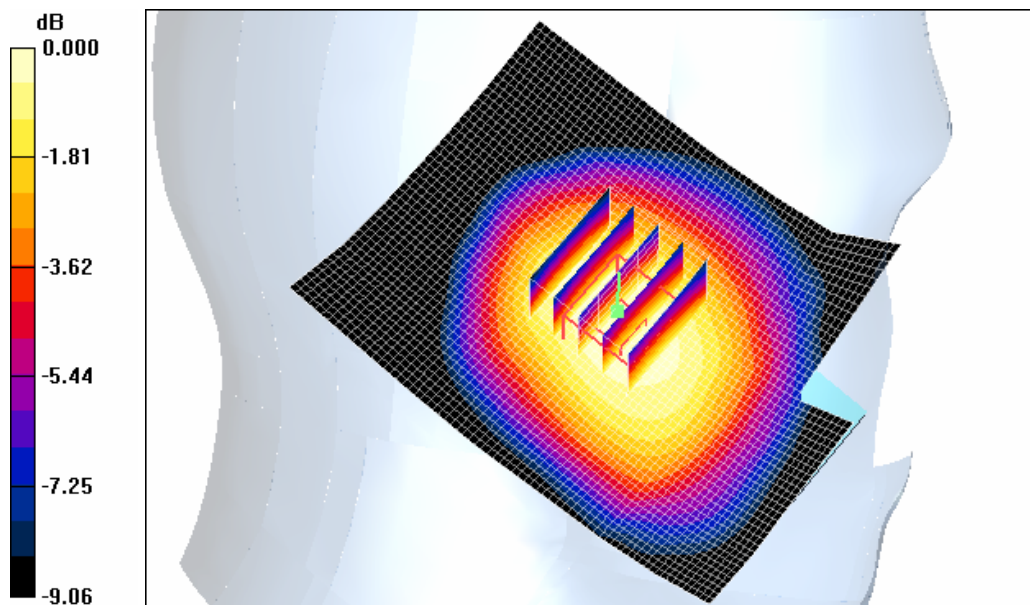

0 dB = 0.233mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM850 Left (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.629 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

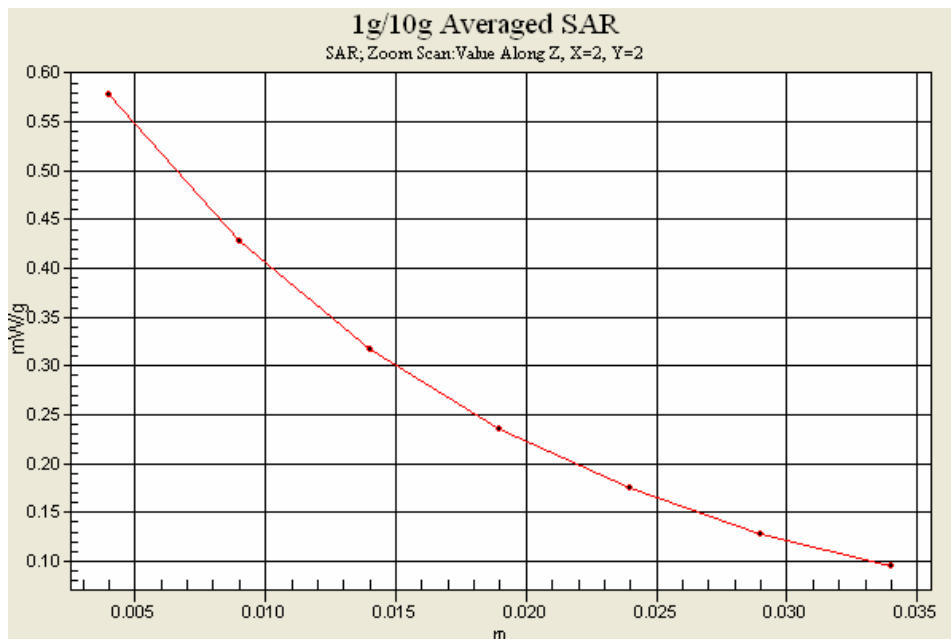

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GPRS850 Body (Job No. : FI-122)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.3;Test Date-26/May/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.525 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.0 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.495 mW/g

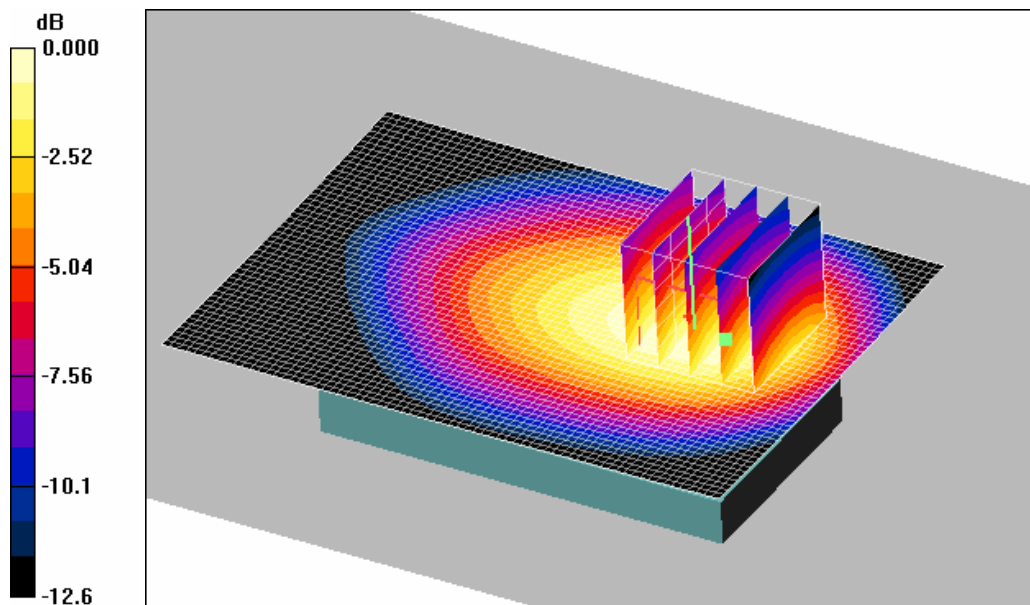

0 dB = 0.495mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GPRS850 Body (Job No. : FI-122)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.3;Test Date-26/May/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.525 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard 2Tx/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.0 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.495 mW/g

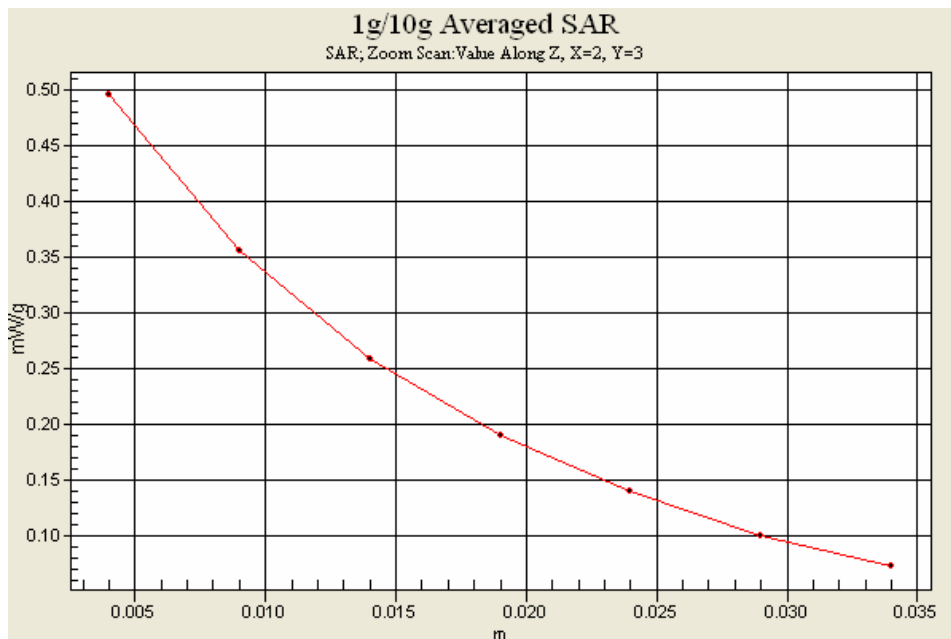

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM1900 Right (Job No. : FI-122)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.896 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

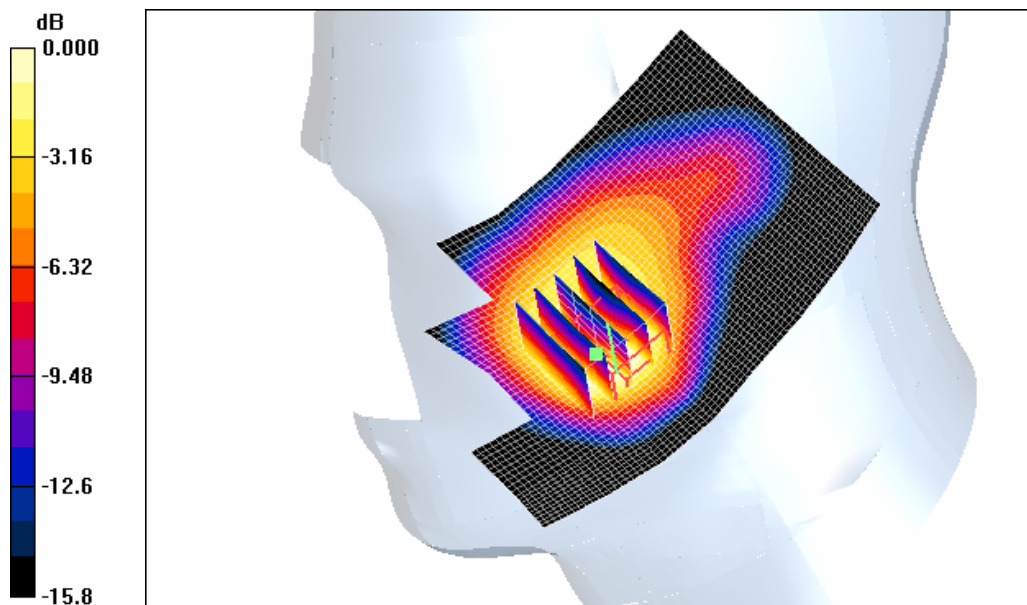

0 dB = 0.656mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM1900 Right (Job No. : FI-122)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn686; Calibrated: 2011-03-18

- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.189 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

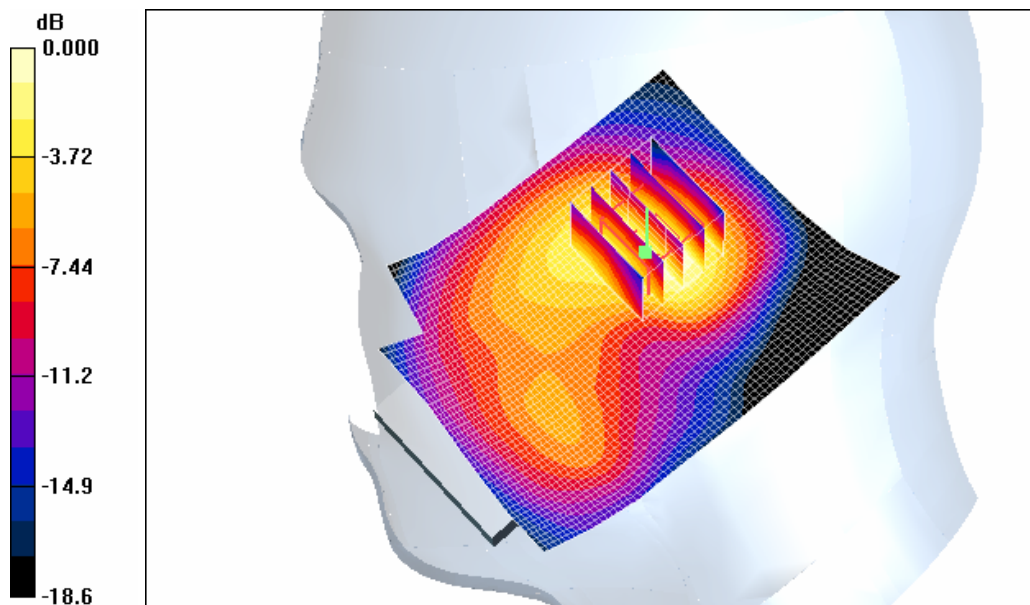

0 dB = 0.177mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM1900 Left (Job No. : FI-122)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.683 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

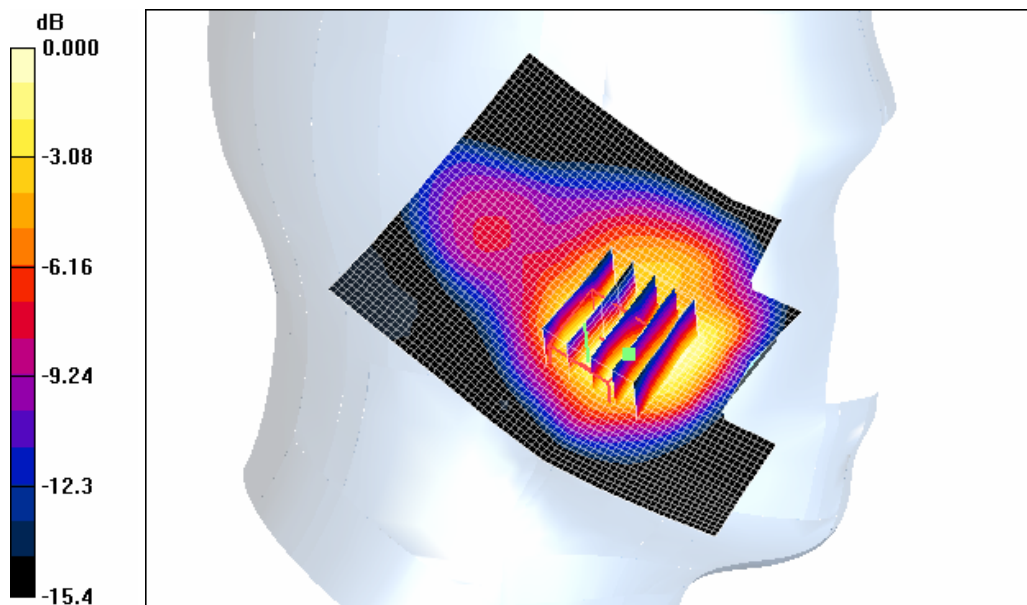

0 dB = 0.656mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM1900 Left (Job No. : FI-122)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.186 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.52 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.169 mW/g

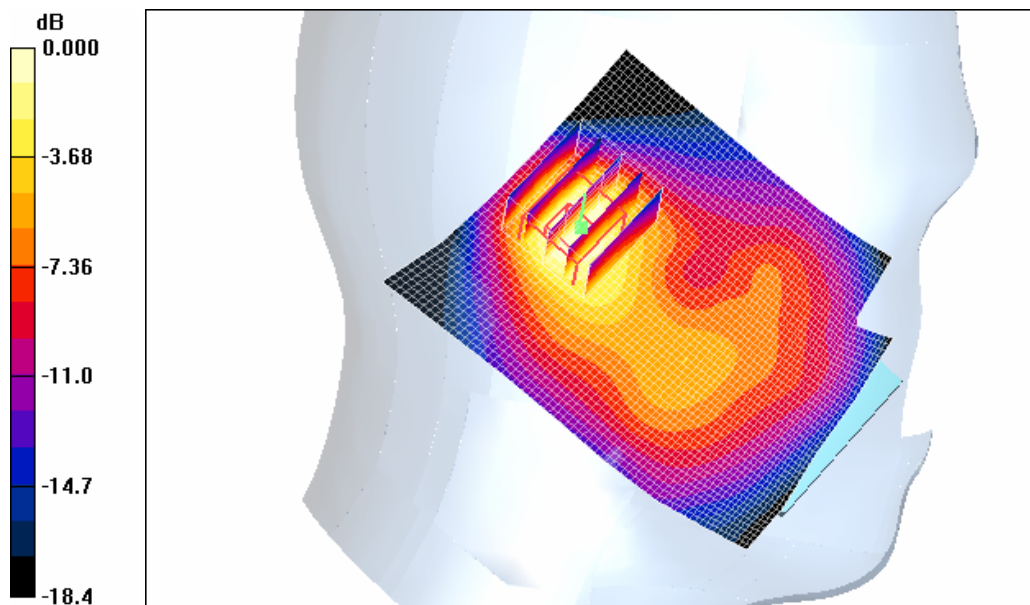

0 dB = 0.169mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GSM1900 Left (Job No. : FI-122)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.683 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

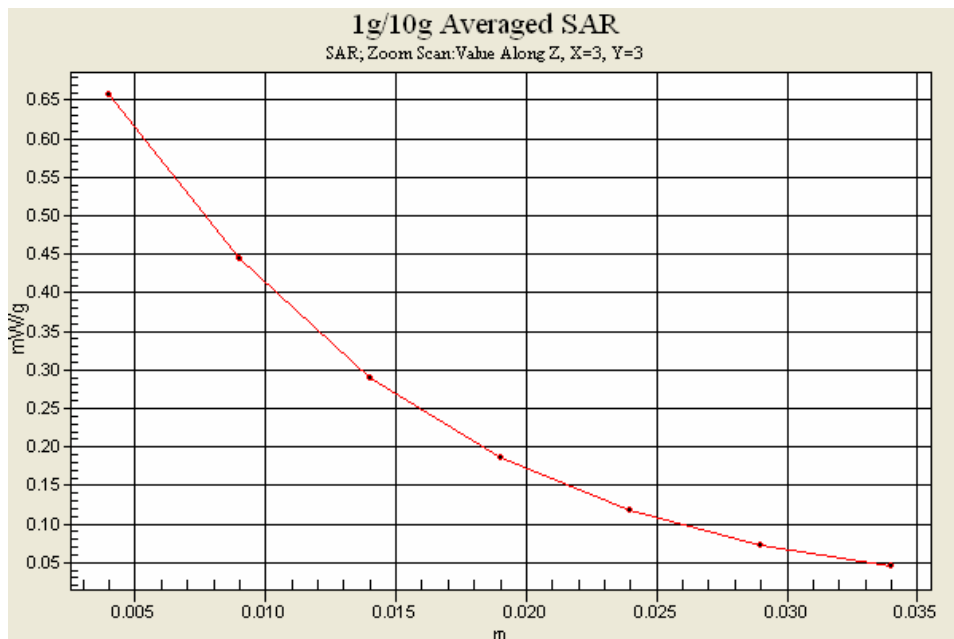

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GPRS1900 Body (Job No. : FI-122)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-27/May/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.255 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx/Zoom Scan 2 (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.36 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

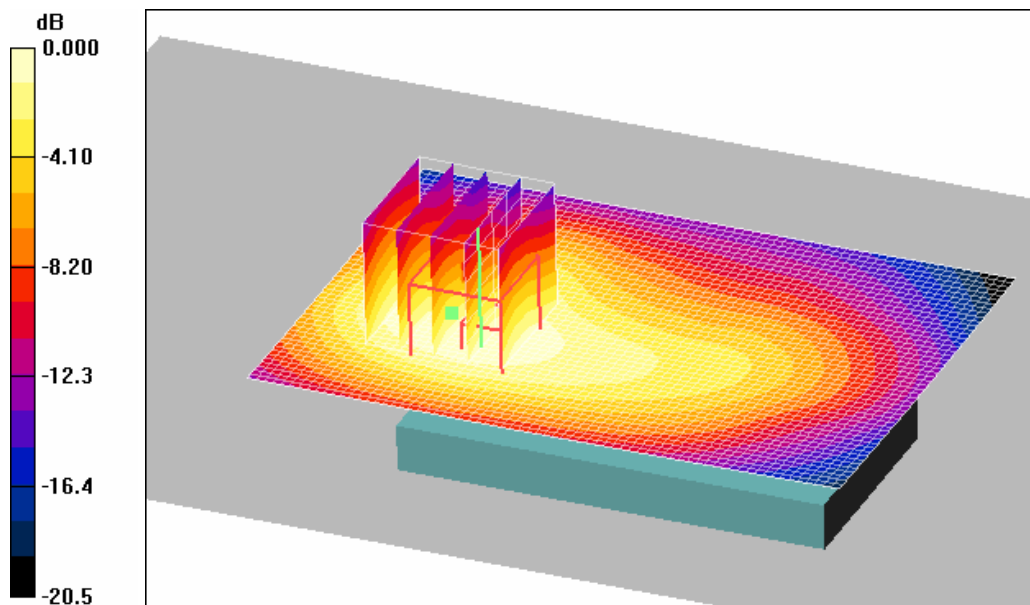

0 dB = 0.241mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L GPRS1900 Body (Job No. : FI-122)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-27/May/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.255 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard, 2Tx/Zoom Scan 2 (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.36 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

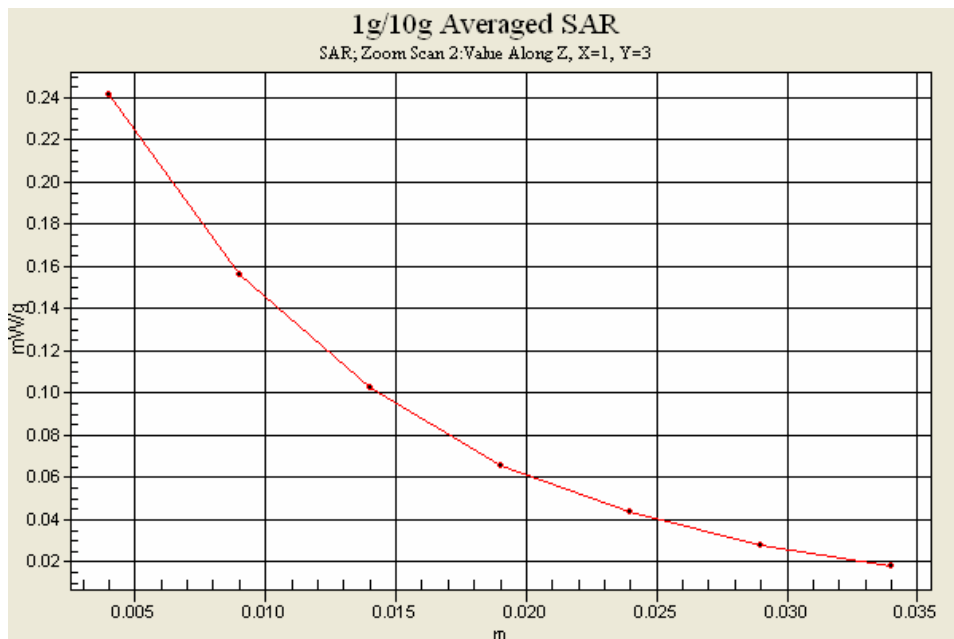

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA 850 Right (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.373 mW/g

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.4 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.358 mW/g

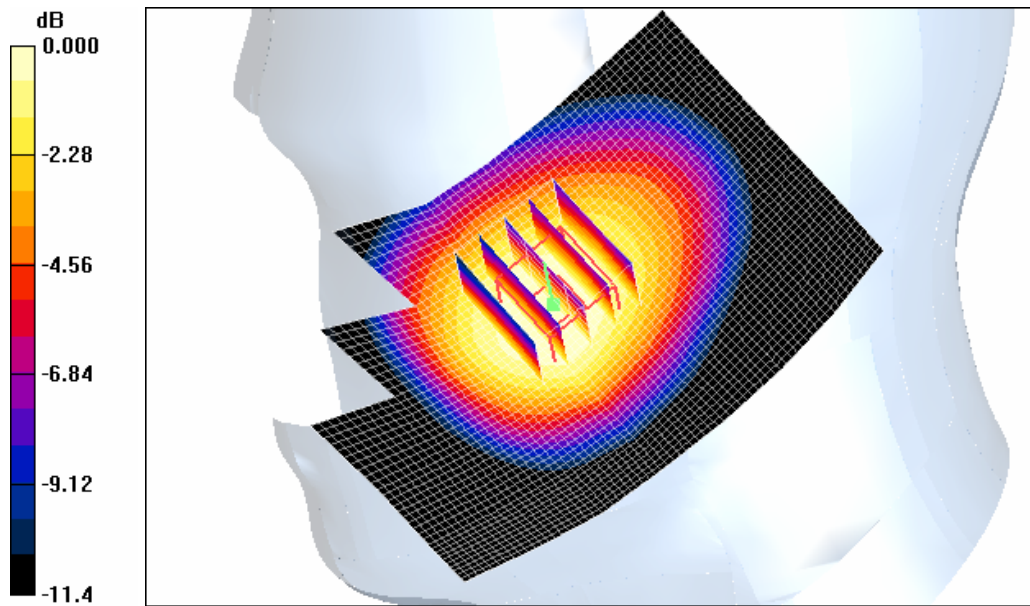

0 dB = 0.358mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA 850 Right (Job No. : FI-122)

Procedure Name: Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.172 mW/g

Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

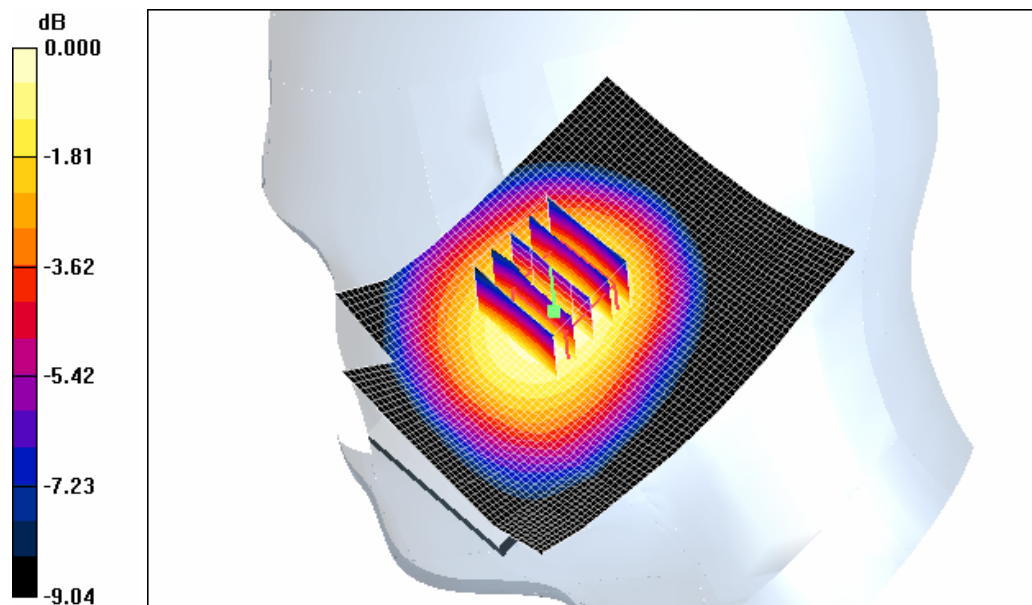

0 dB = 0.167mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA850 Left (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.571 mW/g

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.5 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

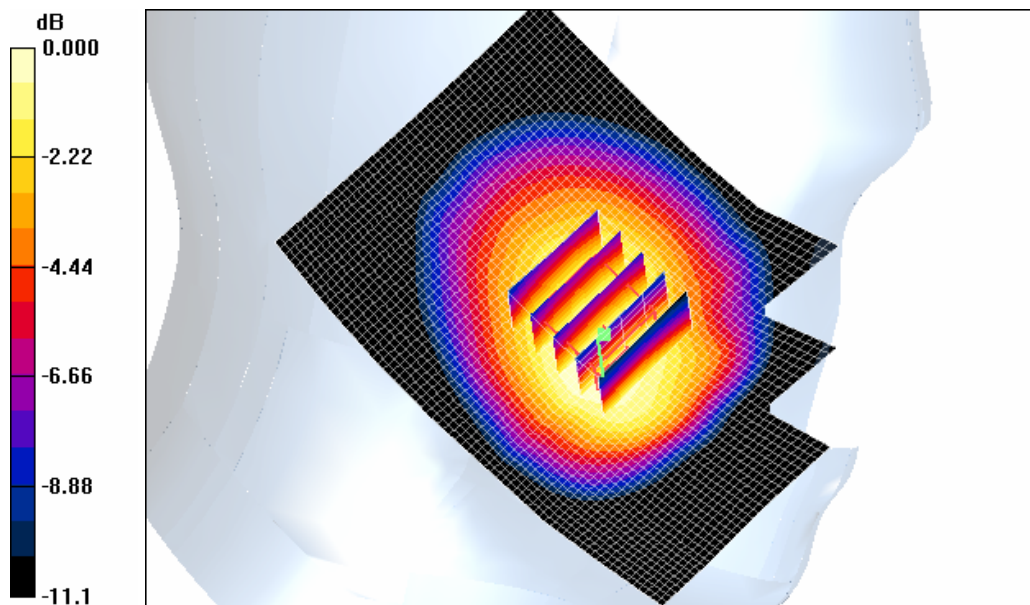

0 dB = 0.502mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA850 Left (Job No. : FI-122)

Procedure Name: Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.195 mW/g

Ear/Tilt, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.1 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

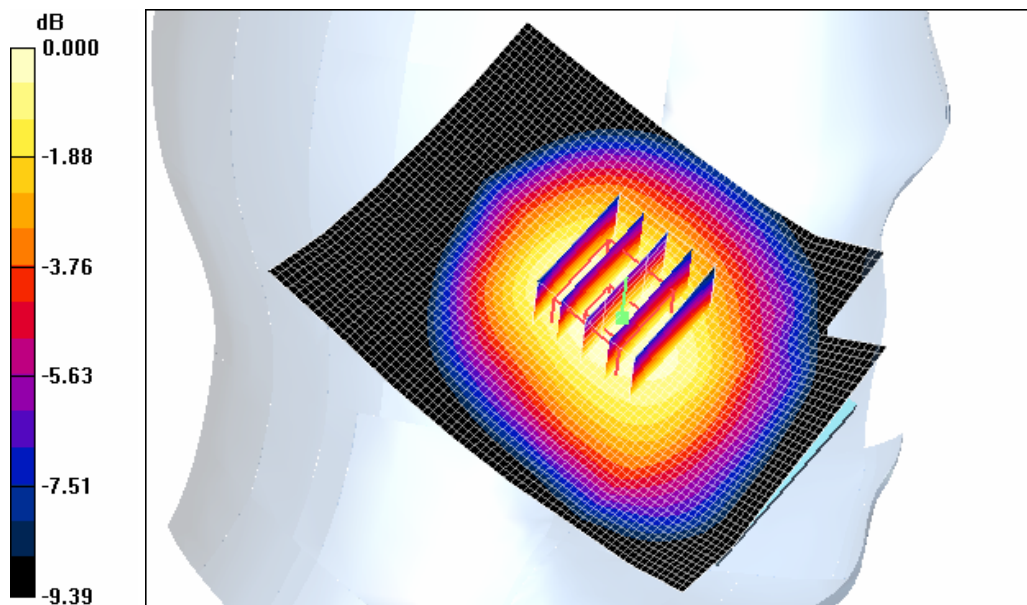

0 dB = 0.187mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA850 Left (Job No. : FI-122)

Procedure Name: Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.2;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.571 mW/g

Cheek/Touch, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

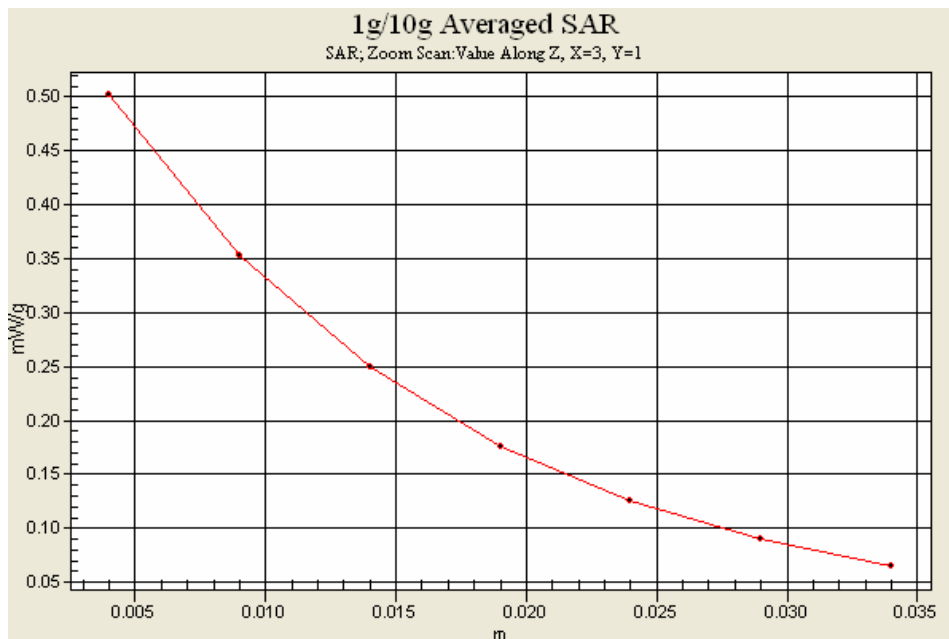

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA850 Body (Job No. : FI-122)

Procedure Name: Body, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.3;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.255 mW/g

Body, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

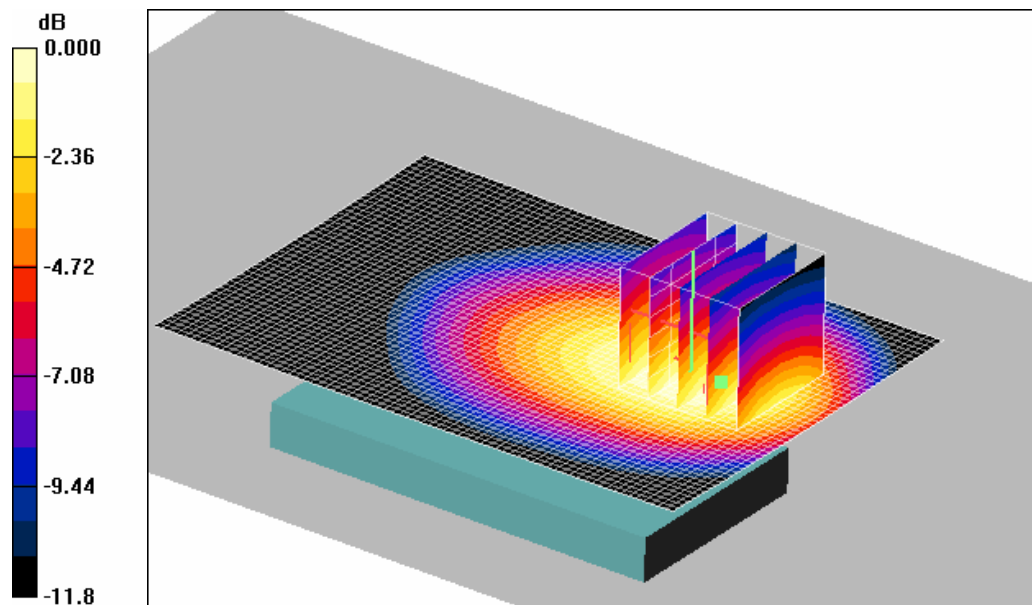

0 dB = 0.232mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA850 Body (Job No. : FI-122)

Procedure Name: Body, Ch.4183, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.6,Tissue Temp(celsius)-22.3;Test Date-26/May/2011

Communication System: W-CDMA 850; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.4183, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.255 mW/g

Body, Ch.4183, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

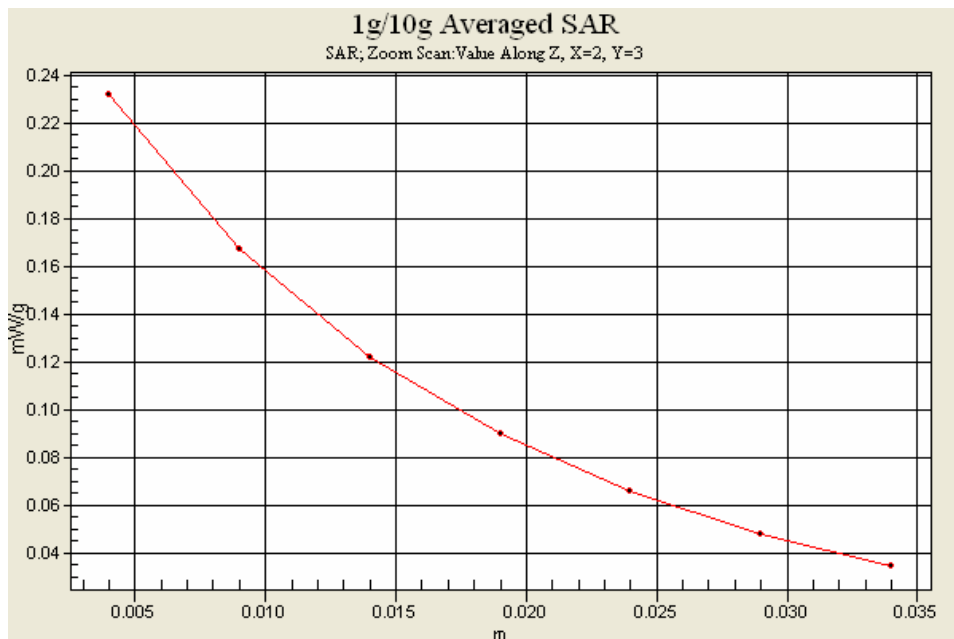

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Right (Job No.: FI-122)

Procedure Name: Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn686; Calibrated: 2011-03-18

- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.891 mW/g

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.756 mW/g

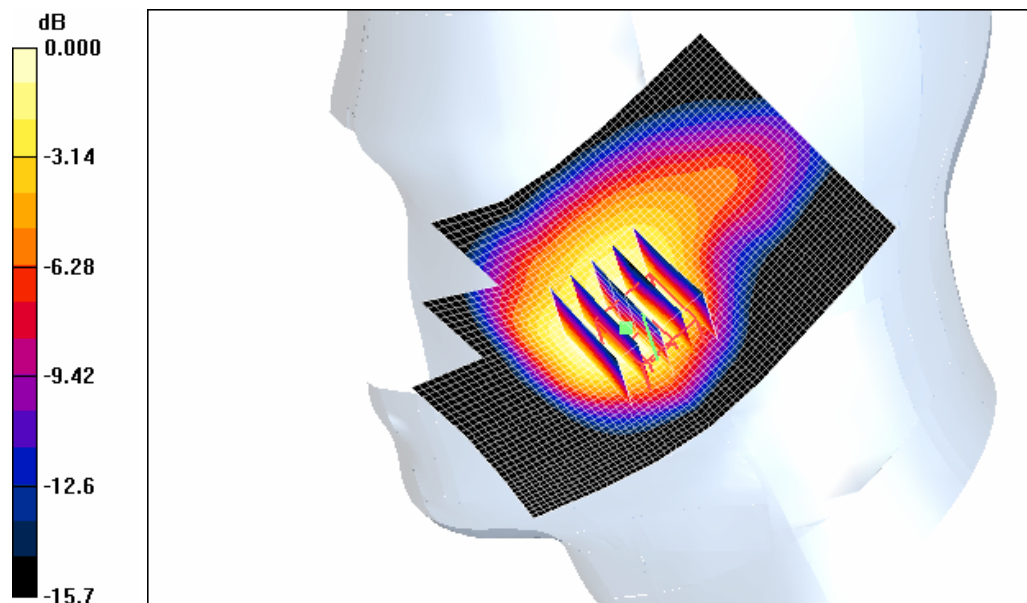

0 dB = 0.756mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Right (Job No.: FI-122)

Procedure Name: Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.235 mW/g

Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.246 mW/g

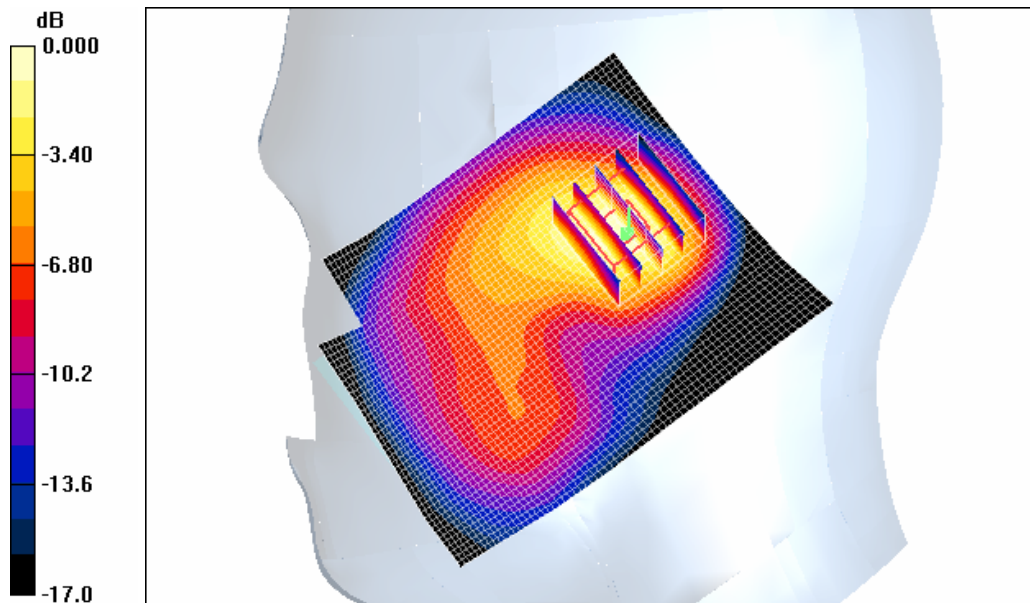

0 dB = 0.246mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Left (Job No.:FI-122)

Procedure Name: Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

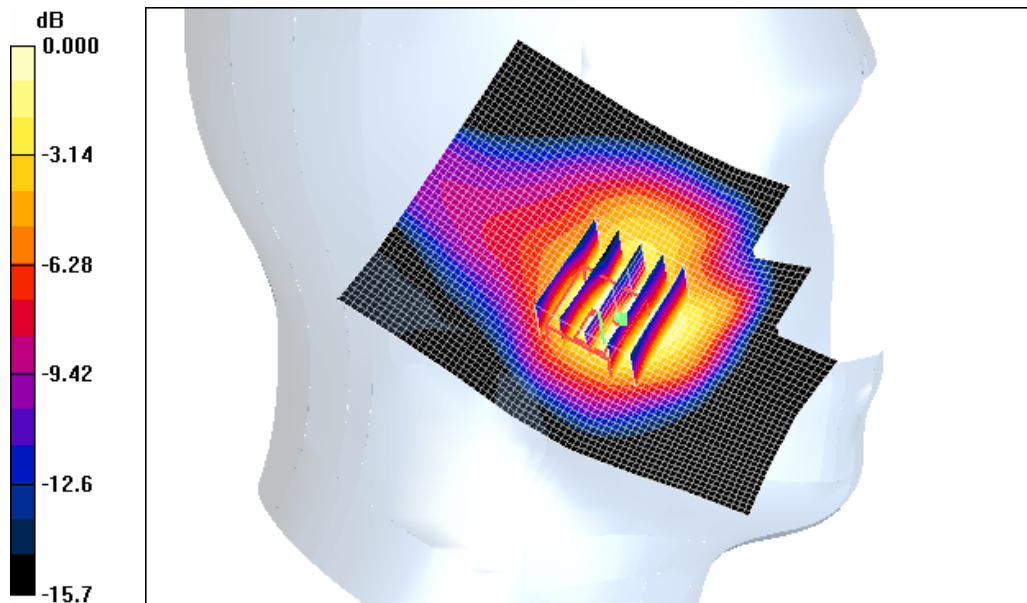

0 dB = 1.00mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Left (Job No.:FI-122)

Procedure Name: Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.264 mW/g


Ear/Tilt, Ch.9400, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

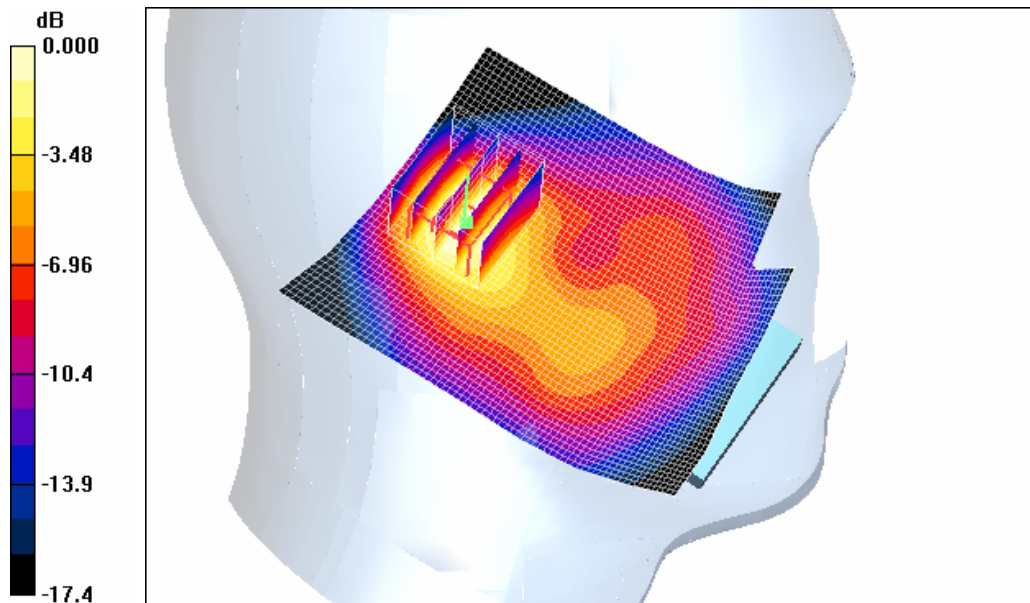

0 dB = 0.254mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Left (Job No.:FI-122)

Procedure Name: Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.3;Test Date-27/May/2011

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Cheek/Touch, Ch9400, Ant.Intenna, Bat.Satandard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

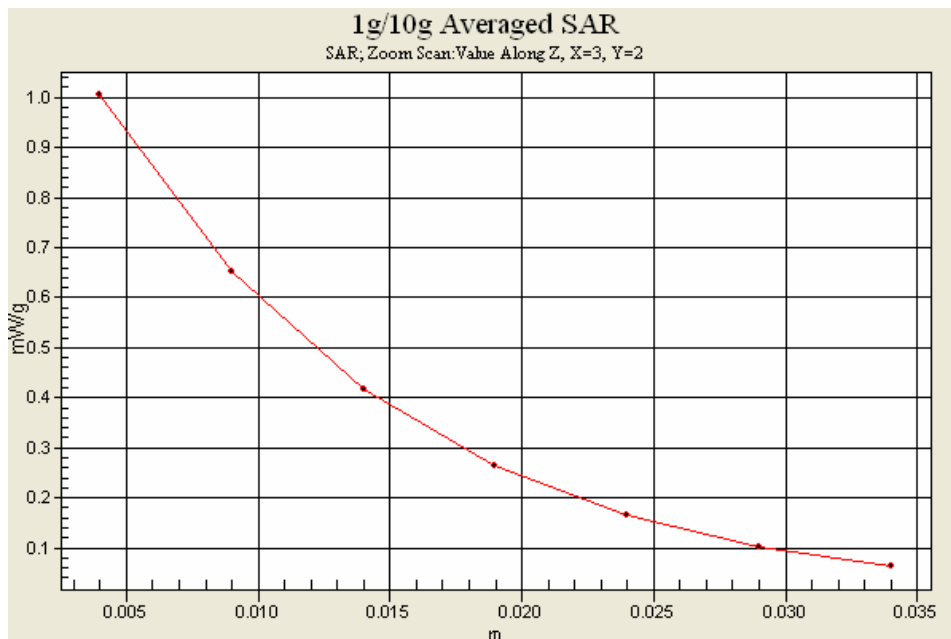

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Body (Job No. : FI-122)

Procedure Name: Body, Ch.9400, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-27/May/2011

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.9400, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.169 mW/g

Body, Ch.9400, Ant.Intenna, Bat.Standard/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.64 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

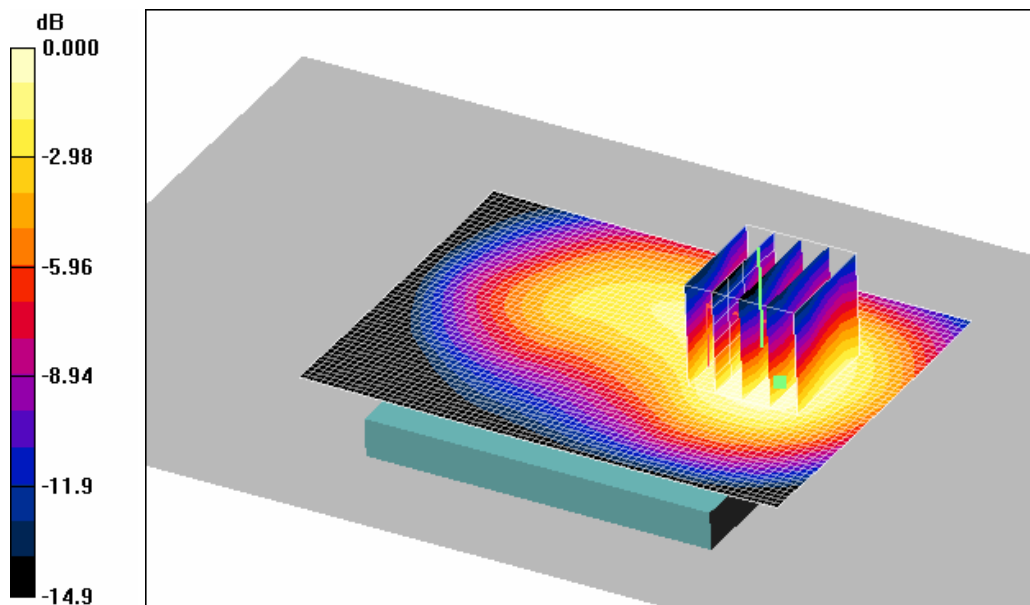

0 dB = 0.167mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WCDMA1900 Body (Job No. : FI-122)

Procedure Name: Body, Ch.9400, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-27/May/2011

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.9400, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.169 mW/g

Body, Ch.9400, Ant.Intenna, Bat.Standard/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.64 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

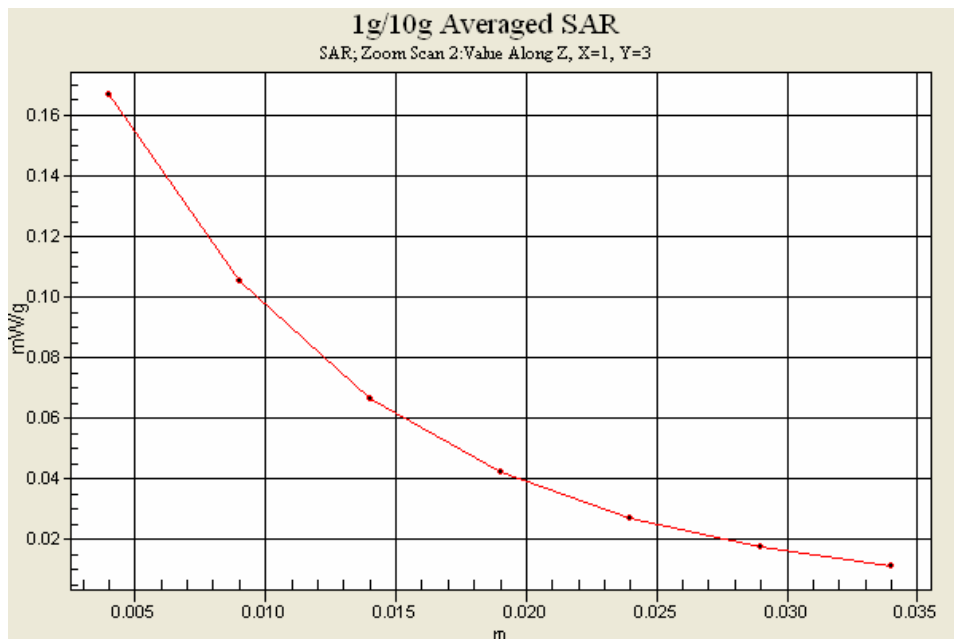

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WLAN Right(Job No. : FI-122)

Procedure Name: Cheek, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.332 mW/g

Cheek, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.346 mW/g

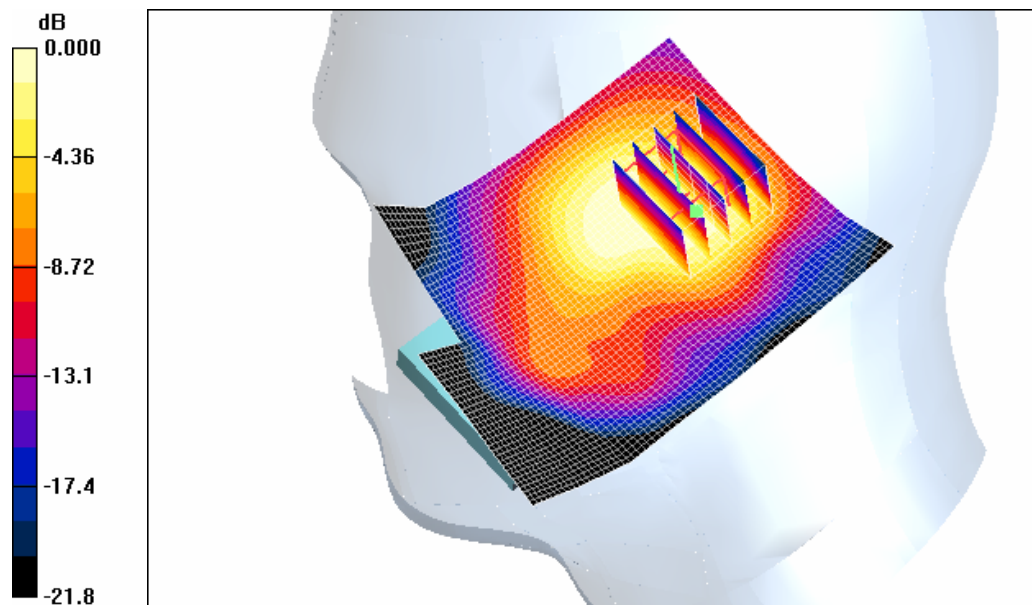

0 dB = 0.346mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WLAN Right(Job No. : FI-122)

Procedure Name: Tilted, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn686; Calibrated: 2011-03-18

- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilted, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.405 mW/g

Tilted, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

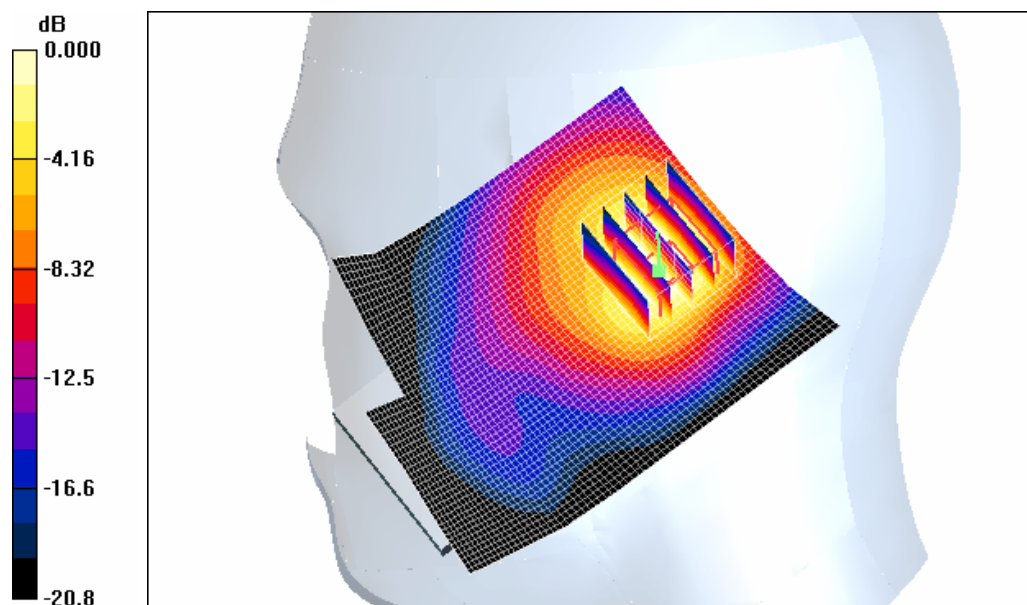

0 dB = 0.382mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3370L WLAN Left(Job No. : FI-122)

Procedure Name: Cheek, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.427 mW/g

Cheek, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

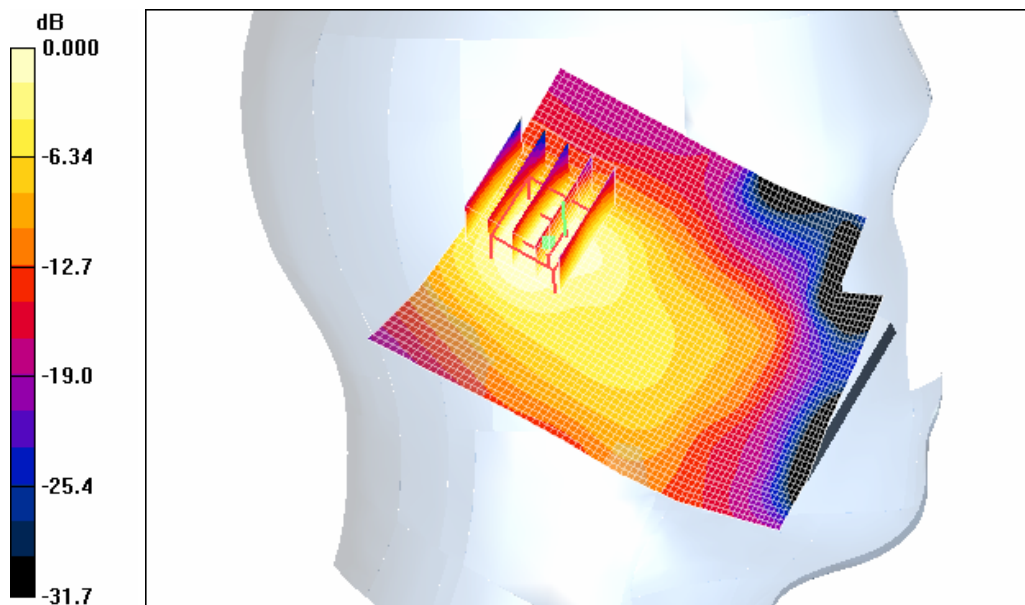

0 dB = 0.353mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3370L WLAN Left(Job No. : FI-122)

Procedure Name: Tilted, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilted, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.533 mW/g

Tilted, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.901 W/kg

SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.494 mW/g

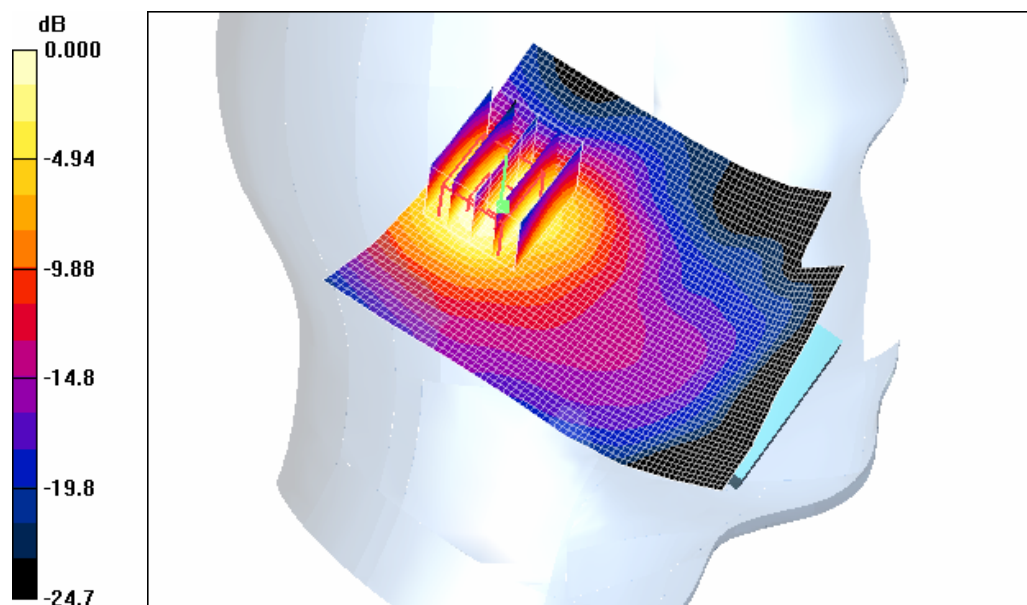

0 dB = 0.494mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3370L WLAN Left(Job No. : FI-122)

Procedure Name: Tilted, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.7,Tissue Temp(celsius)-22.2;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilted, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.533 mW/g


Tilted, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.901 W/kg

SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.494 mW/g

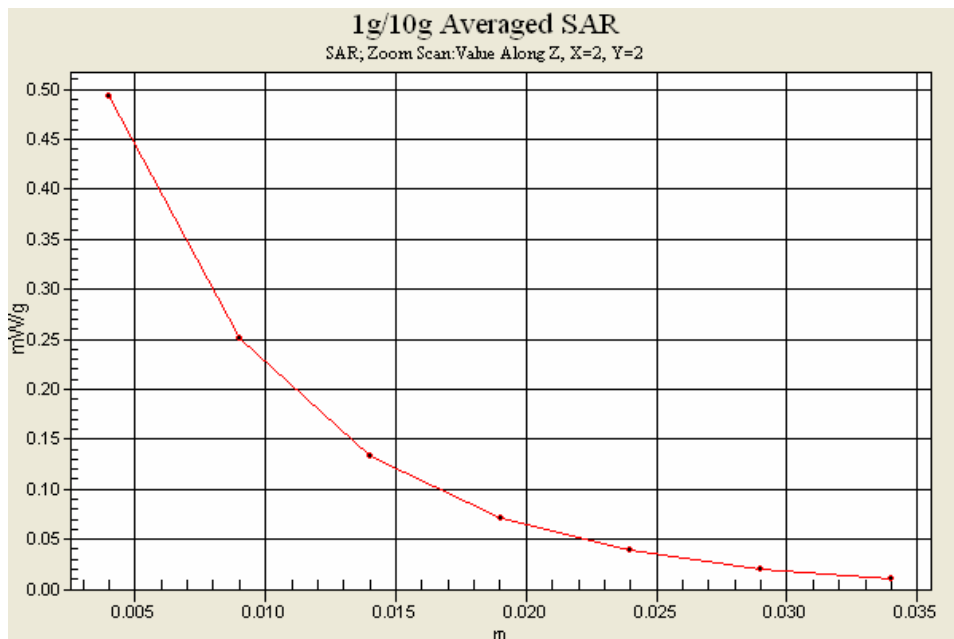

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WLAN Body (Job No. : FI-122)

Procedure Name: Body, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.155 mW/g

Body, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.154 mW/g

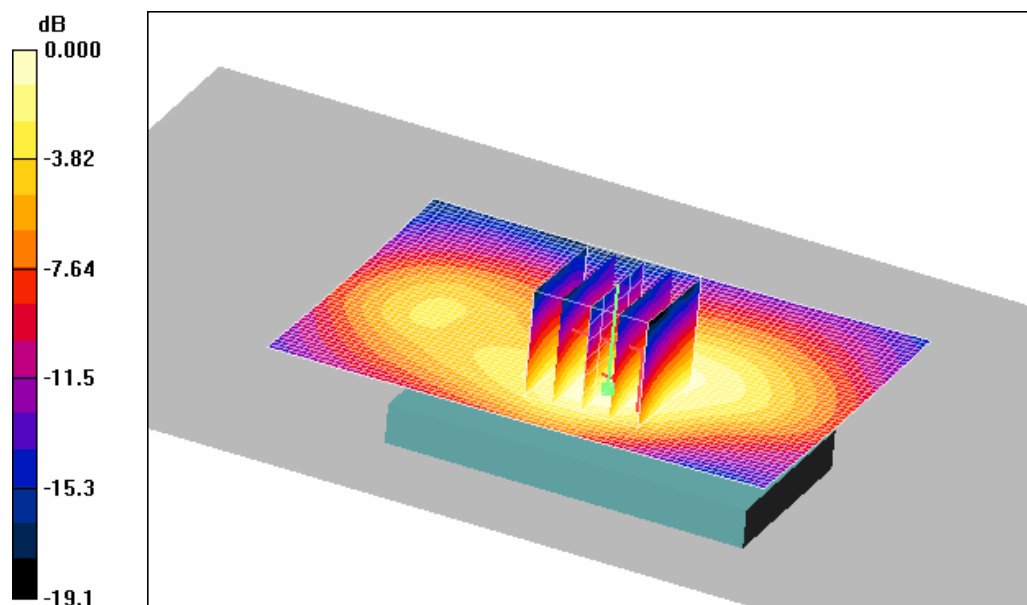

0 dB = 0.154mW/g

DUT: GT-S3770L; Serial: FI-122-A

Program Name: GT-S3770L WLAN Body (Job No. : FI-122)

Procedure Name: Body, Ch.06, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.1;Test Date-30/May/2011

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn686; Calibrated: 2011-03-18
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.06, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.155 mW/g

Body, Ch.06, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.154 mW/g

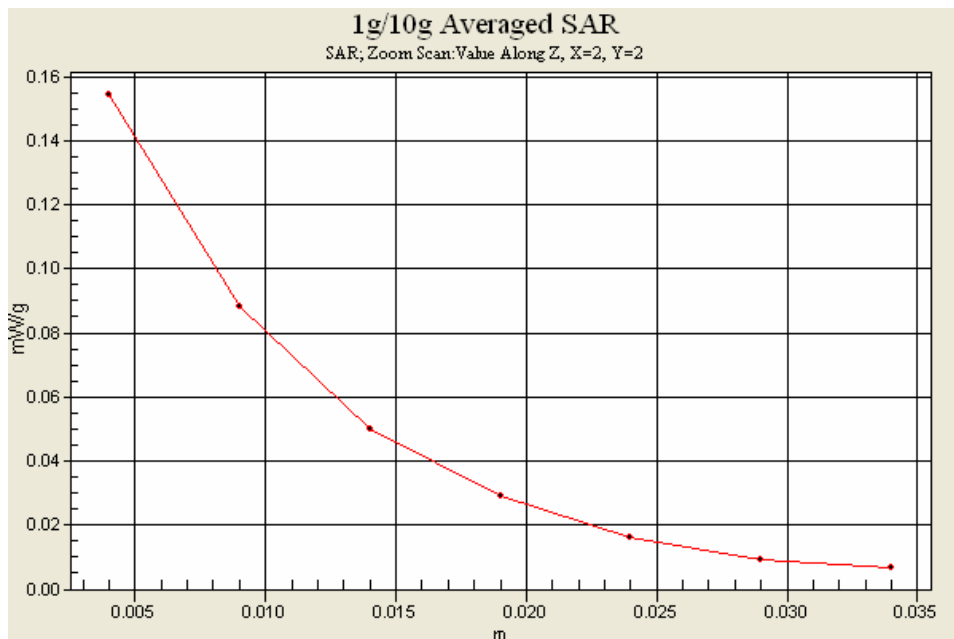

APPENDIX F

Probe Calibration



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Samsung (Dymstec)**

Certificate No: EX3-3520_Mar11

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3520**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)*C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	
			Issued: March 23, 2011
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}** are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3520

Manufactured: March 8, 2004
Calibrated: March 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.73	0.68	0.66	$\pm 10.1 \%$
DCP (mV) ^B	98.0	101.4	100.7	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	107.7	$\pm 2.2 \%$
			Y	0.00	0.00	1.00	136.8	
			Z	0.00	0.00	1.00	108.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
850	41.5	0.92	9.52	9.52	9.52	0.63	0.71	± 12.0 %
1750	40.1	1.37	8.25	8.25	8.25	0.78	0.58	± 12.0 %
1900	40.0	1.40	8.07	8.07	8.07	0.80	0.56	± 12.0 %
2300	39.5	1.67	7.61	7.61	7.61	0.75	0.56	± 12.0 %
2450	39.2	1.80	7.25	7.25	7.25	0.80	0.55	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3520


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
850	55.2	0.99	9.49	9.49	9.49	0.67	0.72	± 12.0 %
1750	53.4	1.49	8.75	8.75	8.75	0.61	0.76	± 12.0 %
1900	53.3	1.52	8.33	8.33	8.33	0.62	0.72	± 12.0 %
2300	52.9	1.81	7.91	7.91	7.91	0.66	0.66	± 12.0 %
2450	52.7	1.95	7.43	7.43	7.43	0.80	0.56	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

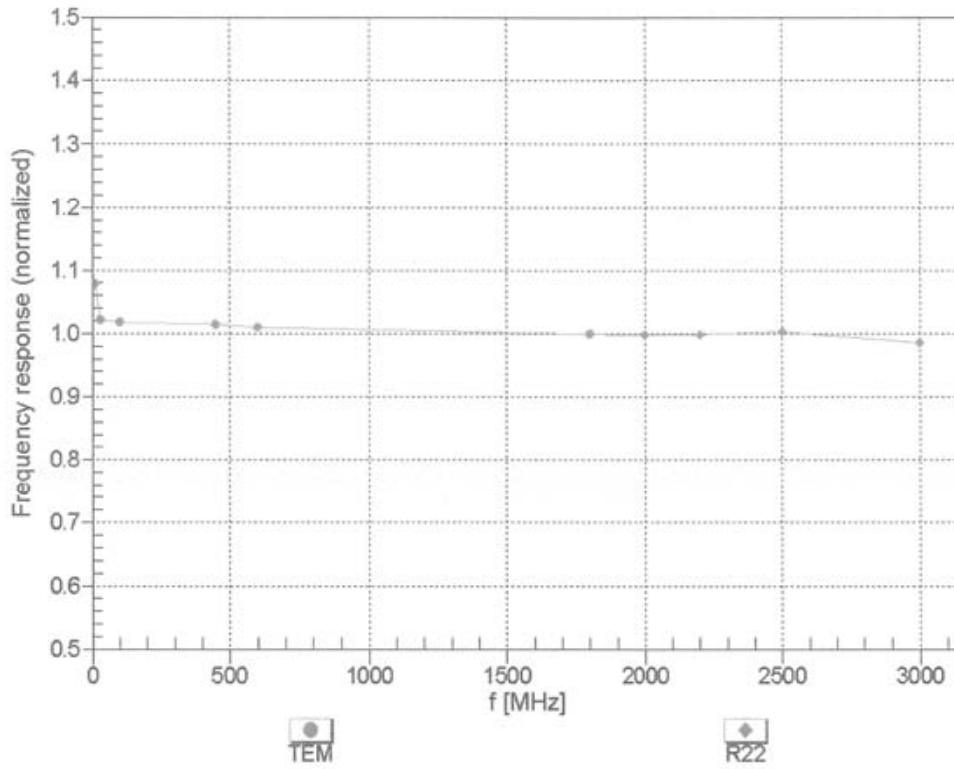



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


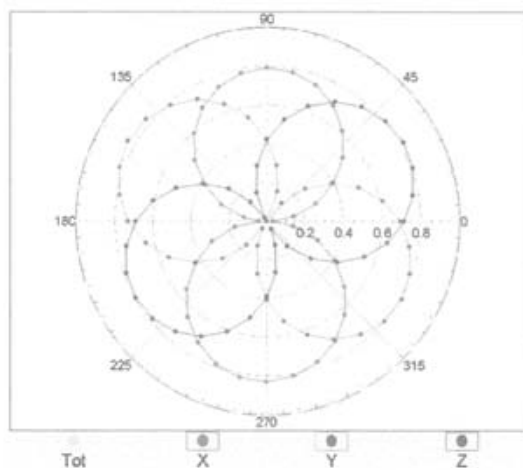


f=1800 MHz, R22

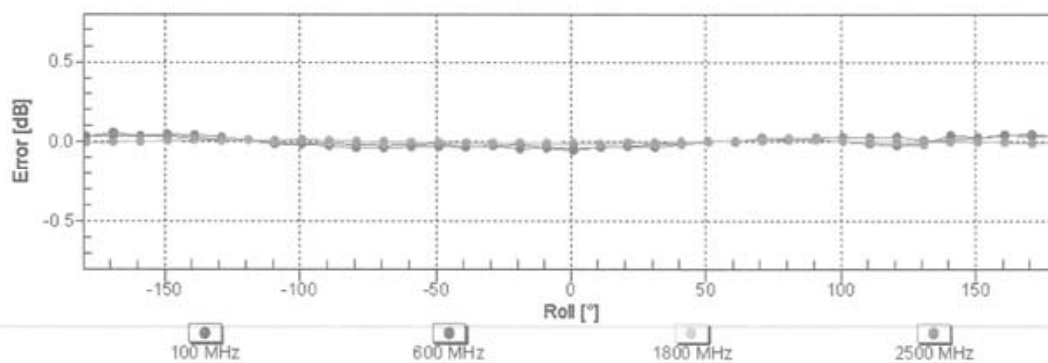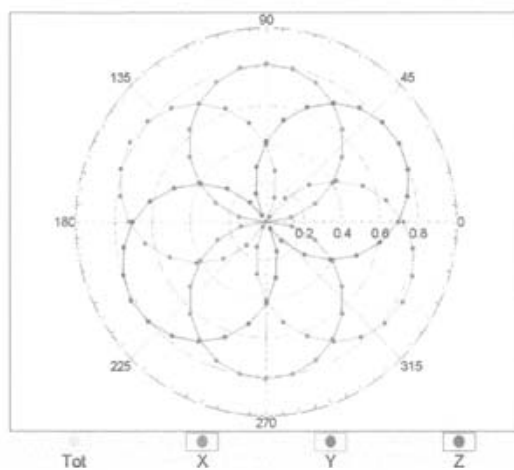


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

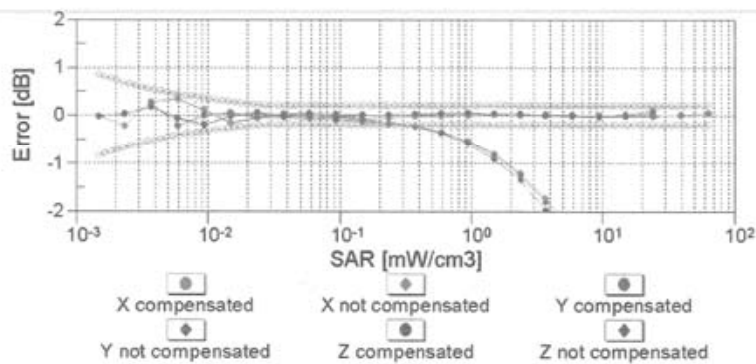
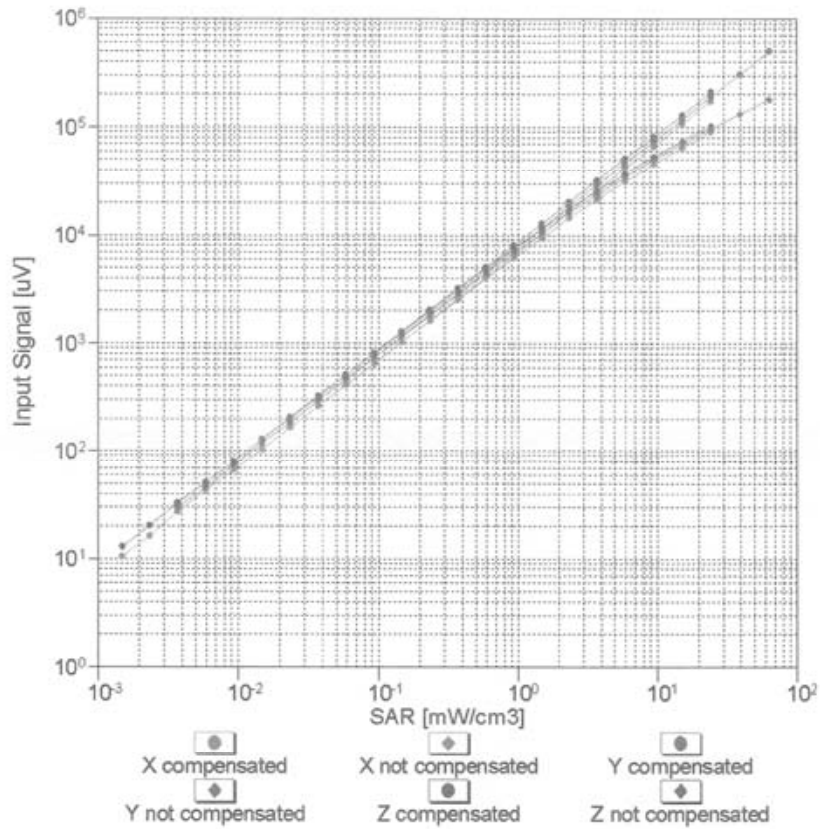


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

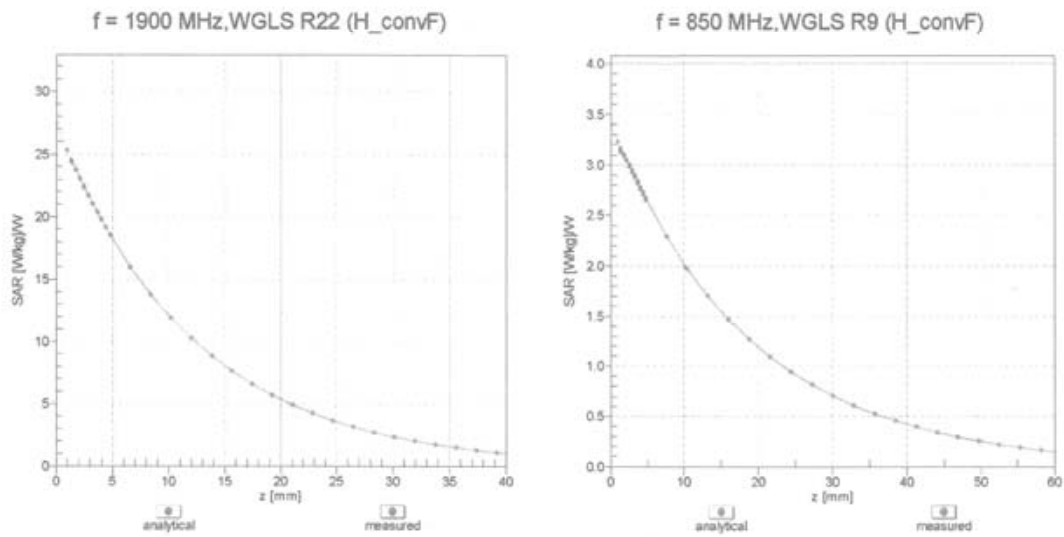

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

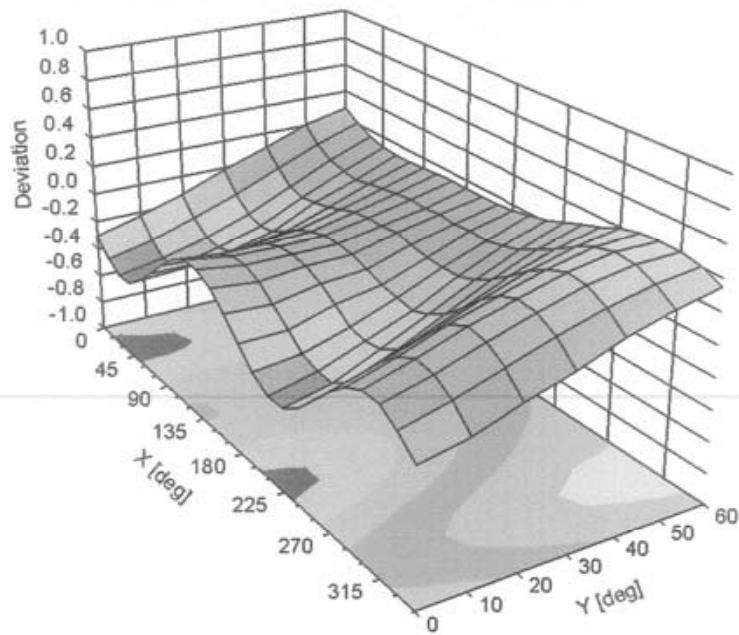

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

APPENDIX G

Calibration of The Validation Dipole



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Samsung (Dymstec)**

Certificate No: **D835V2-4d050_Feb11**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d050**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 23, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Dimce Iliev	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: February 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.1 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature during test	(21.7 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 mW / g
SAR normalized	normalized to 1W	9.56 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.61 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 mW / g
SAR normalized	normalized to 1W	6.20 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.23 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.2 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.55 mW / g
SAR normalized	normalized to 1W	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	10.0 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.67 mW / g
SAR normalized	normalized to 1W	6.68 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.59 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.9 Ω - 2.1 $j\Omega$
Return Loss	- 31.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.6 Ω - 4.4 $j\Omega$
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.388 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 16, 2006

DASY5 Validation Report for Head TSL

Date/Time: 22.02.2011 10:08:40

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d050

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.544 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.595 W/kg


SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.784 mW/g

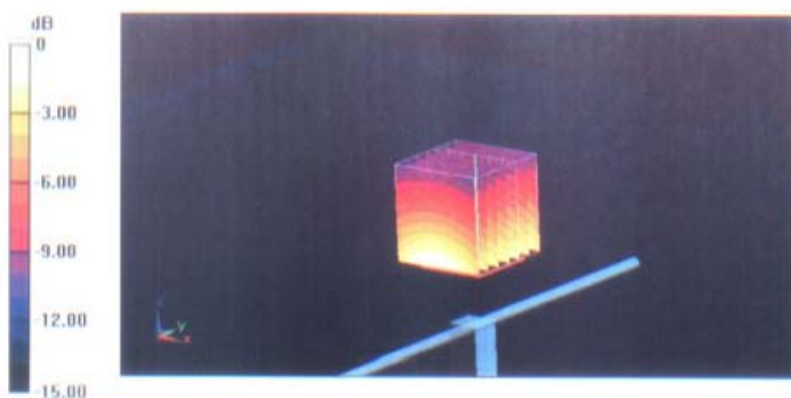

0 dB = 2.780mW/g

Impedance Measurement Plot for Head TSL

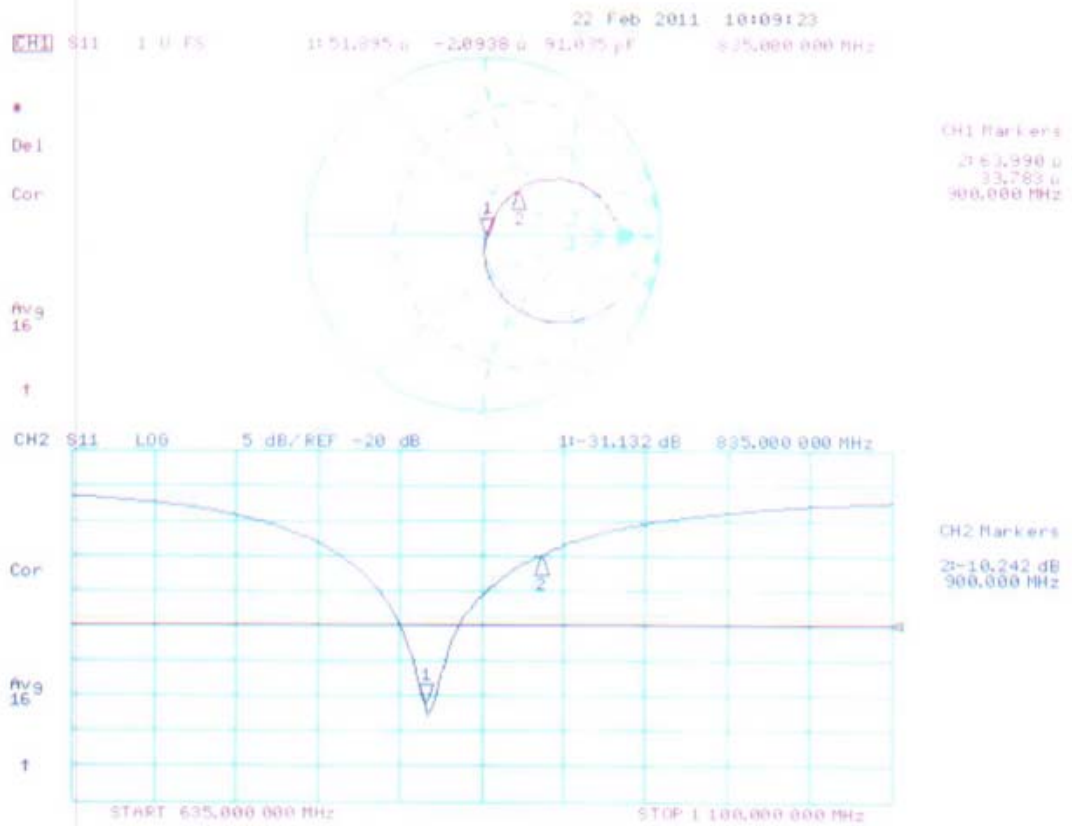

DASY5 Validation Report for Body TSL

Date/Time: 23.02.2011 15:31:07

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d050

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.584 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.780 W/kg

SAR(1 g) = 2.55 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.971 mW/g

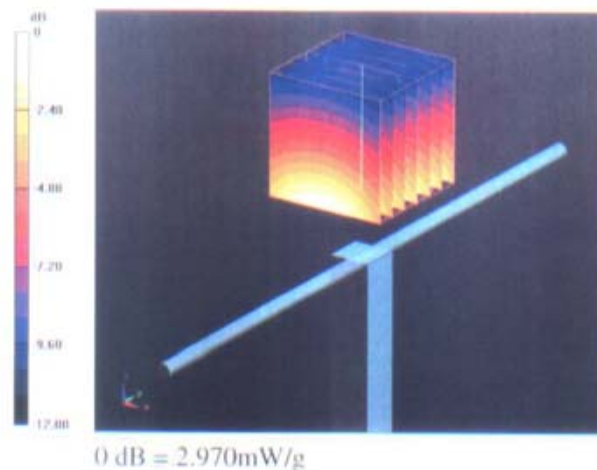

Impedance Measurement Plot for Body TSL

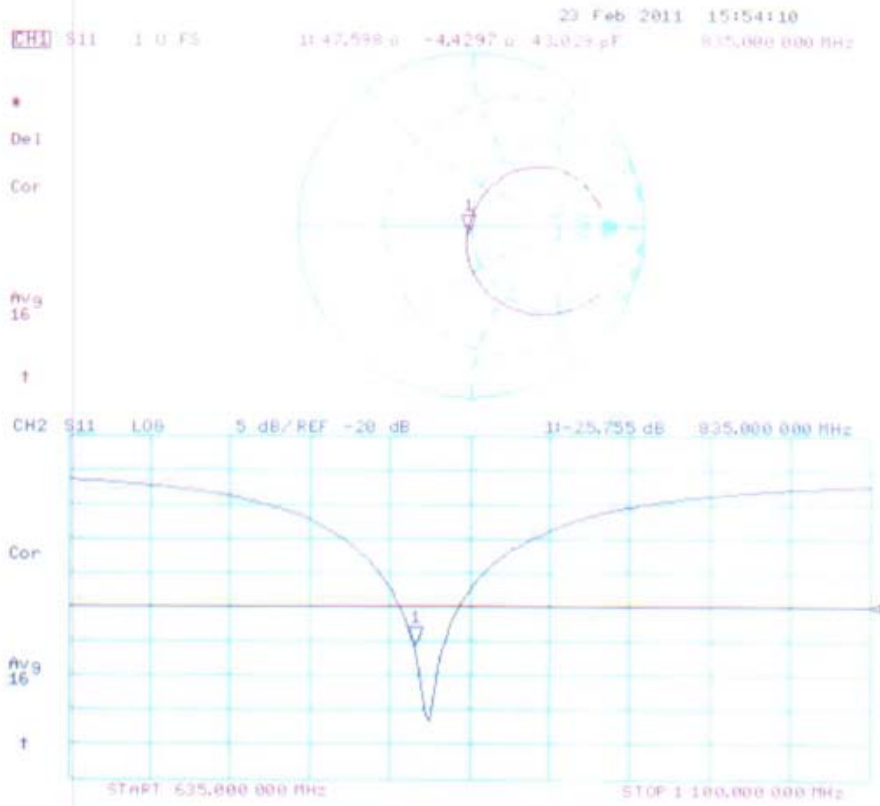



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Samsung (Dymstec)**

Certificate No: **D1900V2-5d082_Feb11**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d082**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 23, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.8 \pm 6 %	1.41 mho/m \pm 6 %
Head TSL temperature during test	(21.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.4 mW / g
SAR normalized	normalized to 1W	41.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	41.4 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.36 mW / g
SAR normalized	normalized to 1W	21.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.4 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.8 ± 6 %	1.55 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.7 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.42 mW / g
SAR normalized	normalized to 1W	21.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.5 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.9 Ω + 5.5 $j\Omega$
Return Loss	- 25.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.3 Ω + 6.6 $j\Omega$
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 28, 2006

DASY5 Validation Report for Head TSL

Date/Time: 17.02.2011 11:20:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d082

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6 Build (401)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.802 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 19.113 W/kg


SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 12.931 mW/g

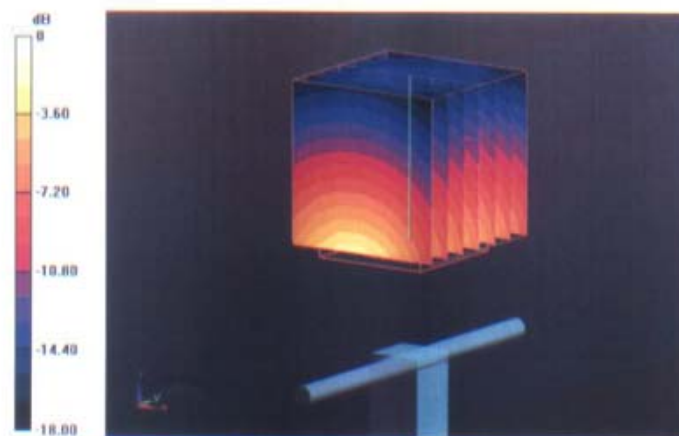

0 dB = 12.930mW/g

Impedance Measurement Plot for Head TSL

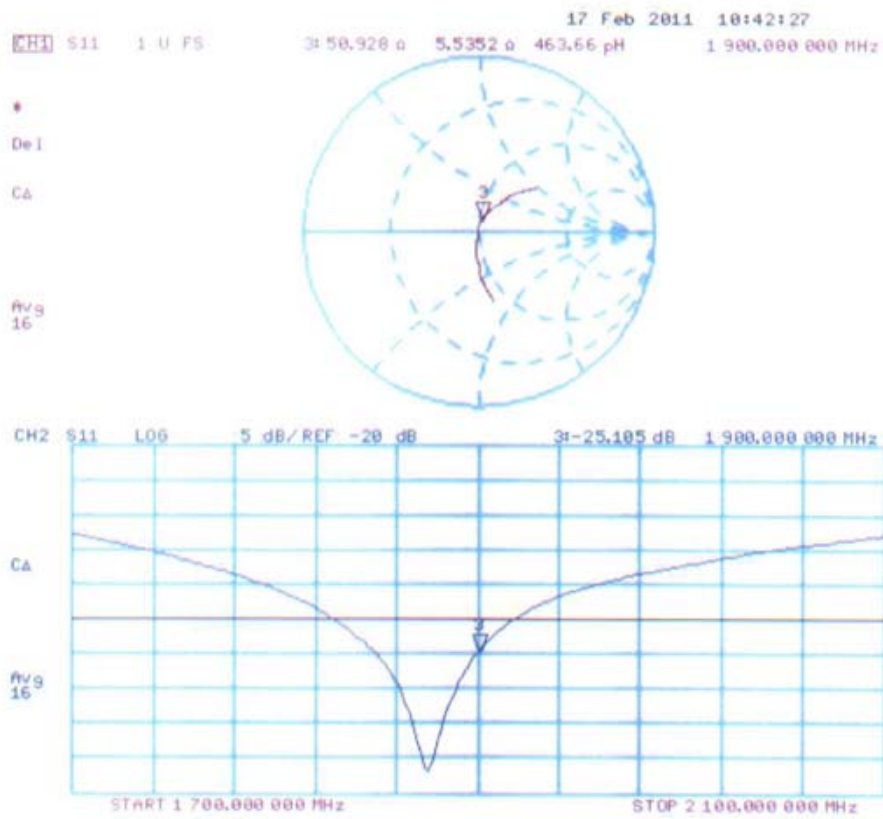

DASY5 Validation Report for Body TSL

Date/Time: 23.02.2011 10:31:34

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d082

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.829 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 17.729 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 13.004 mW/g

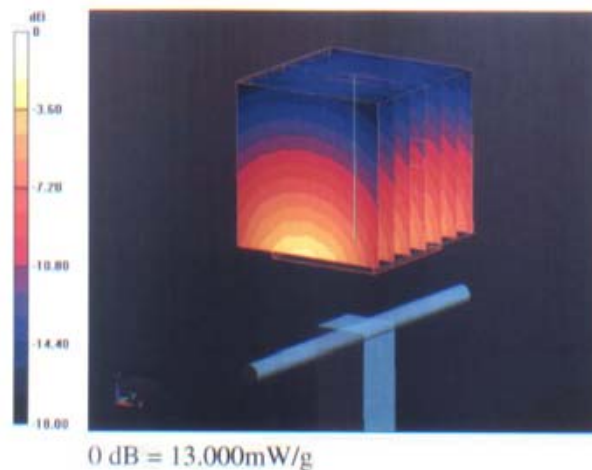

Impedance Measurement Plot for Body TSL

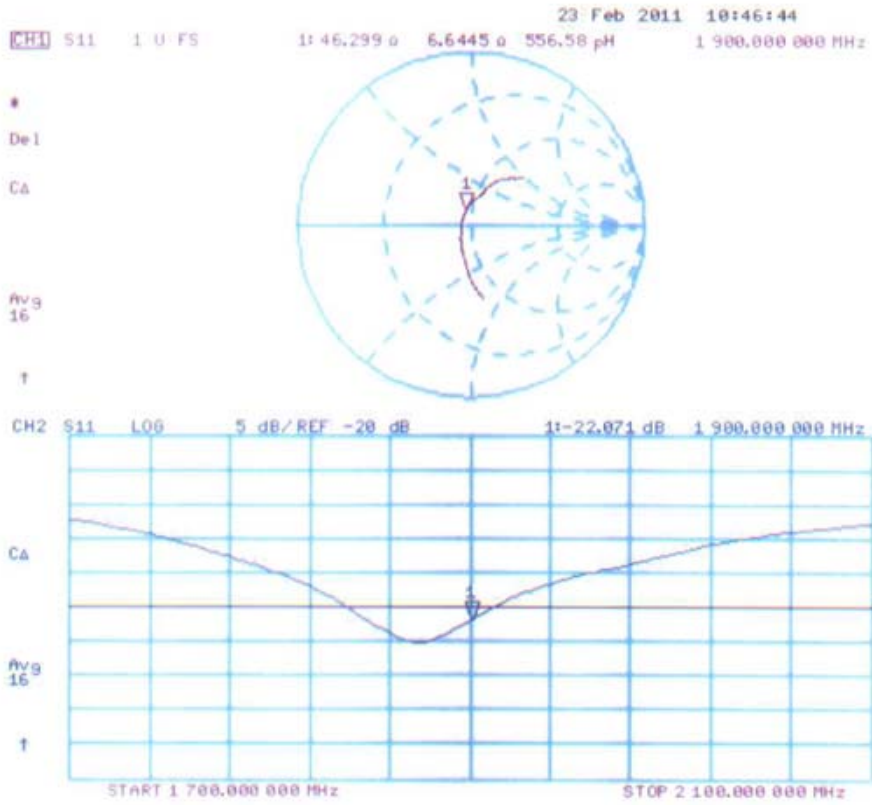



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Samsung (Dymstec)**

Certificate No: D2450V2-807_Feb10

CALIBRATION CERTIFICATE

Object D2450V2 - SN: 807

Calibration procedure(s) QA CAL-05.v7
Calibration procedure for dipole validation kits

Calibration date: February 04, 2010

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: Name Jeton Kastrati Function Laboratory Technician

Approved by: Name Katja Pokovic Function Technical Manager

Signature

Issued: February 5, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.5 \pm 6 %	1.78 mho/m \pm 6 %
Head TSL temperature during test	(20.7 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 mW / g
SAR normalized	normalized to 1W	54.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	54.4 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.37 mW / g
SAR normalized	normalized to 1W	25.5 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	25.4 mW /g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.7 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	51.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.98 mW / g
SAR normalized	normalized to 1W	23.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.7 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.4 \Omega + 2.0 j\Omega$
Return Loss	- 26.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.5 \Omega + 3.9 j\Omega$
Return Loss	- 28.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 02, 2006

DASY5 Validation Report for Head TSL

Date/Time: 04.02.2010 14:31:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:807

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.5 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 27.9 W/kg


SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.37 mW/g

Maximum value of SAR (measured) = 17.5 mW/g

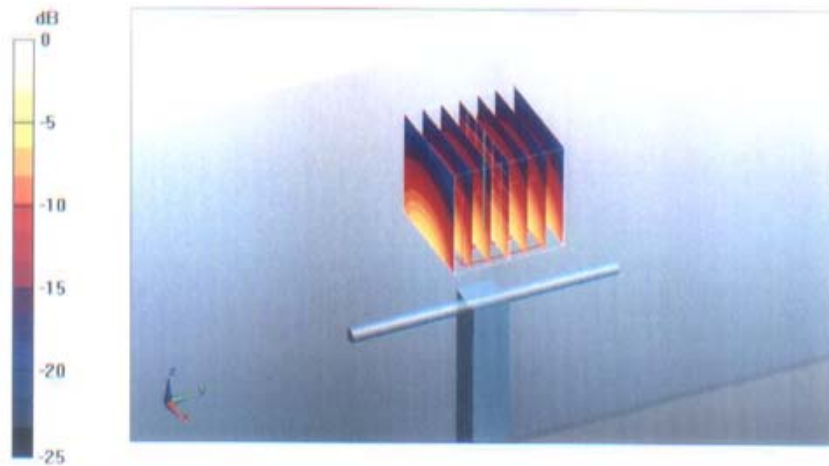

0 dB = 17.5mW/g

Impedance Measurement Plot for Head TSL

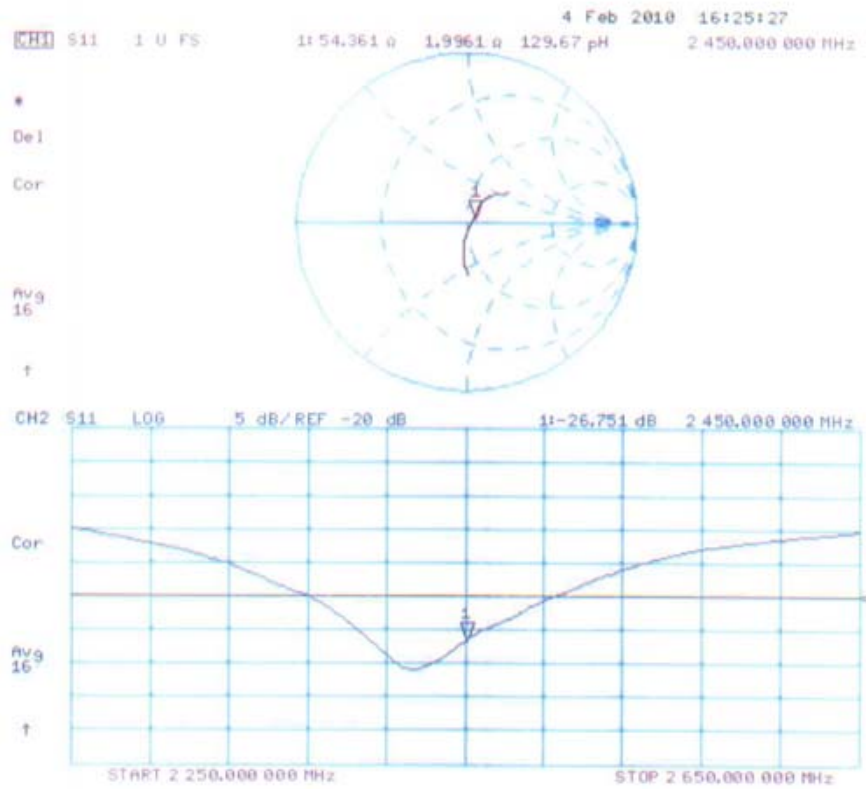

DASY5 Validation Report for Body

Date/Time: 04.02.2010 15:19:05

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:807

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 5.98 mW/g

Maximum value of SAR (measured) = 17.1 mW/g

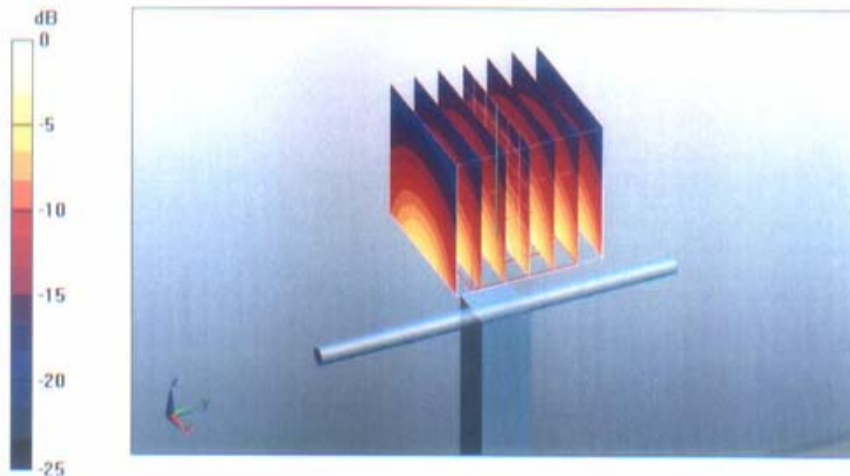

0 dB = 17.1mW/g

Impedance Measurement Plot for Body TSL

