


	1	2	3	4	5	6	7	8
A			Rev. No					
B								
C	<p>< 1:1 Artwork ></p>							
D	<p>Technical Description</p> <ol style="list-style-type: none"> 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Back side should be attached to release paper once adhesive is applied. 4. No letter should be blur/smeared 5. The production must be proceed after the approval of R&D Group 6. The product must be within approved sample's specification tolerance. 7. The product must be finished in a ROLL 8. Release paper must be unifiedn for material and color(blue) 							
E	MAT. WHITE POLYESTER 50 μ		FIN. Semi transparency OPP Laminating + UVP Coating					
F	<p>TITLE GT-S3850</p> <p style="text-align: right;">LABEL-MAIN</p>							
G	UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION		
H	TOLERANCE	+0.0 -0.1	Hong Mun Ki	Jo Kyeong Hwan	Kim June Sop			
I	SCALE	N/S					SHEET NO	1/1
J	Vendor	HANSUNG P&I	101126	101126	101126			
K			Doc. CODE					
L								

GT-S3850 LABEL Location

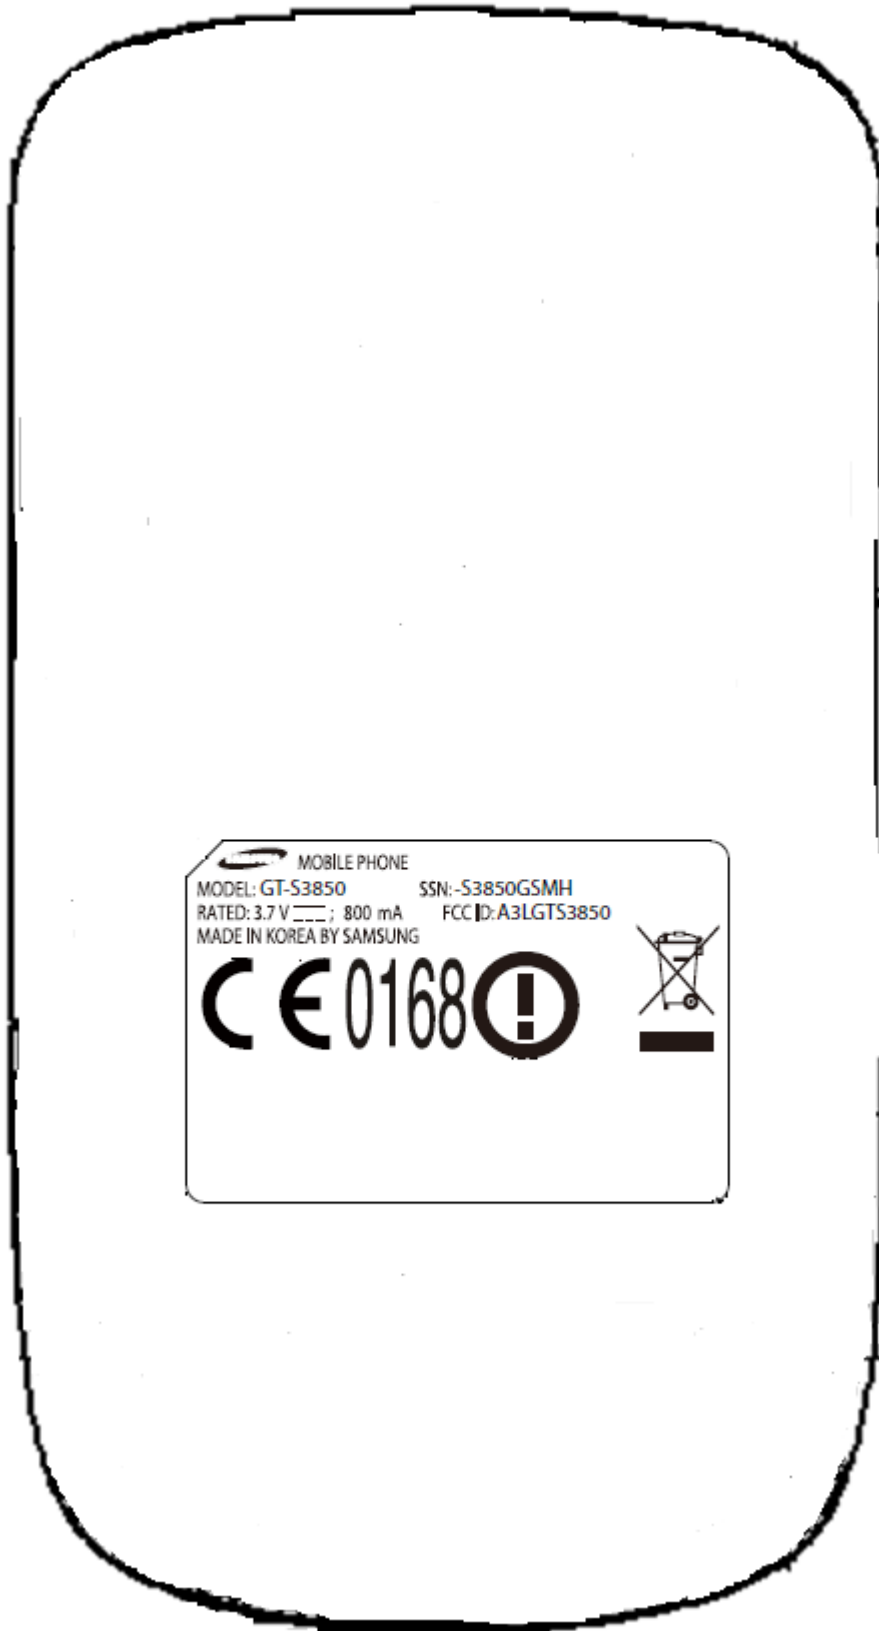

The label is placed inside the battery compartment

Note: The FCC ID label shown will be readily visible at the time of purchase.