


This drawing is property of SEC. Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.

	1	2	3	4	5	6	7	8
			Rev. No					
A	<div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> </div> <div style="width: 35%;"> </div> </div>							
B								
C								
D								
E								
F								
G								
H								
I								
J								
K								
L								

Technical Description

1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents
2. Background color is 'WHITE', letter color is 'BLACK'
(reverse for SAMSUNG LOGO)
3. Back side should be attached to release paper once adhesive is applied.
4. No letter should be blur/smeared
5. The production must be proceed after the approval of R&D Group
6. The product must be within approved sample's specification tolerance.
7. The product must be finished in a ROLL
8. Release paper must be unified for material and color(blue)

MAT.		FIN.	Semi transparency OPP Laminating + UVP Coating					
TITLE	GT-S5270L			LABEL-MAIN LTN				
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION			
TOLERANCE	+0.0 -0.1	Yun Jun Sang	Jo Kyeong Hwan	Kim June Sop				
SCALE	N/S					SHEET NO	1 / 1	
Vendor	HANSUNG P&I	110315	110315	110315				
	Doc. CODE	GH68-00000A						

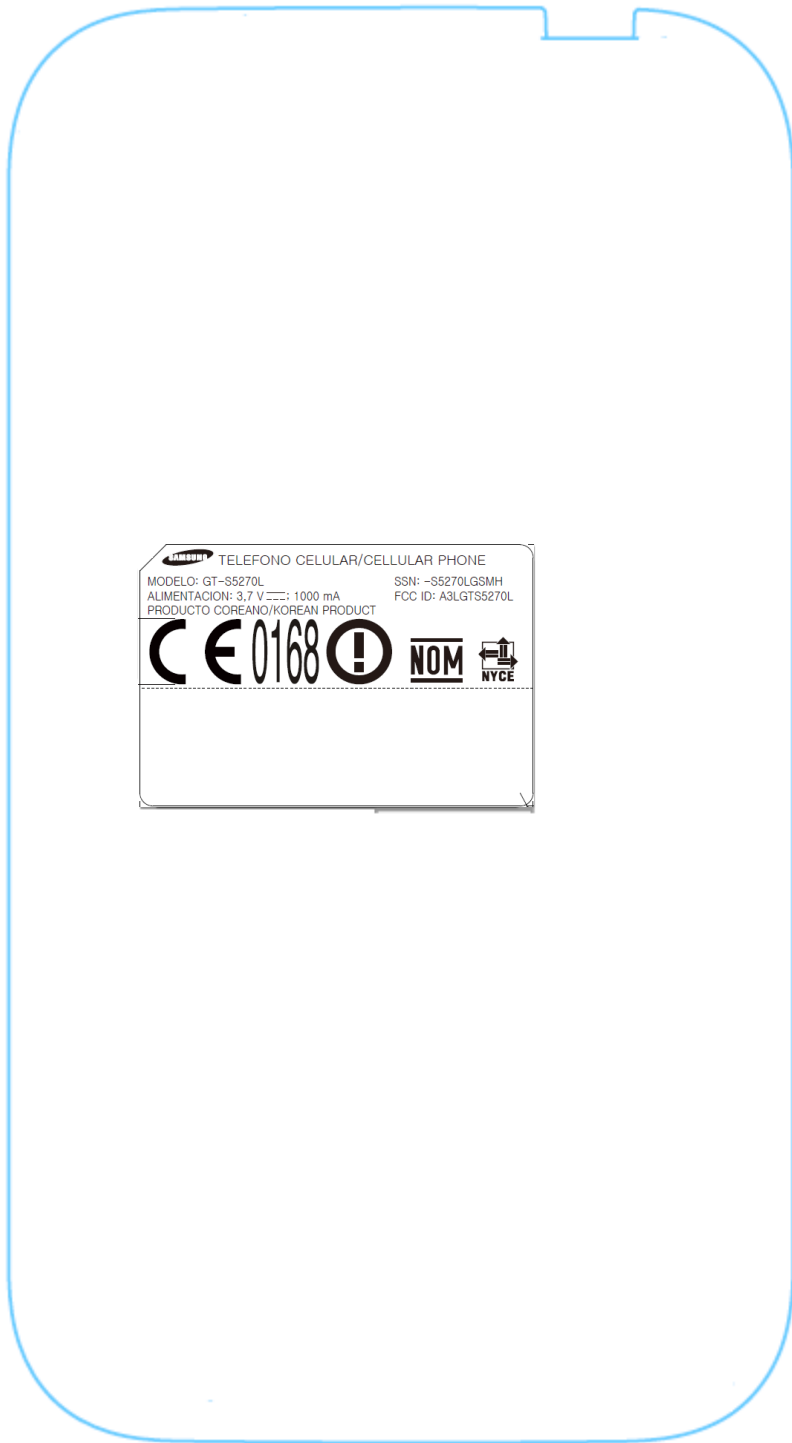

The label is placed inside the battery compartment