


|   |   |              |   |               |             |            |   |     |  |
|---|---|--------------|---|---------------|-------------|------------|---|-----|--|
|   | 1   | 2            | 3   | 4             | 5           | 6          | 7 | 8   |  |
| A |   |              | Rev. No   |               |             |            |   |     |  |
| B | <p>30.0<sup>+0.0</sup><sub>-0.1</sub></p> <p>12.0<sup>+0.0</sup><sub>-0.1</sub></p> <p>7.0</p> <p>4.0</p> <p>6-R1</p> <p>26.0<sup>+0.0</sup><sub>-0.1</sub></p> <p>7.5</p> <p>11.0</p> <p>6.0<sup>+0.0</sup><sub>-0.1</sub></p> <p>13.5<sup>+0.0</sup><sub>-0.1</sub></p> <p>MOBILE PHONE<br/>MODEL : GT-S5610<br/>SSN : -S5610GSMH</p> <p>FCC ID : A3LGT85610<br/>RATED : 3.7V --- 1000 mA<br/>MADE IN KOREA BY SAMSUNG</p> <p>5.0</p> <p>CE 0168</p> <p>12.0<sup>+0.0</sup><sub>-0.1</sub></p>  |              |   |               |             |            |   |     |  |
| C | <p>2.7</p> <p>3.4</p> <p>4.2</p> <p>5.1</p> <p>2.0</p> <p>1.0</p> <p>4.1</p>  |              |   |               |             |            |   |     |  |
| D | <p>2.0</p> <p>2.0</p> <p>3.0</p> <p>ROLLING</p>   |              |   |               |             |            |   |     |  |
| E | <p><b>Technical Description</b></p> <ol style="list-style-type: none"> <li>1. Use 'FILM' provided by 'SAMSUNG' for letter and contents</li> <li>2. Background color is 'WHITE', letter color is 'BLACK'<br/>(reverse for SAMSUNG LOGO)</li> <li>3. Put 'release paper' on the back side after the adhesive.</li> <li>4. No blur and spread for letter</li> <li>5. Proceed with manufacturing process after the approval of R&amp;D Group</li> <li>6. The spec. of product must be based on approved limit samples.</li> <li>7. Stock on as a ROLL</li> <li>8. Follow drawing instruction above for CE or WEEE mark</li> <li>9. Unify material and color as one color (blue) for glassine paper</li> </ol> |              |   |               |             |            |   |     |  |
| F |   |              |   |               |             |            |   |     |  |
| G |   |              |   |               |             |            |   |     |  |
| H |   |              |   |               |             |            |   |     |  |
| I |   |              |   |               |             |            |   |     |  |
| J | <p>MAT. White polypropylene 80<math>\mu</math></p>  |              | <p>FIN. Semitransparency OPP Lamination + UVP Coating</p> |               |             |            |   |     |  |
| K | <p>TITLE GT-S5610</p>   |              | <p>LABEL(R)-MAIN-EU</p>                                   |               |             |            |   |     |  |
| L | UNIT  | mm           | DESIGNED  | CHECKED       | APPROVED    | PROJECTION |   |     |  |
|   | TOLERANCE   | +0.0<br>-0.1 | jukyun Kim  | kyeonghwan jo | junesop kim |            |   |     |  |
|   | SCALE   | N / S        |   |               |             | SHEET NO   |   | 1/1 |  |
|   | Manufacture   | HANSUNG P&I  | 110718  | 110718        | 110718      |            |   |     |  |
|   |   |              | Doc. CODE   | GH68-00000A   |             |            |   |     |  |

※ The label is placed inside the battery compartment



※ The label is placed inside the battery compartment

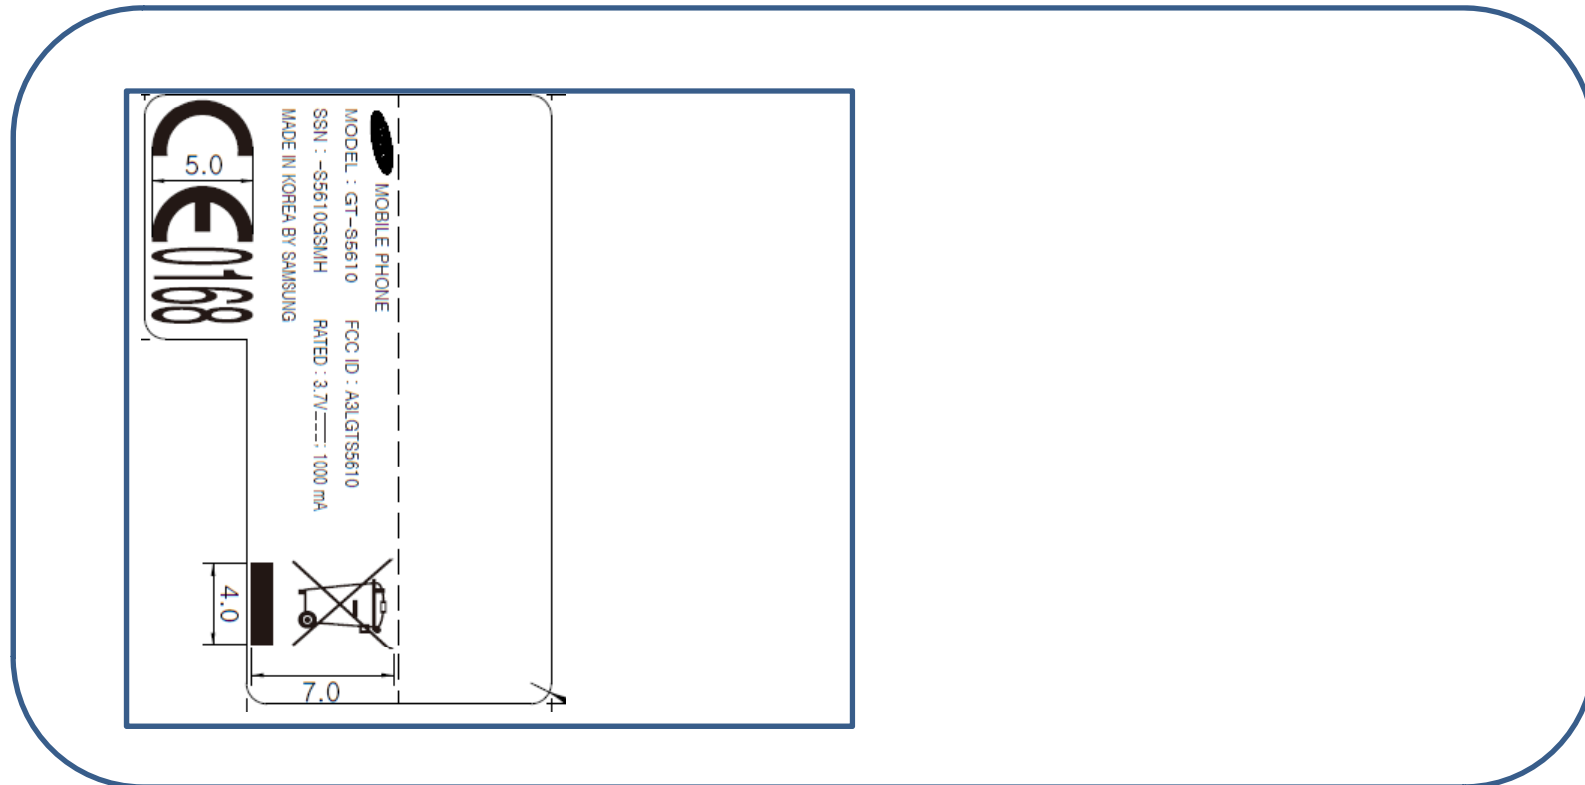