



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

BT3.0, 802.11 B/G/N 1X1 HT20, GSM/850/1900MHZ, WCDMA850MHZ BAR PHONE

MODEL NUMBER: GT-S6012B

FCC ID: A3LGTS6012B

REPORT NUMBER: 12114597-2

ISSUE DATE: SEPTEMBER 7, 2012

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by
UL CCS
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--		Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE	8
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ANTENNA PORT TEST RESULTS	12
7.1. BASIC DATA RATE GFSK MODULATION	12
7.1.1. 20 dB AND 99% BANDWIDTH	12
7.1.2. HOPPING FREQUENCY SEPARATION	17
7.1.3. NUMBER OF HOPPING CHANNELS	19
7.1.4. AVERAGE TIME OF OCCUPANCY	22
7.1.5. OUTPUT POWER	26
7.1.6. AVERAGE POWER	29
7.1.7. CONDUCTED SPURIOUS EMISSIONS	30
7.2. ENHANCED DATA RATE 8PSK MODULATION	35
7.2.1. 20 dB AND 99% BANDWIDTH	35
7.2.2. HOPPING FREQUENCY SEPARATION	40
7.2.3. NUMBER OF HOPPING CHANNELS	42
7.2.4. AVERAGE TIME OF OCCUPANCY	45
7.2.5. OUTPUT POWER	52
7.2.6. AVERAGE POWER	56
7.2.7. CONDUCTED SPURIOUS EMISSIONS	57
8. RADIATED TEST RESULTS	62
8.1. LIMITS AND PROCEDURE	62
8.2. TRANSMITTER ABOVE 1 GHz	63
8.2.1. BASIC DATA RATE GFSK MODULATION	63
8.2.2. ENHANCED DATA RATE 8PSK MODULATION	72

8.3. *WORST-CASE BELOW 1 GHz* 81

9. AC POWER LINE CONDUCTED EMISSIONS **84**

10. SETUP PHOTOS **88**

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: BT3.0, 802.11 b/g/n 1X1 HT20, GSM/850/1900MHz,
WCDMA850MHz Bar phone

MODEL: GT-S6012B

SERIAL NUMBER: FJ-222-D (Conducted), FJ-222-A & FJ-222-B (Radiated)

DATE TESTED: AUGUST 27TH - SEPTMEVER 4TH, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



TIM LEE
STAFF ENGINEER
UL CCS

Tested By:



STEVE AGUILAR
EMC TECHNICIAN
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is A BT3.0, 802.11 b/g/n 1X1 HT20, GSM/850/1900MHz, WCDMA850MHz Bar phone.

The manufacturer of the radio module is Samsung Electronics Co., Ltd.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.01	10.02
2402 - 2480	Enhanced 8PSK	9.56	9.04

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of -2.74dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was S6012b.010.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
USB Travel Adapter	Samsung	ETAOU10EBE	SC3BB03HS/7-E	DoC
USB Travel Adapter	Samsung	ETAOU10EBE	SC2Z713PS/7-E	DoC
Headset	Samsung	EHS61ASFWE	FJ-222-A	N/A
Headset	Samsung	EHS61ASFWE	FJ-222-B	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	1.5m	N/A
2	Headset	1	Audio	Shielded	1.5m	N/A

TEST SETUP

The EUT is a stand-alone device.

SETUP DIAGRAM FOR TESTS

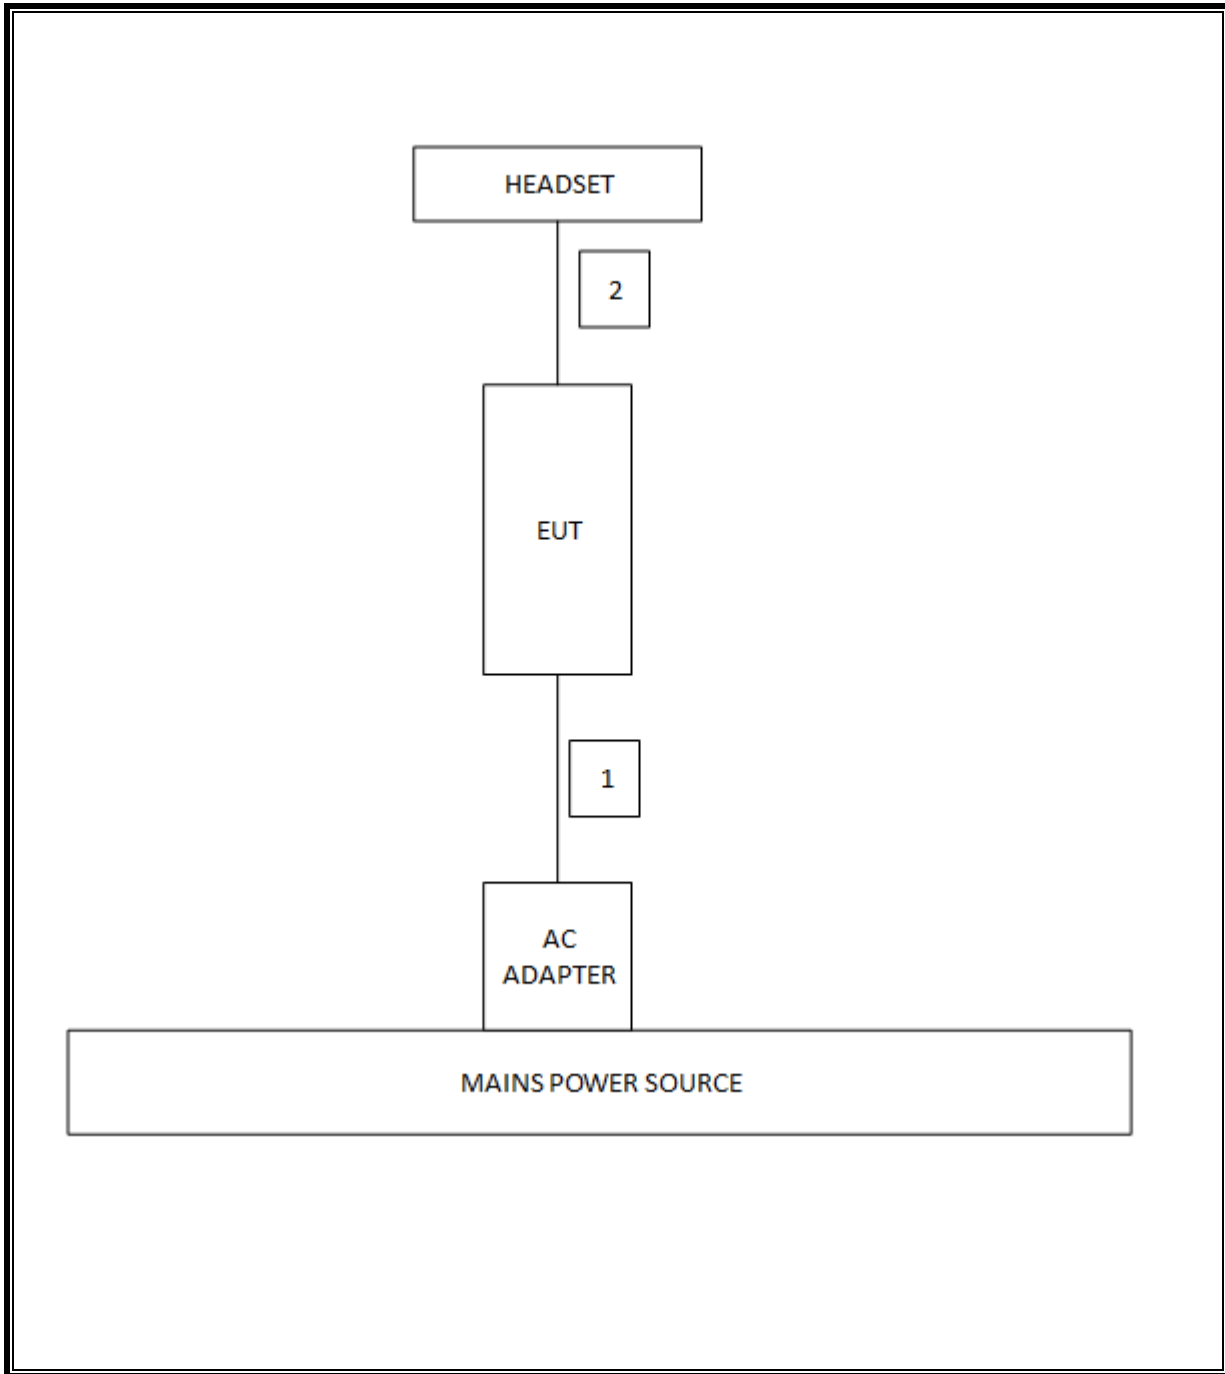

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	4/9/2012	4/9/2013
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/16/2012	2/16/2013
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2011	12/13/2012
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2011	12/13/2012
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	9/2/2011	9/2/2012
Antenna, Horn, 18 GHz	EMCO	3115	C00872	9/20/2011	9/20/2012
Antenna Horn, 26.5 GHz	ARA	SWH-28	C01015	4/23/2012	4/23/2013
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	11/11/2011	11/11/2012
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	1/26/2012	1/26/2013
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	11/11/2011	11/11/2012
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2012	8/8/2013
LISN, 30 MHz	FCC	50/250-25-2	C00626	12/13/2011	12/13/2012

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	9239.36	8653.577
Middle	2441	9230.65	8390.596
High	2480	9239.53	8621.712


20 dB BANDWIDTH

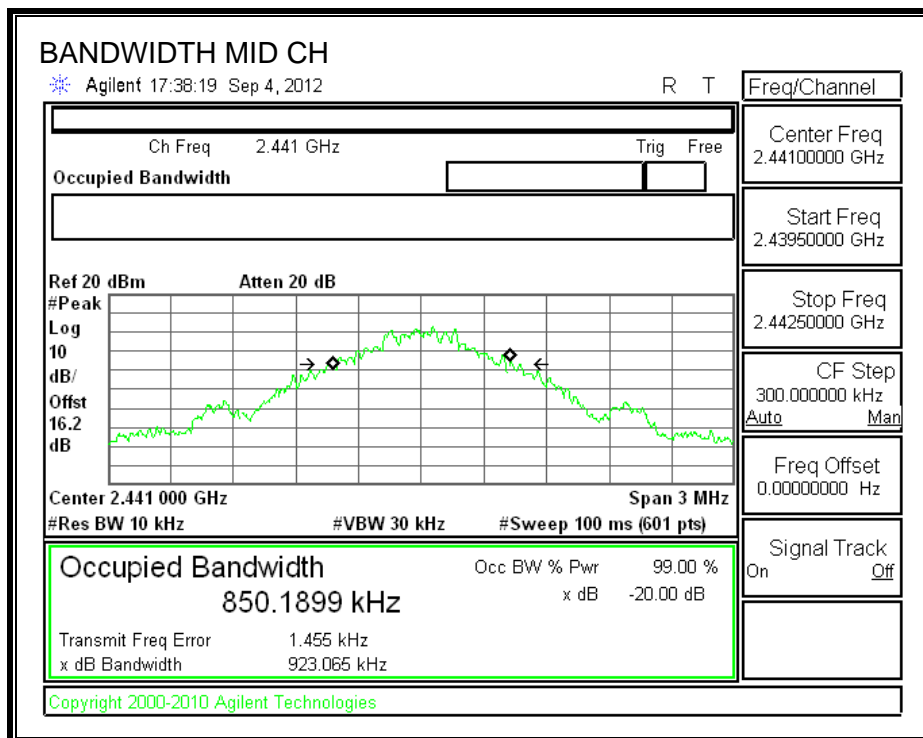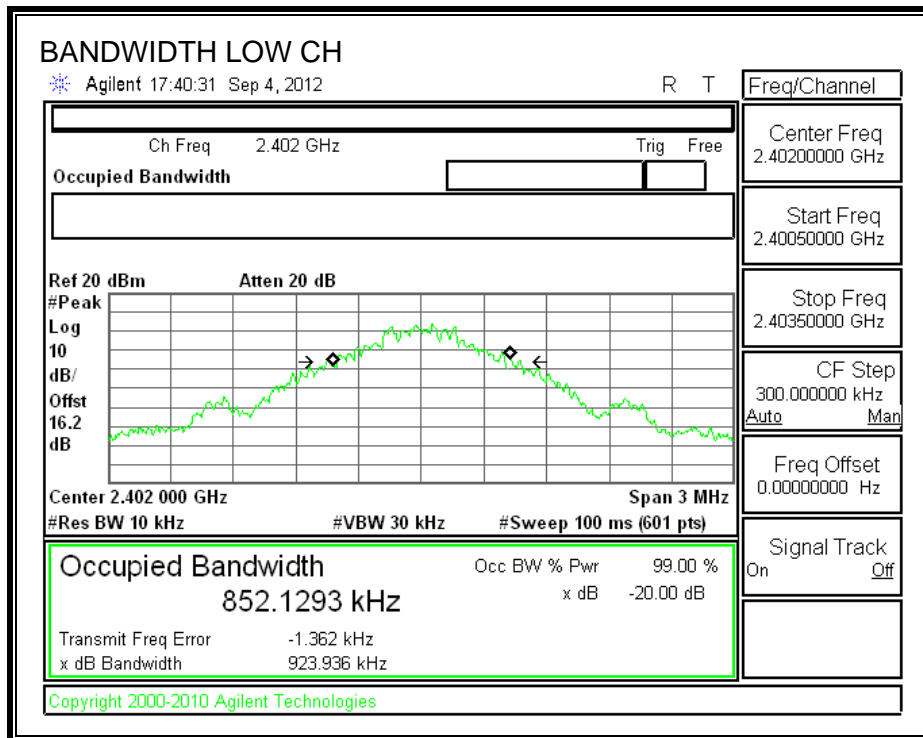

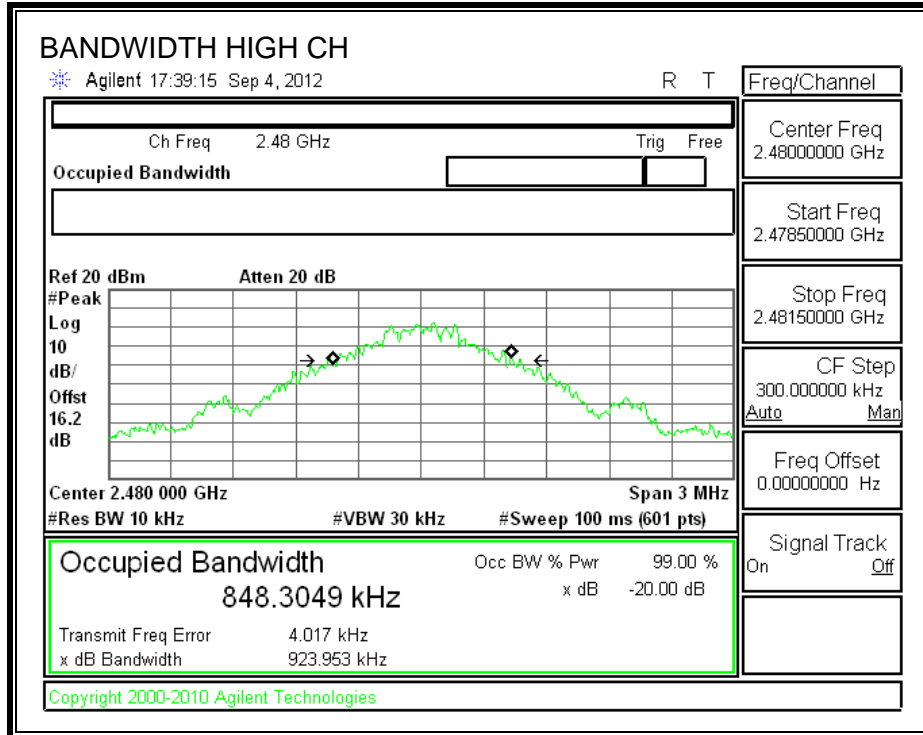

99% BANDWIDTH

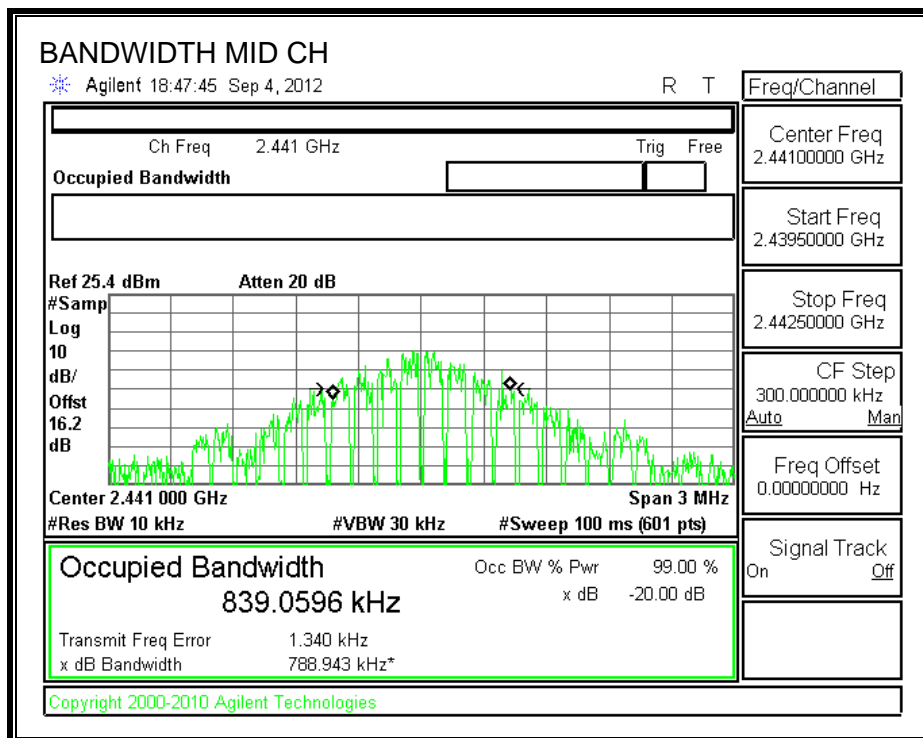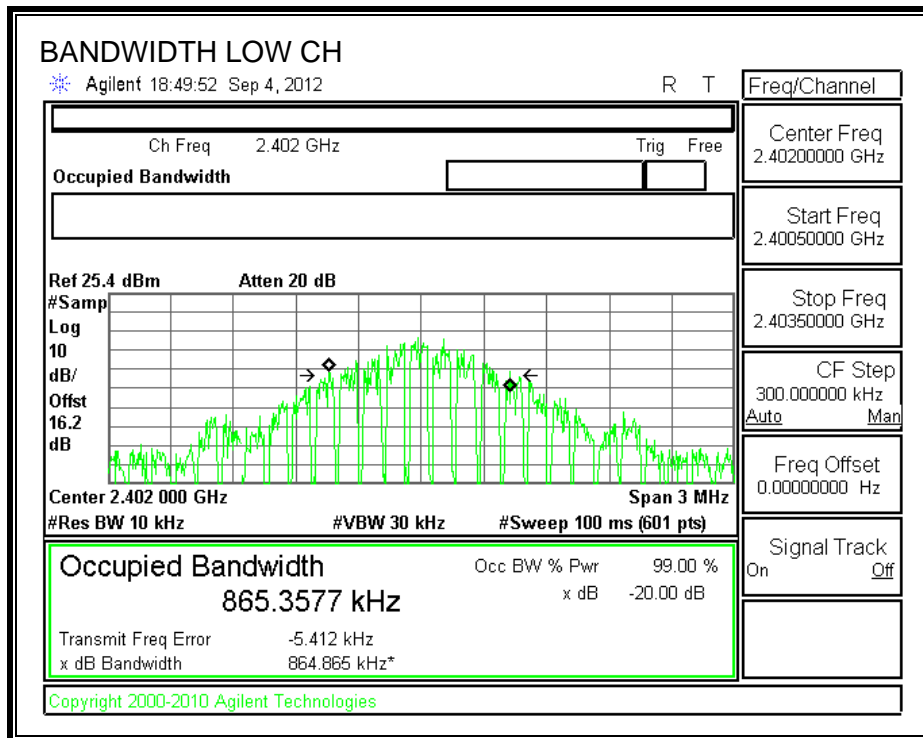

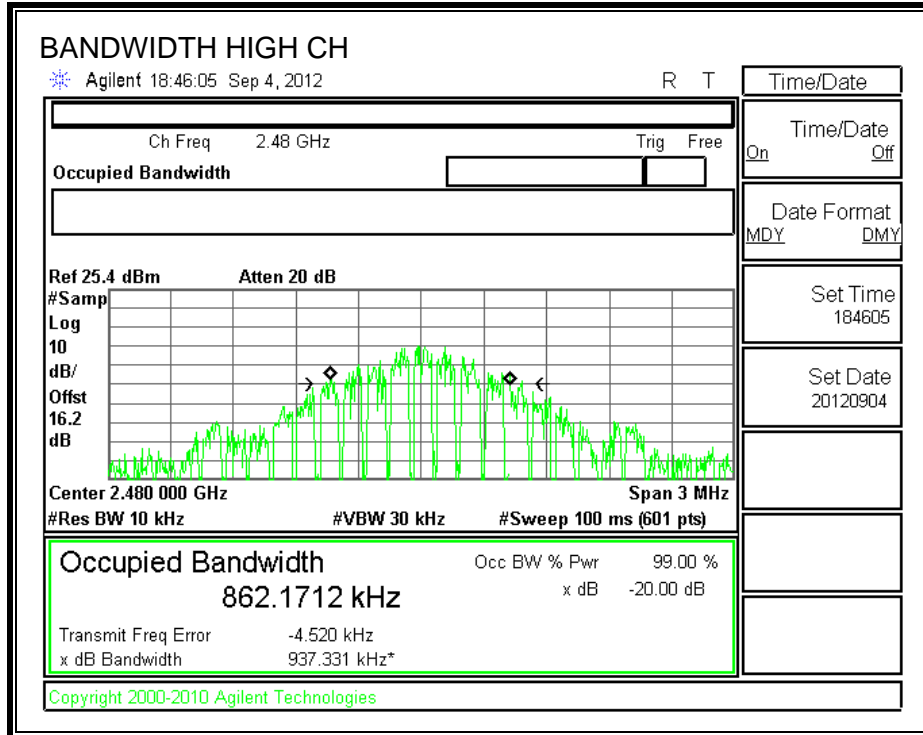

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

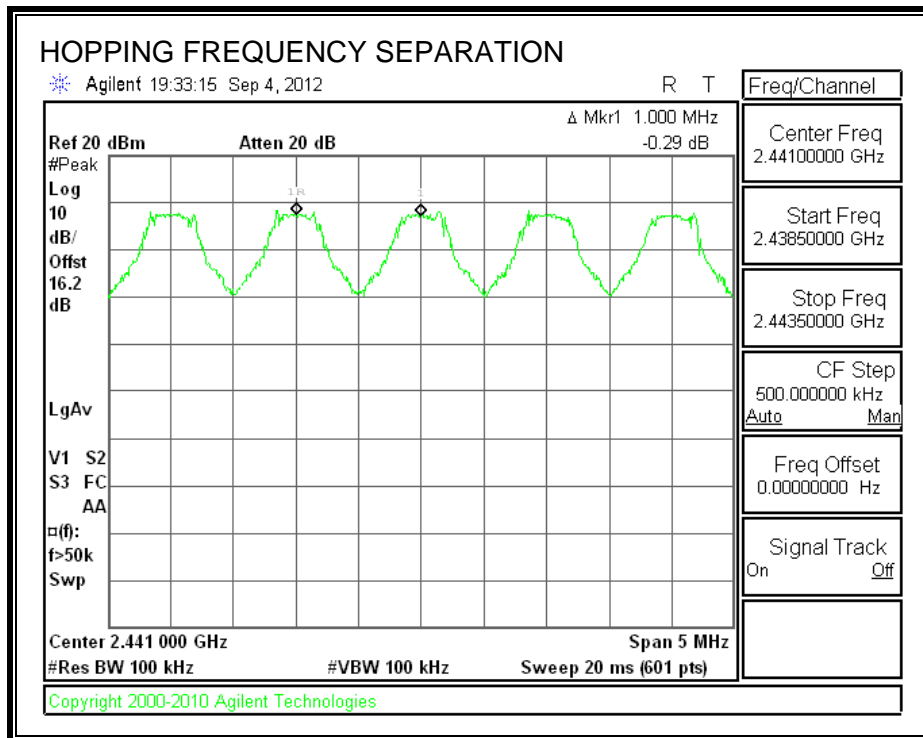

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

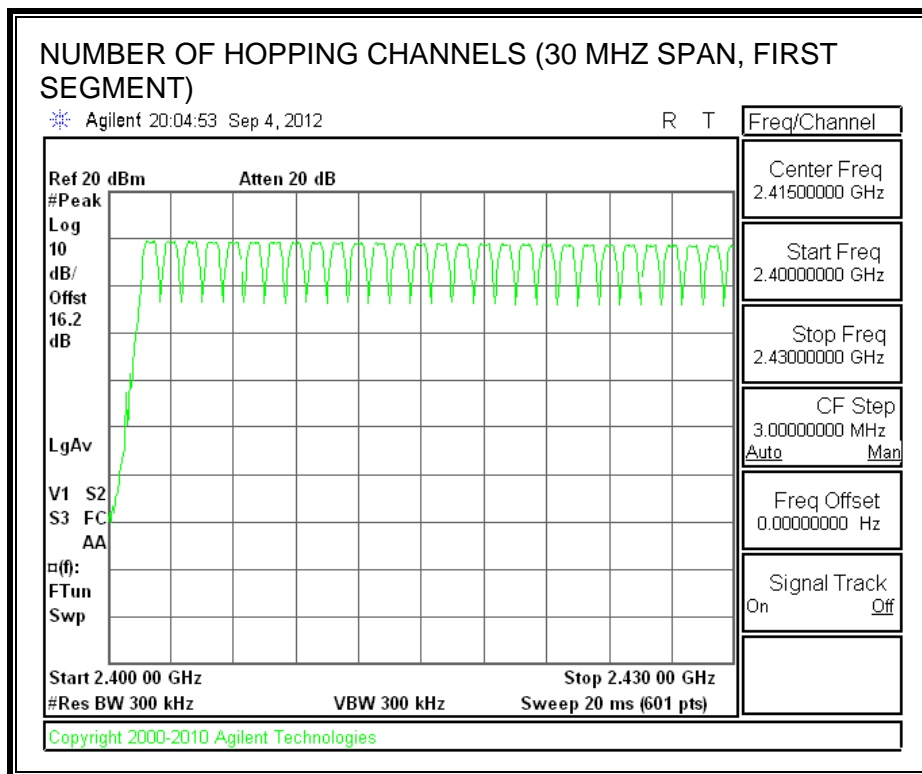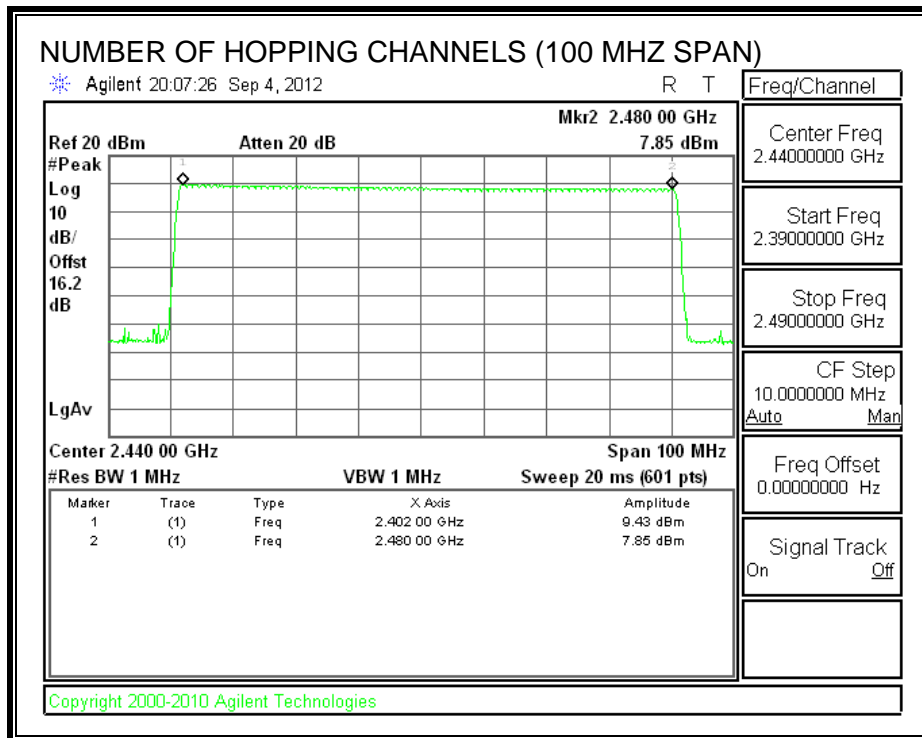

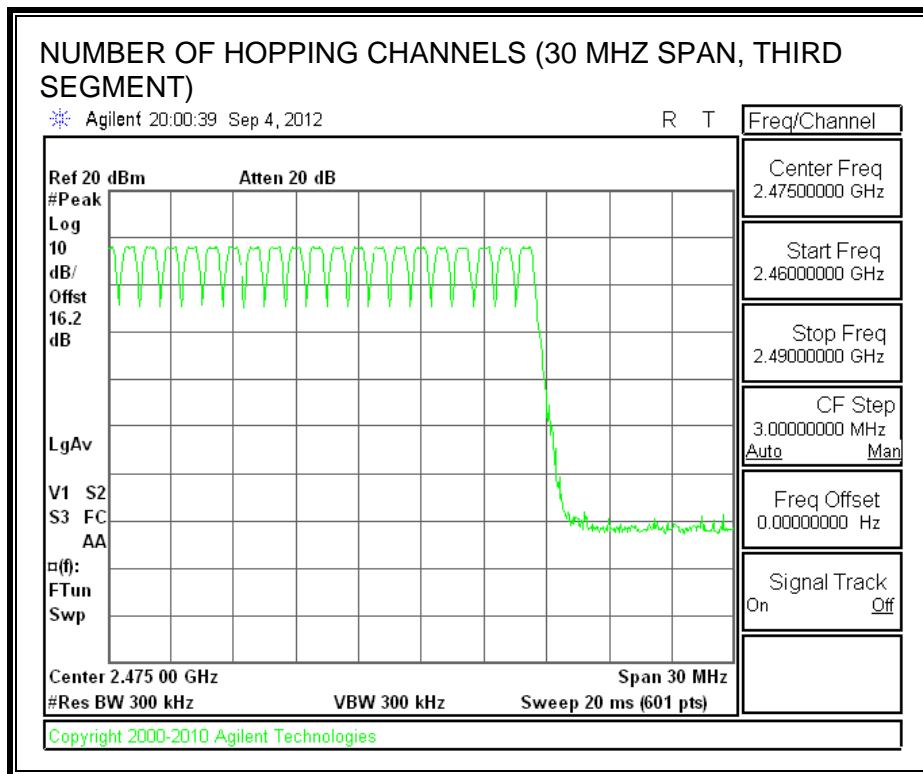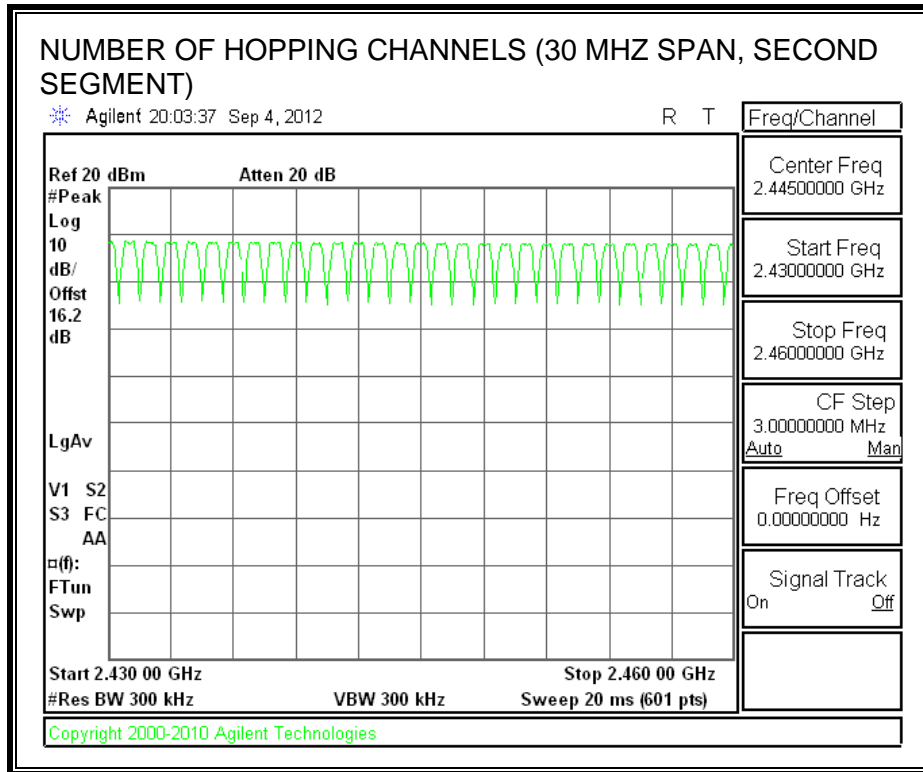

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

RESULTS


Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.4167	34	0.142	0.4	-0.258
DH3	1.658	14	0.232	0.4	-0.168
DH5	2.907	7	0.203	0.4	-0.197


PULSE WIDTH - DH1

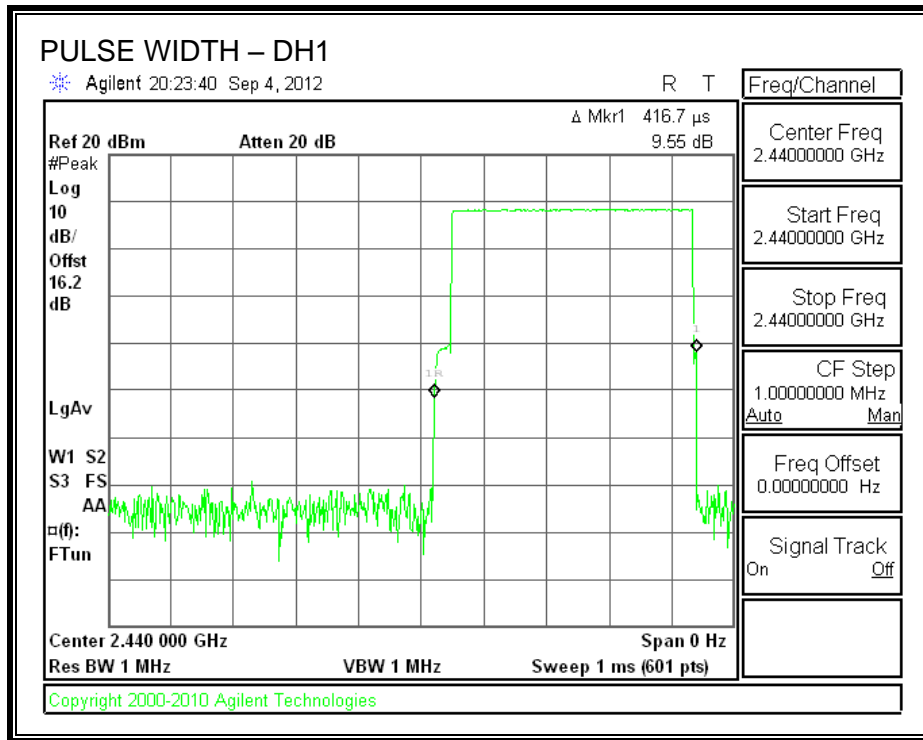


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

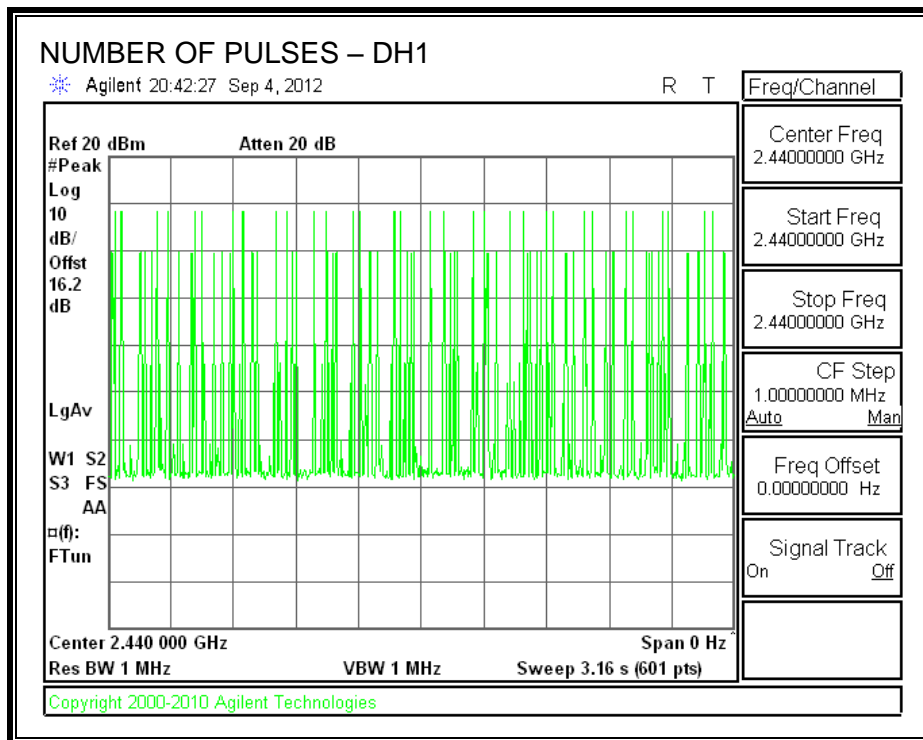

PULSE WIDTH – DH3

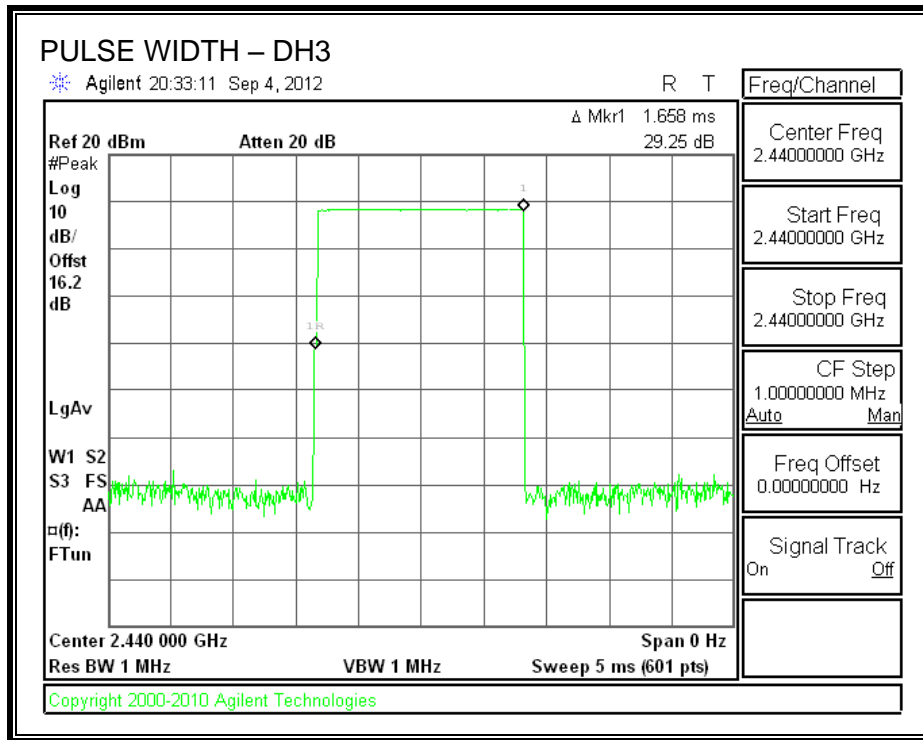

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

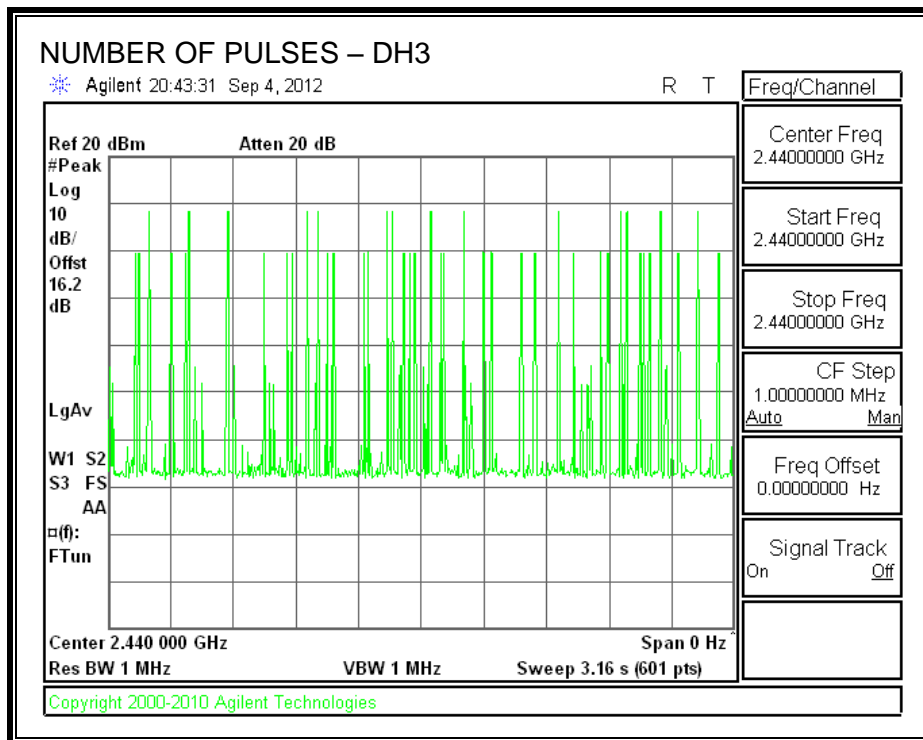

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.56	30	-20.44
Middle	2441	8.34	30	-21.66
High	2480	8.01	30	-21.99

OUTPUT POWER

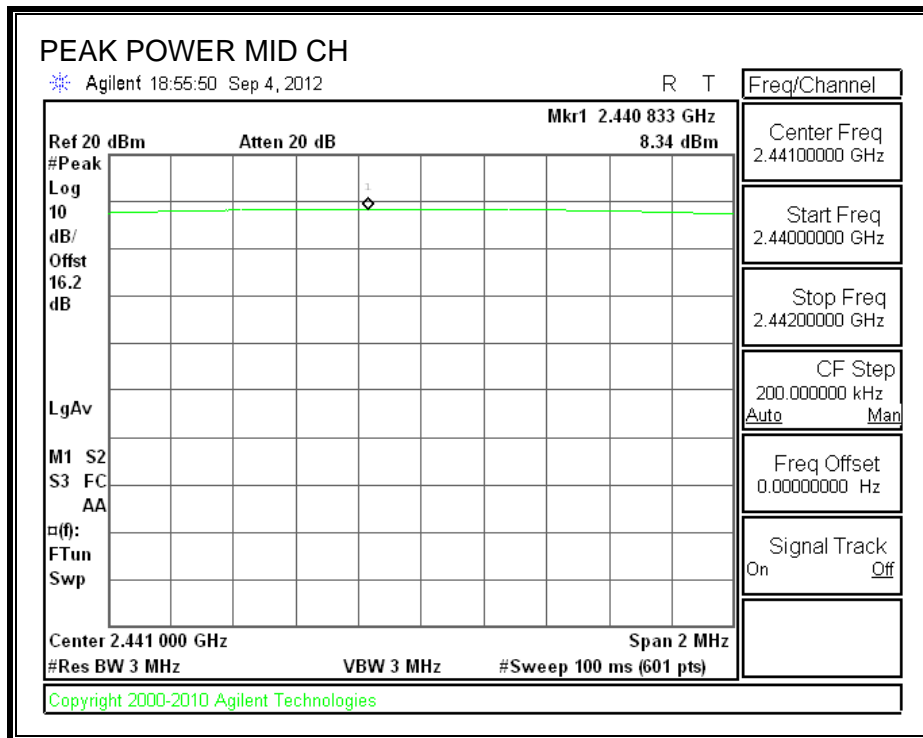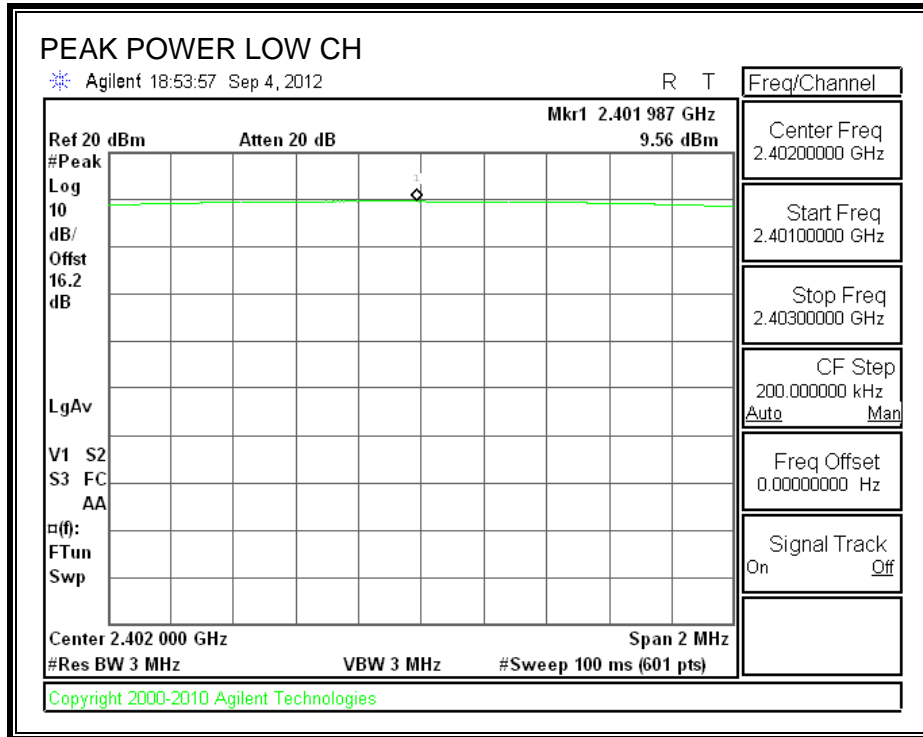

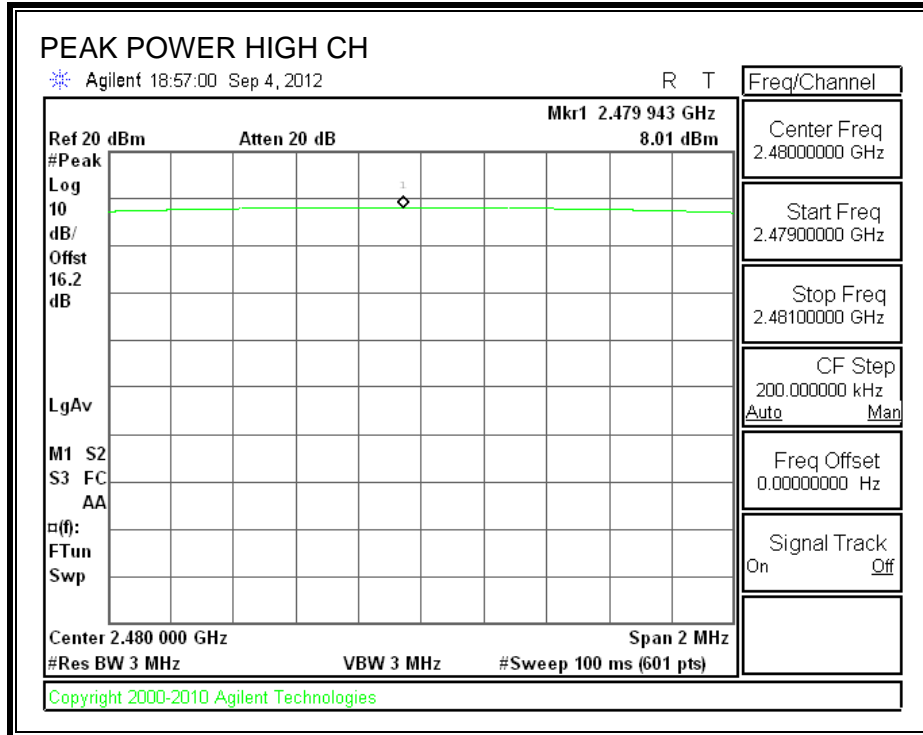

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 16.9 dB (including 15.3 dB dir. coupler and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.50
Middle	2441	9.00
High	2480	8.60

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

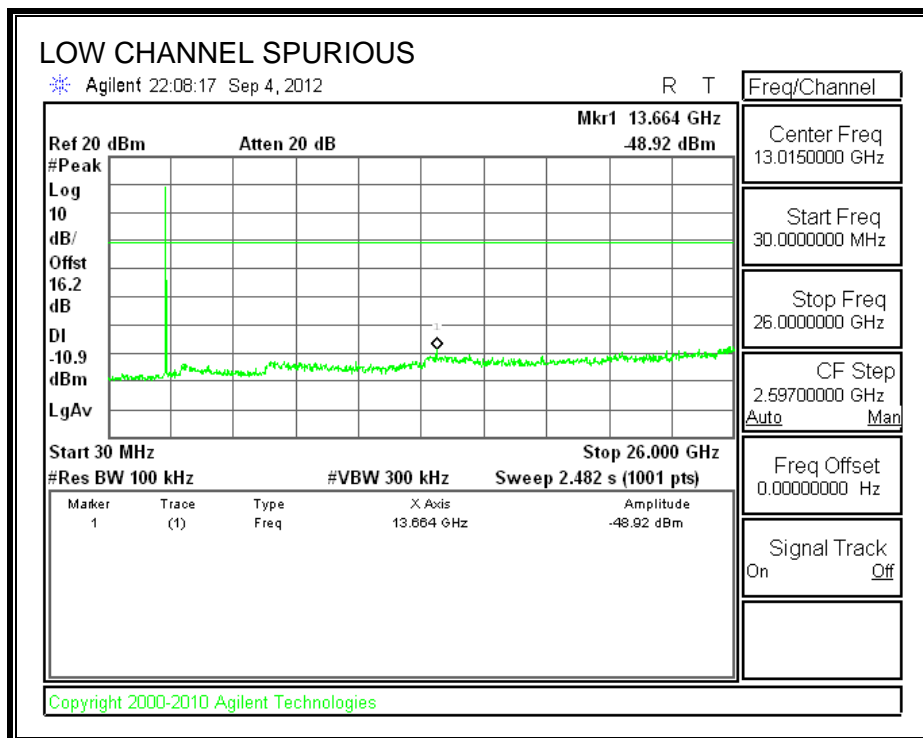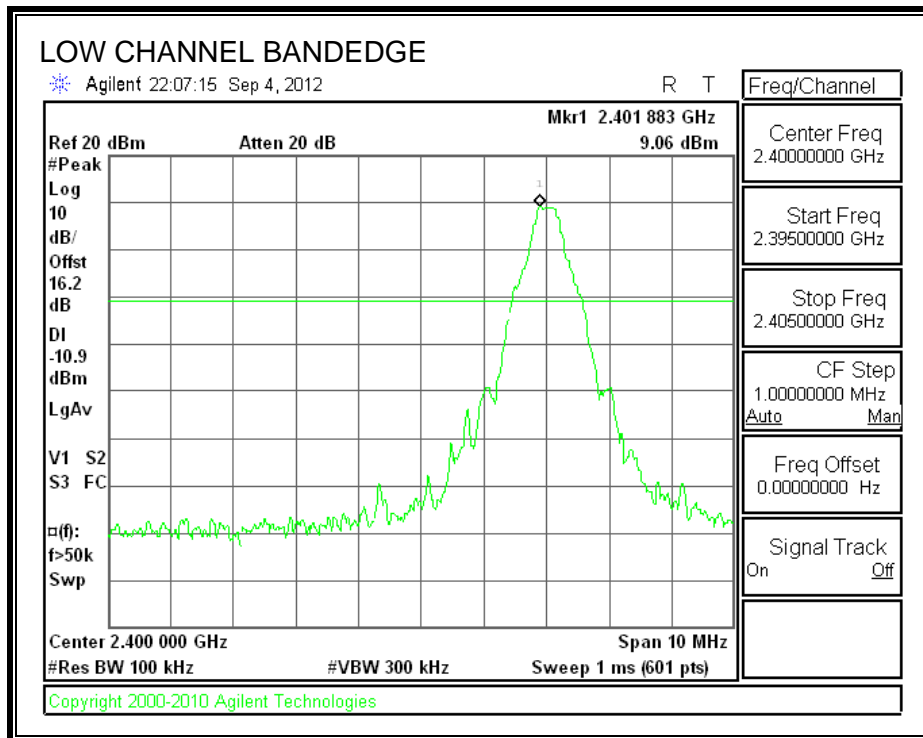

SPURIOUS EMISSIONS, MID CHANNEL

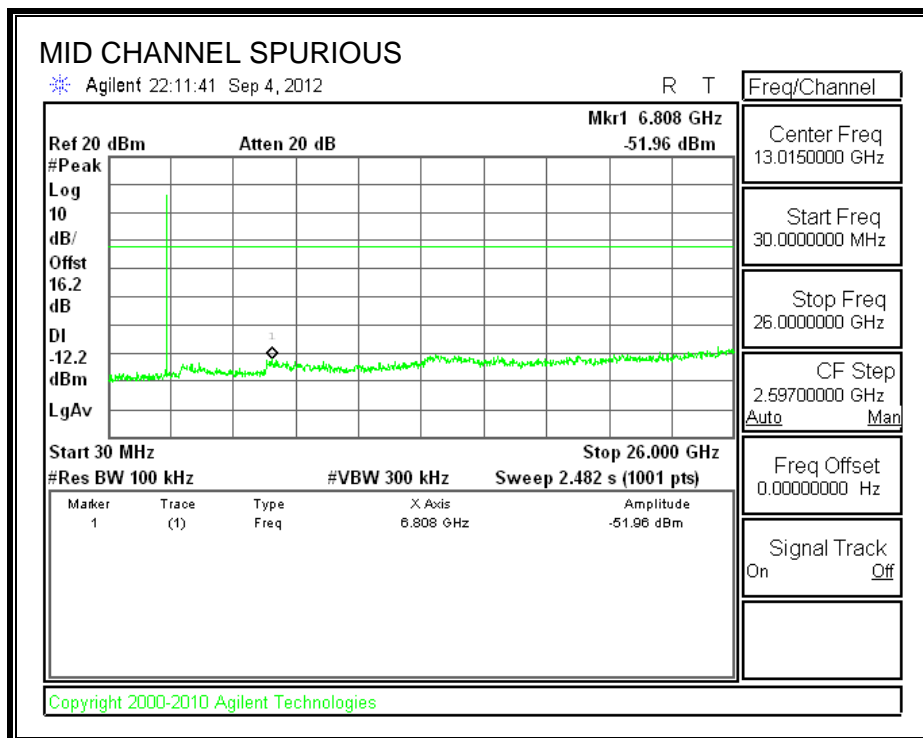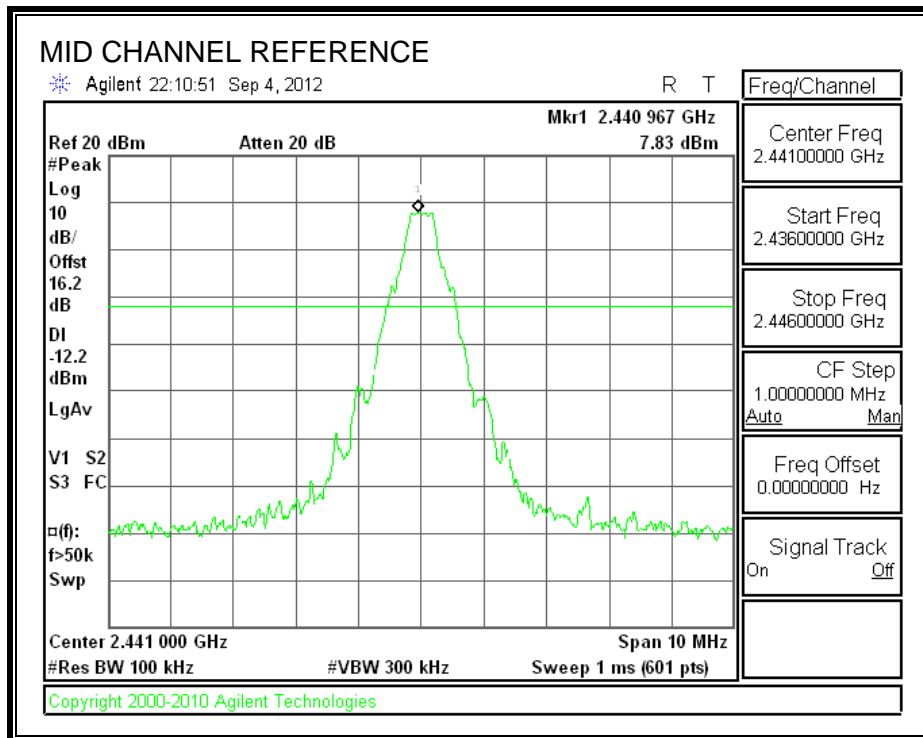

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1311	1241.6
Middle	2441	1311	1232.5
High	2480	1309	1232.6


20 dB BANDWIDTH

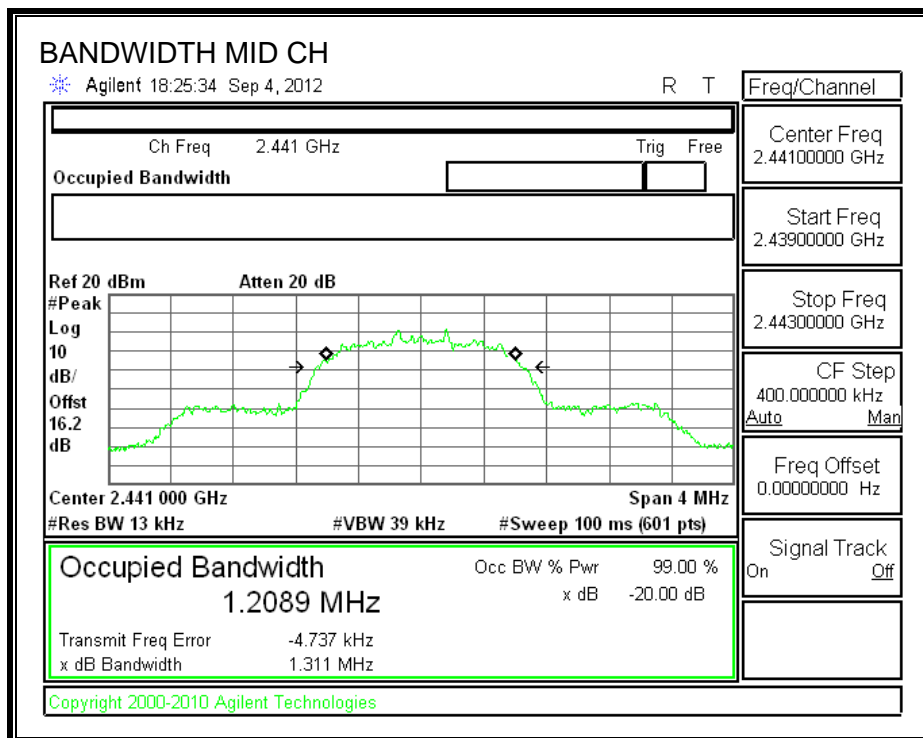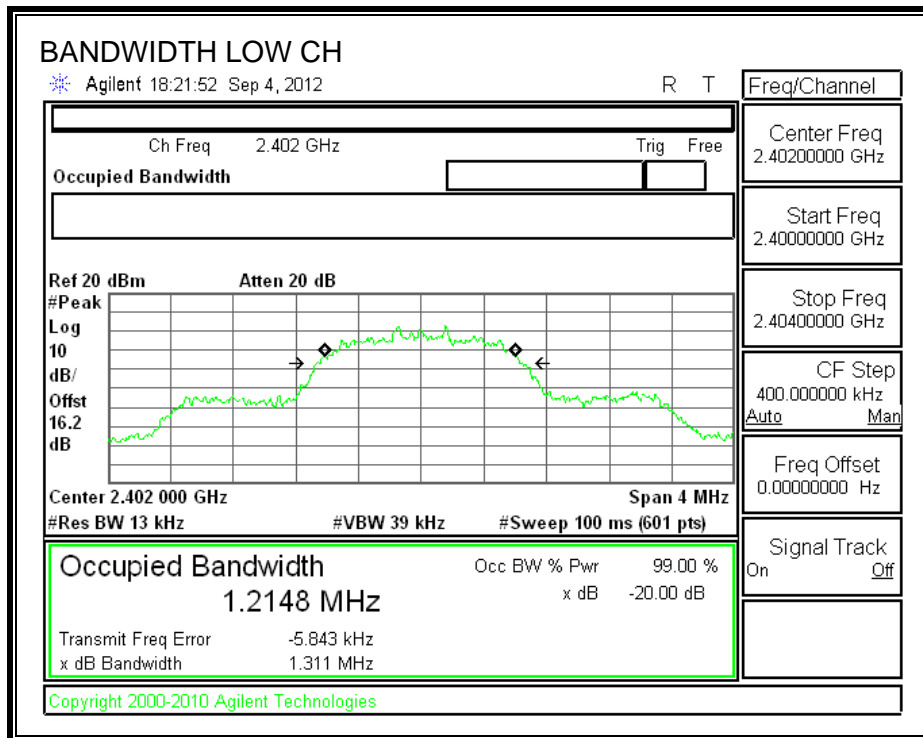

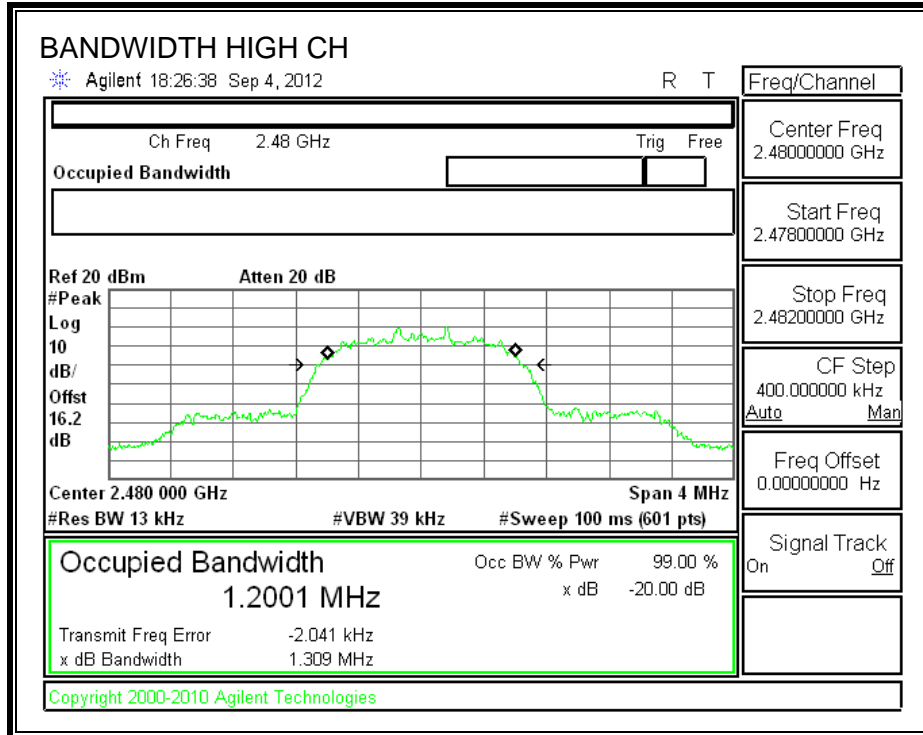

99% BANDWIDTH

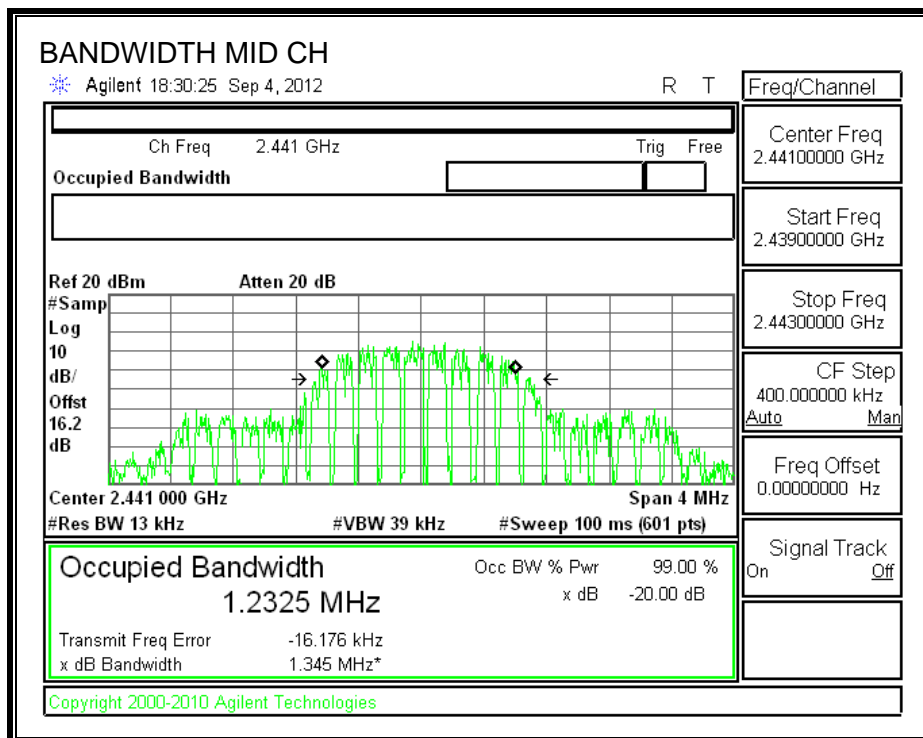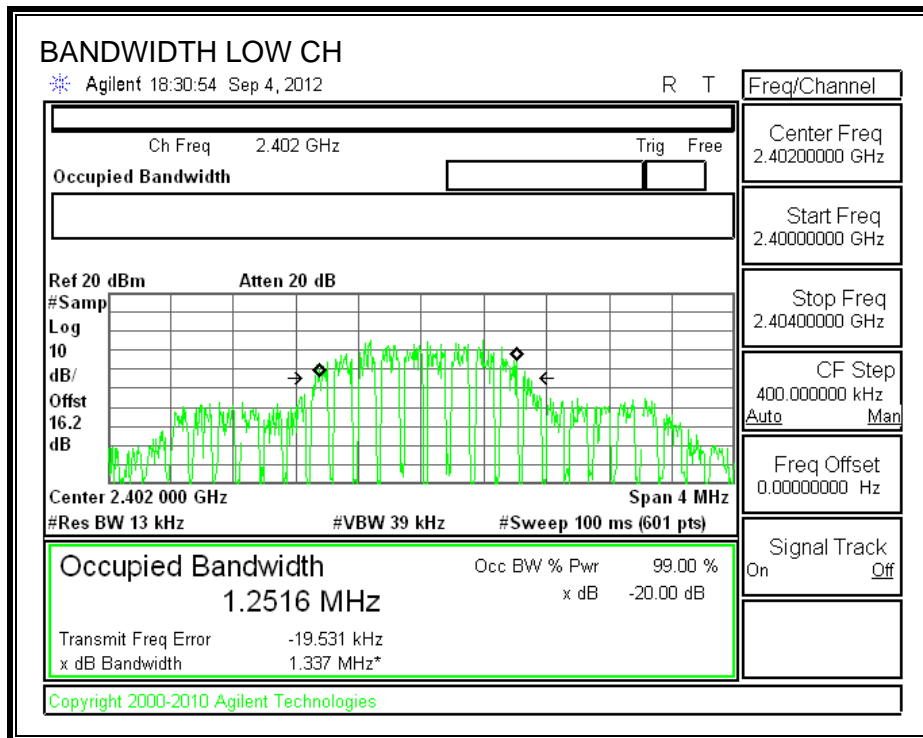

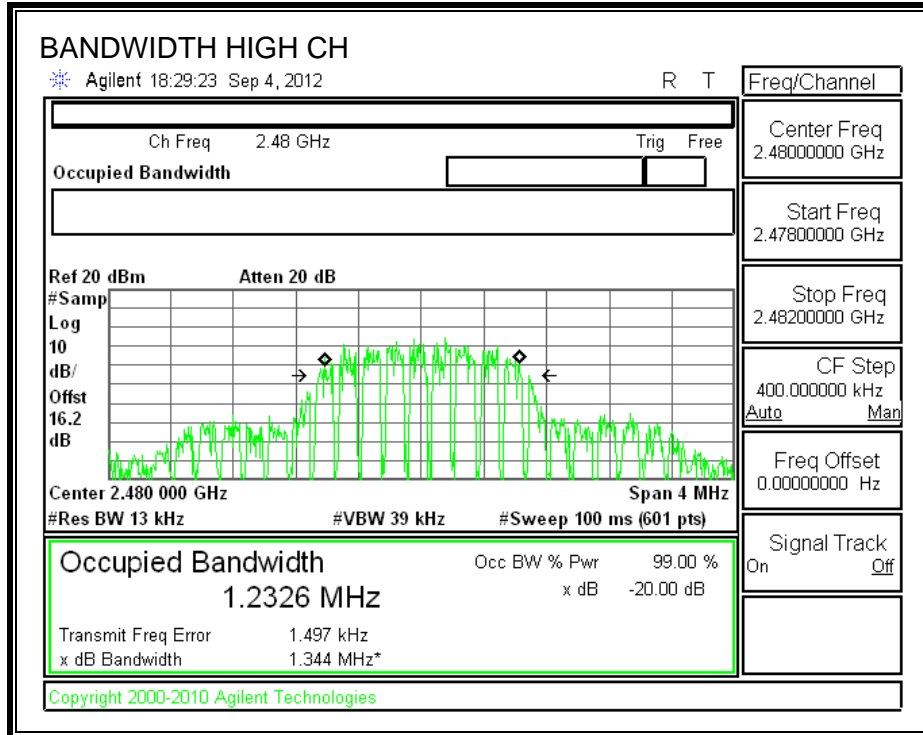

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

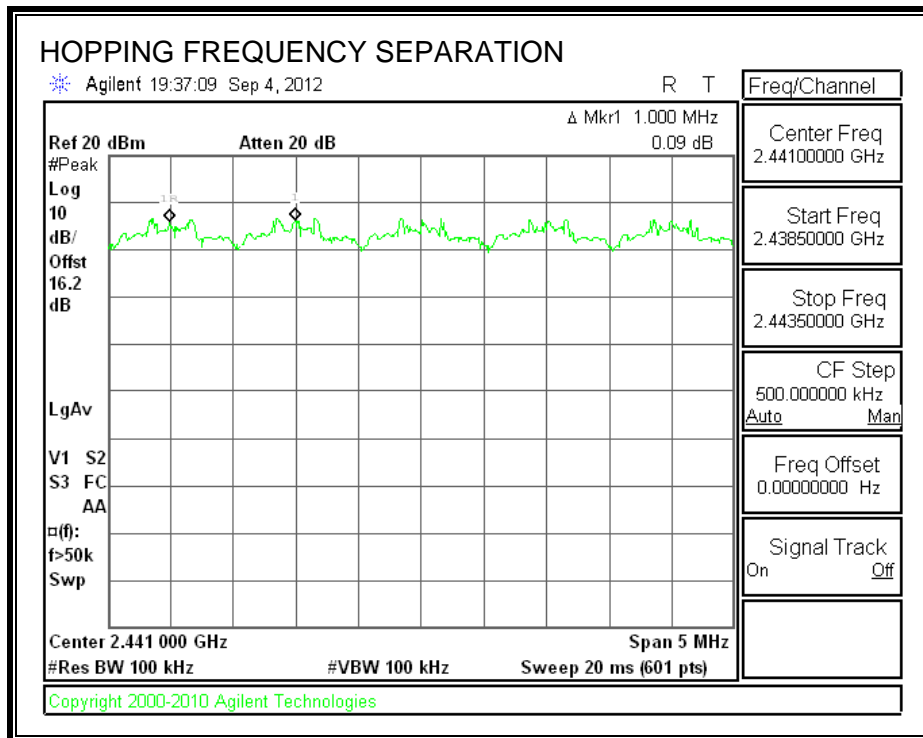

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

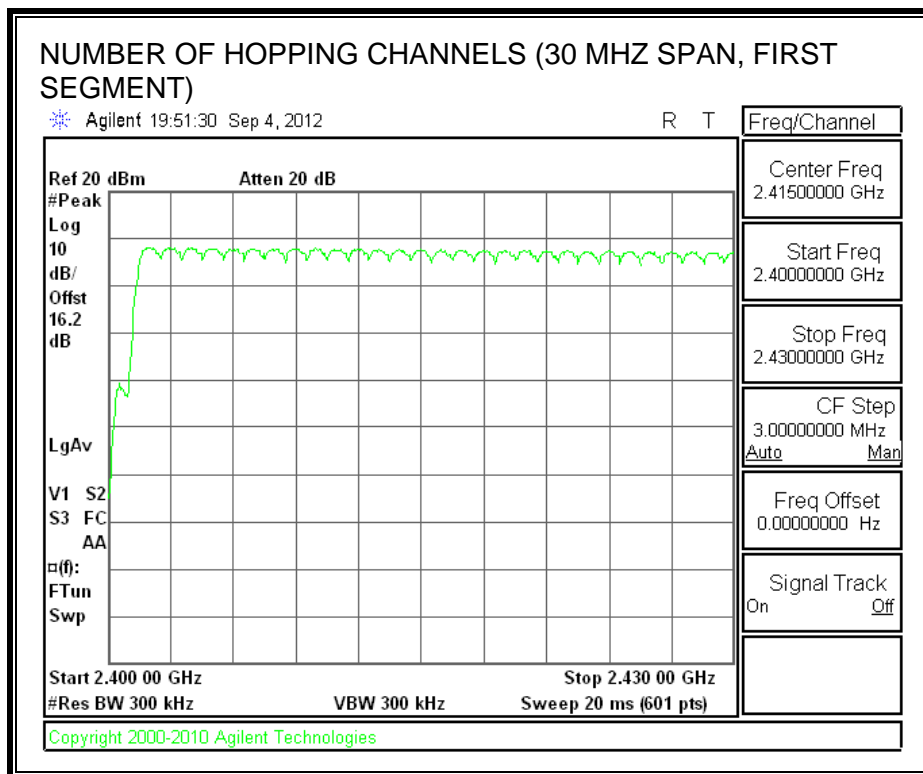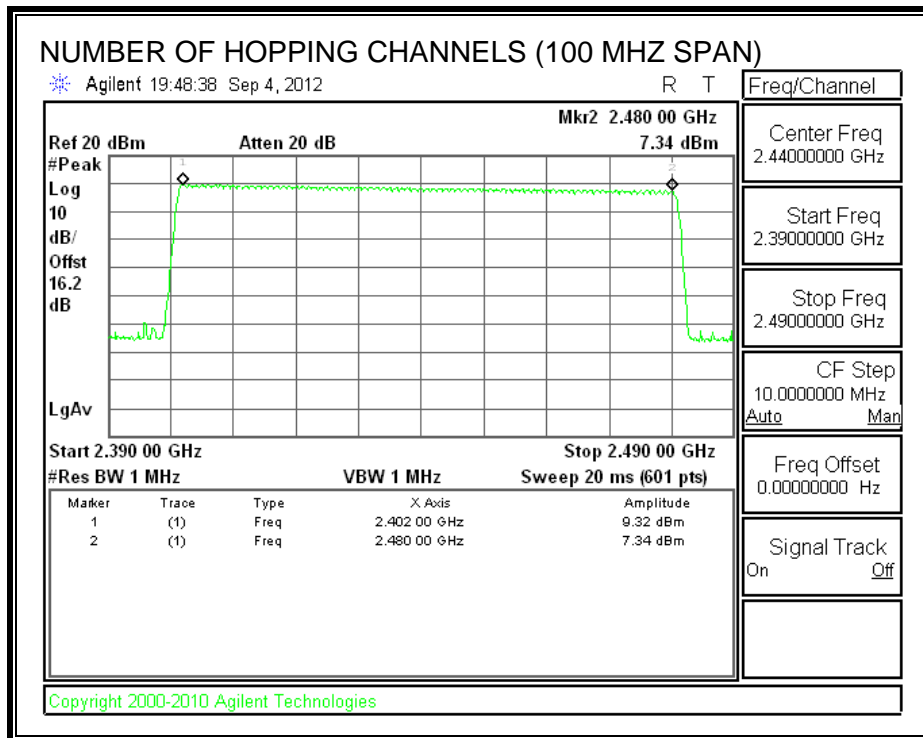

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.4233	32	0.135	0.4	-0.265
DH3	1.667	17	0.283	0.4	-0.117
DH5	2.92	13	0.380	0.4	-0.020


PULSE WIDTH - DH1

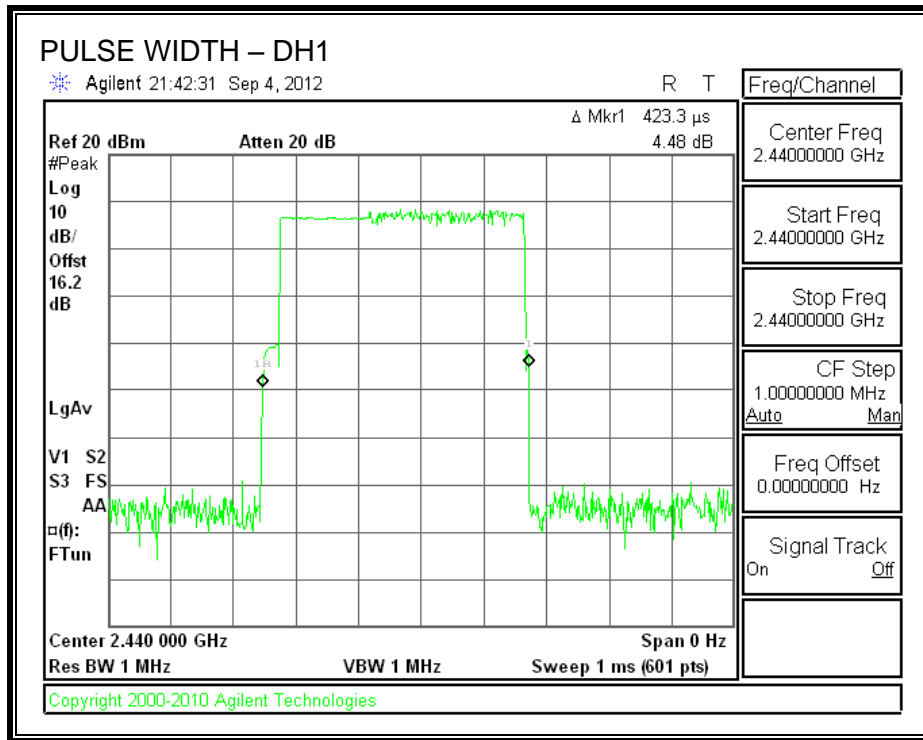


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

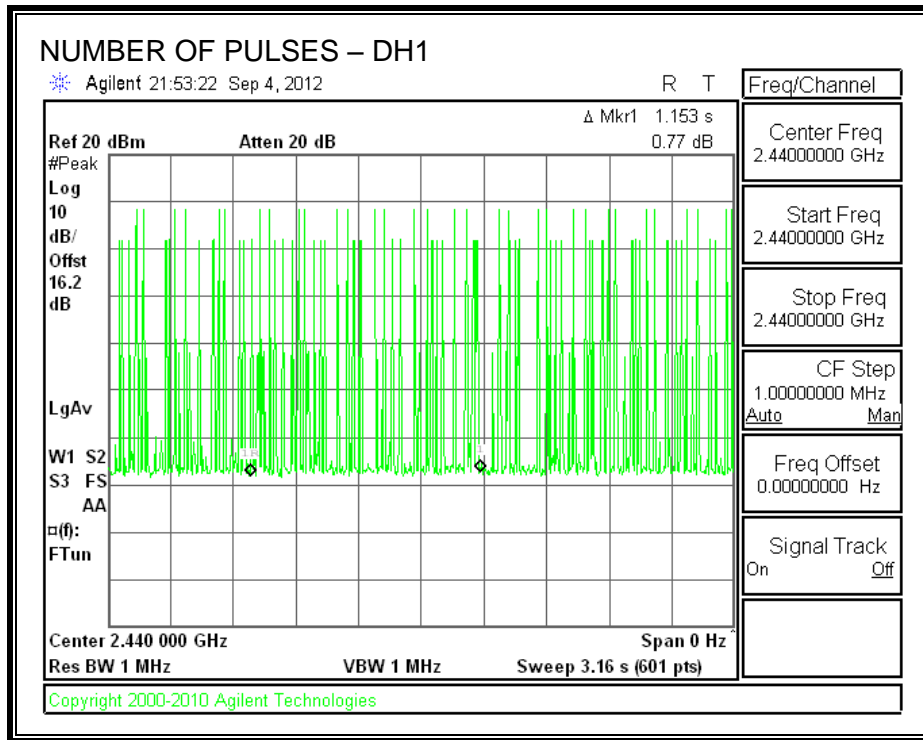


PULSE WIDTH – DH3

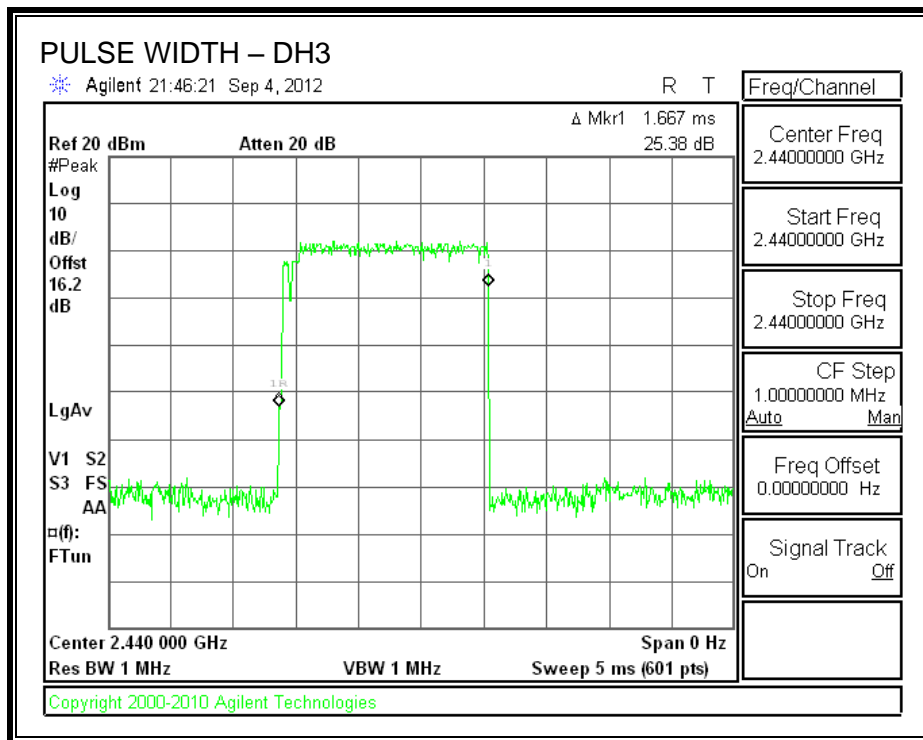


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

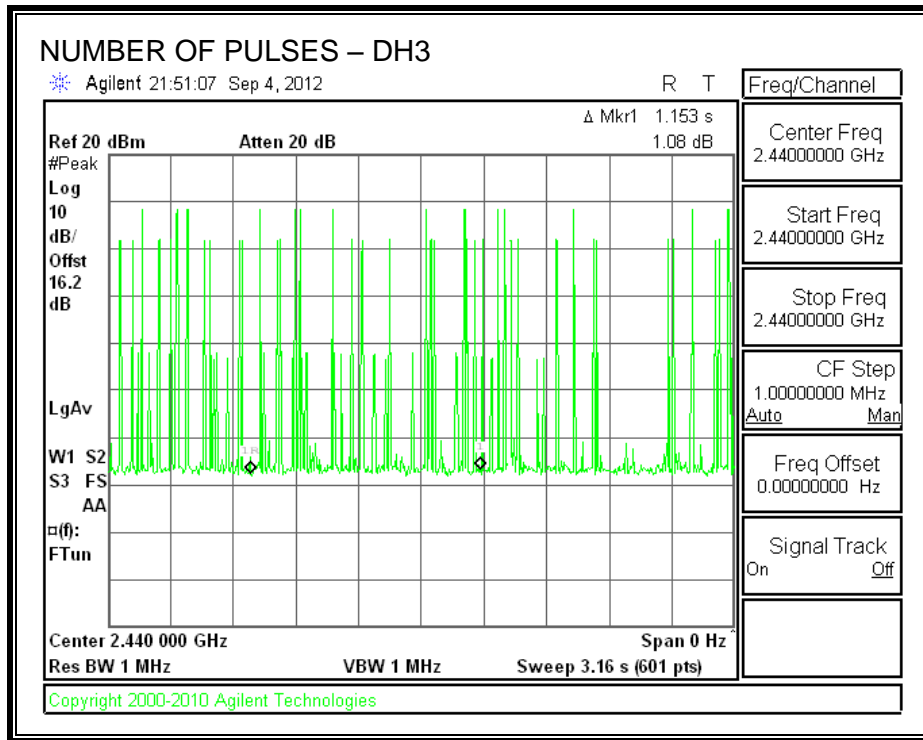

PULSE WIDTH – DH5

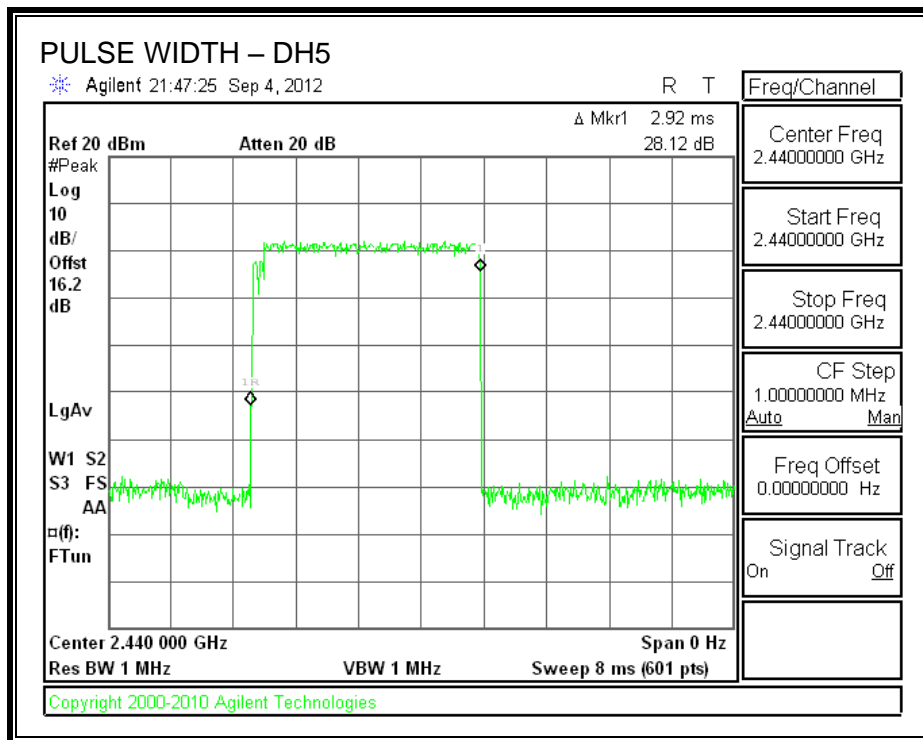

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

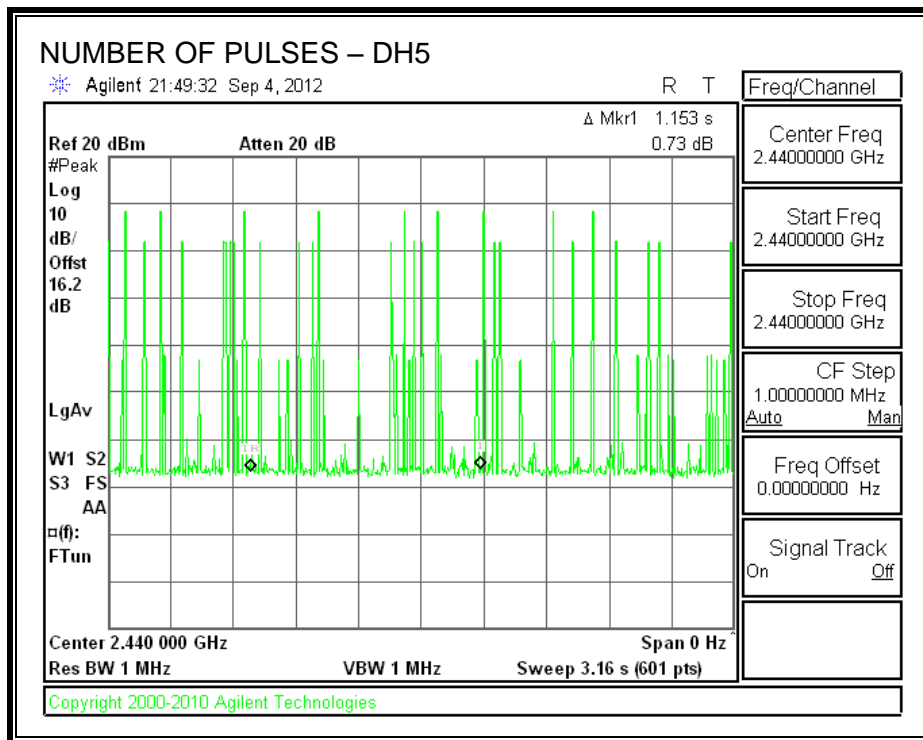

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.01	30	-19.99
Middle	2441	8.81	30	-21.19
High	2480	8.27	30	-21.73

OUTPUT POWER

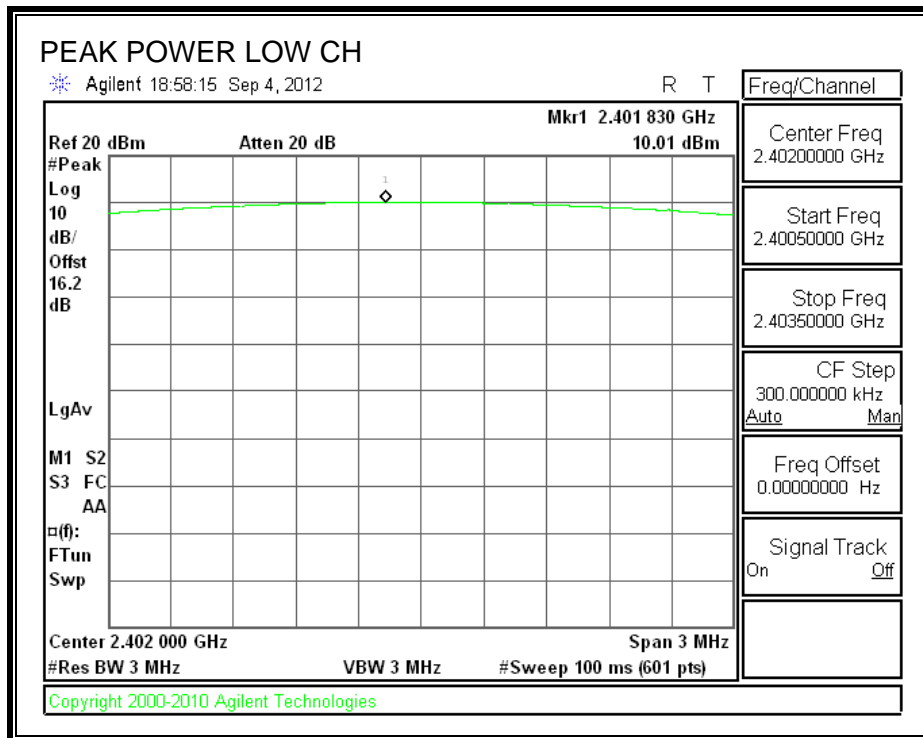

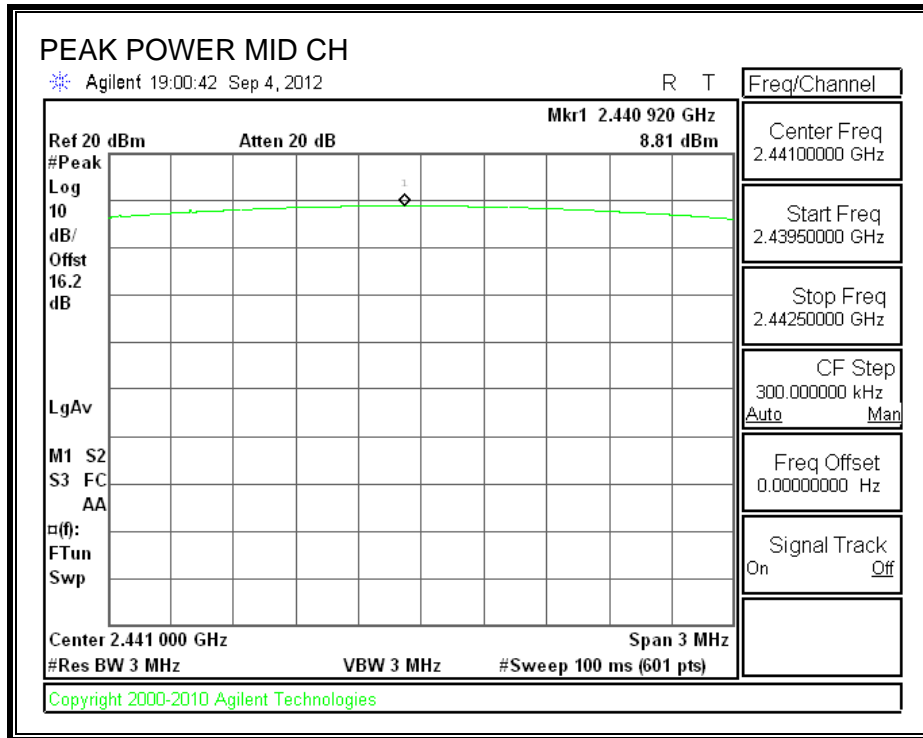

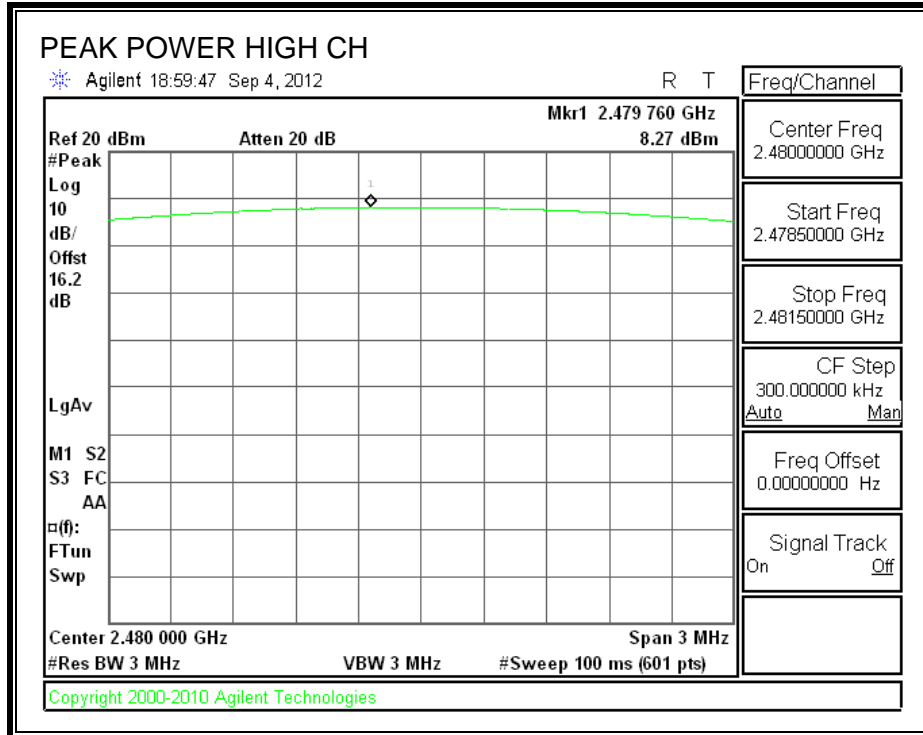

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 16.9 dB (including 15.3 dB dir. coupler and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.01
Middle	2441	8.81
High	2480	6.20

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

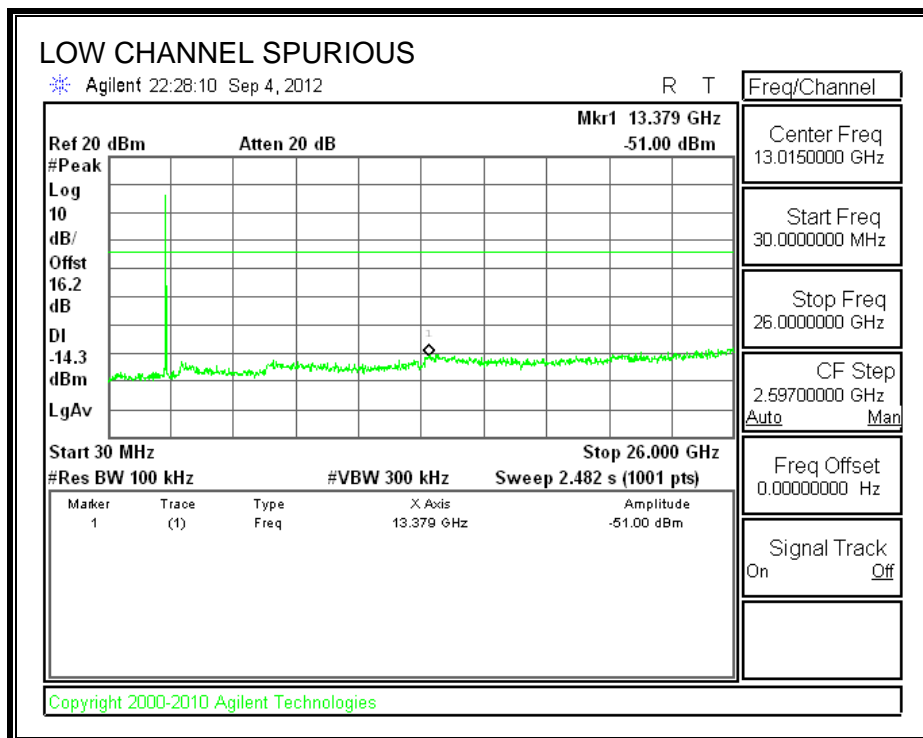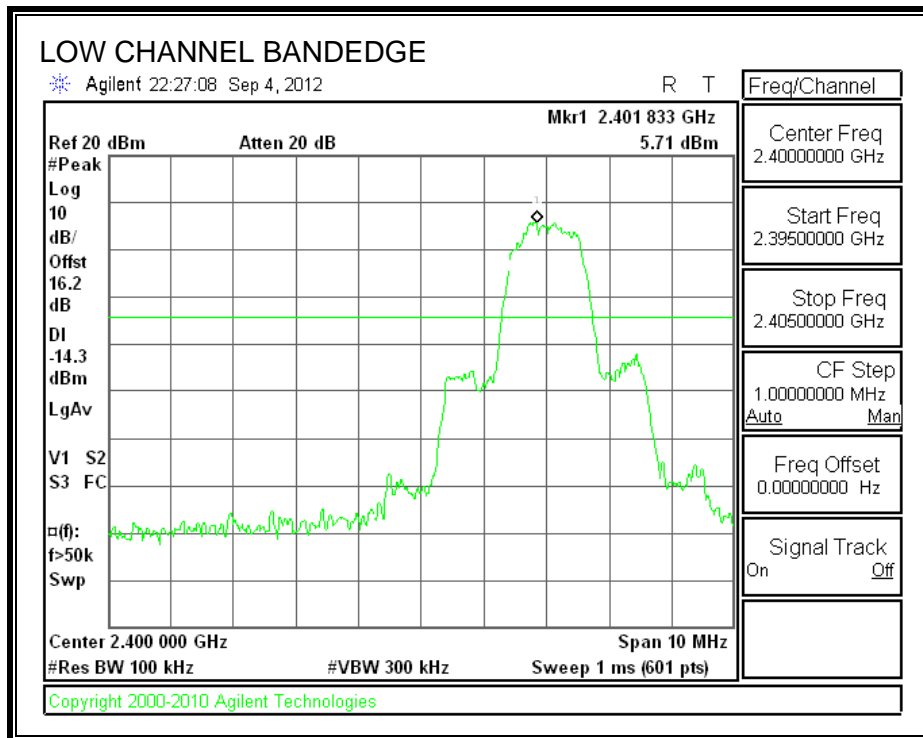



SPURIOUS EMISSIONS, MID CHANNEL

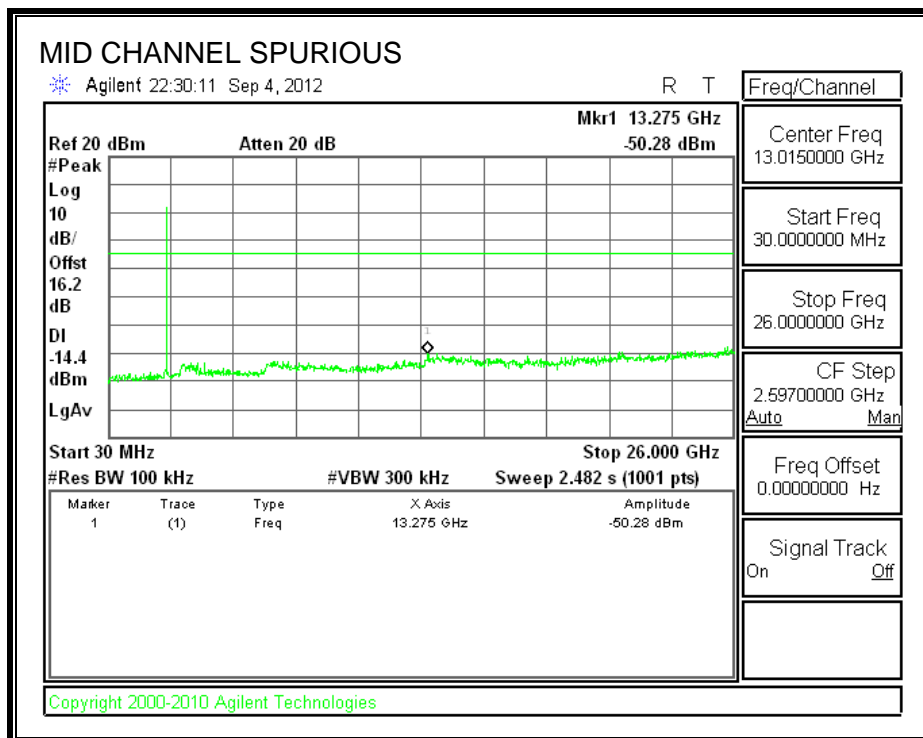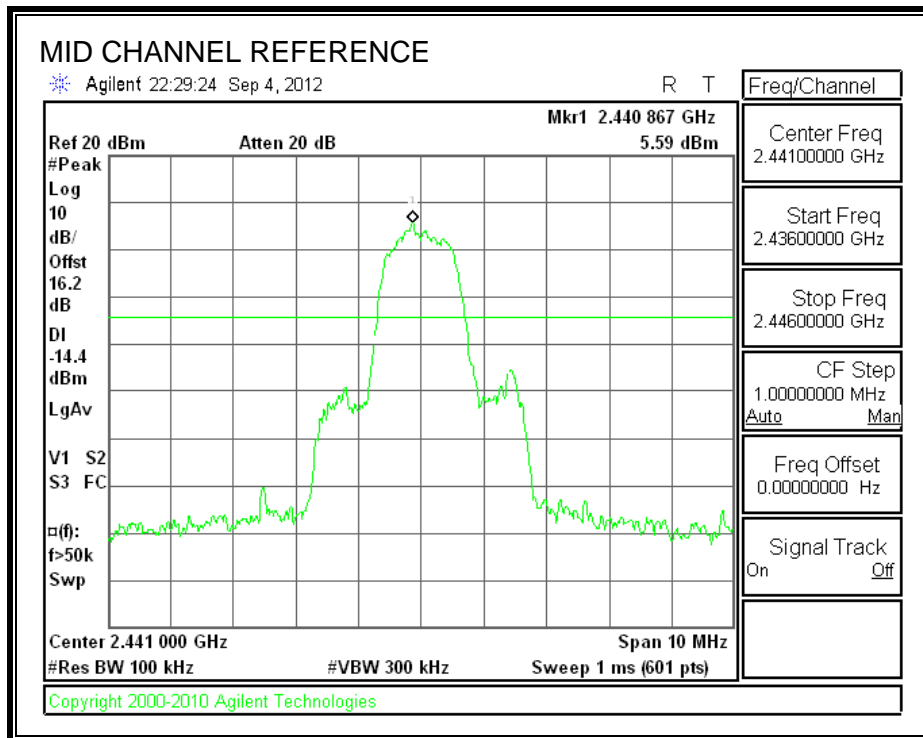

SPURIOUS EMISSIONS, HIGH CHANNEL

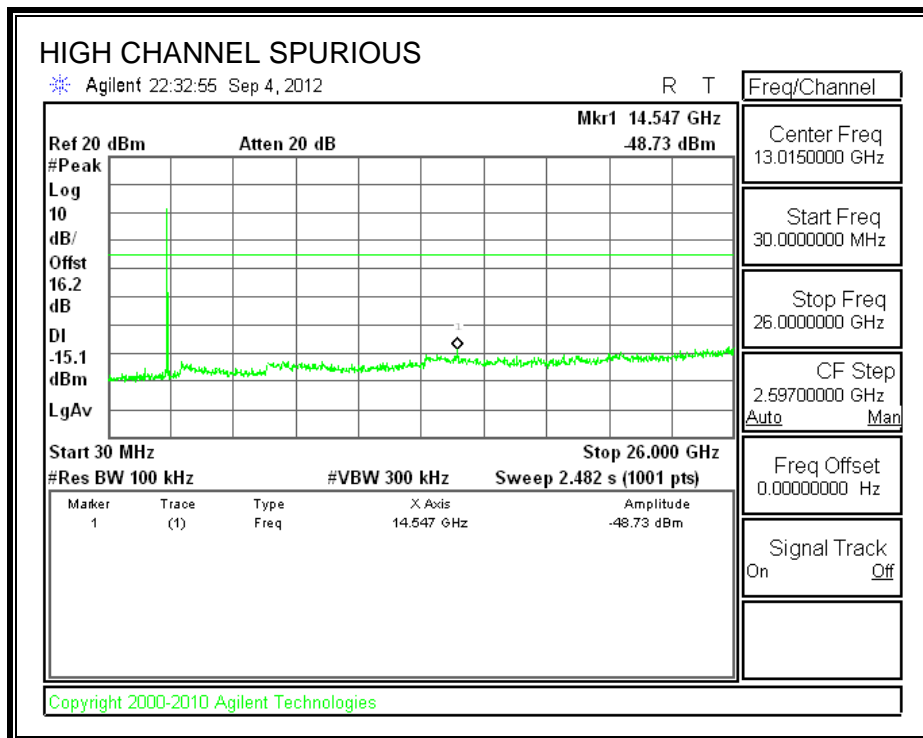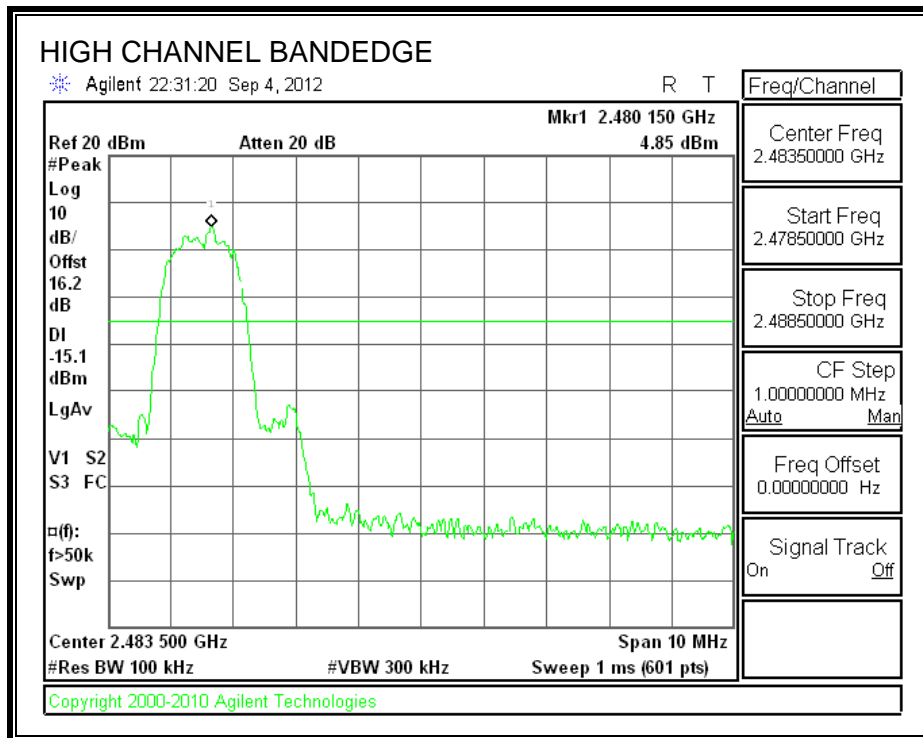

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

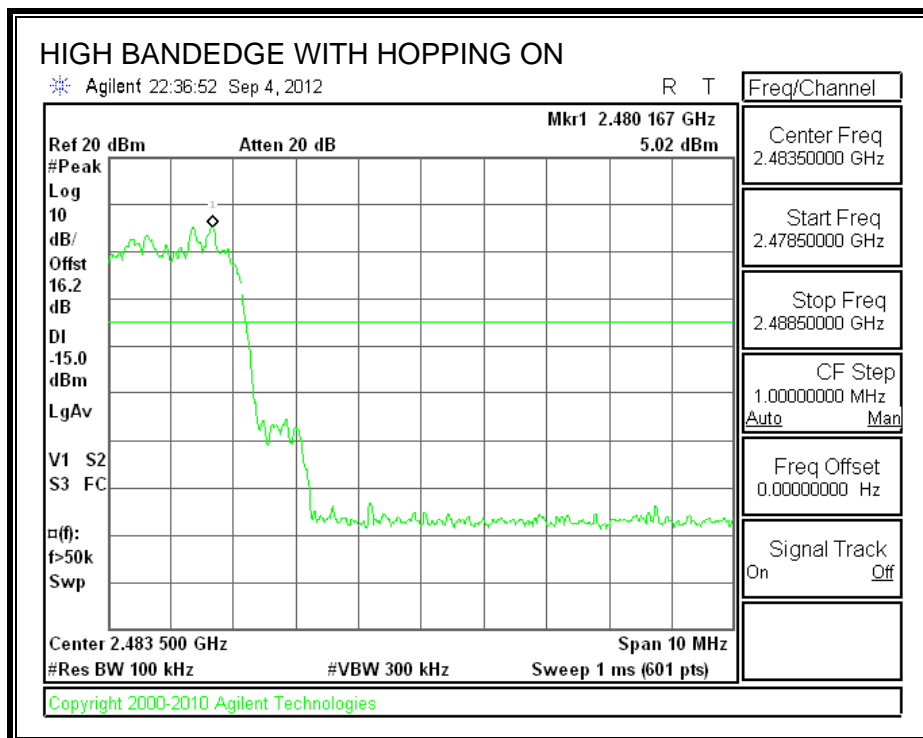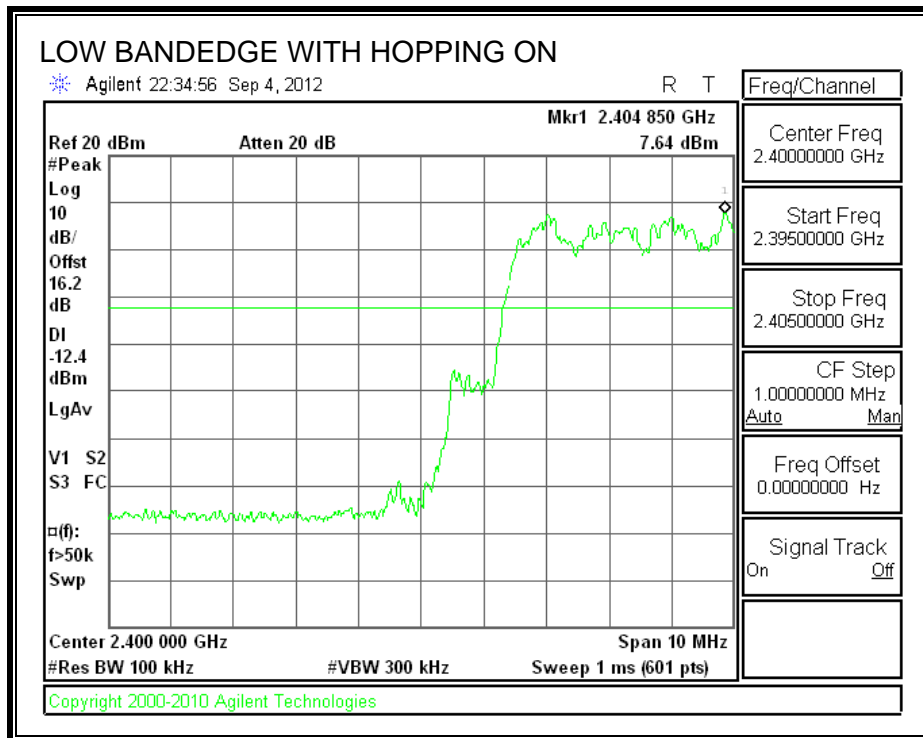

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

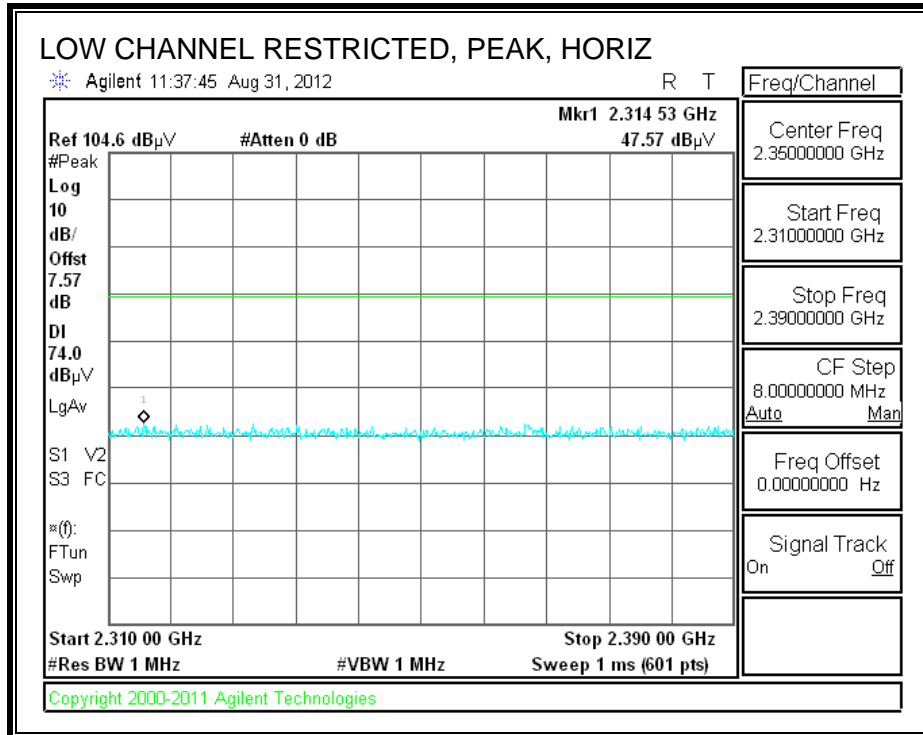

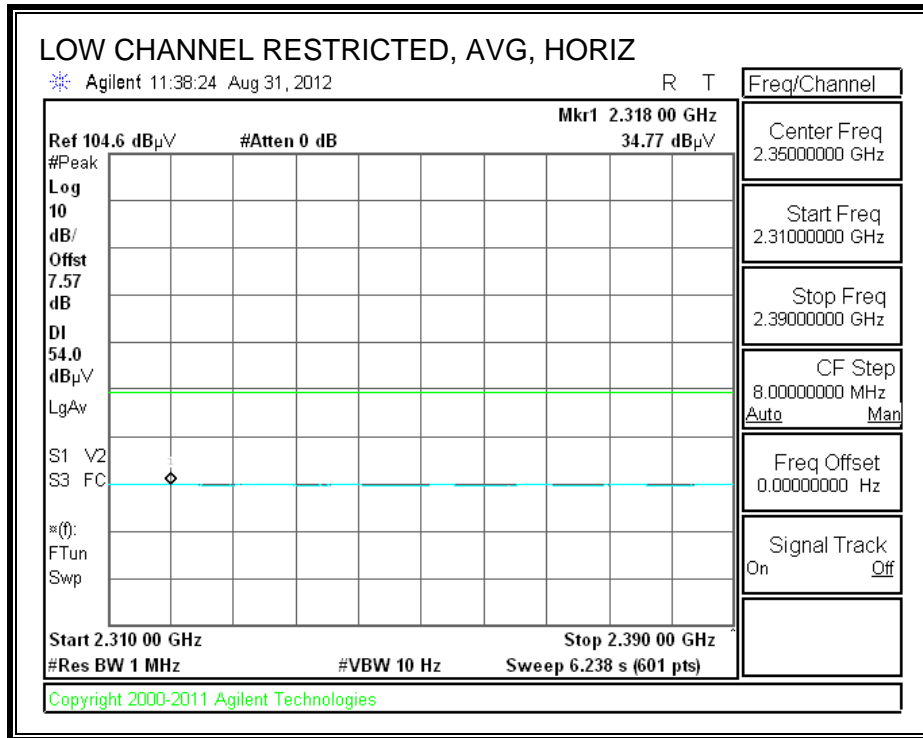



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

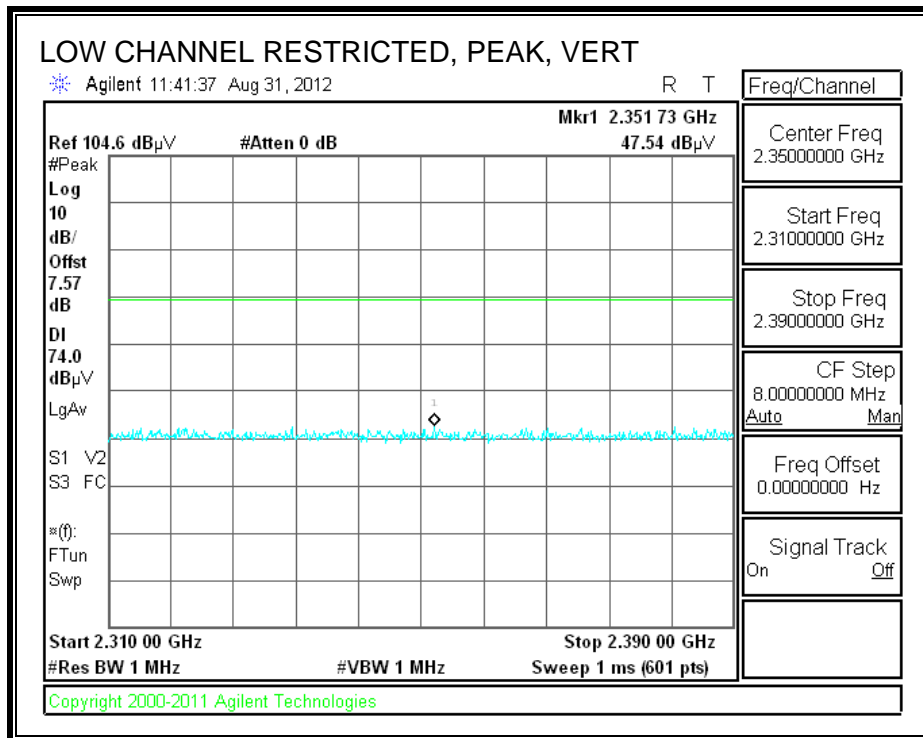

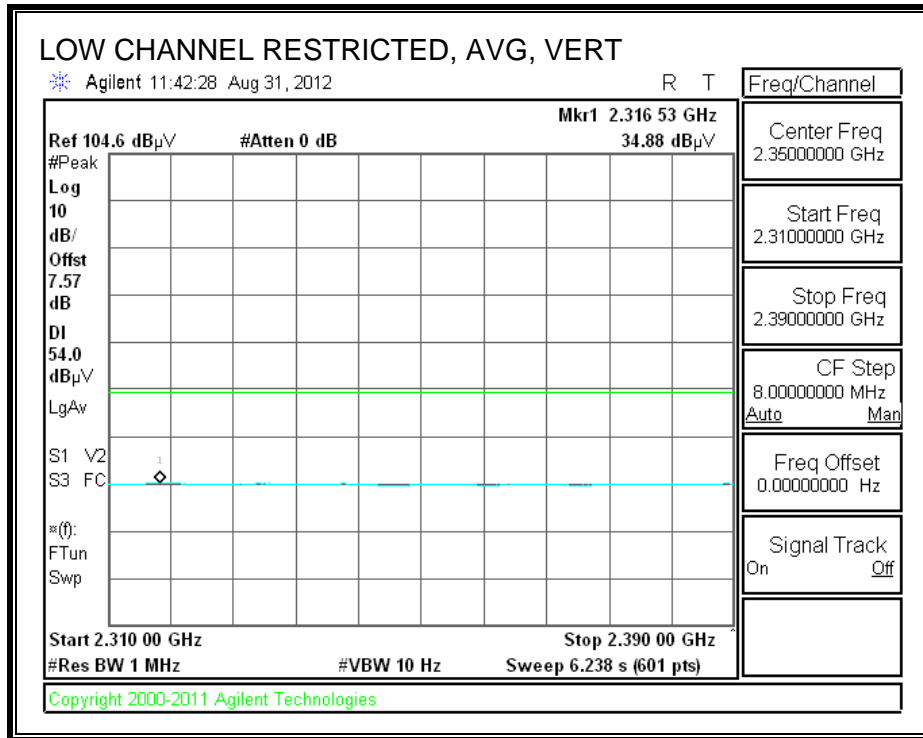



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

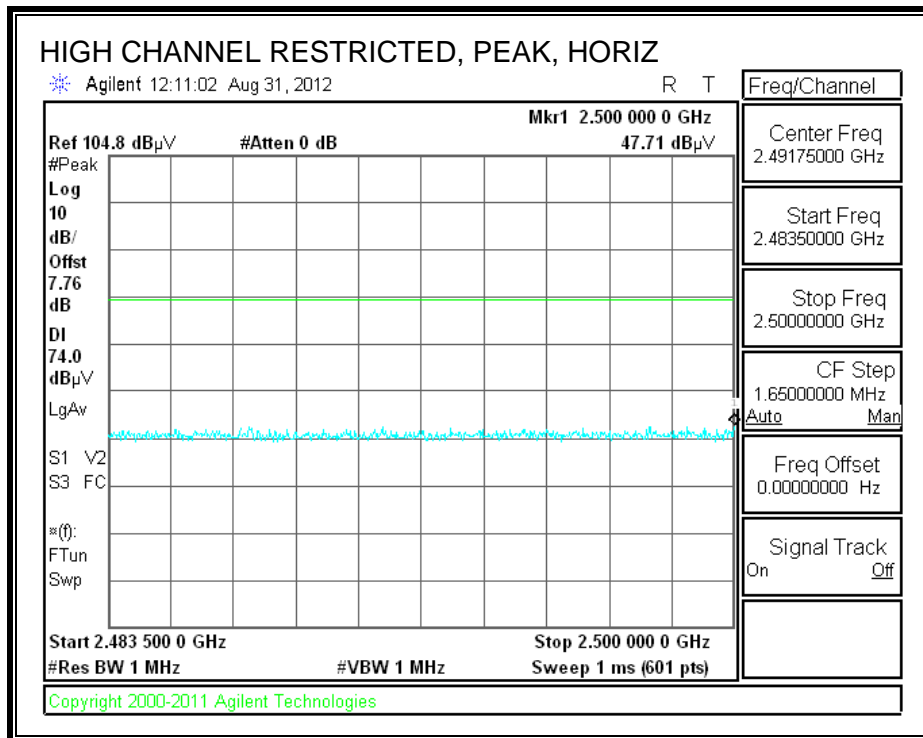

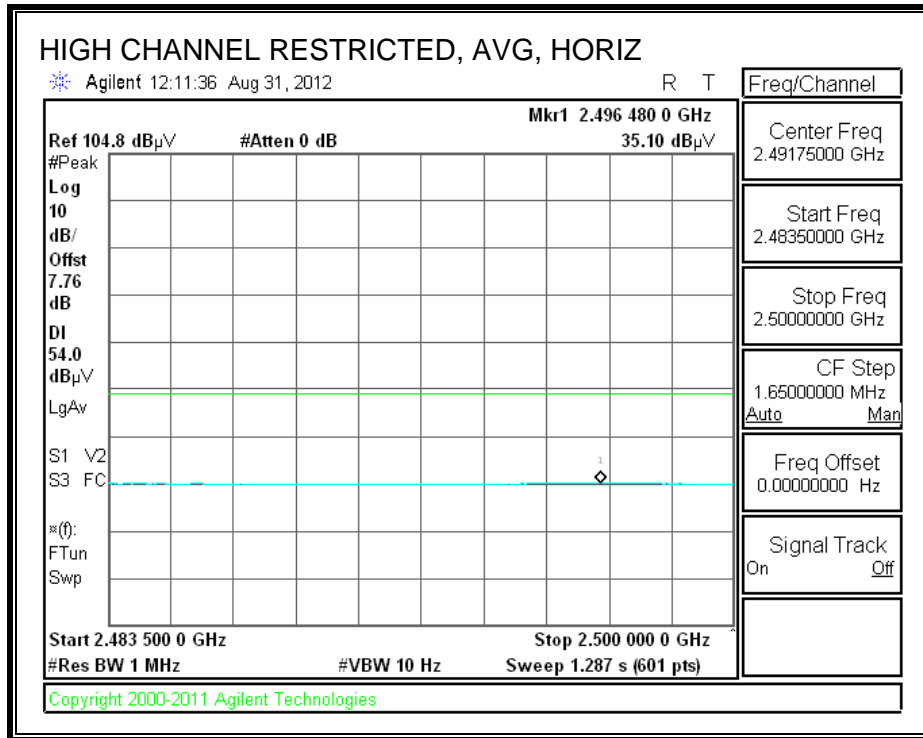

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

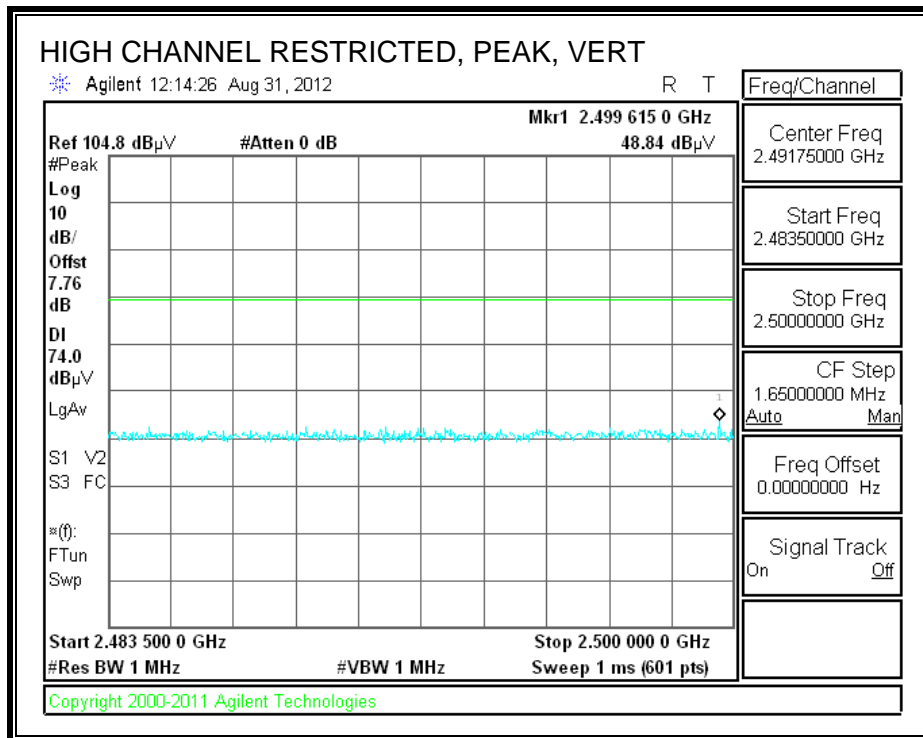

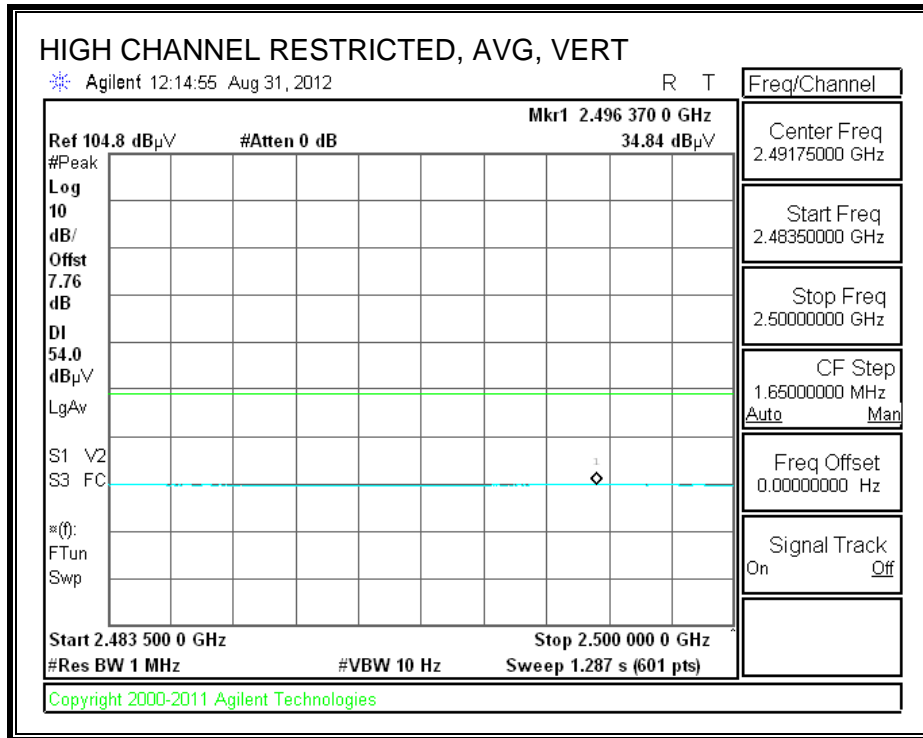


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber-B																	
Company:		Samsung															
Project #:		12114597															
Date:		8/31/2012															
Test Engineer:		Steve Aguilar															
Configuration:		Worst Case. Adapter + Headset															
Mode:		BT TX, GFSK															
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T59; S/N: 3245 @3m			T145 Agilent 3008A0056									FCC 15.205					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter		Peak Measurements			
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001		RBW=VBW=1MHz			
Average Measurements																	
RBW=1MHz ; VBW=10Hz																	
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Low Channel (2402MHz)																	
4.804	3.0	37.06	26.36	33.1	6.3	-34.8	0.0	0.0	41.6	30.9	74	54	-32.4	-23.1	H		
4.804	3.0	37.62	28.72	33.1	6.3	-34.8	0.0	0.0	42.1	33.2	74	54	-31.9	-20.8	V		
Mid Channel (2441MHz)																	
4.882	3.0	37.17	27.39	33.1	6.3	-34.8	0.0	0.0	41.8	32.0	74	54	-32.2	-22.0	H		
4.882	3.0	39.47	31.50	33.1	6.3	-34.8	0.0	0.0	44.1	36.1	74	54	-29.9	-17.9	V		
High Channel (2480MHz)																	
4.960	3.0	38.64	29.60	33.2	6.4	-34.8	0.0	0.0	43.4	34.4	74	54	-30.6	-19.6	H		
4.960	3.0	39.49	30.24	33.2	6.4	-34.8	0.0	0.0	44.3	35.0	74	54	-29.7	-19.0	V		
Rev. 11.10.11 Note: No other emissions were detected above the system noise floor.																	
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss		HPF	High Pass Filter													

8.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


s.a. 8-31-2012

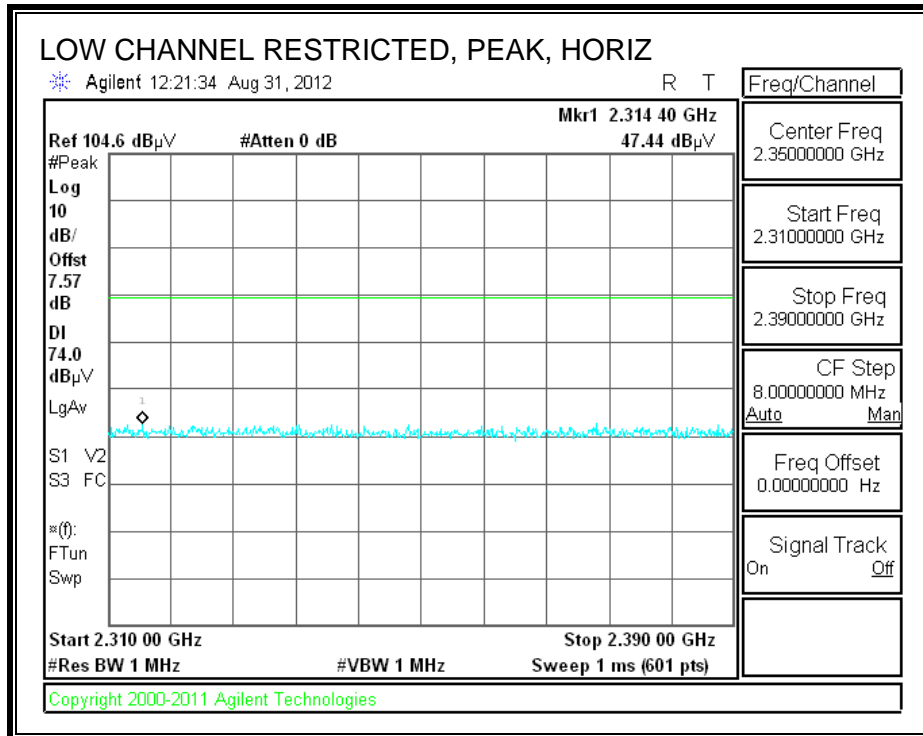

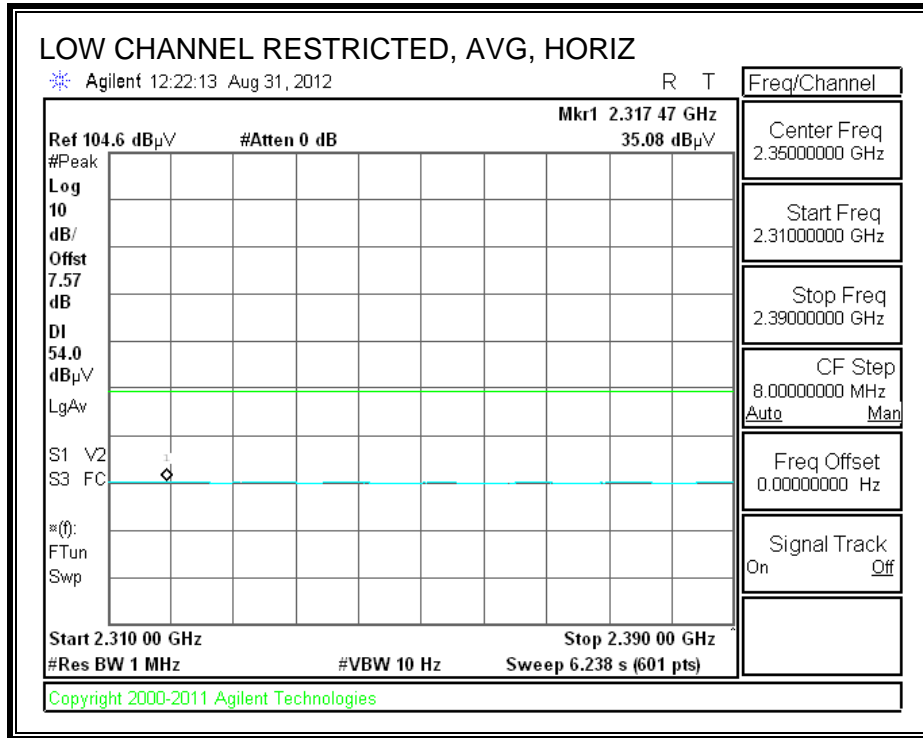



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

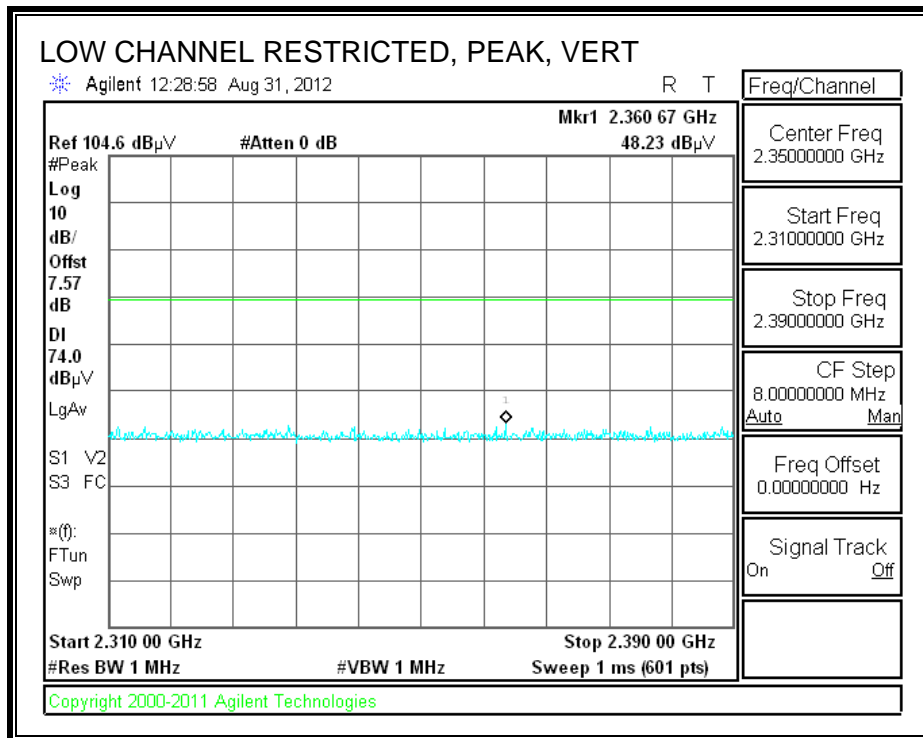

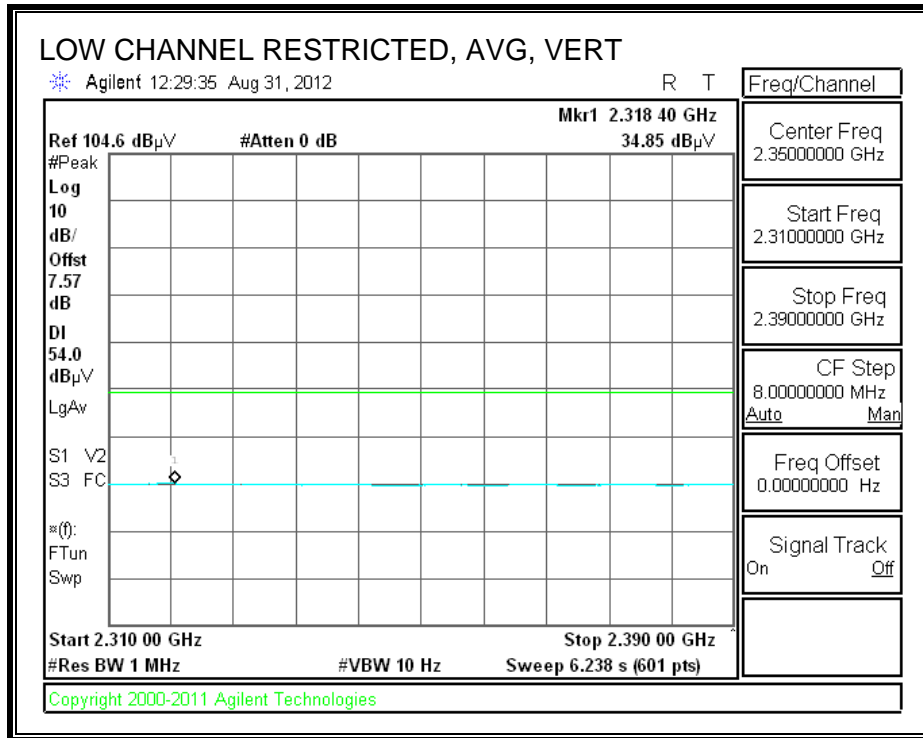



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

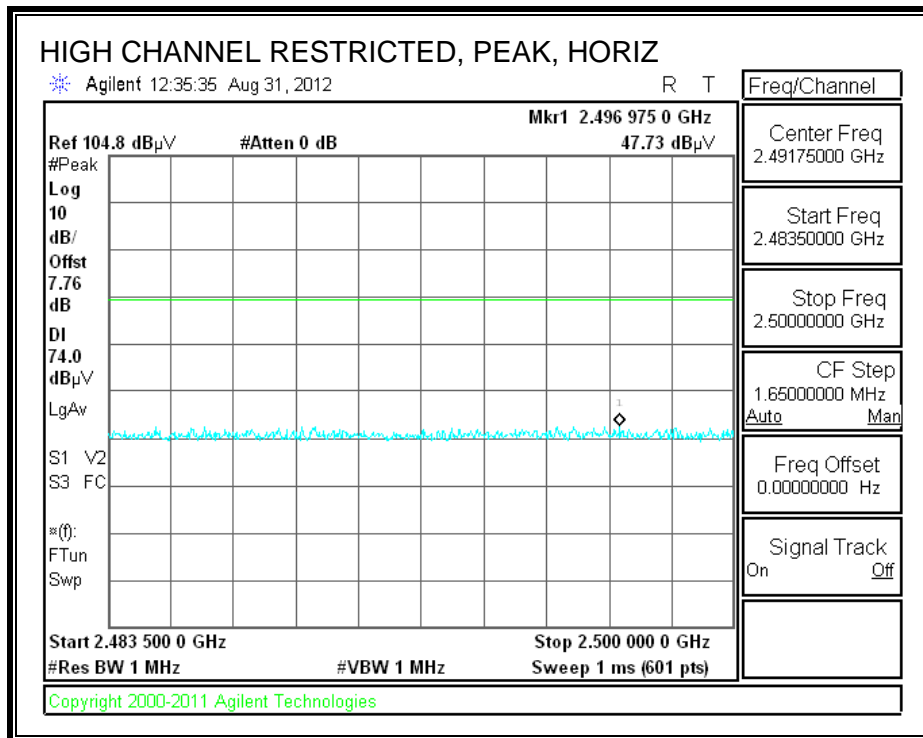

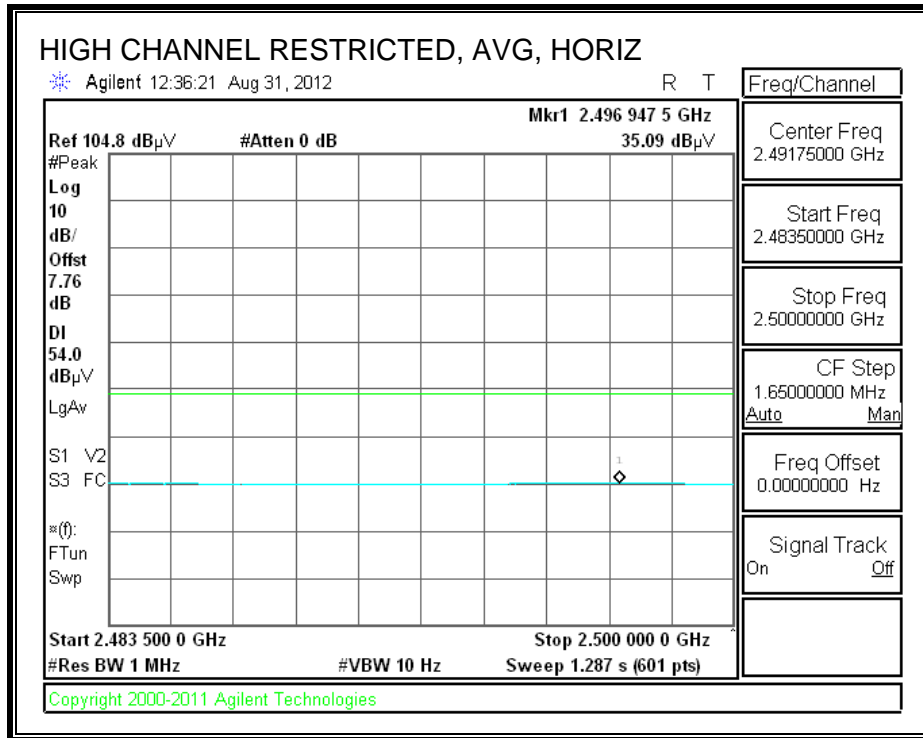

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

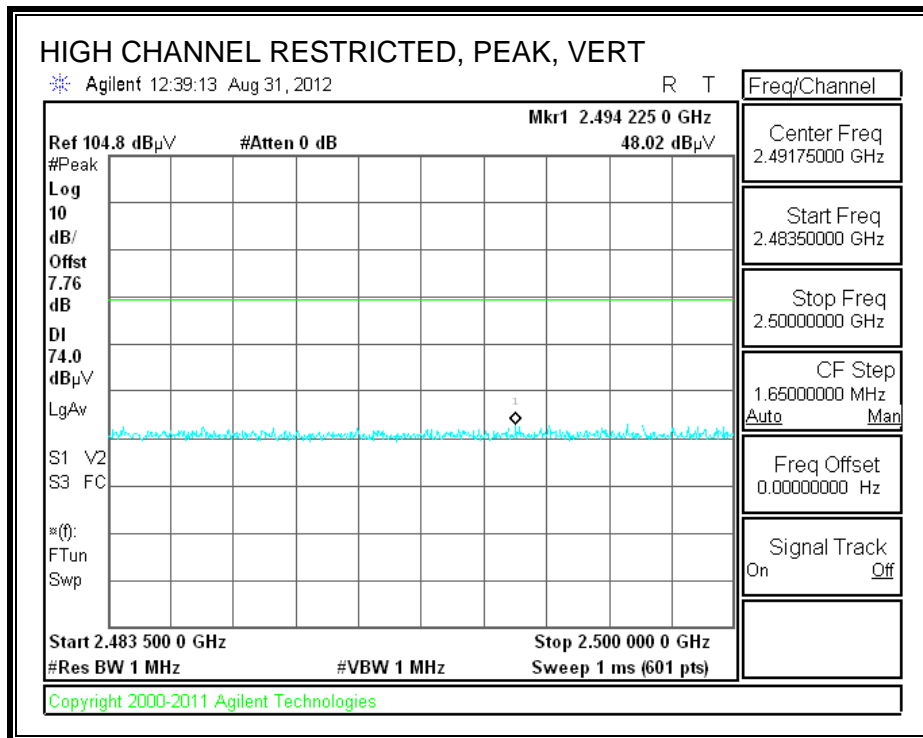

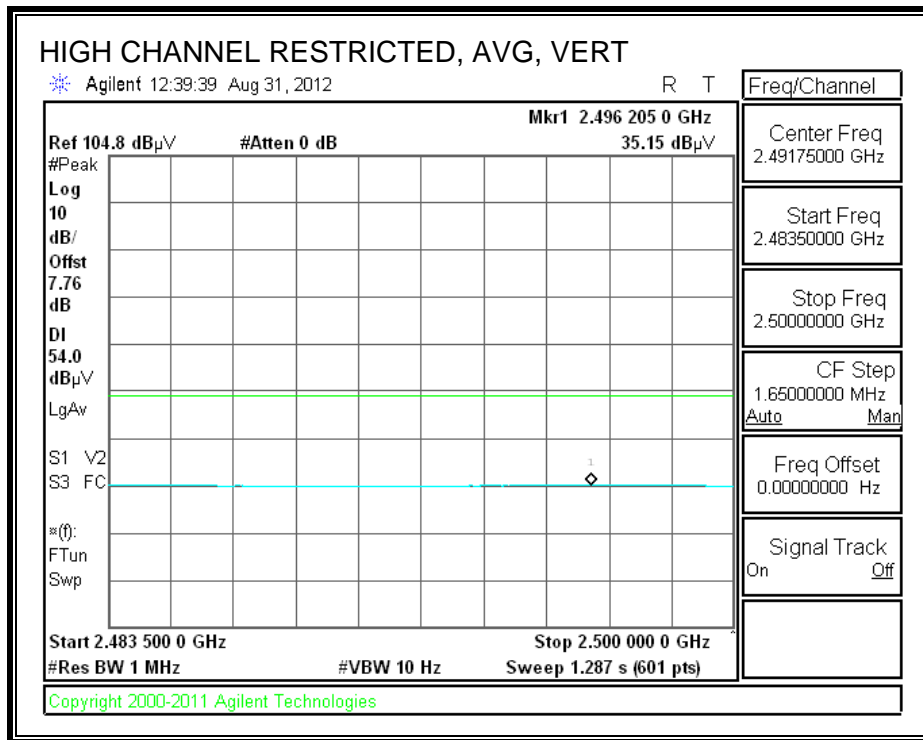


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber-B																
Company:		Samsung														
Project #:		12114597														
Date:		8/31/2012														
Test Engineer:		Steve Aguilar														
Configuration:		Worst Case. Adapter + Headset														
Mode:		BT TX, 8PSK														
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T59; S/N: 3245 @3m			T145 Agilent 3008A0056									FCC 15.205				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF		Reject Filter		Peak Measurements			
3' cable 22807700			12' cable 22807600			20' cable 22807500					R_001		RBW=VBW=1MHz			
Average Measurements																
RBW=1MHz ; VBW=10Hz																
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)	
Low Channel (2402MHz)																
4.804	3.0	36.53	24.54	33.1	6.3	-34.8	0.0	0.0	41.1	29.1	74	54	-32.9	-24.9	H	
4.804	3.0	37.20	24.53	33.1	6.3	-34.8	0.0	0.0	41.7	29.1	74	54	-32.3	-24.9	V	
Mid Channel (2441MHz)																
4.882	3.0	36.49	24.22	33.1	6.3	-34.8	0.0	0.0	41.1	28.9	74	54	-32.9	-25.1	H	
4.882	3.0	36.33	24.08	33.1	6.3	-34.8	0.0	0.0	41.0	28.7	74	54	-33.0	-25.3	V	
High Channel (2480MHz)																
4.960	3.0	36.82	24.21	33.2	6.4	-34.8	0.0	0.0	41.6	29.0	74	54	-32.4	-25.0	H	
4.960	3.0	36.98	24.34	33.2	6.4	-34.8	0.0	0.0	41.8	29.1	74	54	-32.2	-24.9	V	
Rev. 11.10.11																
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit									
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit									
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit									
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit									
CL	Cable Loss		HPF	High Pass Filter												

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

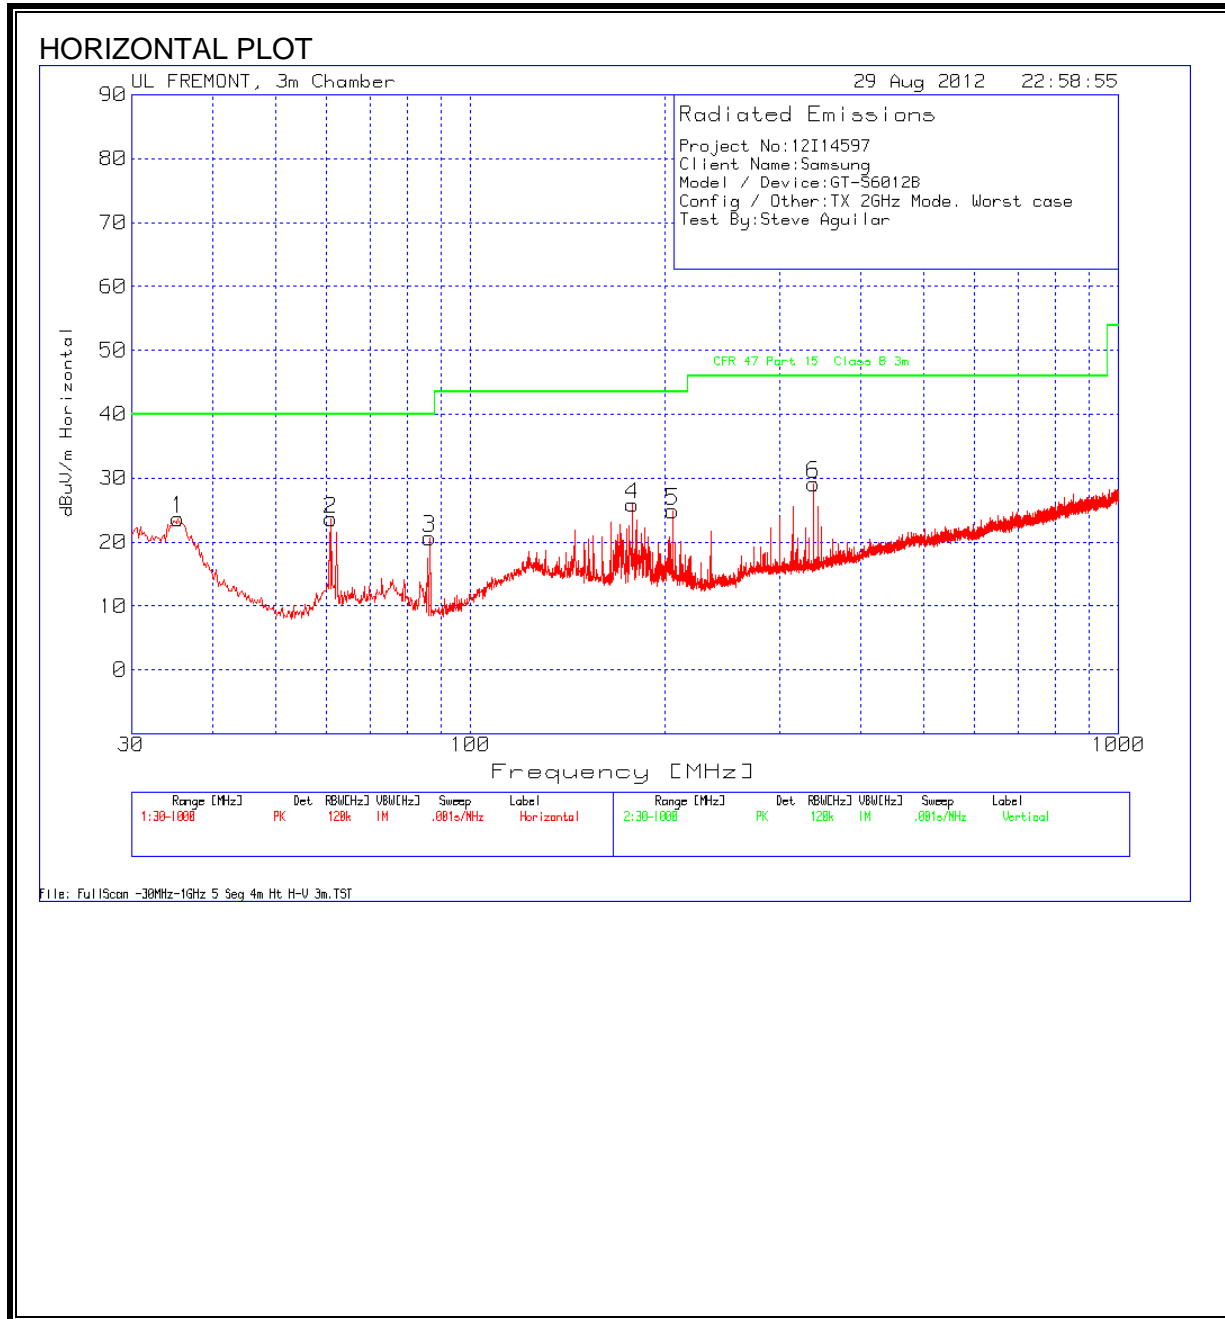

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

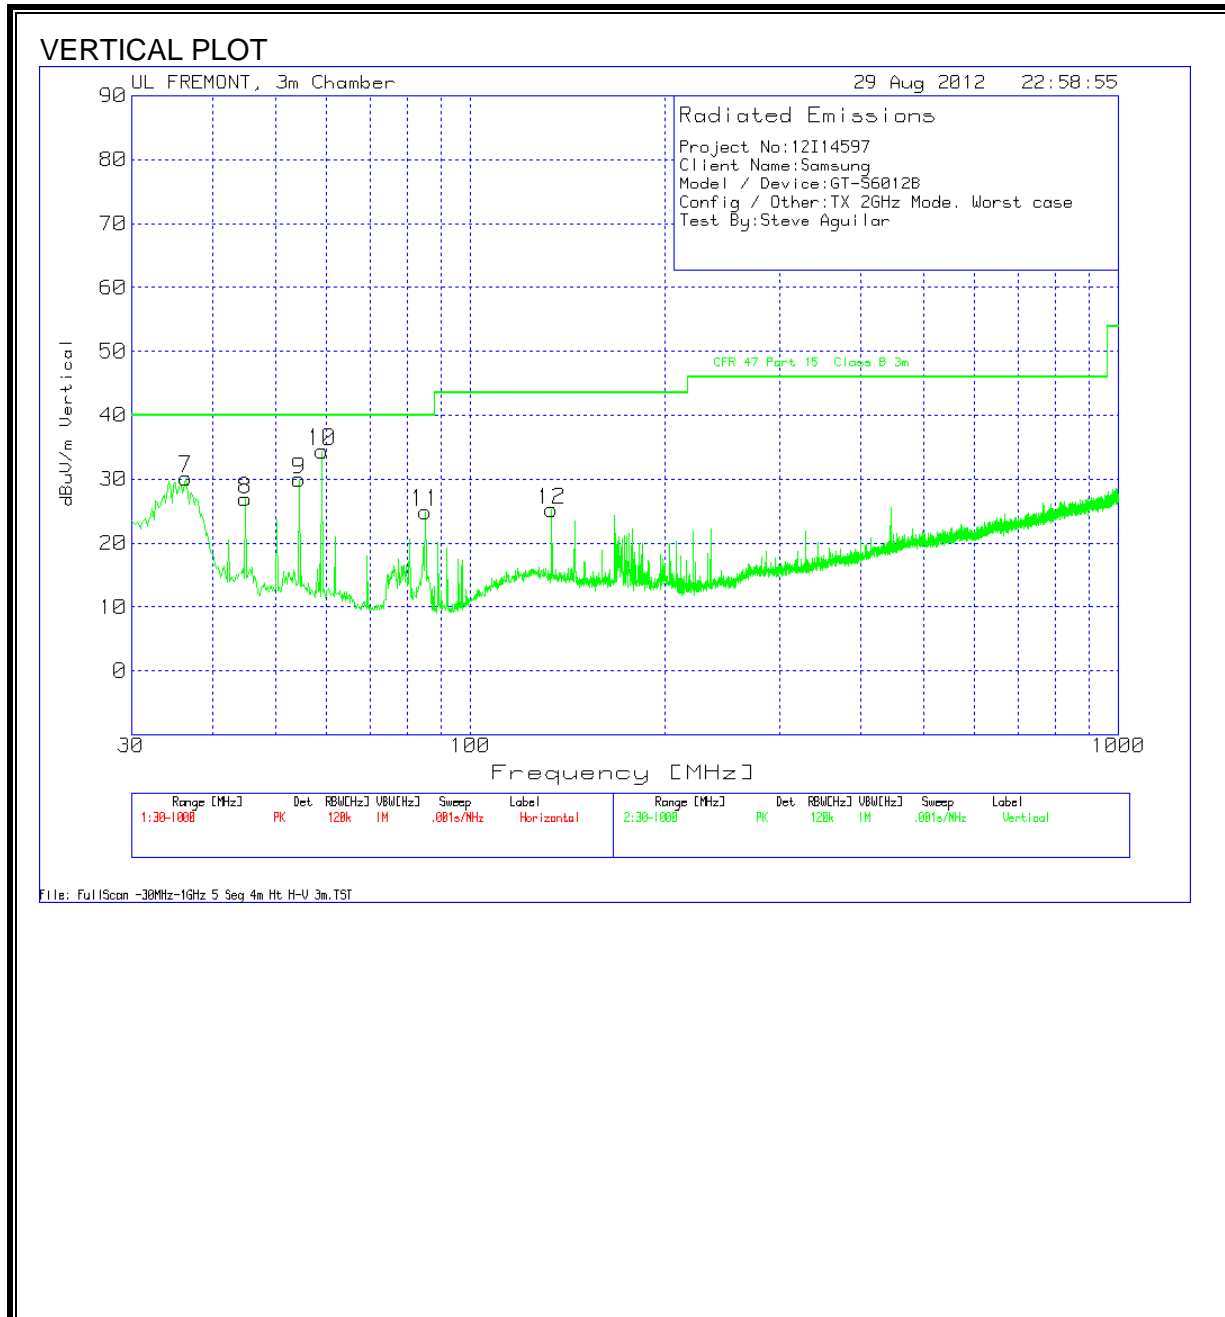

HORIZONTAL AND VERTICAL DATA

Company Name: Samsung
Project: 12I14597
Date: 8/29/2012
Model: GT-S6012B
Configuraiton: EUT + Adapter + Headset
Mode: 2 GHz , Worst Case
Tested by: S.Aguilar

Test Frequency [MHz]	Meter Reading [dB(μV)]	Detector	Pre Amp Factor [dB]	Antenna Factor [dB/m]	Corrected [dB(μV/m)]	Class B PK limit [dB(μV/m)]	QP Margin [dB]	Height [cm]	Polarity
Range 1 30 - 1000MHz									
35.4277	34.07	PK	-27.5	17.1	23.67	40	-16.33	201	Horz
61.0152	43.54	PK	-27.2	7.3	23.64	40	-16.36	201	Horz
86.6027	40.29	PK	-27	7.4	20.69	40	-19.31	201	Horz
177.9037	40.88	PK	-26	11	25.88	43.5	-17.62	201	Horz
205.2358	39.41	PK	-25.8	11.3	24.91	43.5	-18.59	99	Horz
338.9888	40.46	PK	-25.3	14	29.16	46	-16.84	99	Horz
Range 2 30 - 1000MHz									
36.3969	41.11	PK	-27.4	16.5	30.21	40	-9.79	100	Vert
44.9261	43.99	PK	-27.4	10.3	26.89	40	-13.11	100	Vert
54.4245	50.19	PK	-27.2	7	29.99	40	-10.01	200	Vert
59.0767	54.54	PK	-27.2	7.1	34.44	40	-5.56	100	Vert
85.2458	44.51	PK	-27	7.4	24.91	40	-15.09	301	Vert
133.5132	38.34	PK	-26.5	13.4	25.24	43.5	-18.26	200	Vert

PK - Peak detector
 QP - Quasi-peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

Company Name: Samsung
Project: 12I14597
Model: GT-S6012B
Date: 8/29/2012
Configuraiton: 120VAC / 60 Hz
Mode: 2GHz TX mode Worst Case
Tested by: Steve Aguilar

Line-L1 .15 - 30MHz


Test Frequency [MHz]	Meter Reading [dBuV]	Detector Type	LISN [dB]	Cables [dB]	Corrected [dB(uV)]	Class B QP Limit	QP Margin	Class B Av Limit [dB(uV)]	Av Margin [dB]
0.2985	47.99	PK	0.1	0	48.09	60.3	-12.21	-	-
0.2985	33.98	Av	0.1	0	34.08	-	-	50.3	-16.22
0.33	47.68	PK	0.1	0	47.78	59.5	-11.72	-	-
0.33	36.04	Av	0.1	0	36.14	-	-	49.5	-13.36
0.3705	47.25	PK	0.1	0	47.35	58.5	-11.15	-	-
0.3705	35.35	Av	0.1	0	35.45	-	-	48.5	-13.05
19.1985	48.33	PK	0.2	0.2	48.73	60	-11.27	-	-
19.1985	28.11	Av	0.2	0.2	28.51	-	-	50	-21.49

Line-L2 .15 - 30MHz

Test Frequency [MHz]	Meter Reading [dBuV]	Detector Type	LISN [dB]	Cables [dB]	Corrected [dB(uV)]	Class B QP Limit	QP Margin	Class B Av Limit [dB(uV)]	Av Margin [dB]
0.294	43.46	PK	0.1	0	43.56	60.4	-16.84	-	-
0.294	32.92	Av	0.1	0	33.02	-	-	50.4	-17.38
0.3435	43.01	PK	0.1	0	43.11	59.1	-15.99	-	-
0.3435	29.86	Av	0.1	0	29.96	-	-	49.1	-19.14
0.3705	42.64	PK	0.1	0	42.74	58.5	-15.76	-	-
0.3705	31.53	Av	0.1	0	31.63	-	-	48.5	-16.87
19.599	39.83	PK	0.3	0.2	40.33	60	-19.67	-	-
19.599	23.9	Av	0.3	0.2	24.4	-	-	50	-25.6

PK - Peak detector
 QP - Quasi-Peak detector
 Av - Average detector

LINE 1 RESULTS

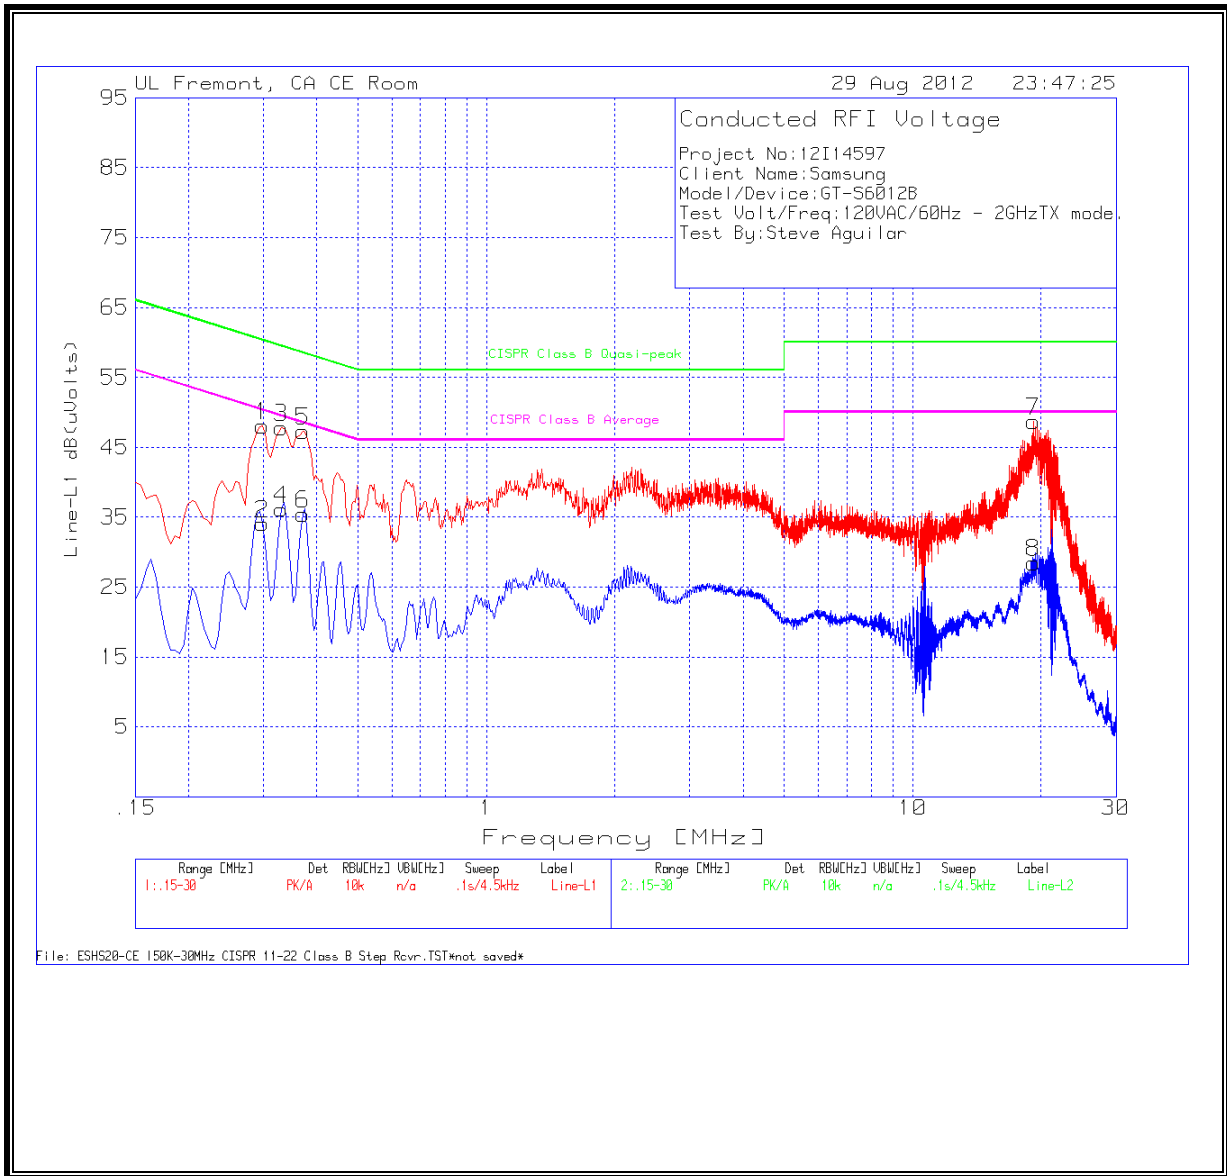

LINE 2 RESULTS

