



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: GT-S6293T

FCC ID: A3LGTS6293T

REPORT NUMBER: 13I16645-1, Revision A

ISSUE DATE: December 17, 2013

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

REPORT NO: 13I16645-1A
MODEL NUMER: GT-S6293T

DATE: 12/17/13
FCC ID: A3LGTS6293T

Revision History

| Rev. | Date | Issue | Revisions | Revised By |
|------|----------|---|-----------|------------|
| - | 12/9/13 | Initial | | P. Kim |
| A | 12/17/13 | Updated frequency stability setup photo | | P. Kim |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. FACILITIES AND ACCREDITATION | 6 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>6</i> |
| 4.2. <i>SAMPLE CALCULATION</i> | <i>6</i> |
| 4.3. <i>MEASUREMENT UNCERTAINTY</i> | <i>6</i> |
| 5. EQUIPMENT UNDER TEST | 7 |
| 5.1. <i>DESCRIPTION OF EUT</i> | <i>7</i> |
| 5.2. <i>MAXIMUM OUTPUT POWER</i> | <i>7</i> |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | <i>8</i> |
| 5.4. <i>DESCRIPTION OF TEST SETUP</i> | <i>9</i> |
| 6. TEST AND MEASUREMENT EQUIPMENT | 12 |
| 7. Summary Table | 13 |
| 8. RF POWER OUTPUT VERIFICATION | 14 |
| 8.1. <i>GSM/GPRS/EDGE</i> | <i>14</i> |
| 8.1.1. <i>GSM OUTPUT POWER RESULT</i> | <i>15</i> |
| 8.2. <i>UMTS REL 99</i> | <i>16</i> |
| 8.2.1. <i>UMTS REL 99 OUTPUT POWER RESULT</i> | <i>16</i> |
| 8.3. <i>UMTS HSDPA</i> | <i>17</i> |
| 8.3.1. <i>UMTS HSDPA OUTPUT POWER RESULT</i> | <i>17</i> |
| 8.3.2. <i>UMTS HSUPA</i> | <i>18</i> |
| 8.3.3. <i>UMTS HSUPA OUTPUT POWER RESULT</i> | <i>19</i> |
| 9. PEAK TO AVERAGE RATIO | 20 |
| 9.1. <i>CONDUCTED PEAK TO AVERAGE RESULT</i> | <i>20</i> |
| 10. LIMITS AND CONDUCTED RESULTS | 21 |
| 10.1. <i>OCCUPIED BANDWIDTH</i> | <i>21</i> |
| 10.1.1. <i>OCCUPIED BANDWIDTH RESULTS</i> | <i>22</i> |
| 10.1.2. <i>OCCUPIED BANDWIDTH PLOTS</i> | <i>23</i> |
| 10.2. <i>BAND EDGE EMISSIONS</i> | <i>25</i> |
| 10.2.1. <i>BAND EDGE PLOTS</i> | <i>26</i> |
| 10.3. <i>OUT OF BAND EMISSIONS</i> | <i>28</i> |

| | |
|---|-----------|
| 10.3.1. OUT OF BAND EMISSIONS RESULT | 29 |
| 10.3.2. OUT OF BAND EMISSIONS PLOTS..... | 30 |
| 10.4. FREQUENCY STABILITY | 31 |
| 10.4.1. FREQUENCY STABILITY RESULTS..... | 32 |
| 11. RADIATED TEST RESULTS..... | 34 |
| 11.1. RADIATED POWER (ERP & EIRP)..... | 34 |
| 11.1.1. ERP/EIRP Results | 35 |
| 11.1.2. ERP/EIRP PLOTS | 36 |
| 11.2. FIELD STRENGTH OF SPURIOUS RADIATION..... | 40 |
| 11.2.1. SPURIOUS RADIATION PLOTS..... | 42 |
| 12. SETUP PHOTOS | 46 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG

EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL: GT-S6293T

SERIAL NUMBER:

DATE TESTED: December 5 – 7th, 2013

| APPLICABLE STANDARDS | |
|----------------------|--------------|
| STANDARD | TEST RESULTS |
| FCC PART 22H, 24E | PASS |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WiSE PROGRAM MANAGER
UL Verification Services Inc.



STEVEN TRAN
WiSE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n that is manufactured by (Samsung)

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

| FCC Part 22/2 4/27 | | | | | | |
|--------------------|----------------------|-----------------|-----------|-----------|----------|------------|
| Band | Frequency Range(MHz) | Modulation Peak | Conducted | | Radiated | |
| | | | Peak (W) | Peak(dBm) | Peak (W) | Peak (dBm) |
| GSM850 | 824~849 | GMSK | 1.596 | 32.03 | | |
| | 824~849 | GPRS | 1.600 | 32.04 | 0.656 | 28.17 |
| GSM1900 | 1850~1910 | GMSK | 0.910 | 29.59 | | |
| | 1850~1910 | GPRS | 0.912 | 29.60 | 0.449 | 26.52 |
| Band 5 | 824~849 | REL99 | 0.171 | 22.32 | 0.078 | 18.93 |
| | 824~849 | HSDPA | 0.164 | 22.15 | 0.085 | 19.30 |
| | 824~849 | HSUPA | 0.129 | 21.10 | | |

Note: Radiated test will base on the worst case GPRS mode for GSM. Rel99 and HSDPA modes for WCDMA.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

| Frequency (MHz) | Peak Gain (dBi) |
|-----------------------------|-----------------|
| GSM850/WCDMA B5, 824~849MHz | -0.8 |
| GSM1900, 1850~1910MHz | 2.3 |

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|------------------------|--------------|-------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| AC Adapter | Samsung | N/A | RT2D129 | N/A |
| Earphone | Samsung | N/A | N/A | N/A |

I/O CABLES (CONDUCTED SETUP)

| I/O Cable List | | | | | | |
|----------------|--------------|----------------------|------------------------|------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | RF Out | 1 | Spectrum Analyzer | Shielded | None | NA |
| 2 | Antenna Port | 1 | EUT | Shielded | 0.1m | NA |
| 3 | RF In/Out | 1 | Communication Test Set | Shielded | 1m | NA |

I/O CABLES (RADIATED SETUP)

| I/O CABLE LIST | | | | | | |
|----------------|-----------|----------------------|------------------------|-------------|--------------|---------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | USB | 1 | AC Adapter | Un-shielded | 1.2m | No |
| 2 | Jack | 1 | Headset | Shielded | 1m | No |
| 3 | RF In/out | 1 | Communication Test Set | Un-shielded | 2m | Yes |


TEST SETUP


The EUT is continuously communicated to the call box during the tests.

REPORT NO: 13I16645-1A
MODEL NUMER: GT-S6293T

DATE: 12/17/13
FCC ID: A3LGTS6293T

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

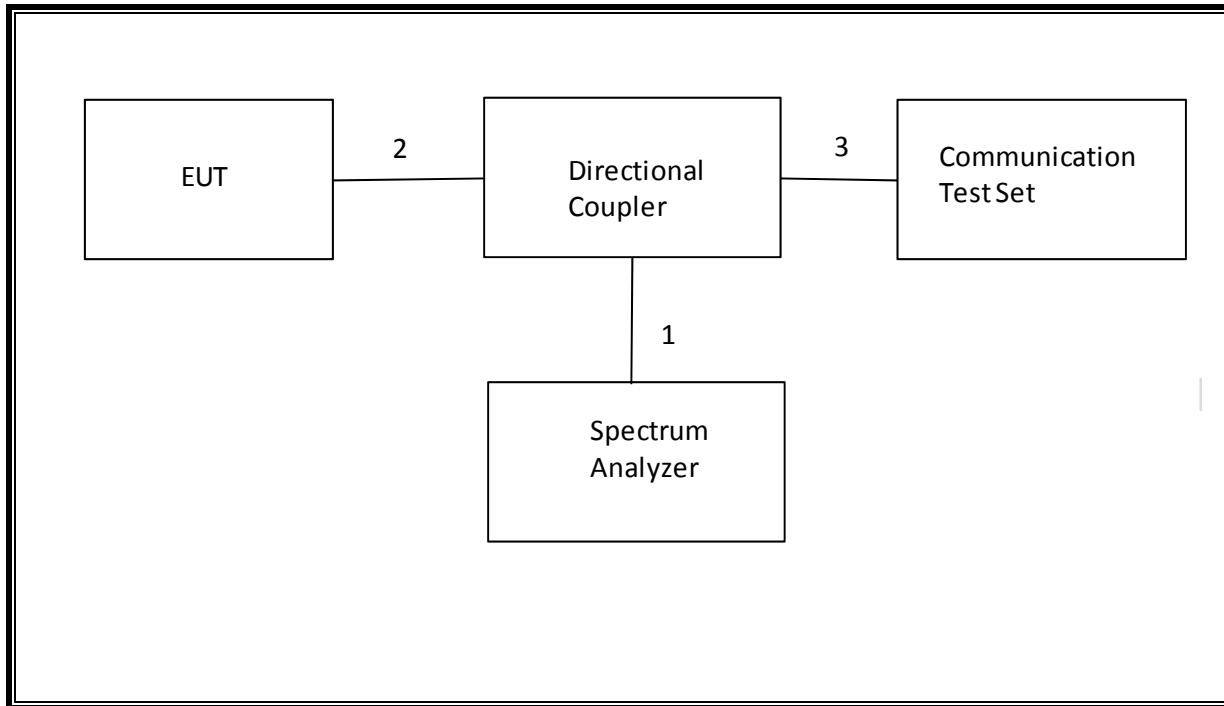

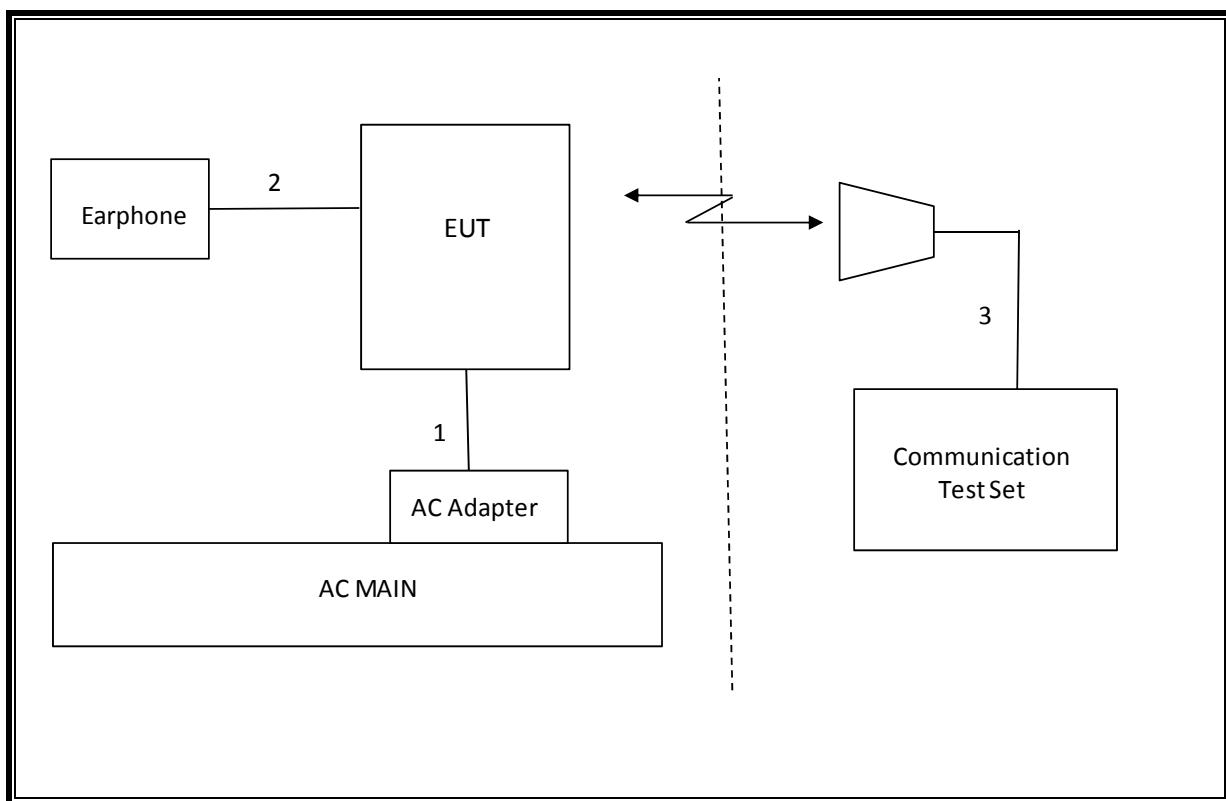SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|------------------------------------|----------------|--------------|--------|----------|
| Description | Manufacturer | Model | Asset | Cal Due |
| Spectrum Analyzer, 44 GHz | Agilent / HP | E4446A | C01179 | 02/26/14 |
| Antenna, Bilog, 2 GHz | Sunol Sciences | JB1 | C01011 | 08/14/14 |
| Antenna, Horn, 18 GHz | EMCO | 3115 | C00783 | 10/25/14 |
| Highpass Filter, 2.7 GHz | Micro-Tronics | HPM13194 | N02687 | CNR |
| Highpass Filter, 1.5 GHz | Micro-Tronics | HPM13193 | N02688 | CNR |
| Temperature / Humidity Chamber | Thermotron | SE 600-10-10 | C00930 | 01/09/14 |
| Communications Test Set | R&S | CMW500 | T159 | 07/02/14 |
| DC power supply, 8 V @ 3 A or 15 V | Agilent / HP | E3610A | None | CNR |
| Vector signal generator, 6 GHz | Agilent / HP | E4438C | None | 07/06/14 |
| Antenna, Tuned Dipole 400~1000 | ETS | 3121C DB4 | C00993 | 02/14/14 |
| Directional Coupler | RF-Lambda | RFDC5M06G15 | None | CNR |

7. Summary Table

| FCC Part Section | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Worst Case |
|------------------------|----------------------------------|---|------------|----------------|-------------|------------|
| 2.1049 | RSS Gen | Occupied Band width (99%) | N/A | Conducted | Pass | 4.168MHz |
| 22.917(a) 24.238(a) | RSS-132(4.5.1) RSS-133(6.5.1) | Band Edge / Conducted Spurious Emission | -13dBm | | Pass | -16.14dBm |
| 2.1046 | N/A | Conducted output power | N/A | | Pass | 32.04dBm |
| 22.355 24.235 | RSS-132(4.3) RSS-133(6.3) | Frequency Stability | 2.5PPM | | Pass | 0.012PPM |
| 22.913(a)(2) | RSS-132(4.4) | Effective Radiated Power | 38 dBm | Radiated | Pass | 28.17dBm |
| 24.232(c) | RSS-133(6.4) | Equivalent Isotropic Radiated Power | 33dBm | | Pass | 26.52dBm |
| 22.917(a) 24.238(a) | RSS-132(4.5.1) RSS-133(6.5.1) | Radiated Spurious Emission | -13dBm | | Pass | -46.6dBm |

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

| Band | Mode | Ch. | f(MHz) | 1 time slot | 2 time slot | 3 time slot | 4 time slot |
|---------|------|-----|--------|-------------|-------------|-------------|-------------|
| | | | | Peak (dBm) | Peak (dBm) | Peak (dBm) | Peak (dBm) |
| GSM850 | GMSK | 128 | 824.2 | 31.88 | | | |
| | | 190 | 836.6 | 31.97 | | | |
| | | 251 | 848.8 | 32.03 | | | |
| | GPRS | 128 | 824.2 | 31.89 | 29.27 | 28.27 | 26.24 |
| | | 190 | 836.6 | 31.97 | 29.38 | 28.38 | 26.36 |
| | | 251 | 848.8 | 32.04 | 29.47 | 28.47 | 26.46 |
| GSM1900 | GMSK | 512 | 1850.2 | 29.51 | | | |
| | | 661 | 1880 | 29.59 | | | |
| | | 810 | 1909.8 | 29.56 | | | |
| | GPRS | 512 | 1850.2 | 29.52 | 27.03 | 25.99 | 24.03 |
| | | 661 | 1880 | 29.60 | 27.15 | 26.12 | 24.17 |
| | | 810 | 1909.8 | 29.56 | 27.09 | 26.07 | 24.12 |

Note: All conducted tests will base on the worst case GPRS mode since GMSK and GPRS using the same modulation method.

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

| | | |
|------------------------|-------------------------|----------------|
| | Mode | Rel99 |
| | Subtest | - |
| WCDMA General Settings | Loopback Mode | Test Mode 1 |
| | Rel99 RMC | 12.2kbps RMC |
| | HSDPA FRC | Not Applicable |
| | HSUPA Test | Not Applicable |
| | Power Control Algorithm | Algorithm2 |
| | βc | Not Applicable |
| | βd | Not Applicable |
| | βec | Not Applicable |
| | βc/βd | 8/15 |
| | βhs | Not Applicable |
| | βed | Not Applicable |

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

| Band | Mode | Ch. | f(MHz) | Conducted Power |
|--------|-------|------|--------|-----------------|
| | | | | (dBm) |
| Band 5 | REL99 | 4145 | 826.6 | 22.32 |
| | | 4183 | 836.6 | 22.01 |
| | | 4220 | 846.4 | 22.06 |

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

| | Mode | Rel5 HSDPA | | | |
|-------------------------------|--------------------------------------|--------------|-------|-------|-------|
| | Subtest | 1 | 2 | 3 | 4 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set1 | | | |
| | Power Control Algorithm | Algorithm 2 | | | |
| | β_c | 2/15 | 12/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | B_d (SF) | 64 | | | |
| | β_c/β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| HSDPA Specific Settings | MPR (dB) | 0 | 0 | 0.5 | 0.5 |
| | D_{ACK} | 8 | | | |
| | D_{NAK} | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | |
| | CQI Repetition Factor (Table 5.2B.4) | 2 | | | |
| $A_{hs} = \beta_{hs}/\beta_c$ | | 30/15 | | | |

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

| Band | Mode | Subset | Ch. | f(MHz) | Conducted Power |
|--------|-------|--------|------|--------|-----------------|
| | | | | | (dBm) |
| Band 5 | HSDPA | 1 | 4145 | 826.6 | 22.15 |
| | | | 4183 | 836.6 | 21.70 |
| | | | 4220 | 846.4 | 21.87 |
| | | 2 | 4145 | 826.6 | 21.82 |
| | | | 4183 | 836.6 | 21.68 |
| | | | 4220 | 846.4 | 21.74 |
| | | 3 | 4145 | 826.6 | 21.50 |
| | | | 4183 | 836.6 | 21.44 |
| | | | 4220 | 846.4 | 21.52 |
| | | 4 | 4145 | 826.6 | 21.53 |
| | | | 4183 | 836.6 | 21.47 |
| | | | 4220 | 846.4 | 21.54 |

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

| | Mode | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA |
|-------------------------|--------------------------------------|--|------------|--|------------|------------|
| | Subtest | 1 | 2 | 3 | 4 | 5 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | | |
| | P-CPICH (dB) | -10 | | | | |
| | P-CCPCH (dB) | -12 | | | | |
| | SCH (dB) | -12 | | | | |
| | PICH(dB) | -15 | | | | |
| | DPCH (dB) | -9 | | | | |
| | HS-SCCH_1 (dB) | -8 | | | | |
| | HS-PDSCH (dB) | -3 | | | | |
| | Rel99 RMC | 12.2kbps RMC | | | | |
| | HSDPA FRC | H-Set1 | | | | |
| | HSUPA Test | HSUPA Loopback | | | | |
| | Power Control Algorithm | Algorithm2 | | | | |
| | Bc | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | Bd | 15/15 | 15/15 | 9/15 | 15/15 | 15/15 |
| | Bec | 209/225 | 12/15 | 30/15 | 2/15 | 5/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | 15/15 |
| | Bhs | 22/15 | 12/15 | 30/15 | 4/15 | 30/15 |
| | β_{ed} (note1) | 1309/225 | 94/75 | 47/15 47/15 | 56/75 | 134/15 |
| | MPR | 0 | 2 | 1 | 2 | 0 |
| HSDPA Specific Settings | DACK | 8 | | | | |
| | DNAK | 8 | | | | |
| | DCQI | 8 | | | | |
| | Ack-Nack repetition factor | 3 | | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | | |
| | CQI Repetition Factor (Table 5.2B.4) | 2 | | | | |
| HSUPA Specific Settings | Ahs = β_{hs}/β_c | 30/15 | | | | |
| | D E-DPCCH | 6 | 8 | 8 | 5 | 7 |
| | DHARQ | 0 | 0 | 0 | 0 | 0 |
| | AG Index | 20 | 12 | 15 | 17 | 21 |
| | Reference E-TFCIs | 5 | 5 | 2 | 5 | 5 |
| | ETFCI (from 34.121 Table C.11.1.3) | 75 | 67 | 92 | 71 | 81 |
| | Associated Max UL Data Rate kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 |
| | Reference E_TFCIs | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27 | | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27 | | |

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

| Band | Mode | Subset | Ch. | f(MHz) | Conducted Power |
|--------|-------|--------|------|--------|-----------------|
| | | | | | (dBm) |
| Band 5 | HSUPA | 1 | 4145 | 826.6 | 20.52 |
| | | | 4183 | 836.6 | 20.31 |
| | | | 4220 | 846.4 | 20.41 |
| | | 2 | 4145 | 826.6 | 20.93 |
| | | | 4183 | 836.6 | 20.85 |
| | | | 4220 | 846.4 | 20.92 |
| | | 3 | 4145 | 826.6 | 21.10 |
| | | | 4183 | 836.6 | 20.78 |
| | | | 4220 | 846.4 | 20.87 |
| | | 4 | 4145 | 826.6 | 20.92 |
| | | | 4183 | 836.6 | 20.53 |
| | | | 4220 | 846.4 | 20.77 |
| | | 5 | 4145 | 826.6 | 20.90 |
| | | | 4183 | 836.6 | 20.64 |
| | | | 4220 | 846.4 | 20.75 |

9. PEAK TO AVERAGE RATIO


Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

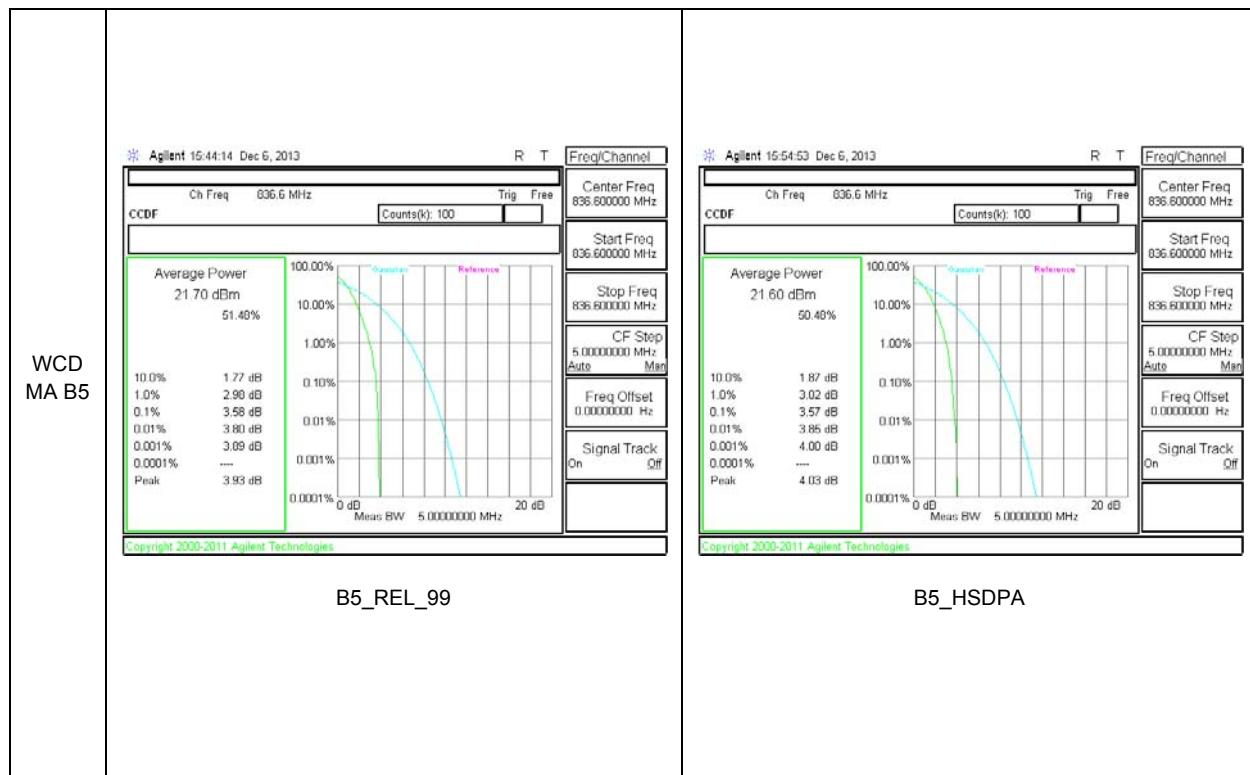

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE


The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.


(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

10.1.1. OCCUPIED BANDWIDTH RESULTS

| Band | Mode | Channel | f (MHz) | 99% BW (KHz) | -26dB BW (KHz) |
|---------|-------|---------|---------|--------------|----------------|
| GSM850 | GPRS | 128 | 824.2 | 242.6 | 306.5 |
| | | 190 | 836.6 | 247.3 | 318.6 |
| | | 251 | 848.8 | 235.9 | 296.3 |
| GSM1900 | GPRS | 512 | 1850.2 | 243.0 | 317.3 |
| | | 661 | 1880 | 244.0 | 316.1 |
| | | 810 | 1909.8 | 244.6 | 311.3 |
| Band 5 | REL99 | 4145 | 826.6 | 4143 | 4747 |
| | | 4183 | 836.6 | 4163 | 4749 |
| | | 4220 | 846.4 | 4168 | 4726 |
| | HSDPA | 4145 | 826.6 | 4144 | 4717 |
| | | 4183 | 836.6 | 4133 | 4706 |
| | | 4220 | 846.4 | 4152 | 4747 |

10.1.2. OCCUPIED BANDWIDTH PLOTS

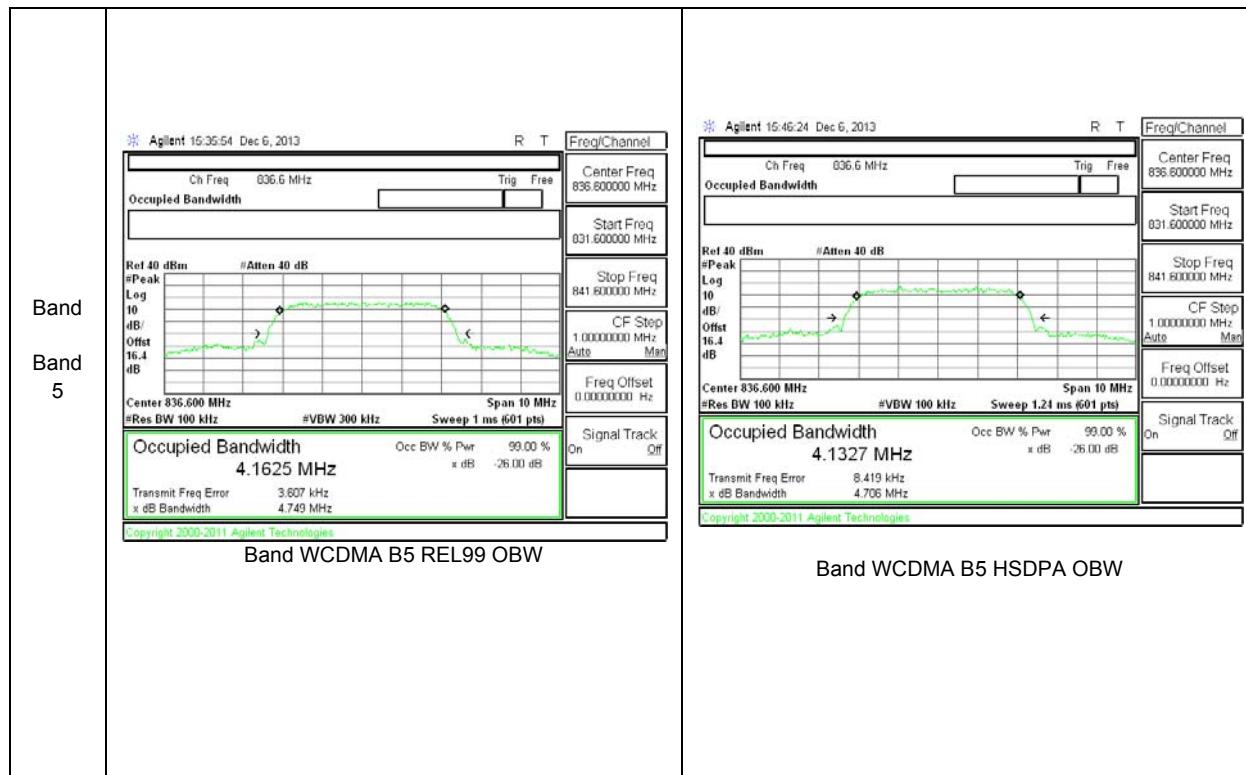

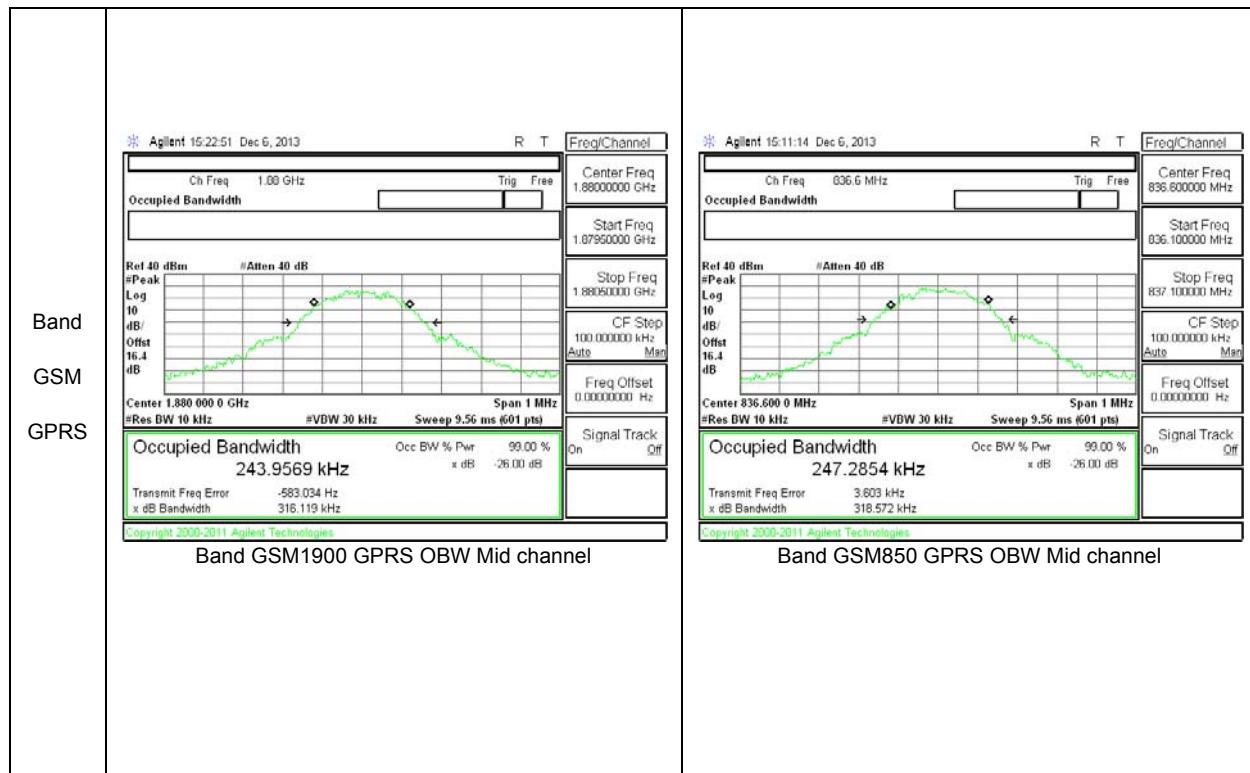

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:


- Set the spectrum analyzer span to include the block edge frequency (824, 849, 1850, 1910 and 1915MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm.
- Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED

GSM 850/1900 & WCDMA 850

RESULTS

10.2.1. BAND EDGE PLOTS

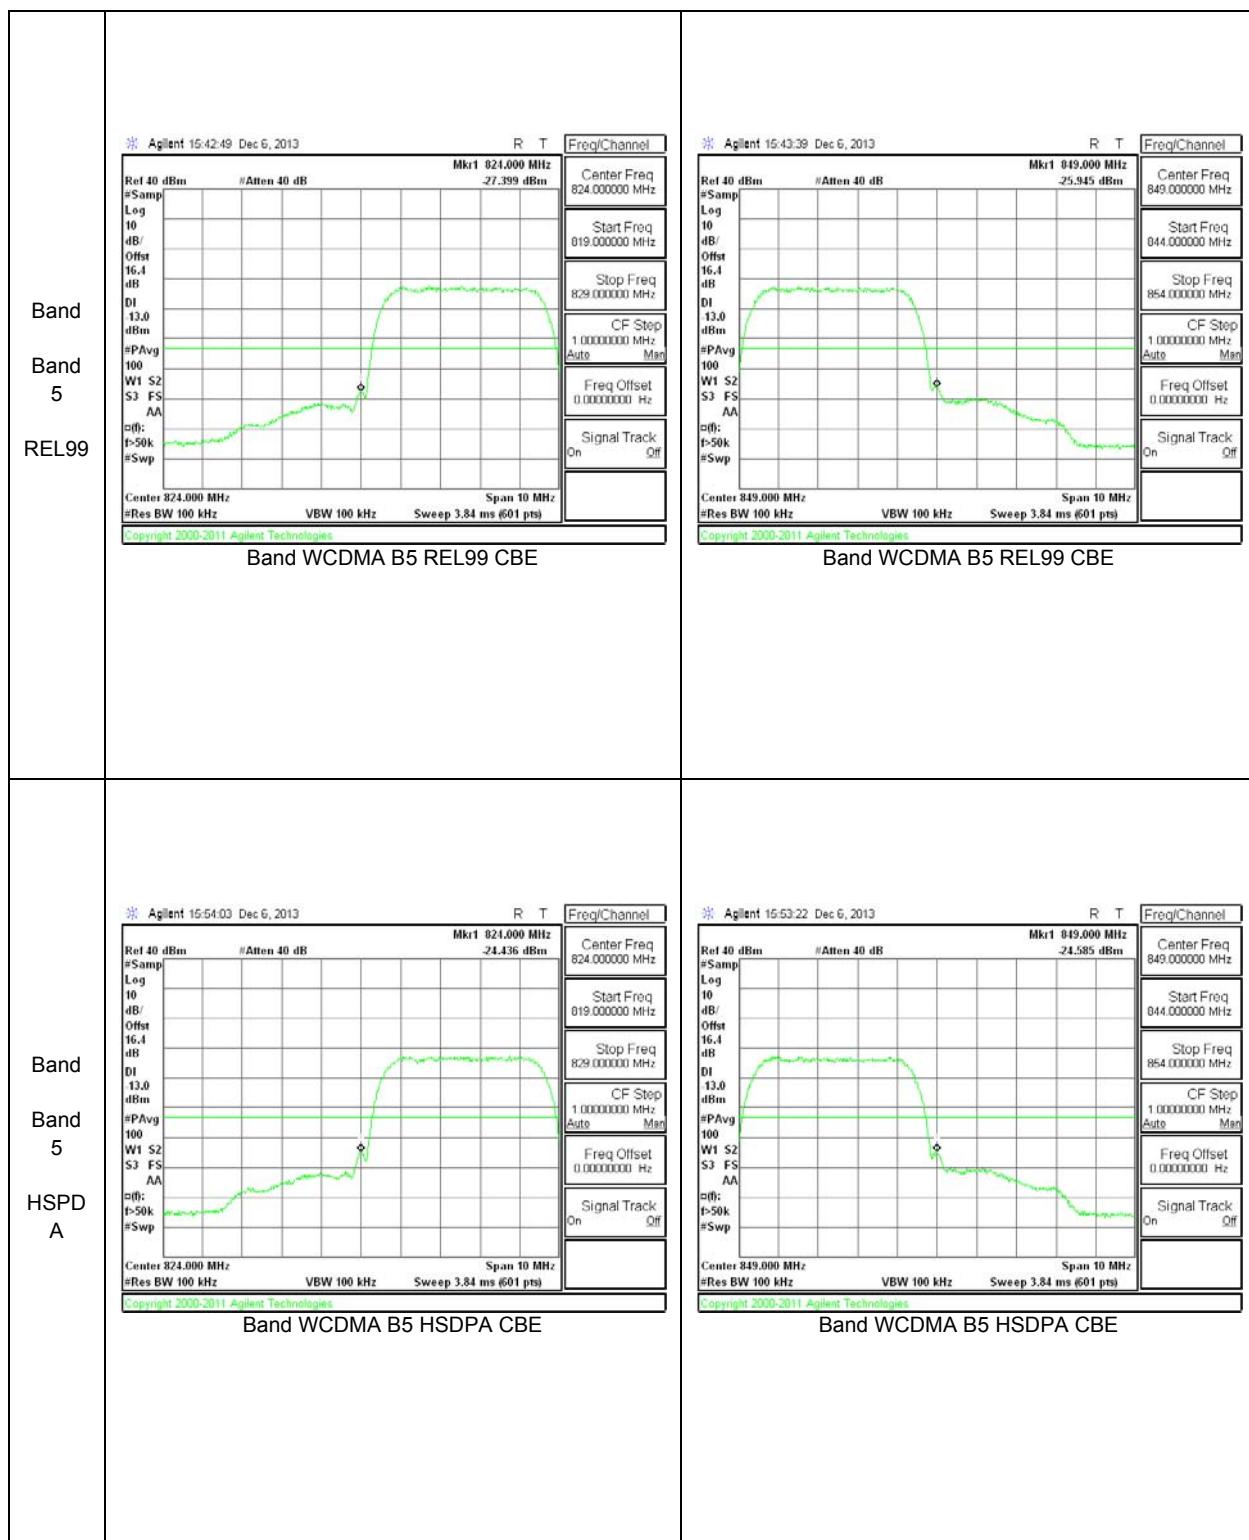

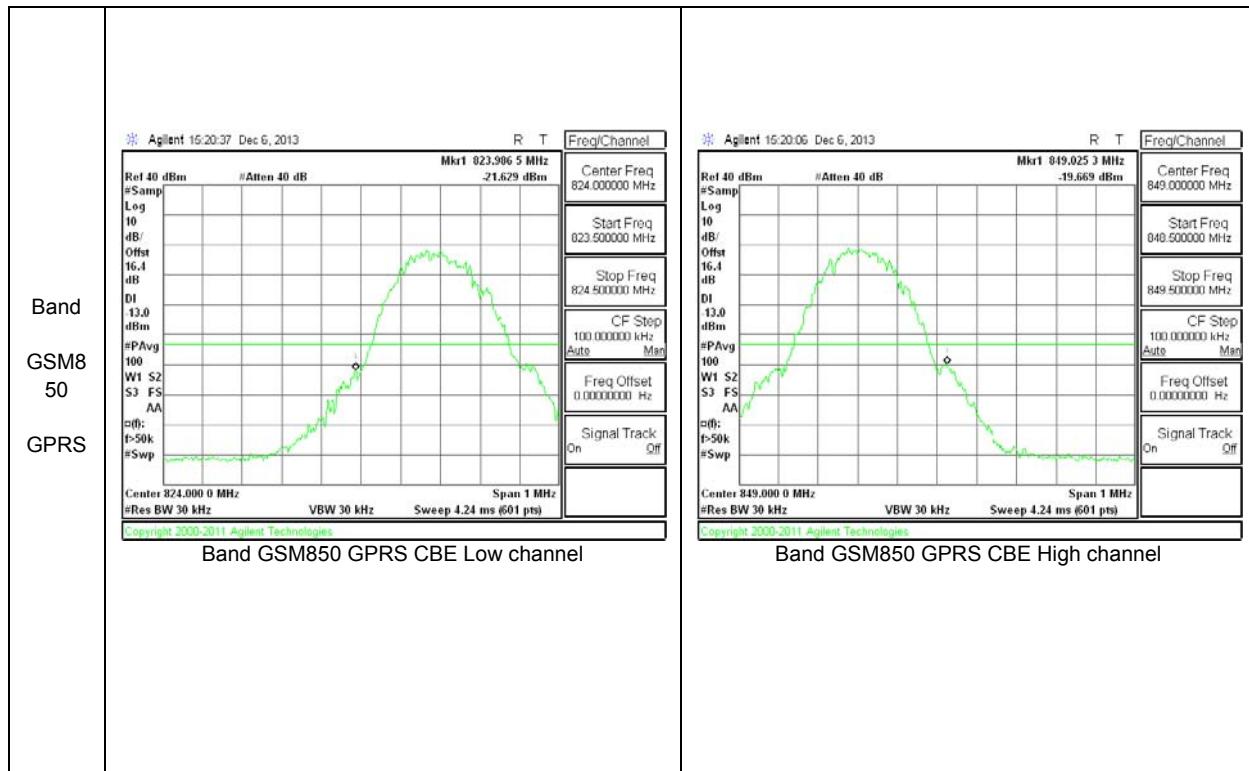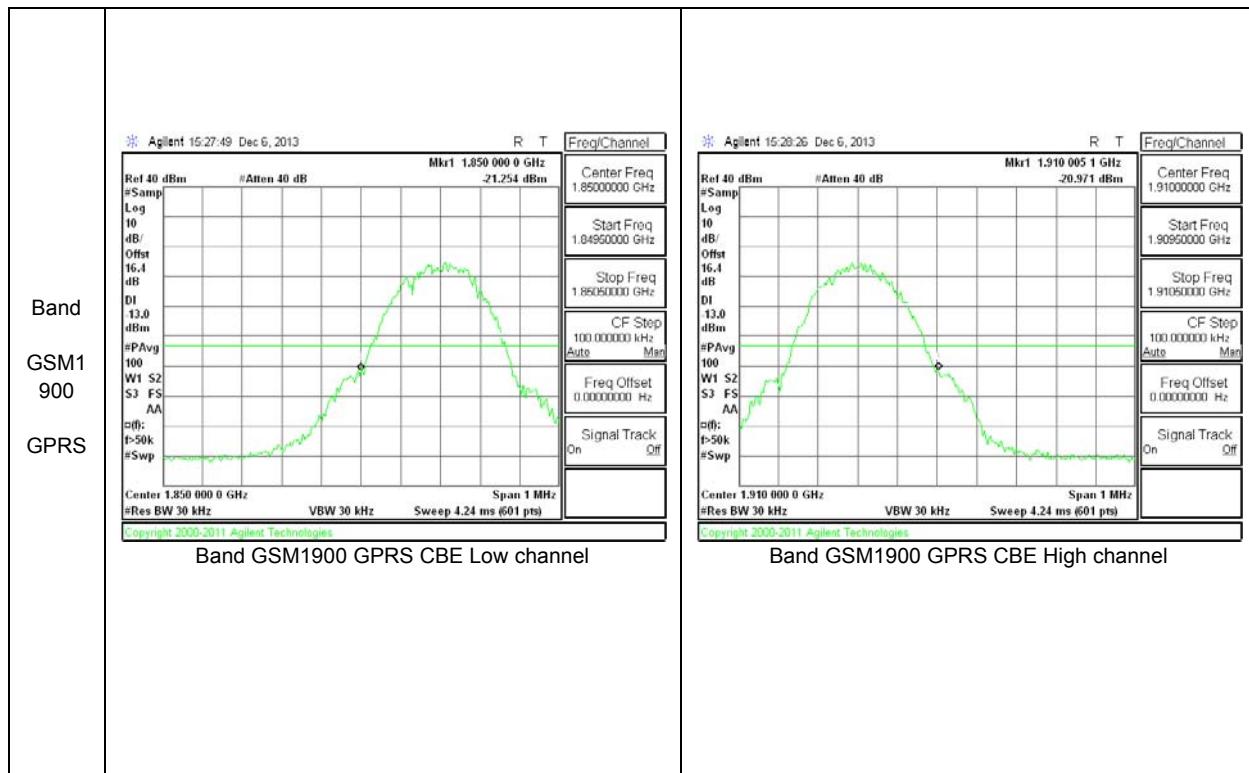

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED



GSM850/1900 & WCDMA 850

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

| Band | Mode | f (MHz) | Spur (dBm) | Spec (dBm) | Delta (dB) |
|---------|-------|---------|------------|------------|------------|
| GSM850 | GPRS | 824.2 | -17.77 | -13 | -4.77 |
| | | 836.6 | -18.00 | -13 | -5 |
| | | 848.8 | -16.14 | -13 | -3.14 |
| GSM1900 | GPRS | 1850.2 | -18.00 | -13 | -5 |
| | | 1880 | -17.82 | -13 | -4.82 |
| | | 1909.8 | -17.43 | -13 | -4.43 |
| Band 5 | REL99 | 826.6 | -17.58 | -13 | -4.58 |
| | | 836.6 | -16.79 | -13 | -3.79 |
| | | 846.4 | -16.95 | -13 | -3.95 |
| Band 5 | HSDPA | 826.6 | -18.56 | -13 | -5.56 |
| | | 836.6 | -17.91 | -13 | -4.91 |
| | | 846.4 | -17.67 | -13 | -4.67 |

10.3.2. OUT OF BAND EMISSIONS PLOTS

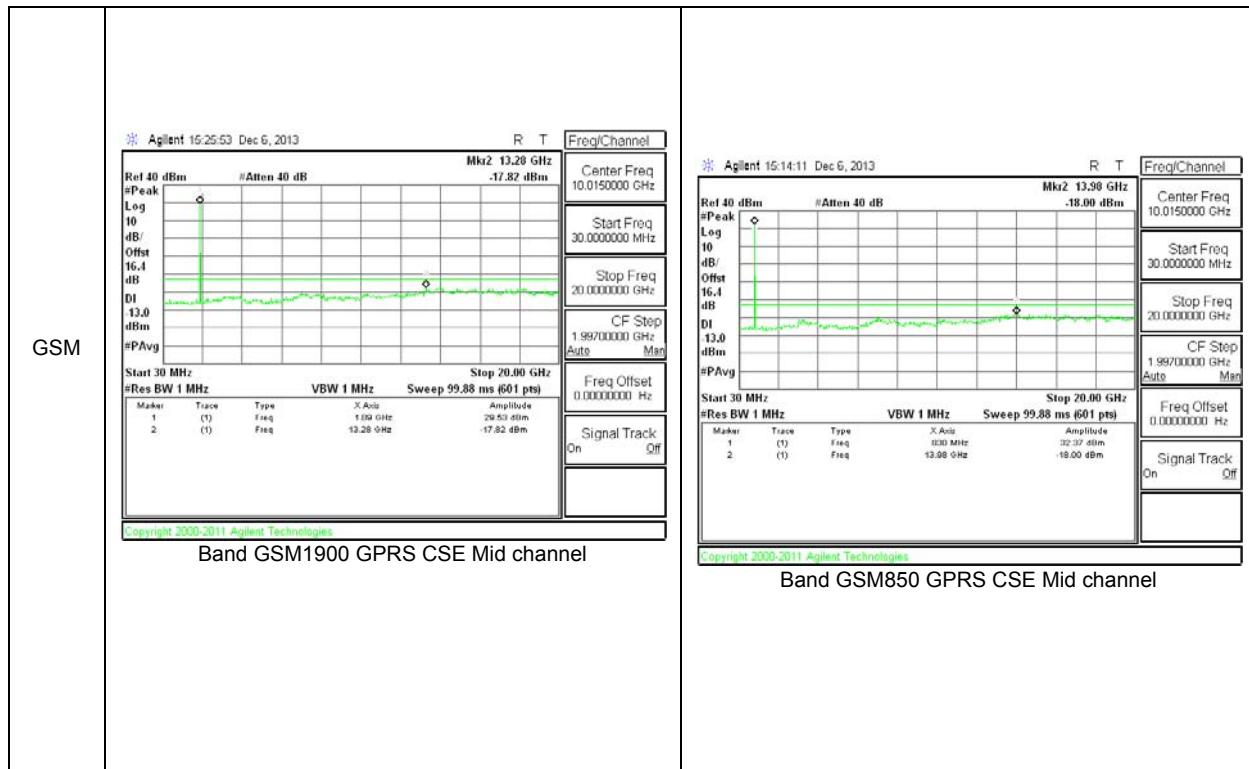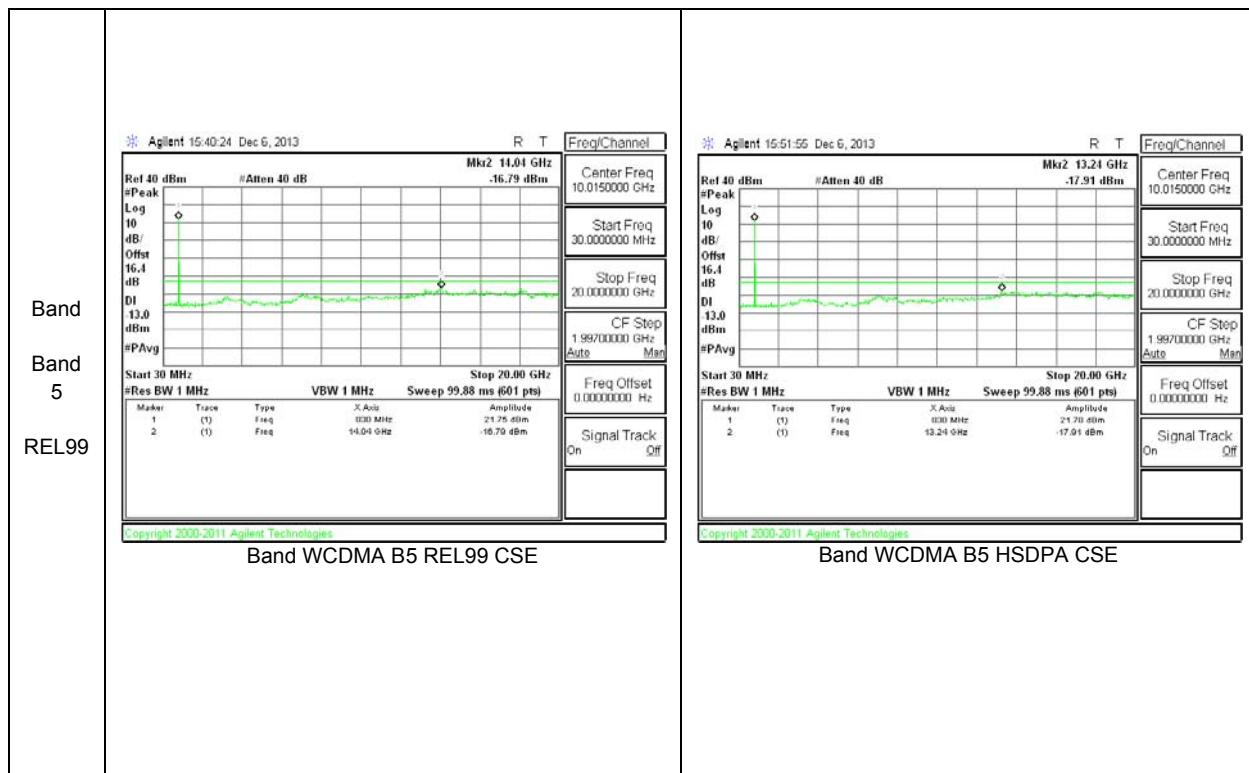

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached. Reference power supply voltage for these tests is 3.7Vdc.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case). The test voltage ranges from 3.50 to 4.26 VDC.

MODES TESTED

GSM850/1900 & WCDMA 850

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

| Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +- 2.5 ppm = 2091.500 Hz | | | | |
|---|---------------------------------|---|-------------|-------------|
| Power Supply (Vdc) | Environment Temperature (°C) | Frequency Deviation Measured with Time Elapse | | |
| | | (MHz) | Delta (ppm) | Limit (ppm) |
| 3.70 | 50 | 836.599983 | 0.000 | 2.5 |
| 3.70 | 40 | 836.599977 | 0.007 | 2.5 |
| 3.70 | 30 | 836.599979 | 0.005 | 2.5 |
| 3.70 | 20 | 836.599983 | 0 | 2.5 |
| 3.70 | 10 | 836.599962 | 0.025 | 2.5 |
| 3.70 | 0 | 836.599985 | -0.002 | 2.5 |
| 3.70 | -10 | 836.599985 | -0.002 | 2.5 |
| 3.70 | -20 | 836.599982 | 0.001 | 2.5 |
| 3.70 | -30 | 836.599936 | 0.056 | 2.5 |

| Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +- 2.5 ppm = 2091.500 Hz | | | | |
|---|---------------------------------|---|-------------|-------------|
| Power Supply (Vdc) | Environment Temperature (°C) | Frequency Deviation Measured with Time Elapse | | |
| | | (MHz) | Delta (ppm) | Limit (ppm) |
| 3.70 | 20 | 836.599983 | 0 | 2.5 |
| 4.20 | 20 | 836.599977 | 0.007 | 2.5 |
| 3.30 | 20 | 836.599986 | -0.004 | 2.5 |
| End Volt(3.2) | 20 | 836.599985 | -0.002 | 2.5 |

PCS, GPRS MODULATION – MID CHANNEL

| Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +- 2.5 ppm = 4700.000 Hz | | | | |
|--|---------------------------------|---|-------------|-------------|
| Power Supply (Vdc) | Environment Temperature (*C) | Frequency Deviation Measured with Time Elapse | | |
| | | (MHz) | Delta (ppm) | Limit (ppm) |
| 3.70 | 50 | 1879.999989 | 0.006 | 2.5 |
| 3.70 | 40 | 1879.999992 | 0.005 | 2.5 |
| 3.70 | 30 | 1879.999989 | 0.006 | 2.5 |
| 3.70 | 20 | 1880.000001 | 0 | 2.5 |
| 3.70 | 10 | 1879.999995 | 0.003 | 2.5 |
| 3.70 | 0 | 1879.999998 | 0.002 | 2.5 |
| 3.70 | -10 | 1879.999992 | 0.005 | 2.5 |
| 3.70 | -20 | 1879.999979 | 0.012 | 2.5 |
| 3.70 | -30 | 1880.000005 | -0.002 | 2.5 |

| Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +- 2.5 ppm = 4700.000 Hz | | | | |
|--|---------------------------------|---|----------------|-------------|
| Power Supply (Vdc) | Environment Temperature (*C) | Frequency Deviation Measured with Time Elapse | | |
| | | (MHz) | Delta (ppm) | Limit (ppm) |
| 3.70 | 20 | 1880.000001 | 0.00000 | 2.5 |
| 4.20 | 20 | 1880.000005 | -0.00213 | 2.5 |
| 3.30 | 20 | 1879.999995 | 0.00319 | 2.5 |
| End Volt(3.2) | 20 | 1879.999986 | 0.00798 | 2.5 |

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

MODES TESTED

GSM850/1900 & WCDMA 850

TEST RESULTS

11.1.1. ERP/EIRP Results

| Band | Mode | Channel | f(MHz) | ERP / EIRP | |
|--------|-------|---------|--------|------------|-------|
| | | | | dBm | mW |
| Band 5 | REL99 | 4145 | 826.6 | 17.771 | 59.85 |
| | | 4183 | 836.6 | 18.931 | 78.18 |
| | | 4220 | 846.4 | 18.351 | 68.41 |
| | HSDPA | 4145 | 826.6 | 17.60 | 57.54 |
| | | 4183 | 836.6 | 19.30 | 85.11 |
| | | 4220 | 846.4 | 18.94 | 78.34 |

| Band | Mode | Channel | f(MHz) | ERP / EIRP | |
|---------|------|---------|--------|------------|--------|
| | | | | dBm | mW |
| GSM1900 | GPRS | 512 | 1850.2 | 25.8 | 380.19 |
| | | 661 | 1880 | 26.52 | 448.75 |
| | | 810 | 1909.8 | 25.058 | 320.48 |

| Band | Mode | Channel | f(MHz) | ERP / EIRP | |
|--------|------|---------|--------|------------|--------|
| | | | | dBm | mW |
| GSM850 | GPRS | 128 | 824.2 | 27.731 | 593.06 |
| | | 190 | 836.6 | 27.971 | 626.76 |
| | | 251 | 848.8 | 28.171 | 656.3 |

11.1.2. ERP/EIRP PLOTS

| | | <p style="text-align: center;">High Frequency Substitution Measurement Compliance Certification Services Chamber C</p> <p>Company: Samsung Project #: 13I16645 Date: 12/06/13 Test Engineer: Kiya Kedida Configuration: Y Position, EUT only Mode: WCDMA_Rel 99_850</p> <p>Test Equipment: Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">f MHz</th><th style="text-align: left;">SG reading (dBm)</th><th style="text-align: left;">Ant. Pol. (H/V)</th><th style="text-align: left;">Cable Loss (dB)</th><th style="text-align: left;">Antenna Gain (dBd)</th><th style="text-align: left;">ERP (dBm)</th><th style="text-align: left;">Limit (dBm)</th><th style="text-align: left;">Margin (dB)</th><th style="text-align: left;">Notes</th></tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td></tr> <tr> <td>826.60</td><td>10.90</td><td>V</td><td>0.9</td><td>0.0</td><td>10.00</td><td>38.5</td><td>-28.4</td><td></td></tr> <tr> <td>826.60</td><td>18.67</td><td>H</td><td>0.9</td><td>0.0</td><td>17.77</td><td>38.5</td><td>-20.7</td><td></td></tr> <tr> <td colspan="9">Mid Ch</td></tr> <tr> <td>836.60</td><td>14.70</td><td>V</td><td>0.9</td><td>0.0</td><td>13.80</td><td>38.5</td><td>-24.6</td><td></td></tr> <tr> <td>836.60</td><td>19.83</td><td>H</td><td>0.9</td><td>0.0</td><td>18.93</td><td>38.5</td><td>-19.5</td><td></td></tr> <tr> <td colspan="9">High Ch</td></tr> <tr> <td>846.40</td><td>13.40</td><td>V</td><td>0.9</td><td>0.0</td><td>12.50</td><td>38.5</td><td>-25.9</td><td></td></tr> <tr> <td>846.40</td><td>19.25</td><td>H</td><td>0.9</td><td>0.0</td><td>18.35</td><td>38.5</td><td>-20.1</td><td></td></tr> </tbody> </table> <p>Rev. 3.17.11</p> | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBd) | ERP (dBm) | Limit (dBm) | Margin (dB) | Notes | Low Ch | | | | | | | | | 826.60 | 10.90 | V | 0.9 | 0.0 | 10.00 | 38.5 | -28.4 | | 826.60 | 18.67 | H | 0.9 | 0.0 | 17.77 | 38.5 | -20.7 | | Mid Ch | | | | | | | | | 836.60 | 14.70 | V | 0.9 | 0.0 | 13.80 | 38.5 | -24.6 | | 836.60 | 19.83 | H | 0.9 | 0.0 | 18.93 | 38.5 | -19.5 | | High Ch | | | | | | | | | 846.40 | 13.40 | V | 0.9 | 0.0 | 12.50 | 38.5 | -25.9 | | 846.40 | 19.25 | H | 0.9 | 0.0 | 18.35 | 38.5 | -20.1 | |
|----------------|---------------------|---|--------------------|-----------------------|--------------------|--------------------|-----------------------|--------------|----------------|----------------|-------|---------------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|---------------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|----------------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|
| f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBd) | ERP (dBm) | Limit (dBm) | Margin (dB) | Notes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 826.60 | 10.90 | V | 0.9 | 0.0 | 10.00 | 38.5 | -28.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 826.60 | 18.67 | H | 0.9 | 0.0 | 17.77 | 38.5 | -20.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mid Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 836.60 | 14.70 | V | 0.9 | 0.0 | 13.80 | 38.5 | -24.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 836.60 | 19.83 | H | 0.9 | 0.0 | 18.93 | 38.5 | -19.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| High Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 846.40 | 13.40 | V | 0.9 | 0.0 | 12.50 | 38.5 | -25.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 846.40 | 19.25 | H | 0.9 | 0.0 | 18.35 | 38.5 | -20.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| High Frequency Substitution Measurement Compliance Certification Services Chamber C | | | | | | | | | |
|--|---|-----------------------------|----------------------------|----------------------------|-------------------------------|----------------------|------------------------|------------------------|--------------|
| Company: | Samsung | | | | | | | | |
| Project #: | 13I16645 | | | | | | | | |
| Date: | 12/06/13 | | | | | | | | |
| Test Engineer: | Kiya Kedida | | | | | | | | |
| Configuration: | Y Position, EUT only | | | | | | | | |
| Mode: | WCDMA_HSDPA_850 | | | | | | | | |
| Band | Test Equipment: Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse. | | | | | | | | |
| Band 5 | | | | | | | | | |
| HSDPA | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBd) | ERP (dBm) | Limit (dBm) | Margin (dB) | Notes |
| | Low Ch | | | | | | | | |
| | 826.60 | 10.65 | V | 0.9 | 0.0 | 9.75 | 38.5 | -28.7 | |
| | 826.60 | 18.50 | H | 0.9 | 0.0 | 17.60 | 38.5 | -20.8 | |
| | Mid Ch | | | | | | | | |
| | 836.60 | 13.70 | V | 0.9 | 0.0 | 12.80 | 38.5 | -25.6 | |
| | 836.60 | 20.20 | H | 0.9 | 0.0 | 19.30 | 38.5 | -19.1 | |
| | High Ch | | | | | | | | |
| | 846.40 | 13.50 | V | 0.9 | 0.0 | 12.60 | 38.5 | -25.8 | |
| | 846.40 | 19.84 | H | 0.9 | 0.0 | 18.94 | 38.5 | -19.5 | |
| | Rev. 3.17.11 | | | | | | | | |

| High Frequency Fundamental Measurement Compliance Certification Services Chamber C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---------------------|--------------------|--------------------|-----------------------|---------------|----------------|---------------|-------|----------|---------------------|--------------------|--------------------|-----------------------|---------------|----------------|---------------|-------|--------|--|--|--|--|--|--|--|--|-------|------|---|------|------|-------|------|------|--|-------|------|---|------|------|-------|------|------|--|--------|--|--|--|--|--|--|--|--|-------|------|---|------|------|-------|------|------|--|-------|------|---|------|------|-------|------|------|--|---------|--|--|--|--|--|--|--|--|-------|------|---|------|------|-------|------|------|--|-------|------|---|------|------|-------|------|------|--|
| Company: Samsung Project #: 13I16645 Date: 12/05/13 Test Engineer: Kiya Kedida Configuration: Y Position, EUT only Mode: GPRS 1900MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T711 Substitution, 4ft SMA Cable (244639001) Warehouse | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;">f GHz</th><th style="text-align: left; padding: 2px;">SG reading (dBm)</th><th style="text-align: left; padding: 2px;">Ant. Pol. (H/V)</th><th style="text-align: left; padding: 2px;">Cable Loss (dB)</th><th style="text-align: left; padding: 2px;">Antenna Gain (dBi)</th><th style="text-align: left; padding: 2px;">EIRP (dBm)</th><th style="text-align: left; padding: 2px;">Limit (dBm)</th><th style="text-align: left; padding: 2px;">Delta (dB)</th><th style="text-align: left; padding: 2px;">Notes</th></tr> </thead> <tbody> <tr> <td style="text-align: left; padding: 2px;">Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.850</td><td style="text-align: left; padding: 2px;">21.7</td><td style="text-align: left; padding: 2px;">V</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.58</td><td style="text-align: left; padding: 2px;">26.40</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-6.6</td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.850</td><td style="text-align: left; padding: 2px;">21.1</td><td style="text-align: left; padding: 2px;">H</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.58</td><td style="text-align: left; padding: 2px;">25.80</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-7.2</td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.880</td><td style="text-align: left; padding: 2px;">21.4</td><td style="text-align: left; padding: 2px;">V</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.60</td><td style="text-align: left; padding: 2px;">26.14</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-6.9</td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.880</td><td style="text-align: left; padding: 2px;">21.8</td><td style="text-align: left; padding: 2px;">H</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.60</td><td style="text-align: left; padding: 2px;">26.52</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-6.5</td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.910</td><td style="text-align: left; padding: 2px;">21.4</td><td style="text-align: left; padding: 2px;">V</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.63</td><td style="text-align: left; padding: 2px;">26.22</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-6.8</td><td></td></tr> <tr> <td style="text-align: left; padding: 2px;">1.910</td><td style="text-align: left; padding: 2px;">20.3</td><td style="text-align: left; padding: 2px;">H</td><td style="text-align: left; padding: 2px;">0.85</td><td style="text-align: left; padding: 2px;">5.63</td><td style="text-align: left; padding: 2px;">25.06</td><td style="text-align: left; padding: 2px;">33.0</td><td style="text-align: left; padding: 2px;">-7.9</td><td></td></tr> </tbody> </table> | | | | | | | | | f GHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) | Delta (dB) | Notes | Low Ch | | | | | | | | | 1.850 | 21.7 | V | 0.85 | 5.58 | 26.40 | 33.0 | -6.6 | | 1.850 | 21.1 | H | 0.85 | 5.58 | 25.80 | 33.0 | -7.2 | | Mid Ch | | | | | | | | | 1.880 | 21.4 | V | 0.85 | 5.60 | 26.14 | 33.0 | -6.9 | | 1.880 | 21.8 | H | 0.85 | 5.60 | 26.52 | 33.0 | -6.5 | | High Ch | | | | | | | | | 1.910 | 21.4 | V | 0.85 | 5.63 | 26.22 | 33.0 | -6.8 | | 1.910 | 20.3 | H | 0.85 | 5.63 | 25.06 | 33.0 | -7.9 | |
| f GHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) | Delta (dB) | Notes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.850 | 21.7 | V | 0.85 | 5.58 | 26.40 | 33.0 | -6.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.850 | 21.1 | H | 0.85 | 5.58 | 25.80 | 33.0 | -7.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mid Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.880 | 21.4 | V | 0.85 | 5.60 | 26.14 | 33.0 | -6.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.880 | 21.8 | H | 0.85 | 5.60 | 26.52 | 33.0 | -6.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| High Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.910 | 21.4 | V | 0.85 | 5.63 | 26.22 | 33.0 | -6.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.910 | 20.3 | H | 0.85 | 5.63 | 25.06 | 33.0 | -7.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rev. 3.17.11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| High Frequency Substitution Measurement Compliance Certification Services Chamber C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------------|----------------------|--------------------|-----------------------|--------------|----------------|----------------|-------|--|----------|---------------------|--------------------|--------------------|-----------------------|--------------|----------------|----------------|-------|--------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|---------|--|--|--|--|--|--|--|--|--------|-------|---|-----|-----|-------|------|-------|--|--------|-------|---|-----|-----|-------|------|-------|--|
| Band | Company: | Samsung | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GSM8 | Project #: | 13I16645 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 | Date: | 12/05/13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GPRS | Test Engineer: | Kiya Kedida | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Configuration: | X Position, EUT only | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Mode: | GRPS 850MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <u>Test Equipment:</u> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Margin (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>824.20</td><td>21.65</td><td>V</td><td>0.9</td><td>0.0</td><td>20.75</td><td>38.5</td><td>-17.7</td><td></td></tr><tr><td>824.20</td><td>28.63</td><td>H</td><td>0.9</td><td>0.0</td><td>27.73</td><td>38.5</td><td>-10.7</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.60</td><td>22.70</td><td>V</td><td>0.9</td><td>0.0</td><td>21.80</td><td>38.5</td><td>-16.6</td><td></td></tr><tr><td>836.60</td><td>28.87</td><td>H</td><td>0.9</td><td>0.0</td><td>27.97</td><td>38.5</td><td>-10.5</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>848.80</td><td>22.12</td><td>V</td><td>0.9</td><td>0.0</td><td>21.22</td><td>38.5</td><td>-17.2</td><td></td></tr><tr><td>848.80</td><td>29.07</td><td>H</td><td>0.9</td><td>0.0</td><td>28.17</td><td>38.5</td><td>-10.3</td><td></td></tr></tbody></table> | | | | | | | | | | f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBi) | ERP (dBm) | Limit (dBm) | Margin (dB) | Notes | Low Ch | | | | | | | | | 824.20 | 21.65 | V | 0.9 | 0.0 | 20.75 | 38.5 | -17.7 | | 824.20 | 28.63 | H | 0.9 | 0.0 | 27.73 | 38.5 | -10.7 | | Mid Ch | | | | | | | | | 836.60 | 22.70 | V | 0.9 | 0.0 | 21.80 | 38.5 | -16.6 | | 836.60 | 28.87 | H | 0.9 | 0.0 | 27.97 | 38.5 | -10.5 | | High Ch | | | | | | | | | 848.80 | 22.12 | V | 0.9 | 0.0 | 21.22 | 38.5 | -17.2 | | 848.80 | 29.07 | H | 0.9 | 0.0 | 28.17 | 38.5 | -10.3 | |
| f MHz | SG reading (dBm) | Ant. Pol. (H/V) | Cable Loss (dB) | Antenna Gain (dBi) | ERP (dBm) | Limit (dBm) | Margin (dB) | Notes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 824.20 | 21.65 | V | 0.9 | 0.0 | 20.75 | 38.5 | -17.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 824.20 | 28.63 | H | 0.9 | 0.0 | 27.73 | 38.5 | -10.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mid Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 836.60 | 22.70 | V | 0.9 | 0.0 | 21.80 | 38.5 | -16.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 836.60 | 28.87 | H | 0.9 | 0.0 | 27.97 | 38.5 | -10.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| High Ch | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 848.80 | 22.12 | V | 0.9 | 0.0 | 21.22 | 38.5 | -17.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 848.80 | 29.07 | H | 0.9 | 0.0 | 28.17 | 38.5 | -10.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rev. 3.17.11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

REPORT NO: 13I16645-1A
MODEL NUMER: GT-S6293T

DATE: 12/17/13
FCC ID: A3LGTS6293T

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

GSM850/1900 & WCDMA 850

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

| Compliance Certification Services Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | | |
|---|-------------------------|---------------------|--------------------|-----------------|----------------|----------------|---------------|----------------|---------------|--|--|
| Band | Chamber | | Pre-amplifier | | Filter | | Limit | | Notes | | |
| | f GHz | SG reading (dBm) | Ant. Pol. (H/V) | Distance (m) | Preamp (dB) | Filter (dB) | EIRP (dBm) | Limit (dBm) | Delta (dB) | | |
| Low Ch, 826.40MHz | | | | | | | | | | | |
| Band 5 REL99 | 1.652 | -14.4 | V | 3.0 | 37.4 | 1.0 | -50.7 | -13.0 | -37.7 | | |
| | 2.479 | -26.2 | V | 3.0 | 36.4 | 1.0 | -61.6 | -13.0 | -48.6 | | |
| | 3.306 | -25.1 | V | 3.0 | 35.8 | 1.0 | -59.9 | -13.0 | -46.9 | | |
| | 1.652 | -15.5 | H | 3.0 | 37.4 | 1.0 | -51.9 | -13.0 | -38.9 | | |
| | 2.479 | -25.6 | H | 3.0 | 36.4 | 1.0 | -61.0 | -13.0 | -48.0 | | |
| | 3.306 | -25.0 | H | 3.0 | 35.8 | 1.0 | -59.8 | -13.0 | -46.8 | | |
| | Mid Ch, 836.6MHz | | | | | | | | | | |
| | 1.673 | -14.9 | V | 3.0 | 37.3 | 1.0 | -51.2 | -13.0 | -38.2 | | |
| | 2.510 | -25.4 | V | 3.0 | 36.4 | 1.0 | -60.7 | -13.0 | -47.7 | | |
| | 3.346 | -25.3 | V | 3.0 | 35.8 | 1.0 | -60.1 | -13.0 | -47.1 | | |
| | 1.673 | -15.9 | H | 3.0 | 37.3 | 1.0 | -52.3 | -13.0 | -39.3 | | |
| | 2.510 | -26.5 | H | 3.0 | 36.4 | 1.0 | -61.9 | -13.0 | -48.9 | | |
| | 3.346 | -24.7 | H | 3.0 | 35.8 | 1.0 | -59.4 | -13.0 | -46.4 | | |
| High Ch, 846.6MHz | | | | | | | | | | | |
| | 1.683 | -13.7 | V | 3.0 | 37.3 | 1.0 | -50.1 | -13.0 | -37.1 | | |
| | 2.519 | -25.7 | V | 3.0 | 36.4 | 1.0 | -61.0 | -13.0 | -48.0 | | |
| | 3.356 | -24.5 | V | 3.0 | 35.7 | 1.0 | -59.2 | -13.0 | -46.2 | | |
| | 1.683 | -15.8 | H | 3.0 | 37.3 | 1.0 | -52.1 | -13.0 | -39.1 | | |
| | 2.519 | -27.5 | H | 3.0 | 36.4 | 1.0 | -62.8 | -13.0 | -49.8 | | |
| | 3.356 | -25.1 | H | 3.0 | 35.7 | 1.0 | -59.9 | -13.0 | -46.9 | | |
| Rev. 03.03.09 Note: No other emissions were detected above the system noise floor. | | | | | | | | | | | |

| Compliance Certification Services Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | |
|---|--------------------------|--|---------------|-----------------|----------------|----------------|---------------|----------------|---------------|-------|
| Company: | | Samsung 13I16645 12/06/13 Trina Noor X Position, AC Charger WCDMA_HSDPA_850 | | | | | | | | |
| Chamber | | | Pre-amplifier | | | Filter | | | Limit | |
| 3m Chamber | | | T34 8449B | | | Filter 1 | | | Part 24 | |
| Band | f GHz | SG reading (dBm) | Ant. Pol. | Distance (m) | Preamp (dB) | Filter (dB) | EIRP (dBm) | Limit (dBm) | Delta (dB) | Notes |
| Band 5 HSDP A | <u>Low Ch, 826.40MHz</u> | | | | | | | | | |
| | 1.652 | -22.3 | V | 3.0 | 37.4 | 1.0 | -58.7 | -13.0 | -45.7 | |
| | 2.479 | -23.2 | V | 3.0 | 36.4 | 1.0 | -58.6 | -13.0 | -45.6 | |
| | 3.306 | -25.7 | V | 3.0 | 35.8 | 1.0 | -60.5 | -13.0 | -47.5 | |
| | 1.652 | -15.4 | H | 3.0 | 37.4 | 1.0 | -51.8 | -13.0 | -38.8 | |
| | 2.479 | -27.8 | H | 3.0 | 36.4 | 1.0 | -63.2 | -13.0 | -50.2 | |
| | 3.306 | -26.1 | H | 3.0 | 35.8 | 1.0 | -60.9 | -13.0 | -47.9 | |
| | <u>Mid Ch, 836.6MHz</u> | | | | | | | | | |
| | 1.673 | -15.2 | V | 3.0 | 37.3 | 1.0 | -51.6 | -13.0 | -38.6 | |
| | 2.510 | -26.1 | V | 3.0 | 36.4 | 1.0 | -61.4 | -13.0 | -48.4 | |
| Band 5 HSDP A | 3.346 | -24.8 | V | 3.0 | 35.8 | 1.0 | -59.6 | -13.0 | -46.6 | |
| | 1.673 | -10.3 | H | 3.0 | 37.3 | 1.0 | -46.6 | -13.0 | -33.6 | |
| | 2.510 | -26.9 | H | 3.0 | 36.4 | 1.0 | -62.3 | -13.0 | -49.3 | |
| | 3.346 | -25.0 | H | 3.0 | 35.8 | 1.0 | -59.8 | -13.0 | -46.8 | |
| | <u>High Ch, 846.6MHz</u> | | | | | | | | | |
| | 1.683 | -14.3 | V | 3.0 | 37.3 | 1.0 | -50.6 | -13.0 | -37.6 | |
| | 2.519 | -24.8 | V | 3.0 | 36.4 | 1.0 | -60.1 | -13.0 | -47.1 | |
| | 3.356 | -25.4 | V | 3.0 | 35.7 | 1.0 | -60.2 | -13.0 | -47.2 | |
| | 1.683 | -13.5 | H | 3.0 | 37.3 | 1.0 | -49.8 | -13.0 | -36.8 | |
| | 2.519 | -24.9 | H | 3.0 | 36.4 | 1.0 | -60.2 | -13.0 | -47.2 | |
| | 3.356 | -25.4 | H | 3.0 | 35.7 | 1.0 | -60.2 | -13.0 | -47.2 | |

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

| Compliance Certification Services Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | | | | | | | | | | |
|---|--|------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Company: | | Samsung | | | | | | | | | | | | | | | | | |
| Project #: | | 13I16645 | | | | | | | | | | | | | | | | | |
| Date: | | 12/07/13 | | | | | | | | | | | | | | | | | |
| Test Engineer: | | Trina Noor | | | | | | | | | | | | | | | | | |
| Configuration: | | Y Position, AC Charger | | | | | | | | | | | | | | | | | |
| Mode: | | GPRS 1900 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |

| Compliance Certification Services Above 1GHz High Frequency Substitution Measurement | | | | | | | | | | | |
|---|-------------------|------------------------|---------------------|--------------------|-----------------|----------------|----------------|---------------|----------------|---------------|-------|
| Company: | | Samsung | | | | | | | | | |
| Project #: | | 13I16645 | | | | | | | | | |
| Date: | | 12/06/13 | | | | | | | | | |
| Test Engineer: | | Trina Noor | | | | | | | | | |
| Configuration: | | X Position, AC Charger | | | | | | | | | |
| Mode: | | GPRS 850 | | | | | | | | | |
| | | Chamber | | Pre-amplifier | | Filter | | Limit | | | |
| | | 3m Chamber | | T34 8449B | | Filter 1 | | Part 24 | | | |
| | | f GHz | SG reading (dBm) | Ant. Pol. (H/V) | Distance (m) | Preamp (dB) | Filter (dB) | EIRP (dBm) | Limit (dBm) | Delta (dB) | Notes |
| | | Low Ch, 824.2MHz | | | | | | | | | |
| GSM8 50 | 1.648 | -18.1 | V | 3.0 | 37.4 | 1.0 | -54.5 | -13.0 | -41.5 | | |
| | 2.473 | -26.1 | V | 3.0 | 36.4 | 1.0 | -61.5 | -13.0 | -48.5 | | |
| | 3.297 | -25.4 | V | 3.0 | 35.8 | 1.0 | -60.2 | -13.0 | -47.2 | | |
| | 1.648 | -17.1 | H | 3.0 | 37.4 | 1.0 | -53.5 | -13.0 | -40.5 | | |
| GPRS | 2.473 | -27.0 | H | 3.0 | 36.4 | 1.0 | -62.4 | -13.0 | -49.4 | | |
| | 3.297 | -25.5 | H | 3.0 | 35.8 | 1.0 | -60.3 | -13.0 | -47.3 | | |
| | Mid Ch, 836.6MHz | | | | | | | | | | |
| | 1.673 | -18.0 | V | 3.0 | 37.3 | 1.0 | -54.3 | -13.0 | -41.3 | | |
| | 2.510 | -26.5 | V | 3.0 | 36.4 | 1.0 | -61.9 | -13.0 | -48.9 | | |
| | 3.346 | -25.4 | V | 3.0 | 35.8 | 1.0 | -60.2 | -13.0 | -47.2 | | |
| | 1.673 | -17.1 | H | 3.0 | 37.3 | 1.0 | -53.5 | -13.0 | -40.5 | | |
| | 2.510 | -27.8 | H | 3.0 | 36.4 | 1.0 | -63.1 | -13.0 | -50.1 | | |
| | 3.346 | -25.2 | H | 3.0 | 35.8 | 1.0 | -60.0 | -13.0 | -47.0 | | |
| | High Ch, 848.8MHz | | | | | | | | | | |
| | 1.698 | -17.7 | V | 3.0 | 37.3 | 1.0 | -54.0 | -13.0 | -41.0 | | |
| | 2.547 | -25.1 | V | 3.0 | 36.3 | 1.0 | -60.4 | -13.0 | -47.4 | | |
| | 3.395 | -25.4 | V | 3.0 | 35.7 | 1.0 | -60.1 | -13.0 | -47.1 | | |
| | 1.698 | -15.9 | H | 3.0 | 37.3 | 1.0 | -52.2 | -13.0 | -39.2 | | |
| | 2.547 | -26.8 | H | 3.0 | 36.3 | 1.0 | -62.2 | -13.0 | -49.2 | | |
| | 3.395 | -25.2 | H | 3.0 | 35.7 | 1.0 | -59.9 | -13.0 | -46.9 | | |

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.